




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification<sup>3</sup> :</b>  <b>G10D 3/04, 3/12, 3/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 84/ 01048</b>  <b>(43) International Publication Date:</b> 15 March 1984 (15.03.84)
<b>(21) International Application Number:</b> PCT/US83/01289 <b>(22) International Filing Date:</b> 23 August 1983 (23.08.83)  <b>(31) Priority Application Number:</b> 413,490 <b>(32) Priority Date:</b> 31 August 1982 (31.08.82) <b>(33) Priority Country:</b> US  <b>(71)(72) Applicant and Inventor:</b> STOREY, David, C. [GB/US]; 106 High Drive, Laguna Beach, CA 92651 (US).  <b>(74) Agents:</b> LAUBSCHER, Sr., Lawrence, E. et al.; Suite 300, 745 South 23rd Street, Arlington, VA 22202 (US).  <b>(81) Designated States:</b> DE, GB, JP, KP.		<b>Published</b> <i>With international search report.</i>

**(54) Title:** COMBINED BRIDGE AND VIBRATO TAILPIECE ASSEMBLY**(57) Abstract**

A combined bridge and vibrato tailpiece assembly for a guitar has a tailpiece member (24) which is manually rotated to produce a vibrato effect. A tailpiece block (2) is secured to the guitar body and tailpiece member (24) is rotatably connected to tailpiece block (2) for rotation about an axis parallel with and eccentrically offset from the longitudinal axis of tailpiece member (24) to provide a camming action. Adjustable string attachment devices (52) are connected with tailpiece member (24) and to the ends of the guitar strings which biases tailpiece member (24) in one rotational direction. A plurality of adjustable saddle rollers (108) are connected with tailpiece block (2) and act as a bridge. Tailpiece member (24) is biased by springs (86) in the other direction of rotation, and at least one lever (34) connected with tailpiece member (24) for rotating it relative to tailpiece block (2) to produce the vibrato effect.

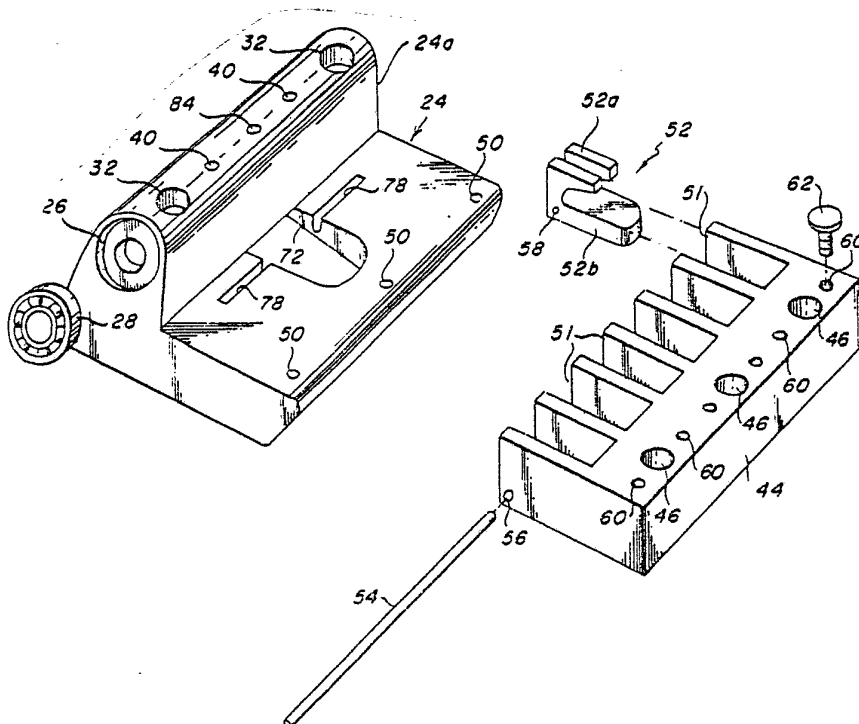

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	LI	Liechtenstein
AU	Australia	LK	Sri Lanka
BE	Belgium	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America
KP	Democratic People's Republic of Korea		

-1-

COMBINED BRIDGE AND VIBRATO  
TAILPIECE ASSEMBLY

BACKGROUND OF THE INVENTION

This is a continuation-in-part of application  
5 Serial No. 260,977 filed May 6, 1981.

The present invention relates to an improved  
bridge and tailpiece assembly for a stringed musical  
instrument wherein a tailpiece member to which the  
strings are attached is rotatable to vary the tension  
10 on the strings, thereby to produce a vibrato effect  
during the sounding of the instrument. The improved  
assembly is fully adjustable and yet has a compact  
configuration for versatile applications to stringed  
instruments.

15 BRIEF DESCRIPTION OF THE PRIOR ART

Vibrato devices for stringed musical instruments  
are well-known in the patented prior art as evidenced  
by the U.S. patents to Moseley No. 3,273,502 and Cole  
No. 3,466,962 and by the British patent No. 905,447  
20 to Underdown. The British patent, for example,  
discloses a vibrato bridge including a base having a  
platform pivotal thereon. A bridge is arranged on the  
platform adjacent the pivot and parallel to the axis  
thereof, and string attachment means are attached to  
25 the platform at one side of the bridge and pivot. A  
lever arm is attached to the platform to pivot the  
same on the base to change the tension on the strings,  
thereby to produce a vibrato effect.

The Moseley patent discloses a vibrato unit for  
30 stringed instruments which includes an adjustable bridge



-2-

for adjusting the pitch of individual strings. The vibrato unit is mounted on a base for rotation relative thereto to produce a vibrato effect. Similarly, the Cole patent discloses a tremolo device  
5 wherein an eccentrically mounted cradle member is rotated relative to a base plate to vary the tone of the sounded strings.

While the prior devices normally operate quite satisfactorily, they each possess certain inherent  
10 drawbacks which limit their versatility. In order to produce the clearest tones from a vibrato device, it is necessary to be able to adjust both the string securing devices and the bridge in as many directions as possible for each individual string. The adjustments  
15 must be easy to perform by the user of the instrument and the device must not be awkward or bulky on the face of the instrument. The prior devices do not completely fulfill these needs.

The present invention was developed to provide  
20 all of the above features in a combined bridge and tailpiece assembly which is quickly and easily secured to the body of a stringed musical instrument. The assembly has a clean, functional appearance which makes an attractive addition to the instrument while  
25 still being completely functional. The assembly includes a bridge characterized by four-way adjustments to fine tune each of the strings of the instrument and a rotatable tailpiece member upon which different  
30 string attachment devices are removably mounted for increased versatility. Furthermore, the vibrato effect produced by the assembly is improved owing to the camming action of the tailpiece member during

SUBSTITUTE SHEET



-3-

rotation thereof about an axis parallel with and eccentrically horizontally offset from the longitudinal axis of the tailpiece member.

#### SUMMARY OF THE INVENTION

5           Accordingly, it is a primary object of the present invention to provide a combined bridge and tailpiece assembly for a stringed musical instrument including a tailpiece block secured to the body of the instrument and an elongate tailpiece member having  
10   a generally L-shaped vertical cross-sectional configuration. The tailpiece member is connected at its ends with the tailpiece block for rotation in one direction about an axis parallel with and eccentrically horizontally and vertically offset from the longitudinal  
15   axis of the tailpiece member to provide camming action to the rotating tailpiece member. Longitudinally spaced attachment means are connected with the tailpiece member for attachment to the ends of the instrument strings, respectively, whereby tensioning of the  
20   instrument strings normally biases the tailpiece member in one direction of rotation. An adjustable bridge is connected with the tailpiece block and includes a plurality of saddle rollers for guiding the instrument strings to the attachment means, respectively. At  
25   least one spring is connected with the tailpiece member to bias it in the other direction of rotation, thereby to resist the rotating force exerted on the tailpiece member by the tensioned strings. A lever is connected  
30   with the tailpiece member for manually rotating the same relative to the tailpiece block during sounding

**SUBSTITUTE SHEET**



-4-

of the instrument to produce a vibrato effect.

According to a more specific object of the invention, the tailpiece member includes ball bearing means for connecting the member with the tailpiece  
5 block.

It is a further object of the invention to provide string attachment means which are adjustable in the horizontal direction.

According to yet another object of the invention,  
10 the bridge is adjustable in the horizontal, vertical, and longitudinal directions for each instrument string, with the saddle rollers further providing rotational variation for support of each string.

A further object of the invention is to provide,  
15 in conjunction with the tailpiece assembly, a string securing device connected with the neck of the instrument behind the instrument nut, whereby displacement of the strings relative to the nut is avoided in order to prevent variation in the tones  
20 produced by the strings when the tailpiece member is operated.

#### BRIEF DESCRIPTION OF THE FIGURES

Other objects and advantages will become apparent from a study of the following specification when viewed  
25 in the light of the accompanying drawing, in which:

Figs. 1, 2, and 3 are perspective, top plan, and side views, respectively, of the tailpiece block of the assembly;

Fig. 4, is an exploded view of the tailpiece member;

-5-

Fig. 5 is an exploded perspective view of an adjustable string attachment device;

Fig. 6 is a side view of the tailpiece member having a string attachment device mounted thereon;

5 Fig. 7 is a perspective view of an alternate string attachment device;

Figs. 8a, 8b, and 8c are side, sectional, and top views, respectively, of the tailpiece assembly illustrating the mounting arrangement of the levers;

10 Fig. 8d is a sectional view of a lever having an adjustable handle;

Figs. 9a-9e are perspective, rear, top, bottom and side views, respectively, of the tailpiece member illustrating the mounting arrangement of the adjustable  
15 spring biasing means;

Fig. 10 is an exploded view of a bridge element for supporting one of the instrument strings;

Figs. 11a-11f illustrate an alternate embodiment of the assembly bridge; and

20 Figs. 12a-12d illustrate a string securing device adapted to be mounted behind the nut of the instrument.

#### DETAILED DESCRIPTION

Referring first more particularly to Figs. 1, 2, and 3, the tailpiece block 2 of the combined bridge  
25 and tailpiece assembly is shown. The block has a generally U-shaped configuration with a cross member 4 connected between the forward ends thereof. The block includes a pair of recesses 6 adapted to receive vertically adjustable mounting studs 8 (Fig. 3) which  
30 are screwed into sleeves 10 in the body portion of a

SUBSTITUTE SHEET



-6-

stringed musical instrument (not shown). A pair of through-openings 12 are arranged in the tailpiece block adjacent the pair of recesses, respectively. The openings 12 are adapted to receive a pair of screws 14 which when working on the inner portions of the studs 8 are used for horizontally adjusting the tailpiece assembly relative to the instrument body when the assembly is mounted on the body. The forward portions of the tailpiece block 2 are adapted to rest and slide on auxiliary domed studs 16 which are pressed into auxiliary sleeves 18 arranged in the instrument body. The tailpiece block further includes two pairs of aligned threaded through-openings 20, 22 for purposes to be described in greater detail below.

The tailpiece member 24 will be described with reference to Figs. 4 and 6. As shown therein, the member has a generally L-shaped vertical cross-sectional configuration. The upper portion 24a of the tailpiece member contains at its opposite ends longitudinal openings 26 adapted to receive ball bearing races 28, respectively, which are used to rotatably connect the tailpiece member with the tailpiece block. Specifically, the tailpiece member is arranged within the opening of the tailpiece block between the cross member 4 and the forward portion thereof, with the ball bearing races 28 arranged opposite the aligned apertures 22 of the tailpiece block. Screws 30 (Fig. 2) are screwed into the threaded openings 22 and, in turn, the smaller diameter portions of the screw 30 passes through

SUBSTITUTE SHEET





-7-

the central portion of the ball bearing races 28 to connect the tailpiece member at its ends with the tailpiece block of the assembly. A characterizing feature of the invention is the arrangement of the tailpiece member relative to the tailpiece block. As shown in Fig. 4, the axis of rotation of the tailpiece member is eccentrically horizontally and vertically offset from the longitudinal axis of the tailpiece member, thereby to provide camming action relative to the tailpiece block during rotation of the member.

Referring now to Figs. 8a, 8b, and 8c, the upper portion 24a of the tailpiece member includes a pair of vertically arranged openings 32 adapted to receive a lever 34 which is operable to manually rotate the tailpiece member. The lower portions of the opening 32 and lever 34 are threadably connected. As shown more particularly in Figs. 8b and 8c, means are provided for adjusting the play of two levers within the two openings, wherein one lever may be used by a left-handed player of the stringed instrument and the other may be used by a right-handed player. Specifically, the tailpiece member contains a pair of longitudinal openings 36 which communicate with the openings 32, respectively, and which are adapted to receive plungers 38 having conical ends 38a. Vertical threaded openings 40 communicate with the openings 36, respectively, and are adapted to receive threaded screws 42 having conical ends 42a. Tightening of the screws 42 downwardly pushes the plungers 38 outwardly to bear against the levers 34, respectively to limit the play of the levers within the openings 32.

As shown in Fig. 8d, the lever 34 includes an adjustable handle 34a containing a channel 34b within

SUBSTITUTE SHEET



-8-

which the lever is arranged. The handle may be horizontally displaced relative to the lever in accordance with the user's preference. Grub screws 34c are tightened against the lever to lock the handle  
5 in position. The bend 34d at the end of the handle can be arranged in a variety of positions including rotational adjustment relative to the lever by tightening the grub screws.

The tailpiece member has string attachment devices  
10 mounted thereon as shown in Figs. 5-7. It will be appreciated that tensioning of the instrument strings will normally bias the tailpiece member in one direction of rotation. In Fig. 5 there is shown an adjustable string attachment device to which the ends  
15 of the strings of the musical instrument are attached. The device includes a base 44 including first vertical through-openings 46 adapted to receive screws 48 for connecting the base with the tailpiece member, which also includes threaded openings 50 aligned with the  
20 first openings 46 and is adapted to receive the screws 48. The base 44 includes in its upper surface a plurality of longitudinally spaced recesses 51 adapted to receive a plurality of inset members 52, respectively. The inset members 52 are pivotally  
25 connected with the base by a first longitudinally extending rod 54 which passes through aligned openings 56 contained in the base and aligned openings 58 contained in the inset members. Each inset member includes a hook portion 52a which receives an  
30 instrument string and to which the eyelet portion of the string end is attached, and a tongue portion 52b. The base member further includes a plurality of second

SUBSTITUTE SHEET



-9-

vertical threaded openings 60 adapted to receive a plurality of thumbscrews 62, respectively, the lower end of each thumbscrew being adapted to engage the tongue portion 52b of one of the inset members.

- 5 Adjustment of the individual thumbscrews operates to individually pivot the inset members to horizontally displace the hook portions thereof, thereby to horizontally adjust the string ends.

10 In Fig. 7 there is shown an alternate embodiment of a string attachment device which is not adjustable. The base 64 of the device contains through-openings 66 adapted to receive screws 68 for connecting the base with the tailpiece member in the same manner that the base of the adjustable string attachment device of 15 Fig. 5 is connected with the tailpiece member. The forward portion of the base 64 contains a plurality of longitudinally spaced recesses 70 within which the eyelets of the instrument string ends are attached.

As set forth above, tension of the strings attached 20 to the attachment device mounted on the tailpiece member normally biases the tailpiece member in one direction of rotation. Shown in Figs. 9a-9e are a pair of springs connected with the tailpiece member for biasing the member in the other direction against the rotating force 25 of the strings. As shown in Figs. 9b and 9d, the tailpiece member 24 contains a centrally arranged recess 72 in the lower surface thereof. A T-shaped member 74 is pivotally connected with the tailpiece member by a pin 76 which passes through aligned openings 30 78 and 80 in the tailpiece member and T-shaped member respectively. Pivotal movement of the T-shaped member is adjusted by a screw 82 which passes through

SUBSTITUTE SHEET



-10-

a vertical threaded through opening 84 in the upper portion 24a of the tailpiece member, the lower end of the screw abutting against the T-shaped member as shown in Figs. 9a, 9c, 9d, and 9e. One end of  
5 each of a pair of springs 86 is connected with the outer portion of the T-shaped member by a screw 88 cooperating with a threaded opening 90 in the T-shaped member, and the other end of each spring is connected with the underside of the tailpiece block. Adjustment  
10 of the screw 82 rotates the T-shaped member 74 about the pin 76, thereby to provide a gear reduction to vary the biasing force of the springs 86 against the rotating force exerted on the tailpiece member by the tensioned springs.

15 The tailpiece assembly further includes a bridge connected with the tailpiece block for individually guiding the instrument strings to the string attachment devices mounted on the tailpiece member. Referring to Fig. 2, the bridge is rotatably connected with the  
20 tailpiece block by a second longitudinal rod 92 which is arranged within the pair of aligned openings 20 in the tailpiece block.

A preferred embodiment of the bridge is illustrated in Fig. 10. A plurality of longitudinally spaced journal  
25 blocks 94 are provided, there being one journal block for each of the instrument strings. Each journal block contains a longitudinal opening 96 adapted to receive the second longitudinal rod, whereby the journal block is pivotal in a vertical plane relative to the tailpiece  
30 block. A support member 98 is adapted to horizontally mate with the journal block. A pressing plate 100 connected with the journal block 94 by a screw 102 cooperating with a through-opening 104 in the plate

SUBSTITUTE SHEET



-11-

and a threaded opening 106 in the journal block, secures the support member in a fixed horizontal position relative to the journal block. The support member is horizontally adjustable relative to the journal block by loosening the screw 102, horizontally sliding the support member to the desired position relative to the journal block, and then tightening the screw. The support member 98 has a saddle roller 108 for supporting an instrument string and rotatably connected therewith by a pin 110 which passes through aligned openings 112 and 114 in the roller and support member, respectively. The support member further contains a vertical threaded opening 116 adapted to receive a screw 118, the lower end of which is adapted to engage the cross member 4 of the tailpiece block. Accordingly, rotation of the screw 118 vertically displaces the support member to vertically displace the saddle roller relative to the tailpiece block.

In addition to the aforementioned horizontal and vertical adjustments of the individual journal mechanisms of the saddle rollers which collectively form the bridge for guiding the strings to the string attachment devices, the journal mechanisms are longitudinally adjustable. Specifically, the pressing plate 100 and the journal block 94 each contain aligned threaded through openings 120 and 122, respectively, adapted to receive a screw 124. Before tightening of the screw, the journal block is displaced longitudinally along the rod 92 to the desired position. The screw 124 is then tightened, whereby the lower end thereof engages the rod 92 to secure the journal block in the desired longitudinal position. The bridge of Fig. 10 is therefore adjustable in three dimensions for each

SUBSTITUTE SHEET



-12-

string of the instrument, namely, horizontally, vertically, and longitudinally. Furthermore, rotation of the saddle roller relative to the support member affords accurate string support in the event  
5 of changing tension forces on the instrument strings without damaging the string due to limited friction therebetween.

An alternate embodiment of a bridge assembly is shown in Figs. 11a-11f. A longitudinal mounting  
10 bar 126 contains a longitudinal opening 128 adapted to receive the rod 92 for pivotal connection with the tailpiece block. The mounting bar contains in its upper surface a plurality of longitudinally spaced slots 130 each of which is adapted to receive  
15 a journal block 132. Each journal block contains a threaded opening 134 adapted to receive a screw 136. The screw passes through the opening in the journal block and contains a relief in the end portion thereof to receive a circlip 138 which  
20 is engaged in a slot of the mounting bar. A spring 140 is arranged about the screw 136 to bias the journal block away from the mounting bar, and rotation of the screw displaces the journal block along the length thereof. A saddle roller 142 is  
25 rotatably connected with the saddle block by a pin 144 which passes through aligned openings in the roller and journal block. The journal block further contains a pair of vertical threaded openings 146 adapted to receive screws 148, the  
30 lower ends of which abut against the cross member

SUBSTITUTE SHEET



-13-

of the tailpiece block. Rotation of the screws 148, therefore, vertically displaces the journal block and associated saddle roller relative to the tailpiece block.

5           It is apparent that one advantage of the tailpiece assembly is that the bridge assemblies and/or string attachment means are readily removable from the assembly and replaceable with those of a different configuration in accordance with the preferences of  
10 the player of the stringed instrument on which the device is mounted.

          In operation, the player of the instrument adjusts the individual journal blocks of the bridge assembly in accordance with the strings supported  
15 thereby. Once adjusted, the entire bridge assembly is rigidly clamped about the rod 92 relative to the tailpiece block. Similarly, the player may fine tune the device by operating the thumbscrews of the string attachment devices to the desired degree for each  
20 string of the instrument. During play, rotation of the tailpiece member by the lever will produce a vibrato effect owing to a change in tension on the instrument strings. Because of the eccentric orientation of the rotational axis of the tailpiece member, the vibrato  
25 effect produced by the assembly is significantly greater, thereby producing a wider range of tones.

          In accordance with the invention, a string securing device is mounted on the neck of the stringed instrument behind the instrument nut. The string  
30 securing device enhances the operation of the combined bridge and tailpiece assembly to produce a more uniform vibrato effect as will be described with reference to

SUBSTITUTE SHEET



-14-

Figs 12a-12d wherein the string securing device is shown. The device includes a base 150 connected with the instrument behind the instrument nut by any suitable means. The base has an upright

5 portion 150a which contains a plurality of spaced recesses 152 adapted to receive a plurality of cross-shaped members 154, respectively, which are pivotally connected therein by a rod 156 which passes through aligned openings 158, 160 contained

10 in the cross-shaped members and base, respectively. The base further contains a plurality of longitudinally spaced horizontal openings 164, each of which is adapted to receive one of the instrument strings 166 (Fig. 12c) which pass over a metal insert 168 on the main portion

15 150b of the base. A T-shaped metal plate 170 is connected within the recesses of the base upright portion by a screw 172 with the cross portion 170a of the plate overlying the metal insert with the instrument string arranged therebetween as shown in

20 Fig. 12c. A thumbscrew 174 cooperates with aligned through openings 176 and threaded openings 178 in the cross-shaped member and base, respectively, to pivot the cross-shaped member up and down about the rod 156. The cross-shaped member 154 contains a pair

25 of further threaded openings 180 adapted to receive screws 182, the lower ends of which engage the metal plate 170. Thus, when the thumbscrew 174 is operated to pivot the cross-shaped member downwardly, the screws 182 press the plate 170 against the instrument

30 string to secure the same. The screws 182 are individually adjustable for securing adjacent instrument strings of



-15-

different sizes. Securing the strings behind the nut prevents the strings from being drawn across the string grooves of the nut during rotation of the tailpiece member to produce the vibrato effect, thereby avoiding incorrect tuning.

While the assembly may be formed from any suitable material, brass is the preferred material with the screws, rods, and pins preferably being made of steel.

While in accordance with the provisions of the Patent Statutes the preferred forms and embodiments of the invention have been illustrated and described, it will be apparent to those skilled in the art that various changes and modifications may be made without deviating from the inventive concepts set forth above.

SUBSTITUTE SHEET



-16-

## WHAT IS CLAIMED IS:

1. A combined bridge and tailpiece assembly for a stringed musical instrument, comprising
  - (a) a tailpiece block;
  - (b) means for securing said tailpiece block to the body portion of the instrument;
  - (c) an elongate tailpiece member having a generally L-shaped vertical cross-section configuration, said tailpiece member being connected at its ends with said tailpiece block for rotation in one direction about an axis parallel with and eccentrically horizontally and vertically offset from the longitudinal axis of said tailpiece member, thereby to provide camming action to said rotating tailpiece member;
  - (d) longitudinally spaced attachment means connected with said tailpiece member and adapted for attachment to the ends of the instrument strings, respectively, whereby tensioning of the instrument strings normally biases said tailpiece member in one direction of rotation;

-17-

- (e) adjustable bridge means connected with said tailpiece block and including a plurality of saddle rollers for guiding the instrument strings to said attachment means;
- (f) spring means biasing said tailpiece member in the other direction of rotation, thereby to resist the rotating force exerted on the tailpiece member by the tensioned strings; and
- (g) a pair of levers connected with said tailpiece member for manually rotating the same relative to said tailpiece block during sounding of the instrument, thereby to produce a vibrato effect.

2. Apparatus as defined in claim 1, and further comprising ball bearing means for connecting said tailpiece member with said tailpiece block.

3. Apparatus as defined in claim 1, wherein each of said levers is vertically adjustably connected with said tailpiece member, and further comprising means for adjusting the rotational tension and play of each of said levers relative to said tailpiece member, respectively.

4. Apparatus as defined in claim 3, wherein each of said levers includes an adjustable handle, whereby

**SUBSTITUTE SHEET**

-18-

each of said levers may be independently lengthened or shortened in accordance with a user's preference.

5. Apparatus as defined in claim 1, wherein said spring biasing means has a geared pivot thereby to give easy adjustable control to the resistance to the rotating force exerted on the tailpiece member by the tensioned strings.

6. Apparatus as defined in claim 1, wherein said string attachment means are adjustable.

7. Apparatus as defined in claim 6, wherein said string attachment means includes

- (a) a base connected with said tailpiece member;
- (b) a plurality of longitudinally spaced parallel inset members;
- (c) a first longitudinally extending rod connecting said inset members with said base, said inset members being adapted for pivotal movement about said first rod; and
- (d) a plurality of thumbscrews associated with said inset members, respectively, said thumbscrews being operable to control the degree of pivotal movement of said associated inset members, whereby a string of the instrument passes through and attaches to said inset member, and further whereby

SUBSTITUTE SHEET



-19-

operation of said thumbscrew pivots said inset member to horizontally adjust the instrument string.

8. Apparatus as defined in claim 1, wherein said bridge means comprises

- (a) a plurality of journal blocks;
- (b) a second longitudinal rod adapted for rotation relative to said tailpiece block for connecting said journal blocks with said tailpiece block, said journal blocks being adapted for pivotal movement about and axial displacement along said second rod;
- (c) means for securing said journal blocks in a fixed pivotal and longitudinal position relative to said second rod;
- (d) saddle roller mounting means connected with said journal blocks, respectively, said saddle rollers being continually freely rotatable about the axes thereof, respectively;
- (e) means for horizontally adjusting said saddle roller mounting means relative to said journal blocks, respectively, in a direction transverse to the longitudinal axis of said second rod; and

**SUBSTITUTE SHEET**



-20-

- (f) means for vertically adjusting said saddle rollers relative to said tailpiece block, whereby said bridge means is adjustable in the horizontal, vertical, and longitudinal directions.

9. Apparatus as defined in claim 1, wherein said bridge means comprises

- (a) a longitudinal mounting member containing a longitudinal through-opening and having a plurality of spaced recesses in the upper surface thereof;
- (b) a third longitudinal rod passing through said mounting member longitudinal opening for connecting said mounting member with said tailpiece block, said mounting bar being adapted for pivotal movement about said third rod;
- (c) a plurality of journal blocks for supporting said saddle rollers, respectively, said saddle rollers being continually freely rotatable about the axes thereof, respectively;
- (d) means for connecting said journal blocks within the recesses of said mounting bar, said connecting means affording horizontal adjustment of said journal blocks relative to said mounting bar; and

**SUBSTITUTE SHEET**



-21-

- (e) means connected with said journal blocks  
for vertically displacing said blocks  
relative to said mounting bar.

10. Apparatus as defined in claim 1, wherein said tailpiece block includes a pair of recesses adapted to receive a pair of mounting studs on the instrument, and further wherein said tailpiece block includes means for securing said block to the mounting studs.

11. Apparatus as defined in claim 10, wherein said tailpiece block mounting means further comprises a pair of auxiliary domed studs spaced from said mounting studs for supporting the lower portion of said tailpiece block opposite said pair of recesses, each of said domed and mounting studs being vertically adjustable, whereby said tailpiece block may be vertically adjusted and tilted relative to the instrument, and further wherein said means for securing said block to the mounting studs comprises a pair of screws which are operable for horizontally adjusting said block relative to the instrument.

12. Apparatus as defined in claim 1, and further comprising a longitudinal rod for connecting said bridge means with said tailpiece block, whereby different bridge structures may be substituted on the assembly.

13. A combined bridge and tailpiece assembly for a stringed musical instrument, comprising

**SUBSTITUTE SHEET**



-22-

- (a) a tailpiece block;
- (b) means for securing said tailpiece block to the body portion of the instrument;
- (c) an elongate tailpiece member having a generally L-shaped vertical cross-sectional configuration, said tailpiece member being connected at its ends with said tailpiece block for rotation about an axis parallel with and eccentrically horizontally offset in one direction from the longitudinal axis of said tailpiece member, thereby to provide camming action to said rotating tailpiece member;
- (d) longitudinally spaced attachment means connected with said tailpiece member and adapted for attachment to the ends of the instrument strings, respectively, whereby tensioning of the instrument strings normally biases said tailpiece member in one direction of rotation;
- (e) adjustable bridge means connected with said tailpiece block and including a plurality of saddle rollers for guiding the instrument strings to said attachment means, respectively;
- (f) spring means biasing said tailpiece member in the other direction of rotation, thereby to resist the rotating force exerted on the tailpiece member by the tensioned strings;



-23-

- (g) lever means connected with said tailpiece member for manually rotating the same relative to said tailpiece block during sounding of the instrument, thereby to produce a vibrato effect; and
- (h) string securing means, including
  - (1) a base connected with said instrument behind the instrument nut, said base containing a plurality of longitudinally spaced through-holes adapted to receive the instrument strings;
  - (2) a plurality of longitudinally spaced cross-shaped members;
  - (3) rod means connecting said cross-shaped members with said base, said cross-shaped members being adapted for pivotal movement about said rod means;
  - (4) adjustable clamping means connected with said cross-shaped members for individually clamping the instrument strings; and
  - (5) a plurality of thumbscrews associated with said cross-shaped members, respectively, for vertically adjusting said cross-shaped members.

1 / 4

Fig. 1

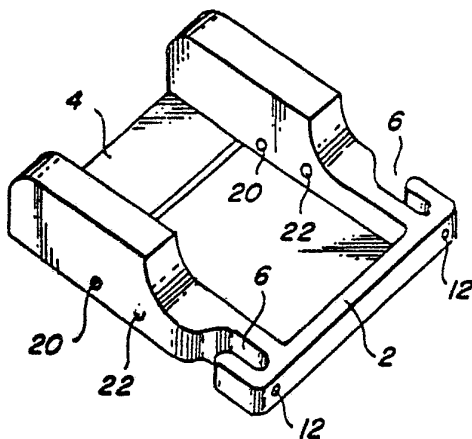


Fig. 2

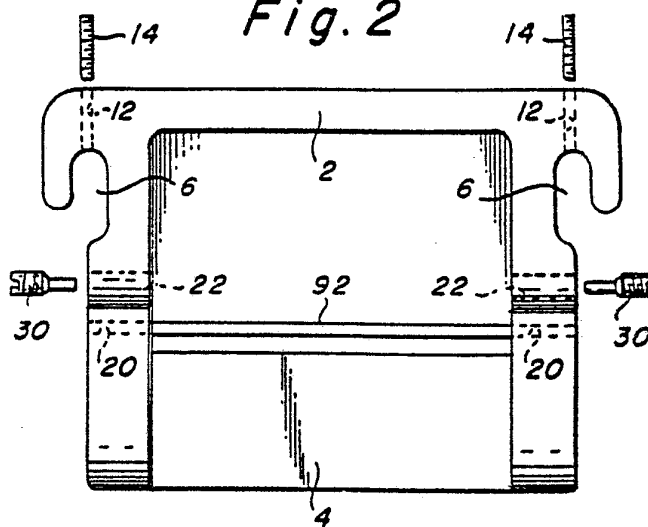


Fig. 9e

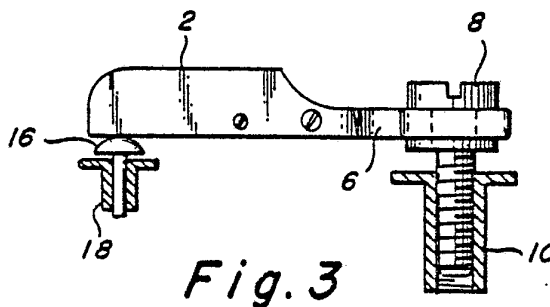
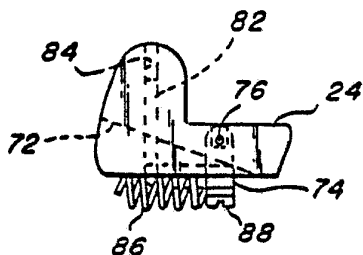


Fig. 3

Fig. 9d

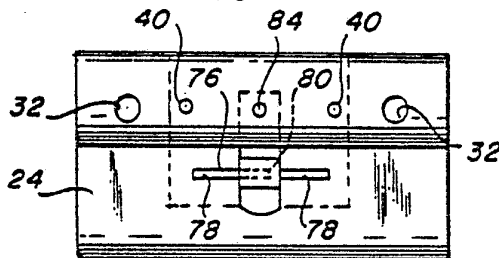
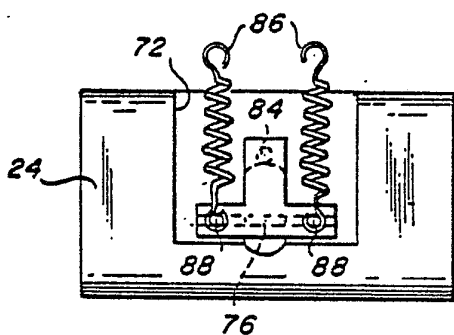


Fig. 9c

Fig. 9a


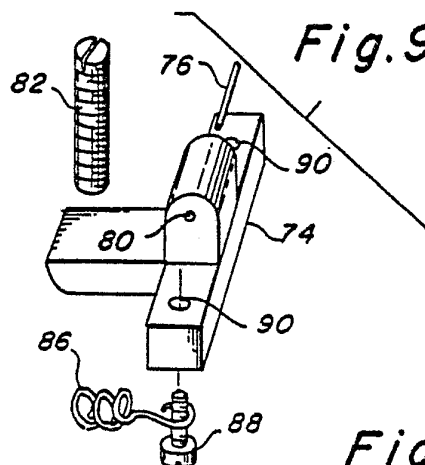


Fig. 9b

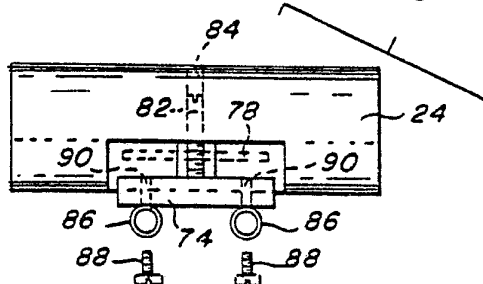

2 / 4

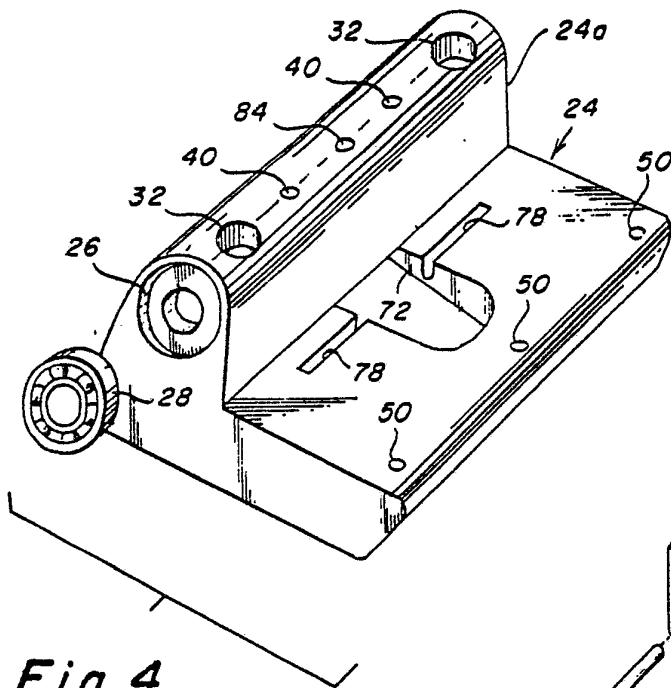


Fig. 4

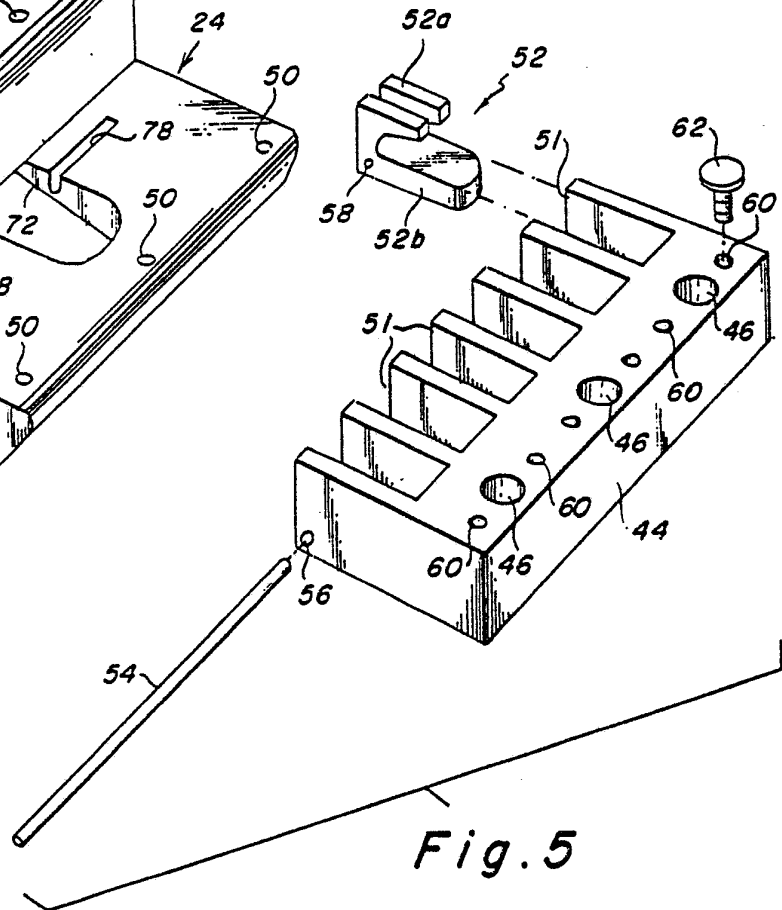


Fig. 5

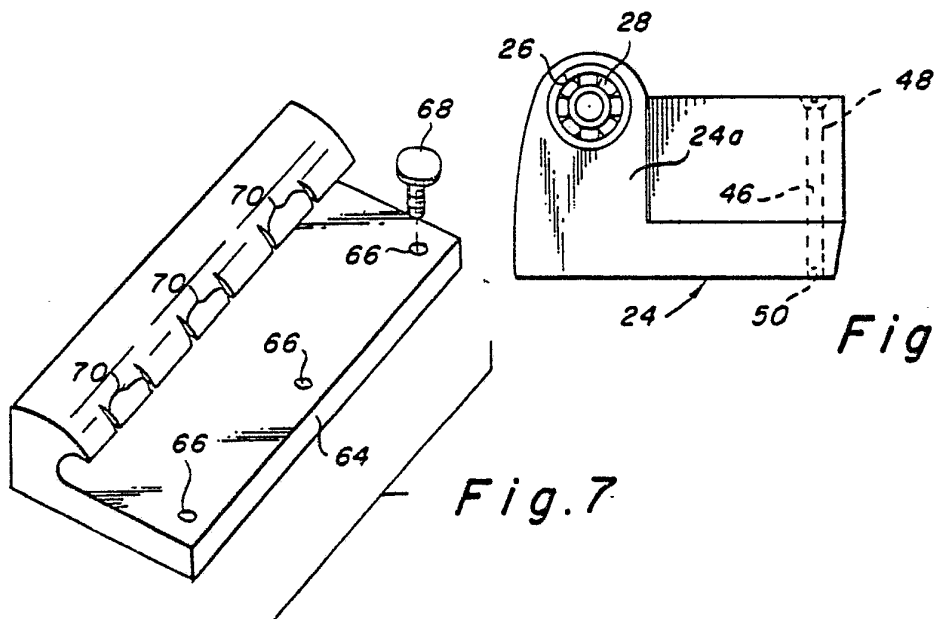


Fig. 6

Fig. 7

SUBSTITUTE SHEET



3 / 4

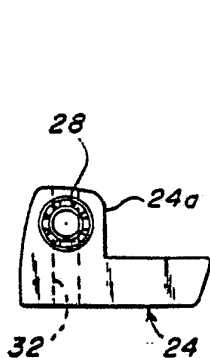


Fig. 8a

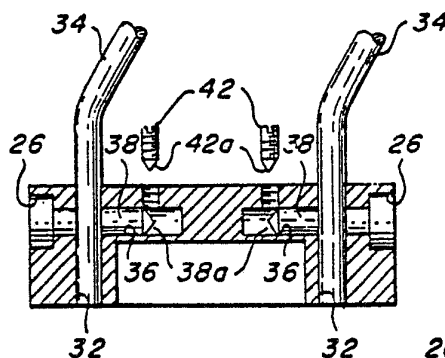


Fig. 8b

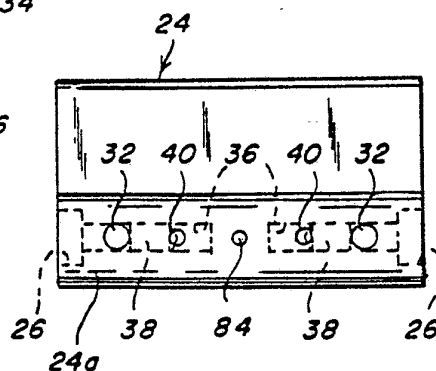


Fig. 8c

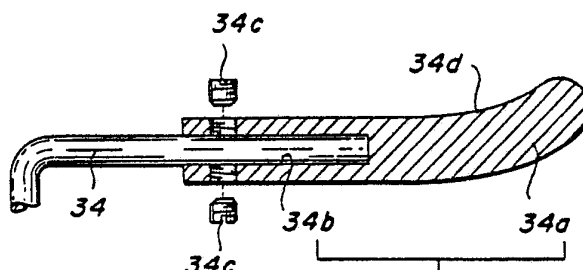


Fig. 8d

Fig. 12b

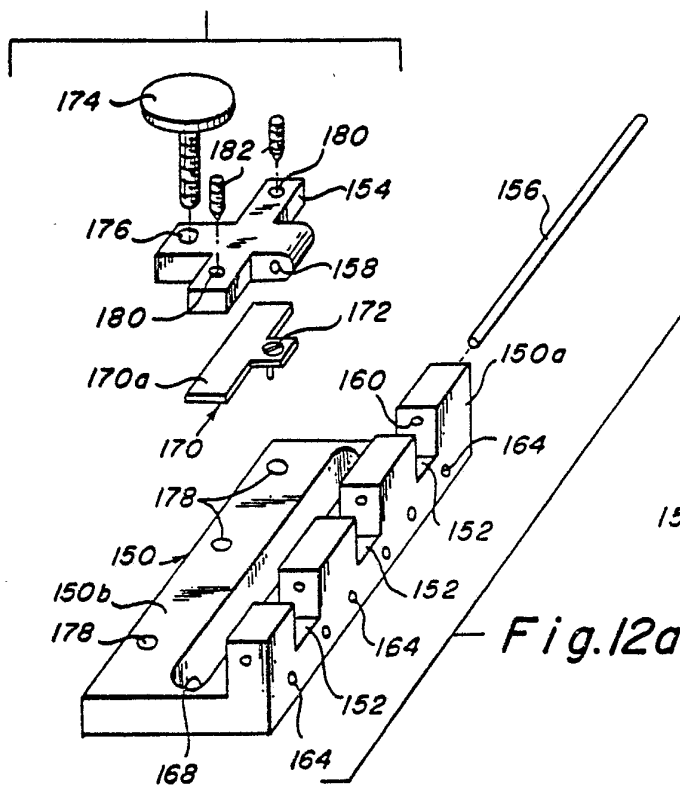


Fig. 12a

Fig. 12c


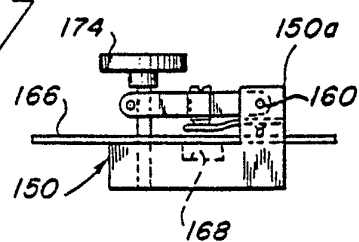


Fig. 12d



SUBSTITUTE SHEET

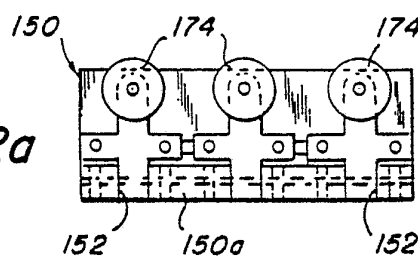

4 / 4

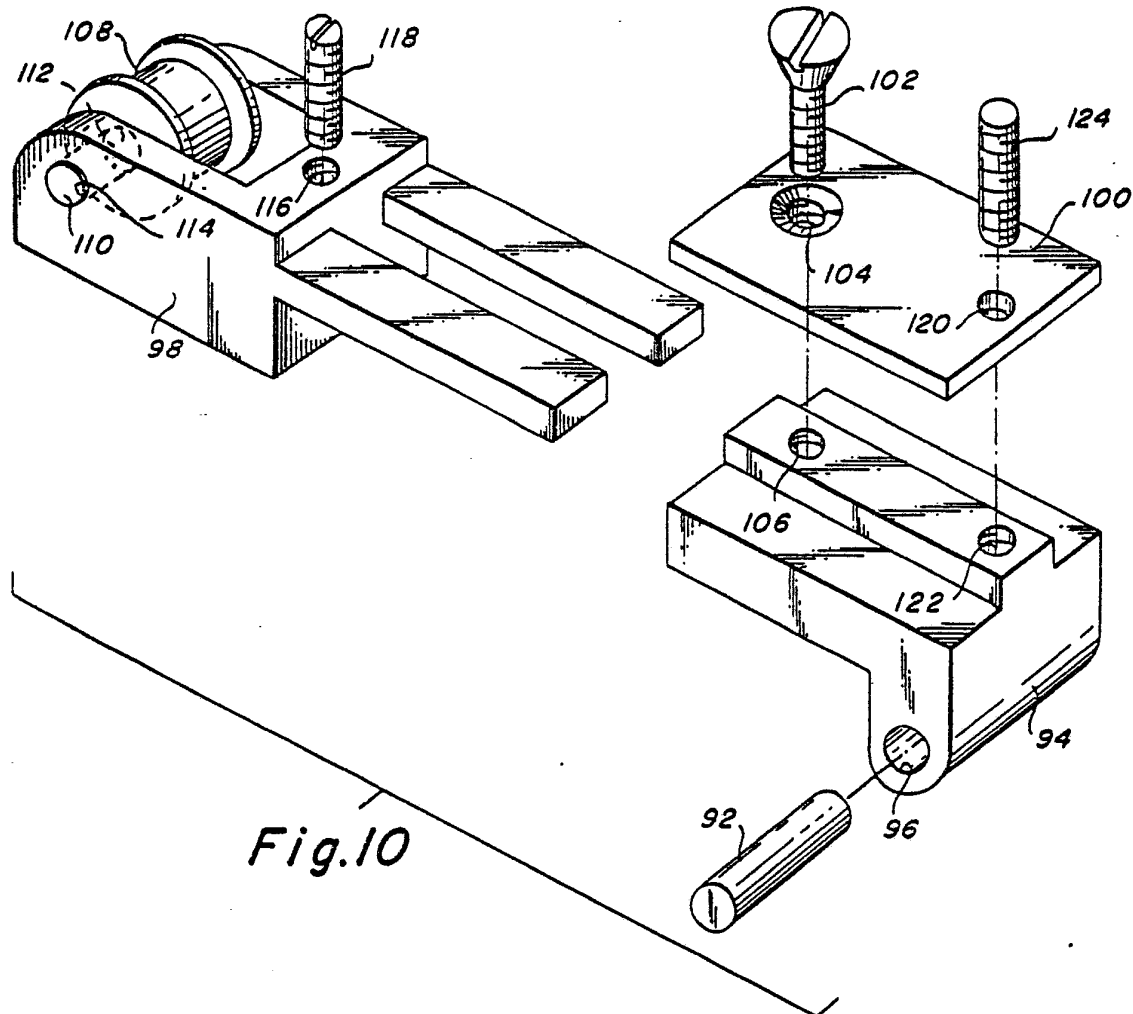


Fig. 10

Fig. 11a

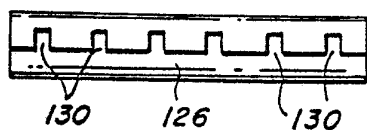


Fig. 11b




Fig. 11c

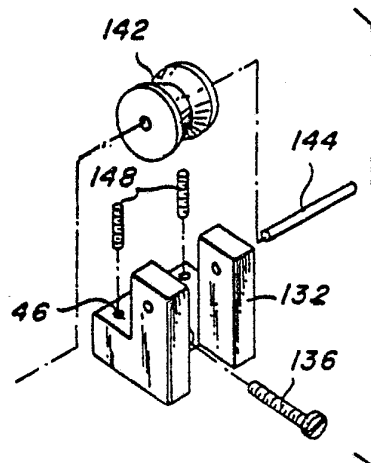


Fig. 11d




Fig. 11e





Fig. 11f

SUBSTITUTE SHEET



# INTERNATIONAL SEARCH REPORT

International Application No **PCT/US 83/01289**

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>3</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
INT. CL <sup>3</sup>	G10D 3/04, 3/12, 3/14	
U.S. CL.	84/298, 299, 307, 312, 314N	
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>4</sup>		
Classification System	Classification Symbols	
U.S.	84/298, 299, 307, 312, 314N	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>5</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup>		
Category *	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
Y	US, A, 2,226,085, (WEEDIN) 24 December 1940	13
Y	NL, A, 75,005 (REICHENBACH) 15 June 1954	1-13
Y	US, A, 2,714,326 (MC CARTY) 02 August 1955	11
Y	US, A, 2,969,703 (MATTEO) 31 January 1961	7
Y	GB, A, 905,447 (UNDERDOWN) 12 September 1962	1-13
Y	GB, A, 979,615 (BURNS ET AL) 06 January 1965	2
Y	US, A, 3,237,502 (MOSELEY) 01 March 1966	1-13
Y	US, A, 3,241,418 (FENDER) 22 March 1966	3-4
<p>* Special categories of cited documents: <sup>15</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search <sup>2</sup>	Date of Mailing of this International Search Report <sup>2</sup>	
18 October 1983	<b>31 OCT 1983</b>	
International Searching Authority <sup>1</sup>	Signature of Authorized Officer <sup>10</sup>	
ISA/US	 Lawrence R. Franklin	

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

Y	US, A, 3,326,072 (PRICE) 20 June 1967	5
Y	US, A, 4,135,426 (RICKARD) 23 January 1979	10-11
Y,P	US, A, 4,361,063 (SCHALLER) 30 November 1982	8-9

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE <sup>10</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers ..... because they relate to subject matter <sup>12</sup> not required to be searched by this Authority, namely:

2. ☐ Claim numbers ..... because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out <sup>13</sup>, specifically:

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING <sup>11</sup>

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

## Remark on Protest

☐ The additional search fees were accompanied by applicant's protest.

☐ No protest accompanied the payment of additional search fees.