

(19)



(11)

EP 2 500 512 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
26.02.2014 Bulletin 2014/09

(51) Int Cl.:
E21B 41/02 ^(2006.01) **C23F 13/18** ^(2006.01)

(21) Application number: **11158687.1**

(22) Date of filing: **17.03.2011**

(54) **Replaceable CP anodes**

Austauschbare Kathodenschutzanode

Anodes CP remplaçables

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
19.09.2012 Bulletin 2012/38

(73) Proprietor: **Vetco Gray Inc.**
Houston, TX 77041 (US)

(72) Inventor: **Bell, Robert**
Aberdeen, AB22 8ZS (GB)

(74) Representative: **Emerson, Peter James et al**
Page Hargrave
Whitefriars
Lewins Mead
Bristol BS1 2NT (GB)

(56) References cited:
GB-A- 2 118 230 GB-A- 2 372 766
GB-A- 2 464 213 US-A1- 2011 017 589

EP 2 500 512 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to anode for cathodic protection of underwater-located equipment and a method for providing corrosion protection of underwater-located equipment. Suitable underwater-located equipment may comprise a well tree for a subsea hydrocarbon fluid extraction facility for example.

Background

[0002] As is well-known, metallic equipment that is to be deployed underwater is at risk of corrosion. To protect the equipment, it is common to provide a galvanic anode (also known as a "sacrificial anode") proximate the equipment, thus providing cathodic protection (CP) for the equipment. Such anodes comprise sacrificial metal materials which have a more negative electrochemical potential than the metal of the equipment, such that when deployed, the sacrificial material of the anode is corroded more readily than the equipment metal. Currently, the most common metal materials used as the sacrificial material for galvanic anodes include alloys of aluminium, magnesium and zinc, with aluminium and zinc being favoured for subsea use.

[0003] As prior art there may be mentioned US2011/0017589, GB2464213, GB2118230, and GB 2372766 which disclose the precharacterising portion of claim 1.

[0004] Although all sea-deployed equipment is at risk of such corrosion, there are particular problems associated with hydrocarbon fluid extraction facilities deployed on the sea bed, for example well trees. These are relatively large, very expensive structures, often required to be in place for over twenty years, and there may be major safety and environmental issues if corrosion occurs.

[0005] Typically, well trees are provided with U-shaped aluminium galvanic anodes, with the "legs" of the U being welded to the tree to ensure good electrical continuity. A typical such anode is schematically shown in Fig. 1. As shown, the anode comprises a block of aluminium 1, with a metallic leg 2 extending from each end. In use, the free ends of legs 2 are welded onto the well tree.

[0006] Current practice is to weld the anodes to the tree frame (or other structure, manifold, template, flow-base etc) at the manufacturing stage. This gives good electrical continuity for the CP system to work efficiently.

[0007] The number of anodes / quantity of aluminium used is a function of the intended field life of the tree. For trees with a long life span, this means that many anodes are required. For example, if calculations show that eight anodes will be required for a field life of twenty years, then all eight anodes will be welded to the tree frame (or other structure) in the workshop. This approach can makes the tree densely populated, and so fitting in many anodes may be difficult, and furthermore can result in anodes having to be closer to vulnerable areas than desired. In addition, placement of the anodes is important

- anode positions need to be considered carefully to minimise the dangers of hydrogen embrittlement and to optimise cathodic protection.

[0008] It is an aim of the present invention to overcome these problems, and enable effective cathodic protection of underwater equipment, such as well trees, for the duration of the equipment's operational life. Please note that in the following discussion and indeed claims, the term "anode" is used to denote an item which includes sacrificial material, and not the sacrificial material itself.

[0009] This aim is achieved by utilising replaceable galvanic anodes. In a preferred embodiment, these anodes are adapted for insertion and removal by means of a remotely operated vehicle (ROV).

[0010] In accordance with a first aspect of the present invention there is provided an anode for cathodic protection of underwater-located equipment, comprising:

a support body;
sacrificial material retained by the support body; and
attachment means for releasably attaching the anode to the equipment,
the equipment comprises a subsea well tree; and
the attachment means comprises a member for frictional engagement with the well tree, said frictional engagement causing the anode to be retained in use at the well tree,
wherein said member comprises a tapered projection from the support body, for insertion and retention within a receptacle located at the well tree.

[0011] In accordance with a second aspect of the invention there is provided a method for providing corrosion protection of underwater-located equipment, comprising the steps of:

providing an anode for cathodic protection of the equipment, the anode comprising:

a support body, sacrificial material retained by the support body, and attachment means for releasably attaching the anode to the equipment;
and
attaching the anode to the equipment,
the equipment comprises a subsea well tree; and
the attachment means comprises a member for frictional engagement with the well tree, said frictional engagement causing the anode to be retained in use at the well tree,
wherein said member comprises a tapered projection from the support body, for insertion and retention within a receptacle located at the equipment.

Advantages of using the invention

[0012] The present invention provides various advantages

tages over the prior art, including, but not limited to:

- i) each anode may take up less space on a tree than a conventional anode;
- ii) instead of requiring many anodes at a tree, relatively few need be used, these being replaced as required;
- iii) in view of i) and ii) above there is more surface space available on the tree for other purposes;
- iv) since anodes are replaced as required, there is the potential for trees to have very long lives;
- v) no welding is required;
- vi) since anodes are modular, the overall weight of the tree is reduced;
- vii) there is no need to run each anode from the surface to the tree. Since use of replaceable anodes means that a stock of anodes may be run to the seabed by ROV deployment. The ROV may then pick up each anode in turn to place it in position as required. This simplifies the activity by having only one deployment trip that could cover all equipment, e.g. trees and manifolds for example, in the local area; and
- viii) all operations may be carried out by ROV with no surface operations, i.e. replacement can be carried out in bad weather. Replacement may be performed for example during a tree inspection visit.

Description of the specific embodiments of the invention

[0013] The invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 schematically shows a known aluminium galvanic anode for use at a subsea well tree;

Fig. 2 schematically shows a cross-sectional view of an anode in accordance with an embodiment of the present invention.

[0014] A first embodiment of the invention is schematically shown in Fig. 2. Here, an anode 3 in accordance with an embodiment of the invention is shown just prior to deployment at a well tree 4. The anode 3 is designed for manipulation by an ROV, however for clarity the ROV is not shown.

[0015] Anode 3 comprises an elongate support body 10, which supports and retains a mass of sacrificial material 5. As shown, the sacrificial material 5 is circumferentially moulded around the support body 10. The material 5 may for example comprise a material selected from the group consisting of aluminium, zinc and magnesium, although other materials may be used.

[0016] One end of support body 10 comprises a member formed as a tapered projection 6. This is shaped so as to enable frictional engagement with the well tree 4, this frictional engagement causing the anode 3 in use to be retained at the tree. More particularly, the projection 6 is tapered so as to be inserted ("stabbed") and retained

within a substantially correspondingly shaped receptacle 7 provided at the well tree 4. The taper helps to ensure that electrical continuity is maintained between the anode 6 and tree 4.

[0017] Receptacle 7 is a new device, specifically adapted for retaining anodes 3, which must be located at the tree prior to anode deployment, e.g. during manufacture. Receptacles 7 are placed at suitable locations on the tree frame that allow relatively simple deployment by ROV. Generally, receptacles would be positioned at the exterior of the tree 4, but in other embodiments receptacles could be placed in the body of the tree 4, such that, for example, anode 3 may be inserted into the receptacle in the body of the tree from above (e.g. through a hole in the roof) or below (e.g. using horizontal tracks).

[0018] Friction is needed to force the surfaces of the projection 6 and receptacle 7 to merge and ensure good electrical contact. Once frictionally-engaged, a locking mechanism (not shown) such as a holding latch acts to retain the anode 3 within the receptacle. Preferably this locking mechanism would also be actuable by ROV. The latch may have various designs, as would be appreciable to those skilled in the art, such as a screw thread arrangement, or a lock bar / pin, latch, which is relatively simple relatively immune to crustacean damage.

[0019] As mentioned above, the anode 3 is designed for manipulation by an ROV. To this end, the anode comprises an ROV-friendly grab handle 8. As shown, the handle is mounted on the support body, at the distal end to the projection 6.

[0020] Anode 3 also includes buoyancy means for enabling the density of the anode to be selected, in this case comprising an air-filled cavity 9 located within the support body 10. In effect therefore, the support body 10 could be considered to comprise a sealed, hollow pipe, of sufficient strength to withstand the ambient pressure at the installation location.

[0021] The dimensions and / or filling material of the cavity are preferably selected to make the anode 3 substantially buoyancy neutral. This provides various advantages, particularly that the operation to install / replace the anode 3 would be much simpler and more cost effective. Below about one kilometre depth (i.e. the depth of the pycnocline), the density of water does not vary greatly with increasing depth, however it may be preferable to select the appropriate anode buoyancy dependent on the depth of installation. As an alternative, the anode may be made slightly more dense than the sea water at the installation, such that in the event of accidental release, the anode would sink to the sea floor to facilitate recovery.

[0022] In practice, a suitable installation procedure may be as follows:

- a) As many anodes 3 as required are loaded onto an ROV launch frame, such launch frames being known in the art;
- b) The launch frame is picked up by an ROV and

taken to the required installation location;

c) Individual anodes 3 are placed in respective well tree receptacles 7 by ROV, to create a friction fit between projection 6 and receptacle 7;

d) The positive locking mechanism is engaged to more securely retain the anode 3 in the receptacle 7.

[0023] Of course, following initial installation, old, spent, anodes would be removed by ROV before a new anode may be inserted. This would require disengagement of the positive locking mechanism, by ROV.

[0024] The anodes would preferably be included in a regular inspection process using ROV (or diver) and camera. Thus visual inspection would determine when replacement would be necessary.

[0025] The above-described embodiment is exemplary only, and other possibilities and alternatives within the scope of the invention will be apparent to those skilled in the art. For example for some installations, the buoyancy cavity 9 may be filled with materials other than air. For example, it may be preferable to fill the cavity 9 with a solid material, so that the support body is more capable of withstanding high ambient pressure without undue deformation.

[0026] Alternatively, the buoyancy means may comprise buoyancy tanks attached to the support body for example.

[0027] The anodes may optionally be fitted with simple current / voltage monitoring means to detect when CP protection lowers to unacceptable levels, indicating that replacement of the anode is required. In this case the current / voltage monitoring means could be connected to a condition monitoring system of the well.

Claims

1. An anode (3) for cathodic protection of underwater-located equipment, the equipment comprising a sub-sea well tree (4), comprising:

a support body (10);
sacrificial material (5) retained by the support body (10); and

attachment means for releasably attaching the anode (3) to the equipment,

characterised in that:

the attachment means comprises a member for frictional engagement with the well tree (4), said frictional engagement causing the anode (3) to be retained in use at the well tree (4), wherein said member comprises a tapered projection (6) from the support body (10), for insertion and retention within a receptacle (7) located at the well tree (4).

2. An anode according to claim 1, wherein the attachment means comprises a releasable positive locking

mechanism.

3. An anode according to any preceding claim, comprising a handle (8) specifically designed for manipulation by a remotely operated vehicle.

4. An anode according to claim 3, wherein the handle (8) is mounted on the support body (10).

5. An anode according to claim 1, wherein the anode comprises buoyancy means for enabling the density of the anode to be selected.

6. An anode according to claim 5, wherein the buoyancy means comprises a cavity (9) located within the support body (10).

7. An anode according to claim 6, wherein the cavity (9) is air-filled.

8. An anode according to any preceding claim, wherein the sacrificial material (5) comprises one of the group consisting of aluminium, zinc and magnesium.

9. A method for providing corrosion protection of underwater-located equipment, the equipment comprising a subsea well tree (4), comprising the steps of:

providing an anode (3) for cathodic protection of the equipment, the anode (3) comprising:

a support body (10), sacrificial material (5) retained by the support body (10), and attachment means for releasably attaching the anode (3) to the equipment; and attaching the anode (3) to the equipment,

characterised in that:

the attachment means comprises a member for frictional engagement with the well tree, said frictional engagement causing the anode (3) to be retained in use at the well tree (4), wherein said member comprises a tapered projection (6) from the support body (10), for insertion and retention within a receptacle (7) located at the well tree.

10. A method according to claim 9, wherein the anode (3) is attached to the equipment by manipulation by a remotely operated vehicle.

11. A method according to either of claims 9 and 10, wherein the anode (3) is provided with buoyancy means for enabling the density of the anode (3) to be selected.

Patentansprüche

1. Anode (3) für den kathodischen Schutz von unter Wasser befindlicher Ausrüstung, wobei die Ausrüstung ein Untersee-Bohrloch-Eruptionskreuz (4) umfasst, umfassend:
 - einen Tragkörper (10);
 - Opfermaterial (5), das von dem Tragkörper (10) gehalten wird; und ein Befestigungsmittel zum lösbaren Befestigen der Anode (3) an der Ausrüstung, **dadurch gekennzeichnet, dass:**
 - das Befestigungsmittel ein Element für den Reibeingriff mit dem Bohrloch-Eruptionskreuz (4) umfasst, wobei der Reibeingriff bewirkt, dass die Anode (3) im Einsatz an dem Bohrloch-Eruptionskreuz (4) gehalten wird,
 - wobei das Element einen verjüngten Vorsprung (6) von dem Tragkörper (10) zum Einstecken und Halten in einer an dem Bohrloch-Eruptionskreuz (4) befindlichen Aufnahme (7) umfasst.
2. Anode nach Anspruch 1, wobei das Befestigungsmittel einen lösbaren formschlüssigen Verriegelungsmechanismus umfasst.
3. Anode nach einem der vorangehenden Ansprüche, umfassend einen Griff (8), der speziell für die Manipulation von einem ferngesteuerten Fahrzeug ausgelegt ist.
4. Anode nach Anspruch 3, wobei der Griff (8) an dem Tragkörper (10) angebracht ist.
5. Anode nach Anspruch 1, wobei die Anode Auftriebsmittel zum Ermöglichen, dass die Dichte der Anode gewählt werden kann, umfasst.
6. Anode nach Anspruch 5, wobei das Auftriebsmittel einen innerhalb von dem Tragkörper (10) befindlichen Hohlraum (9) umfasst.
7. Anode nach Anspruch 6, wobei der Hohlraum (9) luftgefüllt ist.
8. Anode nach einem der vorangehenden Ansprüche, wobei das Opfermaterial (5) eines der aus Aluminium, Zink und Magnesium bestehenden Gruppe umfasst.
9. Verfahren zum Bereitstellen von Korrosionsschutz von unter Wasser befindlicher Ausrüstung, wobei die Ausrüstung ein Untersee-Bohrloch-Eruptionskreuz (4) umfasst, umfassend folgende Schritte:

Bereitstellen einer Anode (3) für den kathodischen Schutz der Ausrüstung, wobei die Anode (3) Folgendes umfasst:

einen Tragkörper (10), von dem Tragkörper (10) gehaltenes Opfermaterial (5), und ein Befestigungsmittel zum lösbaren Befestigen der Anode (3) an der Ausrüstung; und Befestigen der Anode (3) an der Ausrüstung, **dadurch gekennzeichnet, dass:**

das Befestigungsmittel ein Element für den Reibeingriff mit dem Bohrloch-Eruptionskreuz umfasst, wobei der Reibeingriff bewirkt, dass die Anode (3) im Einsatz an dem Bohrloch-Eruptionskreuz (4) gehalten wird, wobei das Element einen verjüngten Vorsprung (6) von dem Tragkörper (10) zum Einstecken und Halten in einer an dem Bohrloch-Eruptionskreuz befindlichen Aufnahme (7) umfasst.

10. Verfahren nach Anspruch 9, wobei die Anode (3) mittels Manipulation von einem ferngesteuerten Fahrzeug an der Ausrüstung befestigt wird.
11. Verfahren nach einem der Ansprüche 9 und 10, wobei die Anode (3) mit einem Auftriebsmittel zum Ermöglichen, dass die Dichte der Anode (3) gewählt werden kann, versehen ist.

Revendications

1. Anode (3) de protection cathodique d'un équipement installé sous l'eau, l'équipement comprenant un arbre de puits sous-marin (4), comprenant :
 - un corps de support (10) ;
 - un matériau sacrificiel (5) retenu par le corps de support (10) ; et
 - un moyen de fixation pour fixer de façon amovible l'anode (3) à l'équipement, **caractérisée en ce que**
 - le moyen de fixation comprend un élément destiné à s'engager par friction avec l'arbre de puits (4), ledit engagement par friction faisant que l'anode (3) soit retenue durant le fonctionnement au niveau de l'arbre de puits (4), dans laquelle ledit élément comprend une protubérance effilée (6) depuis le corps de support (10), destinée à être insérée et retenue dans un réceptacle (7) situé au niveau de l'arbre de puits (4).
2. Anode selon la revendication 1, dans laquelle le

moyen de fixation comprend un mécanisme de verrouillage positif à faculté d'ouverture.

3. Anode selon l'une quelconque des revendications précédentes, comprenant une poignée (8) conçue spécifiquement pour être manipulée par un véhicule télécommandé. 5
4. Anode selon la revendication 3, dans laquelle la poignée (8) est montée sur le corps de support (10). 10
5. Anode selon la revendication 1, l'anode comprenant un moyen de flottaison pour permettre de sélectionner la densité de l'anode. 15
6. Anode selon la revendication 5, dans laquelle le moyen de flottaison comprend une cavité (9) située dans le corps de support (10).
7. Anode selon la revendication 6, dans laquelle la cavité (9) est remplie d'air. 20
8. Anode selon l'une quelconque des revendications précédentes, dans laquelle le matériau sacrificiel (5) comprend l'un du groupe consistant en aluminium, zinc et magnésium. 25
9. Procédé de protection contre la corrosion d'un équipement installé sous l'eau, l'équipement comprenant un arbre de puits sous-marin (4), comprenant les étapes consistant à : 30

fournir une anode (3) de protection cathodique de l'équipement, l'anode (3) comprenant : 35

un corps de support (10), un matériau sacrificiel (5) retenu par le corps de support (10), et un moyen de fixation pour attacher de façon amovible l'anode (3) à l'équipement ; et 40

fixer l'anode (3) à l'équipement,


caractérisé en ce que


le moyen de fixation comprend un élément destiné à s'engager par friction avec l'arbre de puits, ledit engagement par friction faisant que l'anode (3) soit retenue durant le fonctionnement au niveau de l'arbre de puits (4), 45

dans lequel ledit élément comprend une protubérance effilée (6) depuis le corps de support (10), destinée à être insérée et retenue dans un réceptacle (7) situé au niveau de l'arbre de puits (4). 50
10. Procédé selon la revendication 9, dans laquelle lequel l'anode (6) est fixée à l'équipement par manipulation d'un véhicule télécommandé. 55

11. Procédé selon l'une ou l'autre de la revendication 9 ou de la revendication 10, dans laquelle l'anode (3) est dotée d'un moyen de flottaison pour permettre de sélectionner la densité de l'anode (3).

Fig. 1 - Prior Art

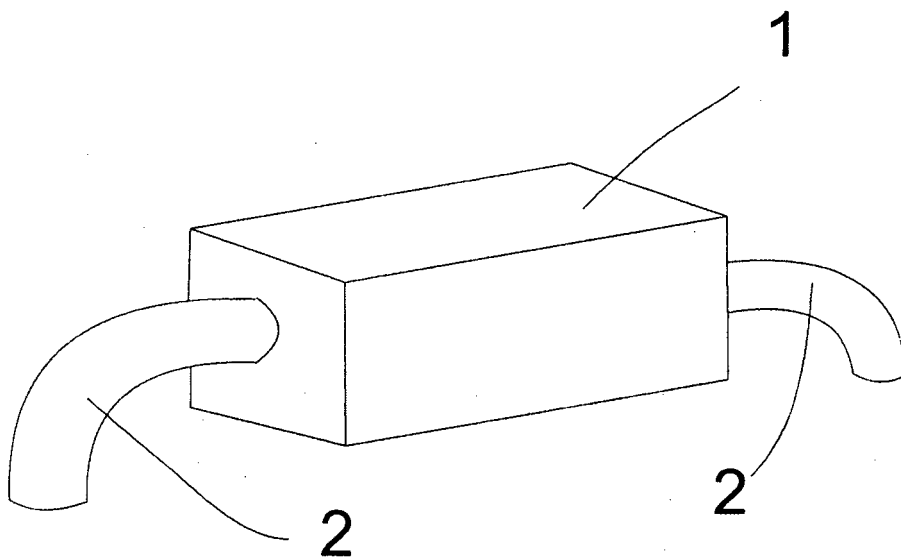

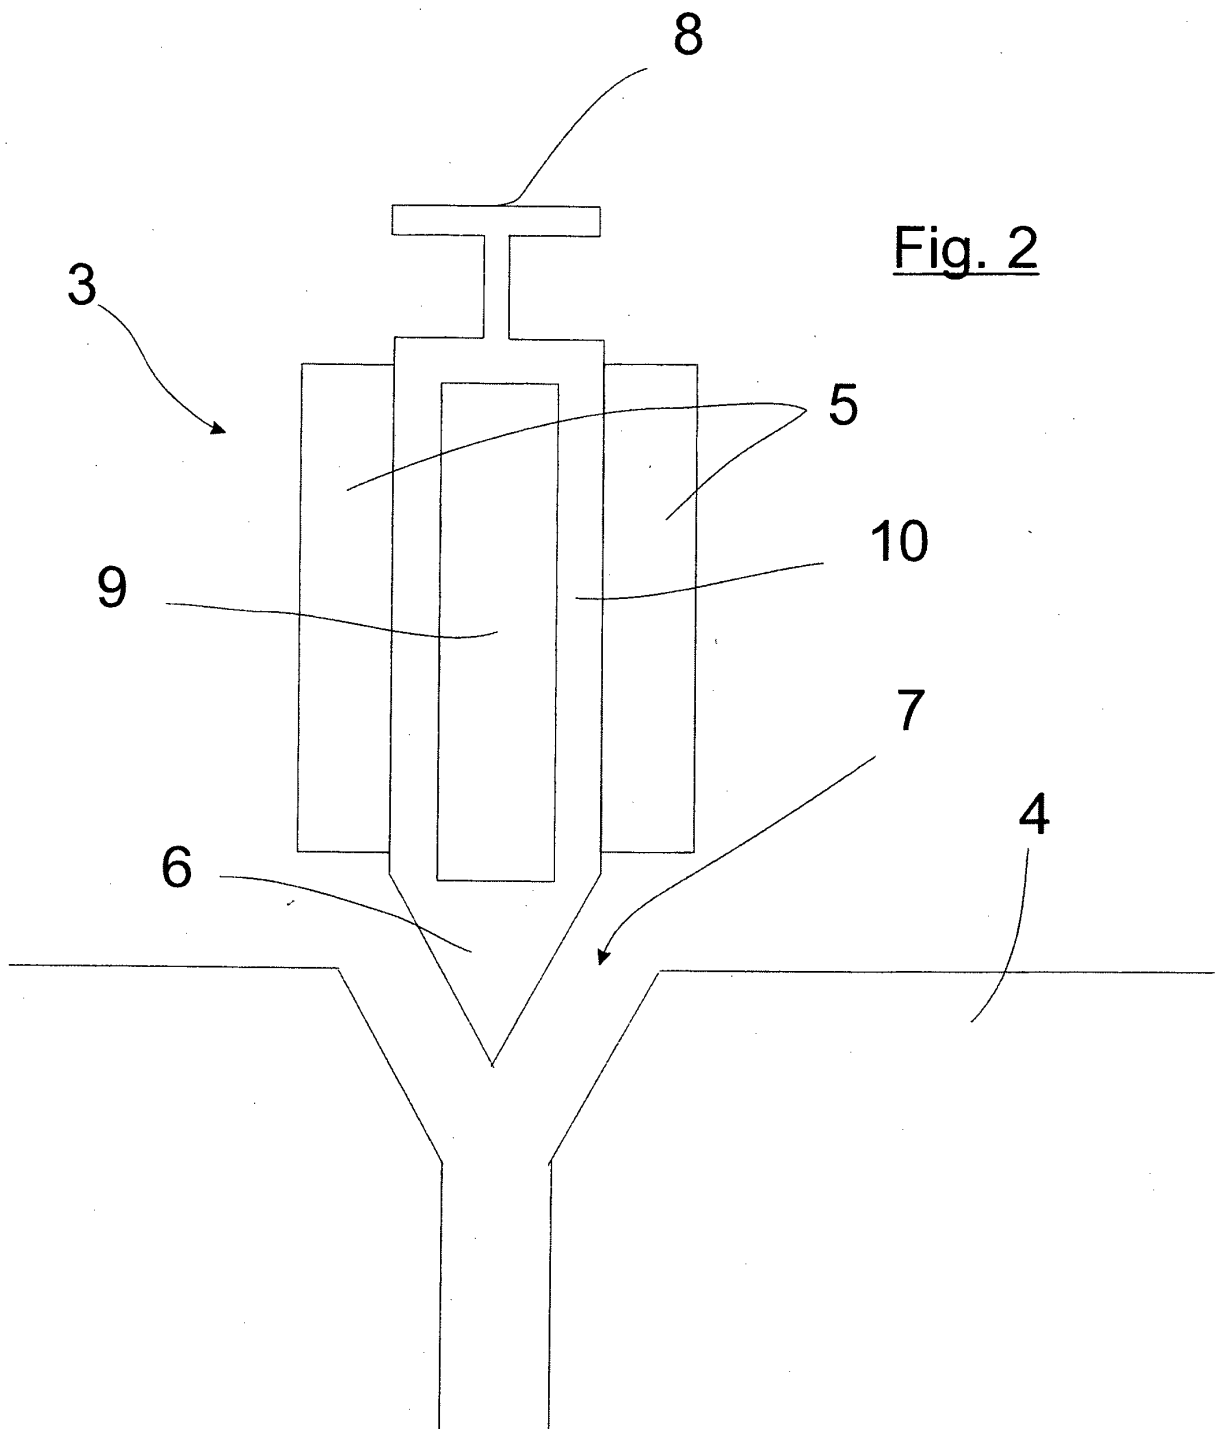

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20110017589 A [0003]
- GB 2464213 A [0003]
- GB 2118230 A [0003]
- GB 2372766 A [0003]