



NEW EUROPEAN PATENT SPECIFICATION

Date of publication of the new patent specification : **26.08.92 Bulletin 92/35**

Int. Cl.⁵ : **C23F 13/02**

Application number : **86903075.9**

Date of filing : **28.04.86**

International application number :
PCT/US86/00933

International publication number :
WO 86/06759 20.11.86 Gazette 86/25

CATHODIC PROTECTION SYSTEM FOR A STEEL-REINFORCED CONCRETE STRUCTURE AND METHOD OF INSTALLATION.

Priority : **07.05.85 US 731420**

Date of publication of application :
27.05.87 Bulletin 87/22

Publication of the grant of the patent :
11.10.89 Bulletin 89/41

Mention of the opposition decision :
26.08.92 Bulletin 92/35

Designated Contracting States :
AT BE CH DE FR GB IT LI LU NL SE

References cited :
EP-A- 0 147 977
GB-A- 634 217
GB-A- 885 817
GB-A- 896 912
GB-A- 1 285 417
GB-A- 1 534 950
GB-A- 1 562 720
GB-A- 1 603 843
GB-A- 2 140 456
GB-A- 2 175 609
US-A- 1 140 117

References cited :
US-A- 2 933 410
Patents Abstracts of Japan, vol. 5, no. 75
(C-55)(747), 19 May 1981
"Raychem FEREX 100, Cathodic Protection
Anode for the Prevention of Corrosion in Con-
crete", 1983, Raychem Corp.
Engineering News Record, June 1984

Proprietor : **ELTECH SYSTEMS**
CORPORATION
Town Executive Center 6100 Glades Road
Suite 305
Boca Raton Florida 33434 (US)

Inventor : **BENNETT, John, E.**
1806 West Jackson Street
Painesville, OH 44077 (US)
Inventor : **POHTO, Gerald, R.**
4443 Brighton Road
Mentor, OH 44060 (US)
Inventor : **MITCHELL, Thomas, A.**
10211 Page Drive
Mentor, OH 44060 (US)

Representative : **Cronin, Brian Harold John et**
al
c/o DST SA 9, Route de Troinex
CH-1227 Carouge/GE (CH)

EP 0 222 829 B2

Description

This invention relates generally to cathodic protection systems for steel-reinforced concrete structures such as bridge decks, parking garage decks, piers and supporting pillars therefor, as well as to methods of installation of such systems.

Background of the invention

The problems associated with the corrosion of reinforcing steel in concrete are now well understood. Steel reinforcing has generally performed well over the years in concrete structures such as bridge decks and parking garages, since the alkaline environment of portland cement causes the surface of the steel to "passivate" such that it does not corrode. Unfortunately, a dramatic increase in the use of road salt in the early 1960's together with an increase in coastal construction resulted in a widespread deterioration problem.

This problem developed because chloride ions, whether contained in deicing salt, in sea water, or added to fresh concrete, destroy the ability of concrete to keep the surface of the steel in a passive state. It has been determined that a chloride concentration of 0.6 to 0.8 Kg per cubic meter of concrete is the critical value above which corrosion of steel in concrete can occur. The resulting corrosion products occupy 2.5 times the volume of the original steel, and this exerts tensile stresses on the surrounding concrete. When these stresses exceed the tensile strength of the concrete, cracking and delaminations develop. With continued corrosion, freezing and thawing, and traffic load, further deterioration occurs and potholes develop.

Major research and development efforts in the field of concrete quality, construction practices, surface sealers, waterproof membranes, coated reinforcing steel, speciality concretes, and corrosion inhibitors have improved the status for new deck construction. It is generally agreed that new bridge decks constructed using selected protection systems will exhibit a long life with few maintenance problems. But many concrete structures built prior to the mid 1970's are in large part salt contaminated and continue to deteriorate at an alarming rate. Cathodic protection is recognized as the only means of stopping corrosion of steel in concrete without complete removal of the salt contaminated concrete.

Cathodic protection reduces or eliminates corrosion of a metal by making it a cathode by means of an impressed DC current or by attachment to a sacrificial anode. In this way external energy is supplied to the steel surface forcing it to function as a current receiving cathode and preventing the formation of ferrous ions. Cathodic protection was first applied to a reinforced concrete deck in June 1973. Since that time, understanding and techniques have improved, but the impressed current anodes used to distribute current to the reinforcing steel continue to be a major limitation. The anode should have the following properties :

1. Ability to withstand traffic loads and environmental conditions.
2. Design lifetime equal to or greater than the wearing surface life.
3. Sufficient surface area such that premature deterioration of the surrounding concrete does not occur, and that a good distribution of current is provided to the reinforcing steel.
4. Economically justifiable to install and maintain.

Historically, three different types of anodes have been used for cathodic protection of steel in concrete bridge decks : conductive overlays, slotted non-overlay, and distributed anodes with non-conductive overlay.

The conductive overlay was the first anode to be used and is still regarded as a useful system. In this case the anode typically consists of a mixture of asphalt, metallurgical coke breeze, and aggregate in conjunction with high silicon cast iron serving as the current contact. This system provides very uniform current distribution over the deck surface, and because the anode surface area is high, no evidence of acid or other chemical attack from anodic reaction products has been found on the underlying portland cement. The coke-asphalt overlay has exhibited structural degradation in a number of instances, however, and the time to replacement is limited to a few years. Also, freeze-thaw deterioration of improperly air-entrained concrete beneath the overlay has limited its use to decks with proper air-void systems.

Slotted non-overlay anodes were developed to extend anode life and applicability, and to realize a system which would not increase the dead load and height of the bridge deck. In this system parallel slots are first cut into the deck approximately 30-45 cm. apart. The slots are filled with a "conductive grout" mixture of carbon and organic resin which serves as the anode surface. Because the conductive grout has a limited conductivity, current is distributed to the anode by a system of platinized metal and carbon strand conductors. This anode exhibited adequate strength and freeze-thaw durability, but because its surface area is small, the adjacent concrete often experiences attack from the acid and gases which are a product of the anodic reaction. Also, distribution of current to the reinforcing steel is not ideal since the slots are widely separated. Failure was also experienced due to cracking or some other discontinuity since there is not a redundancy of current connections. Furthermore, this system is labor intensive and difficult to install.

Distributed anodes with ionically conductive overlays are similar to slotted systems, but are often easier to install. In one modification the conductive polymer grout anode is placed directly on top of the existing deck surface, together with platinized metal wire and carbon strand current conductors, and the anode is overlaid with latex-modified or conventional concrete. Rigid non-conductive overlays are often favored because they extend the deck life, retard additional salt penetration minimize freeze-thaw damage to underlying concrete, and provide a new skid resistant riding surface. This system still experiences the same disadvantages as the slotted system regarding current distribution, acid or gas attack, and lack of redundancy.

An alternative anode for use with rigid ion-conductive overlays utilizes a flexible polymeric anode material which does not require a conductive backfill. It is produced as a continuous cable and woven into a large mesh, placed on the deck and covered with a conventional rigid overlay. This system is less time consuming to install, but still has the disadvantages of current distribution, acid or gas attack, and lack of redundancy. Such polymer anodes have been described in U.S. Patents 4 473 450 and 4 502 929. As commercially offered, these polymer anodes are woven into a mesh with voids measuring about 20 cm. by 40 cm. Any breakage of the cable at a given point will thus impair the cathodic protection effect over a considerable area. Also the thickness of the cable (about 8 mm) is a limitation where only thin overlays are desirable.

A fourth type of system has more recently evolved for use on substructures in which the anode material is painted or sprayed directly on the concrete surface. For example, carbon loaded paints and mastics can be applied to the concrete. This provides a large anode area and ideal current distribution to the reinforcing steel. Additional platinized wire or carbon strand current connectors are needed, however, since the resistivity is high, and the anode material often peels off resulting in a short lifetime.

For example, published UK Patent Application 2 140 456A describes a conductive overlay system in which a conductive paint is applied to the surface of concrete to form an anode film. Primary anodes of platinized titanium or niobium are spaced apart each 10-50 meters for the supply of current to the anode film and thus serve essentially as current lead-ins.

An anode of flame-sprayed zinc has also been used (see for example US Patent 4 506 485). Originally it was thought that zinc would function as a natural galvanic anode therefore eliminating the requirement of DC power supply. It has since been established that the fixed natural voltage of zinc is too low to throw the current for sufficient distance through the concrete, however, and a power supply and current distribution system are still required. This problem coupled with the problem generated by the expansive corrosion products of zinc, have lead to minimal use of sacrificial anode systems on bridges.

With the exception of the system using zinc anodes, every system for cathodic protection of reinforcing steel in concrete has to date used carbon as the electrochemically active anode surface. Carbon was probably first used because of its extensive use as an anode in traditional cathodic protection. It was also used because cathodic protection in concrete requires very low current densities, which infers a very large anode surface area. This implies that the anode must be low cost, and carbon is relatively inexpensive.

Since pure carbon is not available in a structure which would be suitable for use in concrete, carbon was used as a conductive filler in organic resins, thermoplastic polymers, paints, and mastics. This technique put carbon into a physical form which could be used in conjunction with concrete, but other disadvantages of carbon remain. Carbon has a low electrical conductivity relative to metals, requiring an elaborate system of current conductors. Also, carbon is thermodynamically unstable as an anode, reacting to form carbon dioxide CO_2 , carbonic acid H_2CO_3 , and carbonates HCO_3^- and CO_3^{2-} , reaction products which are potentially harmful to portland cement. These reactions are known to be kinetically slow, but the effect of such reactions on anode lifetime may still be significant since, when in contact with a solid electrolyte such as concrete, even a small amount of oxidation will disrupt the anode-electrolyte interface causing a loss of electrical contact. Finally, carbon is a poor anode from the standpoint of electrochemical activity. Single electrode potentials at carbon anodes will be relatively high when operated in chloride contaminated concrete resulting in the release of chlorine gas Cl_2 , and hypochlorite ClO^- . These reaction products will probably not be harmful to concrete, but they are strong oxidizers which react with the organic binders used, again causing concern over anode lifetime.

In summary, none of the anodes used to date exhibit all of the properties desirable for cathodic protection of steel in concrete. Although many appear to be economically justifiable, many lack sufficient area to prevent deterioration of the concrete adjacent to the anode, many do not result in an ideal current distribution, and all present serious questions about anode lifetime. Zinc anodes are oxidized to zinc oxide which disrupts the anode-concrete interface. All anodes containing carbon operate at a high single electrode potential and generate chlorine, acid, and carbon dioxide, products which are likely to cause eventual damage to the adjacent concrete and to the organic matrix used to bind the carbon.

Electrocatalytically active anodes with noble metal substrates are known and have been successfully used in a number of applications, in particular chlorine, chlorate and hypochlorite production and as oxygen-evolving

anodes in metal winning processes. Generally, the cost of such electrodes makes them particularly advantageous in "high" current density applications, e. g., 6-10 KA/m² for chlorine production in a mercury cell or 3-5 KA/m² in a membrane cell. Such electrodes have also been proposed for cathodic protection, but have found only limited applications in this area. In one typical cathodic protection arrangement, a wire of platinized copper-cored titanium is used to protect a metal structure. PCT Application W080/01488 described such an arrangement in which the platinized wire is wound around an insulating rope. UK Patent Application 2 000 808A proposed replacing the conventional platinized wires or rods with a channel-sectioned valve metal strip having anodically active material on the U or V-shaped spine.

Platinized valve metal meshes have also been proposed for cathodic protection of certain structures. See for example "Corrosion/79" paper number 194 which describes use of a rigid titanium expanded mesh measuring less than 0.05 m² and coated with a layer of 1-15 micron of platinum capable of carrying a current density of 2.15 A/dm². This was used as a discrete anode in groundbeds containing carbonaceous backfill. Rigid anode meshes of this type having an overall area up to 0.5 m² have been offered as discrete anodes for the protection of remote structures.

U.S. 4 519 886 describes a linear type of anode structure for the cathodic protection of metal structures comprising a plurality of cylindrical anode segments spaced along and connected to a power supply cable. The cylindrical anode segments may be made of expanded titanium bent to shape and coated with a mixed metal oxide coating.

Obviously, none of the known coated valve metal electrodes including those proposed for other cathodic protection applications would be suitable for the cathodic protection of concrete structures. In particular, the anode designs are unsuitable for installation in this application and the cost of protecting an installation would be prohibitive.

Summary of the invention

One main aspect of the invention as set out in the accompanying claims is a novel cathodically-protected steel-reinforced concrete structure comprising an impressed-current anode embedded in an ion-conductive overlay on the concrete structure, wherein the anode comprises at least one sheet of valve metal mesh having a pattern of voids defined by a network of valve metal strands. The strands of each mesh are connected at a multiplicity of nodes providing a redundancy of current-carrying paths through the mesh which ensures effective current distribution throughout the mesh even in the event of possible breakage of a number of individual strands. The surface of the valve metal mesh carries an electrochemically active coating. Furthermore, the anode comprises at least one current distribution member for supplying current to the valve metal mesh. The sheet or sheets of the valve metal mesh extend essentially continuously over an entire area of the structure to be protected with no discontinuity (i. e. between two adjacent sheets of the mesh) which is larger, in two mutually perpendicular directions, than twice the largest dimension of the voids of the mesh. In other words, the entire area of the structure to be protected, excluding non-protected openings for obstacles and the like, is covered by a single piece of the mesh, or several pieces in close proximity with one another.

Preferably, the mesh consists of a sheet of expanded valve metal, typically titanium and with a maximum thickness of 0.125 cm, which has been expanded by a factor of at least 10 times and preferably 15 to 30 times. This provides a substantially diamond shaped pattern of voids and a continuous network of valve metal strands interconnected by between about 500 to 2 000 nodes per square meter of the mesh. Such a mesh is highly flexible and can be made in sheets of large dimensions which are conveniently coiled about an axis parallel to the long way of the diamond pattern.

As an alternative to using a sheet of highly expanded valve metal mesh, it is possible to employ a valve metal mesh constructed of valve metal ribbons connected together, e. g., by welding typically in a hexagonal or honeycomb pattern. Such a composite mesh should meet up to the same requirements concerning its dimensions and configuration as set out above for the expanded meshes.

Each current distribution member is preferably a strip of valve metal coated with the same electrochemically active coating as the mesh and is metallurgically bonded to the mesh. In many installations such as parking garage decks and bridge decks, the current distributor strips may advantageously be bonded to the mesh with a spacing of between about 10 and 50 meters, calculated to provide an adequate current density to the mesh. In such installations, it is also cost saving and convenient to have a common current distributor strip bonded to and extending across at least two sheets of the valve metal mesh, for example across two elongated sheets of the mesh which have been rolled side-by-side from two rolls.

Most advantageously, the current distributor strips are spot welded to the nodes of the mesh. This spot welding can be achieved on the facing surfaces of the mesh and strip which are coated with an adequately thin electrocatalytic coating.

Points of the mesh may be fixed to the concrete structure by fasteners inserted in drill holes in the structure. Alternative means of fixing the mesh to the structure prior to applying the ion-conductive overlay are also possible, including the use of adhesive. This will be more fully described in connection with the installation procedure.

At least two sheets of the mesh may overlap with one another, either overlapping edges of two side-by-side long sheets which may assist in reducing the number of anchorage points during assembly, or overlapping end sections where the overlap may be designed to provide electrical connection. However, providing each sheet is associated with a current distribution member, the sheets do not have to be in touching relationship but may be spaced apart conveniently up to a spacing corresponding to about the maximum size (LWD) of the usually diamond shaped apertures of the mesh.

Also, at least one sheet of the mesh may have a cut-out section bounding an obstacle on the structure, such as a drain in a parking garage deck or an aperture through the deck for connection of the current distributors to a current supply.

It is also possible, but usually not preferred, for adjacent sheets of the mesh to be welded together directly or by means of a connecting strip.

For most structures, the ion-conductive layer comprises about 3-6 cm thick of portland cement or polymer-modified concrete applied in a single pass e. g. by pouring. Usually, the overlay is preceded by the application of a bonding grout, i. e. a separate cement-based grout without large aggregate which is mixed-up, poured on the surface and brushed over the mesh immediately before overlay.

The cathodically-protected structure according to the invention preferably also has a current supply connected to the current distributors and arranged to supply a cathodic protection current at a current density of up to 100 mA/m² of the surface area of the strands of the mesh, either a continuous current or intermittent.

When the structure is a concrete deck covered by a series of side-by-side elongate sheets of the mesh with a common current distributor strip extending across the sheets, the current distributor strip may conveniently extend through an aperture in the deck to a current supply disposed underneath the deck at a location where it is readily accessible for servicing etc.

The protected structure may be an e.g. cylindrical pillar which is encased with the mesh and ion-conductive overlay. The current distributor may in this case be a strip disposed vertically on the pillar and the mesh is one or more sheets cut to size so that it is wrapped around the pillar with little or no overlap.

The invention also pertains to a method of cathodically protecting the aforementioned structure by supplying a continuous or intermittent current to the valve metal mesh at a current density, usually below 100 mA/m² of the strand surface area, which is effective for oxygen generation on the surfaces of the coated valve metal mesh. This current density can be established by taking periodic measurements of the corrosion potential of the steel using suitably distributed reference electrodes in the proximity of the reinforcing steel, and setting the operative current density to maintain the steel at a desired potential for preventing corrosion.

The reference electrodes are very advantageously also constructed of a valve metal mesh with an electrocatalytic coating. However, these reference electrodes will be relatively small, for example about 1-3 cm wide by 2-10 cm long, and are preferably made of a conventional valve metal mesh which is quite rigid. These reference electrodes are placed horizontally in recesses in the concrete structure at the same level as the steel reinforcement and spaced horizontally by about 2-3 cm from the steel; in this location they are favorably placed in the electric field and are exposed to an electrolyte composition representative of the corrosive environment around the steel. In most structures the steel is located about 3 to 10 cm below the concrete surface. Typically one or two reference electrodes are arranged for each approximately 500 m² zone of the anode mesh. The electrocatalytic coating on the reference electrodes may be the same as that on the anode mesh, or it can have a special formulation selected to produce oxygen evolution at a precise reference potential. These coated valve metal reference electrodes have considerable advantages over the heretofore used reference electrodes. For instance, the potential of this reference is not dependent on the concentration of an ionic species which may vary greatly in the electrolyte, as is the case with silver/silver chloride and copper/copper sulfate reference electrodes. Nor is the potential subject to change due to a reaction of the electrode surface, as is the case with a molybdenum/molybdenum oxide reference electrode.

The described cathodic protection system according to the invention has the following advantages:

- use of a non-corroding valve metal (titanium). The system involves no carbon or corrodable metals such as copper.

- only oxygen is evolved by the coated anode mesh in use. Active chlorine, which may itself have long term deleterious effects, is not generated as it is with other types of anode.

- metallurgical bonds (welds) are used for all electrical connections within the ion-conductive overlay. There are no mechanical connections and no copper conductors within the concrete.

- the fine mesh structure of the anode insures uniform current distribution.

- the anode mesh has thousands of interconnected strands serving as multiple current paths. These

assure that the system will continue to operate satisfactorily even if several strands are broken due to stresses in the structure or future coring.

where the mesh is connected to the current distributor, there can be several welds for each sheet of mesh even though only one or two would suffice.

the low cost of the highly expanded mesh, the low catalyst loading and the ease of installation make the system very cost effective.

Also, the electrocatalytic coating used in the present invention is such that the anode operates at a very low single electrode potential, and may have a life expectancy of greater than 20 years in a cathodic protection application. Unlike other anodes used heretofore for the cathodic protection of steel in concrete, it is completely stable dimensionally and produces no carbon dioxide or chlorine from chloride contaminated concrete. It furthermore has sufficient surface area such that the acid generated from the anodic reaction will not be detrimental to the surrounding concrete.

Another main aspect of the invention as set out in the accompanying claims is a novel method of installing a coated valve metal electrode as impressed-current anode in a cathodic protection system for a steel-reinforced concrete structure.

In this novel method, first there is provided a roll of a flexible sheet of valve metal mesh. This mesh consists of a network of valve metal strands connected at a multiplicity of nodes providing a redundancy of current-causing paths through the mesh which provide effective current distribution throughout the mesh even in the event of possible breakage of a number of individual strands. It is greatly preferred that this valve metal mesh consists of a sheet of highly expanded valve metal with a pattern of voids having on its surface an electrochemically active coating, as set out above. Optionally, the coiled mesh may have at least one valve metal current distribution member metallurgically bonded thereto and extending generally parallel to the axis of the roll. Alternatively current distribution members may be bonded to the mesh on-site, i.e. after unrolling.

The basic principle of the installation method according to the invention is that one or more rolls of the coated valve metal mesh are unrolled and installed in conformity with the concrete structure to be protected, the valve metal mesh is fixed to the structure and the fixed valve metal mesh is embedded in an ion-conductive overlay.

As mentioned above, a current-distribution member may be metallurgically bonded to the rolled mesh, i.e. prior to installation. This is particularly suitable for relatively small concrete structures such as supporting pillars. Such a current distribution member may be welded to the mesh prior to coating the mesh, or welding could take place on-site after unrolling the coated mesh and cutting it to size and before installing the mesh on the structure.

However, for most large structures it has been found highly advantageous to metallurgically bond strips of pre-coated valve metal to the mesh after unrolling it onto the structure, e.g. by on-site spot welding of the strips to the unrolled mesh. These on-site welded strips are then used as current distributors for supplying electrical current to the mesh.

For large structures such as bridge decks and parking garage deck, a preferred installation procedure involves unrolling two or more rolls of the mesh side-by-side and then connecting the meshes electrically by a common transverse current distributor strip which extends across the side-by-side meshes. Advantageously, this is achieved by laying current distributor strips on a generally flat structure to be protected. The strips of coated valve metal are spaced apart by a suitable distance calculated according to the desired current-causing capacity of the system typically within the range from 15 to 50 meters. These strips are laid transverse to the direction of unrolling of the rolls. Then the first roll is unrolled and the mesh is spot welded at its nodes to the transverse strips prior to or, preferably, after fixing the mesh to the structure. Next, the second roll of mesh is unrolled and welded to the transverse strips, and so on, until the entire structure is covered.

Alternatively, and particularly for vertical surfaces, for structures of odd shapes and for downwardly-facing surfaces, the mesh can first be unrolled onto the ground. Then current distributor strips are welded and the sheets of mesh are cut to size and, if appropriate, joined by welding. Next, the mesh with current distributor can be applied to the surface of the structure and conformed to this structure. This operation may include wrapping around curved surfaces, bending around corners, bending the mesh in its own plane, e.g. to fit a spiral surface, and stretching of the mesh as needed prior to fixing it by adequate means.

Various methods of fixing the mesh to the structure have been implemented successfully for different structures. One method involves drilling holes in the concrete and inserting fasteners of suitable shape which firmly hold the mesh down. In another method, the mesh is secured by an adhesive e.g. by applying a hot melt adhesive to nodes of the mesh and holding the mesh to the surface for example using a PTFE-coated steel heat sink. Hot melt adhesive cured in this manner sets in about 10 seconds. Alternatively, a snap-clip is secured by epoxy to the surface underneath a node of the mesh. After the epoxy has set, the hinged top of the clip is snapped down to fix the mesh. It is also possible to combine these methods, by drilling holes and inserting fasteners

at some locations and by using adhesives at other locations.

Prior to fixing, the unrolled mesh is preferably stretched longitudinally and/or laterally in order to improve its flatness and in particular to avoid any bulges. Generally a longitudinal stretching of up to about 10 % increase in its nominal SWD dimension will be quite adequate.

5 Because of the presence of the transverse current distributor strips, it is not necessary for the sides of adjacent meshes to contact one another or be welded together. In fact, a spacing of up to about 1 LWD dimension is quite satisfactory. Nevertheless, for structures requiring a large number of fastening points of the mesh e.g. if the surface is uneven or if for structural reasons the ion-conductive overlay must be very thin, it can be expedient to have the sides of the adjacent meshes slightly overlapping. This reduces the number of necessary
10 fixing points.

On large deck surfaces several rolls of mesh are rolled out and laid down side-by-side. The width of these surfaces will usually be such that the entire width can be fitted with a given number of rolls by appropriately spacing the rolls apart (usually the maximum desirable clear spacing will correspond to 1 LWD dimension of the mesh) or by bringing them close together or by making them overlap by the appropriate amount. This avoids
15 a costly operation of fitting a special edge strip of mesh.

At locations of the structure where there are obstacles such as drains in a parking garage deck, it is a relatively simple matter to cut out sections of the mesh in order to fit around the obstacles. This can be done on-site using simple wire-cutters.

For long structures exceeding the length of a single roll of the mesh, the end of one unrolled mesh may
20 overlap with the next adjacent section to provide electrical connection, or the sections could be welded together or connected by a weld strip for this purpose. This is only necessary when the end section is of insufficient length to be connected to its own transverse current distribution strip. When electrical connection is provided by overlap, firm fixing of the overlapping sections to the underlying surface is advantageous.

At extremities of a structure where the roll of mesh comes up against a wall or the like, it is a simple matter
25 to cut the mesh to a length such that the end of the mesh can be bent up against the wall and then trimmed as required.

For most structures, the ion-conductive layer comprises about 3-6 cm thick of portland cement or polymer-modified concrete applied in a single pass eg by spraying. Usually, the overlay is preceded by the application of a bonding grout, i. e. a separate cement-based grout without large aggregate which is mixed-up,
30 poured on the surface and brushed over the mesh immediately before overlay

In cases where a thin overlay is necessary for structural or other reasons, the ion-conductive overlay can be applied in several thin layers. The mesh may be substantially embedded by the first layer: for example more than 90 % of the mesh may be covered. At this point, it is possible to identify protruding sections of the mesh and flatten and/or trim these before applying the next layer or layers. An advantage of the invention, which typically employs a mesh having strands up to 0.125 cm thick is that it can be effectively used in an overlay as
35 thin as 6 mm. This cannot be achieved effectively with any other known system.

As set out above, the described method of installation of a cathodic protection system according to the invention has many advantages. The installation method is easy to perform, is not labor intensive and can be adapted easily to structures of different shapes and dimensions. By employing a valve metal anode mesh in
40 convenient coiled form, large areas of structure to be protected can be fitted rapidly. The fine anode mesh structure provides thousands of interconnected strands which serve as multiple current paths. This insures that the system will continue to operate even if any strands are broken due to stresses in the structure or future coring. On-site welding of the current distributors is simple and convenient and several welds can easily be provided for each sheet of the mesh even though only one or two would suffice. Finally, the ease of installation of the
45 mesh combined with the low cost of the highly expanded mesh with a low catalyst loading makes the system very cost effective.

Brief description of drawings

50 Figure 1 shows a diamond-shaped unit of a greatly expanded valve metal mesh employed in this invention.

Figure 2 is a section of the valve metal mesh having a current distributor welded along the LWD and welded to mesh nodes.

Figure 3 is an enlarged view of a mesh node showing the node double.

Figure 4 is a perspective view illustrating the installation procedure on a steel-reinforced concrete deck.

55

Description of the preferred embodiments

The Highly Expanded Valve Metal Mesh Anode

5 The metals of the valve metal mesh will most always be any of titanium, tantalum, zirconium and niobium. As well as the elemental metals themselves, the suitable metals of the mesh can intrude alloys of these metals with themselves and other metals as well as their intermetallic mixtures. Of particular interest for its ruggedness, corrosion resistance and availability is titanium. Where the mesh will be expanded from a metal sheet, the useful metal of the sheet will most always be an annealed metal. As representative of such serviceable
 10 annealed metals is Grade I titanium, an annealed titanium of low embrittlement. Such feature of low embrittlement is necessary where the mesh is to be prepared by expansion of a metal sheet, since such sheet should have an elongation of greater than 20 percent. This would be an elongation as determined at normal temperature, e. g., 20 °C, and is the percentage elongation as determined in a two-inch (5 cm) sheet of greater than 0.025 inch (0.635 cm) thickness. Metals for expansion having an elongation of less than 20 percent will be too brittle
 15 to insure suitable expansion to useful mesh without deleterious strand breakage.

Advantageously for enhanced freedom from strand breakage, the metal used in expansion will have an elongation of at least about 24 percent and will virtually always have an elongation of not greater than about 40 percent. Thus metals such as aluminum are neither contemplated, nor are they useful, for the mesh in the present invention, aluminum being particularly unsuitable because of its lack of corrosion resistance. Also with
 20 regard to the useful metals, annealing may be critical as for example with the metal tantalum where an annealed sheet can be expected to have an elongation on the order of 37 to 40 percent, which metal in unannealed form may be completely useless for preparing the metal mesh by having an elongation on the order of only 3 to 5 percent. Moreover, alloying may add to the embrittlement of an elemental metal and thus suitable alloys may have to be carefully selected. For example, a titanium-palladium alloy, commercially available as Grade 7 alloy
 25 and containing on the order of 0.2 weight percent palladium, will have an elongation at normal temperature of above about 20 percent and is expensive but could be serviceable, particularly in annealed form. Moreover, where alloys are contemplated, the expected corrosion resistance of a particular alloy that might be selected may also be a consideration. For example, in Grade I titanium, such is usually available containing 0.2 weight percent iron. However, for superior corrosion resistance, Grade I titanium is also available containing less than
 30 about 0.05 weight percent iron. Generally, this metal of lower iron content will be preferable for many applications owing to its enhanced corrosion resistance.

The metal mesh may then be prepared directly from the selected metal. For best ruggedness in extended metal mesh life, it is preferred that the mesh be expanded from a sheet or coil of the valve metal. It is however contemplated that alternative meshes to expanded metal meshes may be serviceable. For such alternatives,
 35 thin metal ribbons can be corrugated and individual cells, such as honeycomb shaped cells can be resistance welded together from the ribbons. Slitters or corrugating apparatus could be useful in preparing the metal ribbons and automatic resistance welding could be utilized to prepare the large void fraction mesh. By the preferred expansion technique, a mesh of interconnected metal strands can directly result. Typically where care has been chosen in selecting a metal of appropriate elongation, a highly serviceable mesh will be prepared
 40 using such expansion technique with no broken strands being present. Moreover with this highly serviceable annealed valve metals having desirable ruggedness coupled with the requisite elongation characteristic, some stretching of the expanded mesh can be accommodated during installation of the mesh. This can be of particular assistance where uneven substrate surface or shape will be most readily protected by applying a mesh with such stretching ability. Generally a stretching ability of up to about 10 percent can be accommodated from a
 45 roll of Grade I titanium mesh. Moreover the mesh obtained can be expected to be bendable in the general plane of the mesh about a bending radius in the range of from 5 to 25 times the width of the mesh.

Where the mesh is expanded from the metal sheet, the interconnected metal strands will have a thickness dimension corresponding to the thickness of the initial planar sheet or coil. Usually this thickness will be within the range of from about 0.05 centimeter to about 0.125 centimeter. Use of a sheet having a thickness of less
 50 than about 0.05 centimeter, in an expansion operation, can not only lead to a deleterious number of broken strands, but also can produce a too flexible material that is difficult to handle. For economy, sheets of greater than about 0.125 centimeter are avoided. As a result of the expansion operation, the strands will interconnect at nodes providing a double strand thickness of the nodes. Thus the node thickness will be within the range of from about 0.1 centimeter to about 0.25 centimeter. Moreover, after expansion the nodes for the special mesh
 55 will be completely, to virtually completely, non angulated. By that it is meant that the plane of the nodes through their thickness will be completely, to virtually completely, vertical in reference to the horizontal plane of an uncoiled roll of the mesh.

In considering the preferred valve metal titanium, the weight of the mesh will usually be within the range

of from about 0.05 kilogram per square meter to about 0.5 kilogram per square meter of the mesh. Although this range is based upon the exemplary metal titanium, such can nevertheless serve as a useful range for the valve metals generally. Titanium is the valve metal of lowest specific gravity. On this basis, the range can be calculated for a differing valve metal based upon its specific gravity relationship with titanium. Referring again to titanium, a weight of less than about 0.05 kilogram per square meter of mesh will be insufficient for proper current distribution in enhanced cathodic protection. On the other hand, a weight of greater than about 0.5 kilogram per square meter will most always be uneconomical for the intended service of the mesh.

The mesh can then be produced by expanding a sheet or coil of metal of appropriate thickness by an expansion factor of at least 10 times, and preferably at least 15 times. Useful mesh can also be prepared where a metal sheet has been expanded by a factor up to 30 times its original area. Even for an annealed valve metal of elongation greater than 20 percent, an expansion factor of greater than 30 : 1 may lead to the preparation of a mesh exhibiting strand breakage. On the other hand, an expansion factor of less than about 10: 1 may leave additional metal without augmenting cathodic protection. Further in this regard, the resulting expanded mesh should have an at least 80 percent void fraction for efficiency and economy of cathodic protection. Most preferably, the expanded metal mesh will have a void fraction of at least about 90 percent, and may be as great as 92 to 96 percent or more, while still supplying sufficient metal and economical current distribution. With such void fraction, the metal strands can be connected at a multiplicity of nodes providing a redundancy of current-carrying paths through the mesh which insures effective current distribution throughout the mesh even in the event of possible breakage of a number of individual strands, e. g., any breakage which might occur during installation or use. Within the expansion factor range as discussed hereinbefore, such suitable redundancy for the metal strands will be provided in a network of strands most always interconnected by from about 500 to about 2 000 nodes per square meter of the mesh. Greater than about 2 000 nodes per square meter of the mesh is uneconomical. On the other hand, less than about 500 of the interconnecting nodes per square meter of the mesh may provide for insufficient redundancy in the mesh.

Within the above-discussed weight range for the mesh, and referring to a sheet thickness of between about 0.05-0.125 centimeter, it can be expected that strands within such thickness range will have width dimensions of from about 0.05 centimeter to about 0.20 centimeter. For the special application to cathodic protection in concrete, it is expected that the total surface area of interconnected metal, i. e., including the total surface area of strands plus nodes, will provide between about 10 percent up to about 50 percent of the area covered by the metal mesh. Since this surface area is the total area, as for example contributed by all four faces of a strand of square cross-section, it will be appreciated that even at a 90 percent void fraction such mesh can have a much greater than 10 percent mesh surface area. This area will usually be referred to herein as the "surface area of the metal" or the "metal surface area". If the total surface area of the metal is less than about 10 percent, the resulting mesh can be sufficiently fragile to lead to deleterious strand breakage. On the other hand, greater than about 50 percent surface area of metal will supply additional metal without a commensurate enhancement in protection.

After expansion the resulting mesh can be readily rolled into coiled configuration, such as for storage or transport or further operation. With the representative valve metal titanium, rolls having a hollow inner diameter of greater than 20 centimeters and an outer diameter of up to 150 centimeters, preferably 100 centimeters, can be prepared. These rolls can be suitably coiled from the mesh when such is prepared in lengths within the range of from about 40 to about 200, and preferably up to 100, meters. For the metal titanium, such rolls will have weight on the order of about 10-50 kilograms, but usually below 30 kilograms to be serviceable for handling, especially following coating, and particularly handling in the field during installation for cathodic protection.

In such greatly expanded valve metal mesh it is most typical that the gap patterns in the mesh will be formed as diamond-shaped apertures. Such "diamond-pattern" will feature apertures having a long way of design (LWD) from about 4, and preferably from about 6, centimeters up to about 9 centimeters, although a longer LWD is contemplated, and a short way of design (SWD) of from about 2, and preferably from about 2.5, up to about 4 centimeters. In the specific application of cathodic protection in concrete, diamond dimensions having an LWD exceeding about 9 centimeters may lead to undue strand breakage and undesirable voltage loss. An SWD of less than about 2 centimeters, or an LWD of less than about 4 centimeters, in this application, can be uneconomical in supplying an unneeded amount of metal for desirable cathodic protection.

Referring now more particularly to Fig. 1 an individual diamond shape, from a sheet containing many such shapes is shown generally at 2. The shape is formed from strands 3 joining at connections (nodes) 4. As shown in the Figure, the strands 3 and connections 4 form a diamond aperture having a long way of design in a horizontal direction. The short way of design is in the opposite, vertical direction. When referring to the surface area of the interconnected metal strands 3, e. g., where such surface area will supply not less than about 10 percent of the overall measured area of the expanded metal as discussed hereinabove, such surface area is the total area around a strand 3 and the connections 4. For example, in a strand 3 of square cross-section, the

surface are of the strand 3 will be four times the depicted, one-side-only, area as seen in the Figure. Thus in Fig. 1, although the strands 3 and their connections 4 appear thin, they may readily contribute 20 to 30 percent surface area to the overall measured area of the expanded metal. In the Fig. 1, the "area of the mesh", e. g., the square meters of the mesh, as such terms are used herein, is the area encompassed within an imaginary line drawn around the periphery of the Figure.

In Fig. 1, the area within the diamond, i. e., within the strands 3 and connections 4, may be referred to herein as the "diamond aperture". It is the area having the LWD and SWD dimensions. For convenience, it may also be referred to herein as the "void", or referred to herein as the "void fraction", when based upon such area plus the area of the metal around the void. As noted in Fig. 1 and as discussed hereinbefore, the metal mesh as used herein has extremely great void fraction. Although the shape depicted in the figure is diamond-shaped, it is to be understood that many other shapes can be serviceable to achieve to extremely great void fraction, e. g., scallop-shaped or hexagonal.

Referring now to Fig. 2, several individual diamonds 21 are formed of individual strands 22 and their interconnections 25 thereby providing diamond-shaped apertures. A row of the diamonds 21 is bonded to a metal strip 23 at the intersections 25 of strands 22 with the metal strip 23 running along the LWD of the diamond pattern. The assembly is brought together by spotwelds 24, with each individual strand connection (node) 25 located under the strip 23 being welded by a spotweld 24. Generally the welding employed will be electrical resistance welding and this will most always simply by spot welding, for economy, although other, similar welding technique, e. g., roller welding, is contemplated. This provides a firm interconnection for good electroconductivity between the strip 23 and the strands 22. As can be appreciated by reference particularly to Fig. 2, the strands 22 and connections 25 can form a substantially planar configuration. As such term is used herein it is meant that particularly larger dimensional sheets of the mesh may be generally in coiled or rolled condition, as for storage or handling, but are capable of being unrolled into a « substantially planar » condition or configuration, i. e., substantially flat form, for use. Moreover, the connections 25 will have double strand thickness, whereby even when rolled flat, the substantially planar or flat configuration may nevertheless have ridged connections.

Referring then to the enlarged view in Fig. 3 it can be seen that the nodes have double strand thickness (2T). Thus, the individual strands have a lateral depth or thickness (T) not to exceed about 0.125 centimeter, as discussed hereinabove, and a facing width (W) which may be up to about 0.20 centimeter.

The expanded metal mesh can be coated before or after it is in mesh form with a catalytic active material, thereby forming a catalytic anode structure. Usually before any of this, the valve metal mesh will be subjected to a cleaning operation, e. g., a degreasing operation, which can include cleaning plus etching, as is well known in the art of preparing a valve metal to receive an electrochemically active coating. It is also well known that a valve metal, which may also be referred to herein as a "film-forming" metal, will not function as an anode without an electrochemically active coating which prevents passivation of the valve metal surface. This electrochemically active coating may be provided from platinum or other platinum group metal, or it may be any of a number of active oxide coatings such as the platinum group metal oxides, magnetite, ferrite, cobalt spinel, or mixed metal oxide coatings, which have been developed for use as anode coatings in the industrial electrochemical industry. It is particularly preferred for extended life protection of concrete structures that the anode coating be a mixed metal oxide, which can be a solid solution of a film-forming metal oxide and a platinum group metal oxide.

For this extended protection application, the coating should be present in an amount of from about 0.05 to about 0.5 gram of platinum group metal per square meter of expanded valve metal mesh. Less than about 0.05 gram of platinum group metal will provide insufficient electrochemically active coating to serve for preventing passivation of the valve metal substrate over extended time, or to economically function at a sufficiently low single electrode potential to promote selectivity of the anodic reaction. On the other hand, the presence of greater than about 0.5 gram of platinum group metal per square meter of the expanded valve metal mesh can contribute an expense without commensurate improvement in anode lifetime. In this particular embodiment of the mesh, the mixed metal oxide coating is highly catalytic for the oxygen evolution reaction, and in a chloride contaminated concrete environment, will evolve no chlorine or hypochlorite. The platinum group metal or mixed metal oxides for the coating are such as have been generally been described in one or more of U.S. Patents 3,265,526, 3,632,498, 3,711,385 and 4,528,084. More particularly, such platinum group metals include platinum, palladium, rhodium, iridium and ruthenium or alloys of themselves and with other metals. Mixed metal oxides include at least one of the oxides of these platinum group metals in combination with at least one oxide of a valve metal or another non-precious metal. It is preferred for economy that the coating be such as have been disclosed in the U.S. Patent No. 4,528,084.

In such concrete corrosion retarding application, the metal mesh will be connected to a current distribution member, e. g., the metal strip 23 to Fig. 2. Such member will most always be a valve metal and preferably is

the same metal alloy or intermetallic mixture as the metal most predominantly found in the expanded valve metal mesh. This current distribution member must be firmly affixed to the metal mesh. Such a manner of firmly fixing the member to the mesh can be by welding as has been discussed hereinabove. Moreover, the welding can proceed through the coating. Thus, a coated strip can be laid on a coated mesh, with coated faces in contact, and yet the welding can readily proceed. The strip can be welded to the mesh at every node and thereby provide uniform distribution of current thereto. Such a member positioned along a piece of mesh about every 30 meters will usually be sufficient to serve as a current distributor for such piece.

In the application of the cathodic protection for concrete, it is important that the embedded portion of the current distribution member be also coated, such as with the same electrochemically active coating of the mesh. Like considerations for the coating weight, such as for the mesh, are also important for the current distributor member. The member may be attached to the mesh before or after the member is coated. Such current distributor member can then connect outside of the concrete environment to a current conductor, which current conductor being external to the concrete need not be so coated. For example in the case of a concrete bridge deck, the current distribution member may be a bar extending through a hole to the underside of the deck surface where a current conductor is located. In this way all mechanical current connections are made external to the finished concrete structure, and are thereby readily available for access and service if necessary. Connections to the current distribution bar external to the concrete may be of conventional mechanical means such as a bolted spade-lug connector.

Meshes produced according to the following specifications were used in the example of the method of installation described below.

Anode Mesh Specifications

Type 1 Mesh

Composition	Titanium Grade 1
Width of Roll	45 inches (112.5 cm)
Length	250 to 500 ft. (75 to 150 m)
Weight	26 lbs./1000 ft. ² (11.7 kg/100 m ²)
Diamond Dimension	3" LWD × 1 1/3" SWD (7.6 cm LWD × 3.3 cm SWD)
Resistance Lengthwise (45 inch/112.5 cm wide)	026 ohm/ft. (0.086 ohm/m)
Resistance Widthwise with Current Distributor	007 ohm/ft. (0.02 ohm/m)
Bending Radius	3/32 inches (0.24 cm)
Bending Radius in Mesh Plane	50 ft. (15 m)

Type 2 Mesh

Composition	Titanium Grade 1
Width of Roll	4 ft. (122 cm)
Length	250 to 500 ft. (75 to 150 m)
Weight	45 lbs./1000 ft. ² (20.2 kg/100 m ²)
Diamond Dimension	3" LWD × 1 1/3" SWD (7.6 cm LWD × 3.3 cm SWD)
Resistance Lengthwise (4 ft., 122 cm wide)	014 ohm/ft.
Resistance Widthwise with Current Distributor	005 ohm/ft. (0.016 ohm/m)
Bending Radius	3/32 inches (0.24 cm)
Bending Radius in Mesh Plane	50 ft. (15 m)

These meshes are coated typically with a mixed metal oxide catalytic coating providing good oxygen specificity at a maximum recommended anode-concrete interface current density (i. e. the current density on the strands of the mesh) of 10 mA/ft² (about 100 mA/m²). The precious metal loading of the catalyst is between about 0.05 and 0.5 g/m² of the mesh. The same thin catalytic coating is applied to current distributors typically made from strips of the same titanium having a width of about 0-5 inch (1.25 cm), and a thickness of about 0.04 inch (0.1 cm).

Installation procedure

Application of the coated mesh for corrosion protection such as to a concrete deck or substructure can be simplistic. A roll of the greatly expanded valve metal mesh with a suitable electrochemically active coating,

sometimes referred to hereinafter simply as the "anode", can be unrolled onto the surface of such deck or sub-structure. Thereafter, means of fixing mesh to substructure can be any of those useful for binding a metal mesh to concrete that will not deleteriously disrupt the anodic nature of the mesh. Usually, non conductive retaining members will be useful. Such retaining members for economy are advantageously plastic and in a form such as pegs or studs. For example, plastics such as polyvinyl halides or polyolefins can be useful. These plastic retaining members can be inserted into holes drilled into the concrete. Such retainers may have an enlarged head engaging a strand of the mesh under the head to hold the anode in place, or the retainers may be partially slotted to grip a strand of the mesh located directly over the hole drilled into the concrete.

When the anode is in place and while held in close contact with the concrete substructure by means of the retainers, an ionically conductive overlay will be employed to completely cover the anode structure. Such overlay may further enhance firm contact between the anode and the concrete substructure. Serviceable ionically conductive overlays include portland cement and polymer-modified concrete.

In typical operation, the anode can be overlaid with from about 2 to about 6 centimeters of a portland cement or a latex modified concrete. In the case where a thin overlay is particularly desirable, the anode may be generally covered by from about 0.5 to about 2 centimeters of polymer modified concrete. The expanded valve metal mesh substrate of the anode provides the additional advantage of acting as a metal reinforcing means, thereby improving the mechanical properties and useful life of the overlay. It is contemplated that the metal mesh anode structure will be used with any such materials and in any such techniques as are well known in the art of repairing underlying concrete structures such as bridge decks and support columns and the like.

Fig. 4 illustrates the installation of a mesh of highly expanded titanium as specified above on a steel-reinforced concrete deck designated generally by 40. Before proceeding, the steel reinforcement of the deck is tested for its degree of corrosion and its suitability for preservation by cathodic protection, using known techniques including suitable potential measurements.

Prior to laying the rolls 32 of mesh, catalytically coated titanium current distributor strips 23 are laid across the deck 40 with a suitable spacing. In installations with the type 1 mesh, the current distributors 23 are typically spaced lengthwise by about 60 feet (18 meters). For the type 2 mesh, this spacing is about 100 feet (30 meters). At given locations, not shown, the strips 32 extend through holes in the deck 40 for connection to a current supply; for the type 1 mesh the spacing of these power feed locations is about 24 feet (7.2 meters) widthwise of the meshes. For the type 2 mesh this widthwise spacing is about 32 feet (9.8 meters).

Fig. 4 shows a first anode mesh 30 which has already been laid by unrolling from its roll, stretched longitudinally by about 5-10 % and fixed to the deck 40 by inserting plastic clips 31 in holes drilled in the deck. After this fixing, the mesh 30 is spot welded to the transverse current distributor strips 23 at nodes 25 of the mesh (as shown in fig. 2). For this welding operation, a copper bar 35 is inserted under the mesh 30 and strip 23; this enables a sufficient welding current to be passed through the weld. After welding all or a selected number of the nodes across the width of the mesh 30 to the strip 23, the bar 35 is withdrawn from under the mesh and placed under the strip 23 in position to receive the next roll of mesh 30, as shown in fig. 3.

As illustrated, the adjacent unrolled sheets of mesh 30 are spaced by a distance D. Clear spacings of up to about 1 LWD dimension are possible while producing an even cathodic protection effect on the underlying steel. Alternatively the edges could overlap, e. g. by about 1 LWD of the mesh or more, if necessary to conform to the width of the deck 40.

After laying all rolls of the mesh in this way, and fitting any odd shapes at corners, edges, etc., the deck 40 with mesh 30 is embedded in a thin layer of cement based grout. Then an ion-conductive layer of about 4-6 cm portland cement or polymer modified concrete is applied, by pouring or spraying.

It is to be noted that during installation, i. e., after laying and fixing the mesh 30 it is possible to work on the surface, drive vehicles over it etc. with little or no risk of damaging the mesh and further with the assurance that any accidental breakage of several strands will not adversely affect the cathodic protection effect, due to the enhanced redundancy of the mesh.

Claims

1. A cathodically protected steel-reinforced concrete structure comprised an impressed-current anode embedded in an ion-conductive overlay on the concrete structure, wherein the anode comprises at least one sheet of valve metal mesh having a pattern of voids defined by a network of valve metal strands connected at a multiplicity of nodes providing a redundancy of current-carrying paths through the mesh which ensure effective current distribution throughout the mesh even in the event of possible breakage of a number of individual strands, the surface of the valve metal mesh carrying an electrochemically active coating, said at least one sheet of valve metal mesh extending essentially continuously over an entire area of the

structure to be protected with no discontinuity larger in two mutually perpendicular directions than twice the largest dimension of the voids of the mesh, and the anode further comprising at least one current distribution member for supplying current to the valve metal mesh.

- 5 **2.** The structure of claim 1, wherein the mesh consists of a sheet of expanded valve metal expanded by a factor of at least 10 times and preferably from 15 to 30 times to provide a pattern of substantially diamond shaped voids and a continuous network of valve metal strands interconnected by between about 500 to 2 000 nodes per square meter of the mesh.
- 10 **3.** The structure of claim 1, wherein said at least one current distribution member is a strip of valve metal coated with an electrochemically active coating and metallurgically bonded to the mesh.
- 4.** The structure of claim 3, wherein a plurality of current distributor strips are bonded to the mesh with a spacing of between about 10 and 50 meters.
- 15 **5.** The structure of claim 3, wherein a common current distributor strip is bonded to and extends across at least two sheets of the valve metal mesh.
- 6.** The structure of claim 3, 4 or 5, wherein the current distributor strips are spot welded to nodes of the mesh.
- 20 **7.** The structure of claim 1, wherein the mesh is fixed to the concrete structure by fasteners inserted in drill-holes in the structure.
- 8.** The structure of claim 1, wherein at least two sheets of the mesh overlap with one another.
- 25 **9.** The structure of claim 1, wherein at least one sheet of the mesh has a cut-out section bounding an obstacle on the structure.
- 10.** The structure of claim 1, wherein adjacent sheets of the mesh are welded together.
- 30 **11.** The structure of claim 1, wherein a cement-based bonding grout is applied over the mesh and over which the ion-conductive overlay is applied.
- 12.** The structure of claim 1, further comprising a current supply connected to the current distribution member to supply a cathodic protection current at a current density up to 100 mA/m² of the strand surface area.
- 35 **13.** The structure of claim 12, which is a concrete deck covered by a series of side-by-side elongate sheets of the mesh with a common current distributor strip extending across the sheets, said current distributor strip extending through an aperture in the deck to a current supply disposed underneath the deck.
- 14.** The structure of claim 1, further comprising at least one reference electrode embedded in the concrete in the proximity of the steel to be protected, said reference electrode being a catalytically-coated sheet of valve metal.
- 40 **15.** The structure of claim 1, which is a concrete pillar encased with the mesh and ion-conductive overlay.
- 16.** The structure of claim 1, which is a bridge deck, parking garage deck, pier or a supporting pillar therefor.
- 45 **17.** A method of cathodically protecting the structure of claim 1, comprising supplying a continuous or intermittent current to the valve metal mesh anode at a current density effective for oxygen generation on the surfaces of the coated valve metal mesh.
- 50 **18.** A method of installing a coated valve metal electrode as impressed-current anode in a cathodic protection system for a steel-reinforced concrete structure, comprising :
 - providing a roll of a flexible sheet of valve metal mesh consisting of a network of valve metal strands connected at a multiplicity of nodes providing a redundancy of current-carrying paths through the mesh which ensures effective current distribution throughout the mesh even in the event of possible breakage of a number of individual strands, the surface of the rolled valve metal mesh carrying an electrochemically active coating ;
 - unrolling the coated valve metal mesh and installing it in conformity with the concrete structure to be protected ;
- 55

fixing the valve metal mesh to the structure ; and
embedding the fixed valve metal mesh in an ion-conductive overlay.

- 5 19. The method of claim 18, wherein the valve metal mesh consists of a sheet of expanded valve metal expanded by a factor of at least 10 : 1 and preferably from 15 : 1 to 30 : 1 to provide a pattern of substantially diamond shaped voids and a continuous network of valve metal strands interconnected by between about 500 and 2 000 nodes per square meter of the mesh.
- 10 20. The method of claim 18, wherein at least one current distribution member is metallurgically bonded to the mesh before installing it in conformity with the structure.
21. The method of claim 18, wherein the mesh is unrolled onto the structure and strips of coated valve metal are metallurgically bonded to the unrolled mesh to provide current distributors for supplying electrical current to the mesh.
- 15 22. The method of claim 21, wherein the current distributor strips are bonded to the mesh with a spacing of between about 10 and 50 meters.
- 20 23. The method of claim 21, wherein two rolls of mesh are unrolled side-by-side and connected by a common transverse current distributor.
24. The method of claim 23, comprising laying at least one current distributor strip on the structure transverse to the direction of unrolling of the rolls prior to installation of the mesh, unrolling a first roll of mesh onto the structure and bonding it to the current distributor(s), then unrolling a second roll of mesh onto the structure and bonding it to the current distributor(s).
- 25 25. The method of claim 21, 22, 23 or 24, wherein the current distributor strips are spot welded to nodes of the mesh.
26. The method of claim 21, wherein the mesh is fixed to the structure by drilling holes in the structure and inserting fasteners, which hold down the mesh.
- 30 27. The method of claim 18 or 26, wherein the mesh is fixed to the structure by means of an adhesive, applied between the mesh and the structure or between a fastener and the structure.
- 35 28. The method of claim 18, comprising stretching the mesh on the structure prior to fixing.
29. The method of claim 28 or 23, wherein at least two rolls of mesh are unrolled side-by-side in overlapping relationship.
- 40 30. The method of claim 18, comprising cutting out sections of the unrolled mesh to fit around obstacles on the structure.
31. The method of claim 21, wherein the end of an unrolled roll of mesh overlaps with an adjacent section of the mesh to provide electrical connection.
- 45 32. The method of claim 18, wherein adjacent sections of mesh are welded together.
33. The method of claim 18, wherein a cement-based bonding grout is applied over the fixed valve metal mesh on the structure prior to applying the ion-conductive overlay.
- 50 34. A cathodically protected steel-reinforced concrete structure having an impressed-current anode of valve metal mesh installed by the method of claim 18, the valve metal mesh anode embedded in the ion-conductive overlay further comprising at least one current distribution member for supplying current to the valve metal mesh.
- 55 35. The structure of claim 34, which is a bridge deck, parking garage deck, pier or a supporting pillar therefor.
36. A method of cathodically protecting a steel-reinforced concrete structure comprising installing a coated valve metal mesh electrode according to the method of claim 18, connecting the electrode as impressed current anode and supplying current at a current density of up to about 100 mA/m² of the surface area

of the strands of the mesh.

Patentansprüche

5

1. Kathodisch geschützte stahlarmierte Betonstruktur mit einer Anode mit aufgeprägtem Storm, die in eine ionenleitende Auflage auf der Betonstruktur eingebettet ist, worin die Anode zumindest eine Matte eines Ventilmetail-Netzes mit einem Muster von durch ein Netzwerk von Ventilmetail-Strängen definierten Lücken aufweist, wobei die Stränge durch eine Mehrzahl von Knoten miteinander verbunden sind, welche einen Überfluß an stromführenden Pfaden durch das Netz bereitstellen, so daß eine wirksame Stromverteilung in dem ganzen Netz selbst dann sichergestellt ist, wenn eine Anzahl einzelner Stränge brechen sollte, und wobei die Oberfläche des Ventilmetail-Netzes eine elektrochemisch-aktive Beschichtung trägt, wobei die zumindest eine Matte des Ventilmetail-Netzes sich im wesentlichen kontinuierlich über eine gesamte Fläche der zu schützenden Struktur ohne Unterbrechung in zwei senkrecht aufeinanderstehenden Richtungen, die größer als zweimal das größte Maß der Lücken des Netzes ist, erstreckt, und wobei die Anode weiterhin zumindest ein Stromverteilungsbauteil zum Liefern von Strom an das Ventilmetail-Netz aufweist.
2. Struktur nach Anspruch 1, wobei das Netz aus einer Matte aus ausgedehntem Ventilmetail besteht, das um einen Faktor von wenigsten 10 mal und vorzugsweise von 15 bis 30 mal ausgedehnt ist, um ein Muster von im wesentlichen rautenförmigen Lücken und ein kontinuierliches Netzwerk von Ventilmetail-Strängen zu schaffen, die an zwischen etwa 500 bis 2000 Knoten pro m² des Netzes untereinander verbunden sind.
3. Struktur nach Anspruch 1, wobei das zumindest eine Stromverteilungsbauteil ein Streifen aus Ventilmetail ist, der mit einer elektrochemisch aktiven Beschichtung beschichtet und metallurgisch an das Netz gebunden ist.
4. Struktur nach Anspruch 3, wobei eine Vielzahl von Stromverteilerstreifen mit einem Abstand von zwischen etwa 10 und 50 m an das Netz gebunden ist.
5. Struktur nach Anspruch 3, wobei ein gemeinsamer Stromverteilerstreifen an wenigstens zwei Matten des Ventilmetail-Netzes gebunden ist und sich darüber erstreckt.
6. Struktur nach Anspruch 3, 4 oder 5, wobei die Stromverteilerstreifen an Knoten des Netzes punktgeschweißt sind.
7. Struktur nach Anspruch 1, wobei das Netz an der Betonstruktur durch Befestigungsmittel befestigt ist, die in Bohrlöcher in der Struktur eingesetzt sind.
8. Struktur nach Anspruch 1, wobei wenigstens zwei Matten des Netzes miteinander überlappen.
9. Struktur nach Anspruch 1, wobei zumindest eine Matte des Netzes einen ausgeschnittenen Teil hat, der ein Hindernis auf der Struktur begrenzt.
10. Struktur nach Anspruch 1, wobei angrenzende Matten des Netzes zusammengeschweißt sind.
11. Struktur nach Anspruch 1, wobei über dem Netz ein Binde-Vergußmaterial auf Zementbasis aufgetragen wird, über dem die ionenleitende Auflage aufgetragen wird.
12. Struktur nach Anspruch 1, welches weiter eine an das Stromverteilungsbauteil verbundene Stromversorgung aufweist, um einen kathodischen Schutzstrom bei einer Stromdichte von bis zu 100 mA/m² Strangoberfläche zu liefern.
13. Struktur nach Anspruch 12, welche eine Betondecke ist, die mit einer Reihe von Seite an Seite liegenden länglichen Matten des Netzes mit einem gemeinsamen Stromverteilerstreifen bedeckt ist, der sich über die Matten erstreckt, wobei sich der Stromverteilerstreifen durch eine Öffnung in der Decke zu einer unterhalb der Decke angeordneten Stromversorgung erstreckt.
14. Struktur nach Anspruch 1, welche weiter wenigstens eine Referenzelektrode aufweist, die in der Nähe des zu schützenden Stahls in den Beton eingebettet ist, wobei die Referenzelektrode ein katalytisch be-

55

schichtetes Blech aus Ventilmittel ist.

15. Struktur nach Anspruch 1, weiche ein mit dem Netz und der ionenleitenden Auflage ummantelter Betonpfeiler ist.
- 5 16. Struktur nach Anspruch 1, welche eine Brückendecke, eine Parkgaragendecke, ein Pfeiler oder eine Haltestütze dafür ist.
17. Verfahren zum kathodischen Schützen der Struktur nach Anspruch 1, mit: Liefern eines kontinuierlichen oder intermittierenden Stroms an die Ventilmittel-Netzanode bei einer Stromdichte, die für die Erzeugung von Sauerstoff auf den Oberflächen des beschichteten Ventilmittel-Netzes wirksam ist.
- 10 18. Verfahren zum installieren einer beschichteten Ventilmittel-Elektrode als Anode mit aufgeprägtem Strom in einem kathodischen Schutzsystem für eine stahlarmierte Betonstruktur:
 - Schaffen einer Rolle einer flexiblen Matte von Ventilmittel-Netz, das aus einem Netzwerk von an einer Vielzahl von Knoten verbundenen Ventilmittel-Strängen besteht, was eine Redundanz der stromtragenden Wege durch das Netz schafft und eine wirksame Stromverteilung über das Netz sogar im Fall eines möglichen Bruchs einer Anzahl individueller Stränge sicherstellt, wobei die Oberfläche des gerollten Ventilmittel-Netzes eine elektromischaktive Beschichtung trägt;
 - Ausrollen des beschichteten Ventilmittel-Netzes und installieren davon in Einklang mit der zu schützenden Betonstruktur;
 - Befestigen des Ventilmittel-Netzes an der Struktur; und
 - Einbetten des befestigten Ventilmittel-Netzes in einer ionenleitenden Auflage.
- 15 19. Verfahren nach Anspruch 18, wobei das Ventilmittel-Netz aus einer Matte aus ausgedehntem Ventilmittel besteht, das um einen Faktor von wenigstens 10:1 und vorzugsweise von 15:1 bis 30:1 ausgedehnt ist, um ein Muster von im wesentlichen rautenförmigen Lücken und ein kontinuierliches Netzwerk von Ventilmittel-Strängen zu schaffen, die untereinander an zwischen etwa 500 und 2 000 Knoten pro m² Netz verbunden sind.
- 25 20. Verfahren nach Anspruch 18, wobei zumindest ein Stromverteilungsbauteil metallurgisch an das Netz gebunden wird, bevor es in Übereinstimmung mit der Struktur installiert wird.
- 30 21. Verfahren nach Anspruch 18, wobei das Netz auf die Struktur ausgerollt wird und Streifen aus beschichtetem Ventilmittel metallurgisch an das aufgerollte Netz gebunden werden, um Stromverteiler zum Liefern von elektrischem Strom an das Netz zu schaffen.
- 35 22. Verfahren nach Anspruch 21, wobei die Stromverteilerstreifen an das Netz in Abständen zwischen etwa 10 und 50 m gebunden werden.
- 40 23. Verfahren nach Anspruch 21, wobei zwei Rollen des Netzes Seite an Seite aufgerollt und durch einen gemeinsamen transversalen Stromverteiler verbunden werden.
- 45 24. Verfahren nach Anspruch 23, mit: Auslegen zumindest eines Stromverteilerstreifens auf der Struktur transversal zur Richtung des Ausrollens der Rollen vor der Installation des Netzes, Ausrollen einer ersten Rolle des Netzes auf die Struktur und Binden davon an den Stromverteiler (die Stromverteiler), anschließendes Ausrollen einer zweiten Rolle des Netzes auf die Struktur und Binden davon an den Stromverteiler (die Stromverteiler).
- 50 25. Verfahren nach Anspruch 21, 22, 23 oder 24, wobei die Stromverteilerstreifen an Knoten des Netzes punktgeschweißt werden.
- 55 26. Verfahren nach Anspruch 21, wobei das Netz an der Struktur befestigt wird, indem Löcher in die Struktur gebohrt und Befestigungsmittel eingesetzt werden, die das Netz unten halten.
27. Verfahren nach Anspruch 18 oder 26, wobei das Netz an der Struktur mittels eines zwischen dem Netz und der Struktur oder zwischen einem Befestigungsmittel und der Struktur aufgetragenen Klebers befestigt wird.
28. Verfahren nach Anspruch 18, wobei das Netz auf der Struktur vor dem Befestigen gestreckt wird.

29. Verfahren nach Anspruch 28 oder 23, wobei wenigstens zwei Rollen Netz Seite an Seite in überlappender Beziehung ausgerollt werden.
30. Verfahren nach Anspruch 18, wobei Teile des ausgerollten Netzes ausgeschnitten werden, um um Hin-
5 dernisse auf der Struktur zu passen.
31. Verfahren nach Anspruch 21, wobei das Ende einer ausgerollten Rolle Netz mit einem angrenzenden Teil des Netzes überlappt, um eine elektrische Verbindung zu schaffen.
32. Verfahren nach Anspruch 18, wobei angrenzende Teile des Netzes zusammengeschweißt werden.
10
33. Verfahren nach Anspruch 18, wobei ein Binde-Vergußmaterial auf Zementbasis über das befestigte Ventilmetail-Netz auf der Struktur aufgetragen wird, bevor die ionenleitende Auflage aufgetragen wird.
34. Kathodisch geschützte stahlarmierte Betonstruktur, mit einer Anode aus Ventilmetail-Netz mit aufgepräg-
15 tem Strom, welche nach dem Verfahren nach Anspruch 18 installiert ist,
wobei das in die Ionen leitende Auflage eingebettete Ventilmetail-Netz ferner mindestens ein Strom-
verteilungsglied zur Versorgung des Ventilmetail-Netzes mit Strom aufweist.
35. Struktur nach Anspruch 34, wobei eine Brückendecke, eine Parkgarangendecke, ein Pfeiler oder eine Hal-
20 testütze dafür ist.
36. Verfahren für das kathodische Schützen eine stahlarmierten Betonstruktur, mit: Installieren einer be-
schichteten Ventilmetail-Netzelektrode nach dem Verfahren von Anspruch 18, Verbinden der Elektrode
als Anode mit aufgeprägtem Strom und Liefern von Strom mit einer Stromdichte von bis zu etwa 100 mA/m²
25 Oberfläche der Stränge des Netzes.

Revendications

- 30 1. Structure en béton armé protégée par voie cathodique et comprenant une anode à courant imposé noyée dans un enduit à conductivité ionique sur la structure en béton, caractérisée en ce que l'anode comprend au moins une feuille de treillis de métal redresseur présentant un motif d'espaces vides définis par un réseau de fils de métal redresseur, connectés au niveau de multiples noeuds de façon à former une sur-
35 abondance de voies de passage de courant à travers le treillis, ce qui assure une distribution de courant effective dans tout le treillis, même dans le cas de rupture éventuelle d'un certain nombre de fils individuels, la surface du treillis de métal redresseur portant un revêtement électrochimiquement actif, et la ou les feuilles de treillis de métal redresseur s'étendant sensiblement de manière continue sur une aire entière de la structure à protéger sans aucune discontinuité plus grande, dans deux directions perpendiculaires l'une à l'autre, que le double de la plus grande dimension des espaces vides du treillis, et en ce que l'anode comprend en outre au moins un élément distributeur du courant pour fournir du courant au treillis de métal redresseur.
40
2. Structure selon la revendication 1, caractérisée en ce que le treillis consiste en une feuille de métal redresseur déployé, étiré jusqu'à au moins 10 fois et, de préférence, 15 à 30 fois sa longueur initiale de façon à obtenir un motif d'espaces vides sensiblement en forme de losanges et un réseau continu de fils de métal redresseur reliés entre eux par environ 500 à 2000 noeuds par mètre carré du treillis.
45
3. Structure selon la revendication 1, caractérisée en ce que le ou les élément(s) distributeur(s) de courant est (sont) un (des) ruban(s) de métal redresseur muni(s) d'un revêtement électrochimiquement actif et relié(s) métallurgiquement au treillis.
50
4. Structure selon la revendication 3, caractérisée en ce qu'un certain nombre de rubans distributeurs de courant sont reliés au treillis avec un espacement d'environ 10 à 50 mètres.
5. Structure selon la revendication 3, caractérisée en ce qu'un ruban distributeur de courant commun est
55 relié et s'étend à travers au moins deux feuilles du treillis de métal redresseur.
6. Structure selon l'une quelconque des revendications 3 à 5, caractérisée en ce que les rubans distributeurs de courant sont soudés par points à des noeuds du treillis.

7. Structure selon la revendication 1, caractérisée en ce que le treillis est fixé à la structure de béton par des organes de fixation introduits dans des trous percés dans la structure.
- 5 8. Structure selon la revendication 1, caractérisée en ce que au moins deux feuilles du treillis se chevauchent.
9. Structure selon la revendication 1, caractérisée en ce que au moins une feuille du treillis présente une découpe délimitant un obstacle sur la structure.
- 10 10. Structure selon la revendication 1, caractérisée en ce que des feuilles de treillis voisines sont soudées les unes aux autres.
11. Structure selon la revendication 1, caractérisée en ce que sur le treillis est appliquée une laitance de ciment formant un agent de liaison et sur celle-ci est appliqué l'enduit à conductivité ionique.
- 15 12. Structure selon la revendication 1, caractérisée en ce qu'elle comprend en outre une source de courant connectée à l'élément distributeur de courant pour fournir un courant de protection cathodique, présentant une densité de courant allant jusqu'à 100mA/m², à la surface des fils.
- 20 13. Structure selon la revendication 12, qui est un tablier de pont ou analogue en béton recouvert d'une série de feuilles allongées du treillis, disposées côte à côte, avec un ruban distributeur de courant commun s'étendant à travers les feuilles, lequel ruban distributeur de courant passe par un orifice dans le tablier de pont ou analogue en direction d'une source de courant disposée au-dessous du tablier de pont ou analogue en béton.
- 25 14. Structure selon la revendication 1, caractérisée en ce qu'elle comprend en outre au moins une électrode de référence noyée dans le béton au voisinage de l'acier à protéger, cette électrode de référence étant une feuille de métal redresseur revêtu de catalyseur.
- 30 15. Structure selon la revendication 1, qui est un pilier en béton entouré par le treillis et l'enduit à conductivité ionique.
16. Structure selon la revendication 1, qui est un tablier de pont, un sol de parc de stationnement, une jetée ou un pilier de soutien de ceux-ci.
- 35 17. Procédé de protection cathodique de la structure de la revendication 1, caractérisé en ce qu'il consiste à fournir à l'anode formée d'un treillis de métal redresseur un courant continu ou intermittent avec une densité de courant capable de produire de l'oxygène sur les surfaces du treillis de métal redresseur enduit.
- 40 18. Procédé d'installation d'une électrode de métal redresseur revêtu en tant qu'anode à courant imposé dans un système de protection cathodique pour une structure en béton armé, caractérisé en ce qu'il consiste à :
 - prévoir un rouleau de feuille souple de treillis de métal redresseur connectés au niveau de multiples noeuds de façon à former une surabondance de voies de passage de courant à travers le treillis, ce qui assure une distribution de courant effective dans tout le treillis, même dans le cas de rupture éventuelle d'un certain nombre de fils individuels, la surface du treillis de métal redresseur enroulé portant un revêtement électrochimiquement actif;
 - dérouler le treillis de métal redresseur revêtu et le mettre en place sous une forme adaptée à la structure à protéger;
 - fixer le treillis de métal redresseur à la structure; et
 - noyer le treillis de métal redresseur, ainsi fixé, dans un enduit à conductivité ionique.
- 50 19. Procédé selon la revendication 18, caractérisé en ce que le treillis de métal redresseur consiste en une feuille de métal redresseur déployé, étiré jusqu'à au moins 10 fois et de préférence 15 à 30 fois sa longueur initiale de façon à obtenir un motif d'espaces vides sensiblement en forme de losanges et un réseau continu de fils de métal redresseur reliés entre eux par environ 500 à 2000 noeuds par mètre carré du treillis.
- 55 20. Procédé selon la revendication 18, caractérisé en ce qu'au moins un élément distributeur de courant est relié par voie métallurgique au treillis avant de mettre celui-ci en place sous une forme adaptée à la struc-

ture.

21. Procédé selon la revendication 18, caractérisé en ce que le treillis est déroulé sur la structure, et des rubans de métal redresseur revêtu sont reliés par voie métallurgique au treillis déroulé de façon à former des distributeurs de courant pour fournir du courant électrique au treillis.
22. Procédé selon la revendication 21, caractérisé en ce que les rubans distributeurs de courant sont reliés au treillis avec un espacement d'environ 10 à 50 mètres.
23. Procédé selon la revendication 21, caractérisé en ce que deux rouleaux de treillis sont déroulés côte à côte et reliés entre eux par un distributeur de courant transversal commun.
24. Procédé selon la revendication 23, caractérisé en ce qu'il consiste à poser au moins un ruban distributeur de courant sur la structure transversalement à la direction de déroulement des rouleaux avant la mise en place du treillis, à dérouler un premier rouleau de treillis sur la structure et à le relier au(x) distributeur(s) de courant.
25. Procédé selon l'une quelconque des revendications 21 à 24, caractérisé en ce que les rubans distributeurs de courant sont soudés par points à des noeuds du treillis.
26. Procédé selon la revendication 21, caractérisé en ce que le treillis est fixé à la structure en perçant des trous dans la structure et en y introduisant des organes de fixation qui retiennent le treillis en place.
27. Procédé selon la revendication 18 ou 26, caractérisé en ce que le treillis est fixé à la structure au moyen d'un adhésif appliqué entre le treillis et la structure ou entre un organe de fixation et la structure.
28. Procédé selon la revendication 18, caractérisé en ce qu'il consiste à étirer le treillis sur la structure avant de le fixer.
29. Procédé selon la revendication 28 ou 23, caractérisé en ce qu'au moins deux rouleaux de treillis sont déroulés côte à côte de façon à se chevaucher.
30. Procédé selon la revendication 18, caractérisé en ce qu'il consiste à découper des parties dans le treillis déroulé de façon à l'adapter autour d'obstacles sur la structure.
31. Procédé selon la revendication 21, caractérisé en ce que l'extrémité d'un rouleau de treillis déroulé recouvre une partie adjacente du treillis de façon à établir une connection électrique.
32. Procédé selon la revendication 18, caractérisé en ce que des parties de treillis voisines sont soudées entre elles.
33. Procédé selon la revendication 18, caractérisé en ce qu'une laitance de ciment formant agent de liaison est appliquée sur le treillis de métal redresseur fixé sur la structure avant d'y appliquer l'enduit à conductivité ionique.
34. Structure en béton armé protégée par voie cathodique, caractérisée en ce qu'une anode à courant imposé, formée de treillis de métal redresseur y est mise en place par le procédé de la revendication 18, l'anode de métal redresseur noyée dans l'enduit à conductivité ionique comprenant en outre au moins un élément distributeur de courant pour fournir du courant au treillis de métal redresseur.
35. Structure selon la revendication 34, qui est un tablier de pont, un sol de parc de stationnement, une jetée ou un pilier de soutien pour ceux-ci.
36. Procédé de protection cathodique d'une structure en béton armé, caractérisé en ce qu'il consiste à installer, selon le procédé de la revendication 18, une électrode formée d'un treillis de métal redresseur revêtu, à connecter l'électrode en tant que anode à courant imposé et à fournir du courant avec une densité de courant allant jusqu'à environ 100mA/m² à la surface des fils du treillis.

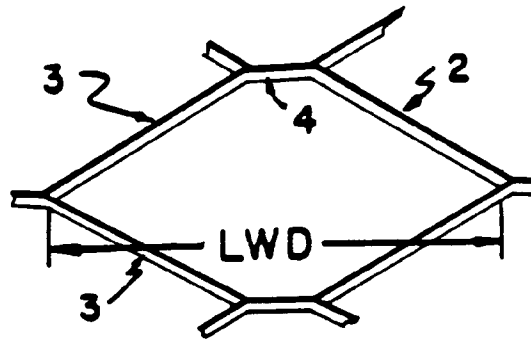


Fig. 1

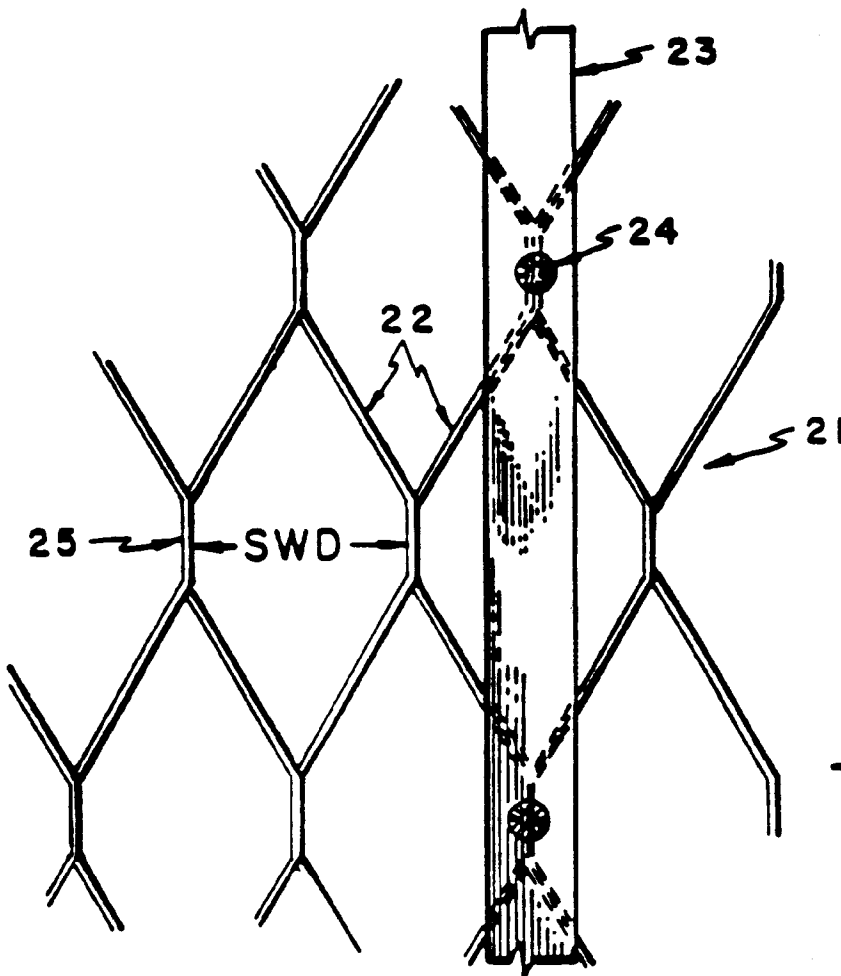


Fig. 2

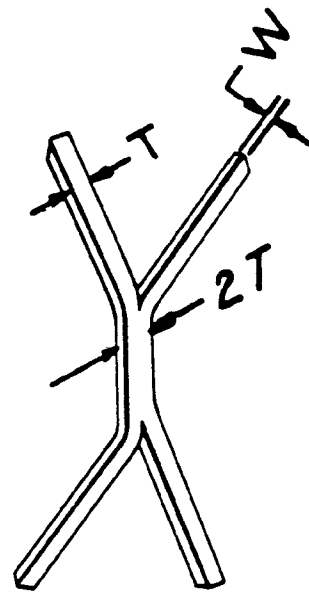


Fig. 3

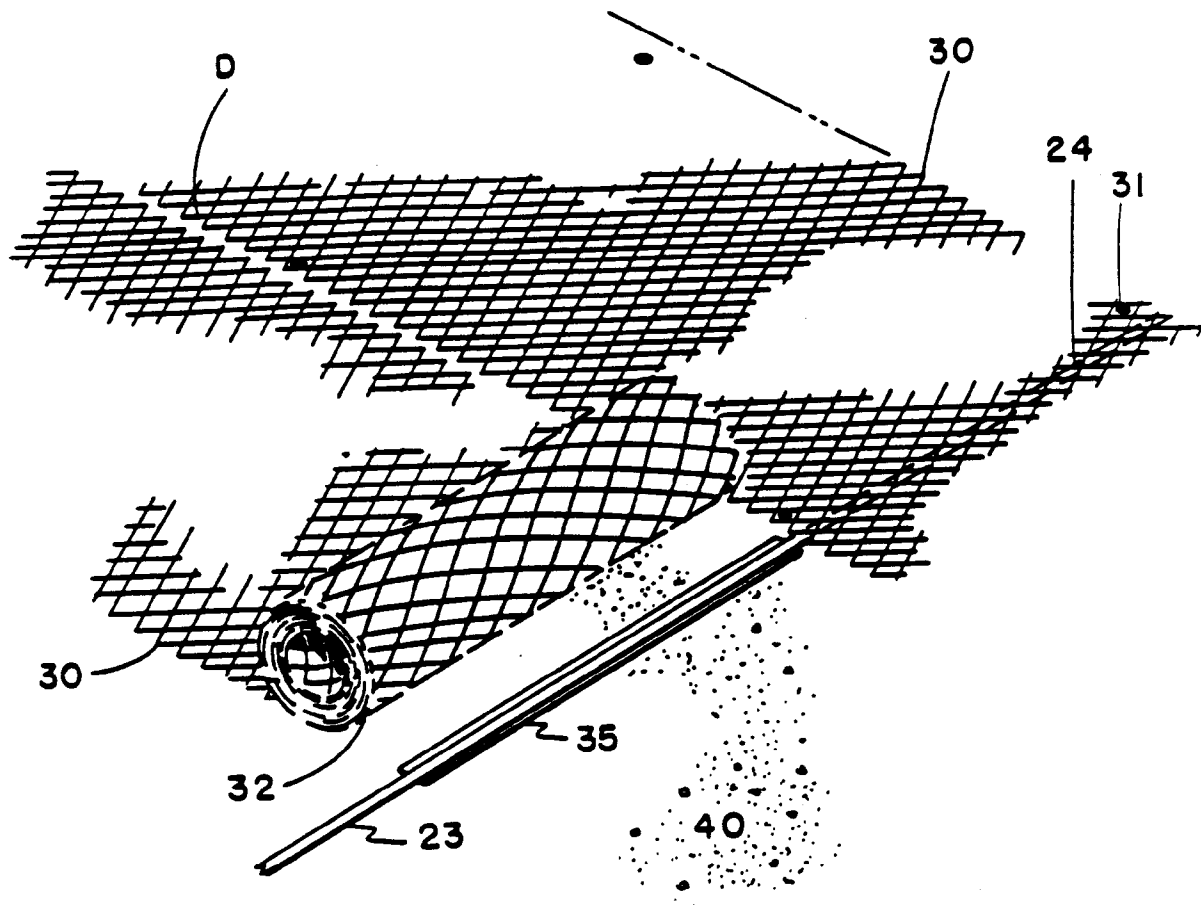


Fig. 4