

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 October 2009 (22.10.2009)

PCT

(10) International Publication Number  
WO 2009/129306 A1

- (51) International Patent Classification:  
A61F 7/00 (2006.01) A61G 7/00 (2006.01)
- (21) International Application Number:  
PCT/US2009/040661
- (22) International Filing Date:  
15 April 2009 (15.04.2009)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/045,111 15 April 2008 (15.04.2008) US
- (71) Applicant (for all designated States except US): HILL-ROOM SERVICES INC. [US/US]; 300 Delaware Avenue, Wilmington, DE 19801 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LACHENBRUCH, Charles, A. [US/US]; 126 Lindwood Lane, Summerville, SC 29483 (US). DOUGLAS, Stephen, L. [US/US]; 278 Northside Drive, Batesville, IN 47006 (US). FLINT, Stephen, C. [US/US]; 14193 Waterway Blvd., Fortville, IN 46040 (US). WILLIAMSON, Rachel [US/US]; 4239 Estelle Road, Osgood, IN 47037 (US).
- (74) Agent: PENNINGER, Jason, A.; Hill-Room Services Inc., 1069 State Route 46 East, Batesville, IN 47006 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: MICROCLIMATE MANAGEMENT SYSTEM

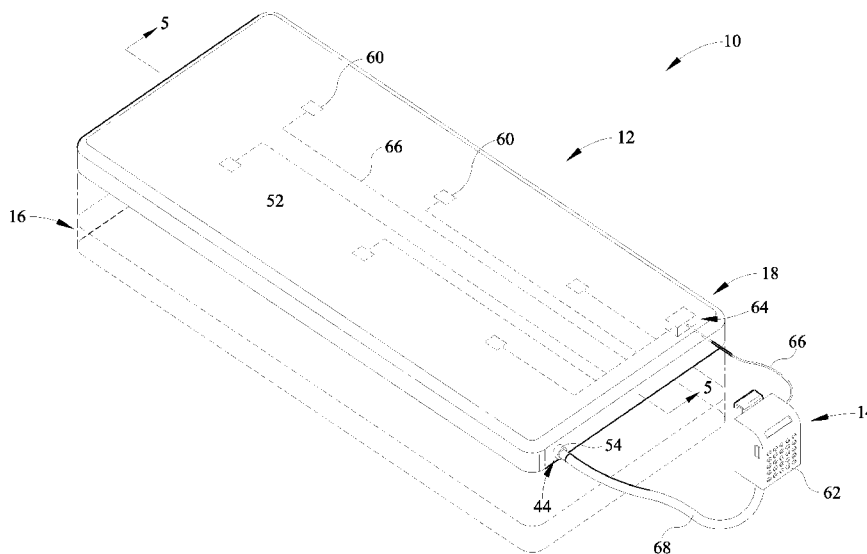


FIG. 3

(57) Abstract: A microclimate management system (10) comprises a mattress (16), a topper (18), and a control system (14). The topper (18) is coupled to the mattress (16) and is supported thereon. The topper (18) defines an interior region (42) and a person contacting surface (52). The control system (14) is configured to maintain at least one of a surface temperature, a relative surface humidity, and a heat withdrawal capacity of at least a portion of the person contacting surface (52) within a predetermined operating



WO 2009/129306 A1

**Published:**

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

## MICROCLIMATE MANAGEMENT SYSTEM

## CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This Application claims priority to U.S. Provisional Application Serial No. 61/045,111 titled MICROCLIMATE MANAGEMENT SYSTEM filed on April 15, 2008, the contents of which are incorporated herein by reference.

## BACKGROUND

[0002] This disclosure relates to microclimate management systems, and more particularly, but not exclusively to microclimate management systems adapted to maintain the temperature and/or relative humidity of a patient contacting surface of a support device within a predetermined range in some exemplary embodiments.

[0003] Patients lying on support devices, such as hospital bed mattresses, for extended periods of time are susceptible to the development of pressure ulcers (also known as decubitus ulcers or bedsores). Pressure ulcers are lesions often found adjacent bony or cartilaginous areas. Pressure ulcers may be caused by tissue forces, such as, for example, pressure, i.e., compression of tissues, shear force, and friction. Pressure ulcer formation may be exacerbated by the presence of excess body heat and/or moisture.

[0004] While various microclimate management systems have been developed, in certain applications there is still room for improvement. Thus, a need persists for further contributions in this area of technology.

## SUMMARY

[0005] One illustrative embodiment, a microclimate management system including a support device, a fluid supply, and a controller having an instruction set that causes the controller to regulate the rate and temperature of fluid supplied by the fluid supply to maintain a heat withdrawal capacity of a least a portion of the person contacting surface below about  $140\text{W/m}^2$ . In another illustrative embodiment, a microclimate management system can include a mattress, a topper supported on the mattress, and a control system configured to maintain at least one of

-2-

the surface temperature, humidity, and heat withdrawal capacity of at least a portion of the person contacting surface within a predetermined range. In yet another illustrative embodiment, a microclimate management system including a support device, a fluid supply, and a controller having an instruction set that causes the controller to regulate the rate and temperature of fluid supplied by the fluid supply to maintain a surface temperature of at least a portion of the person contacting surface above 88 °F and a relative humidity of at least a portion of the person contacting surface below about 95%. In still another illustrative embodiment, a fluid supply in communication with a topper is regulated as a function of at least one of the temperature and the relative humidity of at least a portion of the person contacting surface to maintain at least a portion of the person contacting surface within a predetermined operating range. In a further illustrative embodiment, a fluid supply in communication with a support device is regulated as a function of at least two of the temperature and the relative humidity of at least a portion of the person contacting surface and a user input to maintain at least a portion of the person contacting surface within a predetermined operating range. In yet a further illustrative embodiment, a fluid supply in communication with a topper is regulated as a function of at least one of the temperature and the relative humidity of at least a portion of the person contacting surface, and a user input to maintain at least a portion of the person contacting surface within a predetermined operating range. In still a further illustrative embodiment, at least one of a rate and a temperature of a fluid supplied by a fluid supply to a support device is regulated as a function of the temperature and relative humidity of the person contacting surface to maintain the person contacting surface within a predetermined operating range. In another illustrative embodiment, an apparatus includes a mattress, a topper, and a sensor configured to sense at least one of a temperature or a person contacting surface, a relative humidity of a person contacting surface, a temperature of the fluid within the topper, and a relative humidity of the fluid within the topper. In yet another illustrative embodiment, a fluid supply is selected to cooperate with at least one of the fluid permeability parameter of the cover, the thickness parameter of the cover, the thermal conductivity of the cover, the fluid resistance parameter of the spacer, the fluid permeability parameter of the spacer, the thermal conductivity parameter of the spacer, and the thickness parameter of the spacer to maintain a heat withdrawal capacity of at least a portion of the person contacting surface below about 140 W/m<sup>2</sup>. In still another embodiment, at least one

-3-

of the fluid permeability parameter of the cover, the thickness parameter of the cover, the thermal conductivity of the cover, the fluid resistance parameter of the spacer, the fluid permeability parameter of the spacer, the thermal conductivity parameter of the spacer, and the thickness parameter of the spacer is varied to cooperate with the fluid supply to maintain a heat withdrawal capacity of at least a portion of the person contacting surface below about  $140 \text{ W/m}^2$ .

[0006] Further embodiments of this disclosure will become apparent from the following description and accompanying drawings included herewithin.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a graph illustrating the relationship between the pressure exerted on the skin and the amount of time the pressure is exerted before damage to the skin occurs for a given skin temperature.

[0008] FIG. 2 is a graph illustrating some principles of the present invention.

[0009] FIG. 3 is a perspective view of a microclimate management system according to one embodiment of the current disclosure including a support device and a control system.

[0010] FIG. 4 is a partial sectional view of the embodiment of FIG. 3 illustrating the controller and sensors positioned within a cover of the support device.

[0011] FIG. 5 is a cross-sectional side view of the illustrative support device of FIG. 3 including a low air-loss topper positioned on top of the upper mattress surface of the mattress.

[0012] FIG. 6 is a graph illustrating the relationship between the composition of the support device of FIG. 3 and the temperature of the skin contacting the support device over time, according to some principles of the present invention.

[0013] FIG. 7 is a partial cross-sectional side view of the illustrative support device of FIG. 3 taken along line 5-5 with a person resting thereon illustrating the flow of air, heat, and moisture through the support device.

[0014] FIG. 8 is a cross-sectional side view of a support device taken along line 5-5 of FIG. 3 according to another embodiment of the current disclosure including a low air-loss topper with bladders or a mattress with bladders.

-4-

[0015] FIG. 9 is a cross-sectional side view of a support taken along line 5-5 of FIG. 3 according to another embodiment of the current disclosure including a low air-loss topper positioned within the mattress cover mattress.

#### DESCRIPTION OF SPECIFIC ILLUSTRATIVE EMBODIMENTS

[0016] While the system present in this disclosure can take many different forms, for the purpose of promoting an understanding of the disclosure, reference will now be made to the embodiments illustrated in the drawings, and specific language will be used to describe the same. No limitation of the scope of the disclosure is thereby intended. Alterations, further modifications of the described embodiments, and any further applications of the principles of the disclosure as described herein as would normally occur to one skilled in the art to which the disclosure relates are contemplated.

[0017] One illustrative embodiment, a microclimate management system including a support device, a fluid supply, and a controller having an instruction set that causes the controller to regulate the rate and temperature of fluid supplied by the fluid supply to maintain a heat withdrawal capacity of at least a portion of the person contacting surface below about  $140\text{W/m}^2$ . In another illustrative embodiment, a microclimate management system can include a mattress, a topper supported on the mattress, and a control system configured to maintain at least one of the surface temperature, humidity, and heat withdrawal capacity of at least a portion of the person contacting surface within a predetermined range. In yet another illustrative embodiment, a microclimate management system including a support device, a fluid supply, and a controller having an instruction set that causes the controller to regulate the rate and temperature of fluid supplied by the fluid supply to maintain a surface temperature of at least a portion of the person contacting surface above  $88\text{ }^\circ\text{F}$  and a relative humidity of at least a portion of the person contacting surface below about 95%. In still another illustrative embodiment, a fluid supply in communication with a topper is regulated as a function of at least one of the temperature and the relative humidity of at least a portion of the person contacting surface to maintain at least a portion of the person contacting surface within a predetermined operating range. In a further illustrative embodiment, a fluid supply in communication with a support device is regulated as a function of at least two of the temperature and the relative humidity of at least a portion of the person contacting

-5-

surface and a user input to maintain at least a portion of the person contacting surface within a predetermined operating range. In yet a further illustrative embodiment, a fluid supply in communication with a topper is regulated as a function of at least one of the temperature and the relative humidity of at least a portion of the person contacting surface, and a user input to maintain at least a portion of the person contacting surface within a predetermined operating range. In still a further illustrative embodiment, at least one of a rate and a temperature of a fluid supplied by a fluid supply to a support device is regulated as a function of the temperature and relative humidity of the person contacting surface to maintain the person contacting surface within a predetermined operating range. In another illustrative embodiment, an apparatus includes a mattress, a topper, and a sensor configured to sense at least one of a temperature or a person contacting surface, a relative humidity of a person contacting surface, a temperature of the fluid within the topper, and a relative humidity of the fluid within the topper. In yet another illustrative embodiment, a fluid supply is selected to cooperate with at least one of the fluid permeability parameter of the cover, the thickness parameter of the cover, the thermal conductivity of the cover, the fluid resistance parameter of the spacer, the fluid permeability parameter of the spacer, the thermal conductivity parameter of the spacer, and the thickness parameter of the spacer to maintain a heat withdrawal capacity of at least a portion of the person contacting surface below about  $140 \text{ W/m}^2$ . In still another embodiment, at least one of the fluid permeability parameter of the cover, the thickness parameter of the cover, the thermal conductivity of the cover, the fluid resistance parameter of the spacer, the fluid permeability parameter of the spacer, the thermal conductivity parameter of the spacer, and the thickness parameter of the spacer is varied to cooperate with the fluid supply to maintain a heat withdrawal capacity of at least a portion of the person contacting surface below about  $140 \text{ W/m}^2$ .

[0018] A microclimate management system 10, described in more detail in connection with FIG. 3, can manage the temperature of a person's skin. Limiting skin warming can be accomplished by cooling the skin, which can reduce the metabolic demand of the tissue so that the tissue can withstand an exerted pressure for a longer period without breaking down, as shown in FIG. 1. Cooling the skin to the point of excessive patient discomfort or hypothermia is preferably avoided.

[0019] A microclimate management system 10 can also manage the accumulation of moisture against a person's skin. By limiting skin warming and

-6-

moisture accumulation, ischemia, which is a restriction in blood supply generally due to factors in the blood vessels with resultant damage or dysfunction of tissue, and maceration, which is the softening and weakening of the skin that occurs when its collagen linkages are dissolved over time, can be reduced. Furthermore, limiting moisture accumulation can help decrease the coefficient of friction between the wet skin and common bedding materials, thereby reducing the forces imposed on the weakened skin for any sliding movement.

[0020] Skin temperature can influence the perspiration rate or sweat rate of the skin, metabolic demand of the skin, and person's level of comfort, as shown in FIG. 2, in which the x-axis corresponds to the temperature of the skin increasing from left to right (in degrees Fahrenheit) and the y-axis corresponds to scaled units representing the various dependent variables depicted. Curve S1, the sweat curve, illustrates the rate at which sweat is produced by the skin as the skin temperature varies. The sweat rate of the skin at a given location can be affected by the core temperature of the person, the person's mean skin temperature, and the local skin temperature. The sweat rate for a given patch of skin can increase as the patch of skin is warmed. The skin sweat rate can remain relatively constant at temperatures below a sweat threshold ST1 of approximately 35.3 °C (95.5 °F). The sweat rate below this threshold can be between about 5 g/m<sup>2</sup>-hr to 10 g/m<sup>2</sup>-hr. As the skin temperature increases beyond the sweat threshold the sweat rate can begin to rise dramatically.

[0021] Curve MR1, shown in FIG. 2, illustrates the extent to which the metabolic demand of the skin varies with the skin temperature. As the temperature of the skin increases, the demand for additional blood to be supplied to the skin can increase and the affected blood vessels can dilate to accommodate the demand. However, when high pressures are applied to the skin, dilation of the blood vessels can be impeded and nutrients may not be supplied to the skin at the necessary rate. This could result in a nutrient deficit leading to ischemic necrosis.

[0022] Comfort curve C1 illustrates the level of patient comfort experienced while resting on the microclimate management system 10 as a function of the skin temperature. While a patient's comfort level is not an exact measurement and can differ from person to person for any given temperature, the comfort curve is generally representative of the comfort level for the majority of patients observed. Variations in the level of comfort can be due to factors including, but not limited to,

-7-

the person's body mass index, age, physical conditioning, personal preferences, and injury or illness.

[0023] Analysis of the sweat curve S1, metabolic rate curve MR1, and comfort curve C1, as shown in FIG. 2, demonstrates a range of skin temperatures among which the risk of pressure ulcers can be decreased. Specifically, a person's skin can be maintained in one embodiment at a temperature below approximately 35.8 °C (96.5 °F), a temperature at which comfort begins to noticeably decline, as shown by curve C1 in FIG. 2. More specifically, a person's skin can be maintained at a temperature below approximately 35.3 °C (95.5 °F), a temperature at which the sweat threshold ST1 is reached. Still more specifically, a person's skin can be maintained within a temperature range of about 32.2 °C (90 °F) and 35.3 °C (95.5 °F). In other embodiments, the temperature of the skin can be maintained between about 31.1 °C (88 °F) and 35.8 °C (96.5 °F). It should be appreciated that the temperature of the skin can be maintained below 32.2 °C (90 °F); however, the risk of causing the person resting on the microclimate management system 10 to go into hypothermia increases as the temperature of the patient the skin decreases. It should also be appreciated that the temperature of the skin can be maintained above 35.8 °C (96.5 °F); however, the risk of increasing the occurrences of pressure ulcers increases as the temperature of the skin increases.

[0024] The temperature of the skin can be maintained within the previously stated ranges for a minimum of 6 hours. More specifically, the temperature of the skin can be maintained within the previously stated temperature ranges for 12 hours or more. Still more specifically, the temperature of the skin can be maintained within the previously stated temperature ranges for 24 hours or more. In other embodiments the temperature of the skin can be maintained for less than 6 hours. It should be appreciated that other parameters, such as relative humidity and heat transfer rate, can be maintained within their respective ranges for the previously stated amounts of time.

[0025] The temperature of the skin of a person on the microclimate management system 10 can depend upon the heat withdrawn from their skin. The total heat withdrawal capacity (THW capacity) parameter is the cooling power of the surface in Watts/m<sup>2</sup> with higher values indicating greater heat transfer. The THW capacity depends upon both the heat withdrawn due to dry flux and that removed due to wet flux.

-8-

[0026] The dry flux measures the ability of a surface, such as the patient contacting surface 52 of the support apparatus 12 shown in FIG. 3, to remove heat from the person's skin in the absence of moisture on the skin. The dry flux remains constant regardless of how much the skin is sweating.

[0027] The wet flux represents the heat removed from the skin due to evaporation and is proportional to the evaporative capacity of a surface, such as the patient contacting surface 52 of the support apparatus 12 shown in FIG. 3, interfacing with the skin. The evaporative capacity measures a surface's ability to keep the skin relatively dry and is a measure of the surface's ability to promote evaporation. The parameter is measured in  $\text{g/m}^2\text{-hr}$  with higher values again indicating better performance.

[0028] To maintain the skin of a typical person engaging a patient support 12, as shown in FIG. 3, between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F), the support device 12 and material (not shown) positioned between the person and the support device 12 can have a THW capacity of between about 60  $\text{W/m}^2$  and 125  $\text{W/m}^2$ . In other embodiments, the TWH capacity can be maintained between about 50  $\text{W/m}^2$  and 140  $\text{W/m}^2$ . It should be appreciated that the THW capacity can be maintained below 60  $\text{W/m}^2$ ; however, the risk of increasing occurrences of pressure ulcers increases as the THW capacity increases. It should also be appreciated that the THW capacity can be maintained above 125  $\text{W/m}^2$ ; however, the risk of causing the person to go into hypothermia increases as the THW capacity decreases.

[0029] The relative humidity of the skin of a person on the microclimate management system 10 can depend upon the heat removed from their skin due to evaporation. To maintain the skin of a typical person engaging a patient support 12 shown in FIG. 3 between about 32.2 °C (90 °F) and 35 °C (95 °F), the support device 12 can have a relative humidity ("RH") between about 55% RH and 90% RH. In other embodiments, the relative humidity range can be maintained between about 20% RH and about 95% RH. It should be appreciated that the relative humidity can be maintained below 55% RH; however, the risk of drying the skin excessively and dehydrating the person increases as the relative humidity decreases. It should also be appreciated that the relative humidity can be maintained above 90% RH; however, the risk of saturating the skin and increasing the occurrences of pressure ulcers increases as the relative humidity increases.

-9-

[0030] The microclimate management system 10, according to one embodiment of the current disclosure, can be configured to maintain the skin about the aforementioned ranges as shown in FIGs. 3-5. The microclimate management system 10 can include a support device 12 and a control system 14 adapted to manage the microclimate of the support device 12. The microclimate management system 10 can generally be used in the hospital setting on a hospital bed (not shown), stretcher (not shown), or other support structure to prevent the occurrences of pressure ulcers. It should be appreciated that the microclimate management system 10 can be used in any situation where a support device 12 is commonly used. The microclimate management system 10 can prevent the occurrences of pressure ulcers by reducing the accumulation of heat and moisture that tends to occur on a person's skin when the person is laid on the support device 12 in the supine position.

[0031] Some of the types of support devices 12 utilized within the hospital setting today are: foam support devices and low air-loss support devices. The difference in skin temperature over time as the skin remains in contact with the foam support devices is illustrated by curve AA, and difference in skin temperature over time as the skin remains in contact with the low air-loss support devices is illustrated by curve BB, as shown in FIG. 6. Foam support devices 12 can block the natural, basal level of heat and moisture produced by the skin that would normally flow into the atmosphere, whereas low air-loss support devices 12 can be adapted to remove accumulated heat and moisture. Blocking the heat and moisture produced warms and wets the skin over time, creating an environment that can differ markedly from the environment in which the skin was designed to operate.

[0032] Low air-loss broadly refers to a feature of a support surface that provides a flow of air to assist in managing the heat and humidity (microclimate) of the skin. Two types of mechanisms that low air-loss support devices 12 typically use to remove accumulated moisture and heat: convective evaporation and diffusive evaporation. Convective evaporation evaporates accumulated moisture by blowing air on the skin. Diffusive evaporation evaporates accumulated moisture through and under the surface of the support device 12 to cool the skin without blowing air directly thereon. An example of a diffusive device can be seen in FIG. 7 where the air-loss support device 12 according to one embodiment of the current disclosure where the patient P1 is lying on the support device 12 in the supine position with fluid F1 flowing through the support device 12 to remove heat H1 and moisture M1

-10-

radiated by the patient P1. It should be appreciated that in some low air-loss support devices 12 a combination of diffusive and convective evaporation can be utilized.

[0033] In one illustrative embodiment, the support device 12 can include a mattress 16 and a topper 18 as shown in FIG. 3. The topper 18 can be positioned on top of the mattress 16 and can be removably coupled to the mattress 16 by a plurality of fasteners (not shown), such as, buttons, snaps, Velcro®, ties, pins, zippers, or other known fasteners, to prevent movement of the topper 18 with respect to the mattress 16. It should be appreciated that the topper 18 can be integrally incorporated in the mattress 16 or can be configured to mimic the structure of the mattress 16 as shown in FIGs. 8 & 9.

[0034] The mattress 16 can include an outer mattress cover 20 or mattress ticking 20 that can define a mattress chamber 22. The mattress ticking 20 can have a lower mattress surface 24 that can interface with the hospital bed (not shown), and an upper mattress surface 26 that can interface with the LAL topper 18. The mattress chamber 22 can contain a plurality of air mattress bladders 28 and a mattress spacer 30 therein. It should be appreciated that the mattress 16 can contain only one mattress bladder 28 within the mattress chamber 22. It should also be appreciated that the mattress 16 can be composed of a polymeric material, such as, foam, or a combination of polymeric material and bladders. The mattress bladders 28 can be alternately inflated and deflated to create a form of alternating pressure therapy. The bladders 28 can also be in communication with one another such that the fluid pressure in the bladders 28 can be maintained as pressure exerted on the bladders 28. In other embodiments, the bladders 28 can include holes HO therein that allow for fluid therein to be communicated from the bladders 28 into the mattress chamber 22 as shown in FIG. 8. In still other embodiments, the bladders 28 can include other components, such as, bladders 28, for assisting with the turning of a patient, for assisting with lateral rotation of a patient, or other therapy or support bladders 28.

[0035] In one illustrative embodiment, the LAL topper 18 can be a low air-loss topper 18 (LAL topper 18) that can include an outer LAL cover 40 or LAL ticking 40 that can define a LAL chamber 42, an inlet 44, a vent 46, and a three-dimensionally engineered spacer 48. The LAL ticking 40 can include a lower LAL surface 50 and an upper LAL surface 52 or patient contacting surface 52. The lower LAL surface 50 can interface with the upper mattress surface 28. The patient

-11-

contacting surface 52 can interface with a patient P1 lying thereon as shown in FIG. 7. It should be appreciated that the patient P1 can be separated from the patient contacting surface 52 by material (not shown), such as bedding, clothing, or other such garments or materials, that has a total thermal conductivity of anywhere from about .02 W/m – K to 1000 W/m – K. The lower LAL surface 50 and the patient contacting surface 52 can be generally shaped to cooperate with the upper mattress surface 26 and can be secured to one another along their respective edges by ultrasonic welding in order to form a fluid-tight seal. It should be appreciated that the lower LAL surface 50 and the patient contacting surface 52 can be secured to one another by adhesive, plastic welding, or other securing means, and can be secured along various portions of the lower LAL surface 50 and the patient contacting surface 52.

[0036] The LAL ticking 40 of this illustrative embodiment can be moisture permeable and air impermeable. It should be appreciated that the LAL ticking 40 can be both moisture permeable and air permeable. It should also be appreciated that the mattress ticking 20 and the LAL ticking 40 can be composed of the same material and have the same physical characteristics. The moisture vapor transfer rate for the LAL ticking 40, when fluid is being supplied to the LAL topper 18 at a rate of 2.2 ft<sup>3</sup>/min., can be at least about 20 g/m<sup>2</sup>-hr in order to accommodate basal skin moisture production. The moisture vapor transfer rate of the LAL ticking 40 can be 80 g/m<sup>2</sup>-hr or more. It should be appreciated that the moisture vapor transfer rate can be between 25 g/m<sup>2</sup>-hr and 200 g/m<sup>2</sup>-hr. It should be appreciated that the moisture vapor transfer rate can be less than about 20 g/m<sup>2</sup>-hr; however, the amount of moisture accumulation on the skin can increase with time and can increase the risk of maceration.

[0037] The inlet 44 can be positioned along a side of the LAL topper 18 and can allow for fluid to be communicated from the control system 14 into the LAL chamber 42. The inlet 44 can include an inlet coupler 54 that can couple the control system 14 to the LAL topper 18. It should be appreciated that the inlet coupler 54 can be secured to the LAL topper 18 such that there is a fluid tight seal between the inlet coupler 54 and the LAL topper 18.

[0038] The vent 46 or outlet 46 can be positioned along a side of the LAL topper 18 opposite the inlet 44. The vent 46 can be an opening in the lower LAL surface 50 that can allow fluid entering the inlet 44 and passing through the LAL

-12-

chamber 42 to exit the LAL topper 18. It should be appreciated that the vent 46 can be a portion of the edges of the lower LAL surface 50 and the patient contacting surface 52 that were not secured to one another. It should also be appreciated that the vent 46 can be secured to the lower LAL surface 50 or the patient contacting surface 52 opposite the inlet 44.

[0039] The three-dimensionally engineered spacer 48 can be positioned within the LAL chamber 42 and can separate the lower LAL surface 50 from the patient contacting surface 52. The three-dimensionally engineered spacer 48 can be composed of SpaceNet®, which is a product of Freudenberg. It should be appreciated that the three-dimensionally engineered spacer 48 can be composed of other materials having a high fluid porosity and having some resistance against flattening. It should also be appreciated that the three-dimensionally engineered spacer 42 can include at least one chamber and/or bladder (not shown) therewithin. It should also be appreciated that the mattress spacer 30 and the three-dimensionally engineered spacer 48 can be composed of the same material and have the same physical characteristics.

[0040] The resistance to flow for the three-dimensionally engineered spacer 48 when fluid is supplied to the LAL topper 18 at a rate of 2.2 ft<sup>3</sup>/min. can be less than about 1 (lb./in<sup>2</sup>)/(ft<sup>3</sup>/min.). In one illustrative embodiment, the resistance to flow for the three-dimensionally engineered spacer 48 can be between about .1 (lbs./in<sup>2</sup>)/(ft<sup>3</sup>/min.) and .7 (lbs./in<sup>2</sup>)/(ft<sup>3</sup>/min.). It should be appreciated that the resistance to flow can be more than 1 (lb./in<sup>2</sup>)/(ft<sup>3</sup>/min.). It should be appreciated that the moisture vapor transfer rate can be between 25 g/m<sup>2</sup>-hr and 200 g/m<sup>2</sup>-hr. Where three-dimensionally engineered spacer 48 is composed of SpaceNet®, the thickness of the three-dimensionally engineered spacer 48 can be between about .1 in. and .75 in. It should be appreciated that the thickness of the three-dimensionally engineered spacer 48 can be greater than .75 in.

[0041] The control system 14 can include a plurality of sensors 60, a fluid supply 62, and a controller 64 as shown in FIGs. 3 & 4. The sensors 60 can be temperature sensors and/or moisture sensors that can be adapted to generate signals corresponding to the temperature and relative humidity of the patient contacting surface 52. The sensors 60 can be positioned within the LAL ticking 40 and can be operatively coupled with the controller 64 via a wire 66. It should be appreciated that the sensors 60 can be coupled to the patient contacting surface 52 or coupled within

-13-

the LAL chamber 42. It should also be appreciated that the sensors 60 can communicate wirelessly with the controller 64.

[0042] The fluid supply 62 can be an air blower 62 that can supply air to the LAL topper 18. It should be appreciated that the fluid supply 62 can supply a various other gasses and/or liquids. The fluid supply 62 can removably couple with the LAL topper 18 via a hose 68. It should be appreciated that the fluid supply 62 can connect directly to the LAL topper 18. It should also be appreciated that the blower can be integrated or partially integrated within the mattress 16 or LAL topper 18. The fluid supply 62 may also include a heating element (not shown) and/or cooling element (not shown) that can heat and/or cool the fluid being supplied.

[0043] Determining what characteristics the fluid supply 62 can have in order to meet the desired range(s) can depend on the physical characteristics of the materials included in the support device 12, as well as any material (not shown) positioned between the patient P1 and the support device 12. The fluid supply can be configured to supply fluid to the LAL topper 18 at a rate of 2.2 ft<sup>3</sup>/min. and at a temperature of about 18.3 °C (65 °F) to 29.4 °C (85 °F) so that the temperature of the fluid flowing directly beneath the LAL ticking 40 portion proximate the sacrum is about 29.4 °C (85 °F) to 35 °C (95 °F). It should be appreciated that the fluid supply 62 can supply fluid at a rate of 2.2 ft<sup>3</sup>/min. and at a temperature of about 18.3 °C (65 °F) to 29.4 °C (85 °F) to the mattress 16. It should further be appreciated that the fluid supply 62 can supply fluid at a temperature of about -3.9 °C (25 °F) to 29.4 °C (85 °F). It should also be appreciated that the fluid supply 62 can be required to supply fluid at a rate higher or lower than 2.2 ft<sup>3</sup>/min. and/or at a temperature lower than the aforementioned range based on the physical characteristics of the materials included in the support device 12 and positioned between the patient P1 and the support device 12.

[0044] The controller 64 can be operatively coupled to the fluid supply 62 and the sensors 60, and can be positioned within the LAL chamber 42 of the LAL topper 18 as shown in FIGs. 3 & 4. It should be appreciated that the controller 64 may be mounted to the mattress 16, a hospital be frame (not shown), a footboard (not shown), the fluid supply 62, or other support structures. It should also be appreciated that the controller 64 can be integrated into the fluid supply 62, a hospital bed control system (not shown), or other control systems configured to regulate the fluid supply 62.

-14-

[0045] The controller 64 can include a processor 70 and memory 72 electrically coupled to the processor 70. The processor 70 can process the signals received from the sensors 60 and can execute instructions stored in the memory 72. The instructions can cause the controller 64 to regulate operation of the fluid supply 62 in accordance with the signals from the sensors 60 in order to maintain the temperature and/or relative humidity of the patient contacting surface 52 about the aforementioned ranges. The controller 64 can also receive a user input signal from a user input device (not shown) that allows the patient P1 to influence the regulation of the fluid supply 62. It should be appreciated that the user input signal can only influence the regulation of the fluid supply 62 within the aforementioned temperature and/or relative humidity ranges.

[0046] In operation, the fluid supply 62 can be initiated and fluid can be supplied through the hose 66 to the inlet 44 of the LAL topper 18. The fluid can flow into the LAL chamber 42, through the three-dimensionally engineered spacer 48, and out the vent 46. As the fluid flows through the LAL topper 18, the temperature and relative humidity of the patient contacting surface 52 can be maintained within the predetermined temperature and relative humidity ranges, such as, the ranges described earlier. The sensors 60 can generate signals representative of the temperature and relative humidity of the patient contact surface 52 and communicate the signals to the processor 70 of the controller 64. The processor 70 can process the signals and can execute the instructions stored in the memory 72 in accordance with the signals from the sensors 60 to regulate operation of the fluid supply 62 in accordance with the signals. It should be appreciated that a patient P1 need not be contacting the support device 12 for regulation of the temperature and relative humidity of the patient contacting surface 52 to occur.

[0047] Many other embodiments of the present disclosure are also envisioned. The structure of such embodiments may utilize one or more illustrative components described above, or other appropriate components, now known to be developed

[0048] For example, a microclimate management system 10 comprises a support device 12, a fluid supply 62, and a controller 64. The support device 12 includes a person contacting surface 52. The fluid supply 62 couples with the support device 12 and supplies fluid to the support device 12. The controller 64 is operatively coupled to the fluid supply 62 and includes an instruction set. The instruction set

-15-

causes the controller 64 to regulate at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about  $140 \text{ W/m}^2$ .

[0049] In another example, a microclimate management system 10 comprises a mattress 16, a topper 18, and a control system 14. The topper 18 is coupled to the mattress 16 and is supported thereon. The topper 18 defines an interior region 42 and a person contacting surface 52. The control system 14 is configured to maintain at least one of a surface temperature, a relative surface humidity, and a heat withdrawal capacity of at least a portion of the person contacting surface 52 within a predetermined operating range.

[0050] In another example, a microclimate management system 10 comprises a support device 12, a fluid supply 62, and a controller 64. The support device 12 includes a person contacting surface 52. The fluid supply 62 is coupled with the support device 12 and supplies fluid to the support device 12. The controller 64 includes an instruction set. The instruction set causes the controller 64 to regulate at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 to maintain a surface temperature of at least a portion of the person contacting surface 52 above about  $88^\circ$  Fahrenheit and a relative humidity of at least a portion of the person contacting surface 52 below about 95%.

[0051] In yet another example, at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a topper 18 coupled on a mattress 16 is sensed. A fluid supply 62 in communication with the topper 18 is regulated as a function of at least one of the temperature of at least a portion of the person contacting surface 52 and the relative humidity of at least a portion of the person contacting surface 52 to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

[0052] In yet another example, at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a support device 12 is sensed. A person comfort input signal is received from an input device 60. A fluid supply 62 in communication with the support device 12 is regulated as a function of at least two of the temperature of at least a portion of the person contacting surface 52, the relative humidity of at least a portion of the person

-16-

contacting surface 52, and the person comfort input signal to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

[0053] In still another example, at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a topper 18 coupled on a mattress 16 is sensed. A person comfort input signal is received from an input device 60. A fluid supply 62 in communication with the topper 18 is regulated as a function of at least one of the temperature of at least a portion of the person contacting surface 52, the relative humidity of at least a portion of the person contacting surface 52, and the person comfort input signal to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

[0054] In still another example, a relative humidity and a temperature of a person contacting surface 52 of a support device 12 is sensed. At least one of a rate and a temperature of fluid supplied by a fluid supply 62 to the support device 12 is regulated as a function of the temperature of the person contacting surface 52 and the relative humidity of the person contacting surface 52 to maintain the person contacting surface 52 within a predetermined operating range.

[0055] In a further example, an apparatus comprises a mattress 16, a topper 18, and a sensor 60. The topper 18 is coupled on the mattress 16. The topper 18 includes a cover 40 and has fluid communicated through at least a portion of the topper 18. The topper 18 defines an interior region 42 and a portion of the cover 40 defines a person contacting surface 52. The sensor 60 is configured to sense at least one of a temperature of the person contacting surface 52 a relative humidity of the person contacting surface 52, a temperature of the fluid within the topper 18, and a relative humidity of the fluid within the topper 18.

[0056] In a further example, a support device 12 is provided. The support device 12 includes a cover 40 and a spacer 48. The cover 40 defines an interior region 42 and at least a portion of the cover 40 defines a person contacting surface 52. The cover 40 also defines a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter. The spacer 48 is positioned within the interior region 42. The spacer 48 defines a fluid resistance parameter, a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter. A fluid supply 62 is selected to cooperate with at least one of the fluid permeability parameter of the cover 40, the thickness parameter of the cover 40, the thermal conductivity of the cover 40, the fluid resistance parameter of the spacer 48, the fluid

-17-

permeability parameter of the spacer 48, the thermal conductivity parameter of the spacer 48, and the thickness parameter of the spacer 48 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about 140 W/m<sup>2</sup>.

[0057] In yet a further example, a support device 12 is provided. The support device 12 includes a cover 40 and a spacer 48. The cover 40 defines an interior region 42 and at least a portion of the cover 40 defines a person contacting surface 52. The cover 40 also defines a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter. The spacer 48 is positioned within the interior region 42. The spacer 48 defines a fluid resistance parameter, a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter. At least one of the fluid permeability parameter of the cover 40, the thickness parameter of the cover 40, the thermal conductivity of the cover 40, the fluid resistance parameter of the spacer 48, the fluid permeability parameter of the spacer 48, the thermal conductivity parameter of the spacer 48, and the thickness parameter of the spacer 48 is varied to cooperate with the fluid supply 62 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about 140 W/m<sup>2</sup>.

[0058] Any theory, mechanism of operation, proof, or finding stated herein is meant to further enhance understanding of the present disclosure and is not intended to make the present disclosure in any way dependent upon such theory, mechanism of operation, proof, or finding. It should be understood that while the use of the word preferable, preferably or preferred in the description above indicates that the feature so described may be more desirable, it nonetheless may not be necessary and embodiments lacking the same may be contemplated as within the scope of the disclosure, that scope being defined by the claims that follow. In reading the claims it is intended that when words such as “a,” “an,” “at least one,” “at least a portion” are used there is no intention to limit the claim to only one item unless specifically stated to the contrary in the claim. When the language “at least a portion” and/or “a portion” is used the item may include a portion and/or the entire item unless specifically stated to the contrary. While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the selected embodiments have been shown and described and that all changes, modifications and equivalents

-18-

that come within the spirit of the invention as defined herein or by any of the following claims are desired to be protected.

-19-

WHAT IS CLAIMED IS:

1. A microclimate management system 10 comprising:  
a support device 12 including a person contacting surface 52;  
a fluid supply 62 coupled with the support device 12 and supplying fluid to the support device 12; and  
a controller 64 operatively coupled to the fluid supply 62 and including an instruction set, the instruction set causing the controller 64 to regulate at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about  $140 \text{ W/m}^2$ .
2. The microclimate management system 10 of claim 1, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about  $50 \text{ W/m}^2$ .
3. The microclimate management system 10 of claim 1, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about  $60 \text{ W/m}^2$  and about  $125 \text{ W/m}^2$ .
4. The microclimate management system 10 of claim 1, wherein the temperature of the person contacting surface 52 is maintained below about  $35.8 \text{ }^\circ\text{C}$  ( $96.5 \text{ }^\circ\text{F}$ ).
5. The microclimate management system 10 of claim 1, wherein the temperature of the person contacting surface 52 is maintained above about  $31.1 \text{ }^\circ\text{C}$  ( $88 \text{ }^\circ\text{F}$ ).
6. The microclimate management system 10 of claim 1, wherein the temperature of the person contacting surface 52 is maintained between about  $32.2 \text{ }^\circ\text{C}$  ( $90 \text{ }^\circ\text{F}$ ) and about  $35.3 \text{ }^\circ\text{C}$  ( $95.5 \text{ }^\circ\text{F}$ ).

-20-

7. The microclimate management system 10 of claim 1, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

8. The microclimate management system 10 of claim 1, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

9. The microclimate management system 10 of claim 1, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

10. The microclimate management system 10 of claim 1 further comprising sensors 60 operatively coupled to the controller 64, the sensors 60 being configured to provide a signal indicative of one of the temperature and humidity of the person contacting surface 52.

11. The microclimate management system 10 of claim 10, wherein support device 12 includes a cover 40 defining an interior region 42 and a portion of the cover 40 defining the person contacting surface 52, the sensors 60 being integrated into the cover 40.

12. The microclimate management system 10 of claim 10, wherein the sensors 60 are positioned within the interior region 42 proximate the person contacting surface 52.

13. The microclimate management system 10 of claim 1, wherein the support device 12 includes at least one fluid bladder 28 therein, the controller 64 being configured to regulate the pressure of the fluid within the fluid bladder 28.

14. The microclimate management system 10 of claim 1, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

-21-

15. The microclimate management system 10 of claim 1, wherein the support device 12 includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 includes a cover 40 defining an interior region 42 and a portion of the cover 42 defining the person contacting surface 52.

16. The microclimate management system 10 of claim 15, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

17. The microclimate management system 10 of claim 16, wherein the support layer 48 is a three-dimensionally engineered spacer.

18. The microclimate management system 10 of claim 1 further comprising an input device 60 configured to receive an input from a person indicative of a person's comfort level.

19. The microclimate management system 10 of claim 18, wherein the instruction set causes the controller 64 to further regulate the fluid supply 62 as a function of the input from the input device 60.

20. The microclimate management system 10 of claim 1, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for less than about 6 hours.

21. The microclimate management system 10 of claim 1, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for more than about 6 hours.

22. A microclimate management system 10 comprising:  
a mattress 16;  
a topper 18 coupled to the mattress 16 and supported thereon, the topper 18 defining an interior region 42 and a person contacting surface 52; and  
a control system 14 configured to maintain at least one of a surface temperature, a relative surface humidity, and a heat withdrawal capacity of at least a portion of the person contacting surface 52 within a predetermined operating range.

-22-

23. The microclimate management system 10 of claim 22, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$ .

24. The microclimate management system 10 of claim 22, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about  $50 \text{ W/m}^2$ .

25. The microclimate management system 10 of claim 22, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about  $60 \text{ W/m}^2$  and about  $125 \text{ W/m}^2$ .

26. The microclimate management system 10 of claim 22, wherein the temperature of the person contacting surface 52 is maintained below about  $35.8 \text{ }^\circ\text{C}$  ( $96.5 \text{ }^\circ\text{F}$ ).

27. The microclimate management system 10 of claim 22, wherein the temperature of the person contacting surface 52 is maintained above about  $31.1 \text{ }^\circ\text{C}$  ( $88 \text{ }^\circ\text{F}$ ).

28. The microclimate management system 10 of claim 22, wherein the temperature of the person contacting surface 52 is maintained between about  $32.2 \text{ }^\circ\text{C}$  ( $90 \text{ }^\circ\text{F}$ ) and about  $35.3 \text{ }^\circ\text{C}$  ( $95.5 \text{ }^\circ\text{F}$ ).

29. The microclimate management system 10 of claim 22, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

30. The microclimate management system 10 of claim 22, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

-23-

31. The microclimate management system 10 of claim 22, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

32. The microclimate management system 10 of claim 22, wherein the control system 14 includes a controller 64 and sensors 60 operatively coupled to the controller 64, the sensors 60 being configured to provide a signal indicative of one of the temperature and humidity of the person contacting surface 52.

33. The microclimate management system 10 of claim 32, the sensors 60 are positioned within the interior region 42 proximate the person contacting surface 52.

34. The microclimate management system 10 of claim 32, wherein the sensors 60 are integrated into the person contacting surface 52.

35. The microclimate management system 10 of claim 22, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

36. The microclimate management system 10 of claim 35, wherein the support layer 48 is a three-dimensionally engineered spacer.

37. The microclimate management system 10 of claim 35, wherein the support layer 48 includes at least one bladder 28.

38. The microclimate management system 10 of claim 35, wherein the support layer 48 is quilted.

39. The microclimate management system 10 of claim 22, wherein the control system 14 includes a fluid supply 62 configured to supply fluid to at least one of the topper 18 and the mattress 16.

40. The microclimate management system 10 of claim 39, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

-24-

41. The microclimate management system 10 of claim 39, wherein the control system 14 regulates at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 to maintain the person contacting surface 52 within the predetermined operating range.

42. The microclimate management system 10 of claim 22, wherein the control system 14 includes an input device 60 configured to receive input from a person indicative of a person's comfort level.

43. The microclimate management system 10 of claim 42, wherein the control system 14 further regulates the fluid supply 62 as a function of the input from the input device 60.

44. The microclimate management system of claim 22, wherein the topper 18 is secured to mattress 16 and supports a person on the person contacting surface 52.

45. The microclimate management system 10 of claim 22, wherein at least one of a surface temperature, a relative surface humidity, and a heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained within a predetermined operating range for less than about 6 hours.

46. The microclimate management system 10 of claim 22, wherein at least one of a surface temperature, a relative surface humidity, and a heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained within a predetermined operating range for more than about 6 hours.

47. A microclimate management system 10 comprising:  
a support device 12 including a person contacting surface 52;  
a fluid supply 62 coupled with the support device 12 and supplying fluid to the support device 12; and  
a controller 64 including an instruction set, the instruction set causing the controller 64 to regulate at least one of the rate the fluid is supplied by the fluid

-25-

supply 62 and temperature of the fluid supplied by the fluid supply 62 to maintain a surface temperature of at least a portion of the person contacting surface 52 above about 88° Fahrenheit and a relative humidity of at least a portion of the person contacting surface 52 below about 95%.

48. The microclimate management system 10 of claim 47, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about 140 W/m<sup>2</sup>.

49. The microclimate management system 10 of claim 47, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about 50 W/m<sup>2</sup>.

50. The microclimate management system 10 of claim 47, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about 60 W/m<sup>2</sup> and about 125 W/m<sup>2</sup>.

51. The microclimate management system 10 of claim 47, wherein the temperature of the person contacting surface 52 is maintained below about 35.8 °C (96.5 °F).

52. The microclimate management system 10 of claim 47, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

53. The microclimate management system 10 of claim 47, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

54. The microclimate management system 10 of claim 47, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

-26-

55. The microclimate management system 10 of claim 47 further comprising sensors 60 operatively coupled to the controller 64, the sensors 60 being configured to provide a signal indicative of one of the temperature and humidity of the person contacting surface 52.

56. The microclimate management system 10 of claim 55, wherein support device 12 includes a cover 40, a portion of the cover 40 defining the person contacting surface 52, the sensors 60 being integrated into the person contacting surface 52.

57. The microclimate management system 10 of claim 56, wherein support device 12 includes a cover 40 defining an interior region 42, the sensors 60 being positioned within the interior region 42 proximate the person contacting surface 52.

58. The microclimate management system 10 of claim 47, wherein the support device 12 includes at least one fluid bladder 28 therein, the controller 64 being configured to regulate the pressure of the fluid within the fluid bladder 28.

59. The microclimate management system 10 of claim 47, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

60. The microclimate management system 10 of claim 47, wherein the support device 12 includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 includes a cover 40 defining an interior region 42 and a portion of the cover 42 defining the person contacting surface 52.

61. The microclimate management system 10 of claim 60, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

62. The microclimate management system 10 of claim 61, wherein the support layer 48 is a three-dimensionally engineered spacer.

-27-

63. The microclimate management system 10 of claim 47 further comprising an input device 60 configured to receive an input from a person indicative of a person's comfort level.

64. The microclimate management system 10 of claim 47, wherein the instruction set causes the controller 64 to further regulate the fluid supply 62 as a function of the input from the input device 60.

65. The microclimate management system 10 of claim 47, wherein the surface temperature of at least a portion of the person contacting surface 52 is maintained above about 88° Fahrenheit and the relative humidity of at least a portion of the person contacting surface 52 is maintained below about 95% for more than about 6 hours.

66. The microclimate management system 10 of claim 47, wherein the surface temperature of at least a portion of the person contacting surface 52 is maintained above about 88° Fahrenheit and the relative humidity of at least a portion of the person contacting surface 52 is maintained below about 95% for less than about 6 hours.

67. A method comprising:  
sensing at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a topper 18 coupled on a mattress 16;  
and  
regulating a fluid supply 62 in communication with the topper 18 as a function of at least one of the temperature of at least a portion of the person contacting surface 52 and the relative humidity of at least a portion of the person contacting surface 52 to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

68. The method of claim 67 further comprising the steps of:  
sensing the temperature of the area proximate one of the mattress 16 and the topper 18;

-28-

calculating a heat withdrawal capacity of at least a portion of the person contacting surface 52 as a function of the temperature of at least a portion of the contacting surface 52, the relative humidity of at least a portion of the contacting surface 52, and the temperature of an area proximate one of the mattress 16 and the topper 18; and

further regulating the fluid supply 68 as a function of the heat withdrawal capacity to maintain to maintain at least a portion of the person contacting surface 52 within the predetermined operating range.

69. The method of claim 68, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about 140 W/m<sup>2</sup>.

70. The method of claim 68, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about 50 W/m<sup>2</sup>.

71. The method of claim 68, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about 60 W/m<sup>2</sup> and about 125 W/m<sup>2</sup>.

72. The method of claim 67, wherein the temperature of the person contacting surface 52 is maintained below about 35.8 °C (96.5 °F).

73. The method of claim 67, wherein the temperature of the person contacting surface 52 is maintained above about 31.1 °C (88 °F).

74. The method of claim 67, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

75. The method of claim 67, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

-29-

76. The method of claim 67, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

77. The method of claim 67, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

78. The method of claim 67, wherein the at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

79. The method of claim 78, wherein the sensors 60 are positioned proximate the person contacting surface 52.

80. The method of claim 78, wherein the sensors 60 are integrated into the person contacting surface 52.

81. The method of claim 67, wherein the topper 18 includes a cover defining an interior region 42 and a support layer 48 positioned within the interior region 42.

82. The method of claim 81, wherein the support layer 48 is a three-dimensionally engineered spacer.

83. The method of claim 81, wherein the support layer 48 includes at least one bladder 28.

84. The method of claim 81, wherein the support layer 48 is quilted.

85. The method of claim 67, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

86. The method of claim 67, wherein at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the

-30-

fluid supply 62 is regulated to maintain the person contacting surface 52 within the predetermined operating range.

87. The method of claim 67, wherein the fluid supply 62 is further regulated as a function of a user input indicative of a person's comfort level input through an input device 60.

88. The method of claim 67, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for less than about 6 hours.

89. The method of claim 67, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for more than about 6 hours.

90. A method comprising:  
sensing at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a support device 12;  
receiving a person comfort input signal from an input device 60; and  
regulating a fluid supply 62 in communication with the support device 12 as a function of at least two of the temperature of at least a portion of the person contacting surface 52, the relative humidity of at least a portion of the person contacting surface 52, and the person comfort input signal to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

91. The method of claim 90 further comprising the steps of:  
sensing the temperature of the area proximate the support device 12;  
calculating a heat withdrawal capacity of at least a portion of the person contacting surface 52 as a function of the temperature of at least a portion of the contacting surface 52, the relative humidity of at least a portion of the contacting surface 52, and the temperature of an area proximate the support device 12; and  
further regulating the fluid supply 62 as a function of the heat withdrawal capacity to maintain to maintain at least a portion of the person contacting surface 52 within the predetermined operating range.

92. The method of claim 91, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about 140 W/m<sup>2</sup>.

93. The method of claim 91, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about 50 W/m<sup>2</sup>.

94. The method of claim 91, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about 60 W/m<sup>2</sup> and about 125 W/m<sup>2</sup>.

95. The method of claim 90, wherein the temperature of the person contacting surface 52 is maintained below about 35.8 °C (96.5 °F).

96. The method of claim 90, wherein the temperature of the person contacting surface 52 is maintained above about 31.1 °C (88 °F).

97. The method of claim 90, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

98. The method of claim 90, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

99. The method of claim 90, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

100. The method of claim 90, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

-32-

101. The method of claim 90, wherein the at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

102. The method of claim 101, wherein the sensors 60 are positioned proximate the person contacting surface 52.

103. The method of claim 101, wherein the sensors 60 are integrated into the person contacting surface 52.

104. The method of claim 90, wherein the support device includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 having a cover 40 defining an interior region 42 and a support layer 48 positioned within the interior region 42.

105. The method of claim 104, wherein the support layer 48 is a three-dimensionally engineered spacer.

106. The method of claim 90, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

107. The method of claim 90, wherein at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 is regulated to maintain the person contacting surface 52 within the predetermined operating range.

108. The method of claim 90, wherein the input device 60 is a touch screen input device.

109. The method of claim 90, wherein the input device 60 is a keyboard input device.

110. The method of claim 90, wherein the input device 60 is a pendant input device.

-33-

111. The method of claim 90, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for less than about 6 hours.

112. The method of claim 90, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for more than about 6 hours.

113. A method comprising:  
sensing at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 of a topper 18 coupled on a mattress 16;  
receiving a person comfort input signal from an input device 60; and  
regulating a fluid supply 62 in communication with the topper 18 as a function of at least one of the temperature of at least a portion of the person contacting surface 52, the relative humidity of at least a portion of the person contacting surface 52, and the person comfort input signal to maintain at least a portion of the person contacting surface 52 within a predetermined operating range.

114. The method of claim 113 further comprising the steps of:  
sensing the temperature of the area proximate the support device 12;  
calculating a heat withdrawal capacity of at least a portion of the person contacting surface 52 as a function of the temperature of at least a portion of the contacting surface 52, the relative humidity of at least a portion of the contacting surface 52, and the temperature of an area proximate the support device 12; and  
further regulating the fluid supply 62 as a function of the heat withdrawal capacity to maintain to maintain at least a portion of the person contacting surface 52 within the predetermined operating range.

115. The method of claim 114, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about 140 W/m<sup>2</sup>.

-34-

116. The method of claim 114, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about 50 W/m<sup>2</sup>.

117. The method of claim 114, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about 60 W/m<sup>2</sup> and about 125 W/m<sup>2</sup>.

118. The method of claim 113, wherein the temperature of the person contacting surface 52 is maintained below about 35.8 °C (96.5 °F).

119. The method of claim 113, wherein the temperature of the person contacting surface 52 is maintained above about 31.1 °C (88 °F).

120. The method of claim 113, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

121. The method of claim 113, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

122. The method of claim 113, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

123. The method of claim 113, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

124. The method of claim 113, wherein the at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

125. The method of claim 124, wherein the sensors 60 are positioned within the topper 18 proximate the person contacting surface 52.

-35-

126. The method of claim 124, wherein the sensors 60 are integrated into the person contacting surface 52.

127. The method of claim 113, wherein the topper 18 has a cover 40 defining an interior region 42 and a support layer 48 positioned within the interior region 42.

128. The method of claim 127, wherein the support layer 48 is a three-dimensionally engineered spacer.

129. The method of claim 127, wherein the support layer 48 includes at least one bladder 28.

130. The method of claim 127, wherein the support layer 48 is quilted.

131. The method of claim 113, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

132. The method of claim 113, wherein the user input device 60 is a touch screen input device.

133. The method of claim 113, wherein the user input device 60 is a keyboard input device.

134. The method of claim 113, wherein the user input device 60 is a pendant input device.

135. The method of claim 113, wherein at least one of the rate the fluid is supplied by the fluid supply 62 and temperature of the fluid supplied by the fluid supply 62 is regulated to maintain the person contacting surface 52 within the predetermined operating range.

-36-

136. The method of claim 113, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for less than about 6 hours.

137. The method of claim 113, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for more than about 6 hours.

138. A method comprising:  
sensing a relative humidity and a temperature of a person contacting surface 52 of a support device 12; and  
regulating at least one of a rate and a temperature of fluid supplied by a fluid supply 62 to the support device 12 as a function of the temperature of the person contacting surface 52 and the relative humidity of the person contacting surface 52 to maintain the person contacting surface 52 within a predetermined operating range.

139. The method of claim 138 further comprising the steps of:  
sensing the temperature of the area proximate one of the support device 12;  
calculating a heat withdrawal capacity of at least a portion of the person contacting surface 52 as a function of the temperature of at least a portion of the contacting surface 52, the relative humidity of at least a portion of the contacting surface 52, and the temperature of an area proximate the support device 12; and  
further regulating the fluid supply 62 as a function of the heat withdrawal capacity to maintain to maintain at least a portion of the person contacting surface 52 within the predetermined operating range.

140. The method of claim 139, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about 140 W/m<sup>2</sup>.

141. The method of claim 139, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about 50 W/m<sup>2</sup>.

-37-

142. The method of claim 139, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about  $60 \text{ W/m}^2$  and about  $125 \text{ W/m}^2$ .

143. The method of claim 138, wherein the temperature of the person contacting surface 52 is maintained below about  $35.8 \text{ }^\circ\text{C}$  ( $96.5 \text{ }^\circ\text{F}$ ).

144. The method of claim 138, wherein the temperature of the person contacting surface 52 is maintained above about  $31.1 \text{ }^\circ\text{C}$  ( $88 \text{ }^\circ\text{F}$ ).

145. The method of claim 138, wherein the temperature of the person contacting surface 52 is maintained between about  $32.2 \text{ }^\circ\text{C}$  ( $90 \text{ }^\circ\text{F}$ ) and about  $35.3 \text{ }^\circ\text{C}$  ( $95.5 \text{ }^\circ\text{F}$ ).

146. The method of claim 138, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

147. The method of claim 138, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

148. The method of claim 138, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

149. The method of claim 138, wherein the at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

150. The method of claim 149, wherein the sensors 60 are positioned proximate the person contacting surface 52.

151. The method of claim 149, wherein the sensors 60 are integrated into the person contacting surface 52.

-38-

152. The method of claim 138, wherein the support device 12 includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 includes a cover 40 that defines an interior region 42.

153. The method of claim 152, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

154. The method of claim 153, wherein the support layer 48 is a three-dimensionally engineered spacer.

155. The method of claim 138, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

156. The method of claim 138, wherein the fluid supply 62 is further regulated as a function of a user input indicative of a person's comfort level input through a user input device 60.

157. The method of claim 138, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for less than about 6 hours.

158. The method of claim 138, wherein the at least a portion of the person contacting surface is maintained within the predetermined operating range for more than about 6 hours.

159. An apparatus comprising:  
a mattress 16;  
a topper 18 coupled on the mattress 16, the topper 18 including a cover 40 and having fluid communicated through at least a portion of the topper 18, the topper 18 defining an interior region 42 and a portion of the cover 40 defining a person contacting surface 52; and  
a sensor 60 configured to sense at least one of a temperature of the person contacting surface 52 a relative humidity of the person contacting surface 52, a

-39-

temperature of the fluid within the topper 18, and a relative humidity of the fluid within the topper 18.

160. The apparatus of claim 159, wherein the sensors 60 are positioned within the topper 18 proximate the person contacting surface 52.

161. The apparatus of claim 159, wherein the sensors 60 are integrated into the person contacting surface 52.

162. The apparatus of claim 159, wherein the cover 40 defines an interior region 42, the topper 18 including a support layer 48 positioned within the interior region 42.

163. The apparatus of claim 162, wherein the support layer 48 is a three-dimensionally engineered spacer.

164. The apparatus of claim 162, wherein the support layer includes at least one bladder.

165. The apparatus of claim 162, wherein the support layer is quilted.

166. A method of manufacturing a microclimate management system 10 comprising:

providing a support device 12, the support device 12 including:

a cover 40 defining an interior region 42 and at least a portion of the cover 40 defining a person contacting surface 52, the cover 40 also defining a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter, and

a spacer 48 positioned within the interior region 42, the spacer 48 defining a fluid resistance parameter, a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter; and

selecting a fluid supply 62 to cooperate with at least one of the fluid permeability parameter of the cover 40, the thickness parameter of the cover 40, the

-40-

thermal conductivity of the cover 40, the fluid resistance parameter of the spacer 48, the fluid permeability parameter of the spacer 48, the thermal conductivity parameter of the spacer 48, and the thickness parameter of the spacer 48 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about  $140 \text{ W/m}^2$ .

167. The method of claim 166, wherein the fluid supply 62 is configured to supply fluid at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

168. The method of claim 166, wherein the fluid supply 62 is configured to supply fluid at a temperature of about  $-3.9 \text{ }^\circ\text{C}$  ( $25 \text{ }^\circ\text{F}$ ) to about  $29.4 \text{ }^\circ\text{C}$  ( $85 \text{ }^\circ\text{F}$ ).

169. The method of claim 166, wherein the fluid supply 62 is configured to supply fluid at a temperature of about  $18.3 \text{ }^\circ\text{C}$  ( $65 \text{ }^\circ\text{F}$ ) to about  $29.4 \text{ }^\circ\text{C}$  ( $85 \text{ }^\circ\text{F}$ ).

170. The method of claim 166, wherein the fluid resistance parameter of the spacer 48 is less than about  $1 \text{ (lb./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

171. The method of claim 166, wherein the fluid resistance parameter of the spacer 48 is greater than about  $1 \text{ (lb./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

172. The method of claim 166, wherein the fluid resistance parameter of the spacer 48 is between about  $1 \text{ (lbs./in}^2\text{)}/(\text{ft}^3/\text{min.})$  and .about  $7 \text{ (lbs./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

173. The method of claim 166, wherein the fluid permeability parameter of the spacer 48 is between about  $25 \text{ g/m}^2\text{-hr}$  and about  $200 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

-41-

174. The method of claim 166, wherein the thickness of the spacer 48 is between about .1 in. and about .75 in.

175. The method of claim 166, wherein the fluid permeability parameter of the cover 40 is at least  $20 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

176. The method of claim 166, wherein the fluid permeability parameter of the cover 40 is at least  $80 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

177. The method of claim 166, wherein the fluid permeability parameter of the cover 40 is between about  $25 \text{ g/m}^2\text{-hr}$  and about  $200 \text{ g/m}^2\text{-hr}$ . when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

178. The method of claim 166, wherein the fluid supply 62 is selected to further cooperate with a material positioned between a person and the person contacting surface 52, the material having a thermal conductivity of between about  $.02 \text{ W/m} - \text{K}$  and about  $1000 \text{ W/m} - \text{K}$ .

179. The method of claim 166, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about  $50 \text{ W/m}^2$ .

180. The method of claim 166, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about  $60 \text{ W/m}^2$  and about  $125 \text{ W/m}^2$ .

181. The method of claim 166, wherein the temperature of the person contacting surface 52 is maintained below about  $35.8 \text{ }^\circ\text{C}$  ( $96.5 \text{ }^\circ\text{F}$ ).

182. The method of claim 166, wherein the temperature of the person contacting surface 52 is maintained above about  $31.1 \text{ }^\circ\text{C}$  ( $88 \text{ }^\circ\text{F}$ ).

-42-

183. The method of claim 166, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

184. The method of claim 166, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

185. The method of claim 166, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

186. The method of claim 166, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

187. The method of claim 166, wherein at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

188. The method of claim 187, wherein the sensors 60 are positioned proximate the person contacting surface 52.

189. The method of claim 187, wherein the sensors 60 are integrated into the person contacting surface 52.

190. The method of claim 166, wherein the support device 12 includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 includes a cover 40 that defines an interior region 42.

191. The method of claim 190, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

192. The method of claim 191, wherein the support layer 48 is a three-dimensionally engineered spacer.

-43-

193. The method of claim 166, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

194. The method of claim 166, wherein the fluid supply 62 is further regulated as a function of a user input indicative of a person's comfort level input through an input device 60.

195. The method of claim 166, wherein the support device 12 further includes a bladder 28 positioned within the interior region 42 and defining a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter, selecting a fluid supply 62 to further cooperate with at least one of the fluid permeability parameter of the bladder 28, the thickness parameter of the bladder 28, and the thermal conductivity of the bladder 28.

196. The method of claim 166, wherein a heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for less than about 6 hours.

197. The method of claim 166, wherein a heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for more than about 6 hours.

198. A method of manufacturing a microclimate management system 10, comprising:

providing a support device 12 in communication with a fluid supply 62, the support device 12 including:

a cover 40 defining an interior region 42 and at least a portion of the cover 40 defining a person contacting surface 52, the cover 40 also defining a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter, and

a spacer 48 positioned within the interior region 42, the spacer 48 defining a fluid resistance parameter, a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter; and

-44-

varying at least one of the fluid permeability parameter of the cover 40, the thickness parameter of the cover 40, the thermal conductivity of the cover 40, the fluid resistance parameter of the spacer 48, the fluid permeability parameter of the spacer 48, the thermal conductivity parameter of the spacer 48, and the thickness parameter of the spacer 48 to cooperate with the fluid supply 62 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about  $140 \text{ W/m}^2$ .

199. The method of claim 198, wherein the fluid supply 62 is configured to supply fluid at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

200. The method of claim 198, wherein the fluid supply 62 is configured to supply fluid at a temperature of about  $-3.9 \text{ }^\circ\text{C}$  ( $25 \text{ }^\circ\text{F}$ ) to about  $29.4 \text{ }^\circ\text{C}$  ( $85 \text{ }^\circ\text{F}$ ).

201. The method of claim 198, wherein the fluid supply 62 is configured to supply fluid at a temperature of about  $18.3 \text{ }^\circ\text{C}$  ( $65 \text{ }^\circ\text{F}$ ) to about  $29.4 \text{ }^\circ\text{C}$  ( $85 \text{ }^\circ\text{F}$ ).

202. The method of claim 198, wherein the fluid resistance parameter of the spacer 48 is less than about  $1 \text{ (lb./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

203. The method of claim 198, wherein the fluid resistance parameter of the spacer 48 is greater than about  $1 \text{ (lb./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

204. The method of claim 198, wherein the fluid resistance parameter of the spacer 48 is between about  $1 \text{ (lbs./in}^2\text{)}/(\text{ft}^3/\text{min.})$  and about  $7 \text{ (lbs./in}^2\text{)}/(\text{ft}^3/\text{min.})$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

205. The method of claim 198, wherein the fluid permeability parameter of the spacer 48 is between about  $25 \text{ g/m}^2\text{-hr}$  and about  $200 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

-45-

206. The method of claim 198, wherein the thickness of the spacer 48 is between about .1 in. and about .75 in.

207. The method of claim 198, wherein the fluid permeability parameter of the cover 40 is at least  $20 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

208. The method of claim 198, wherein the fluid permeability parameter of the cover 40 is at least  $80 \text{ g/m}^2\text{-hr}$  when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

209. The method of claim 198, wherein the fluid permeability parameter of the cover 40 is between about  $25 \text{ g/m}^2\text{-hr}$  and about  $200 \text{ g/m}^2\text{-hr}$ . when fluid is supplied at a rate of about  $2.2 \text{ ft}^3/\text{min}$ .

210. The method of claim 198, wherein the fluid supply 62 is selected to further cooperate with a material positioned between a person and the person contacting surface 52, the material having a thermal conductivity of between about  $.02 \text{ W/m - K}$  and about  $1000 \text{ W/m - K}$ .

211. The method of claim 198, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained above about  $50 \text{ W/m}^2$ .

212. The method of claim 198, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained between about  $60 \text{ W/m}^2$  and about  $125 \text{ W/m}^2$ .

213. The method of claim 198, wherein the temperature of the person contacting surface 52 is maintained below about  $35.8 \text{ }^\circ\text{C}$  ( $96.5 \text{ }^\circ\text{F}$ ).

214. The method of claim 198, wherein the temperature of the person contacting surface 52 is maintained above about  $31.1 \text{ }^\circ\text{C}$  ( $88 \text{ }^\circ\text{F}$ ).

215. The method of claim 198, wherein the temperature of the person contacting surface 52 is maintained between about 32.2 °C (90 °F) and about 35.3 °C (95.5 °F).

216. The method of claim 198, wherein the relative humidity of the person contacting surface 52 is maintained below about 95%.

217. The method of claim 198, wherein the relative humidity of the person contacting surface 52 is maintained above about 20%.

218. The method of claim 198, wherein the relative humidity of the person contacting surface 52 is maintained between about 55% and about 90%.

219. The method of claim 198, wherein at least one of a relative humidity and a temperature of at least a portion of a person contacting surface 52 is sensed by sensors 60.

220. The method of claim 219, wherein the sensors 60 are positioned proximate the person contacting surface 52.

221. The method of claim 219, wherein the sensors 60 are integrated into the person contacting surface 52.

222. The method of claim 198, wherein the support device 12 includes a mattress 16 and a topper 18 coupled on the mattress 16, the topper 18 includes a cover 40 that defines an interior region 42.

223. The method of claim 222, wherein the topper 18 includes a support layer 48 positioned within the interior region 42.

224. The method of claim 223, wherein the support layer 48 is a three-dimensionally engineered spacer.

-47-

225. The method of claim 198, wherein the fluid supply 62 includes at least one of a heating element and a cooling element.

226. The method of claim 198, wherein the fluid supply 62 is further regulated as a function of a user input indicative of a person's comfort level input through an input device 60.

227. The method of claim 198, wherein the support device 12 further includes a bladder 28 positioned within the interior region 42 and defining a fluid permeability parameter, a thermal conductivity parameter, and a thickness parameter, further varying at least one of the fluid permeability parameter of the bladder 28, the thickness parameter of the bladder 28, and the thermal conductivity of the bladder 28 to cooperate with the fluid supply 62 to maintain a heat withdrawal capacity of at least a portion of the person contacting surface 52 below about  $140 \text{ W/m}^2$

228. The method of claim 198, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for less than 6 hours.

229. The method of claim 198, wherein the heat withdrawal capacity of at least a portion of the person contacting surface 52 is maintained below about  $140 \text{ W/m}^2$  for more than 6 hours.

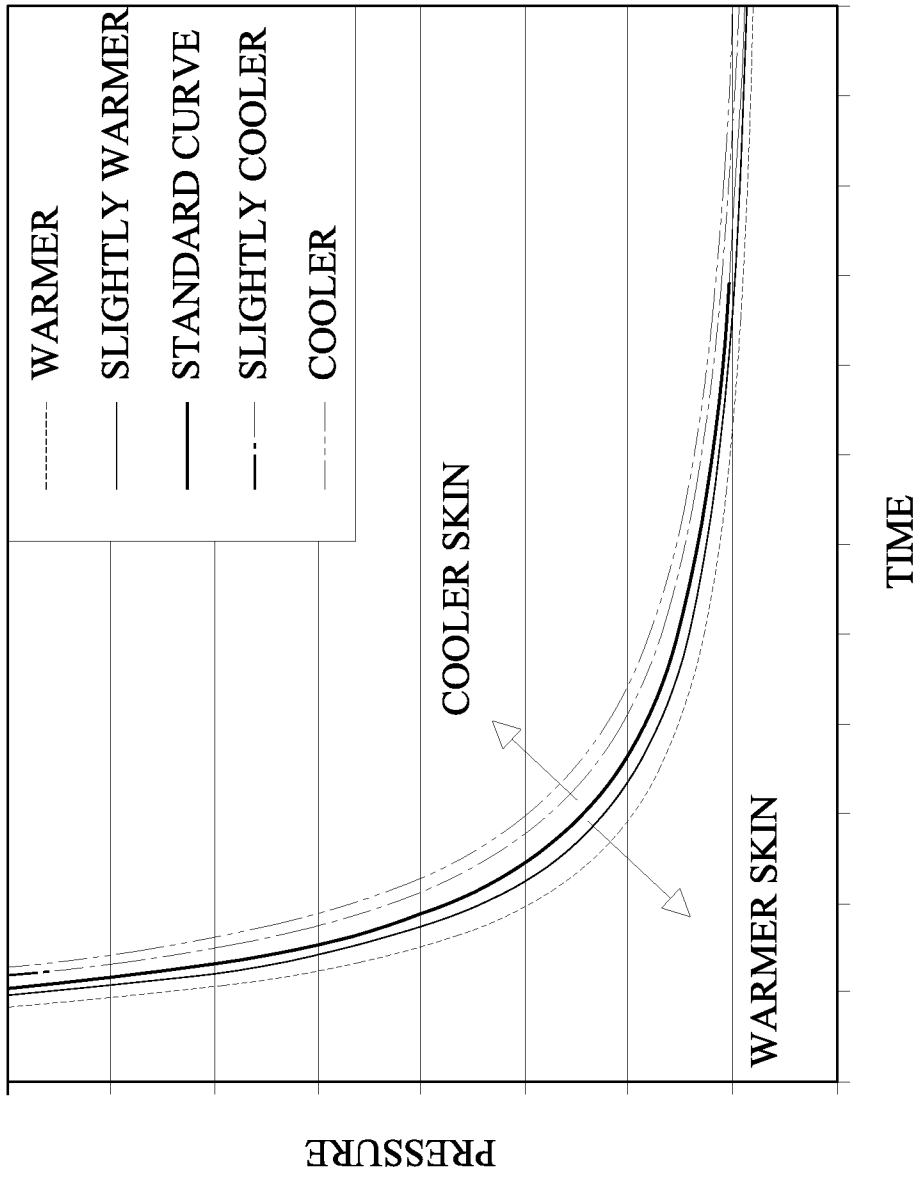


FIG. 1

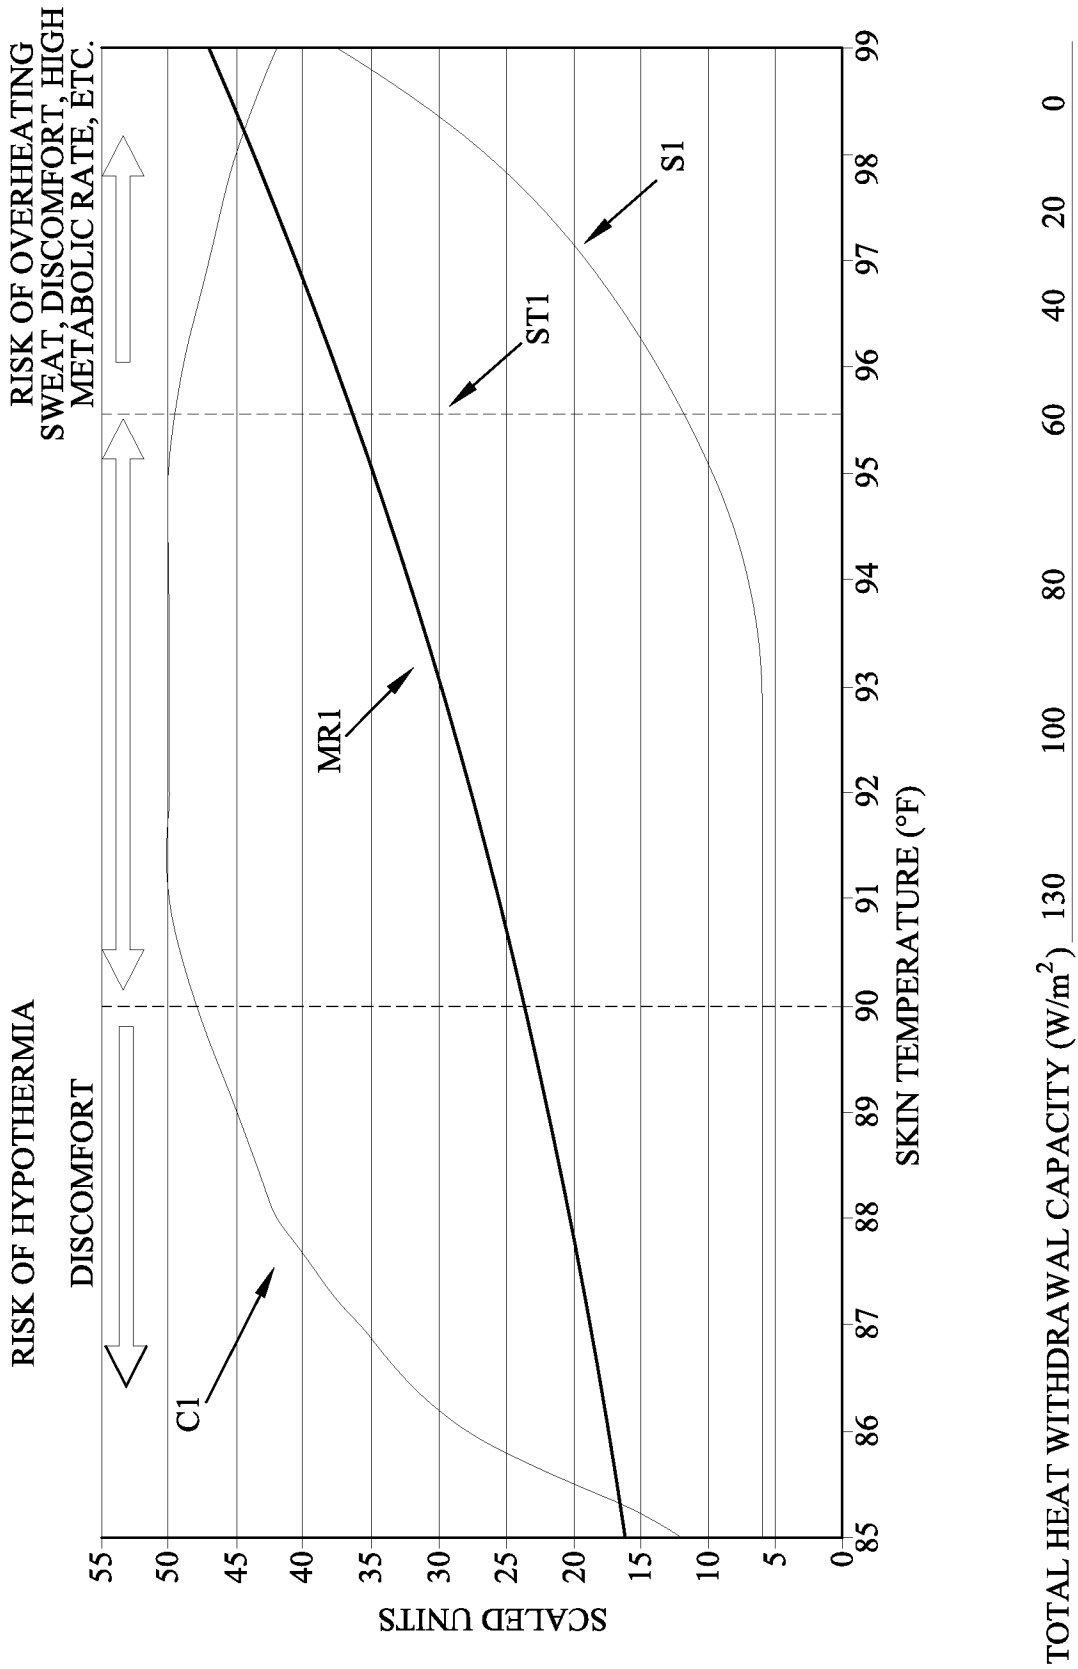


FIG. 2

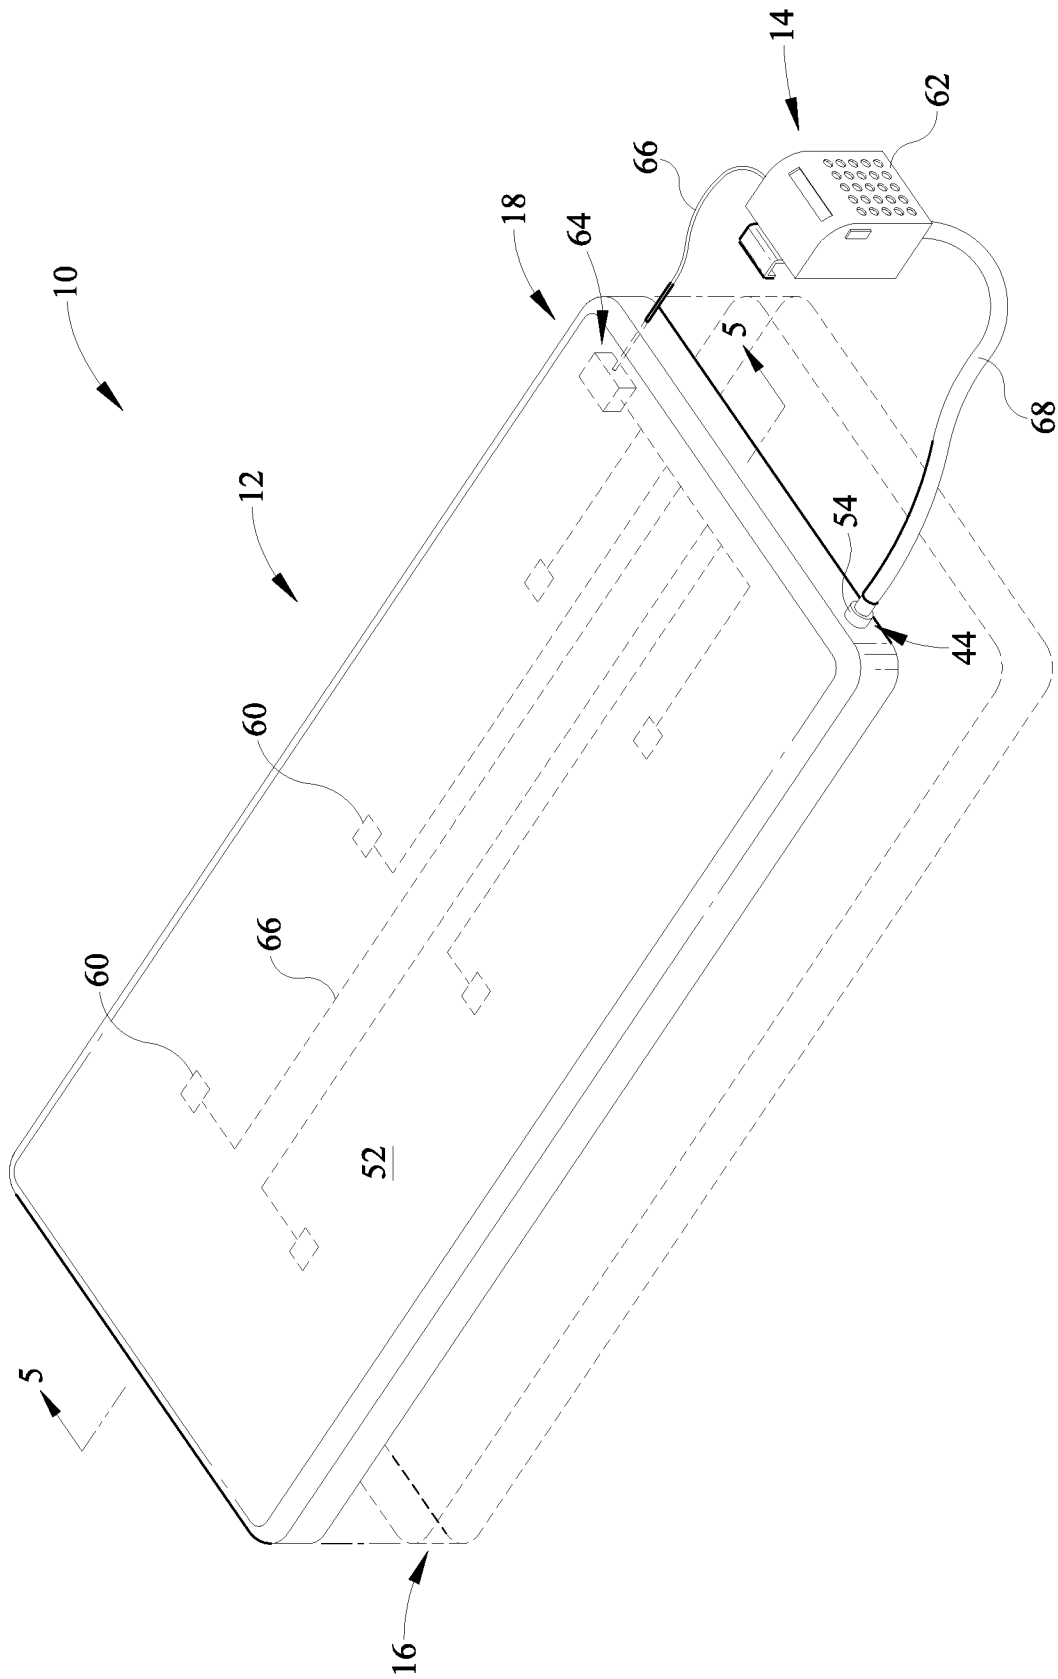


FIG. 3



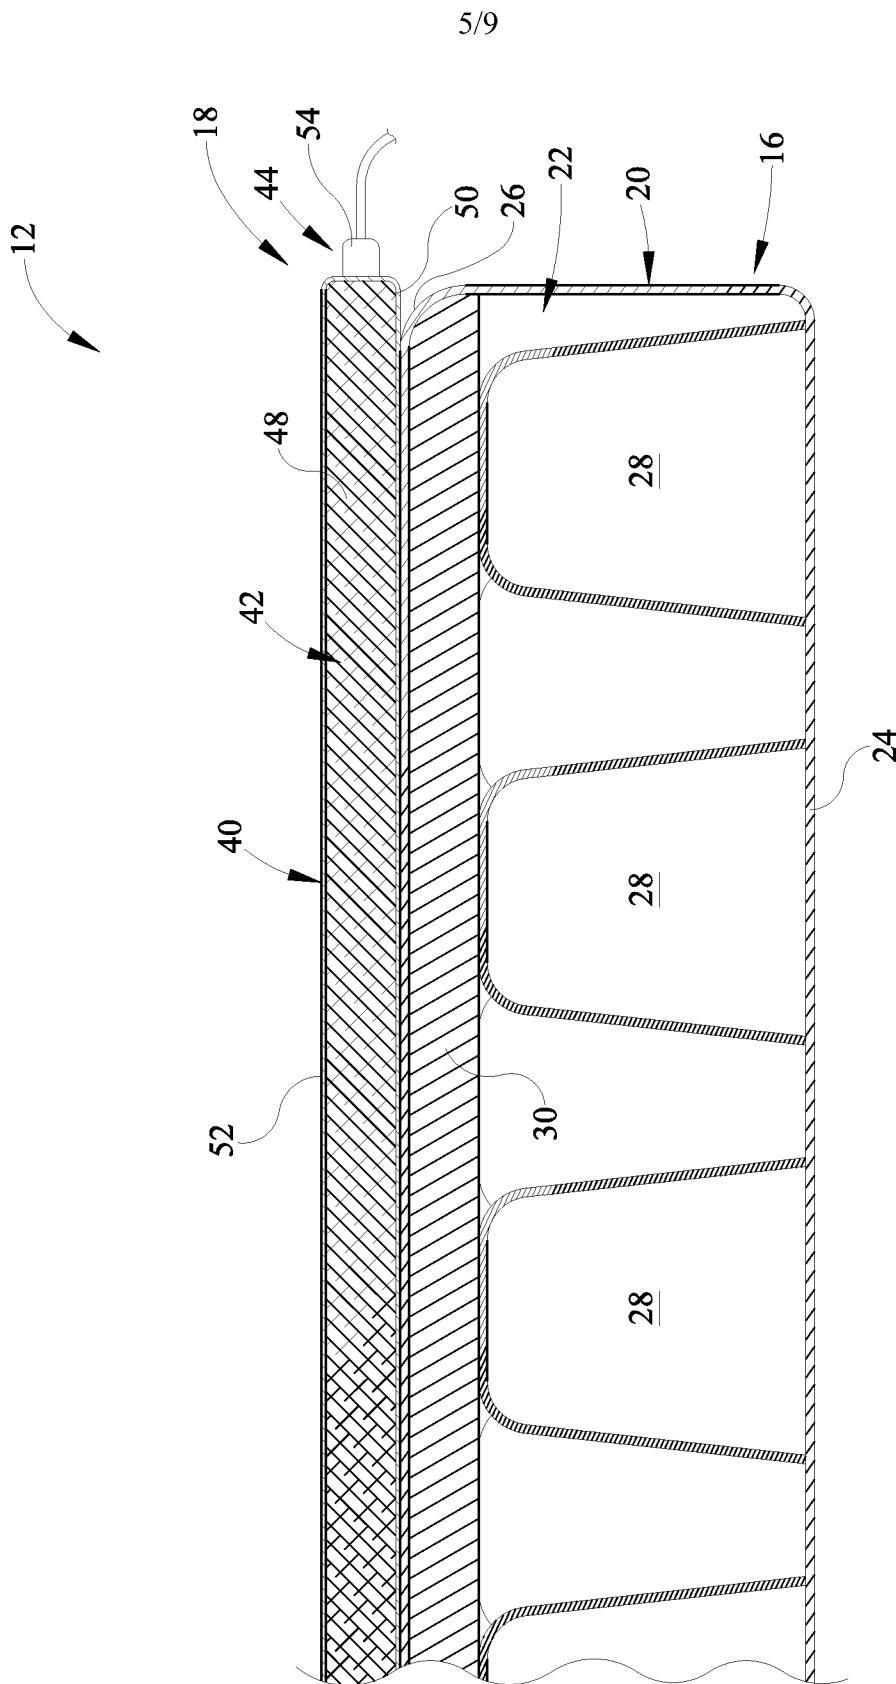


FIG. 5

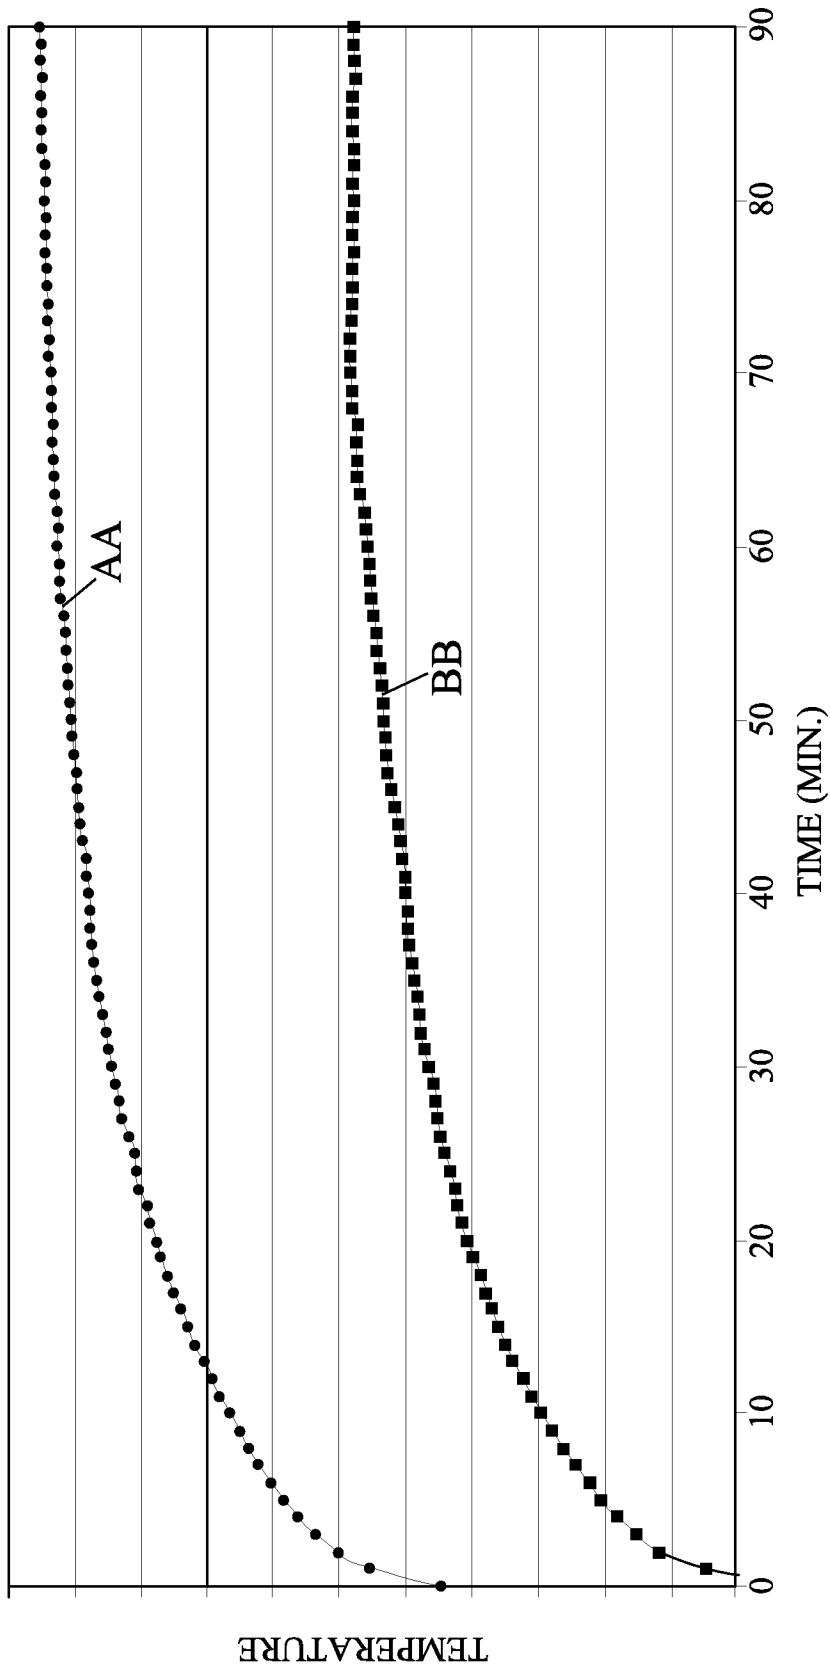


FIG. 6



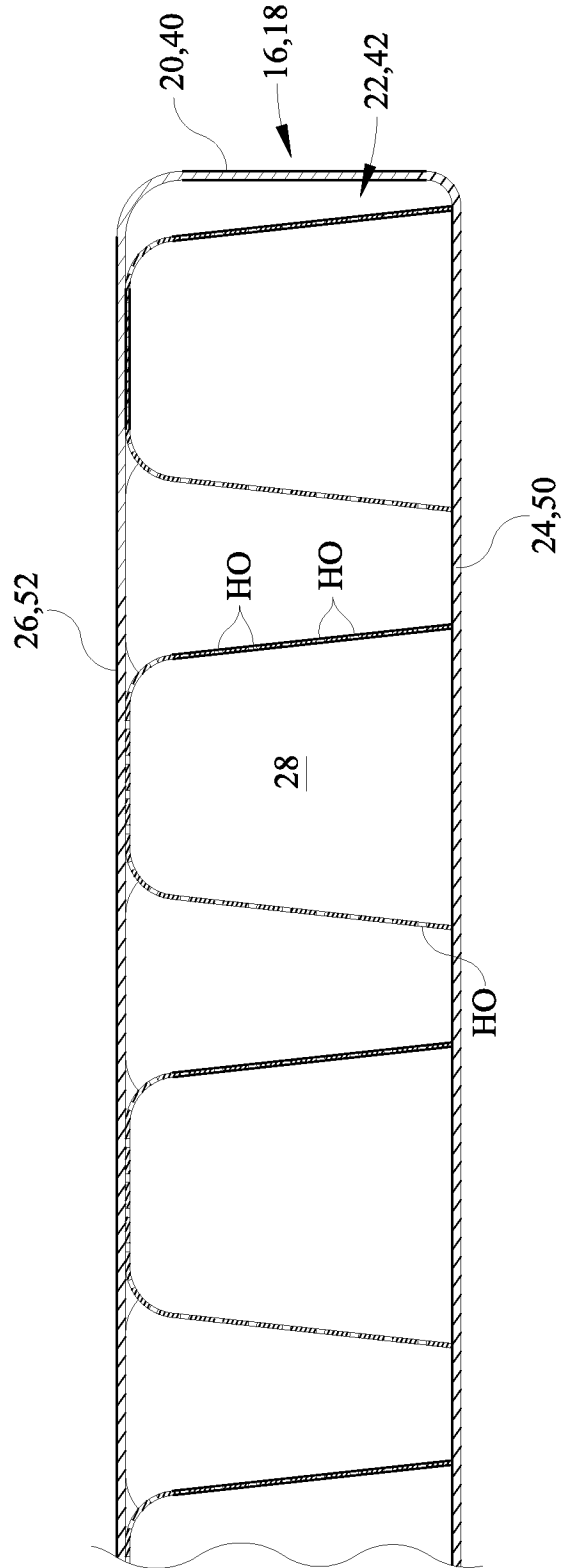


FIG. 8

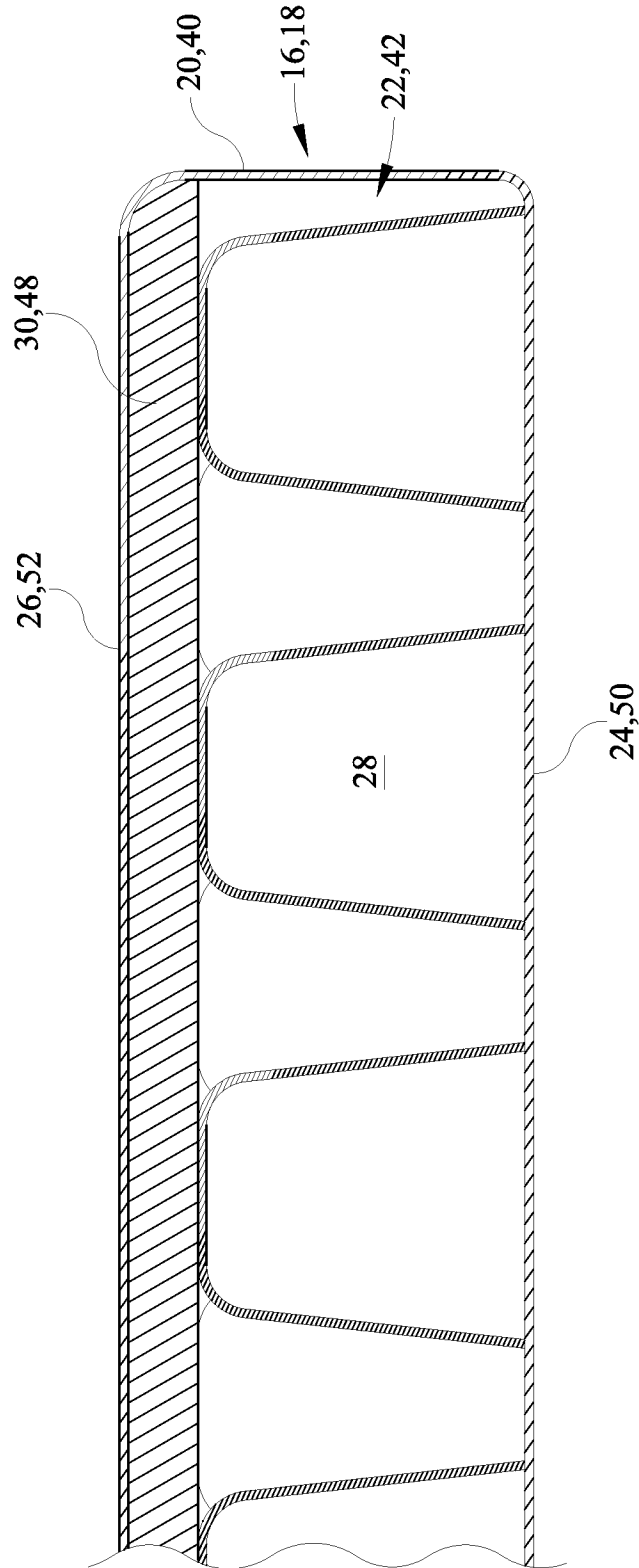


FIG. 9

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2009/040661

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. A61F7/00 ADD. A61G7/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) A61F A61G A47C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 894 615 A (ALEXANDER MARVIN J [US]) 20 April 1999 (1999-04-20)  abstract; figure 4	1-6, 10-12, 14-16, 20-28, 32-35, 37-41, 44-46, 159-162, 164-166, 198
X	FR 2 888 482 A (WU SHIN TSAI [TW]) 19 January 2007 (2007-01-19) page 2, line 27 - line 32; figure 2  -/--	22, 159
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family		
Date of the actual completion of the international search  14 September 2009		Date of mailing of the international search report  22/09/2009
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer  Mayer-Martenson, E

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2009/040661

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	GB 2 447 287 A (PATON ANNE KATHLEEN [GB]) 10 September 2008 (2008-09-10)  page 16, paragraph 2; figures 7,8 -----	1, 10, 14-16, 22, 23, 39, 40
A	EP 0 659 373 A (SUZUKI HIROKO [JP]; SUZUKI EMI [JP]; SUZUKI YOSHIO [JP]) 28 June 1995 (1995-06-28) column 12, line 55 - column 13, line 3 -----	1, 22, 47, 159, 166, 198
A	US 2007/198072 A1 (MONTAIN SCOTT J [US] ET AL) 23 August 2007 (2007-08-23) abstract; figure 5a -----	1
A	WO 98/23236 A (KINETIC CONCEPTS INC [US]) 4 June 1998 (1998-06-04)  abstract; figures 1-3 -----	1, 22, 47, 159, 166, 198
A	WO 2007/115569 A (INSPIRI APS [DK]; CHRISTENSEN OLE ILUM [DK]) 18 October 2007 (2007-10-18) abstract -----	1, 22, 47, 159, 166, 198
A	WO 03/024380 A (CALDWELL KENNETH [GB]; CALDWELL KEVIN MICHAEL [GB]) 27 March 2003 (2003-03-27) page 5, paragraph 3 - page 6, paragraph 4 -----	1, 22, 47, 159, 166, 198
A	WO 2004/093758 A (AMERICAN HEALTHCARE PRODUCTS I [US]; ELLIS KENT D [US]; SIEGNER KENNET) 4 November 2004 (2004-11-04) page 14, paragraph 1 -----	1, 22, 47, 159, 166, 198
A	US 2007/268955 A1 (POHL HERMANN K [US] ET AL) 22 November 2007 (2007-11-22)  abstract; figures 5,7 -----	1, 22, 47, 159, 166, 198

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2009/040661

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: **67-158**  
because they relate to subject matter not required to be searched by this Authority, namely:  
**Rule 39.1(iv) PCT - Method for treatment of the human or animal body by therapy**
  
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2009/040661
---

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 5894615	A	20-04-1999	NONE	
FR 2888482	A	19-01-2007	NONE	
GB 2447287	A	10-09-2008	NONE	
EP 0659373	A	28-06-1995	DE 69410963 D1	16-07-1998
			DE 69410963 T2	21-01-1999
			JP 2630733 B2	16-07-1997
			JP 7171041 A	11-07-1995
			US 5596778 A	28-01-1997
US 2007198072	A1	23-08-2007	NONE	
WO 9823236	A	04-06-1998	AU 5364798 A	22-06-1998
			CA 2272399 A1	04-06-1998
			EP 1006965 A1	14-06-2000
			JP 2001506877 T	29-05-2001
WO 2007115569	A	18-10-2007	NONE	
WO 03024380	A	27-03-2003	GB 2395119 A	19-05-2004
WO 2004093758	A	04-11-2004	AU 2003272319 A1	19-11-2004
			JP 2005530569 T	13-10-2005
US 2007268955	A1	22-11-2007	NONE	