




(86) Date de dépôt PCT/PCT Filing Date: 2008/01/28
(87) Date publication PCT/PCT Publication Date: 2008/08/07
(45) Date de délivrance/Issue Date: 2014/06/03
(85) Entrée phase nationale/National Entry: 2009/07/20
(86) N° demande PCT/PCT Application No.: IB 2008/000181
(87) N° publication PCT/PCT Publication No.: 2008/093199
(30) Priorité/Priority: 2007/01/29 (US60/897,819)

(51) Cl.Int./Int.Cl. *H04L 29/06* (2006.01)
(72) Inventeurs/Inventors:
VARGA, JOZSEF, HU;
WOLFNER, GYOERGY, HU
(73) Propriétaire/Owner:
NOKIA CORPORATION, FI
(74) Agent: SIM & MCBURNEY

(54) Titre : TRAITEMENT DE RAPPORT DE SOUMISSION DANS LE SMSIP
(54) Title: SUBMIT REPORT HANDLING IN SMSIP

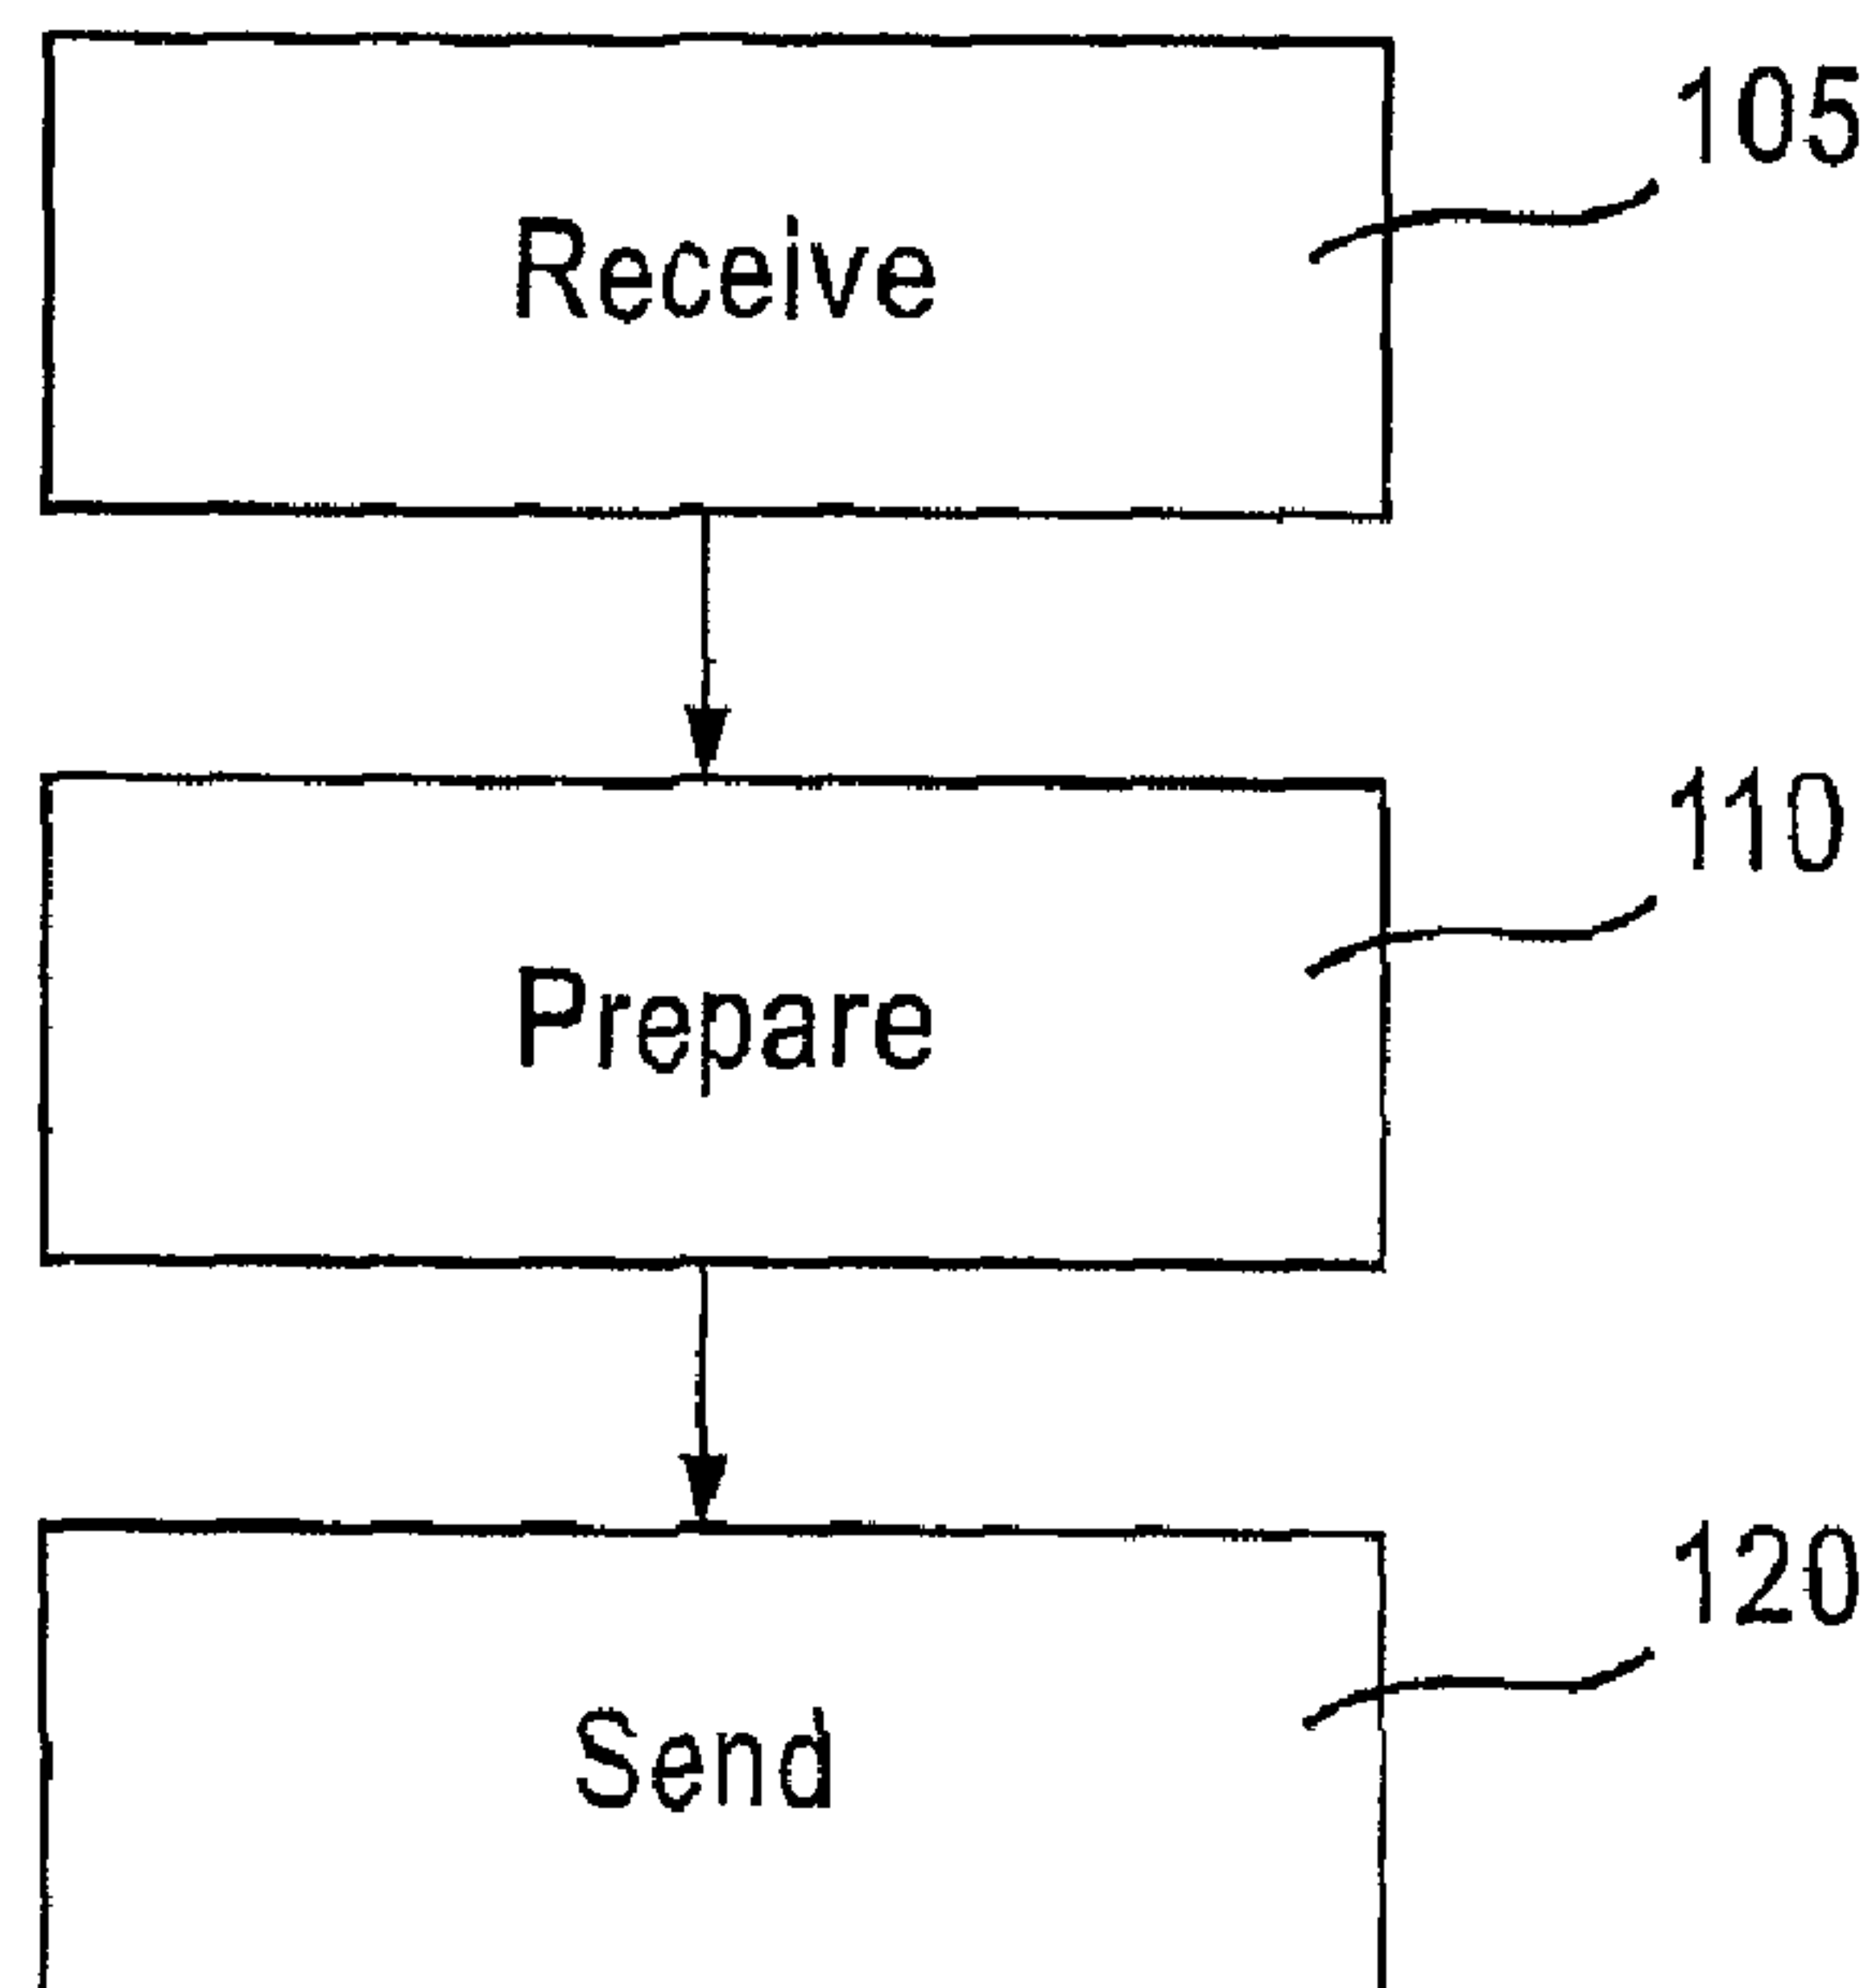

(57) Abrégé/Abstract:

Submit report handling in Short Message Session Initiation Protocol (SMSIP) is provided. For example, a method can include preparing a submit report, wherein the preparing includes using a combination of forking and an in-reply-to header to find an



(57) Abrégé(suite)/Abstract(continued):

appropriate terminal. The method can also include sending the submit report to the appropriate terminal. Likewise, another method can include receiving, by an apparatus, a session initiation protocol message request including a submit report. The method can also include processing the submit report to determine whether the request corresponds to a message sent by the apparatus. The method can further include sending, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response. The method can additionally include sending, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 August 2008 (07.08.2008)

PCT

(10) International Publication Number
WO 2008/093199 A3

(51) International Patent Classification:
H04L 29/06 (2006.01)

(21) International Application Number:
PCT/IB2008/000181

(22) International Filing Date: 28 January 2008 (28.01.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/897,819 29 January 2007 (29.01.2007) US

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(71) Applicant (for LC only): **NOKIA, INC.** [US/US]; 6000 Connection Drive, Irving, TX 75038 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VARGA, Jozsef** [HU/HU]; Fo u. 89, H-7895 Nagydobsza (HU). **WOLFNER, György** [HU/HU]; Gvadanyi utca 13, H-1144 Budapest (HU).

(74) Agent: **GOLDHUSH, Douglas, H.**; Squire, Sanders & Dempsey L.L.P., 8000 Towers Crescent Drive, 14th Floor, Tysons Corner, VA 22182 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
29 January 2009

(54) Title: SUBMIT REPORT HANDLING IN SMSIP

Fig. 1

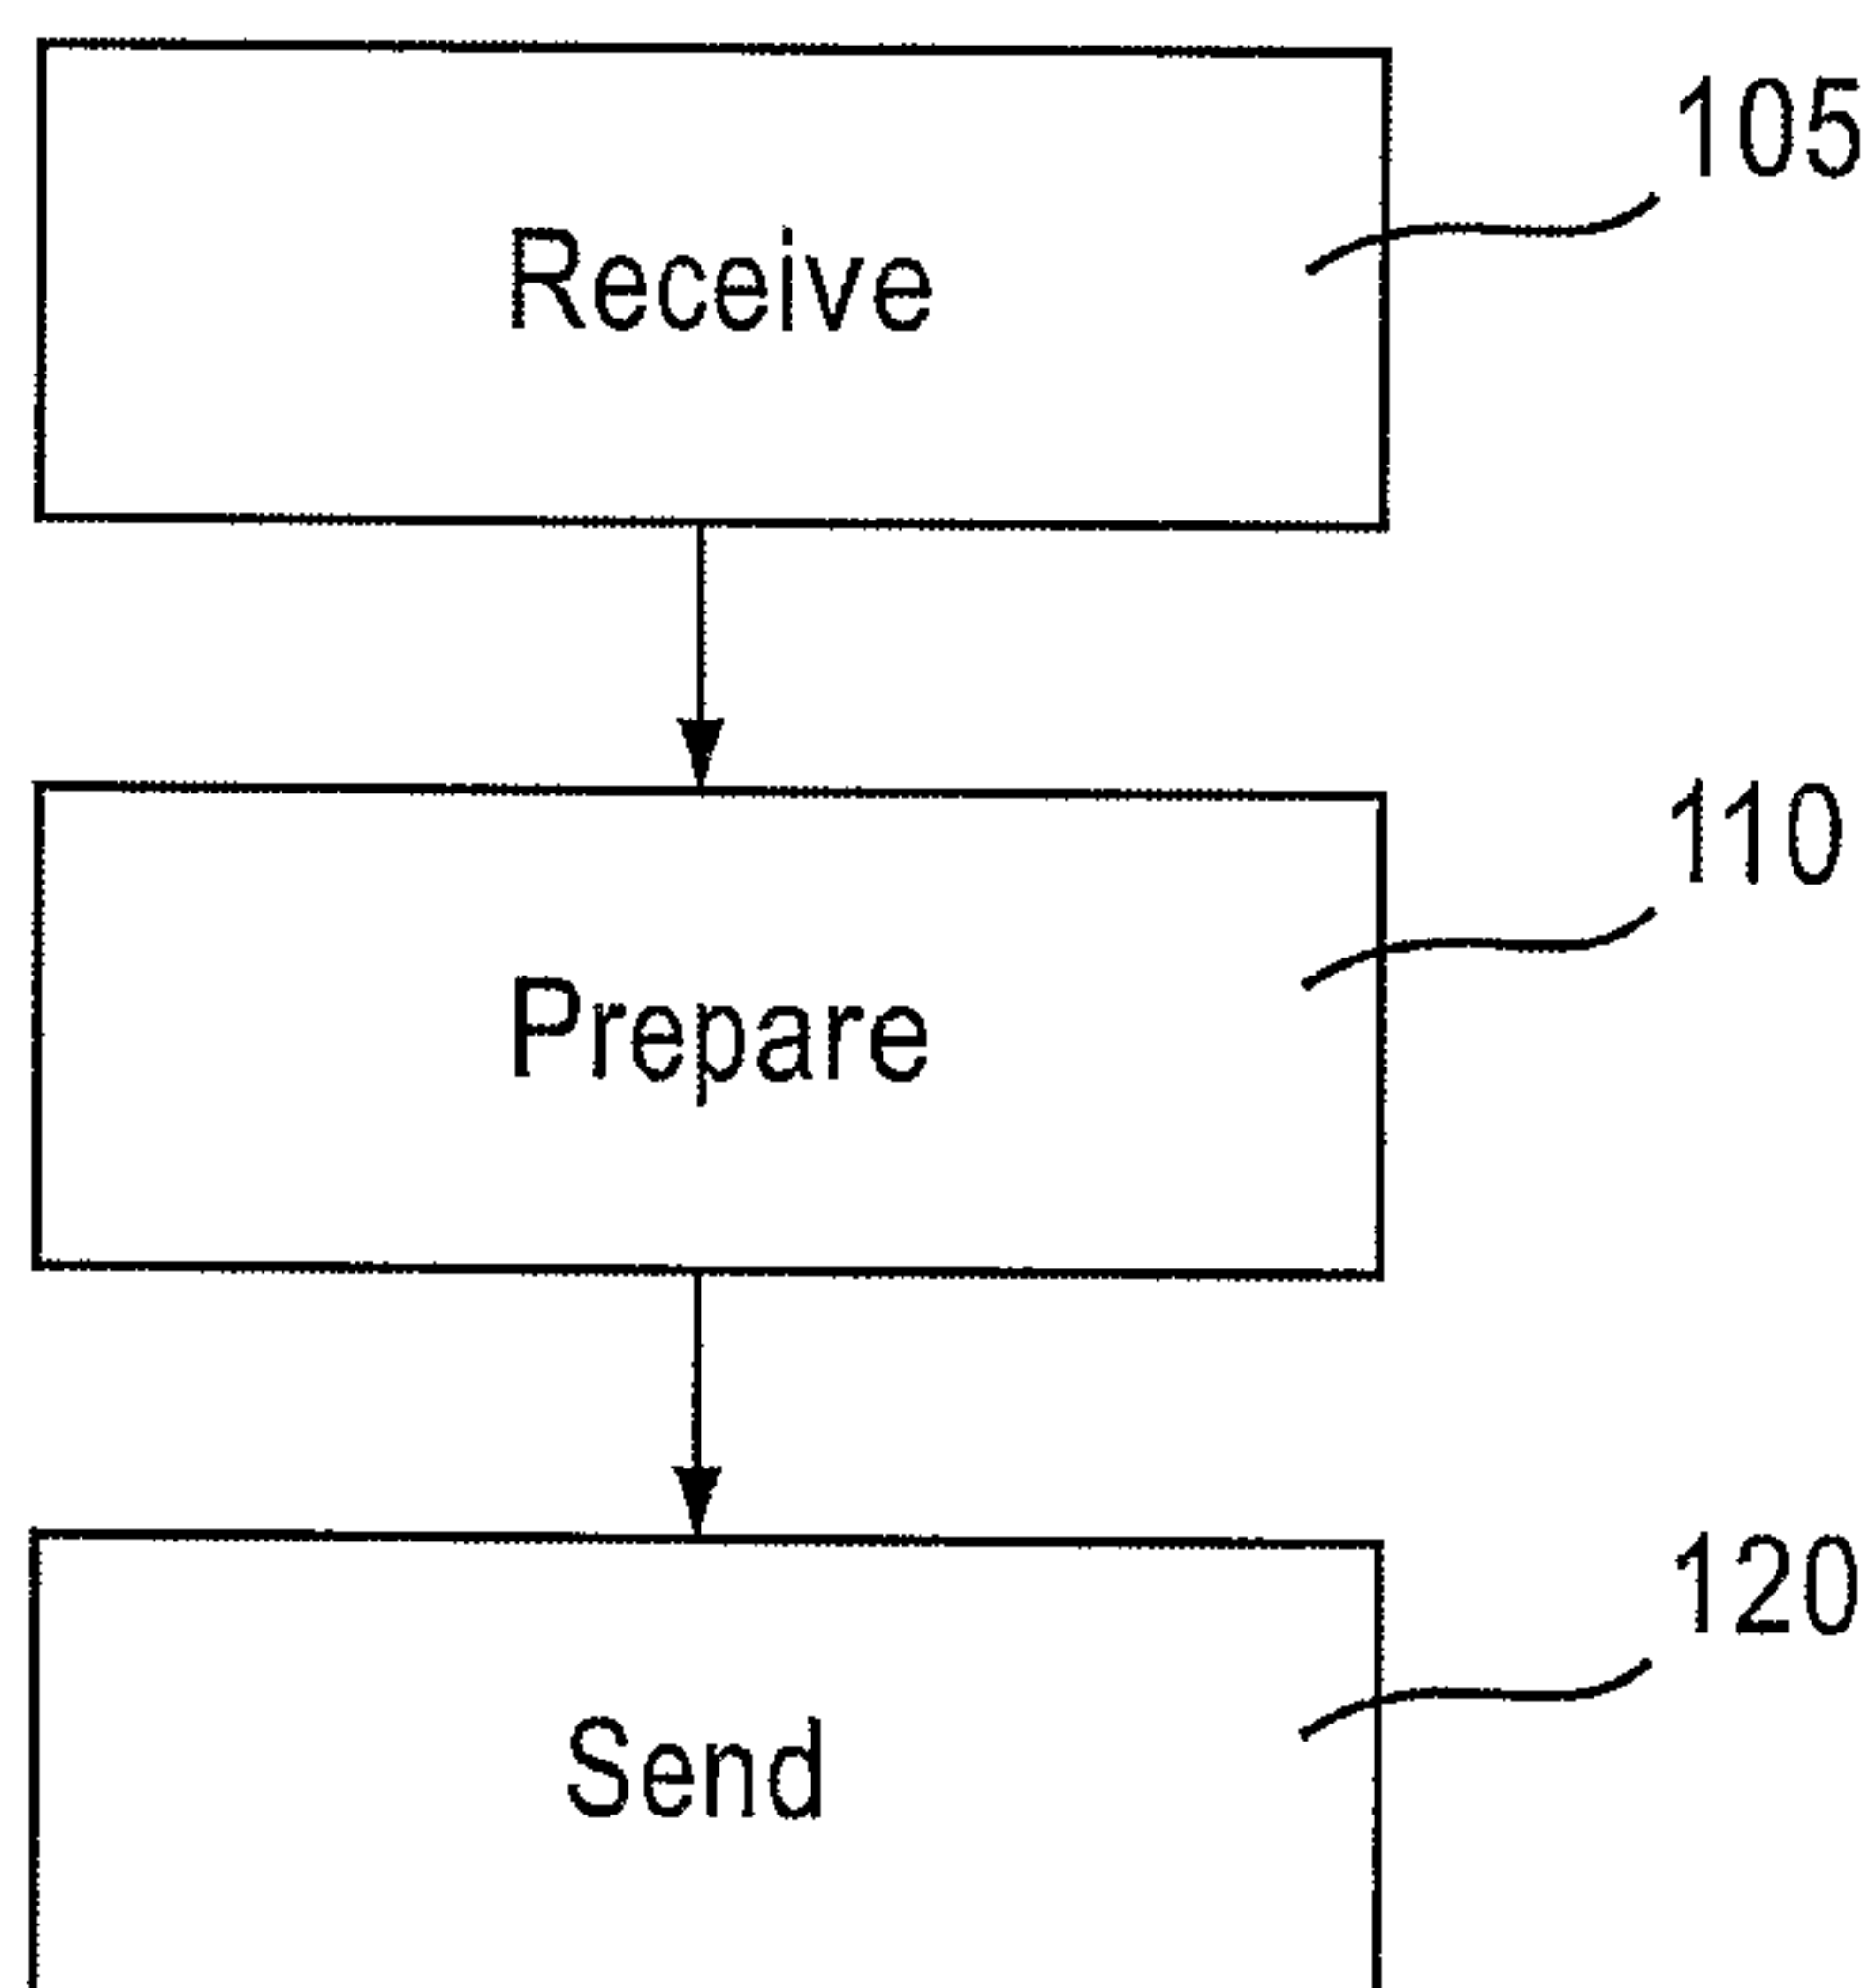

(57) Abstract: Submit report handling in Short Message Session Initiation Protocol (SMSIP) is provided. For example, a method can include preparing a submit report, wherein the preparing includes using a combination of forking and an in-reply-to header to find an appropriate terminal. The method can also include sending the submit report to the appropriate terminal. Likewise, another method can include receiving, by an apparatus, a session initiation protocol message request including a submit report. The method can also include processing the submit report to determine whether the request corresponds to a message sent by the apparatus. The method can further include sending, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response. The method can additionally include sending, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

WO 2008/093199 A3

SUBMIT REPORT HANDLING IN SMSIP**BACKGROUND OF THE INVENTION:****Field of the Invention:**

[0002] The present invention generally relates to telecommunications. For example, the present invention can relate to Internet Protocol (IP) networks. In certain embodiments, the present invention specifically relates to Short Message Service (SMS) signaling over IP networks and SMS termination in an IP Multimedia Subsystem (IMS), as well as SMS more generally.

Description of the Related Art:

[0003] In conventional SMS termination in IP Multimedia Subsystem (IMS) applications, Session Initiation Protocol (SIP) is used for initiating and controlling service requests. The conventional art does not provide a way to ensure that a submit report is targeted to the terminal that is submitting the short message.

SUMMARY OF THE INVENTION:

[0004] Accordingly, in one aspect there is provided a method, comprising: preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and sending the submit report to the appropriate device, wherein the forking comprises inserting a fork attribute into a request-disposition header.

[0005] According to another aspect there is provided a method, comprising receiving, by an apparatus, a session initiation protocol message request comprising a submit report, processing the submit report to determine whether the request corresponds to a message sent by the apparatus, sending, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response, and sending, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

[0006] According to yet another aspect there is provided an apparatus, comprising: processing means for preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and transmitting means for sending the submit report to the appropriate device, wherein the processing means is configured to use forking by inserting a fork attribute in a request-disposition header.

[0007] According to still yet another aspect there is provided an apparatus, comprising receiving means for receiving a session initiation protocol message request comprising a submit report, processing means for processing the submit report to determine whether the request corresponds to a message sent by the apparatus, and transmitting means for sending, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response, and for sending, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation

[0008] According to still yet another aspect there is provided an apparatus, comprising: a processor configured to prepare a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and a transmitter configured to send the submit report to the appropriate device, wherein the processor is configured to use forking by inserting a fork attribute into a request-disposition header.

[0009] According to still yet another aspect there is provided an apparatus, comprising a receiver configured to receive a session initiation protocol message request comprising a submit report, a processor configured to process the submit report to determine whether the request corresponds to a message sent by the apparatus, and a transmitter configured to send, when the submit

report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response, and to send, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

[0010] According to still yet another aspect there is provided a computer-readable medium embodying a computer program and encoding instructions for performing a method when executed in hardware, the method comprising: preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and sending the submit report to the appropriate device, wherein the forking comprises inserting a fork attribute into a request-disposition header.

[0011] According to still yet another aspect there is provided a computer program embodied on a computer-readable medium, and encoding instructions for performing a method when executed in hardware, the method comprising receiving, by an apparatus, a session initiation protocol message request comprising a submit report, processing the submit report to determine whether the request corresponds to a message sent by the apparatus, sending, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response, and sending, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

[0011a] According to still yet another aspect there is provided a method, comprising: preparing a short message service submit report, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find a device; and sending the short message service submit report to the device, wherein the preparing the short message service submit report is triggered by receiving a short message service request submitted by the device, and wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.

[0011b] According to still yet another aspect there is provided an apparatus, comprising: a receiver configured to receive a short message request submitted from a device; a processor triggered to prepare a short message service submit report when the short message request is received, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find the device; and a transmitter configured to send the short message service submit report to the device, wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.

[0011c] According to still yet another aspect there is provided a computer-readable medium including embodying a non-transitory computer program instructions which when executed by at least one processor provides operations comprising: preparing a short message service submit report, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find a device; and sending the short message service submit report to the device, wherein the preparing the short message service submit report is triggered by receiving a short message request submitted from the device, and wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011d] FIG. 1 depicts an example of a method in accordance with some exemplary embodiments;

[0011e] FIG. 2 depicts another example of a method in accordance with some exemplary embodiments; and

[0011f] FIG. 3 depicts an example of a system in accordance with some exemplary embodiments.

DESCRIPTION OF THE PREFERRED EMBODIMENTS:

[0012] Communication can occur in wireless communication networks and systems, such as Third Generation Partnership Project (3GPP), wherein SMS messages are sent from one user terminal to another user terminal. SMS messages, or short message service messages, are typically sent over networks operating on a communication protocols such as Internet Protocol (IP). The SMS can be terminated in the IP multimedia subsystems (IMS), and utilizes Session Initiation Protocol (SIP) for initiating and controlling service request. The specifications of such SIP protocol details can be found, for example, in 3GPP Technical Specification (TS) 24.229.

[0013] The functionality of SMS over IP is defined in 3GPP TS 23.204 and 24.341. General SMS functionality is described, for example, in 3GPP TS 23.040 and TS 24.011.

[0014] In one example, two pieces of user equipment can share one IMS Public User Identity (IMPU), with all having SMSIP capability. When the user equipments (UEs) are registered to the IMS network, one user equipment may identify its priority as being higher than the other user equipment in the registration procedure. When one of these two user equipments sends an SMS message to a third piece of user equipment, it is possible for the Short Message Service Center (SM-SC) to send a submit report to the sender. However, if sequential forking is being used, it is possible that the submit report may not properly directed to the sender. The other piece of user equipment may erroneously receive a submit report in a case parallel forking is being used.

[0015] Likewise, whenever a short message is submitted from a terminal having a shared mobile subscriber integrated services digital network

number (MSISDN), the submit report termination can (conventionally) be ambiguous. Thus, conventionally, it can happen that a submit report goes to a terminal other than the one that submitted the short message.

[0016] According to certain embodiments of the present invention, whenever a SIP MESSAGE request encapsulating SMS-submit-report is sent, the Internet Protocol-Short Message-Gateway (IP-SM-GW) can insert a Request-Disposition header indicating either parallel or sequential forking, and can insert an In-Reply-To header with the call-identification (ID) or Reply-To header of the SIP MESSAGE request that encapsulated the submitted short message. The Serving-Call Session Control Function (S-CSCF) can send the SIP MESSAGE request, including the submit report, toward the possible contacts, either to all contacts at once or sequentially. Any wrong attempts, such wrong attempts being attempts to direct the submit report towards a user equipment that is not submitting the short message, are rejected with, for example, a “486 not acceptable here” response. A correct attempt will result in a “200 OK” response.

[0017] The present invention can solve the targeting problem in that when the user equipment submitting a short message does not receive the submit report, the submit report is resent. Additionally, there is no need for a new SIP extension, since a unique user ID can not be a Globally Routable User Agent (UA) Uniform Resource Identifier (URI) (GRUU) for SIP MESSAGE request.

[0018] The present invention, therefore, can use a combination of forking, that is a Request-Disposition header inserted with a “fork” attribute, and an In-Reply-To header, as a mechanism to find the user equipment that submitted the short message. This can prevent the problem of the conventional art wherein a submit report can be sent to a terminal other than the terminal that submitted the short message.

[0019] In one embodiment, the invention can include a system for communicating SMS messages, the system having a first unit that sends a short message to a destination. The system can also include a second unit that inserts a header into the message, with a header including identification information regarding the sender.

[0020] Upon receipt of the message by the destination, the destination can send a response message to the sender. The response message can be targeted for receipt by the sender.

[0021] Certain embodiments of the present invention can also include a network element having a receiving unit for receiving an SMS message from a sender. The element can have a header insertion unit for inserting a header into the message, with the header including specific identification information regarding the sender. A forwarding unit can forward the message to the destination. The network element is also configured to receive a response message from the destination, and to forward the response message to the sender.

[0022] A method according to an embodiment of the invention can include sending a message from a sender to a destination, and inserting a header into the message at a Gateway. The message can then include forwarding the message to the destination, sending a response message from the destination to the sender, and receiving the response message at the sender.

[0023] Figure 1 illustrates a first method according to an embodiment of the present invention. As illustrated in Figure 1, the method includes preparing 110 a submit report. Preparing 110 the submit report includes using a combination of forking and an in-reply-to header to find an appropriate terminal. The method also includes sending 120 the submit report to the appropriate terminal.

[0024] The sending 120 the submit report to the appropriate terminal can include avoiding ambiguity that would otherwise result in the submit report being terminated on a terminal other than the appropriate terminal. The appropriate terminal can have a shared mobile subscriber integrated services digital network number. The appropriate terminal can be a user equipment, personal digital assistant, portable communication device, wireless terminal, wireless handheld device, personal computer, or a mobile station.

[0025] The forking can include inserting a fork attribute in a request-disposition header. The preparing 110 the submit report can be triggered by receiving 105 a short message request submitted from the appropriate terminal.

[0026] Figure 2 illustrates another method according to an embodiment of the present invention. As depicted in Figure 2, the method can include receiving 210, by an apparatus, a session initiation protocol message request including a submit report. The method can also include processing 220 the submit report to determine whether the request corresponds to a message sent by the apparatus. The method can further include sending 232, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response. The method can additionally include sending 234, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

[0027] The apparatus can be a user equipment, personal digital assistant, portable communication device, wireless terminal, wireless handheld device, personal computer, or a mobile station. The submit report can be received from and the not-acceptable-here or ok session initiation protocol message can be sent to an internet protocol short message gateway.

[0028] The method shown in Figure 2 can also include, before the receiving 210 the submit report, sending 202 the corresponding message as a

session initiation protocol message request, and storing 204 the call identification of the corresponding message.

[0029] Additionally, the method of Figure 2 can include determining 230 that (or whether) the submit report corresponds to the corresponding message by comparing a received call identification in the submit report with the call identification previously stored.

[0030] The methods illustrated in Figures 1 and 2 can be implemented in hardware, software, or a combination thereof. For example, a computer program can be embodied on a computer-readable medium, and can encode instructions for performing the methods of Figure 1 and/or Figure 2 when executed in hardware.

[0031] Figure 3 illustrates a system according to an embodiment of the present invention. The system includes a first apparatus 300 (which can be an internet protocol short message gateway) and a second apparatus 400. The first apparatus 300 and the second apparatus 400 can include respective receivers 310, 410, processors 320, 420, transmitters 330, 430, and memories 340, 440. The first apparatus 300 and the second apparatus 400 can be configured to provide various functions, as will be discussed below. From another perspective, the first apparatus 300 and the second apparatus 400 can provide various functional configurations using hardware 350, 450, software 360, 460 or a hybrid thereof.

[0032] The first apparatus 300 and the second apparatus 400 can be connected over a communication link 500, which may be a wireless link, a wireline link, or a combination of wireless and wireline. Intermediate elements that may relay signaling between the first apparatus 300 and the second apparatus 400 are omitted for ease of illustration.

[0033] The first apparatus 300 and the second apparatus 400, for hardware 350, 450 can be provided with a general purpose computer,

Application Specific Integrated Circuit (ASIC) or similar equipment, which can, in certain embodiments, be used as the processor 320, 420. Likewise, the first apparatus 300 and the second apparatus 400, can be equipped with network communication equipment for communicating in a network, such as an Internet Protocol (IP) network and/or a 3GPP network. Other communication equipment, such as antennas, can be included. Furthermore, the first apparatus 300 and the second apparatus 400 can have, for their memory 340, 440, a hard drive, flash Random Access Memory (RAM), a Electronically Programmable Read Only Memory (EPROM), a removable disk memory, or the like.

[0034] Thus, the first apparatus 300 can be configured to prepare a submit report, wherein preparing the submit report includes using a combination of forking and an in-reply-to header to find an appropriate terminal (such as second apparatus 400). The first apparatus 300 can also be configured to send the submit report to the appropriate terminal.

[0035] The sending the submit report to the appropriate terminal can include avoiding ambiguity that would otherwise result in the submit report being terminated on a terminal other than the appropriate terminal. The forking can include inserting a fork attribute in a request-disposition header.

[0036] The appropriate terminal can have a shared mobile subscriber integrated services digital network number, and can be a user equipment, personal digital assistant, portable communication device, wireless terminal, wireless handheld device, personal computer, or a mobile station.

[0037] The first apparatus 300 can additionally be configured to receive a short message request submitted from the appropriate terminal, and to trigger the preparation of the submit report upon receipt of the short message request.

[0038] The second apparatus 400 can be configured to receive a session initiation protocol message request comprising a submit report. The second apparatus 400 can also be configured to process the submit report to determine whether the request corresponds to a message sent by the apparatus. The second apparatus 400 can further be configured to send, when the submit report is determined not to correspond to any message sent by the apparatus, a not-acceptable-here session initiation protocol response, and to send, when the submit report is determined to correspond to the message sent by the apparatus, an ok session initiation protocol message.

[0039] The second apparatus 400 can be a user equipment, personal digital assistant, portable communication device, wireless terminal, wireless handheld device, personal computer, or a mobile station.

[0040] The submit report can be received from and the not-acceptable-here or ok session initiation protocol message can be sent to the first apparatus 300, which can be an internet protocol short message gateway.

[0041] The second apparatus 400 can be configured to, before receiving the submit report, send the corresponding message as a session initiation protocol message request, and to store the call identification of the corresponding message.

[0042] Furthermore, the second apparatus 400 can be configured to determine that the submit report corresponds to the corresponding message by comparing a received call identification in the submit report with the call identification previously stored.

[0043] One having ordinary skill in the art will readily understand that the invention as discussed above may be practiced with steps in a different order, and/or with hardware elements in configurations which are different than those which are disclosed. Therefore, although the invention has been described based upon these preferred embodiments, it would be apparent to

those of skill in the art that certain modifications, variations, and alternative constructions would be apparent, while remaining within the scope of the invention. The scope of the claims should not be limited by the preferred embodiments set forth above, but should be given the broadest interpretation consistent with the description as a whole.

What is claimed is:

1. A method, comprising:
preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and
sending the submit report to the appropriate device,
wherein the forking comprises inserting a fork attribute into a request-disposition header.
2. The method of claim 1, wherein the appropriate device has a shared mobile subscriber integrated services digital network number.
3. The method of claim 1 or 2, wherein the appropriate device is at least one of user equipment, a personal digital assistant, a portable communication device, a wireless device, a wireless handheld device, a personal computer and a mobile station.
4. The method of any one of claims 1 to 3, wherein the preparing the submit report is triggered by receiving a short message request submitted from the appropriate device.
5. An apparatus, comprising:
a processor configured to prepare a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and
a transmitter configured to send the submit report to the appropriate device,
wherein the processor is configured to use forking by inserting a fork attribute into a request-disposition header.

6. The apparatus of claim 5, wherein the appropriate device has a shared mobile subscriber integrated services digital network number.
7. The apparatus of claim 5 or 6, wherein the appropriate device is at least one of user equipment, a personal digital assistant, a portable communication device, a wireless terminal, a wireless handheld device, a personal computer and a mobile station.
8. The apparatus of any one of claims 5 to 7, further comprising:
a receiver configured to receive a short message request submitted from the appropriate device, wherein the processor is triggered to prepare the submit report by receipt of the short message request.
9. The apparatus of any one of claims 5 to 8, wherein the apparatus is an Internet protocol short message gateway.
10. A computer-readable medium embodying a computer program and encoding instructions for performing a method when executed in hardware, the method comprising:
preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and
sending the submit report to the appropriate device,
wherein the forking comprises inserting a fork attribute into a request-disposition header.
11. An apparatus, comprising:
processing means for preparing a submit report, wherein preparing the submit report comprises using a combination of forking and an in-reply-to header to find an appropriate device; and
transmitting means for sending the submit report to the appropriate device,

wherein the processing means is configured to use forking by inserting a fork attribute in a request-disposition header.

12. The apparatus of claim 11, wherein the processing means is configured to prepare the submit report so as to avoid ambiguity that would otherwise result in the submit report being terminated on a device other than the appropriate device.

13. The apparatus of claim 11 or 12, wherein the appropriate device has a shared mobile subscriber integrated services digital network number.

14. The apparatus of any one of claims 11 to 13, wherein the appropriate device is at least one of user equipment, a personal digital assistant, a portable communication device, a wireless terminal, a wireless handheld device, a personal computer, and a mobile station.

15. The apparatus of any one of claims 11 to 14, further comprising:
receiving means for receiving a short message request submitted from the appropriate device, wherein the preparing means is triggered to prepare the submit report by receipt of the short message request.

16. The apparatus of any one of claims 11 to 15, wherein the apparatus is an Internet protocol short message gateway.

17. A method, comprising:

preparing a short message service submit report, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find a device; and

sending the short message service submit report to the device,

wherein the preparing the short message service submit report is triggered by receiving a short message service request submitted by the device, and


wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.

18. The method of claim 17, wherein the device comprises a shared mobile subscriber integrated services digital network number.
19. The method of claim 17 or 18, wherein the device comprises at least one of user equipment, a personal digital assistant, a portable communication device, a wireless device, a wireless handheld device, a personal computer, and a mobile station.
20. The method of any one of claims 17 to 19, wherein the indication of forking includes an indication of parallel forking or sequential forking.
21. The method of any one of claims 17 to 20, wherein the in-reply-to header comprises one or more of a session initiation protocol message request encapsulating a short message service message and a call identification.
22. An apparatus, comprising:
a receiver configured to receive a short message request submitted from a device;
a processor triggered to prepare a short message service submit report when the short message request is received, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find the device; and
a transmitter configured to send the short message service submit report to the device,
wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.
23. The apparatus of claim 22, wherein the device comprises a shared mobile subscriber integrated services digital network number.

24. The apparatus of claim 22 or 23, wherein the device comprises at least one of user equipment, a personal digital assistant, a portable communication device, a wireless terminal, a wireless handheld device, a personal computer, and a mobile station.
25. The apparatus of any one of claims 22 to 24, wherein the apparatus is an Internet protocol short message gateway.
26. The apparatus of any one of claims 22 to 25, wherein the indication of forking includes an indication of parallel forking or sequential forking.
27. The apparatus of any one of claims 22 to 25, wherein the in-reply-to header comprises one or more of a session initiation protocol message request encapsulating a short message service message and a call identification.
28. A computer-readable medium embodying a non-transitory computer program including instructions which when executed by at least one processor provides operations comprising:
- preparing a short message service submit report, wherein the short message service submit report includes an indication of forking and an in-reply-to header to find a device; and
 - sending the short message service submit report to the device,
 - wherein the preparing the short message service submit report is triggered by receiving a short message request submitted from the device, and
 - wherein the indication of forking comprises a fork attribute inserted into a request-disposition header.
29. The computer-readable medium of claim 28, wherein the device comprises a shared mobile subscriber integrated services digital network number.

30. The computer-readable medium of claim 28 or 29, wherein the device comprises at least one of user equipment, a personal digital assistant, a portable communication device, a wireless device, a wireless handheld device, a personal computer, and a mobile station.

Fig.1

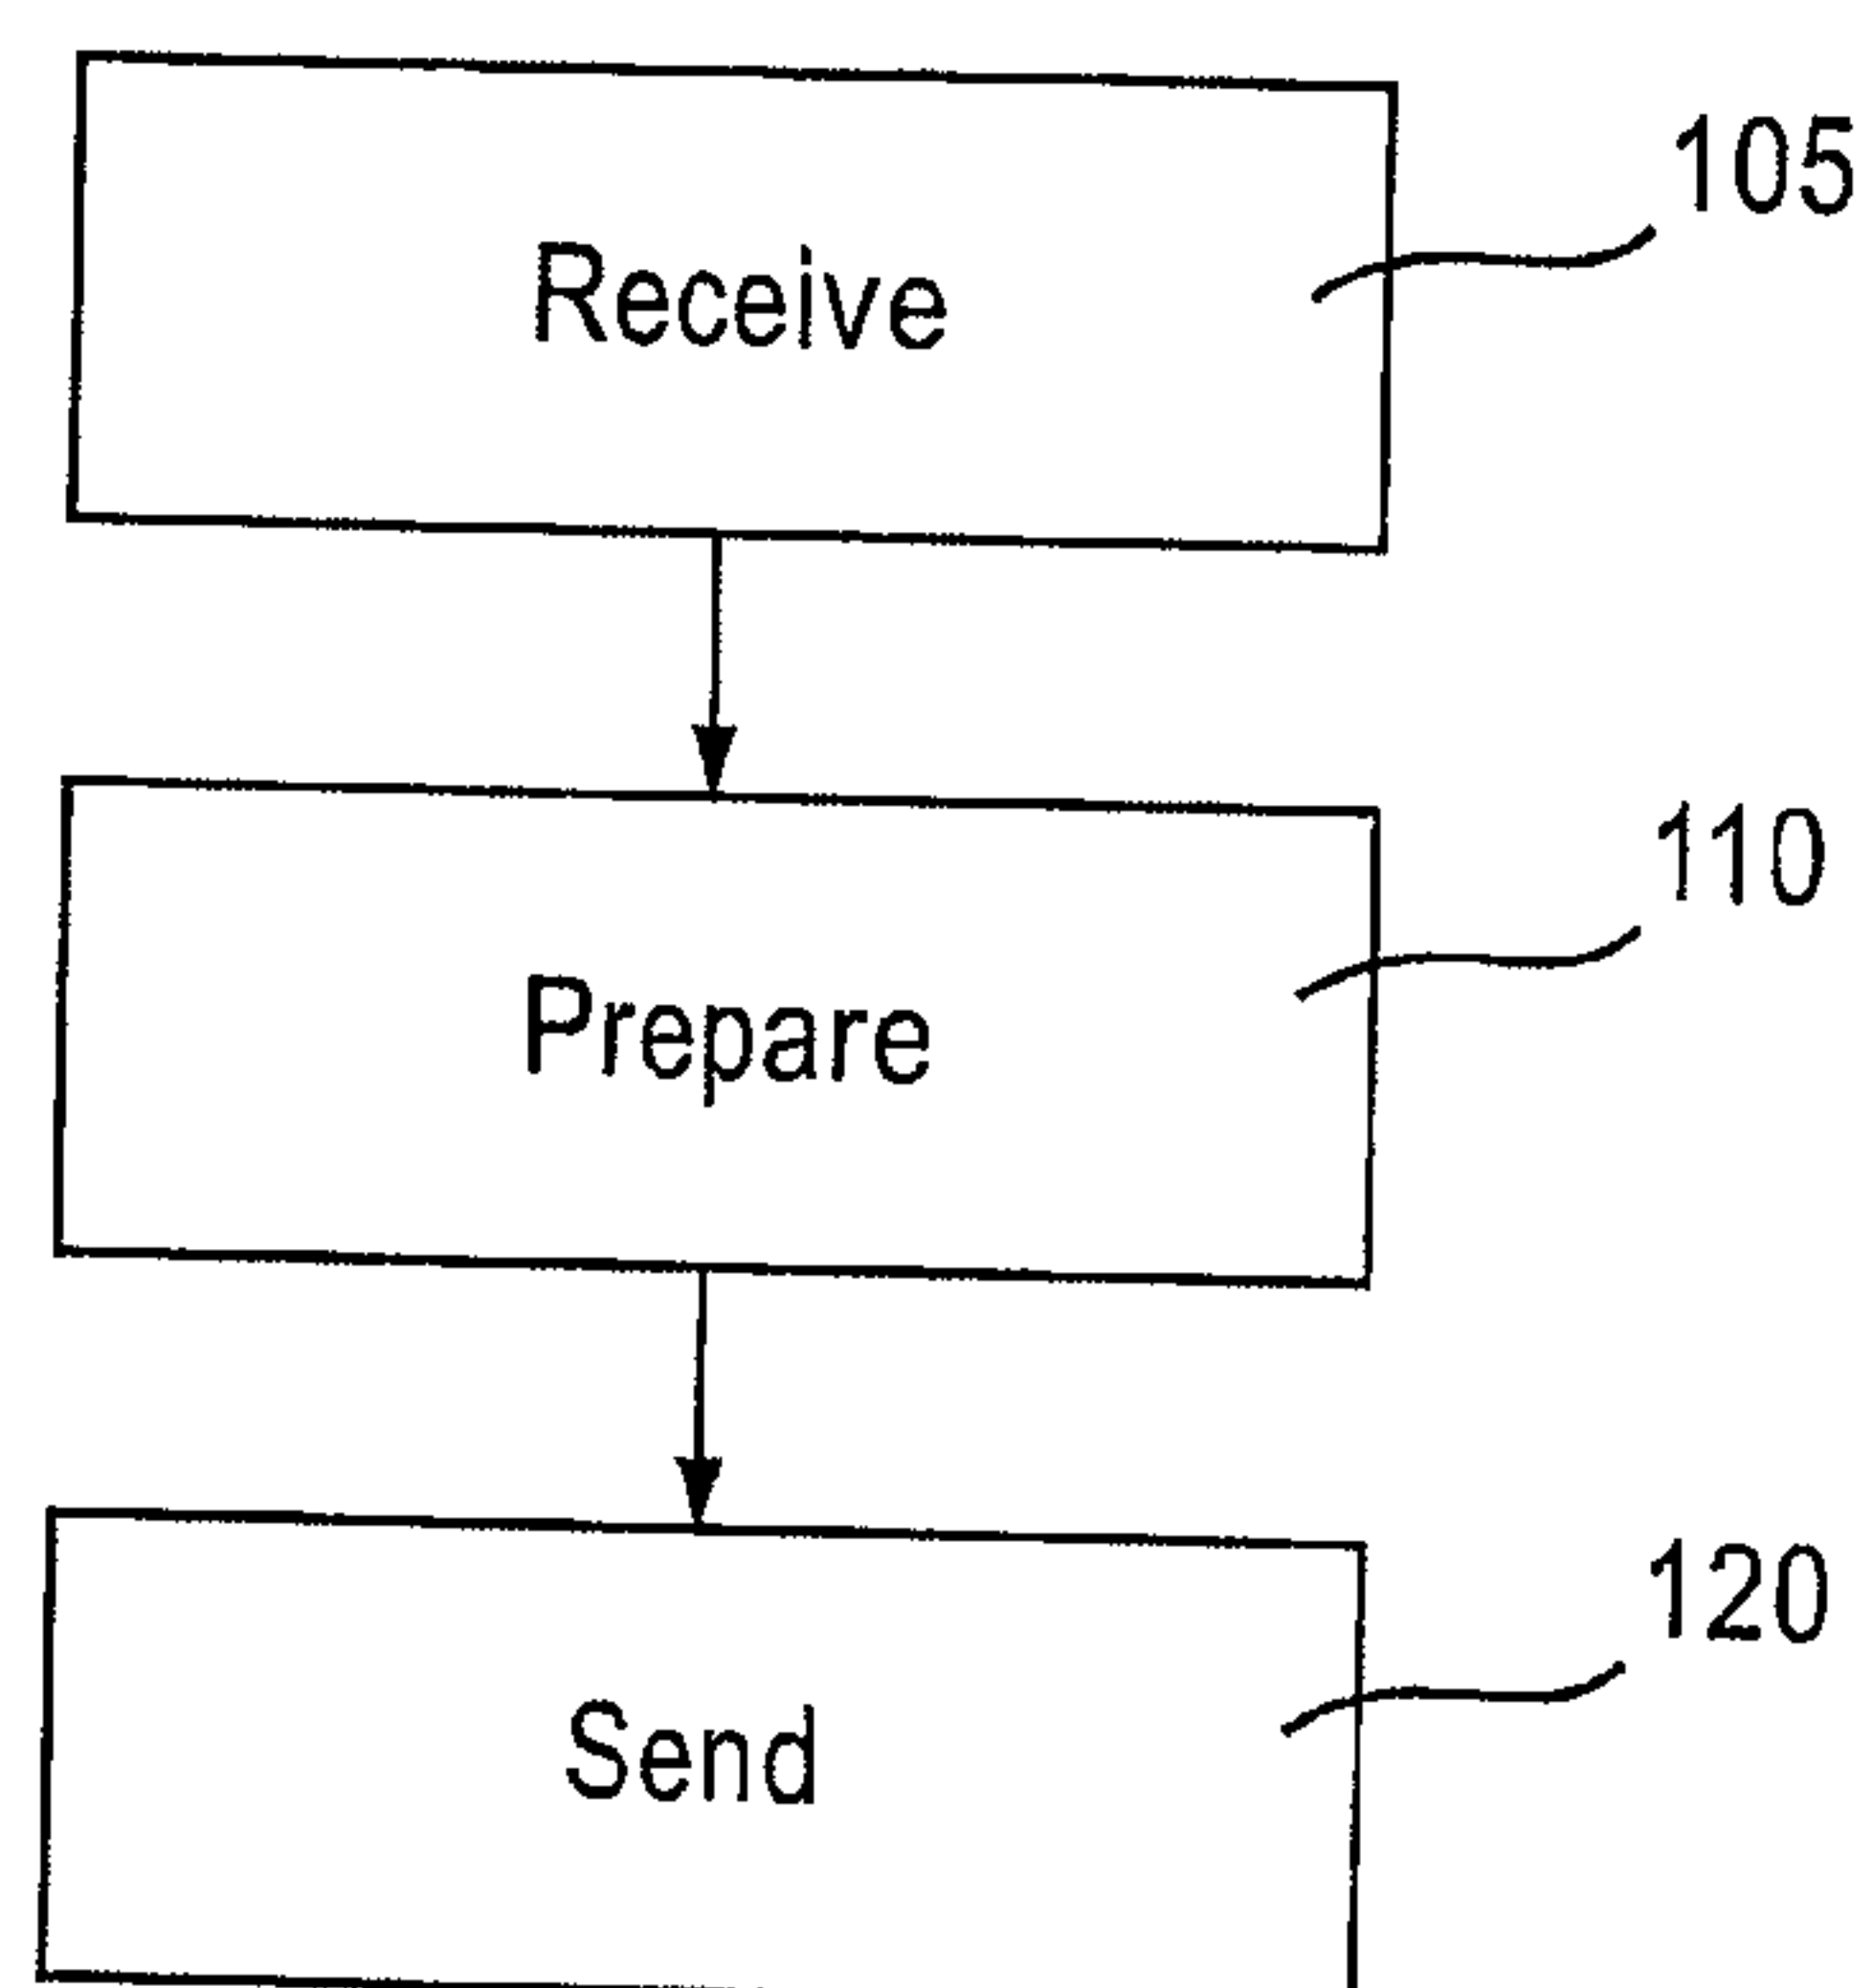

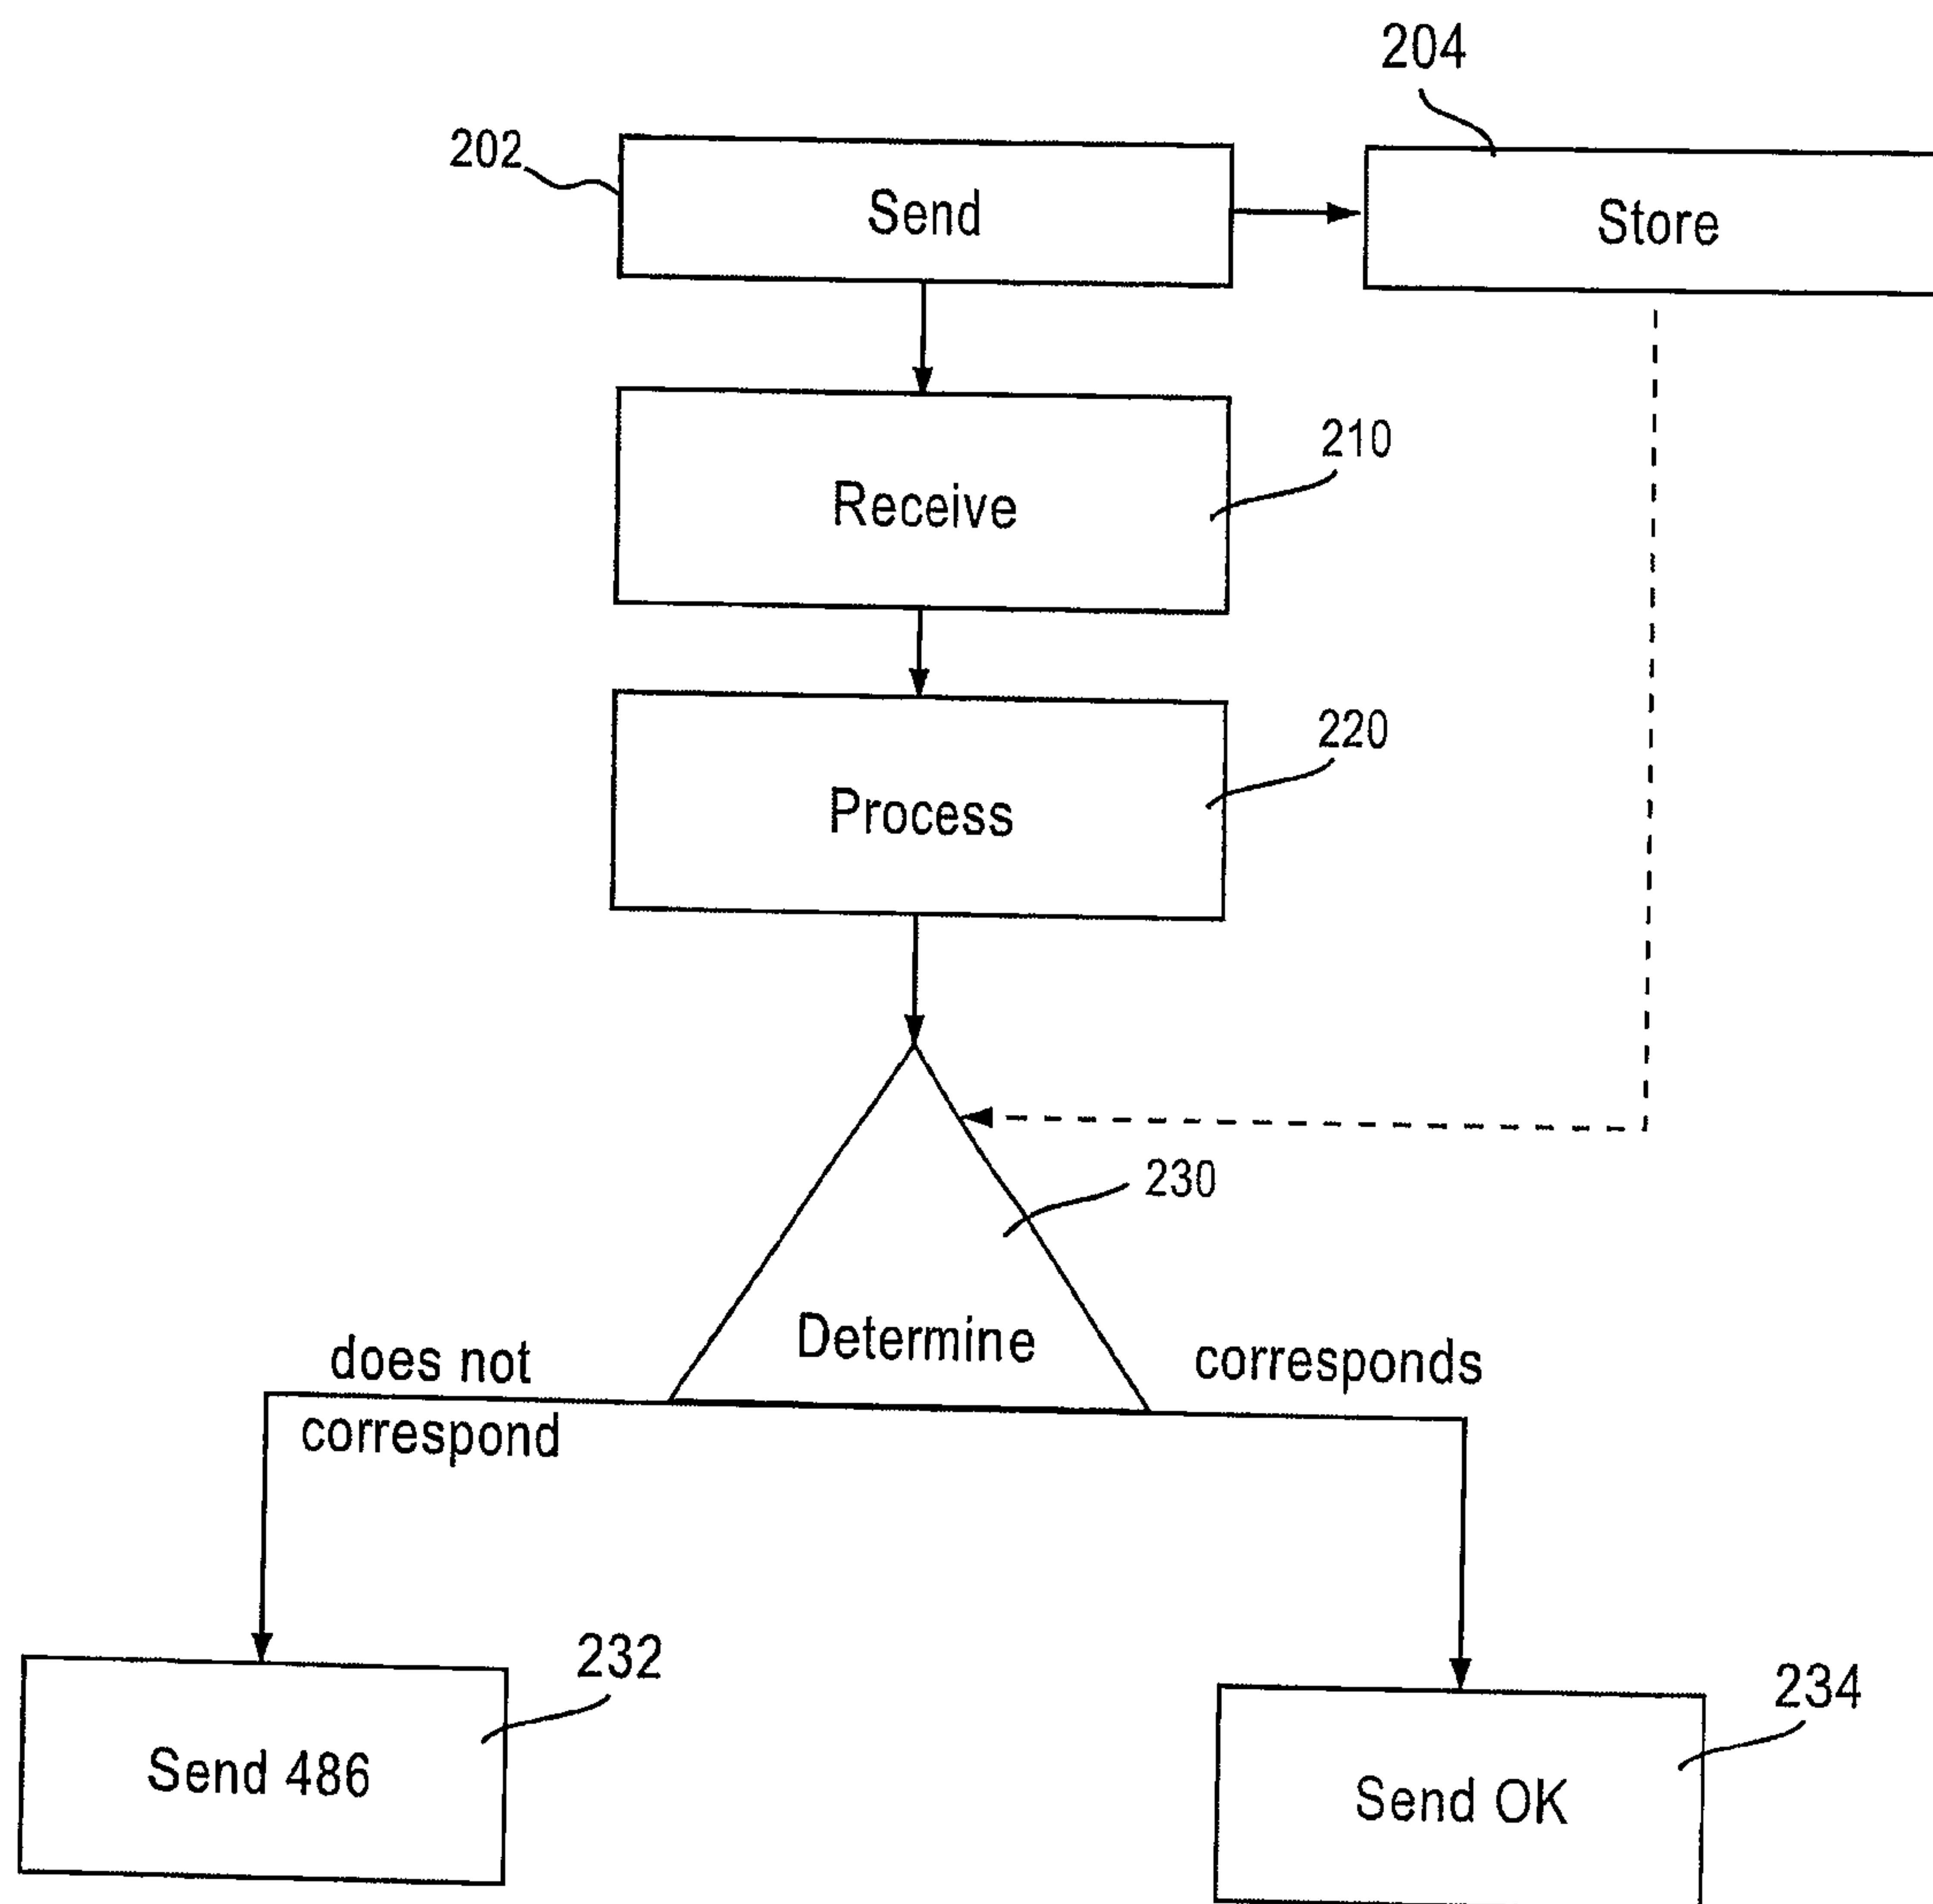


Fig.2

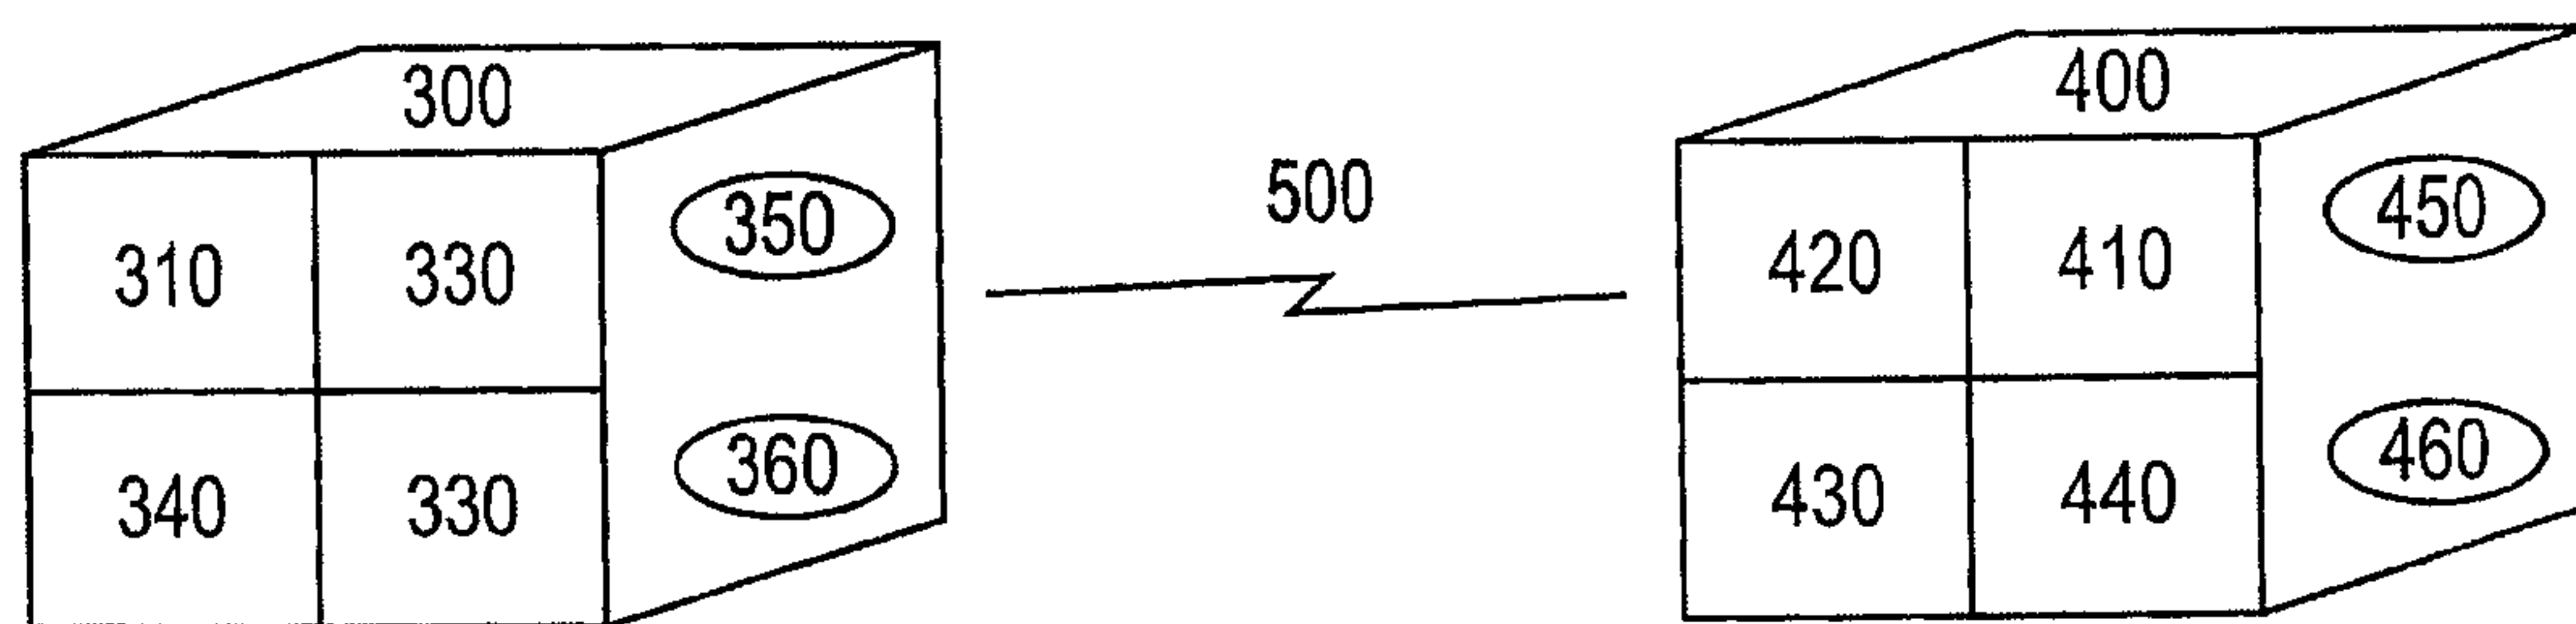


Fig.3

