

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 January 2009 (22.01.2009)

PCT

(10) International Publication Number
WO 2009/010262 A1

(51) International Patent Classification:
H01J 49/04 (2006.01)

[DE/DE]; Christa-Johannsen-Strasse 2, 39114 Magdeburg (DE).

(21) International Application Number:
PCT/EP2008/005736

(74) Agent: **HERTZ, Oliver**; v. Bezold & Partner, Akademiestrasse 7, 80799 Munich (DE).

(22) International Filing Date: 14 July 2008 (14.07.2008)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
07013904.3 16 July 2007 (16.07.2007) EP

(71) Applicants (for all designated States except US): **MAX-PLANCK-GESELLSCHAFT ZUR FÖRDERUNG DER WISSENSCHAFTEN E.V.** [DE/DE]; Hofgartenstrasse 8, 80539 Munich (DE). **GEORG-AUGUST-UNIVERSITÄT GÖTTINGEN STIFTUNG ÖFFENTLICHEN RECHTS**; Wilhelmsplatz 1, 37073 Göttingen (DE).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHARVAT, Ales** [CZ/DE]; Rautenbreite 5, 37077 Göttingen (DE). **URLAUB, Henning** [DE/DE]; Reinhäuser Landstrasse 41, 37083 Göttingen (DE). **ABEL, Bernd** [DE/DE]; Hohler Weg 4D, 37127 Dransfeld (DE). **RAPP, Erdmann**

Published:
— with international search report

(54) Title: METHOD AND APPARATUS FOR PROVIDING A SAMPLE FOR A SUBSEQUENT ANALYSIS

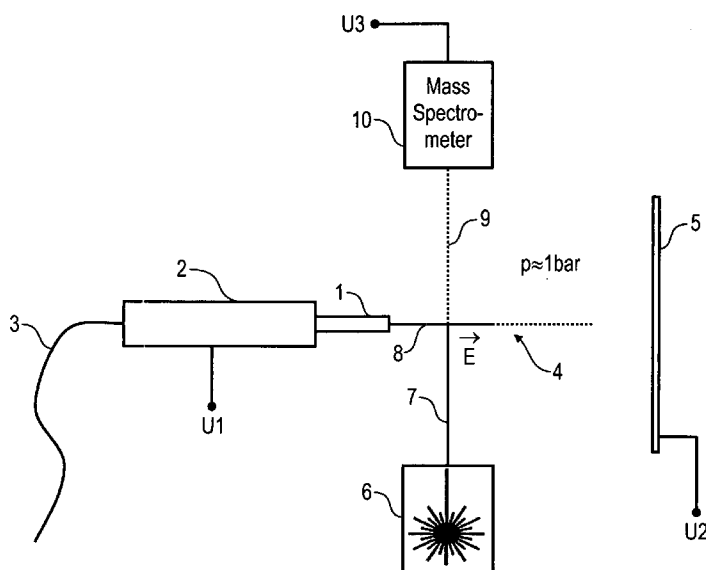


Fig. 1

(57) Abstract: The invention relates to a method and an apparatus for providing a sample for a subsequent analysis of the sample, particularly for analyzing biomolecules, comprising the following steps: generating a free micro liquid jet (4) in an environment having a predetermined pressure (p), wherein the micro liquid jet (4) contains a carrier liquid and the sample to be analyzed, and dispersing the micro liquid jet (4) into droplets (9) containing the sample, wherein the environment surrounding the micro liquid jet (4) is a gaseous environment in which the pressure (p) is above vacuum conditions.

WO 2009/010262 A1

Method and apparatus for providing a sample for a subsequent analysis

5

The invention relates to a method and an apparatus for providing a sample for a subsequent analysis of the sample, particularly for analysing biomolecules.

10

State of the art

A conventional method for providing a sample for a subsequent analysis, e.g. by mass spectroscopy, is the so-called laser induced liquid beam ionization desorption (LILBID), which is disclosed, for example, in WO 2006/064048 A1. Here, a liquid flow including a carrier liquid and the sample to be analysed is injected into a vacuum chamber by a nozzle, so that a micro liquid jet is generated within the vacuum chamber. Then, a focussed laser beam is directed laterally onto the micro liquid jet thereby inducing the well-known matrix assisted laser desorption (or: dispersion) ionization (MALDI), wherein the carrier liquid constitutes the matrix. The samples desorbed from the micro liquid jet by MALDI can then be analysed by, e.g., a mass spectrometer.

25

However, the afore-mentioned laser induced liquid beam ionization desorption (LILBID) is quite expensive in fabrication and operation since it is necessary to generate and maintain a vacuum.

30

Another conventional method for analysing a sample by mass spectroscopy is described in US 2004/0222373 A1, wherein a carrier liquid including the sample is injected through a nozzle into a chamber at atmospheric or reduced pressure.

This technique has disadvantages in terms of operational capacity and positional precision of providing the sample in the chamber as liquid droplets are generated with the nozzle only. Furthermore, the liquid droplets have a diameter above
5 100 μm , which may be a disadvantage in terms of substance consumption. Finally, this technique is not adapted for LIL-BID, but for a multi photon ionization which may have unwanted effects on the sample.

10 Summary of the invention

Therefore, it is an object of the invention to improve the conventional laser induced liquid beam ionization desorption.

15 This object is achieved by a method and a corresponding apparatus according to the independent claims.

The method and apparatus according to the invention also provide the step of generating a free micro liquid jet in an environment having a predetermined pressure, wherein the micro
20 liquid jet contains a carrier liquid and the sample to be analysed. Preferably, the micro liquid jet is generated in a conventional manner as disclosed, e.g. in WO 2006/064048 A1, which is therefore incorporated herein by reference.

25 Further, the method and apparatus according to the invention provides the step of dispersing the micro liquid jet into droplets containing the sample. The dispersing of the micro liquid jet into droplets is preferably achieved by directing
30 a laser beam onto the micro liquid jet, which will be explained in detail later.

In contrast to the initially mentioned state of the art according to WO 2006/064048 A1, the invention provides that the

micro liquid jet is generated not under vacuum conditions but in a gaseous environment in which the pressure is above vacuum conditions.

5 Preferably, the pressure in the gaseous environment surrounding the micro liquid jet is in the range between 900 mbar and 1100 mbar. However, the invention is not restricted to the afore-mentioned pressure range. For example, the pressure in the gaseous environment surrounding the micro liquid jet
10 might be greater than 100 mbar, 250 mbar, 500 mbar, 750 mbar or 900 mbar and/or smaller than 10 bar, 5 bar, 2500 mbar or 1500 mbar.

In the past, there were the following preconceptions against
15 the generation of a micro liquid jet under atmospheric pressure.

Firstly, it was assumed that atmospheric pressure negatively affects the stability of the micro liquid jet, which is however necessary for laser induced liquid beam ionization desorption (LILBID).
20

Further, it was assumed that the desorption (or: isolation) of the samples out of the carrier liquid of the micro liquid jet is more difficult under atmospheric pressure than under vacuum conditions.
25

Finally, the persons skilled in the art assumed that any samples desorbed from the micro liquid jet would be hindered by
30 the atmospheric pressure to travel to the detector (e.g. a mass spectrometer).

However, in the preferred embodiment the pressure in the gaseous environment surrounding the micro liquid jet amounts to substantially atmospheric pressure, i.e. 1 bar.

- 5 The atmospheric pressure in the gaseous environment surrounding the micro liquid jet offers two advantages.

10 Firstly, the fabrication and operation of the apparatus according to the invention is much easier since it is not necessary to generate a vacuum.

The advantage of the ambient atmosphere in the ion source is at least twofold (with respect to the vacuum LILBIB):

- 15 1. The laser-induced dispersion generates droplets/molecular ions with high translation velocities of few km per second (for a molecule with 10000Da is the kinetic energy in the keV range). Molecules with such a high kinetic energy are difficult to "image" with a mass spectrometer. In gaseous environments at atmospheric pressure, however, due to the frequent collisions, the velocity decays rapidly to its thermal value (10kDa molecule has a thermal velocity of about 20m per second at 20°C) well before entering the mass spectrometer and therefore the mass resolution improves significantly.

- 25 2. In vacuum, the desolvation of created nanodroplets is hindered due to the strong effect of evaporative cooling. In order to loose all the solvent, the nanodroplet should be either small or very hot. At the atmosphere, however, the desolvation is assisted by collisions with the ambient gas. In addition, this process lasts longer and also bigger droplets can be completely desolvated.
- 30

Further, the method and apparatus according to the invention preferably also comprises the analysis of the sample contained in the nanodroplets, which have been dispersed from the micro liquid jet. For example, a conventional mass spectrometer can be used for analysing the sample. However, the invention is not restricted to the use of a mass spectrometer for analysing the samples. Instead, other types of analysing apparatus or instrumentation can be used in the framework of the invention.

If the analysing apparatus comprises a vacuum chamber as in case of a conventional mass spectrometer, an atmospheric pressure interface (API) is preferably used for introducing the droplets into the vacuum chamber of the analysing apparatus. The function and design of conventional atmospheric pressure interfaces are disclosed in, e.g., US 6 683 300 B2 including the references cited therein. Therefore, the entire content of US 6 683 300 B2 and the references cited therein is incorporated herein by reference with regard to the design of the atmospheric pressure interface.

Further, the generation of a stable micro liquid jet at atmospheric pressure is preferably facilitated by applying an electric field to the micro liquid jet thereby stabilizing and forming the micro liquid jet, in particular extending the continuous part thereof. Applying the electric field may provide advantages in particular at low flow rates of the micro liquid jet. The electric field can be applied e. g. to the nozzle or to the liquid in the nozzle or a reservoir. The interaction between electric fields and micro liquid jets is explained in G. I. Taylor: "Electrically driven jets", Proc. Roy. Soc. Lond. A 313, 453-475 (1969), so that this reference is incorporated herein by reference.

However, it should be noted that the electric field applied to the micro liquid jet might induce the so-called electro spray ionization (ESI), which is undesirable in the framework of the invention. Therefore, the field strength of the electric field applied to the micro liquid jet is preferably adjusted such that substantially no electro spray ionization of the micro liquid jet occurs.

However, the operating range of the invention should not be restricted unnecessarily by avoiding electro spray ionization. Therefore, the field strength of the electric field applied to the micro liquid jet is preferably held below a certain threshold at which electro spray ionization begins, wherein there should be a small safety margin between the actual field strength and the electro spray ionization threshold, so that no electro spray ionization takes place. For example, the field strength of the electric field applied to the micro liquid jet can be in a small range below the electro spray ionization threshold, wherein the range is smaller than 30%, 20%, 10% or even smaller than 5% of the electro spray ionization threshold of the field strength.

It has already been mentioned that the micro liquid jet is preferably dispersed into droplets by directing a laser beam onto a continuous part of the micro liquid jet.

However, it is alternatively possible to direct the laser beam onto the discontinuous part of the micro liquid jet in which the micro liquid jet is a succession of droplets.

In this connection it should be mentioned that the carrier liquid contained in the micro liquid jet comprises a maximum absorption wavelength at which the light absorption of the carrier liquid is a maximum. Therefore, the laser beam di-

rected onto the micro liquid jet preferably comprises a wavelength, which is substantially identical to the maximum absorption wavelength of the carrier liquid, so that a large portion of the laser energy is absorbed by the carrier liquid thereby enhancing or causing the dispersion of the micro liquid jet into the droplets.

In case of water or aqueous solutions as a carrier liquid, the wavelength of the laser beam is therefore substantially 2.9 μ m.

For example, the laser beam can be generated by an infrared (IR) laser. However, the invention is not restricted to the use of an IR laser for dispersing the micro liquid jet into the droplets. Depending on the physical properties of the carrier liquid and the sample to be analysed, other types of lasers can be used, as well.

Further, it should be noted that the laser beam preferably hits the micro liquid jet from one side of the micro liquid jet and the droplets dispersed from the micro liquid jet travel to the opposite side of the micro liquid jet for the subsequent analysis. This is advantageous since the dispersion is connected with the generation of shockwaves, so that the thermal stress is lower on the side of the micro liquid jet opposite the laser beam. Merely it may be the temperature that is lower on the shadow side with respect to the irradiated side, provided the penetration depth of the laser radiation (inverse of the absorption coefficient) is smaller than the diameter of the micro beam(for instance, at 2800nm the penetration depth is only about 1 μ m).

It should further be mentioned that the droplets dispersed from the micro liquid jet preferably have a size in the range of nanometers.

5 Further, the droplets dispersed from the micro liquid jet are preferably electrically charged due to statistical charging upon the laser induced dispersion, wherein the charge of the droplets is statistically distributed and varies among the droplets.

10

An alternative method for electrically charging the droplets is the so-called atmospheric pressure chemical ionization (APCI), which can be used in the framework of the invention. This method is particularly useful in case of non-polar molecules which cannot be charged by laser induced liquid beam ionization desorption (LILBID) alone.

15

Further, the droplets can be electrically charged by directing an electron beam onto the droplets, wherein the electron beam is preferably alligned perpendicular to the succession of droplets desorbed from the micro liquid jet.

20

Moreover, the droplets typically contain a low concentration of the sample, wherein the concentration can be lower than 20 μ mol/l, 10 μ mol/l, 5 μ mol/l, 2 μ mol/l, 1 μ mol/l, 500nmol/l or even lower than 200nmol/l

25

It should also be noted that the micro liquid jet preferably comprises a flow rate of less than 500 μ l/min, 250 μ l/min, 100 μ l/min, 50 μ l/min, 20 μ l/min or less than 50 μ l/min.

30

Moreover, the micro liquid jet comprises a flow speed, which is preferably smaller than 200m/s and/or greater than 2m/s, in particular 5m/s, e. g. 20m/s.

The diameter of the micro liquid jet is preferably greater than 1 μ m and/or smaller than 100 μ m. Advantageously, a reduced mass flow can be obtained in comparison with conventional analysing techniques. With particularly preferred embodiments, the diameter is selected in the range of 1 μ m to 30 μ m, e. g. 1 μ m to 20 μ m. The latter range is particularly preferred for analytic applications of the invention.

Finally, the micro liquid jet preferably comprises a continuous part upstream before a point at which the micro liquid jet decomposes into successive droplets. The continuous part of the micro liquid jet preferably comprises a length of 1-2mm. Operation conditions of the micro nozzle are set as it is known in the art (e. g. M. J. McCarthy et al. in "The Chemical Engineering Journal" vol. 7, 1974, p. 1 - 20, or M. G. Stockman et al. in "Phys. Fluids" vol. 25, 1982, p. 1506 - 1511), so that the micro liquid jet leaving the micro nozzle has the continuous part.

Brief description of the drawings

Figure 1 is an illustration of an apparatus according to the invention for laser induced liquid beam ionization desorption.

Figure 2 is an enlarged view of a continuous region of the micro liquid jet in figure 1.

Figure 3 is an alternative embodiment in which the droplets desorbed from the micro liquid jet are additionally charged by an electron beam.

Detailed description of the drawings

The apparatus shown in the drawings comprises a micro nozzle 1, which is mounted in a nozzle bracket 2 and which is supplied with a liquid by a supply line 3.

The liquid supplied by the supply line 3 contains a carrier liquid (e.g. water) and samples (e.g. biomolecules), which are dissolved or suspended in the carrier liquid.

The micro nozzle 1 injects a micro liquid jet 4 into a gaseous environment in which the pressure amounts to substantially atmospheric pressure, i.e. 1bar.

Further, the apparatus generates an electric field, which can be used at low flow rates for stabilizing the micro liquid jet 4, so that the micro liquid jet 4 is stable even under atmospheric pressure. Therefore, a first electrode is formed by the nozzle bracket 2 and a first voltage U1 is applied to the nozzle bracket 2. Further, a second electrode 5 is disposed downstream the micro nozzle 1 and a second voltage U2 is applied to the second electrode 5, so that an electrical field is applied to the micro liquid jet 4, wherein the electric field is aligned parallel to the micro liquid jet 4. The interaction between the micro liquid jet 4 and the electric field is explained in detail in G.I. Taylor: "Electrically driven jets", Proc. Roy. Soc. Lond. A 313, 453-475 (1969), so that the content of this reference is herein incorporated by reference.

Further, the apparatus comprises an infrared (IR) laser 6 directing a laser beam 7 onto a continuous part 8 of the micro liquid jet 4 thereby dispersing the micro liquid jet 4 into droplets 9 containing a low concentration of the samples.

The droplets 9 are introduced into a mass spectrometer 10 via an atmospheric pressure interface (API), which is not shown.

5 The mass spectrometer 10 comprises an electrode to which a third voltage U_3 is applied, so that the droplets 9 move to the mass spectrometer 10 under the effect of an electric field.

10 Figure 3 illustrates an alternative embodiment which largely corresponds to Figure 1 so that reference is made to the above description.

However, in this embodiment, the laser beam 7 is not directed
15 onto the continuous part 8 of the micro liquid 4. Instead, the laser beam 7 hits the micro liquid jet 4 downstream the continuous part 8 where the micro liquid jet 4 is merely a succession of droplets.

20 Further, the droplets 9 are additionally charged by an electron beam 11, which is generated by an electron beam source 12 and directed onto the droplets 9.

Additional modifications and variations of the present invention
25 are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims the invention may be practised otherwise than as specifically described herein.

* * * * *

List of reference numerals:

- 1 Micro nozzle
- 2 Nozzle bracket
- 3 Supply line
- 4 Micro liquid jet
- 5 Electrode
- 6 Laser
- 7 Laser beam
- 8 Continuous part of the laser beam
- 9 Droplets
- 10 Mass spectrometer
- 11 Electron beam
- 12 Electron beam source

* * * * *

Claims

- 5 1. Method for providing a sample for a subsequent analysis of the sample, particularly for analyzing biomolecules, comprising the following steps:
- a) generating a free micro liquid jet (4) in an environment having a predetermined pressure (p), wherein the micro
10 liquid jet (4) contains a carrier liquid and the sample to be analyzed, and
- b) dispersing the micro liquid jet (4) into droplets (9) containing the sample,
- characterized in that**
- 15 c) the environment surrounding the micro liquid jet (4) is a gaseous environment in which the pressure (p) is above vacuum conditions.
2. Method according to claim 1, wherein the pressure (p) of
20 the gaseous environment surrounding the micro liquid jet (4) amounts to substantially atmospheric pressure (p).
3. Method according to any of the preceding claims, further comprising the following step:
- 25 analysis of the sample contained in the droplets (9).
4. Method according to claim 3, wherein the sample contained in the droplets (9) is analyzed by mass spectroscopy.
- 30 5. Method according to any of the preceding claims, further comprising the following step:
- applying an electric field (E) to the micro liquid jet (4) by an external electric voltage (U1, U2), wherein the electric

field (E) can be used for stabilizing the micro liquid jet (4).

6. Method according to any of claim 5, wherein the electric field (E) is aligned substantially parallel to the micro liquid jet (4).

7. Method according to any of claims 5 to 6, wherein the field strength of the electric field (E) is adjusted such that substantially no electro spray ionization of the micro liquid jet (4) occurs.

8. Method according to claim 7, wherein the field strength is within a predetermined range below a certain threshold at which electro spray ionization begins, wherein the range is smaller than 30%, 20%, 10% or smaller than 5% of the threshold.

9. Method according to any of the preceding claims, wherein the micro liquid jet (4) comprises a continuous part upstream before a point at which the micro liquid jet decomposes into successive droplets which form a discontinuous part of the micro liquid jet.

10. Method according to any of the preceding claims, wherein the micro liquid jet (4) is dispersed into the droplets (9) by directing a laser beam (7) onto

- a) the continuous part (8) of the micro liquid jet (4) or
- b) the discontinuous part of the micro liquid jet (4) downstream the continuous part (8).

11. Method according to claim 10, wherein

a) the carrier liquid comprises a maximum absorption wavelength at which the light absorption of the carrier liquid is a maximum, and

5 b) the laser beam (7) comprises a wavelength, which is substantially identical to the maximum absorption wavelength of the carrier liquid.

12. Method according to any of claims 10 to 11, wherein the
10 carrier liquid is water and the wavelength of the laser beam (7) is substantially 2.9 μ m.

13. Method according to any of claims 10 to 12, wherein the laser beam (7) is an infrared laser beam.

15

14. Method according to any of claims 10 to 13, wherein the laser beam (7) hits the micro liquid jet (4) from one side of the micro liquid jet (4) and the droplets (9) dispersed from the micro liquid jet (4) travel to the opposite side of the
20 micro liquid jet (4) for the subsequent analysis.

15. Method according to any of claims 10 to 14, wherein the droplets (9) are electrically charged due to the laser induced dispersion.

25

16. Method according to any of the preceding claims, wherein the droplets (9) have a size in a nanometer range.

17. Method according to any of the preceding claims, further
30 comprising the following step:

electrically charging the droplets (9) dispersed from the micro liquid jet (4), particularly by directing an electron beam (11) onto the droplets (9).

18. Apparatus for providing a sample for a subsequent analysis of the sample, particularly for analyzing biomolecules, comprising:

- 5 a) a micro-nozzle (1) for injecting a free micro liquid jet (4) into an environment having a predetermined pressure (p), wherein the micro liquid jet (4) contains a carrier liquid and at least one sample to be analyzed, and
- b) means (6) for dispersing the micro liquid jet (4) into droplets (9) containing the sample,

10 **characterized in that**

- c) the environment surrounding the micro liquid jet (4) is a gaseous environment in which the pressure (p) is above vacuum conditions.

15 19. Apparatus according to claim 18, wherein the pressure (p) of the gaseous environment surrounding the micro liquid jet (4) amounts to substantially atmospheric pressure (p).

20 20. Apparatus according to claim 18 or 19, further comprising an analyzing apparatus (10) for analyzing the sample contained in the droplets (9).

21. Apparatus according to claim 20, wherein the analyzing apparatus (10) comprises a mass spectrometer.

25

22. Apparatus according to claim 21, further comprising an atmospheric pressure interface for introducing the droplets (9) into a vacuum chamber of the mass spectrometer (10).

30 23. Apparatus according to any of claims 18 to 22, further comprising an electrode arrangement (2, 5) for applying an electric field (E) to the micro liquid jet (4).

24. Apparatus according to claim 23, wherein

- a) the electrode arrangement (2, 5) comprises a first electrode (2) and a second electrode (5),
- b) the first electrode (2) is formed by the micro-nozzle (1), and
- c) the second electrode (5) is disposed downstream the micro-nozzle (1).

25. Apparatus according to any of claims 18 to 24, wherein

the micro-nozzle (1) generates the micro liquid jet (4) comprising a continuous part upstream before a point at which the micro liquid jet decomposes into successive droplets which form a discontinuous part of the micro liquid jet.

26. Apparatus according to any of claims 18 to 25, wherein

the means (6) for dispersing the micro liquid jet (4) comprises a laser directing a laser beam onto a continuous part (8) of the micro liquid jet (4) thereby dispersing the micro liquid jet (4) into the droplets (9).

27. Apparatus according to claim 26, wherein the laser (6) is an infrared laser.

28. Apparatus according claim 26 or 27, wherein the laser

(6) and the analyzing apparatus (10) are disposed on opposite sides of the micro liquid jet (4).

29. Apparatus according to any of claims 18 to 28, further

comprising an electron beam source (12) directing an electron beam (11) onto the droplets (9) dispersed from the micro liquid jet (4) thereby electrically charging the droplets (9).

* * * * *

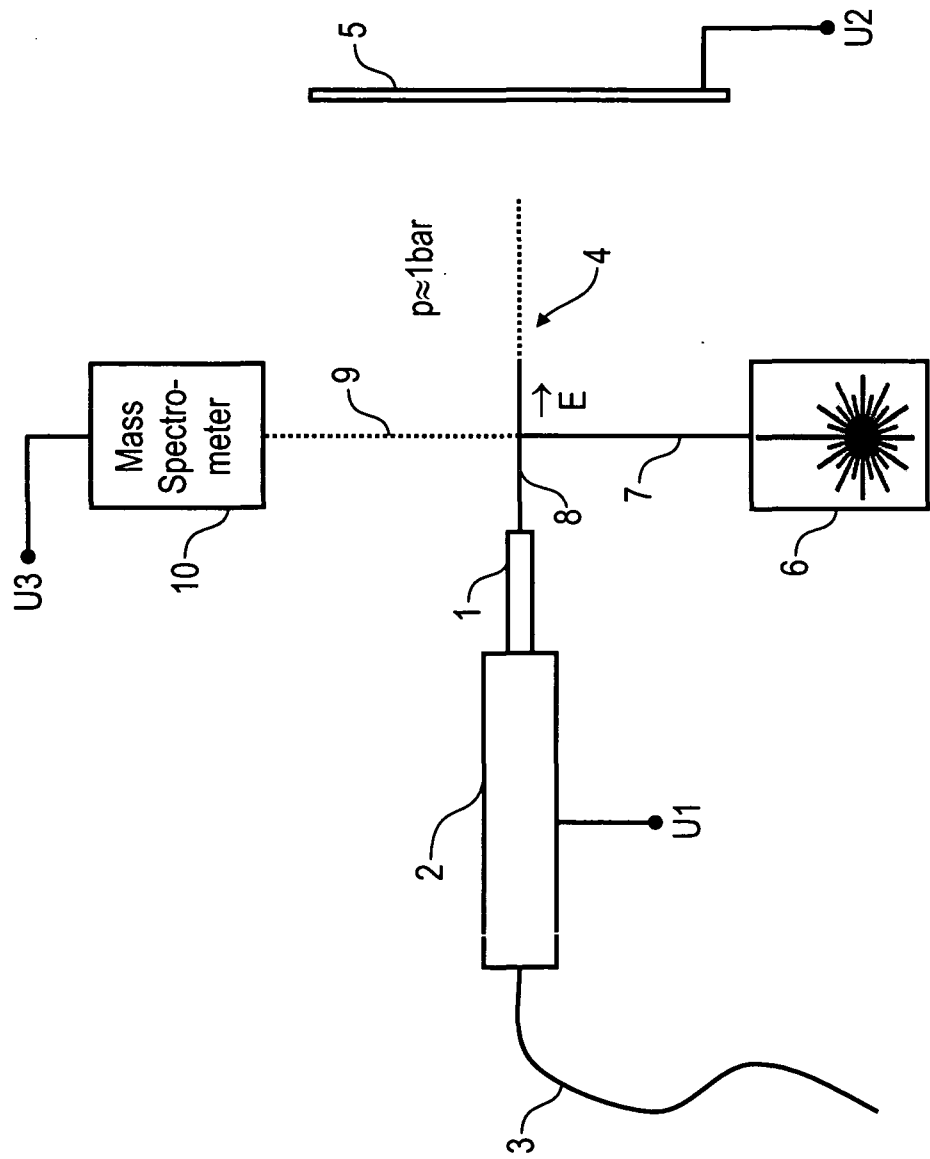


Fig. 1

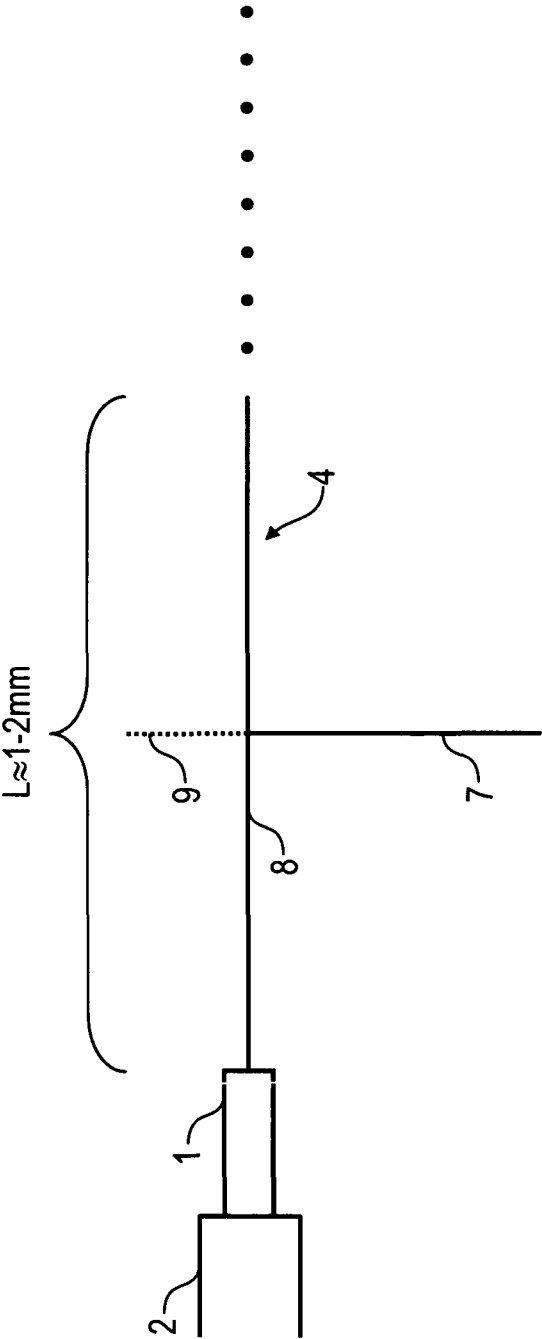


Fig. 2

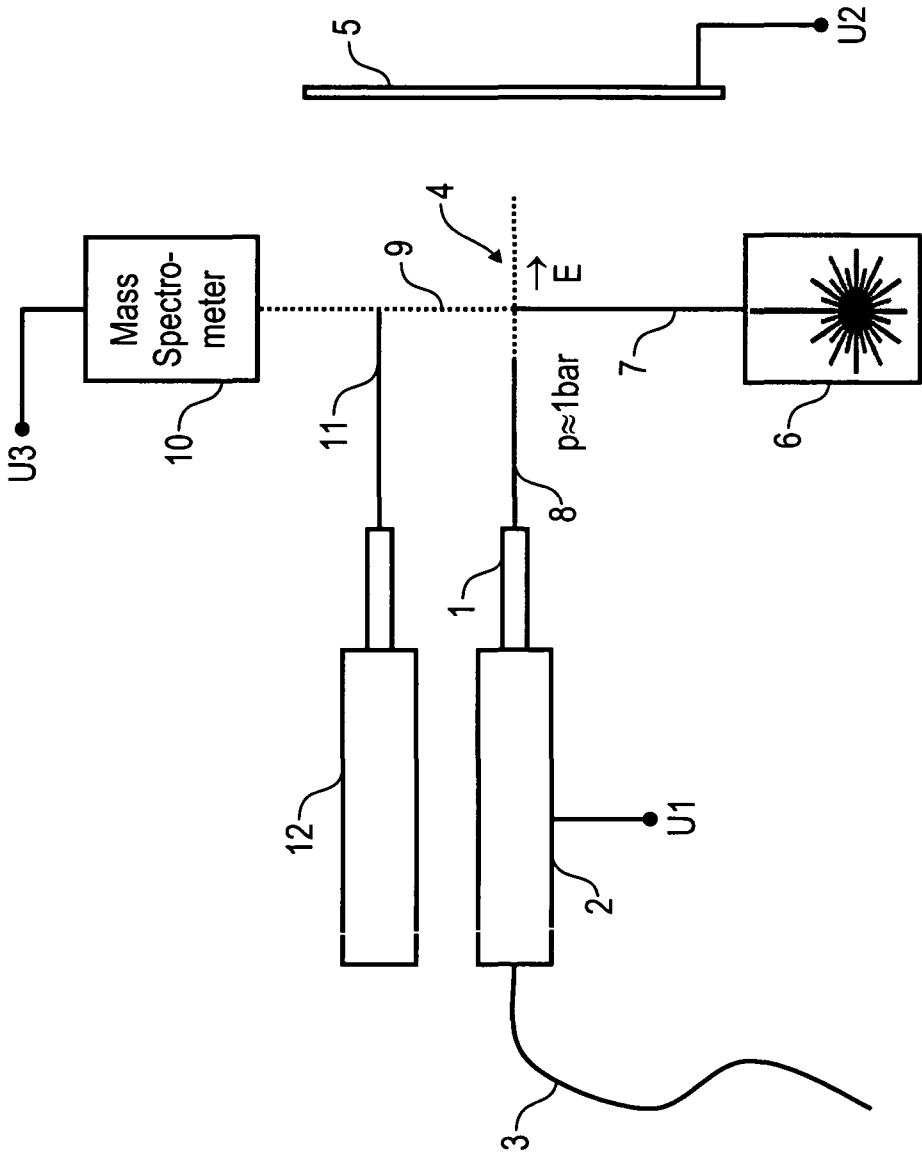


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2008/005736

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01J49/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to, claim No.
X	US 2004/222373 A1 (OSER HARALD [US] ET AL) 11 November 2004 (2004-11-11)	1-4, 9, 10, 15, 16, 18-22, 25, 26
Y	abstract claims 1, 2, 5, 11 page 1, column 1, line 1, paragraph 4 page 1, column 1, line 1, paragraph 5 - line 12 page 1, column 2, line 13, paragraph 5 - line 15 page 1, column 2, line 1, paragraph 6 - line 6 page 2, column 1, line 12, paragraph 15 - -/--	5-8, 11-13, 17, 23, 24, 27-29

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

12 September 2008

Date of mailing of the international search report

23/09/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lachaud, Stéphane

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2008/005736

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	line 19 figure 2 ----- TAYLOR J ET AL: "ELECTRICALLY DRIVEN JETS" PROCEEDINGS OF THE ROYAL SOCIETY OF LONDON. SERIES A, MATHEMATICAL AND PHYSICAL SCIENCES, ROYAL SOCIETY OF LONDON, LONDON, vol. 313, no. 1515, 2 December 1969 (1969-12-02), pages 453-475, XP000651339 ISSN: 0080-4630 abstract page 462, line 4 - line 7 page 463, line 29 - line 43 page 465, line 30 - line 43 page 466, line 1 - line 3 figures 1, A1 -----	5-8, 23, 24
Y	CHARVAT A ET AL: "New design for a time-of-flight mass spectrometer with a liquid beam laser desorption ion source for the analysis of biomolecules" REVIEW OF SCIENTIFIC INSTRUMENTS, AIP, MELVILLE, NY, US, vol. 75, no. 5, 1 May 2004 (2004-05-01), pages 1209-1218, XP012071410 ISSN: 0034-6748 abstract page 1209, column 2, line 21 page 1210, column 1, line 39 - line 40 page 1210, column 2, line 1 - line 25 -----	11-13, 27, 28
Y	US 5 294 797 A (FREY RUEDIGER [DE] ET AL) 15 March 1994 (1994-03-15) abstract figure 1(6) -----	17, 29
A	WO 03/031074 A (MICROENERGY TECHNOLOGIES INC [US]) 17 April 2003 (2003-04-17) the whole document -----	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/005736

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004222373 A1	11-11-2004	NONE	
US 5294797 A	15-03-1994	DE 4108462 A1 EP 0503748 A2	17-09-1992 16-09-1992
WO 03031074 A	17-04-2003	NONE	