

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 June 2001 (21.06.2001)

PCT

(10) International Publication Number
WO 01/44415 A1

(51) International Patent Classification⁷: C10L 1/22,
1/18, 10/04

(21) International Application Number: PCT/EP00/12755

(22) International Filing Date:
14 December 2000 (14.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9929803.6 16 December 1999 (16.12.1999) GB

(71) Applicant (for all designated States except US): EXXON-MOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, Clinton Township, Annandale, NJ 08801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BARBOUR, Robert, Howie [GB/GB]; 12 Elport Close, Hulland Ward, Ashbourne, Derby DE6 3FR (GB). RICKEARD, David,

J. [GB/GB]; Patents and Licences, Mailpoint 12, Esso House, Ermyn Way, Leatherhead, Surrey KT22 8XE (GB). SCHILOWITZ, Alan, Mark [GB/GB]; Patents and Licences, Mailpoint 12, Esso House, Ermyn Way, Leatherhead, Surrey KT22 8XE (GB).

(74) Agents: DEW, Melvyn, John et al.; ExxonMobil Chemical Europe Inc., P.O. Box 105, B-1830 Machelen (BE).

(81) Designated States (national): CA, JP, SG, US.

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL COMPOSITION

(57) Abstract: This invention is a fuel composition having a sulphur content of ≤ 50 ppm by weight and comprising ≥ 50 ppm by weight of at least one fused polycyclic aromatic compound which has at least one hetero-atom selected from O and N either (a) as a heterocyclic group, or, (b) as an exocyclic group in which the hetero-atom is attached either directly or through one other carbon atom to a ring carbon atom wherein the fused polycyclic aromatic compound is substituted on at least one of its ring carbon atoms by a C1-C4 alkyl group. These compounds are capable of improving the antiwear and lubricity properties of a low sulphur fuels, especially diesel fuels, when compared with the performance of the same fuel in the absence of such compounds.



WO 01/44415 A1

FUEL COMPOSITION

This invention relates to fuel compositions of low sulphur content which contain at least one component capable of enhancing the lubricity of such low sulphur fuels.

5 Fuels such as diesel are widely used in automotive transport due to their low cost. However, one of the problems with such fuels is the presence of relatively high concentrations of sulphur containing compounds. Excessive sulphur contributes to exhaust particulate emissions and can also degrade the effectiveness of some exhaust after-treatment technology which is being introduced in response to regulated limits on
10 exhaust emissions. As a result, the permitted level of sulphur in diesel fuel has been progressively reduced over the years and further reductions are planned for the future. Whilst a reduction in sulphur content can be readily achieved by well known processes such as hydrodesulphurisation which is generally carried out in the presence of a catalyst, such processes also adversely affect the lubricity of the resultant desulphurised product.
15 Consequently, it is necessary to formulate compositions which are low in sulphur content but are also of the desired lubricity in order to minimise wear and friction when used in automotive engines and to minimise the damage to the injection system of a diesel engine. It has hitherto been the practice to add anti-wear agents to such fuel formulations including fatty acids, fatty acid esters, lactones, polyoxyalkylene ethers, amino
20 compounds and their like for this purpose. All such compounds are surfactant in nature by virtue of having a hydrophobic 'tail' and hydrophilic 'head group'. A publication by Wei and Spikes titled 'The lubricity of diesel fuels' (published in Wear, 111 (1986) 217) discloses that heterocyclic nitrogen compounds, like quinoline and indole, also have a beneficial effect on the antiwear performance of base fuels. Although these compounds
25 do not have a surfactant like structure they are of the same general structure as the natural compounds that are destroyed during hydrotreatment.

A further article by D. Wei et al in Lubrication Science, 1989, 2(1), pp 63-67 entitled "The Influence of Chemical Structure of Certain Nitrogen-Containing Organic
30 Compounds on Their Antiwear Effectiveness: The Critical Role of Hydroxy Group" goes on to show that hydroxy groups involved in some nitrogen-containing compounds have been found to improve their antiwear performance significantly and states that hydroxy substituted benzothiazoles are most effective in wear reduction and anti-scuffing. With this in view the author reports the results of the tests carried out on films formed on
35 rubbing surfaces by the benzo-derivatives of pyridine and thiazole, with or without

hydroxy groups on the rings. The article concludes that protective films formed on rubbing surfaces by the above heterocyclic compounds bearing a hydroxy group are significantly different from those produced by their analogues with similar chemical composition and physical properties.

5

It has also been found that some polycyclic aromatic compounds such as eg carbazoles have limited solubility in the fuel to function efficiently (Wei et al, Journal of Petroleum (Petroleum Processing) Vol 4, No 1, p90, March 1988). Thus, EP-A-757092 describes the use of alkyl carbazoles, e.g. methyl and ethyl carbazole, where the alkyl

10 group was attached to the hetero-atom itself.

It has now been found that the presence of alkyl substituents attached to or in close proximity to the hetero-atom may mask the lubricity enhancing or anti-wear potency of the hetero-atom in these compounds possibly due to steric hindrance. This, in

15 turn, reduces the interaction of the hetero-atom and the metal surface which is essential for adsorption and the formation of a protective layer. It has also been found that such steric effects may be mitigated without detracting from the solubilising effects of the substituent alkyl groups by distancing the alkyl group(s) from the hetero-atom.

20 The present invention, therefore, provides a fuel composition having a sulphur content of not more than 50 ppm by weight and comprising at least 50 ppm based on the total weight of the fuel composition of at least one fused polycyclic aromatic compound which comprises at least one hetero-atom selected from oxygen and nitrogen either

- a. as a heterocyclic group, or,
- 25 b. as an exocyclic group in which at least one of the hetero-atoms is attached either directly or through one other carbon atom to a ring carbon atom of the fused polycyclic aromatic compound

wherein the fused polycyclic aromatic compound is substituted on at least one of its ring carbon atoms by a C1-C4 alkyl group such that in the case of

- 30 i. the heterocyclic group, the alkyl substituent is on a ring carbon atom other than the carbon atom which is in the α -position with respect to at least one of the hetero-atoms provided that where the α -carbon atom is a bridging carbon atom of a fused polycyclic aromatic compound, it is other than the β -carbon atom with respect to said hetero-atom in the ring, and
- 35 ii. an exocyclic group, the alkyl substituent is on a ring carbon atom which is neither in the α -position nor in the β -position with respect to the exocyclic hetero-atom.

As described above, the sulphur content of the fuel composition is suitably less than 50 ppm by weight and is preferably less than 40 ppm by weight. Such low sulphur levels can be achieved in a number of ways. For instance, this may be achieved by well known methods such as eg, catalytic hydrodesulphurisation. Typically, the present invention is applicable to a broad range of petroleum fuels from the light boiling gasoline (which typically boils between 50 and 200°C) to distillate fuel (which typically boils between 150 and 400°C). The most common distillate fuels are kerosene, jet fuels, diesel fuels and heating oils. The lubricity properties of ultra-low sulphur (50 ppm or less) base fuels with a T_{95} of suitably $\leq 340^\circ\text{C}$, preferably $\leq 320^\circ\text{C}$, particularly benefit from the presence of polycyclic aromatic compounds comprising at least one hetero-atom, especially with nitrogen as the hetero-atom, referred to above. Especially, the lubricity properties are more of an issue with diesel fuels because diesel fuel injection pumps are more sensitive to wear problems. The base fuels may comprise mixtures of saturated, olefinic and aromatic hydrocarbons and these can be derived from straight run streams, thermally or catalytically cracked hydrocarbon feedstocks, hydrocracked petroleum fractions, catalytically reformed hydrocarbons, or synthetically produced hydrocarbon mixtures. The present invention is particularly applicable to diesel fuels that have recently been introduced into the UK market and are generally referred to as ultra-low sulphur automotive diesel oils (hereafter "ULSADO" and is sampled eg from Esso's Fawley Refinery).

The fused polycyclic aromatic compound comprises at least one hetero-atom selected from oxygen and nitrogen either


- a. as a heterocyclic group, or,
- c. as an exocyclic group in which the hetero-atom is attached either directly or through one other carbon atom to a ring carbon atom of the fused polycyclic aromatic compound

wherein the fused polycyclic aromatic compound is substituted on at least one of its ring carbon atoms by a C1-C4 alkyl group such that in the case of


- i. the heterocyclic group, the alkyl substituent is on a ring carbon atom other than the carbon atom which is in the α -position with respect to the heteroatom provided that where the α -carbon atom is a bridging carbon atom of a fused polycyclic aromatic compound, it is other than the β -carbon atom with respect to the hetero atom in the ring, and

- ii. an exocyclic group, the alkyl substituent is on a ring carbon atom which is neither in the α -position nor in the β -position with respect to the exocyclic hetero-atom.

By the expression "fused polycyclic aromatic compound" as used herein and
 5 throughout the specification is meant that said compound comprises an aromatic moiety
 which has at least two fused rings of which at least one is an aromatic ring, which
 aromatic ring may in turn be a heterocyclic ring, whether or not the remaining ring(s) in
 the fused polycyclic structure are aromatic. Where the fused polycyclic aromatic
 compound contains a heterocyclic ring, the hetero-atom is nitrogen or oxygen. These
 10 fused polycyclic aromatic compounds may contain more than one heterocyclic atom.
 One such example of a fused polycyclic aromatic/heterocyclic ring is benzimidazole.




Benzimidazole




5-Methyl benzimidazole

In this compound, if a C1-C4 alkyl group is substituted in a non- α -position, such
 15 a compound would be 5-alkyl-benzimidazole and more specifically eg 5-methyl
 benzimidazole.

Where the exocyclic group contains nitrogen as the hetero-atom, it is suitably a
 primary amino group. Examples of such compounds which have an exocyclic group
 20 containing nitrogen wherein the nitrogen is directly attached to a ring carbon atom
 include *inter alia* 6-ethyl-2,3-diamino naphthalene and 4-amino quinaldine.

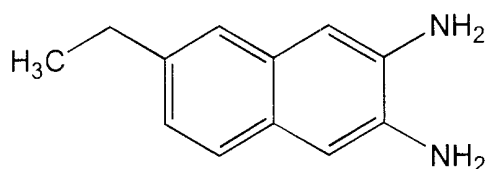


6-Ethyl-2,3-diamino naphthalene




4-Amino quinaldine

Where the exocyclic group contains oxygen as the hetero-atom, it is suitably an
 alcohol or a carboxylic acid group. It is essential that the polarity of these groups are

maintained by retaining the hydrogen in these groups such as eg $-OH$ or $-C(O)OH$ by not converting the alcohol into an ether or an ester group and similarly not converting the carboxylic acid group into an ester group. As explained above, in the case of the $-OH$ group, the alkyl substituent should not be in the α -position or in the β -position with respect to the exocyclic oxygen-atom in order to maximise the potency of the hetero-atom for imparting lubricity and anti-wear properties to the fuel composition. Similarly, in the case of the carboxylic acid group, the alkyl substituent should neither be in the α -position nor in the β -position with respect to the exocyclic oxygen-atom. In fact, in the case of the carboxyl group, it is preferable that the alkyl substituent is even further removed from the hetero-atom eg by keeping vacant even the γ -position with respect to the oxygen atom, if the carbon of the carboxyl group is considered as the α -carbon atom. Examples of such compounds include *inter alia* 6-methyl naphth-2-ol and 4-methyl-2-naphthoic acid.

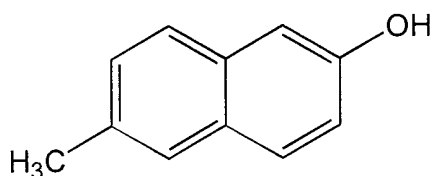


6-Methyl naphth-2-ol

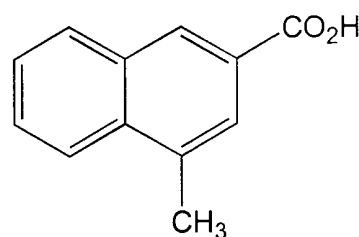


4-Methyl-2-naphthoic acid

As mentioned previously, the polycyclic aromatic compounds can contain >1 hetero-atom, and while it is preferable that both be unhindered, it is possible that one hetero-atom is unhindered while the second has an alkyl substituent in close proximity. Examples of such compounds are 2-hydroxy-4-methyl quinoline and 8-hydroxy quinaldine.



2-hydroxy-4-methyl quinoline



8-hydroxy quinaldine

In this context it is worth noting that the composition according to the present invention has enhanced lubricity when compared with fuel compositions which have a low sulphur content but which do not contain a fused polycyclic aromatic compound

containing nitrogen or oxygen as the heteroatom and which do not carry an alkyl substituent as described above. The amount of the fused polycyclic aromatic compound as described above added to the fuel composition is at least 50 ppm, suitably 50-2000 ppm and is preferably from 50-500 ppm by weight of the total fuel composition. In this context it will be understood by those skilled in the art that the improvement in antiwear and lubricity characteristics of the fuel composition may not bear a linear relationship commensurate with the amount of the fused polycyclic aromatic compound that is added to said composition. Thus, addition of a vast excess of such an additive may not necessarily continually improve the antiwear or lubricity properties of the fuel composition.

The antiwear and lubricity performance of the fuel compositions of the present invention were measured according to the so-called high frequency reciprocating rig test (hereafter referred to as "HFRR"). The HFRR test consists of a loaded upper ball 6mm in diameter, which oscillates against a static lower plate. Both friction and contact resistance are monitored throughout the test. The tests are conducted according to the standard procedure published as CEC F-06-A-96 in which a load of 2N (200g) was applied, the stroke length was 1mm, the reciprocating frequency was 50 Hz and sample temperature of 60°C. The ambient temperature and humidity were controlled within the specified limits and the calculated value of wear scar diameter was corrected to the standardized water vapour pressure of 1.4 kPa. The specimen ball was a grade 28 (ANSI B3.12), AISI E-52100 steel with a Rockwell hardness "C" scale (HRC) number of 58-66 (ISO 6508), and a surface finish of less than 0.05µm R_a, and the lower plate was AISI E-52000 steel machined from annealed rod, with a Vickers hardness "HV30" scale number of 190-210 (ISO 6507/1). It is turned, lapped and polished to a surface finish of 0.02µm R_a.

Summary of HFRR test conditions

Fluid volume, ml	2.0 ± 0.20	Specimen steel	AISI E-52100
Fluid temperature, °C	60 ± 2	Ball diameter, mm	6.00
Bath surface area, cm ²	6.0 ± 1.0	Surface finish (ball)	< 0.05 µm R _a
Stroke length, mm	1.0 ± 0.02	Hardness (ball)	58 - 66 Rockwell C
Frequency, Hz	50 ± 1	Surface finish (plate)	< 0.02 µm R _a
Applied load, g	200 ± 1	Hardness (plate)	190 - 210 HV 30
Test duration, minutes	75 ± 0.1	Ambient conditions	See text

The present invention is further illustrated with reference to the following Examples. The ULSADOs (< 50 ppm sulphur) used in this study are described below in Table 1:

5

TABLE 1

Analysis	ULSADO
Density @ 15°C	834.0
Viscosity KV ₄₀	2.52
Sulphur content (ppm)	27
Nitrogen content (ppm)	27
Aromatics (% m/m)	
1-ring	20.55
2-ring	7.77
3-ring	0.68
Distillation	
IBPt	157
T5%	181
T10%	196
T20%	222
T30%	246
T40%	264
T50%	276
T60%	286
T70%	293
T80%	301
T90%	310
T95%	318
FBPt	331

The following compounds shown in Table 2 below were tested at the specified concentrations:

10

A series of benzimidazole derivatives (1), (2) and (3) have been evaluated to show that the presence of alkyl groups improves solubility but these groups need to be in a remote position so as not to adversely affect the lubricity performance.




15

All three compounds were added to reference ULSADO (the base fuel) at 50 ppm and 150-ppm levels and left under ambient conditions for about 1 week. After this time undissolved solids were observed in all six samples (low and high treats). All samples

were then sonicated and observed on a regular basis. The lower treat rate samples dissolved before the higher treat rate samples and 5-methyl benzimidazole (compound 2) dissolved the quickest followed by compound 3 and finally compound 1.

5

TABLE 2

No Compound	 (1) Benzimidazole	 (2) 5-methyl benzimidazole	 (3) 2-methyl benzimidazole
Solubility	Worst	Best	2nd
HFRR @ 50ppm	522 μm	389 μm Best	574 μm
HFRR @ 150ppm	273 μm	257 μm Best	320 μm Worst

- 10 HFRR results for all samples tested showed 5-methyl benzimidazole (compound 2) (according to the invention) to be the most active followed by compound 1 and then 3. Under the same test conditions, the base fuel gave a wear scar of 556 μm .

Thus, the compound with remote alkyl substitution was the most soluble and had the best
15 lubricity performance.

Claims:

1. A fuel composition having a sulphur content of not more than 50 ppm by weight and comprising at least 50 ppm based on the total weight of the fuel composition of at least one fused polycyclic aromatic compound which comprises at least one hetero-atom
5 selected from oxygen and nitrogen either
 - a. as a heterocyclic group, or,
 - d. as an exocyclic group in which at least one of the hetero-atoms is attached either directly or through one other carbon atom to a ring carbon atom of the fused polycyclic aromatic compound
- 10 wherein the fused polycyclic aromatic compound is substituted on at least one of its ring carbon atoms by a C1-C4 alkyl group such that in the case of
 - i. the heterocyclic group, the alkyl substituent is on a ring carbon atom other than the carbon atom which is in the α -position with respect to at least one of the hetero-atoms provided that the where the α -carbon atom is a bridging carbon
15 atom of a fused polycyclic aromatic compound, it is other than the β -carbon atom with respect to said hetero atom in the ring, and
 - ii. an exocyclic group, the alkyl substituent is on a ring carbon atom which is neither in the α -position nor in the β -position with respect to the exocyclic hetero-atom.
- 20 2. A fuel composition according to Claim 1 wherein the sulphur content of the fuel composition is less than 50 ppm by weight.
3. A fuel composition according to Claim 1 or 2 wherein the sulphur content of the fuel composition is less than 40 ppm by weight.
- 25 4. A fuel composition according to any one of the preceding Claims wherein the fuel is a diesel fuel which has a sulphur content of 50 ppm or less.
5. A fuel composition according to any one of the preceding Claims wherein the fuel
30 is a diesel fuel having a composition shown in Table 1 above.
6. A fuel composition according to any one of the preceding Claims wherein the fused polycyclic aromatic compound comprises an aromatic moiety which has at least two fused rings of which at least one is an aromatic ring, which aromatic ring is

optionally a heterocyclic ring, whether or not the remaining ring(s) in the fused polycyclic structure are aromatic.

- 5 7. A fuel composition according to Claim 6 wherein at least one of the aromatic rings in the aromatic moiety is a heterocyclic ring wherein the hetero-atom is nitrogen or oxygen.
- 10 8. A fuel composition according to any one of the preceding Claims wherein the exocyclic group containing nitrogen is a primary amino group.
- 15 9. A fuel composition according to any one of the preceding Claims wherein the fused polycyclic aromatic compound carrying a C1-C4 alkyl substituent in a non- α -position is 5-methyl benzimidazole.
- 20 10. A fuel composition according to any one of the preceding Claims 1-7 wherein the exocyclic group containing oxygen is an -OH group or a -C(O)OH group.
- 25 11. A fuel composition according to Claim 12 wherein the exocyclic group containing oxygen is selected from 2-hydroxy-4-methyl quinoline and 8-hydroxy quinaldine.
- 30 12. A fuel composition according to any one of the preceding Claims wherein the alky substituent on the ring carbon atom is a methyl or an ethyl group.
13. A fuel composition according to any one of the preceding Claims wherein the amount of the fused polycyclic aromatic compound which comprises at least one hetero-atom selected from nitrogen and oxygen and an alkyl substituent on a ring carbon atom is added to the fuel composition in an amount of 50-2000 ppm by weight of the total fuel composition.
14. A fuel composition according to any one of the preceding Claims wherein the fused polycyclic aromatic compound which comprises at least one hetero-atom selected from nitrogen and oxygen and an alkyl substituent on a ring carbon atom is capable of acting as an antiwear and/or lubricity enhancing additive for the low sulphur fuel.

INTERNATIONAL SEARCH REPORT

Intern: al Application No
PCT/EP 00/12755

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 C10L1/22 C10L1/18 C10L10/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 C10L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 330 302 A (TAYLOR WILLIAM F) 18 May 1982 (1982-05-18) the whole document ---	1,6,7,9, 12,13
A	WO 94 22988 A (MOBIL OIL CORP) 13 October 1994 (1994-10-13) the whole document ---	1
A	WO 94 09093 A (MOBIL OIL CORP) 28 April 1994 (1994-04-28) ---	
A	US 2 243 168 A (ROGERS ET AL.) 27 May 1941 (1941-05-27) ---	
A	WO 98 16601 A (DEORE CHRISTOPHE LE ;CAPROTTI RINALDO (GB); EXXON CHEMICAL PATENTS) 23 April 1998 (1998-04-23) --- -/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
° Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
E earlier document but published on or after the international filing date	*X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	
O document referring to an oral disclosure, use, exhibition or other means	*&* document member of the same patent family	
P document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search <p style="text-align: center;">25 April 2001</p>	Date of mailing of the international search report <p style="text-align: center;">04/05/2001</p>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center;">De La Morinerie, B</p>	

INTERNATIONAL SEARCH REPORT

Intern. Application No PCT/EP 00/12755

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 52995 A (LUBRIZOL ADIBIS HOLDINGS LTD ;MORETON DAVID JOHN (GB)) 21 October 1999 (1999-10-21) ---	
A	EP 0 757 092 A (TONEN CORP) 5 February 1997 (1997-02-05) cited in the application ---	
A	WO 98 01516 A (SHELL INT RESEARCH) 15 January 1998 (1998-01-15) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/12755

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4330302 A	18-05-1982	US 4280894 A	28-07-1981
WO 9422988 A	13-10-1994	AU 689773 B AU 6528394 A EP 0693103 A JP 8508772 T	09-04-1998 24-10-1994 24-01-1996 17-09-1996
WO 9409093 A	28-04-1994	US 5183475 A AU 2873592 A	02-02-1993 09-05-1994
US 2243168 A	27-05-1941	NONE	
WO 9816601 A	23-04-1998	AU 724682 B AU 4703997 A CN 1239500 A EP 0956328 A FI 990789 A NO 991715 A	28-09-2000 11-05-1998 22-12-1999 17-11-1999 01-06-1999 11-06-1999
WO 9952995 A	21-10-1999	AU 3340499 A EP 0991738 A	01-11-1999 12-04-2000
EP 0757092 A	05-02-1997	JP 9040975 A JP 9040978 A JP 9040977 A CA 2182108 A US 5730762 A	10-02-1997 10-02-1997 10-02-1997 01-02-1997 24-03-1998
WO 9801516 A	15-01-1998	CN 1222930 A US 5997592 A AU 709500 B AU 3542497 A BR 9710174 A CA 2258045 A CZ 9900025 A EP 0909306 A NO 990009 A PL 331085 A AT 191234 T DE 69701575 D DE 69701575 T JP 2000514125 T TR 9802776 T	14-07-1999 07-12-1999 02-09-1999 02-02-1998 10-08-1999 15-01-1998 11-08-1999 21-04-1999 04-01-1999 21-06-1999 15-04-2000 04-05-2000 14-09-2000 24-10-2000 22-03-1999