



(51) International Patent Classification:
G02F 1/167 (2006.01)

(21) International Application Number:

PCT/US2018/019906

(22) International Filing Date:

27 February 2018 (27.02.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/464,780

28 February 2017 (28.02.2017) US

(71) Applicant: **E INK CORPORATION** [US/US]; Attn: IP Department, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US).

(72) Inventors: **SAINIS, Sunil Krishna**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US). **BISHOP, Seth J.**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US). **LATTES, Ana L.**; c/o E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US). **HUNG, Ming-Chuan**; c/o E Ink Holdings, Inc., 3 Li-Hsin Rd, 1, Hsinchu, 300 (TW).

LI, Shi-Lin; c/o E Ink Holdings, Inc., 3 Li-Hsin Rd, 1, Hsinchu, 300 (TW).

(74) Agent: **BEAN, Brian D.**; E Ink Corporation, 1000 Technology Park Drive, Billerica, Massachusetts 01821-4165 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: WRITEABLE ELECTROPHORETIC DISPLAYS INCLUDING SENSING CIRCUITS AND STYLI CONFIGURED TO INTERACT WITH SENSING CIRCUITS

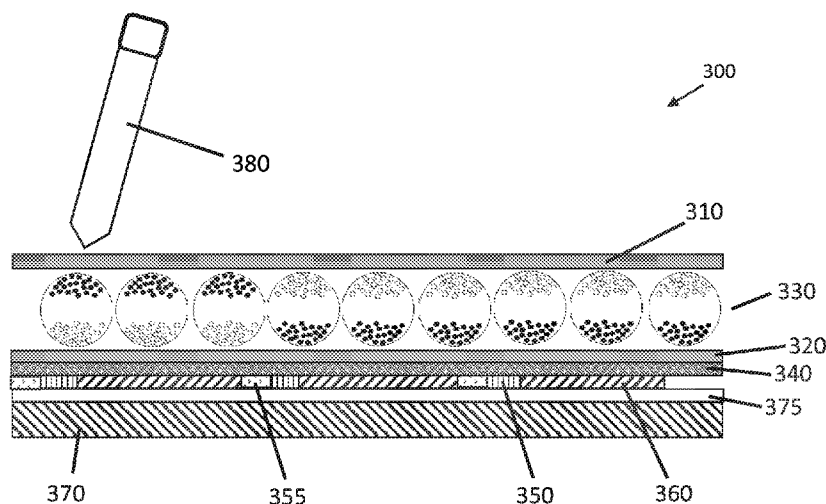


FIG. 3

(57) Abstract: A writeable display medium incorporating various sensing elements into the backplane of the writeable display medium so that the sensing elements can cause the associated pixels to update immediately in contrast to state-of-the-art writeable displays that, rely on a feedback loop between a digitizing layer and a display driver that controls the output of a display. As a stylus is moved over the display, a signal emitted from the stylus (e.g., an electromagnetic field) will change the state of a transistor associated with a pixel, resulting in a nearly instantaneous state change in the display (i.e., white to black).

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

WRITEABLE ELECTROPHORETIC DISPLAYS INCLUDING SENSING CIRCUITS AND STYLI CONFIGURED TO INTERACT WITH SENSING CIRCUITS

RELATED APPLICATIONS

[Para 1] This application claims priority to U.S. Provisional Application No. 62/464,780, filed February 28, 2017, which is incorporated herein by reference in its entirety.

BACKGROUND OF INVENTION

[Para 2] This invention relates to writable electronic tablets that allow users to take notes, draw figures, and edit documents electronically. In some embodiments, the writable electronic tablets record the writings/drawings and convert them into a digital format that is easily saved, recalled, and shared. In some embodiments, the writeable electronic tablets merely provide an alternative format to take notes, draw designs, and leave messages.

[Para 3] A number of LCD-based tablets are commercially-available that have the ability to record a user's writing, drawing, or mark-up of documents. For example, the Microsoft SURFACE® Pro 4 (Microsoft Corporation, Redmond, WA) comes with a stylus (SURFACE PEN®) that allows a user to take notes, draw, and mark-up documents that are viewed on the LCD touch screen. The position of the stylus is tracked by broadcasting a signal from the stylus tip to the capacitive touch screen of the tablet, whereby a proximity-sensing algorithm is used to determine the location of the stylus. Other LCD-based tablets, such as the Sony VAIO LX900 (Sony Corporation, Tokyo, Japan) use the digitizing technology of Wacom (Wacom Co. Ltd., Kazo, Japan) whereby the stylus tip (including an inductive loop) is located by an energized digitizing layer located behind the LCD display. The digitizing layer typically comprises a grid of overlapping electrodes adjacent a magnetic film. The stylus head in the Wacom system includes an inductive coil, and the motion of the coil during writing can be translated into a position with respect to the grid defined by the electrodes in the digitizing layer.

[Para 4] A common complaint from users is that these LCD-based tablets do not provide a "paper-like" experience. First, because the LCD is power-hungry, the screen will often go dark when the tablet is not in active use. This means that a user has to "wake up" the device to start writing, and sometimes has to reawaken the device during a writing session because the device went "to sleep" while the user was listening to a speaker, or otherwise engaged in a different task. Secondly, the pen strokes do not feel or look like writing on paper because the texture,

depth, and latency of the writing device is perceptibly different that using a pen on real paper. Often when writing on an LCD display with a stylus, a user has the sense that he/she is dragging a plastic stick across a plate of glass. Furthermore, when using these types of electronic tablets, the writing has a “depth” into the viewing surface that is disorienting. The written words are not at the top surface interacting with the stylus, but rather disconnected from the stylus tip.

[Para 5] Alternate electronic writing devices have been constructed using light-reflective media, such as electrophoretic ink (E Ink Corporation, Billerica, MA). See, for example, the DPTS1™ from Sony (Sony Corporation, Tokyo, Japan). Electrophoretic ink solves many of the “sleeping” problem of LCD-based writing systems because the devices are always “on”. They consume far less power during the writing process so they don’t need to go to sleep except when prompted by the user, and even after they are asleep they continue to display the writing. Additionally, because the electrophoretic ink is very close to the surface of the device, the pen response looks more like writing. The devices are also sunlight-readable, which makes it possible to use the device outdoors or in other bright-light environments. Some commercially-available electrophoretic ink devices, such as the ReMARKABLE™ tablet (REMARKABLE A.S., Oslo, Norway), also include high-friction surface materials that create a “feel” that is far more paper-like. While such friction materials can be included on LCD displays, the materials can interfere with the image quality of the LCD because the friction materials scatter the light emitted from the display.

[Para 6] Regardless of the format (LCD or electrophoretic ink), users of electronic (tablet) display writing systems typically experience distracting latency between stylus movement and image updates when writing. This latency is caused by the time that is required to sense the position of the stylus and update the image driver so that the movement of the stylus is accurately portrayed as writing/drawing on the screen. The latency is the additive delay of a series of steps such as sensing the position of the stylus, sending the position information to the display driver, processing the display change, and refreshing the display. In many cases, the position information is additionally saved to memory to allow the user to later recall the notes, and this saving step may add an additional small delay. In LCD-based systems, the latency is typically on the order of 60 ms. Many users find the latency to be distracting, and in some cases, the latency limits the speed that a user can take notes, draw, etc.

[Para 7] In addition to the sensing and saving the position information, there may be additional lag time associated with refreshing the image to show the writing. For example, electrophoretic ink systems often have latencies of at least 100 ms because of the additional

time (20-40 ms) that it takes to drive the electrophoretic particles between image states after the update is sent to the pixels. In addition, the latency may vary depending upon what portion of the display is being updated. That is, the latency is different across the display surface because the display driver updates the scan lines in an orderly fashion. For example, the latency may be more noticeable when writing in the lower right-hand corner of a tablet versus the upper left-hand corner.

[Para 8] To counter the latency, some manufacturers use predictive algorithms to reduce the number of updates needed to capture the writing. These predictive algorithms may, for example, process the previous letters that were written and predict the next letters. The algorithms may also employ a rolling average to anticipate straight lines or use smoothing to account for fluctuations in stylus sensing. Nonetheless, such algorithms can result in unintended strokes being generated which can be just as distracting to a user as waiting for updates.

SUMMARY OF INVENTION

[Para 9] The invention addresses several shortcomings of the prior art by providing a writeable display medium that is paper-like and allows nearly instantaneous text updates as the stylus is moved across the surface of the display. In one aspect, the writeable display medium includes a light-transmissive front electrode, an array of pixel electrodes, an electrophoretic medium comprising charged particles that move in the presence of an electric field sandwiched between the light-transmissive front electrode and the array of pixel electrodes, first and second set of transistors, and a digitizing layer configured to locate a touch on the writeable display medium. The first set of transistors each have a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes. The second set of transistors each have a drain, source, and gate, wherein the source is coupled to a write voltage source, the gate is coupled to a sensing circuit, and the drain is coupled to one of the pixel electrodes. The invention allows the display state to be quickly altered with a stylus configured to actuate the sensing circuit. For example, the sensing circuit can include a magnetoresistor and the stylus can include a magnet. Alternatively, the sensing circuit can include a photoresistor and the stylus can include a light source. In embodiments using photoresistors, the writeable display medium may also include an optical filter. The stylus may be capable of independently interacting with the digitizing layer, or it the stylus may have additional circuitry to interact with the digitizing layer.

[Para 10] Often the writeable display medium will include a power source operatively coupled to the data driver, scan driver, and write voltage source. The writeable display medium may also be coupled to memory that can be used to receive position information from the digitizing layer and to send the position information to the display driver. The writeable display medium is useable with digitizing layers, generally, so digitizing layers using either electromagnetic or capacitive sensing can be used with the invention. The position information recorded by the digitizer can be written to memory whereby the position information can be the basis for a global update of the written image and also be sent (via electronic format) to a file or another device, such as a phone, digital whiteboard, computer, secondary display, etc.

[Para 11] In another aspect, the writeable display medium includes a light-transmissive front electrode, an array of pixel electrodes, an electrophoretic medium comprising charged particles that move in the presence of an electric field sandwiched between the light-transmissive front electrode and the array of pixel electrodes, a plurality of transistors, a plurality of rectifier circuits, a plurality of inductive coils, and a digitizing layer configured to locate a touch on the writeable display medium. Each transistor has a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes. Each rectifier circuit is operatively coupled to a pixel electrode, and each rectifier circuit is associated with an inductive coil. The invention allows the display state to be quickly altered with a stylus configured to induce a current in an inductive coil. The rectifier circuit will often include a full bridge diode, which will facilitate charging the pixel electrode with alternating currents created in the inductive coil. In some embodiments, the stylus will include an electromagnet.

[Para 12] In another aspect, the writeable display medium includes a light-transmissive front electrode, an array of pixel electrodes, an electrophoretic medium comprising charged particles that move in the presence of an electric field sandwiched between the light-transmissive front electrode and the array of pixel electrodes, a plurality of transistors, a plurality of Hall-Effect switches operatively coupled between a write voltage source and one of the pixel electrodes, and a digitizing layer configured to locate a touch on the writeable display medium. Each transistor has a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes. The invention allows the display state to be quickly altered with a stylus configured to switch the Hall-Effect switch, which will facilitate charging the pixel electrode from the write voltage source. In some embodiments, the stylus will include an electromagnet.

[Para 13] In another aspect, the writeable display medium includes a light-transmissive front electrode, an array of pixel electrodes, an electrophoretic medium comprising charged particles that move in the presence of an electric field sandwiched between the light-transmissive front electrode and the array of pixel electrodes, a first set of transistors, and a second set of transistors. For the first set of transistors, each transistor has a drain, source, and gate, wherein the source is coupled to a global reset voltage source, the gate is coupled to a global reset gate voltage source, and the drain is coupled to one of the pixel electrodes. For the second set of transistors, each transistor has a drain, source, and gate, wherein the source is coupled to a write voltage source, the gate is coupled to a sensing circuit, and the drain is coupled to one of the pixel electrodes. In this aspect the writeable display does not include a digitizing layer. The invention allows the display state to be quickly altered with a stylus configured to actuate the sensing circuit. For example, the sensing circuit can include a magnetoresistor and the stylus can include a magnet. Alternatively, the sensing circuit can include a photoresistor and the stylus includes a light source. In embodiments using photoresistors, the writeable display medium may also include an optical filter. Such a writeable display is inexpensive to fabricate, and useful for general notetaking, sketching, and relaying messages.

[Para 14] The invention additionally includes writeable systems including one of the above-described writeable display media and a stylus that is configured to switch the state of the electrophoretic display by, e.g., interacting with the sensing circuit, inductive coil, or the Hall-Effect switch. The stylus may include a magnet, for example, an electromagnet or a rare earth magnet. In some embodiments, the stylus might include a light source such as a diode laser or a light emitting diode (LED). In embodiments where the writeable display medium includes a digitizing layer, the system may be configured to record the position of the stylus (i.e., pen stroke) and display the pen stroke on the electrophoretic display after clearing the display. The resulting writeable system thus provides immediate feedback resembling writing, while recording the pen strokes electronically.

BRIEF DESCRIPTION OF DRAWINGS

[Para 15] FIG. 1 is a general depiction of an electrophoretic medium, suitable for use in the invention;

[Para 16] FIG. 2 is a general depiction of a thin film transistor (TFT) array, suitable for use in the invention;

[Para 17] FIG. 3 depicts a writeable display medium of the invention;

[Para 18] FIG. 4 illustrates writing to a writeable display medium of the invention with a stylus;

[Para 19] FIG. 5 illustrates an embodiment of an inductive coil and rectifier circuit for use with a writeable display medium;

[Para 20] FIG. 6 illustrates an embodiment of an inductive coil and rectifier circuit for use with a writeable display medium;

[Para 21] FIG. 7 illustrates an embodiment of a sensing circuit for use with a writeable display medium;

[Para 22] FIG. 8 illustrates an embodiment of a Hall-Effect switch circuit for use with a writeable display medium;

[Para 23] FIG. 9 illustrates an embodiment of a method for writing to writeable display medium including a sensing circuit;

[Para 24] FIG. 10 illustrates an embodiment of a method for writing to writeable display medium including a Hall-Effect switch;

[Para 25] FIG. 11 illustrates an embodiment of a sensing circuit for use with a writeable display medium;

[Para 26] FIG. 12 illustrates an embodiment of a method for writing to writeable display medium including a sensing circuit;

[Para 27] FIG. 13 illustrates a stylus including an electromagnet that may be used to actuate a writeable display medium including an inductive coil, a sensing circuit, or a Hall-Effect switch;

[Para 28] FIG. 14 illustrates a stylus including a light source that may be used to actuate a writeable display medium including a photosensor.

DETAILED DESCRIPTION

[Para 29] As indicated above, the present invention provides a writeable display medium with faster image updates. The invention is made possible by incorporating various sensing elements into the backplane of the writeable display medium so that the sensing elements can cause the associated pixels to update immediately in contrast to state-of-the art writeable displays that rely on a feedback loop between a digitizing layer and a display driver that controls the output of a display. As a stylus is moved over the display, a signal emitted from the stylus (e.g., an electromagnetic field) will change the state of a transistor associated with a pixel, resulting in a nearly instantaneous state change in the display (i.e., white to black).

Accordingly, writeable display media of the invention will not suffer from the writing latency that is experienced with most writeable tablet systems. In some embodiments the writeable display medium additionally includes a digitizing layer, that at the same time the stylus is causing a change in the display state, a separate electromagnetic (or capacitive) digitizing system is recording the position of the stylus so that the writing can be recorded electronically and transformed into an electronic image file. In other embodiments, the writeable display medium will not include a digitizing layer.

[Para 30] The invention is intended to be used with electrophoretic media of the type developed by E Ink Corporation (Billerica, MA) and described in the patents and patent publications listed below. Encapsulated electrophoretic media comprise numerous small capsules, each of which itself comprises an internal phase containing electrophoretically-mobile particles in a fluid medium, and a capsule wall surrounding the internal phase. Typically, the capsules are themselves held within a polymeric binder to form a coherent layer positioned between two electrodes. In a microcell electrophoretic display, the charged particles and the fluid are not encapsulated within microcapsules but instead are retained within a plurality of cavities formed within a carrier medium, typically a polymeric film. The technologies described in these patents and applications include: (a) Electrophoretic particles, fluids and fluid additives; see for example U.S. Patents Nos. 7,002,728 and 7,679,814; (b)

Capsules, binders and encapsulation processes; see for example U.S. Patents Nos. 6,922,276 and 7,411,719; (c) Microcell structures, wall materials, and methods of forming microcells; see for example United States Patents Nos. 7,072,095 and 9,279,906; (d)

Methods for filling and sealing microcells; see for example United States Patents Nos. 7,144,942 and 7,715,088; (e) Films and sub-assemblies containing electro-optic materials; see for example U.S. Patents Nos. 6,982,178 and 7,839,564; (f) Backplanes, adhesive layers and other auxiliary layers and methods used in displays; see for example U.S. Patents Nos. D485,294; 6,124,851; 6,130,773; 6,177,921; 6,232,950; 6,252,564; 6,312,304; 6,312,971; 6,376,828; 6,392,786; 6,413,790; 6,422,687; 6,445,374; 6,480,182; 6,498,114; 6,506,438; 6,518,949; 6,521,489; 6,535,197; 6,545,291; 6,639,578; 6,657,772; 6,664,944; 6,680,725; 6,683,333; 6,724,519; 6,750,473; 6,816,147; 6,819,471; 6,825,068; 6,831,769; 6,842,167; 6,842,279; 6,842,657; 6,865,010; 6,873,452; 6,909,532; 6,967,640; 6,980,196; 7,012,735; 7,030,412; 7,075,703; 7,106,296; 7,110,163; 7,116,318; 7,148,128; 7,167,155; 7,173,752; 7,176,880; 7,190,008; 7,206,119; 7,223,672; 7,230,751; 7,256,766; 7,259,744; 7,280,094; 7,301,693; 7,304,780; 7,327,511; 7,347,957; 7,349,148; 7,352,353; 7,365,394;

7,365,733; 7,382,363; 7,388,572; 7,401,758; 7,442,587; 7,492,497; 7,535,624; 7,551,346; 7,554,712; 7,583,427; 7,598,173; 7,605,799; 7,636,191; 7,649,674; 7,667,886; 7,672,040; 7,688,497; 7,733,335; 7,785,988; 7,830,592; 7,843,626; 7,859,637; 7,880,958; 7,893,435; 7,898,717; 7,905,977; 7,957,053; 7,986,450; 8,009,344; 8,027,081; 8,049,947; 8,072,675; 8,077,141; 8,089,453; 8,120,836; 8,159,636; 8,208,193; 8,237,892; 8,238,021; 8,362,488; 8,373,211; 8,389,381; 8,395,836; 8,437,069; 8,441,414; 8,456,589; 8,498,042; 8,514,168; 8,547,628; 8,576,162; 8,610,988; 8,714,780; 8,728,266; 8,743,077; 8,754,859; 8,797,258; 8,797,633; 8,797,636; 8,830,560; 8,891,155; 8,969,886; 9,147,364; 9,025,234; 9,025,238; 9,030,374; 9,140,952; 9,152,003; 9,152,004; 9,201,279; 9,223,164; 9,285,648; and 9,310,661; and U.S. Patent Applications Publication Nos. 2002/0060321; 2004/0008179; 2004/0085619; 2004/0105036; 2004/0112525; 2005/0122306; 2005/0122563; 2006/0215106; 2006/0255322; 2007/0052757; 2007/0097489; 2007/0109219; 2008/0061300; 2008/0149271; 2009/0122389; 2009/0315044; 2010/0177396; 2011/0140744; 2011/0187683; 2011/0187689; 2011/0292319; 2013/0250397; 2013/0278900; 2014/0078024; 2014/0139501; 2014/0192000; 2014/0210701; 2014/0300837; 2014/0368753; 2014/0376164; 2015/0171112; 2015/0205178; 2015/0226986; 2015/0227018; 2015/0228666; 2015/0261057; 2015/0356927; 2015/0378235; 2016/077375; 2016/0103380; and 2016/0187759; and International Application Publication No. WO 00/38000; European Patents Nos. 1,099,207 B1 and 1,145,072 B1; (g) Color formation and color adjustment; see for example U.S. Patents Nos. 7,075,502 and 7,839,564; and (h)

Methods for driving displays; see for example U.S. Patents Nos. 7,012,600 and 7,453,445. All of the patents and patent applications listed herein are incorporated by reference in their entirety.

[Para 31] Many of the aforementioned patents and applications recognize that the walls surrounding the discrete microcapsules in an encapsulated electrophoretic medium could be replaced by a continuous phase, thus producing a so-called polymer-dispersed electrophoretic display, in which the electrophoretic medium comprises a plurality of discrete droplets of an electrophoretic fluid and a continuous phase of a polymeric material, and that the discrete droplets of electrophoretic fluid within such a polymer-dispersed electrophoretic display may be regarded as capsules or microcapsules even though no discrete capsule membrane is associated with each individual droplet; see for example, the aforementioned U.S. Patent No. 6,866,760. Accordingly, for purposes of the present application, such polymer-dispersed electrophoretic media are regarded as sub-species of encapsulated electrophoretic media.

[Para 32] An encapsulated electrophoretic display typically does not suffer from the clustering and settling failure mode of traditional electrophoretic devices and provides further advantages, such as the ability to print or coat the display on a wide variety of flexible and rigid substrates. (Use of the word "printing" is intended to include all forms of printing and coating, including, but without limitation: pre-metered coatings such as patch die coating, slot or extrusion coating, slide or cascade coating, curtain coating; roll coating such as knife over roll coating, forward and reverse roll coating; gravure coating; dip coating; spray coating; meniscus coating; spin coating; brush coating; air knife coating; silk screen printing processes; electrostatic printing processes; thermal printing processes; ink jet printing processes; electrophoretic deposition (See U.S. Patent No. 7,339,715); and other similar techniques.) Thus, the resulting display can be flexible. Further, because the display medium can be printed (using a variety of methods), the display itself can be made inexpensively.

[Para 33] While the invention is primarily directed to electrophoretic media of the type described above and in the listed patents and patent applications, other types of electro-optic materials may also be used in the present invention. The alternative electro-optic media are typically reflective in nature, that is, they rely on ambient lighting for illumination instead of a backlight source, as found in an emissive LCD display. Alternative electro-optic media include rotating bichromal member type media as described, for example, in U.S. Patents Nos. 5,808,783; 5,777,782; 5,760,761; 6,054,071 6,055,091; 6,097,531; 6,128,124; 6,137,467; and 6,147,791. Such a display uses a large number of small bodies (typically spherical or cylindrical) which have two or more sections with differing optical characteristics, and an internal dipole. These bodies are suspended within liquid-filled vacuoles within a matrix, the vacuoles being filled with liquid so that the bodies are free to rotate. The appearance of the display is changed by applying an electric field thereto, thus rotating the bodies to various positions and varying which of the sections of the bodies is seen through a viewing surface. This type of electro-optic medium is typically bistable.

[Para 34] Another alternative electro-optic display medium is electrochromic, for example an electrochromic medium in the form of a nanochromic film comprising an electrode formed at least in part from a semi-conducting metal oxide and a plurality of dye molecules capable of reversible color change attached to the electrode; see, for example O'Regan, B., et al., *Nature* 1991, 353, 737; and Wood, D., *Information Display*, 18(3), 24 (March 2002). See also Bach, U., et al., *Adv. Mater.*, 2002, 14(11), 845. Nanochromic films of this type are also described,

for example, in U.S. Patents Nos. 6,301,038; 6,870,657; and 6,950,220. This type of medium is also typically bistable.

[Para 35] Another type of electro-optic display is an electro-wetting display developed by Philips and described in Hayes, R.A., et al., "Video-Speed Electronic Paper Based on Electrowetting", *Nature*, 425, 383-385 (2003). It is shown in U.S. Patent No. 7,420,549 that such electro-wetting displays can be made bistable.

[Para 36] An exemplary electrophoretic display (EPID) is shown in FIG. 1. Display 100 normally comprises a layer of electrophoretic material 130 and at least two other layers 110 and 120 disposed on opposed sides of the electrophoretic material 130, at least one of these two layers being an electrode layer, e.g., as depicted by layer 110 in FIG. 1. The front electrode 110 may represent the viewing side of the display 100, in which case the front electrode 110 may be a transparent conductor, such as Indium Tin Oxide (ITO) (which in some cases may be deposited onto a transparent substrate, such as polyethylene terephthalate (PET)). Such EPIDs also include, as illustrated in FIG. 1, a backplane 150, comprising a plurality of driving electrodes 153 and a substrate layer 157. The layer of electrophoretic material 130 may include microcapsules 133, holding electrophoretic pigment particles 135 and 137 and a solvent, with the microcapsules 133 dispersed in a polymeric binder 139. Nonetheless, it is understood that the electrophoretic medium (particles 135 and 137 and solvent) may be enclosed in microcells (microcups) or distributed in a polymer without a surrounding microcapsule (e.g., PDEPID design described above). Typically, the pigment particles 137 and 135 are controlled (displaced) with an electric field produced between the front electrode 110 and the pixel electrodes 153. In many conventional EPIDs the electrical driving waveforms are transmitted to the pixel electrodes 153 via conductive traces (not shown) that are coupled to thin-film transistors (TFTs) that allow the pixel electrodes to be addressed in a row-column addressing scheme. In some embodiments, the front electrode 110 is merely grounded and the image driven by providing positive and negative potentials to the pixel electrodes 153, which are individually addressable. In other embodiments, a potential may also be applied to the front electrode 110 to provide a greater variation in the fields that can be provided between the front electrode and the pixel electrodes 153.

[Para 37] In many embodiments, the TFT array forms an active matrix for image driving, as shown in FIG. 2. For example, each pixel electrode (153 in FIG. 1) is coupled to a thin-film transistor 210 patterned into an array, and connected to elongate row electrodes 220 and elongate column electrodes 230, running at right angles to the row electrodes 220. In some

embodiments, one electrode layer has the form of a single continuous electrode and the other electrode layer is patterned into a matrix of pixel electrodes, each of which defines one pixel of the display. As shown in FIG. 2, the data driver 250 is connected to the column electrodes 230 and provides source voltage to all TFTs in a column that are to be addressed. The scanning driver 240 is connected to the row electrodes 220 to provide a bias voltage that will open (or close) the gates of each TFT along the row. The gate scanning rate is typically ~ 60-100 Hz. Taking the gate-source voltage positive allows the source voltage to be shorted to the drain. Taking the gate negative with respect to the source causes the drain source currents to drop and the drain effectively floats. Because the scan driver acts in a sequential fashion, there is typically some measurable delay in update time between the top and bottom row electrodes. It is understood that the assignment of "row" and "column" electrodes is somewhat arbitrary and that a TFT array could be fabricated with the roles of the row and column electrodes interchanged.

[Para 38] While EPID media are described as "black/white," they are typically driven to a plurality of different states between black and white to achieve various tones or "greyscale." Additionally, a given pixel may be driven between first and second grayscale states (which include the endpoints of white and black) by driving the pixel through a transition from an initial gray level to a final gray level (which may or may not be different from the initial gray level). The term "waveform" will be used to denote the entire voltage against time curve used to effect the transition from one specific initial gray level to a specific final gray level. Typically, such a waveform will comprise a plurality of waveform elements; where these elements are essentially rectangular (i.e., where a given element comprises application of a constant voltage for a period of time); the elements may be called "pulses" or "drive pulses." The term "drive scheme" denotes a set of waveforms sufficient to effect all possible transitions between gray levels for a specific display. A display may make use of more than one drive scheme; for example, the aforementioned U.S. Patent No. 7,012,600 teaches that a drive scheme may need to be modified depending upon parameters such as the temperature of the display or the time for which it has been in operation during its lifetime, and thus a display may be provided with a plurality of different drive schemes to be used at differing temperature etc. A set of drive schemes used in this manner may be referred to as "a set of related drive schemes." It is also possible to use more than one drive scheme simultaneously in different areas of the same display, and a set of drive schemes used in this manner may be referred to as "a set of simultaneous drive schemes."

[Para 39] The manufacture of a three-layer electrophoretic display normally involves at least one lamination operation. For example, in several of the aforementioned patents and applications, there is described a process for manufacturing an encapsulated electrophoretic display in which an encapsulated electrophoretic medium comprising capsules in a binder is coated on to a flexible substrate comprising indium-tin-oxide (ITO) or a similar conductive coating (which acts as one electrode of the final display) on a plastic film, the capsules/binder coating being dried to form a coherent layer of the electrophoretic medium firmly adhered to the substrate. Separately, a backplane (see FIG. 1), containing an array of pixel electrodes and an appropriate arrangement of conductors to connect the pixel electrodes to drive circuitry (see FIG. 2), is prepared. To form the final display, the substrate having the capsule/binder layer thereon is laminated to the backplane using a lamination adhesive. In embodiments where it is desired to have additional layers, such as a digitizing sensor layer (Wacom Technologies, Portland, OR), those layers may be inserted between the electrode layer and the substrate, or an additional substrate may be added between the electrode layer and the additional layer. In one preferred embodiment, the backplane is itself flexible and is prepared by printing the pixel electrodes and conductors on a plastic film or other flexible substrate. The lamination technique for mass production of displays by this process is roll lamination using a lamination adhesive.

[Para 40] During the lamination process, one or more lamination adhesives are used to provide mechanical continuity to the stack of components and also to assure that the layers are relatively planar with respect to each other. In some instances commercial lamination adhesives (lamad) can be used, however, manufacturers of lamination adhesives (naturally) devote considerable effort to ensuring that properties, such as strength of adhesion and lamination temperatures, while ignoring the electrical properties of the lamination adhesive. Accordingly, manufactures of electrophoretic displays typically modify commercial adhesives to achieve the needed volume resistivity. Methods for modifying the electrical properties of commercial adhesives are described in several of the before-mentioned patents. The methods typically involve adding charged copolymers, charged moieties, or conductive particles. Because electrophoretic manufacturers are experienced in doping lamination adhesive layers, it is expected that adding additional components to tune the optical characteristics, e.g., to make a long pass filtering lamination adhesive layer to block certain wavelengths of light, will be straightforward. For example, to reduce transmission of wavelengths shorter than 550 nm, a lamination adhesive can be doped with anthraquinone compounds, such as 1-methylamino anthraquinone. It is also possible to incorporate a mixture of additives to tune the low pass

filter such that the combination of the absorption spectrum of the TFT materials and the absorption spectrum of the additives result in a narrow window of optical wavelengths, substantially overlapping with the output of the light emitting elements incorporated into the stylus. The efficacy of a filter is often measured in terms of optical density (O.D.) where optical density is defined as the base-ten logarithm of the ratio of the radiation that falls on a material over the radiation that is transmitted through the material. The low pass filters of the invention typically have an optical density of 0.4 or greater from 400 to 550 nm, for example and O.D. of 1 or greater from 400 to 550 nm, for example an O.D. of 2 or greater from 400 to 550 nm.

[Para 41] The generalized working of a writeable display medium 300 is shown in FIG. 3. Like FIG. 1, writeable display medium 300 includes an electrophoretic material 330 and at least two other layers 310 and 320 disposed on opposed sides of the electrophoretic material 330, at least one of these two layers being an electrode layer, e.g., as depicted by layer 310. The front electrode 310 may be a transparent conductor, such as Indium Tin Oxide (ITO). The writeable display 300 also includes, a backplane, comprising a plurality of pixel electrodes 360 that are controlled by a plurality of transistors 350, which are often thin film transistors (TFTs). In the writeable display media of the invention, a sensor 355 is included, which may be an inductive coil, a magnetoresistor, a photosensor (photoresistor, photodiode, etc.), or a Hall-Effect switch, among other sensors, as described below. In some embodiments, especially those employing a photosensor, the writeable display medium 300 includes a long-pass optical filter 340. In alternative embodiments, the absorptive or reflective materials providing the wavelength selection for the long pass optical filter may be added directly to the lamination adhesive (part of 320) to create a long pass lamination adhesive. In embodiments that do not use light sensing a long-pass optical filter 340 is not included in the writeable display medium 300.

[Para 42] In some embodiments a digitizing layer 375 can be added to the assembly to track the position of the stylus 380. In an embodiment, the stylus 380 includes an inductive coil and the motion of the stylus interacts with the electromagnetic fields produced by the digitizing layer 375, allowing the digitizing layer to determine a position in the X-Y plane defined by the digitizing layer. The digitizing layer 375 is typically coupled to memory so that the movement of the stylus 380 can be recorded in an electronic file, whereby the electronic file may be printed, converted into a .pdf document, e-mailed, etc. Furthermore, the electronic file may be the basis for a global update to the image, e.g., via the display driver, after some amount of writing has been completed.

[Para 43] Writeable display media of the invention may be incorporated into a writeable system 400, such as shown in FIG. 4. The writeable system includes a writeable display medium 420 (discussed above with respect to FIG. 3), and a stylus 480 that emits an electromagnetic signal (magnetic field, electric field, or light) and that is configured to interact with the sensors that actuate the pixel electrodes. As shown in FIG. 4, the writeable system 400 resembles a conventional electronic writeable tablet, including a housing 410 and interfacial controls 440 which can be real or virtual. That is, the interfacial controls 440 can be separate buttons, dials, etc., or the interfacial controls 440 can be generated by the operating software and displayed/interfaced through the display.

[Para 44] As a user “writes” with the stylus 480 on the writeable medium 420, the electromagnetic signal emitted from the tip of the stylus 480 will pass through the light-transmissive front electrode 310 and the electrophoretic medium 330 and interact with the sensing circuit 355, which results in an increase (or decrease depending upon need) of the electrical potential on the pixel electrode 360, whereupon the electrophoretic medium 330 will begin to switch (e.g., from white to black), thereby creating a graphic 490 on the display where the stylus 480 has been. In embodiments having a separate writing voltage supply (described below), the resultant graphic 490 will appear on the writeable medium 420 in about 20 ms because, unlike prior art tablets, there is no signal processing required to create a graphic representing the movement of the stylus 480. In other words, the stylus is directly causing the pixel electrodes 360 to go to a high or low state, thus the “latency” is merely the time that it takes for the electrophoretic particles to respond to the new electrical potential of the pixel electrodes 360. In other embodiments, the sensor will begin the process of charging the pixel electrode, however the “final” electrical potential will be delivered via a TFT at the control of the scanning and data drivers, based upon the sensed position of the stylus (e.g., via the digitizing layer). This configuration provides some amount of instant feedback to the user, however does not require a separate voltage driver (different from the data driver) to push (pull) the pixel electrode to the new state.

[Para 45] An embodiment of a sensing circuit 500 for use in a writeable display medium is illustrated in FIG. 5. The sensing circuit 500 includes an inductive coil 530 that is coupled to a rectifier 520 that feeds to a pixel electrode. (The pixel electrode, the front plane electrode, and the electrophoretic medium are treated generally as a capacitor 540.) As a stylus emitting an electromagnetic signal is moved in the vicinity of the coil 530, a voltage is produced that will charge the capacitor 540 resulting in a state change of the electrophoretic display (e.g., from

white to black). In addition to be actuated by the stylus, the capacitor 540 can also be addressed by the thin film transistor (TFT) 510 that is associated with each pixel electrode. This allows the pixel electrode to be addressed by the stylus or the display driver via the scanning and data drivers. Accordingly, the pixels can be written with a stylus, cleared, and then rewritten via the display driver as discussed below. The TFT 510 also allows voltage from the capacitor 540 that is produced via interaction between the stylus and the coil 530 to be drained from the capacitor so that the state can be cleared (e.g., a global update). A variety of rectifier components are suitable for use with the sensing circuit 500 of FIG. 5, such as full bridge rectifiers, which are available from Digi-Key (Thief River Falls, MN). In some embodiments, the diode components for the rectifier can be fabricated directly on the TFT backplane during fabrication of the TFTs.

[Para 46] The principles of the sensing circuit 500 of FIG. 5 can be expanded to cause multiple pixel electrodes to switch or pre-charge at the same time. As shown in FIG. 6, a single rectifier 620 can be coupled to a single coil 630 to pre-charge or actuate a plurality of pixel electrodes (shown as 640A-D). The coil 630 may be looped or undulating depending upon the application. When a stylus emitting an electromagnetic field is moved near the coil 630, a direct current will be produced through the rectifiers 620, thereby charging the pixel electrodes 640A-D. Sensing circuit 600 has the advantage of requiring fewer rectifiers while allowing a larger loop of coil than the sensing circuit 500 of FIG. 5. In most applications, graphics created with a stylus will be more than one pixel-width wide, so the difference in response between FIG. 5 and FIG. 6 will be negligible. It is to be understood that the number of pixel electrodes receiving charge from rectifier in FIG. 6 is somewhat arbitrary because two or more pixel electrodes 640 can be coupled to the rectifier 620. That is, in some embodiments, the rectifier 620 will be coupled to three or more pixel electrodes, e.g., four pixel electrodes, e.g., five pixel electrodes, e.g., six pixel electrodes, e.g., seven pixel electrodes, e.g., eight pixel electrodes, e.g., nine pixel electrodes.

[Para 47] In contrast to FIGS. 5 and 6, which use passive charging elements for writeable display media, FIGS. 7 and 8 use active switching components, such as transistors and Hall-Effect switches. FIGURE 7 illustrates an embodiment of a sensing circuit coupled to a pixel electrode for use in a writeable display medium. By using a second TFT ("PEN_TFT") it is possible to actively switch a pixel electrode as soon as a stylus is sensed in order to provide instant visual feedback to a user. As shown in FIG. 7, the PEN_TFT regulates a write voltage that is coupled to the source input of the PEN_TFT. A Buffer is connected to V_ON via a

sense resistor R_PEN and to V_OFF via a second sense resistor R_dis. The sense resistors may be magnetoresistors or photoresistors, which drastically decrease (or increase) resistance in the presence of the appropriate electromagnetic signal. The Buffer is powered from the V_ON and V_OFF lines, and reduces the noise that may result from, e.g., spurious magnetic fields.

[Para 48] A stylus emitting an electromagnetic signal causes the resistance in R_PEN to drop while R_dis achieves greater resistance, thus pulling the gate of PEN_TFT open with V_ON and allowing the V_WRITE voltage to charge the pixel electrode, thereby switching the state of the electrophoretic medium (“INK” in FIG. 7). After the stylus is removed from proximity to the sensing circuit, the resistance in R_PEN returns, while the resistance of R_dis drops, and the gate of PEN_TFT is returned to its closed state. This will ensure that SCAN_TFT will be able to dominate the addressing of the device when the stylus is away from the pixel. Because the stylus position is recorded via the underlying sensor layer, any subsequent scan will update the display to reflect the new position of the stylus.

[Para 49] The invention is not limited to thin film transistors (TFTs) however, as other switching transistors or sensing switches can be used, for example, a Hall-Effect switch of FIG. 8. Nonetheless, it may be more cost effective to fabricate a second set of TFTs using the same lithographic processes and at the same time that a first set of TFTs (for controlling the pixel electrodes via data and scan lines) are fabricated. The magnetoresistors or photoresistors may also be fabricated directly into the backplane during production, for example, using magnetron sputter deposition, or they may be discrete elements such as are available commercially from suppliers. For example, a variety of magnetoresistors are available from Digi-Key, while a variety of photoresistors are available from Token Electronics (Taipei, Taiwan).

[Para 50] The sensing circuit shown in FIG. 7 allows a global erase either through the SCAN_TFT or by reversing the sign of the V_WRITE with additional components not shown in FIG. 7. It is also possible to enable the stylus to erase (e.g., remove black pixels) by reversing the sign of V_WRITE and using the stylus to activate PEN_TFT, as described above. Additionally, using the circuit of FIG. 7 it is possible to write the reverse colors (e.g., white on black) by flipping the polarity of V_WRITE and using the technique described above after the pixels have been set to the dark state via the data and scan drivers.

[Para 51] As an alternative to sensing resistors and TFTs, similar functionality can be achieved with the circuit shown in FIG. 8, wherein a Hall-Effect Switch 820 is used to open and close V_write to allow the pixel electrode 840 to be charged, thereby causing the

electrophoretic medium to switch states. The overall functioning of the Hall-Effect Switch 820 is similar to the sensing circuit 720 of FIG. 7 because the Hall-Effect Switch includes a transistor whose gate is used to control the voltage on the drain. Suitable Hall-Effect Switches can be obtained from Honeywell Sensing and Productivity Solutions, e.g., via Digi-Key. In some applications it may be advantageous to integrate the Hall-Effect switch into the backplane during fabrication.

[Para 52] A method of writing to a device including a writeable display medium having a sensing circuit of FIG. 7 is shown in FIG. 9. A user begins by initiating the writing mode, which may be done with a physical switch or by touching an icon on the screen. Once in writing mode, the source of V_Write is energized or otherwise made available to the secondary TFT, so that a pixel electrode can be energized with V_Write. The user then interacts with the device by moving a stylus that emits an electromagnetic signal over the display medium. The electromagnetic signal may be entirely electric, entirely magnetic, or electromagnetic (i.e., light). The electromagnetic signal interacts with R_PEN, as described above, to cause PEN_TFT to open, thereby allowing the associated pixel electrode to become charged. Once the pixel electrode is charged, the electrophoretic medium will switch states, e.g., from white to black. Because the pixel is driven directly with V_Write, there will be almost no latency during the writing process, except for the negligible time that the electrophoretic particles take to traverse the thickness of the internal phase.

[Para 53] As described in FIG. 10, a method for of writing to a device including a writeable display medium having a sensing circuit of FIG. 8 is quite similar to the method of FIG. 9. A user begins by initiating the writing mode, which may be done with a physical switch or by touching an icon on the screen. Once in writing mode, the source of V_Write is energized or otherwise made available to the Hall-Effect Switch, so that a pixel electrode can be energized with V_Write. The user then interacts with the device by moving a stylus that provides a magnetic field over the display medium. The magnetic field interacts with the Hall-Effect Switch thereby allowing the associated pixel electrode to become charged. Once the pixel electrode is charged, the electrophoretic medium will switch states, e.g., from white to black. Because the pixel is driven directly with V_Write, there will be almost no latency during the writing process, except for the negligible time that the electrophoretic particles take to traverse the thickness of the internal phase.

[Para 54] A further embodiment of a sensing circuit for a writeable display medium is shown in FIG. 11. However, unlike FIGS. 7 and 8, the sensing circuit of FIG. 11 is not used with a

scan driver and data driver. Rather each pixel electrode in the active matrix array is coupled to both a global_reset TFT 1110 and a PEN_TFT 1120, wherein the global_reset TFT 1110 is coupled to a V_global_reset and a Vgate_global_reset, and the PEN_TFT 1120 is coupled to V_pen_write_erase and the gate is coupled through a Buffer to R_PEN and R_dis2, similar to FIG. 7. The resulting circuit allows a pixel to be “wiped” with the V_global_reset and then written with a stylus that interacts with R_PEN to open the gate of PEN_TFT allowing the pixel 1140 to be charged with V_pen_write_erase. The sensing circuit of FIG. 11 is used in a device that does not include decoding logic (scan and gate drivers) nor a display driver (controller). Accordingly, a writeable display device can be produce with much less expense. Additionally, if the TFTs are constructed from suitable organic materials, it is possible to produce a writeable device that is quite flexible, requires little power, is viewable in sunlight, and is completely re-writeable.

[Para 55] A method for writing to a writeable medium including the circuit of FIG. 11 is described in FIG. 12. One the writing mode is enabled, i.e., by powering on the device, it is possible to clear the display with a global reset to prepare the medium for writing with a suitable stylus. The process begins when Vgate_global_reset is set to V_ON, which will open the global_reset transistor 1110. V V_global_reset is set to either V_white or V_black, thereby defining the desired starting state (uniform black or white). Next, the V_global_reset is set to V_OFF and the pixel state can only change if the sensing element (R_PEN) is activated, e.g., with a magnetic field from a stylus. A user may then write on the display medium by interacting with the sensing circuit. When the stylus passes over the R_PEN sense resistor, R_PEN goes into a low resistance state, PEN_TFT is turned on and V_WRITE is applied to the pixel electrode 1140. Once the pixel electrode has achieved sufficient voltage, the electrophoretic medium will switch states, providing feedback to the user. After the stylus has passed over the pixel, R_PEN goes back to a high resistance state and the sense element R_dis2 turns off PEN_TFT. While not shown in FIGS. 11 and 12, a device including the sensing circuit of FIG. 11 can be used in a white on black mode by simply reversing the polarity of V_global_reset and V_pen_write_erase, or the previously “written” pixels can be erased by reversing the polarity of V_pen_write_erase.

[Para 56] In many embodiments, the writeable display medium will be complemented by a conventional electromagnetic or capacitive digitizer that will track the position of the stylus. This configuration will allow the “writing” to be recorded at the same time the writeable display 420 is updated with the graphic 490. FIGURE 13 shows a cut-away of the tip of a stylus 1300

having an electromagnet. The magnetic field 1360 produced by the electromagnet can interact with a sensing circuit as shown above, while at the same time interacting with a digitizing layer to allow the digitizer to track the position of the stylus 1300. The recorded position of the stylus can then be converted to a digital file or used to update the display, as discussed previously. The stylus 1300 comprises a body 1310 which is held by the user and which houses the electrical components needed for functionality. The electromagnet 1320 includes a ferromagnetic element and a coil 1324. The electromagnet 1320 is powered by a power supply 1340 that may include, for example, a battery. In the embodiments shown in FIG. 13, the stylus tip additionally includes a spindle 1350 that is spring-loaded and coupled to a switch in the power supply 1340 so that the electromagnet is energized only when the stylus 1300 tip is being pushed against a surface. A simple alternative to the electromagnet 1320 of FIG. 13 is to employ a rare earth magnet, such as a neodymium iron boron magnet or samarium cobalt magnet. In some embodiments that use rare earth magnets, the stylus 1300 does not include a power supply 1340.

[Para 57] An alternate stylus construction, for use with a photoresistor, e.g., in sensing circuit 720, is shown in FIG. 14. In FIG. 14, light 1428 is channeled through an optical fiber 1423 that travels within the inductive coil 1434, thereby allowing the light 1428 to exit the stylus 1400 at the tip. The light source 1420 may be an LED or a diode laser. Other laser sources may be used, however, the size and the shape of the stylus 1400 may vary with requirements for an optical cavity and lasing medium. The inductive coil 1434 is operatively coupled to electronics 1430 that permit the stylus to interact with a digitizing layer via electromagnetic signals 1438 so that the stylus movement can be recorded.

[Para 58] It is understood that other designs that allow the stylus to interact with a sensing circuit and at the same time have the movements digitized could be suitable. For example, a stylus having an electromagnet could additionally include a capacitive touch element in the tip, and the writeable device could use a capacitive touch screen to sense the position of the stylus during the “writing.” A stylus to be used with the invention may include other additional elements, such as a power supply (e.g., a battery, e.g., a rechargeable battery), BLUETOOTH® communication, a button, or an eraser at the end of the stylus opposing the tip. For example, the eraser at the opposed end of the stylus could provide an opposite magnetic polarity to that of the writing tip.

[Para 59] In advanced designs, the writing modes are more complex. Algorithms for displaying and recording the writing can account for other factors beyond the position of the

stylus. For example advanced algorithms may account for the user's hand position, the ambient lighting conditions, and the existence of previous images on the display. In some embodiments, it will be beneficial to reduce the number of sensing circuits that are activated to a number smaller than the entirety of the array of pixel electrodes. That is, during the writing only the sensing circuits in the vicinity of the stylus will be available to receive a signal and alter the state of the associated pixels.

Definitions

[Para 60] The term "electro-optic", as applied to a material or a display, is used herein in its conventional meaning in the imaging art to refer to a material having first and second display states differing in at least one optical property, the material being changed from its first to its second display state by application of an electric field to the material. Although the optical property is typically color perceptible to the human eye, it may be another optical property, such as optical transmission, reflectance, luminescence or, in the case of displays intended for machine reading, pseudo-color in the sense of a change in reflectance of electromagnetic wavelengths outside the visible range.

[Para 61] The term "gray state" or "gray scale" is used herein in its conventional meaning in the imaging art to refer to a state intermediate two extreme optical states of a pixel, and does not necessarily imply a black-white transition between these two extreme states. For example, several of the E Ink patents and published applications referred to below describe electrophoretic displays in which the extreme states are white and deep blue, so that an intermediate "gray state" would actually be pale blue. Indeed, as already mentioned, the change in optical state may not be a color change at all. The terms "black" and "white" may be used hereinafter to refer to the two extreme optical states of a display, and should be understood as normally including extreme optical states which are not strictly black and white, for example the aforementioned white and dark blue states. The term "monochrome" may be used hereinafter to denote a drive scheme which only drives pixels to their two extreme optical states with no intervening gray states.

[Para 62] Some electro-optic materials are solid in the sense that the materials have solid external surfaces, although the materials may, and often do, have internal liquid- or gas-filled spaces. Such displays using solid electro-optic materials may hereinafter for convenience be referred to as "solid electro-optic displays". Thus, the term "solid electro-optic displays" includes rotating bichromal member displays, encapsulated electrophoretic displays, microcell electrophoretic displays and encapsulated liquid crystal displays.

[Para 63] The terms "bistable" and "bistability" are used herein in their conventional meaning in the art to refer to displays comprising display elements having first and second display states differing in at least one optical property, and such that after any given element has been driven, by means of an addressing pulse of finite duration, to assume either its first or second display state, after the addressing pulse has terminated, that state will persist for at least several times, for example at least four times, the minimum duration of the addressing pulse required to change the state of the display element. It is shown in U.S. Patent No. 7,170,670 that some particle-based electrophoretic displays capable of gray scale are stable not only in their extreme black and white states but also in their intermediate gray states, and the same is true of some other types of electro-optic displays. This type of display is properly called "multi-stable" rather than bistable, although for convenience the term "bistable" may be used herein to cover both bistable and multi-stable displays.

[Para 64] From the foregoing, it will be seen that the present invention can provide a writeable electro-optic display medium including a sensing circuit and a stylus for causing a nearly instantaneous update of the display medium. In some embodiments the sensing circuit will allow one or more pixel electrodes to be pre-charged so that it will take less time to update an image based upon movements of a stylus that have been digitized by a digitizing layer. In other embodiments, the sensing circuit will allow individual pixel electrodes to be updated directly with a writing voltage. It will be apparent to those skilled in the art that numerous changes and modifications can be made in the specific embodiments of the invention described above without departing from the scope of the invention. Accordingly, the whole of the foregoing description is to be interpreted in an illustrative and not in a limitative sense.

CLAIMS

1. A writeable display medium comprising:
 - a light-transmissive front electrode;
 - an array of pixel electrodes;
 - an electrophoretic medium comprising charged particles that move in the presence of an electric field, the electrophoretic medium being sandwiched between the light-transmissive front electrode and the array of pixel electrodes;
 - a first set of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes;
 - a second set of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a write voltage source, the gate is coupled to a sensing circuit, and the drain is coupled to one of the pixel electrodes; and
 - a digitizing layer configured to locate a touch on the writeable display medium.
2. The writeable display medium of claim 1, further comprising a power source operatively coupled to the data driver, scan driver, and write voltage source.
3. The writeable display medium of claim 2, further comprising memory operatively coupled to the digitizing layer and the data and scan drivers, the memory configured to receive position information from the digitizing layer and to send the position information to the data and scan drivers.
4. The writeable display medium of claim 1, wherein the sensing circuit comprises a magnetoresistor or a photoresistor.
5. The writeable display medium of claim 4, wherein the sensing circuit comprises a magnetoresistor, and the magnetoresistor comprises copper, iron, or cobalt.
6. The writeable display medium of claim 1, wherein the digitizing layer uses electromagnetic sensing to determine the position of a touch.

7. The writeable display medium of claim 1, wherein the digitizing layer uses capacitive sensing to determine the position of a touch.

8. A writeable system including the writeable display medium of any of claims 1-7 and a stylus comprising an electromagnet or a rare earth magnet.

9. A writeable display medium comprising:
a light-transmissive front electrode;
an array of pixel electrodes;
an electrophoretic medium comprising charged particles that move in the presence of an electric field, the electrophoretic medium being sandwiched between the light-transmissive front electrode and the array of pixel electrodes;
a plurality of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes;
a plurality of rectifier circuits, wherein each rectifier circuit is operatively coupled to a pixel electrode;
a plurality of inductive coils, wherein each inductive coil is operatively coupled to a rectifier circuit; and
a digitizing layer configured to locate a touch on the writeable display medium.

10. The writeable display medium of claim 9, further comprising a power source operatively coupled to the data driver and scan driver.

11. The writeable display medium of claim 10, further comprising memory operatively coupled to the digitizing layer and the data and scan drivers, the memory configured to receive position information from the digitizing layer and to send the position information to the data and scan drivers.

12. The writeable display medium of claim 9, wherein the rectifier circuit comprises diodes.

13. The writeable display medium of claim 12, wherein the rectifier circuit is a full bridge diode circuit.

14. The writeable display medium of claim 9, wherein the digitizing layer uses electromagnetic sensing to determine the position of a touch.

15. The writeable display medium of claim 9, wherein the digitizing layer uses capacitive sensing to determine the position of a touch.

16. A writeable system including the writeable display medium of any of claims 9-15 and a stylus comprising an electromagnet or a rare earth magnet.

17. A writeable display medium comprising:
a light-transmissive front electrode;
an array of pixel electrodes;
an electrophoretic medium comprising charged particles that move in the presence of an electric field, the electrophoretic medium being sandwiched between the light-transmissive front electrode and the array of pixel electrodes;
a plurality of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a data driver, the gate is coupled to a scan driver, and the drain is coupled to one of the pixel electrodes;
a plurality of Hall-Effect switches operatively coupled between a write voltage source and one of the pixel electrodes; and
a digitizing layer configured to locate a touch on the writeable display medium.

18. The writeable display medium of claim 17, further comprising a power source operatively coupled to the data driver, scan driver, and write voltage source.

19. The writeable display medium of claim 18, further comprising memory operatively coupled to the digitizing layer and the data and scan drivers, the memory configured to receive position information from the digitizing layer and to send the position information to the data and scan drivers.

20. The writeable display medium of claim 17, wherein the Hall-Effect switch comprises gallium arsenide, indium antimonide, or indium arsenide.

21. The writeable display medium of claim 17, wherein the digitizing layer uses electromagnetic sensing to determine the position of a touch.

22. The writeable display medium of claim 17, wherein the digitizing layer uses capacitive sensing to determine the position of a touch.

23. A writeable system including the writeable display medium of any of claims 17-22 and a stylus comprising an electromagnet or a rare earth magnet.

24. A writeable display medium comprising:
a light-transmissive front electrode;
an array of pixel electrodes;
an electrophoretic medium comprising charged particles that move in the presence of an electric field, the electrophoretic medium being sandwiched between the light-transmissive front electrode and the array of pixel electrodes;

a first set of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a global reset voltage source, the gate is coupled to a global reset gate voltage source, and the drain is coupled to one of the pixel electrodes; and

a second set of transistors, each transistor having a drain, source, and gate, wherein the source is coupled to a write voltage source, the gate is coupled to a sensing circuit, and the drain is coupled to one of the pixel electrodes.

25. The writeable display medium of claim 24, further comprising a power source operatively coupled to the global reset voltage source, global reset gate voltage source, and write voltage source.

26. The writeable display medium of claim 24, wherein the sensing circuit comprises a magnetoresistor or a photoresistor.

27. The writeable display medium of claim 26, wherein the sensing circuit comprises a magnetoresistor, and the magnetoresistor comprises copper, iron, or cobalt.

28. A writeable system including the writeable display medium of any of claims 24-27 and a stylus comprising an electromagnet or a rare earth magnet.

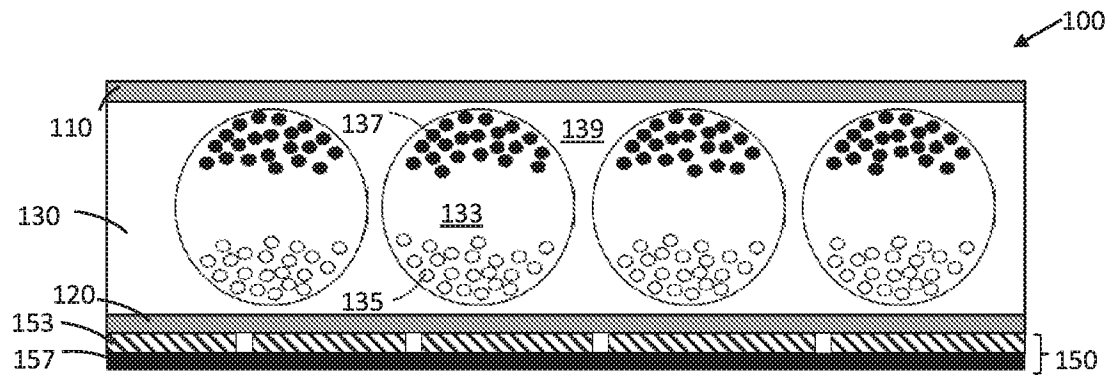


FIG. 1

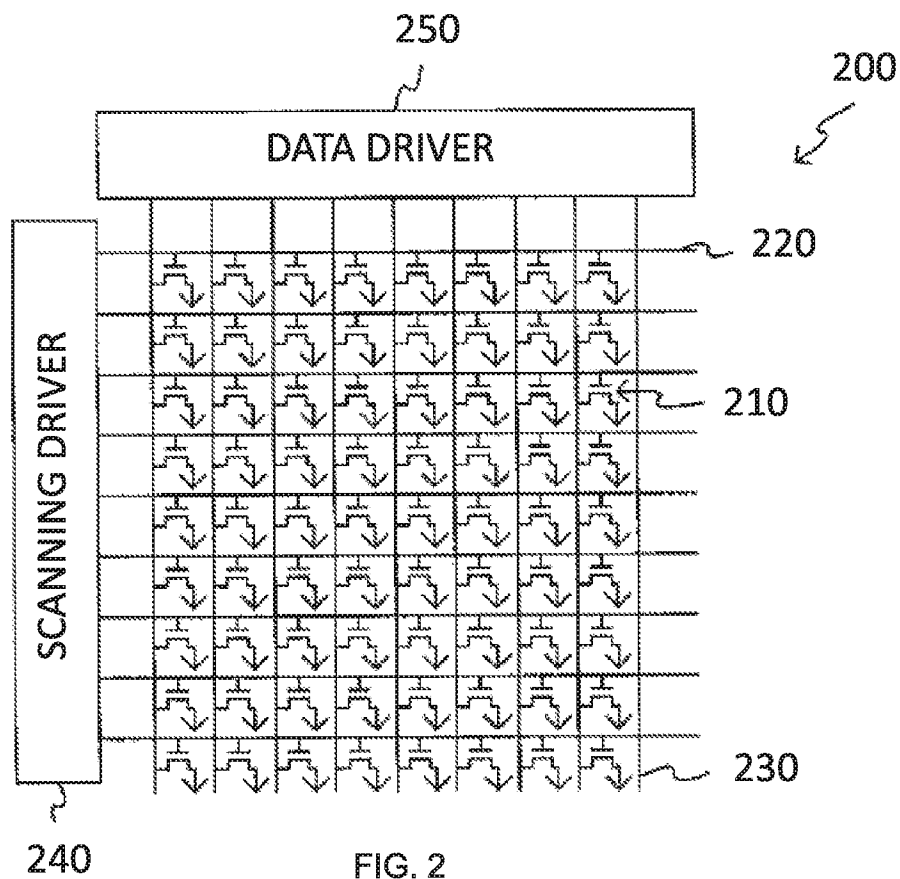


FIG. 2

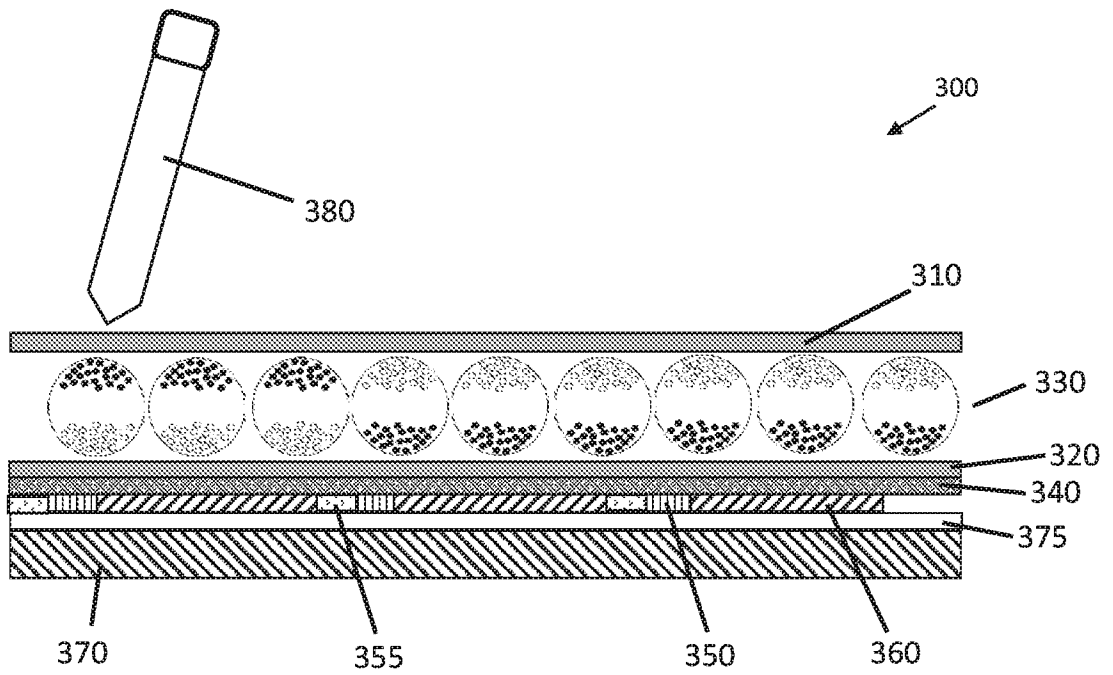


FIG. 3

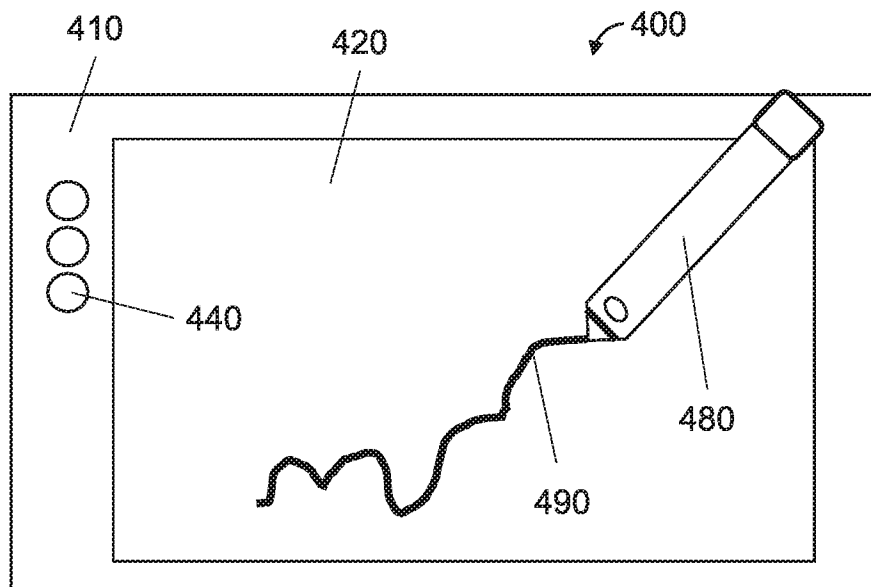
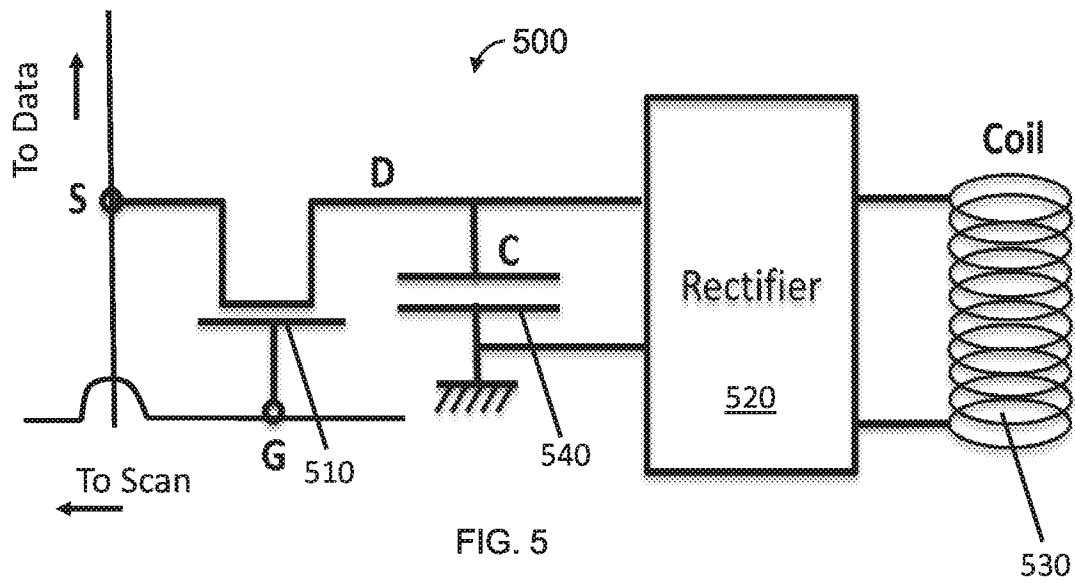
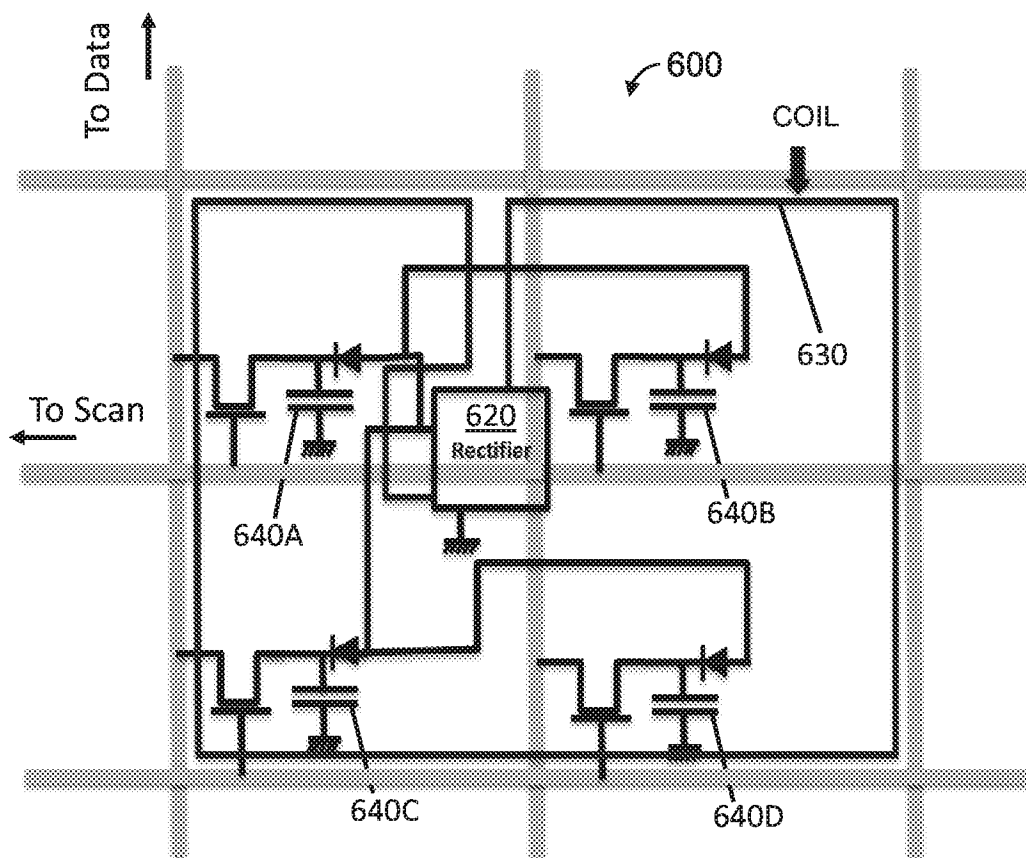


FIG. 4



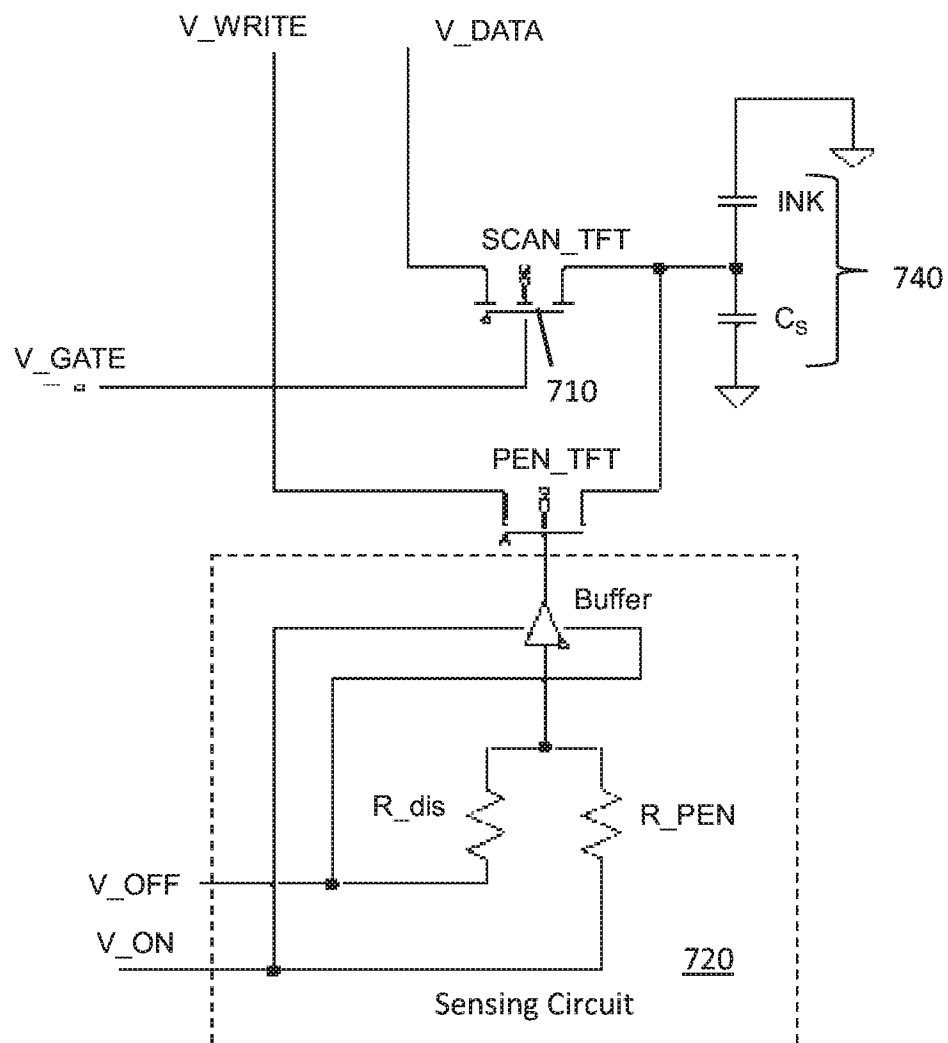


FIG. 7

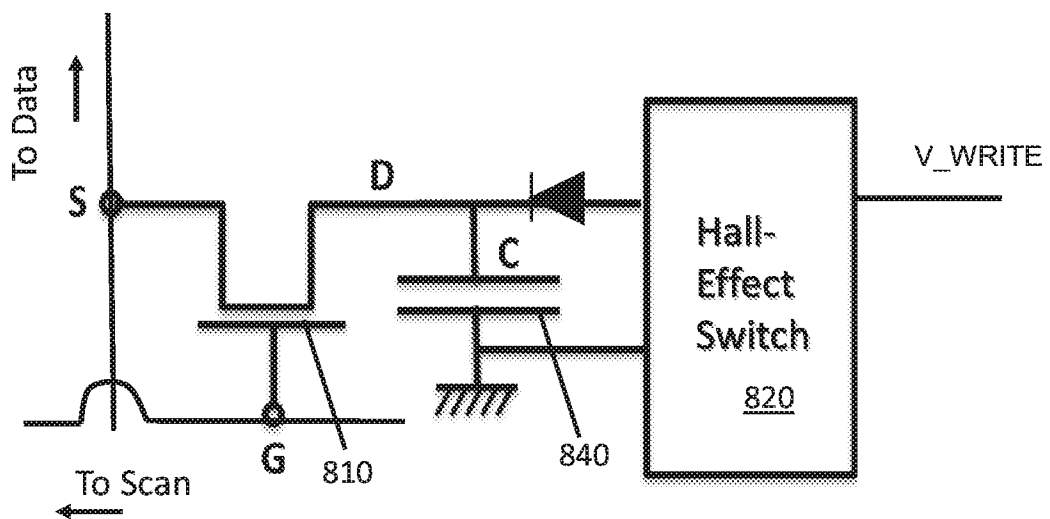


FIG. 8

5/7

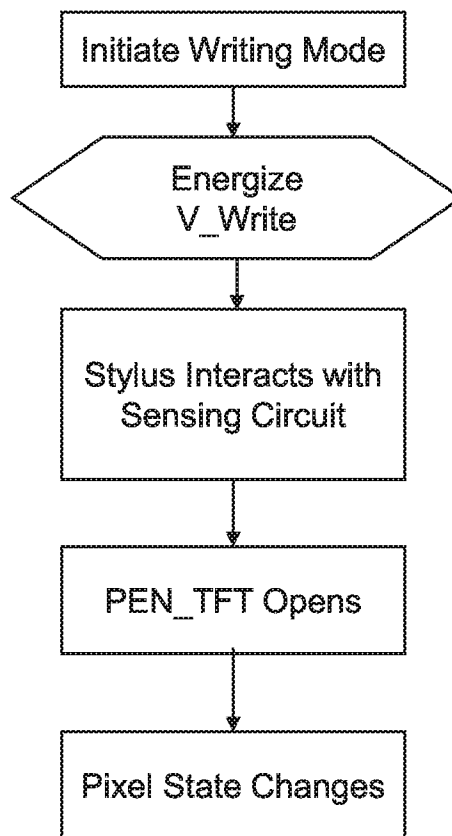


FIG. 9

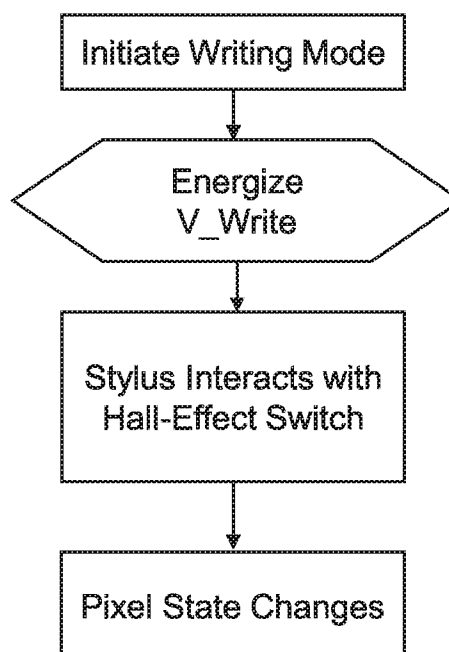


FIG. 10

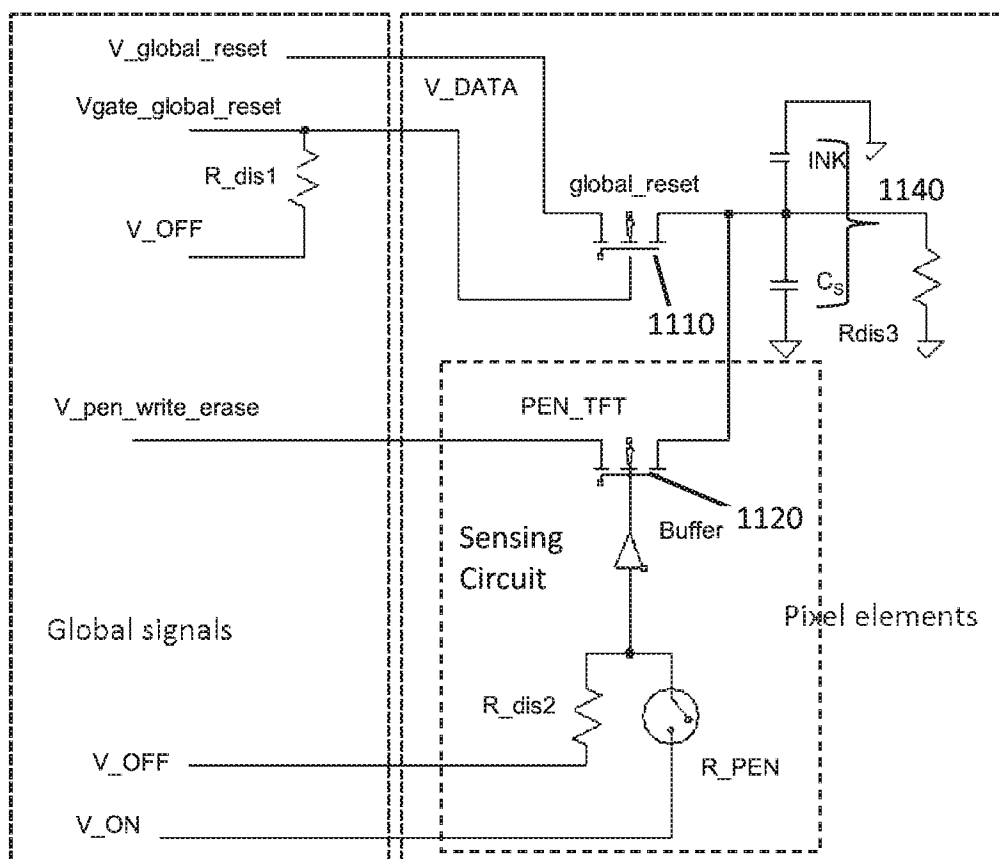


FIG. 11

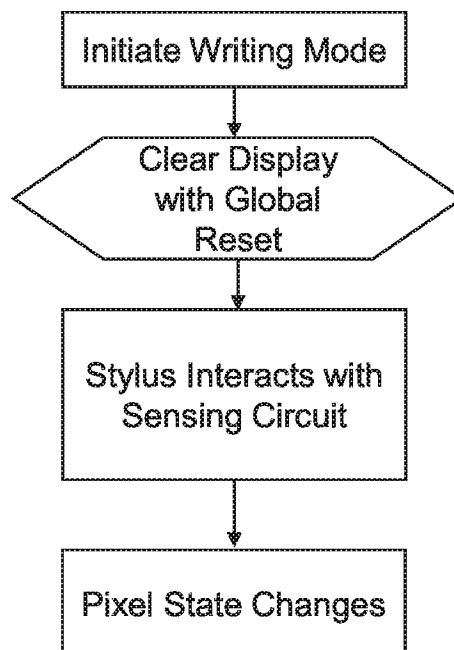


FIG. 12

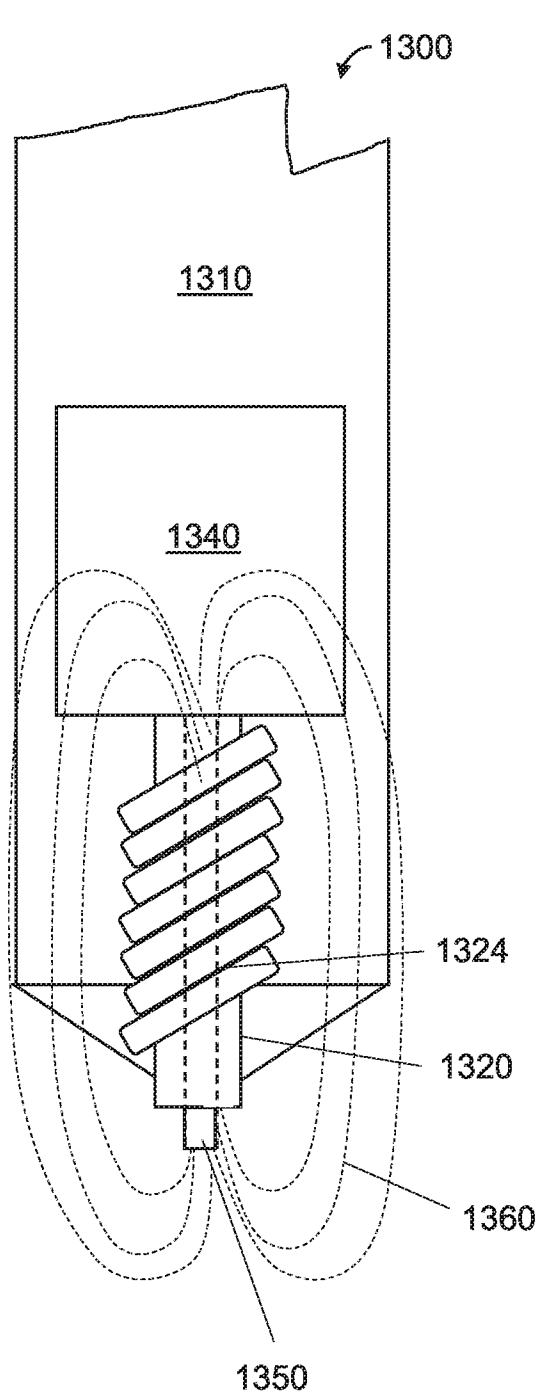


FIG. 13

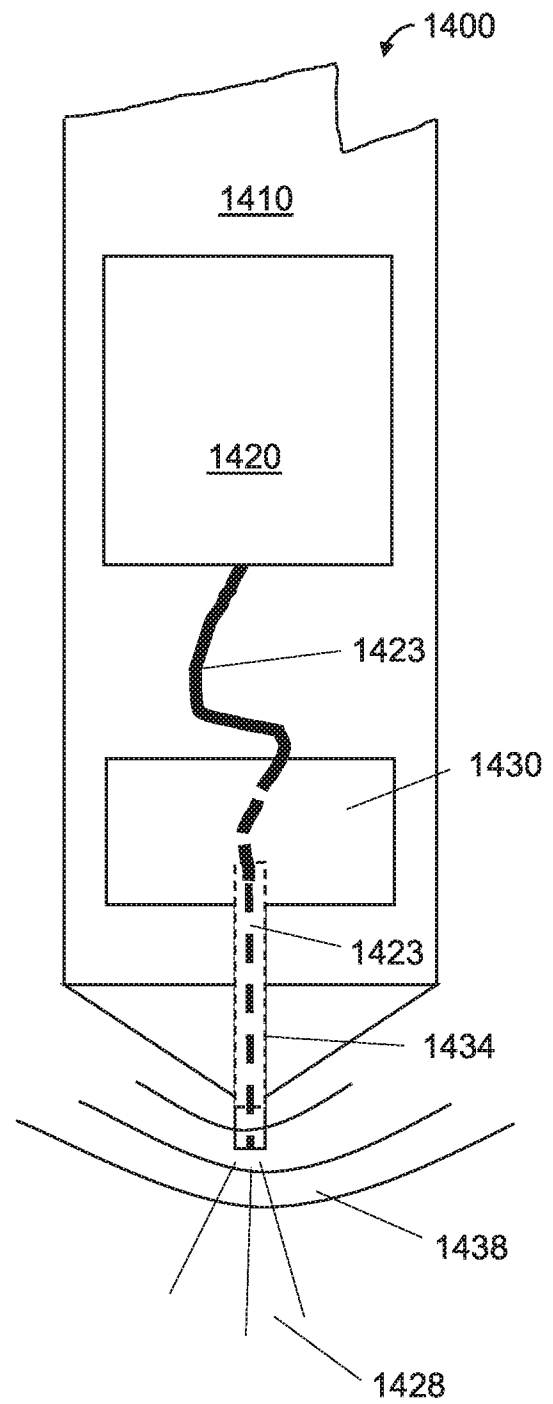


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/019906**A. CLASSIFICATION OF SUBJECT MATTER****G02F 1/167(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F 1/167; G06F 3/044; G06F 3/0354; G09G 3/34; G06F 3/042; G09G 3/38; G02F 1/155; G06F 3/038; G06F 3/041; G09G 5/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: writable display, electrophoretic medium, transistor, sensing circuit, digitizing layer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2016-0239113 A1 (E INK CORPORATION) 18 August 2016 See paragraphs [0045], [0055]-[0064], [0067], [0086], [0110]-[0114], [0122]; and figures 1, 5.	1-8, 24-28
A		9-23
Y	US 2012-0154327 A1 (HUNG-TA LIU) 21 June 2012 See paragraphs [0028], [0044]-[0053]; and figures 1A-1C.	1-8, 24-28
A	US 2008-0238871 A1 (SIMON TAM) 02 October 2008 See paragraphs [0043]-[0047]; and figure 6.	1-28
A	US 2012-0306819 A1 (KATSUNORI YAMAZAKI et al.) 06 December 2012 See paragraphs [0055]-[0088]; and figures 1-4.	1-28
A	US 2016-0103380 A1 (E INK CORPORATION) 14 April 2016 See paragraphs [0061]-[0064]; and figure 1.	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 June 2018 (12.06.2018)

Date of mailing of the international search report

12 June 2018 (12.06.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

NHO, Ji Myong

Telephone No. +82-42-481-8528



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/019906

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016-0239113 A1	18/08/2016	CN 107231812 A JP 2018-503136 A WO 2016-133949 A1	03/10/2017 01/02/2018 25/08/2016
US 2012-0154327 A1	21/06/2012	CN 102541349 A CN 102541349 B CN 102609128 A CN 102609128 B CN 102646005 A CN 102646005 B CN 102681720 A CN 102681720 B CN 102798973 A CN 102798973 B CN 103034381 A CN 103034381 B CN 103049130 A CN 103049130 B CN 104360780 A CN 104360780 B DE 102011057155 A1 DE 102011057156 A1 DE 102011057173 A1 DE 102011121315 A1 DE 102012100320 A1 DE 102012217545 A1 DE 102012218635 A1 FR 2969359 A1 FR 2969359 B1 FR 2970097 A1 FR 2970098 A1 FR 2970103 A1 FR 2970103 B1 FR 2973921 A1 FR 2973921 B1 TW 201227439 A TW 201227454 A TW 201227475 A TW 201234253 A TW 201248289 A TW 201314546 A TW 201316214 A TW I437474 B TW I452493 B TW I459278 B TW I463237 B TW I470530 B TW I576746 B US 2012-0154326 A1	04/07/2012 08/02/2017 25/07/2012 12/08/2015 22/08/2012 17/12/2014 19/09/2012 20/01/2016 28/11/2012 04/05/2016 10/04/2013 12/04/2017 17/04/2013 09/02/2018 18/02/2015 17/05/2017 02/08/2012 05/07/2012 05/07/2012 21/06/2012 02/08/2012 28/03/2013 18/04/2013 22/06/2012 12/06/2015 06/07/2012 06/07/2012 06/07/2012 29/05/2015 12/10/2012 06/02/2015 01/07/2012 01/07/2012 01/07/2012 16/08/2012 01/12/2012 01/04/2013 16/04/2013 11/05/2014 11/09/2014 01/11/2014 01/12/2014 21/01/2015 01/04/2017 21/06/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/019906

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2012-0169400 A1	05/07/2012
		US 2012-0169635 A1	05/07/2012
		US 2012-0169636 A1	05/07/2012
		US 2012-0229420 A1	13/09/2012
		US 2013-0076691 A1	28/03/2013
		US 2013-0093724 A1	18/04/2013
		US 8933897 B2	13/01/2015
		US 8941607 B2	27/01/2015
		US 9046976 B2	02/06/2015
		US 9063607 B2	23/06/2015
		US 9069421 B2	30/06/2015
		US 9529479 B2	27/12/2016
US 2008-0238871 A1	02/10/2008	GB 2447983 A	01/10/2008
		JP 2008-257232 A	23/10/2008
US 2012-0306819 A1	06/12/2012	CN 102810289 A	05/12/2012
		JP 2012-248145 A	13/12/2012
		JP 5779992 B2	16/09/2015
		KR 10-2012-0134066 A	11/12/2012
		TW 201248288 A	01/12/2012
US 2016-0103380 A1	14/04/2016	CN 104583853 A	29/04/2015
		CN 104583853 B	26/01/2018
		EP 2877895 A1	03/06/2015
		EP 2877895 B1	06/09/2017
		HK 1206820 A1	15/01/2016
		US 2014-0027044 A1	30/01/2014
		US 9238340 B2	19/01/2016
		WO 2014-018745 A1	30/01/2014