

(51) International Patent Classification:

F04B 43/12 (2006.01) F04B 53/00 (2006.01)

(21) International Application Number:

PCT/US2019/047190

(22) International Filing Date:

20 August 2019 (20.08.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/719,868 20 August 2018 (20.08.2018) US
62/868,303 28 June 2019 (28.06.2019) US

(71) Applicant: **VANDERBILT UNIVERSITY** [US/US]; 305
Kirkland Hall, 2201 West End Avenue, Nashville, TN
37240 (US).

(72) Inventors: **WIKSWO, John, P.**; 1025 Manley Lane,
Brentwood, TN 37027 (US). **BRITT, Clayton M.**; 728
Rapids Road, Franklin, KY 42134 (US). **MARKOV, Dmitriy, A.**; 2713 Rosedale Place, Nashville, TN 37211 (US).
REISERER, Ronald, S.; 912 Crownhill Drive, Nashville,
TN 37217 (US). **SCHATZKI, Louis**; 274 South Hanover
Avenue, Lexington, KY 40502 (US).

(74) Agent: **XIA, Tim, Tingkang et al.**; Locke Lord LLP, P.O.
Box 55874, Boston, MA 02205 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTICHANNEL PUMPS AND APPLICATIONS OF SAME

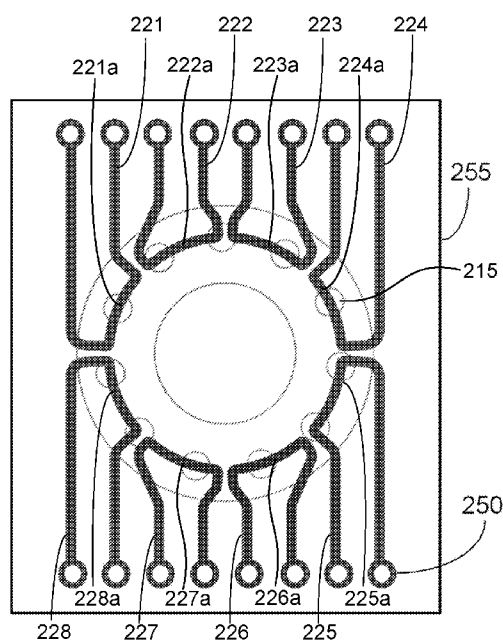


FIG. 2A

(57) Abstract: A peristaltic micropump include a plurality of channels, each channel being flexible, having a middle channel portion, and being operably in fluidic communications with a first port and a second port, and the middle channel portions of the plurality of channels being arranged in one or more concentric circles; and an actuator comprising a bearing assembly driven by a motor, the bearing assembly comprising a plurality of rolling members and a bearing accommodating member for accommodating the plurality of rolling members, the actuator being positioned in relation to the plurality of channels such that when the bearing accommodating member rotates, the plurality of rolling members rolls along the one or more concentric circles of the middle channel portions of the plurality of channels to cause individually fluids to transfer between the first port and the second port of each of the plurality of channels simultaneously at different flowrates.

MULTICHANNEL PUMPS AND APPLICATIONS OF SAME**STATEMENT AS TO RIGHTS UNDER FEDERALLY-SPONSORED RESEARCH**

This invention was made with government support under Grant Nos. 5UG3TR002097-
5 02, U01CA202229 and HHSN271201700044C awarded by the National Institutes of Health,
Grant No. 83573601 awarded by the U. S. Environmental Protection Agency, Grant No. 2017-
17081500003 awarded by the Intelligence Advanced Research Projects Activity, and Grant No.
CBMXCEL-XL1-2-001 awarded by the Defense Threat Reduction Agency through Subcontract
468746 by Los Alamos National Laboratory (LANL). The government has certain rights in the
10 invention.

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

This application claims priority to and the benefit of U.S. Provisional Patent Application
Serial Nos. 62/719,868, and 62/868,303, filed August 20, 2018 and June 28, 2019, respectively.

15 This application is also a continuation-in-part application of U.S. Patent Application
Serial No. 15/820,506, filed November 22, 2017, now allowed, which is a divisional application
of U.S. Patent Application Serial No. 13/877,925, filed July 16, 2013, now abandoned, which is
a national stage entry of PCT Application Serial No. PCT/US2011/055432, filed October 7,
2011, which claims priority to and the benefit of, U.S. Provisional Patent Application Serial No.
20 61/390,982, filed October 7, 2010.

This application is also a continuation-in-part application of U.S. Patent Application
Serial No. 16/049,025, filed July 30, 2018, which is a continuation application of U.S. Patent
Application Serial No. 14/363,074, filed June 5, 2014, now U.S. Patent No. 10,078,075, is a
national stage entry of PCT Application Serial No. PCT/US2012/068771, filed December 10,
25 2012, which claims priority to and the benefit of U.S. Provisional Patent Application Serial Nos.
No. 61/569,145, 61/697,204 and 61/717,441, filed December 9, 2011, September 5, 2012 and
October 23, 2012, respectively.

This application is also a continuation-in-part application of U.S. Patent Application
Serial No. 16/012,900, filed June 20, 2018, which is a divisional application of U.S. Patent
30 Application Serial No. 15/191,092 (the '092 application), filed June 23, 2016, now U.S. Patent
No. 10,023,832, which claims priority to and the benefit of U.S. Provisional Patent Application

Serial Nos. 62/183,571, 62/193,029, 62/276,047 and 62/295,306, filed June 23, 2015, July 15, 2015, January 7, 2016 and February 15, 2016, respectively. The '092 application is also a continuation-in-part application of U.S. Patent Application Serial Nos. 13/877,925, 14/363,074, 14/646,300 (the '300 application) and 14/651,174 (the '174 application), filed July 16, 2013, 5 June 5, 2014, May 20, 2015 and June 10, 2015, respectively. The '300 application, now U.S. Patent No. 9,874,285, is a national stage entry of PCT Application Serial No. PCT/US2013/071026, filed November 20, 2013, which claims priority to and the benefit of U.S. Provisional Patent Application Serial Nos. 61/729,149, 61/808,455, and 61/822,081, filed November 21, 2012, April 4, 2013 and May 10, 2013, respectively. The '174 application, now 10 U.S. Patent No. 9,618,129, is a national stage entry of PCT Application Serial No. PCT/US2013/071324, filed November 21, 2013, which claims priority to and the benefit of U.S. Provisional Patent Application Serial Nos. 61/808,455 and 61/822,081, filed April 4, 2013 and May 10, 2013, respectively.

This application is also a continuation-in-part application of U.S. Patent Application 15 Serial No. 16/511,379, filed July 15, 2019, which is a divisional application of U.S. Patent Application Serial No. 15/776,524, filed May 16, 2018, now allowed, which is a national stage entry of PCT Application Serial No. PCT/US2016/063586 (the '586 application), filed November 23, 2016, which claims priority to and the benefit of, U.S. Provisional Patent Application Serial No. 62/259,327, filed November 24, 2015. The '586 application is also a 20 continuation-in-part application of U.S. Patent Application Serial Nos. 13/877,925, 14/363,074, 14/646,300, 14/651,174 and 15/191,092, filed July 16, 2013, June 5, 2014, May 20, 2015, June 10, 2015 and June 23, 2016, respectively.

This application is also a continuation-in-part application of PCT Patent Application Serial No. PCT/US2019/034285 (the '285 application), filed May 29, 2019, which claims 25 priority to and the benefit of U.S. Provisional Patent Application Serial No. 62/677,468, filed May 29, 2018. The '285 application is also a continuation-in-part application of U.S. Patent Application Serial Nos. 15/776,524 and 16/012,900, filed May 16, 2018 and June 20, 2018, respectively.

Each of the above-identified applications is incorporated herein by reference in its 30 entirety.

Some references, which may include patents, patent applications, and various

publications, are cited and discussed in the description of the invention. The citation and/or discussion of such references is provided merely to clarify the description of the invention and is not an admission that any such reference is “prior art” to the invention described herein. All references cited and discussed in this specification are incorporated herein by reference in their
5 entireties and to the same extent as if each reference was individually incorporated by reference.

FIELD OF THE INVENTION

The invention relates generally to microfluidic systems, and more particularly to multichannel pumps and applications of the same.

10

BACKGROUND INFORMATION

The background description provided herein is for the purpose of generally presenting the context of the invention. The subject matter discussed in the background of the invention section should not be assumed to be prior art merely as a result of its mention in the background of the
15 invention section. Similarly, a problem mentioned in the background of the invention section or associated with the subject matter of the background of the invention section should not be assumed to have been previously recognized in the prior art. The subject matter in the background of the invention section merely represents different approaches, which in and of themselves may also be inventions. Work of the presently named inventors, to the extent it is
20 described in the background of the invention section, as well as aspects of the description that may not otherwise qualify as prior art at the time of filing, are neither expressly nor impliedly admitted as prior art against the invention.

Bioreactors offer the unprecedented opportunity to maintain tissue explants in a close-to-physiological environment. Typically, a two-chambered bioreactor, such as the Puck
25 neurovascular unit (NVU), is perfused by two single-channel rotary planar peristaltic micropumps (RPPM)., with one for each side of the blood-brain barrier (BBB). For multiple NVU bioreactors, there will be the twice the number of motor cartridges as the bioreactors. Since the physical volume occupied by a motor cartridge and their motor control electronics can be substantially greater than that of a Puck bioreactor, it would be advantageous to have a single
30 motor provide perfusion control to both sides of a two chambered bioreactor, and also multiple such bioreactors so as to thereby increase the parallelism and throughput of an organ-on-chip

bioassay. Were the bioreactors only single chamber, one single-channel pump would be required for perfusion, and a multichannel pump would be able to perfuse the same number of single-sided bioreactors.

Therefore, a heretofore unaddressed need exists in the art to address the aforementioned
5 deficiencies and inadequacies.

SUMMARY OF THE INVENTION

In one aspect, the invention relates to a peristaltic micropump. In one embodiment, the peristaltic micropump includes a plurality of channels, wherein each channel is flexible, has a
10 middle channel portion, and is operably in fluidic communications with a first port and a second port, and wherein the middle channel portions of the plurality of channels are arranged in one or more concentric circles; and an actuator comprising a bearing assembly driven by a motor, wherein the bearing assembly comprises a plurality of rolling members and a bearing accommodating member for accommodating the plurality of rolling members, wherein the
15 actuator is positioned in relation to the plurality of channels such that when the bearing accommodating member rotates, the plurality of rolling members rolls along the one or more concentric circles of the middle channel portions of the plurality of channels to cause individually fluids to transfer between the first port and the second port of each of the plurality of channels simultaneously at different flowrates.

20 In one embodiment, each channel is in fluidic communications with a respective fluid, wherein one of the first and second ports of each channel is an input port for inputting the respective fluid, and the other is an output port for outputting the respective fluid at a predetermined flowrate with a predetermined volume.

In one embodiment, the plurality of channels is formed in a layer of a flexible material.

25 In one embodiment, the flexible material comprises a polymer of polydimethylsiloxane (PDMS), or its derivatives.

In one embodiment, the actuator is configured such that when the actuator is activated, during a full rotation of the bearing accommodating member, each channel is being compressed by at least one rolling member.

30 In one embodiment, when the actuator is deactivated, each channel is compressed by one or more rolling members as so to prevent passive forward or reverse flows through the channels

of the peristaltic micropump.

In one embodiment, each channel has a cross-section area that determines a flowrate of a fluid flowing through said channel, and wherein the cross-section area is in any one of geometric shapes.

5 In one embodiment, when the bearing accommodating member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.

In one embodiment, the bearing accommodating member comprises a bearing cage defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is
10 accommodated in the plurality of spaced-apart openings.

In one embodiment, the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the plurality of channels.

In one embodiment, each of the plurality of rolling members comprises a ball, or a roller.

15 In one embodiment, the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.

In one embodiment, each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.

20 In one embodiment, the peristaltic micropump is a rotary planar peristaltic micropump (RPPM).

In one embodiment, the peristaltic micropump further comprises a microcontroller being in wired or wireless communications with the actuator for controlling operations of the actuator.

In another aspect of the inventions, a peristaltic micropump has a plurality of channels
25 configured to transfer one or more fluids; and an actuator configured to engage the plurality of channels, and rotate about a central axis, wherein the actuator comprises a plurality of rolling members and a driving member configured such that when the driving member rotates, the plurality of rolling members rolls along the plurality of channels to cause individually the one or more fluids to transfer through each of the plurality of channels simultaneously at different
30 flowrates, wherein during a full rotation of the driving member, each channel is being compressed by at least one rolling member.

In one embodiment, the plurality of channels is formed in a layer of a flexible material.

In one embodiment, the flexible material comprises a polymer of polydimethylsiloxane (PDMS), or its derivatives.

5 In one embodiment, each channel has a cross-section area that determines a flowrate of a fluid flowing through said channel, and wherein the cross-section area is in any one of geometric shapes.

In one embodiment, the plurality of rolling members is disposed between the plurality of channels and the driving member.

10 In one embodiment, each channel has a middle channel portion, and wherein the middle channel portions of the plurality of channels are arranged in one or more concentric circles.

In one embodiment, when the driving member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.

In one embodiment, the driving member comprises a bearing accommodating member configured to accommodate the plurality of rolling members.

15 In one embodiment, the bearing accommodating member comprises a bearing cage defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is accommodated in the plurality of spaced-apart openings.

20 In one embodiment, the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the plurality of channels.

In one embodiment, each of the plurality of rolling members comprises a ball, or a roller.

In one embodiment, the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.

25 In one embodiment, each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.

In one embodiment, the peristaltic micropump is a rotary planar peristaltic micropump (RPPM).

In one embodiment, the driving member is driven by a motor.

30 In one embodiment, the peristaltic micropump further comprises a microcontroller being in wired or wireless communications with the actuator for controlling operations of the actuator.

In yet another aspect, the invention relates to a pump array includes a plurality of peristaltic micropumps disclosed above, arranged in a baseplate; and a microcontroller being in wired or wireless communications with the actuator of each of the plurality of peristaltic micropumps for individually controlling operations of the plurality of peristaltic micropumps.

In one aspect of the invention, a push-pull micropump includes one or more pairs of channels configured to transfer one or more fluids, each channel pair having an aspiration channel and an injection channel; and an actuator configured to engage the one or more pairs of channels, wherein the actuator comprises a plurality of rolling members and a driving member configured such that when the driving member rotates, the plurality of rolling members rolls along the one or more pairs of channels to cause individually the one or more fluids to transfer through each channel pair simultaneously at different flowrates or the same flowrate, depending upon actuated lengths of the aspiration and injection channels of each channel pair, wherein an actuated length of a channel is defined by a length of the channel along which the plurality of rolling members rolls during a full rotation of the driving member.

In one embodiment, each channel pair is configured such that the actuated length of the aspiration channel is longer than that of the injection channel, whereby the aspiration and injection channels of each channel pair have different flowrates.

In one embodiment, each channel pair is configured such that the actuated length of the aspiration channel is same as that of the injection channel, whereby the aspiration and injection channels of each channel pair have the same flowrate.

In one embodiment, the aspiration and injection channels of each channel pair have different cross-sectional areas.

In one embodiment, each channel has a middle channel portion, and wherein the middle channel portions of the aspiration and injection channels of each channel pair are arranged as segments of two concentric circles with different radii.

In one embodiment, when the driving member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.

In one embodiment, the driving member comprises a bearing accommodating member configured to accommodate the plurality of rolling members.

In one embodiment, the bearing accommodating member comprises a bearing cage

defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is accommodated in the plurality of spaced-apart openings.

In one embodiment, the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the one or more pairs of channels.

In one embodiment, each of the plurality of rolling members comprises a ball, or a roller.

In one embodiment, the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.

In one embodiment, each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.

In another aspect, the invention relates to a pump array comprising a plurality of push-pull micropumps as disclosed above, arranged in a baseplate; and a microcontroller being in wired or wireless communications with the actuator of each of the plurality of push-pull micropumps for individually controlling operations of the plurality of push-pull micropumps.

These and other aspects of the invention will become apparent from the following description of the preferred embodiment taken in conjunction with the following drawings, although variations and modifications therein may be affected without departing from the spirit and scope of the novel concepts of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate one or more embodiments of the invention and, together with the written description, serve to explain the principles of the invention. Wherever possible, the same reference numbers are used throughout the drawings to refer to the same or like elements of an embodiment.

FIGS. 1A-1C show schematically different views of a peristaltic micropump with a single channel and driven by a motor.

FIGS. 2A-2B shows schematically an 8-channel peristaltic micropump according to embodiments of the invention.

FIG. 2C shows schematically a circular, through-plate fluidic used for a peristaltic

micropump according to embodiments of the invention.

FIG. 2D shows schematically a bearing-accommodating member used for a peristaltic micropump according to embodiments of the invention.

FIG. 2E shows an implementation of an eight-channel peristaltic micropump using a circular, through-plate fluidics and a totally enclosed motor cartridge according to embodiments of the invention.

FIG. 2F shows output of one channel of an eight-channel peristaltic micropump as measured with a Dolomite flow sensor, according to embodiments of the invention.

FIG. 2G shows flowrates as a function of the motor RPM for each channel of an eight-channel peristaltic micropump according to embodiments of the invention.

FIG. 2H shows an angular dependence the output of each channel of a prototyped eight-channel peristaltic micropump according to embodiments of the invention.

FIG. 2I shows valves-on-a-valve balancing of a multichannel peristaltic micropump according to embodiments of the invention.

FIG. 3A shows schematically an array of pumps that can either be driven by an array or motors, or separated into individual pumps according to embodiments of the invention.

FIG. 3B shows a partial perspective view of a 6-channel pump fluidic chip utilized in the pump array shown in FIG. 3A, showing structures of the pump fluidic chip, according to embodiments of the invention.

FIG. 3C shows a partial perspective view of the 6-channel pump fluidic chip shown in FIG. 3B showing a single pump channel.

FIG. 4A shows a 6-channel pump fluidic chip and its 180° rotation relative to the baseplate according to embodiments of the invention.

FIG. 4B shows flowrates of each channel of 6-channel pump fluidic chip of FIG. 4A before (crosses) and after the 180° rotation (circles) according to embodiments of the invention.

FIGS. 5A-5B show an 8-channel peristaltic micropump with identification of the input and output ports of the eight channels according to embodiments of the invention.

FIGS. 5C-5F show flowrate characterization for each channel of 8-channel peristaltic micropump of FIGS. 5A-5B according to embodiments of the invention.

FIGS. 6A-6C show various views of a 6-channel push-pull pump according to embodiments of the invention.

FIG. 6D shows schematically a reservoir into which fluid is delivered and from which fluid is removed through tubes to a 6-channel push-pull pump according to embodiments of the invention.

FIGS. 7A-7B shows schematically a 12-channel peristaltic micropump that can function as a six-channel push-pull micropump according to embodiments of the invention.

FIG. 8 shows schematically an axle-driven, cam-follower-bearing type actuator used for a peristaltic micropump according to embodiments of the invention.

FIG. 9 shows schematically an axle-driven, roller-bearing type actuator used for a peristaltic micropump according to embodiments of the invention.

FIG. 10 shows schematically a hub type actuator used for a peristaltic micropump according to embodiments of the invention.

FIGS. 11A-11B show schematically a roller thrust bearing cage type actuator used for a peristaltic micropump according to embodiments of the invention.

FIGS. 11C-11D show respectively a cylindrical roller and a conical roller used for a peristaltic micropump according to embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The invention will now be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown. The invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like reference numerals refer to like elements throughout.

The terms used in this specification generally have their ordinary meanings in the art, within the context of the invention, and in the specific context where each term is used. Certain terms that are used to describe the invention are discussed below, or elsewhere in the specification, to provide additional guidance to the practitioner regarding the description of the invention. For convenience, certain terms may be highlighted, for example using italics and/or quotation marks. The use of highlighting and/or capital letters has no influence on the scope and meaning of a term; the scope and meaning of a term are the same, in the same context, whether or not it is highlighted and/or in capital letters. It will be appreciated that the same thing can be

said in more than one way. Consequently, alternative language and synonyms may be used for any one or more of the terms discussed herein, nor is any special significance to be placed upon whether or not a term is elaborated or discussed herein. Synonyms for certain terms are provided. A recital of one or more synonyms does not exclude the use of other synonyms. The use of
5 examples anywhere in this specification, including examples of any terms discussed herein, is illustrative only and in no way limits the scope and meaning of the invention or of any exemplified term. Likewise, the invention is not limited to various embodiments given in this specification.

It will be understood that when an element is referred to as being “on” another element, it
10 can be directly on the other element or intervening elements may be present therebetween. In contrast, when an element is referred to as being “directly on” another element, there are no intervening elements present. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

It will be understood that, although the terms first, second, third, etc. may be used herein
15 to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another element, component, region, layer or section. Thus, a first element, component, region, layer or section discussed below can be termed a second element, component, region, layer or section
20 without departing from the teachings of the invention.

It will be understood that when an element is referred to as being “on,” “attached” to, “connected” to, “coupled” with, “contacting,” etc., another element, it can be directly on, attached to, connected to, coupled with or contacting the other element or intervening elements may also be present. In contrast, when an element is referred to as being, for example, “directly
25 on,” “directly attached” to, “directly connected” to, “directly coupled” with or “directly contacting” another element, there are no intervening elements present. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed “adjacent” to another feature may have portions that overlap or underlie the adjacent feature.

The terminology used herein is for the purpose of describing particular embodiments only
30 and is not intended to be limiting of the invention. As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates

otherwise. It will be further understood that the terms “comprises” and/or “comprising,” or “includes” and/or “including” or “has” and/or “having” when used in this specification specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

Furthermore, relative terms, such as “lower” or “bottom” and “upper” or “top,” may be used herein to describe one element's relationship to another element as illustrated in the figures. It will be understood that relative terms are intended to encompass different orientations of the device in addition to the orientation shown in the figures. For example, if the device in one of the figures is turned over, elements described as being on the “lower” side of other elements would then be oriented on the “upper” sides of the other elements. The exemplary term “lower” can, therefore, encompass both an orientation of lower and upper, depending on the particular orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as “below” or “beneath” other elements would then be oriented “above” the other elements. The exemplary terms “below” or “beneath” can, therefore, encompass both an orientation of above and below.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

As used herein, “around,” “about,” “substantially” or “approximately” shall generally mean within 20 percent, preferably within 10 percent, and more preferably within 5 percent of a given value or range. Numerical quantities given herein are approximate, meaning that the terms “around,” “about,” “substantially” or “approximately” can be inferred if not expressly stated.

As used herein, the terms “comprise” or “comprising,” “include” or “including,” “carry” or “carrying,” “has/have” or “having,” “contain” or “containing,” “involve” or “involving” and the like are to be understood to be open-ended, *i.e.*, to mean including but not limited to.

As used herein, the phrase “at least one of A, B, and C” should be construed to mean a logical (A or B or C), using a non-exclusive logical OR. As used herein, the term “and/or”

includes any and all combinations of one or more of the associated listed items.

The description below is merely illustrative in nature and is in no way intended to limit the invention, its application, or uses. The broad teachings of the invention can be implemented in a variety of forms. Therefore, while this invention includes particular examples, the true scope
5 of the invention should not be so limited since other modifications will become apparent upon a study of the drawings, the specification, and the following claims. For purposes of clarity, the same reference numbers will be used in the drawings to identify similar elements. It should be understood that one or more steps within a method may be executed in different order (or concurrently) without altering the principles of the invention.

10 It has been demonstrated by co-inventors of this invention in U.S. Patent Application Serial Nos. 14/651,174, 14/646,300, 15/820,506 and 16/049,025, which are incorporated herein by reference in their entireties, that the exemplary embodiments of rotary planar peristaltic micropumps (RPPM) are capable of pumping a wide range of flows that are appropriate for microfluidic experiments. An RPPM can also be readily incorporated directly into a microfluidic
15 chip, and its functionality when integrated with microfluidic networks is enhanced by a proximal and reliable means of switching fluidic inputs upstream or fluidic outputs downstream from the pump body.

FIGS. 1A-1C schematically a RPPM with a single microfluidic channel 120. The RPPM is driven by a single motor 100 through a motor head 101 that ensures that a proper compressive
20 force is delivered to the microfluidic channel. The RPPM includes an actuator 110 utilized for a driving force of the pump. The actuator 110 includes an eight balls 115 and a ball bearing cage 110 having eight equally spaced-apart openings 112 aligned in a circle for capturing the eight balls 115. The single microfluidic channel 120 is formed in the body of the pump formed by fluidic chip 125, with a flexible material, for example, polydimethylsiloxane (PDMS), and has a
25 circumferential portion extended to an input port 121 and an output port 122. In operation, the actuator 110 is positioned in relation to the circumferential portion of the single channel 120. When the actuator 110 is activated/driven by the motor 100, the balls 115 roll along the circumferential portion of the single channel 120 to cause a fluid flow from the input port 121 to the output port 122 through the channel 120. In addition, as shown in FIG. 1A, a strain gauge
30 127 is embedded within the PDMS pump chip 125 for determining positions of the balls 115.

In certain aspects, the invention relates to single-motor-driven multichannel micropumps

in which fluids are individually transferred through each of the multichannels simultaneously at controllable flowrates. The multichannel micropumps are advantageous to have a single motor provide perfusion control to multiple bioreactors and thereby increase the parallelism and throughput of an organ-on-chip bioassay.

5 FIGS. 2A-2B show schematically an 8-channel RPPM according to one embodiment of the invention. The RPPM has eight isolated channels (fluidic circuits) 221, 223, . . . and 228, each of which has a middle, circumferential portion 221a, 222a, . . . or 228a. The middle channel portions 221a, 222a, . . . and 228a of the eight channels 221, 223, . . . and 228 are arranged in the form of one or more concentric circles. In this exemplary embodiment, they are
10 in a single circle 218. The eight isolated fluidic circuits are actuated by a single actuator, i.e., a single motor. The actuator includes rolling members such as balls 215 in this embodiment and a bearing accommodating member such as a ball bearing cage 210 having opening 212 for accommodating the balls 215 in this embodiment. The actuator is positioned in relation to the eight channels 221, 223, . . . and 228, such that when ball bearing cage 210 rotates (driven by a
15 single motor, not shown), the balls 215 roll along the circle 218 defined with the middle channel portions 221a, 222a, . . . and 228a of the channels 221-228 to cause individually fluids to transfer through each of the channels 221-228 simultaneously at different, controllable flowrates. Three of these pumps could deliver the same flowrates to each of twenty-four wells.

 In one embodiment, when the bearing cage 210 rotates at a central axis, each ball 215
20 operably rolls about a respective axis that is not parallel to the central axis.

 In one embodiment shown in FIG. 2C, a Delrin[®] actuator 210 with hemispherical-bottomed sockets 212 is used to capture the balls 215 that roll against the fluidic chip that comprises the valve. As the captive balls roll, they slide within the sockets 212. Delrin[®], also known as polyoxymethylene (POM), is a high-performance acetal resin with several desirable
25 physical and mechanical properties, such as durability, stiffness, low friction, and exceptional dimensional stability, which make POM ideal for high-load and high-impact applications such as bearings, rollers, and actuators. It should be appreciated that other materials can also be utilized to practice this invention.

 FIG. 2D shows a circular, through-plate multichannel fluidic chip 255 according to one
30 embodiment of the invention. The first layer of the circular fluidic chip 255 is a simple, planar layer, where the two surfaces of the first layer must be parallel to ensure uniformity of output of

the m. The eight fluidic channels 221 in the upper surface of the second layer are distributed around the circumference of the chip and actuated by a single eleven-ball drive head (as shown in FIG. 2C) that presses against the upper surface of the first layer. For each of the eight channels 221, a beginning portion of the channel 221 is approximately radial and connects to the input tubing punch port 221b, which passes through the associated protrusion on the lower side of the second layer. The inner end of the radial channel connects to a middle, circumferential portion 221a of the channel 221 that performs the pumping action. The other end of the pumping channel 221 is connected to the inner end of a second, approximately radial channel, which in turn is connected to a second (output), punch port 221c that, in this embodiment, passes through the protrusion adjacent to the first punch port. Were the direction of rotation of the eleven-ball actuator 210 with eleven ball sockets 212 (balls not shown), as illustrated in FIG. 2C, to be reversed, the first punch port 221b would become the output port of that pump channel, and the second punch port 221c would become the input. By having eight of the input-output constructs on a single circular through-plate fluidic 255, it is possible to have eight pumps that can each pump a different fluid simultaneously.

Each channel has a cross-section area that determines a flowrate of a fluid flowing through said channel, and wherein the cross-section area is in any one of geometric shapes.

In one embodiment, the channels 221-228 are formed in a layer of a flexible material. The flexible material can be a polymer of polydimethylsiloxane (PDMS), its derivatives, or other polymer compounds.

It should be noted that FIG. 2C is just one embodiment of the pump actuator. The actuating members could be rollers on radial axles (FIGS. 8-10), balls in sockets (FIGS. 2C and 7B), or rollers, shown in FIG. 11, or balls (not shown) that roll between the pump fluidic and a rotating elastomeric drive disk or others, as disclosed in U.S. Patent Application Serial Nos. 14/651,174, 14/646,300, 15/820,506 and 16/049,025, which are incorporated herein by reference in their entireties. The key point of the design is to have a sufficient number of actuating members that during the course of a full rotation no channel ever has no balls compressing it, thereby guaranteeing continuous pumping action with no depressurization of the downstream, pumped device, as could happen were a channel transiently open. On the other hand, when the pump is not operating, one or more balls on a respective channel prevent passive forward or reverse flow through the pump. In the embodiment shown, we use eleven balls to drive an eight

channel pump.

In one embodiment, the multichannel pump has a microcontroller that is in wired or wireless communications with the motor and hence actuator for controlling operations of the actuator.

5 FIG. 2E shows an implementation of the 8-channel pump using the circular, through-plate fluidics and the totally enclosed motor cartridge with inlet and outlet tubing connected to five of the eight channels. Three of the pump channels are not intubated with the requisite six tubes.

10 FIGS. 2F-2H show data that demonstrate the feasibility of an eight-channel, through-plate RPPM according to one embodiment of the invention. FIG. 2F shows the output of each channel as measured with a flow sensor, e.g., a Dolomite flow sensor, showing standard pulsatility. The addition of fluidic capacitors, either integral to the multi-pump fluidic chip or on an accessory chip, would dampen the pulsations. FIG. 2G shows the flowrate as a function of motor RPM. Each point is an average of about 160 sec. FIG. 2H shows that for the particular
15 pump tested, there was an angular dependence of the flowrate delivered by each of the pump channels arrayed around the circumference of the chip. The angular dependence of the flowrate shown in FIG. 2H could be the result of either a spatially regular variation in channel depth, device thickness, elastomer stiffness, or actuator angle, or non-planarity of the actuator head and the fluidic chip, as might occur from variations in the fabrication and mechanical tolerances in
20 the construction of the pump cartridge, all of which can be controlled by tightening the manufacturing tolerances. The addition of adjustable flow restrictors, such as TURN valves, either integral to the multi-pump fluidic chip 255 with input and output ports 250 as illustrated in FIG. 2I or on an accessory chip, would be used to balance the flows of each pumping channel.

This approach enables even more sophisticated pumping systems, for example where the
25 pumping channels are not all identical. Some of the channels could have larger cross-sectional areas to pump faster than other channels. In one embodiment, four of the channels with smaller cross-sectional areas could deliver fluid via a long needle to the bottom of four wells in a standard well plate, as indicated by the two tubes 603 and 604 illustrated for a single well in FIG. 6D. The other four pumping channels could have larger cross-sectional areas so that they would
30 pump faster as they withdraw fluid from the top of the fluid in the well by means of a shorter needle. Because the withdrawal needle is always pumping faster than the delivery one, the

withdrawal pump will be aspirating either water or air or a mixture of the two and would thereby provide level control for each well. This would allow a single motor cartridge to provide continuous perfusion to multiple wells in a standard well plate.

FIG. 2I shows an eight-channel pump chip 255, similar to that depicted in FIG. 2, wherein each individual circuit/channel is outfitted with a throttling valve 240, such as a TURN valve. Each of these valves 240 may be adjusted individually to alter flowrate through its corresponding channel and hence input and output ports 250. This feature may be used to balance flow across any or all channels which otherwise might be unbalanced do to restrictions or other sources of resistance or pressure elsewhere in the circuit. Throttling valves 240 may be located on the chip itself as shown in FIG. 2I, or may be included to a valving system as an off-board accessory.

FIG. 3A shows a pump array of nine 6-channel pump chips 355 placed in an alignment pocket or baseplate 330 according to one embodiment of the invention. In this embodiment, each pump chip 355 facilitates six independent pumping circuits, e.g., six fluidic channels 321. These pumps can be operated by an array of nine actuators and nine motors (not shown), or separated into individual pumps as illustrated in FIG. 2E. As shown in FIGS. 3B-3C, each channel 321 has a beginning portion approximately radial and connecting to a first port 321b, where the inner end of the radial channel portion connects to a middle, circumferential portion 321a of the channel 321 that performs the pumping action. The other end of the pumping channel 321 is connected to the inner end of a second, approximately radial channel, which in turn is connected to a second port 321c. The first and second ports 321b and 321c are respectively fluidic input and output ports, or fluidic output and input ports, depending upon the direction of rotation of an actuator (not shown). By having six of the input-output constructs on a single circular through-plate fluidic 355 mounted as shown in FIG. 2I, it is possible to have a single motor drive six pumps that can each pump a different fluid simultaneously. In addition, for each pump chip 355, a channel cross-sectional area of each channel 321 may be adjusted to produce balanced flowrates or different flowrates. Furthermore, the pump chip 355 also includes a plurality of protrusions, e.g., six protrusions 329 in this exemplary embodiment, configured to align the pump chip 355 to a fluidic chip support plate (not shown). Also, the protrusions 329 is further configured to function as a fluidic interface ports 301 and 302 connected to external fluidic sources, or another fluidic chips.

By aligning nine of the 6-channel pumps 355 in the baseplate 330, as shown in FIGS. 3A-3B, it would have fifty-four pumps that can each pump a different fluid simultaneously, at a different rate, by controlling each of nine actuators that operably coupled with the nine 6-channel pumps 355, respectively.

5 In addition, the pump array also includes a microcontroller (not shown) being in wired or wireless communications with the actuator of each of the nine peristaltic micropumps 355 for individually controlling operations of the plurality of peristaltic micropumps 355.

In one embodiment, alignment pockets accept pins/dowels or similar features, which can be used to align chip to actuator.

10 In one embodiment, the number of individual circuits may be adjusted to suit operational needs.

In one embodiment, chip features markings to identify individual circuits for ease of use.

In one embodiment, chip designed for use with 12-ball actuator.

15 In one embodiment, channel shape/length/spacing designed such that at least one actuating ball is always pinching each channel closed (positive flow).

FIG. 4A shows a 6-channel pump chip and its 180° rotation relative to the baseplate, which illustrating each channel position relative to the baseplate before and after the 180° rotation is different. FIG. 4B shows the flowrates of each channel before (cross symbol) and after the 180° rotation (circle symbol), in which the left column of graphs presents the flowrates of different channels at a same position relative the baseplate, while the right column are the flowrate of a same channel at different positions relative to the baseplate. For example, the top panel of the left column shows the flowrates of channel 1 at position A of the pump chip before the rotation, and channel 4 at position A of the pump chip before the 180° rotation, respectively, which both the flowrates are substantially different. The top panel of the right column shows the flowrates of channel 2 at position B of the pump chip before the rotation, and channel 2 at position E of the pump chip before the 180° rotation, respectively, which both the flowrates are substantially same. These results clearly indicate that inter-channel variability in the flowrate appears to be intrinsic to the fluidic chip, rather than position of channels relative to baseplate.

25 FIGS. 5A-5F show further characterization of the flowrates of an 8-channel pump according to one embodiment of the invention. FIG. 5A shows the ports tested in FIG. 5C, and FIG. 5B shows the ports tested in FIG. 5F. The experiments that generated these data were

conducted to better understand the characteristics of the 8-channel pump, namely the relative flowrates through each channel, and to identify the source(s) of any variation (variations in thickness across the chip/variation in relative channel depth/ variations in standoff length/variations in actuator altitude, etc.). Deionized water was delivered by the 8-channel
5 pump to the Sensirion flow sensor to measure and record flow rates. FIGS. 5C and 5D show the resulting data. The vertical height of each band represents the amplitude of the fluctuations associated with the peristaltic pumping action. Theoretically the flow rates of each channel would be identical, but in reality for this prototype, they differed.

The differences in the flow rates of each pump arose either from non-planarity of the
10 molded fluidic chip, or manufacturing tolerances in the motor cartridge components. To test whether the flow rate differences was due to fluidic planarity or to hardware of the pump motor frame, the pump was rotated 180°, and it was determined that one side of the fluidic chip exhibited less compression of the channels than the other. FIGS. 5E and 5F show how the outputs of the eight pumps depended upon rotation of the fluidic chip as shown in FIG. 4A. It
15 was concluded from these tests that the differences primarily from the manufacturing tolerances of motor cartridge components, which could be readily tightened.

When using pumps to fill or empty a small volume, such as a well in a 96-well plate, the amount of fluid delivered and fluid removed must be carefully controlled, lest the well be either inadvertently over-filled or emptied. FIGS. 6A-6C shows schematically various views of a push-
20 pull pump chip 620 according to one embodiment of the invention. This chip 620 may be connected to tubes 603, 604 in a reservoir 605 as shown in FIG. 6D, and is designed to continually supply and maintain its volume. The pump chip features two isolated channels— aspiration channel 621 and an injection channel 6—31, whose actuated lengths (and therefore volume, and therefore flowrate) differ by nature of their differing radiuses. Isolated channels
25 631, 621 are actuated by a single roller head (not shown) with aspiration circuit 621 designed to pump at 20% higher rate than injection circuit 631, so that the depth of liquid 606 contained in reservoir 605 never exceeds the elevation of the mouth of aspiration straw 603. This can, in one embodiment, be accomplished or adjusted by making the channels either wider or deeper. A double-ridge (not shown) superimposed over channels 631, 621 may be incorporated to reduce
30 friction and improve actuator-to-channel alignment tolerance. The push-pull pump can be used without any modification in the motor cartridges described above. The embodiment shown could

be used to maintain fresh culture media in each of 24 wells of a transwell culture of a bioprinted tissue construct (e.g., skin) for long periods of time without the need to remove the well plate from an incubator. This design allows a single pumping channel 631 to deliver the media at the desired flow, with the fluid level not set by the speed of the aspiration pump channel 621 but by the height of the aspiration channel 603.

Three eight-channel pumps as shown in FIG. 2A or twelve push pull pumps as shown in FIG. 6A could be used to deliver and remove fluid from a 12-well plate containing, for example, skin that was bioprinted on Transwell inserts. FIGS. 7A-7B show a conceptual drawing for a six-channel push-pull pump and actuator that could do the same with only two motors to deliver and remove fluid from each well of a twelve-well plate. Four motors and a single four-motor controller could address a 24-well plate. This layout has the same angular spacing on the outer race as the eight-port pump.

As shown in FIGS. 7A-7B, the pump chip 755 has twelve channels with six outer channels 721 and six inner channels 731 and an actuator 710 with eleven outside balls 715 placed on along a circular, outside ball track 716 of a bearing cage and eleven inside balls 717 placed along a circular, inside ball track 718 of the bearing cage. Each of the six outer channels 721 has a middle, circumferential portion 721a aligned in a circle that is operably under the outside ball track 716, and each of the six inner channels 731 has a middle, circumferential portion 731a aligned in a circle that is operably under the inside ball track 718. Other number of the inside and outside balls can also be utilized to practice the invention, as long as a number of balls (actuating members) is sufficient so that during the course of a full rotation no channel ever has no balls compressing it, thereby guaranteeing continuous pumping action with no depressurization of the downstream, pumped device, as could happen were a channel transiently open.

In one embodiment, the inner channels 731 have direct access to the outside of the pump fluidic chip. The reduction from eight to six channels provides the space required for the inner channels 731 to cross to the outside. Traces coming from the inside race 732 past the outside ball track 715 and may need to be deeper or wider as they cross the outside ball track 716 so as to not have their flow blocked when the outer balls 715 of the actuator 710 cross the channels to the inside. Depending upon the spacing's and compression forces, it might be possible to use a single race of larger balls that blocks both channels at the same time.

Using the through-plate circular chip design, the inner channels could be accessed from the inside of the ball races, and the outer channels from the outside. This would obviate the need to compensate for the outer actuating balls crossing over the fluidics from the inner channel.

In this embodiment of a multichannel pumps, it would be possible to adjust the length of the pumping regions so that all channels on the multichannel pump in FIG. 7B would be pumped at the same flowrate. This, as well as the pump in FIG. 2A, would enable a push-pull multipump to actively deliver and actively remove fluid from one side of a two-chambered bioreactor such as a neurovascular unit. Another channel on the push-pull pump would do the same for the other chamber. This would address the known problem in maintaining balance between both sides of such a reactor, since the chambers are separated by a semi-permeable membrane whose permeability is determined not only by the sizes of the pores but also by the degree of confluence of the cells grown on either or both sides of the membrane. When a pair of standard peristaltic or syringe pumps is used only to deliver fluid to the two chambers, and the passive outflow is governed by the various hydraulic resistances in the bioreactor and tubing, it is often the case that while identical flows are delivered to both chambers, the outflows are imbalanced. This indicates that fluid is being pumped not only through one chamber from inlet to outlet, but also across the membrane into the other chamber to its outlet. This cross-membrane flow can be deleterious to the cells being cultured on the membrane and can adversely affect the validity of the bioreactor as a model, for example, of a neurovascular unit. Hence a pair of matched push-pull pumps would drive each two-chamber bioreactor, and the number of bioreactors serviced by a single multi-pump would depend upon the number of push-pull pump pairs on the fluidic chip.

In certain embodiments, the different type actuators can be also used, which the numbers of actuating members, such as cam followers and rollers, are mounted on shafts (sockets) around a single hub.

For example, FIG. 8 shows an axle-driven, cam-follower-bearing type actuator used to implement a multichannel pump according embodiments of the invention, where the actuator has a cam (motorized hub) 810 and a plurality of cam followers 815 spaced-equally mounted onto shafts 816 of the cam 810.

FIG. 9 shows an axle-driven, roller-bearing type actuator used to implement a multichannel pump according embodiments of the invention, where the actuator has a wheel (motorized hub) 910 and a plurality of rollers 915 mounted into the spaced-equally sockets 916

of the wheel 910.

FIG. 10 shows another embodiment of an actuator to implement a multichannel pump according to the invention, which includes a motorized hub 1010 and a plurality of cylindrical rollers 1015 mounted into spaced-equally mounted onto shafts 1016 of the hub 1010.

FIGS. 11A-11C shows yet another embodiment of an actuator to implement a multichannel pump according to the invention. The actuator has a roller thrust bearing cage 1110 having a plurality of sockets 1112 and rolling members configured as cylindrical rollers 1115 coupled, for example, to the cage via pins 1116 that pass through a central hole 1117 in each of the cylindrical rollers 1115. In one embodiment shown in FIG. 11D, the cylindrical rollers 1015 (FIG. 10) or 1115 (FIG. 11B-11C) may be replaced with conical rollers 1115'.

For such multichannel pumps as disclosed above, when the actuator rotates, the rolling members are also rotating relative to the rolling bearing cage and middle, circumferential channel portions of the multiple channels. During operation, rolling members, such as 815, 915, 1015, 1115 or 1115', engage and compress the middle, circumferential channel portions of the multiple channels and pump fluids through the multiple channels simultaneously at different flowrates. When the pump is not in operation, one or more rolling members placed on the circumferential channel portions of the multiple channels prevent passive forward or reverse flow through the pumps.

The foregoing description of the exemplary embodiments of the invention has been presented only for the purposes of illustration and description and is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in light of the above teaching.

The embodiments were chosen and described in order to explain the principles of the invention and their practical application so as to enable others skilled in the art to utilize the invention and various embodiments and with various modifications as are suited to the particular use contemplated. Alternative embodiments will become apparent to those skilled in the art to which the invention pertains without departing from its spirit and scope. Accordingly, the scope of the invention is defined by the appended claims rather than the foregoing description and the exemplary embodiments described therein.

CLAIMS

What is claimed is:

1. A peristaltic micropump, comprising:
 - a plurality of channels, wherein each channel is flexible, has a middle channel portion, and is operably in fluidic communications with a first port and a second port, and wherein the middle channel portions of the plurality of channels are arranged in one or more concentric circles; and
 - an actuator comprising a bearing assembly driven by a motor, wherein the bearing assembly comprises a plurality of rolling members and a bearing accommodating member for accommodating the plurality of rolling members, wherein the actuator is positioned in relation to the plurality of channels such that when the bearing accommodating member rotates, the plurality of rolling members rolls along the one or more concentric circles of the middle channel portions of the plurality of channels to cause individually fluids to transfer between the first port and the second port of each of the plurality of channels simultaneously at different flowrates.
2. The peristaltic micropump of claim 1, wherein each channel is in fluidic communications with a respective fluid, wherein one of the first and second ports of each channel is an input port for inputting the respective fluid, and the other is an output port for outputting the respective fluid at a predetermined flowrate with a predetermined volume.
3. The peristaltic micropump of claim 1, wherein the plurality of channels is formed in a layer of a flexible material.
4. The peristaltic micropump of claim 3, wherein the flexible material comprises a polymer of polydimethylsiloxane (PDMS), or its derivatives.
5. The peristaltic micropump of claim 1, wherein the actuator is configured such that when the actuator is activated, during a full rotation of the bearing accommodating member,

each channel is being compressed by at least one rolling member.

6. The peristaltic micropump of claim 5, wherein when the actuator is deactivated, each channel is compressed by one or more rolling members as so to prevent passive forward or reverse flows through the peristaltic micropump.
7. The peristaltic micropump of claim 1, wherein each channel has a cross-section area that determines a flowrate of a fluid flowing through said channel, and wherein the cross-section area is in any one of geometric shapes.
8. The peristaltic micropump of claim 1, wherein when the bearing accommodating member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.
9. The peristaltic micropump of claim 1, wherein the bearing accommodating member comprises a bearing cage defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is accommodated in the plurality of spaced-apart openings.
10. The peristaltic micropump of claim 9, wherein the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the plurality of channels.
11. The peristaltic micropump of claim 10, wherein each of the plurality of rolling members comprises a ball, or a roller.
12. The peristaltic micropump of claim 1, wherein the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.
13. The peristaltic micropump of claim 12, wherein each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.

14. The peristaltic micropump of claim 1, being a rotary planar peristaltic micropump (RPPM).
15. The peristaltic micropump of claim 1, further comprising a microcontroller being in wired or wireless communications with the actuator for controlling operations of the actuator.
16. A pump array, comprising:
 - a plurality of peristaltic micropumps arranged in a baseplate, wherein each peristaltic micropump is according to any one of claims 1-14; and
 - a microcontroller being in wired or wireless communications with the actuator of each of the plurality of peristaltic micropumps for individually controlling operations of the plurality of peristaltic micropumps.
17. A peristaltic micropump, comprising:
 - a plurality of channels configured to transfer one or more fluids; and
 - an actuator configured to engage the plurality of channels, and rotate about a central axis, wherein the actuator comprises a plurality of rolling members and a driving member configured such that when the driving member rotates, the plurality of rolling members rolls along the plurality of channels to cause individually the one or more fluids to transfer through each of the plurality of channels simultaneously at different flowrates, wherein during a full rotation of the driving member, each channel is being compressed by at least one rolling member.
16. The peristaltic micropump of claim 15, wherein the plurality of channels is formed in a layer of a flexible material.
17. The peristaltic micropump of claim 16, wherein the flexible material comprises a polymer of polydimethylsiloxane (PDMS), or its derivatives.




18. The peristaltic micropump of claim 15, wherein each channel has a cross-section area that determines a flowrate of a fluid flowing through said channel, and wherein the cross-section area is in any one of geometric shapes.
19. The peristaltic micropump of claim 15, wherein the plurality of rolling members is disposed between the plurality of channels and the driving member.
20. The peristaltic micropump of claim 15, wherein each channel has a middle channel portion, and wherein the middle channel portions of the plurality of channels are arranged in one or more concentric circles.
18. The peristaltic micropump of claim 15, wherein when the driving member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.
19. The peristaltic micropump of claim 15, wherein the driving member comprises a bearing accommodating member configured to accommodate the plurality of rolling members.
20. The peristaltic micropump of claim 19, wherein the bearing accommodating member comprises a bearing cage defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is accommodated in the plurality of spaced-apart openings.
21. The peristaltic micropump of claim 20, wherein the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the plurality of channels.
22. The peristaltic micropump of claim 21, wherein each of the plurality of rolling members comprises a ball, or a roller.

23. The peristaltic micropump of claim 19, wherein the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.
24. The peristaltic micropump of claim 23, wherein each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.
25. The peristaltic micropump of claim 15, being a rotary planar peristaltic micropump (RPPM).
26. The peristaltic micropump of claim 15, wherein the driving member is driven by a motor.
27. The peristaltic micropump of claim 20, further comprising a microcontroller being in wired or wireless communications with the actuator for controlling operations of the actuator.
28. A pump array, comprising:
a plurality of peristaltic micropumps arranged in a baseplate, wherein each peristaltic micropump is according to any one of claims 15-27; and
a microcontroller being in wired or wireless communications with the actuator of each of the plurality of peristaltic micropumps for individually controlling operations of the plurality of peristaltic micropumps.
29. A push-pull micropump, comprising:
one or more pairs of channels configured to transfer one or more fluids, each channel pair having an aspiration channel and an injection channel; and
an actuator configured to engage the one or more pairs of channels, wherein the actuator comprises a plurality of rolling members and a driving member configured such that when the driving member rotates, the plurality of rolling members rolls along the one or more pairs of channels to cause individually the one or more fluids to transfer

through each channel pair simultaneously at different flowrates or the same flowrate, depending upon actuated lengths of the aspiration and injection channels of each channel pair, wherein an actuated length of a channel is defined by a length of the channel along which the plurality of rolling members rolls during a full rotation of the driving member.

30. The push-pull micropump of claim 29, wherein each channel pair is configured such that the actuated length of the aspiration channel is longer than that of the injection channel, whereby the aspiration and injection channels of each channel pair have different flowrates.
31. The push-pull micropump of claim 29, wherein each channel pair is configured such that the actuated length of the aspiration channel is same as that of the injection channel, whereby the aspiration and injection channels of each channel pair have the same flowrate.
32. The push-pull micropump of claim 29, wherein each channel has a middle channel portion, and wherein the middle channel portions of the aspiration and injection channels of each channel pair are arranged as segments of two concentric circles with different radii.
33. The push-pull micropump of claim 29, wherein when the driving member rotates at a central axis, each rolling member operably rolls about a respective axis that is not parallel to the central axis.
34. The push-pull micropump of claim 29, wherein the driving member comprises a bearing accommodating member configured to accommodate the plurality of rolling members.
35. The push-pull micropump of claim 34, wherein the bearing accommodating member comprises a bearing cage defining a plurality of spaced-apart openings thereon, and the plurality of rolling members is accommodated in the plurality of spaced-apart openings.

36. The push-pull micropump of claim 35, wherein the plurality of spaced-apart openings defines one or more concentric circles that are operably coincident with the one or more concentric circles of the middle channel portions of the one or more pairs of channels.
37. The push-pull micropump of claim 36, wherein each of the plurality of rolling members comprises a ball, or a roller.
38. The p push-pull micropump of claim 34, wherein the bearing accommodating member comprises a hub having a plurality of shafts radially protruded from the hub, and the plurality of rolling members is rotatably attached to the plurality of shafts, respectively.
39. The push-pull micropump of claim 38, wherein each of the plurality of rolling members comprises a can follower, a cylindrical roller, or conical roller.
40. A pump array, comprising:
 - a plurality of push-pull micropumps arranged in a baseplate, wherein each push-pull micropumps is according to any one of claims 29-39; and
 - a microcontroller being in wired or wireless commutations with the actuator of each of the plurality of push-pull micropumps for individually controlling operations of the plurality of push-pull micropumps.

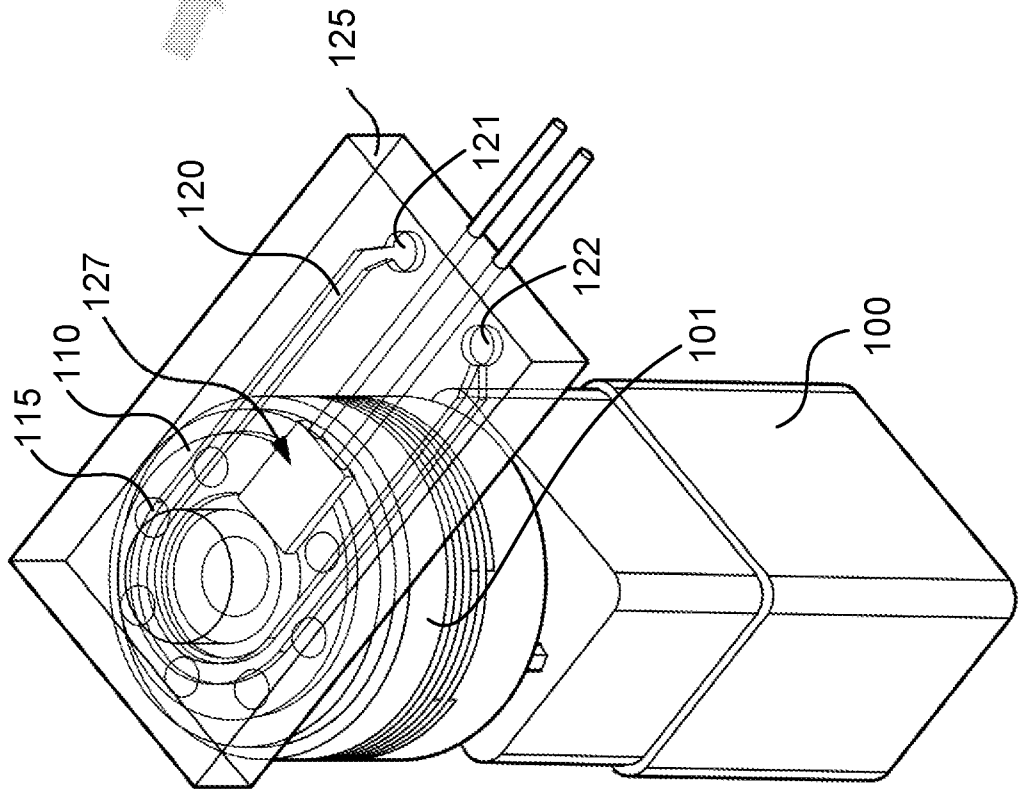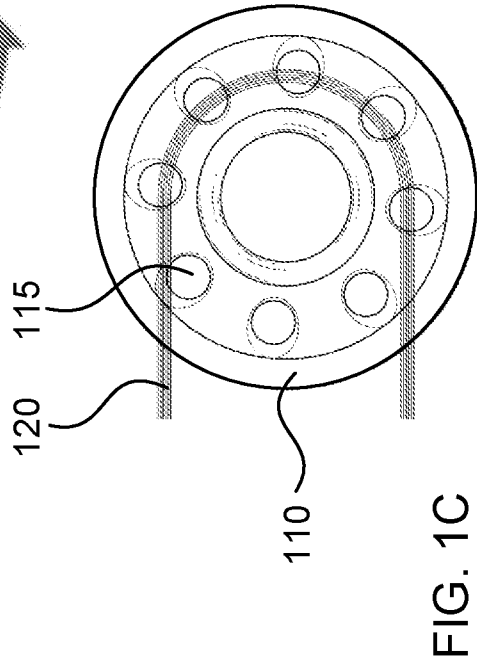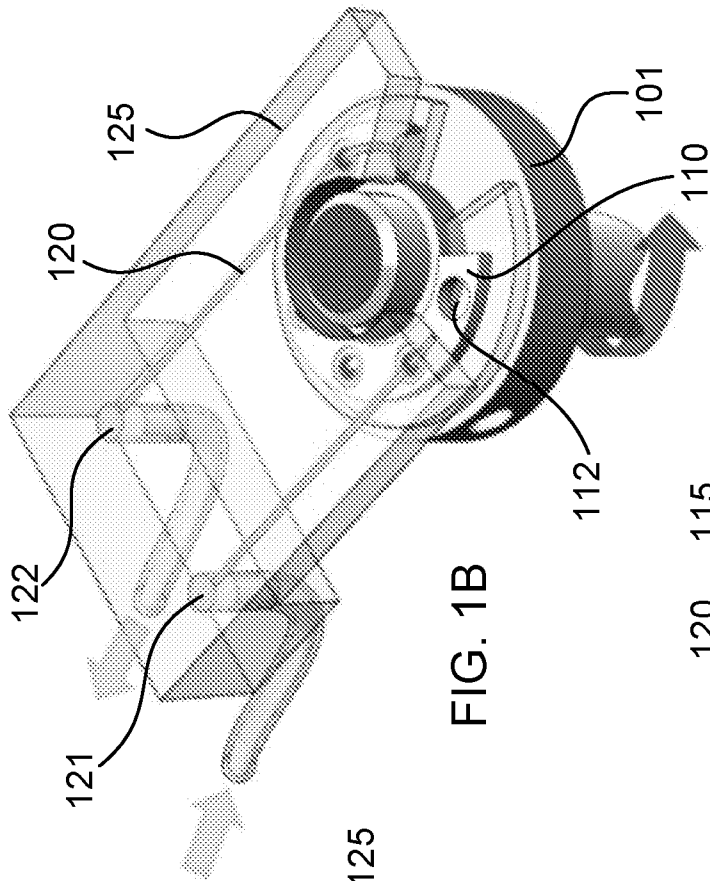

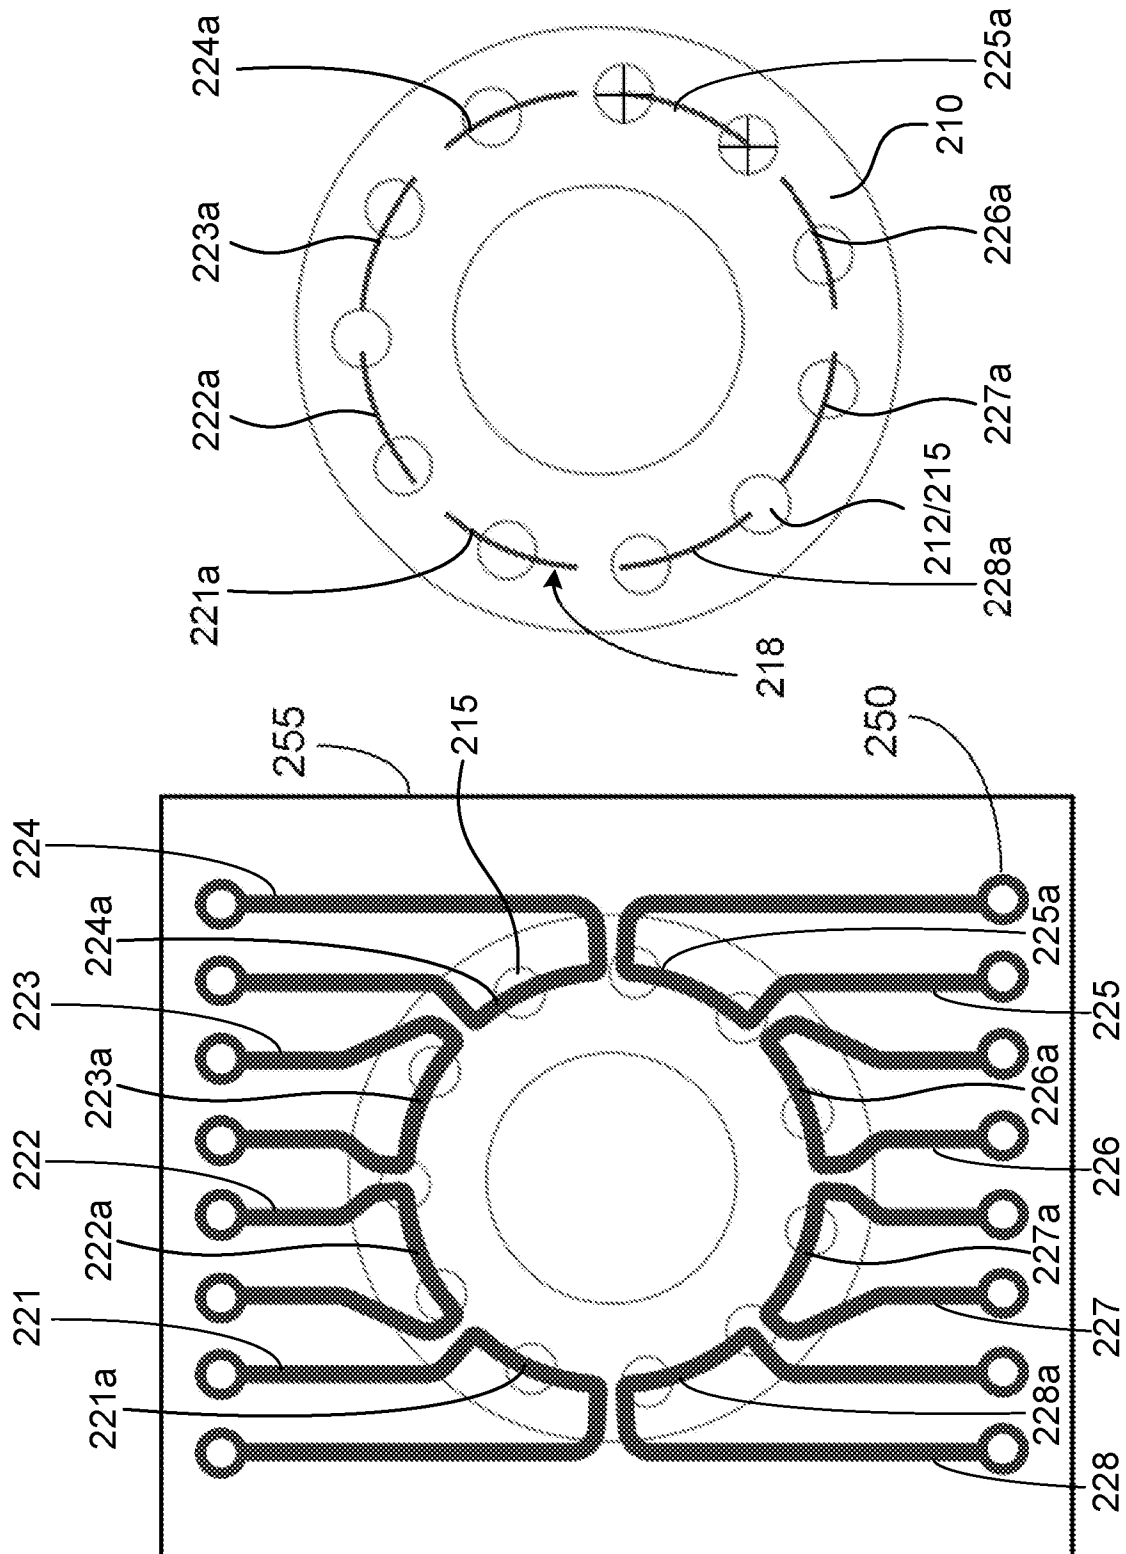


FIG. 2B

FIG. 2A

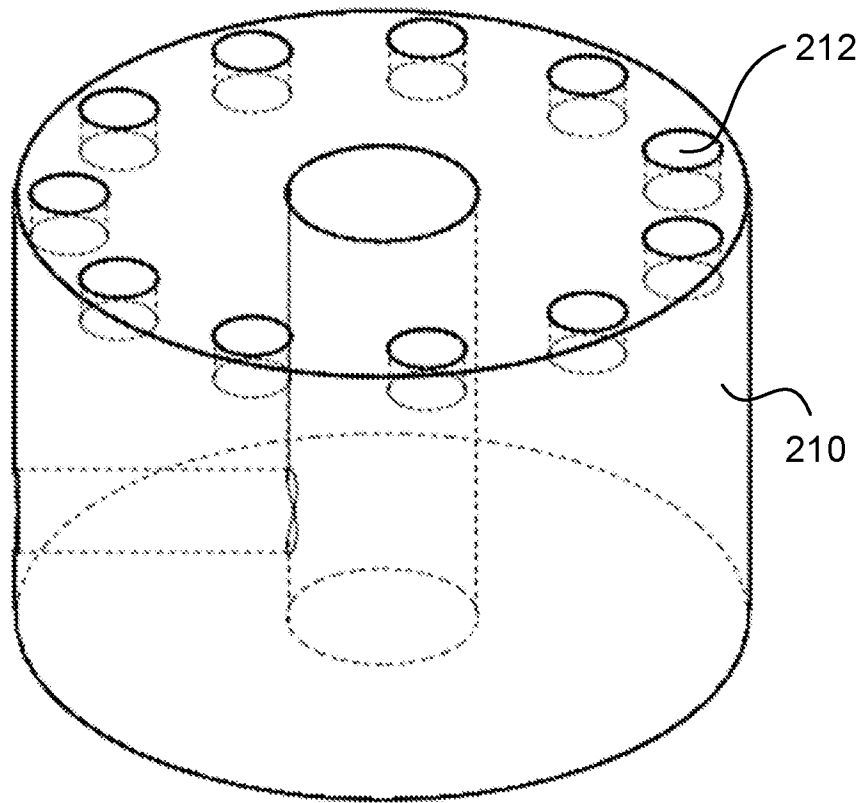


FIG. 2C

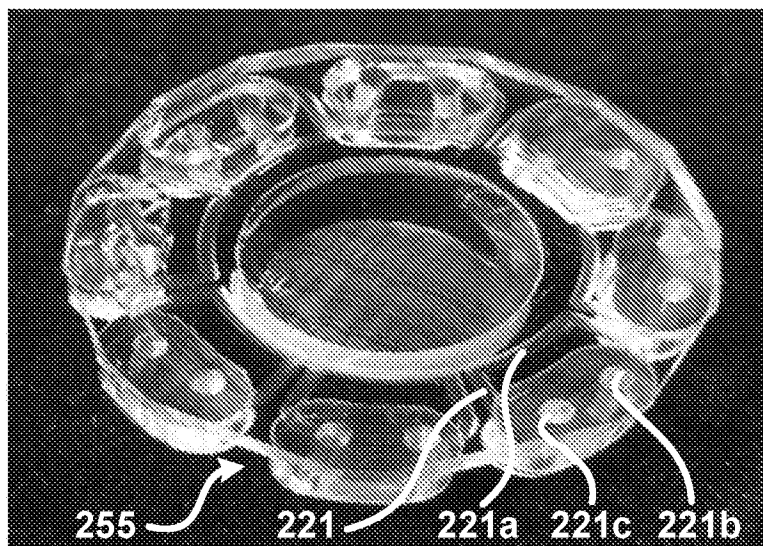


FIG. 2D

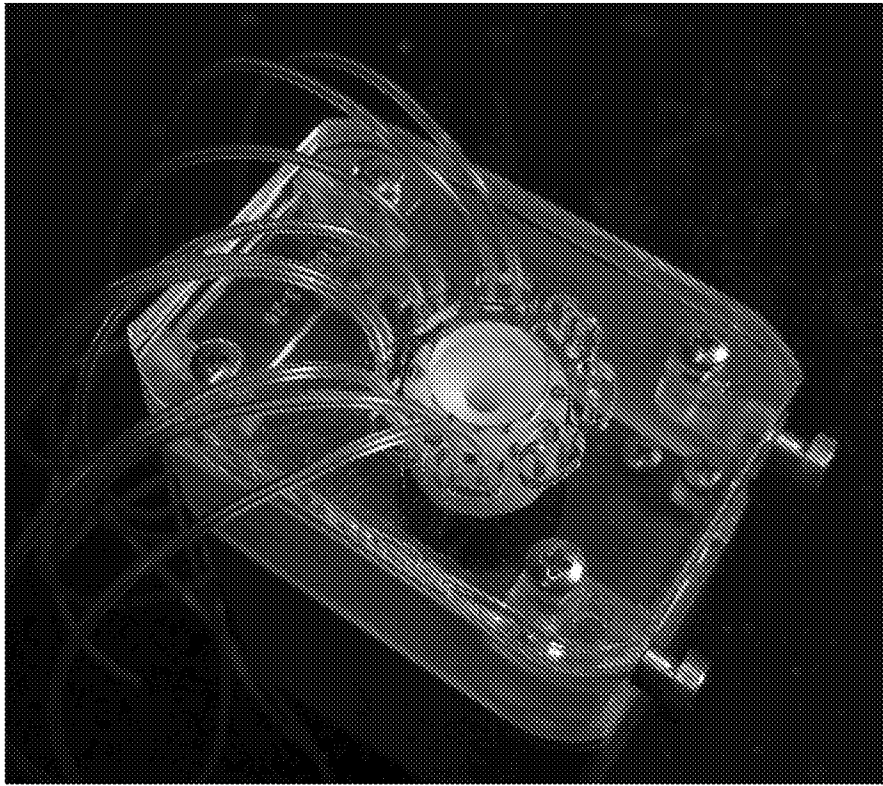


FIG. 2E

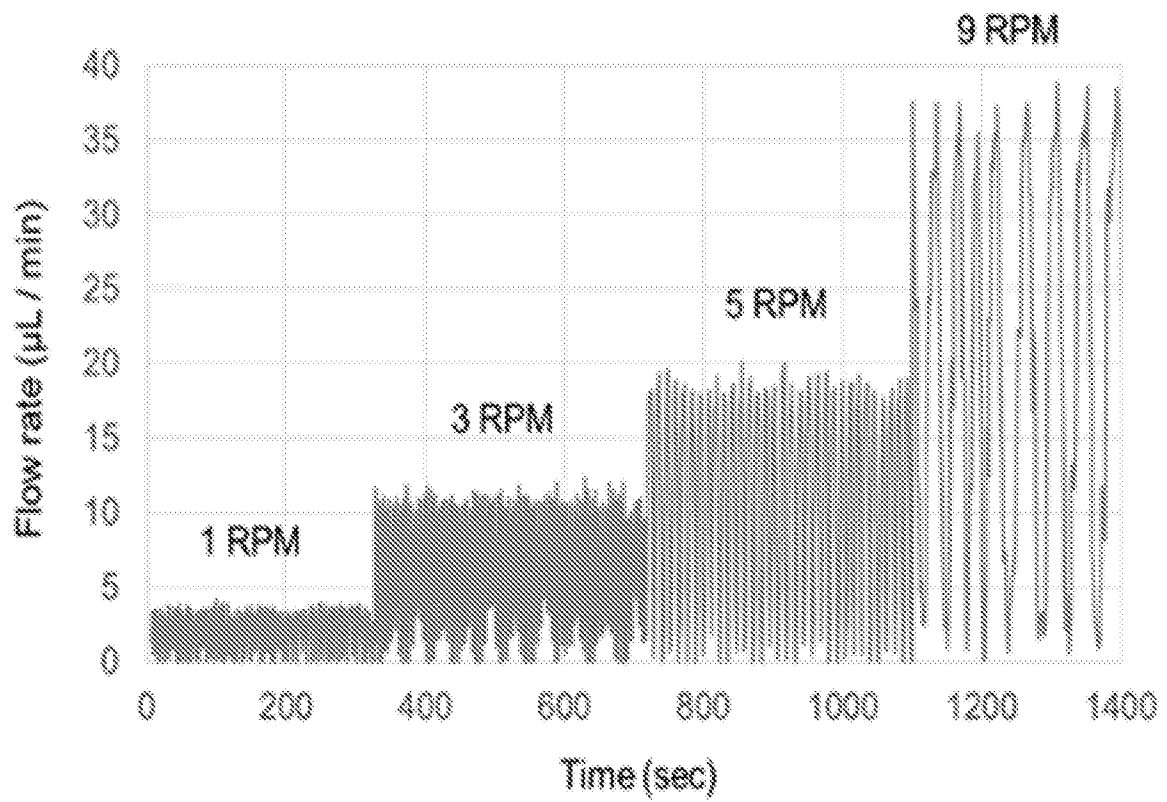


FIG. 2F

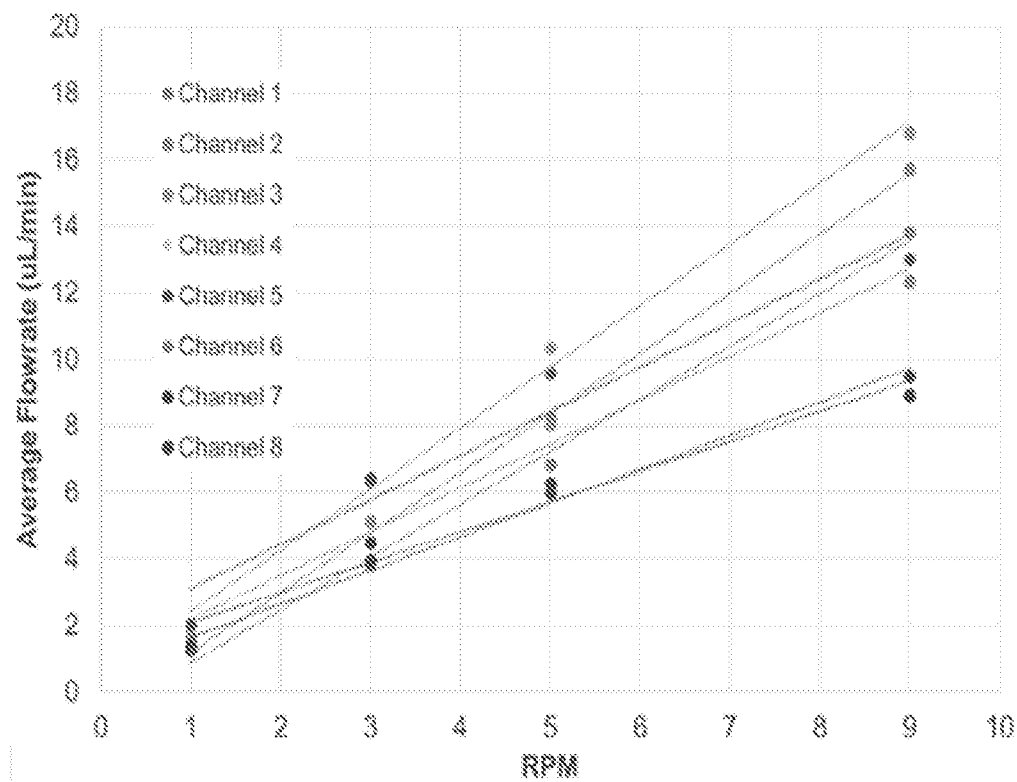


FIG. 2G

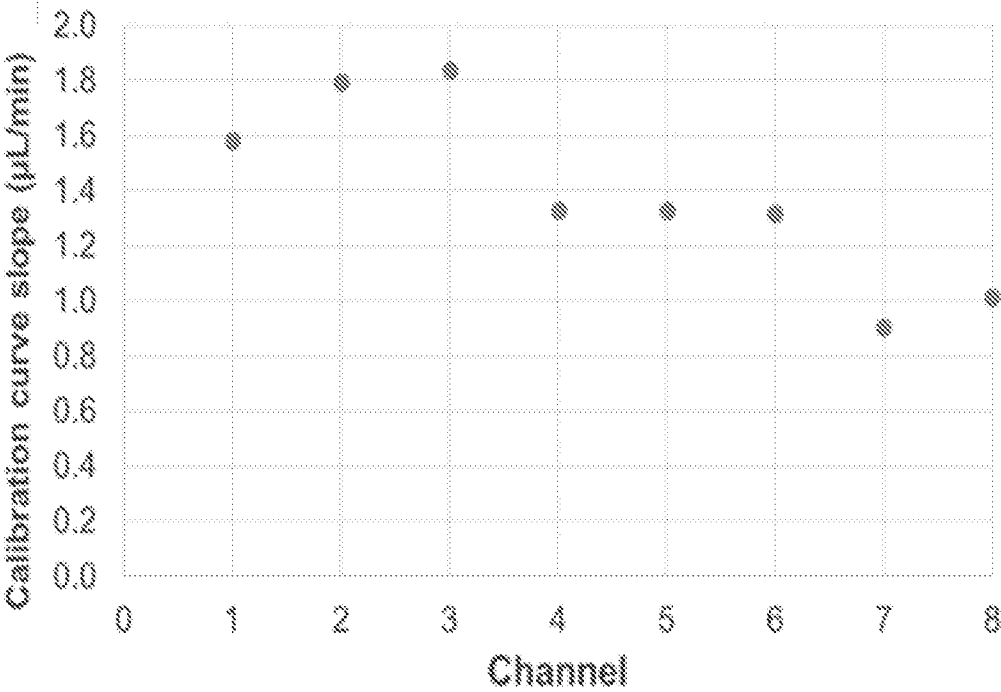


FIG. 2H

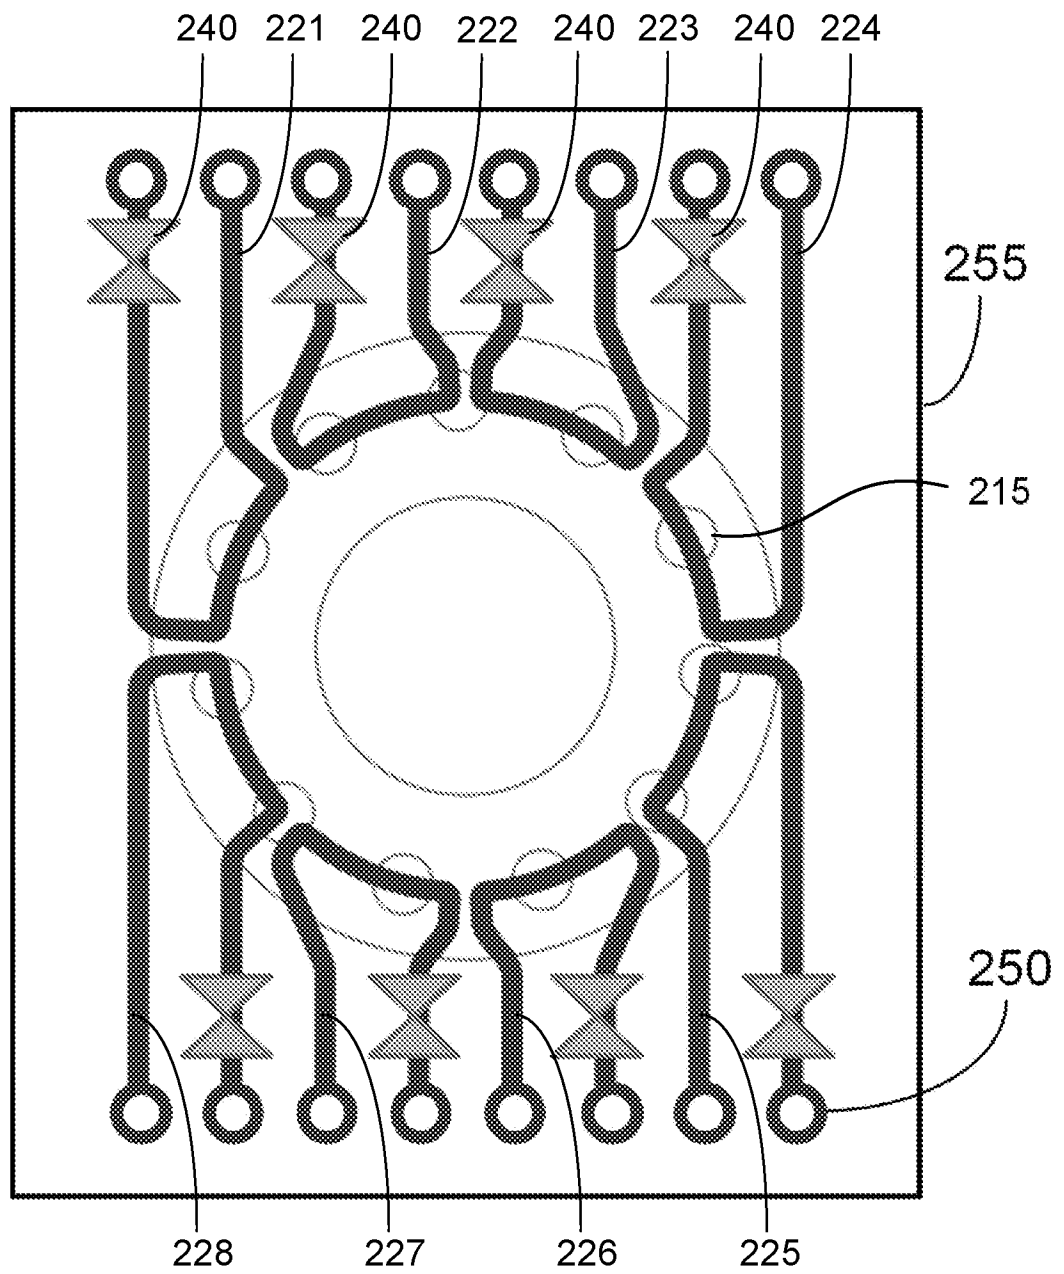


FIG. 2I

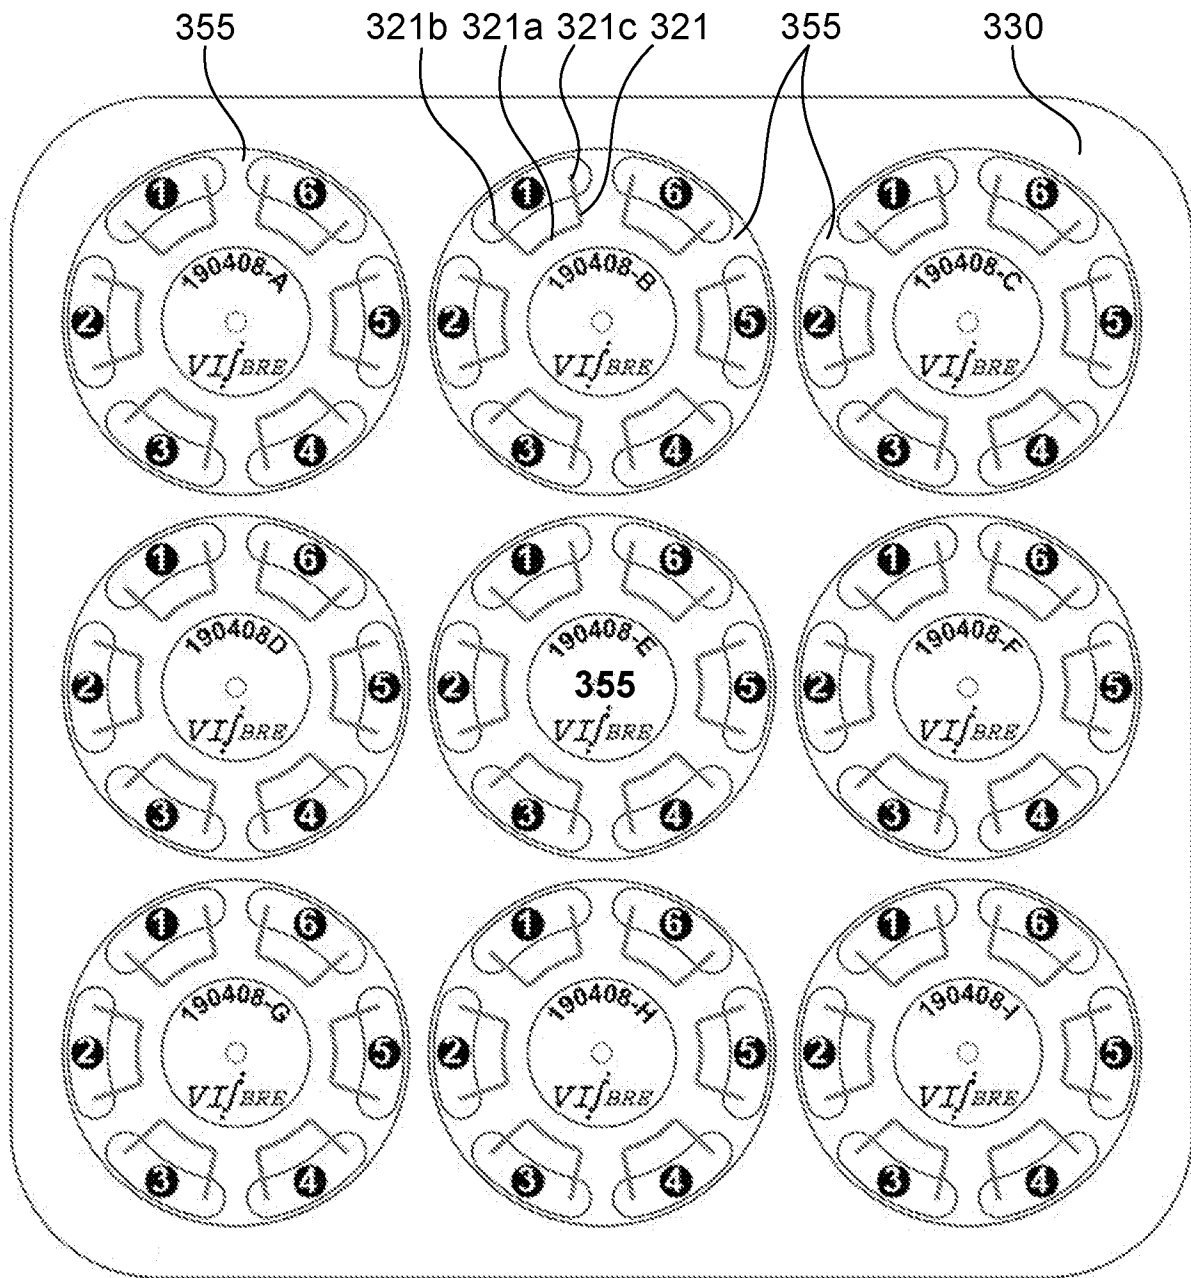


FIG. 3A

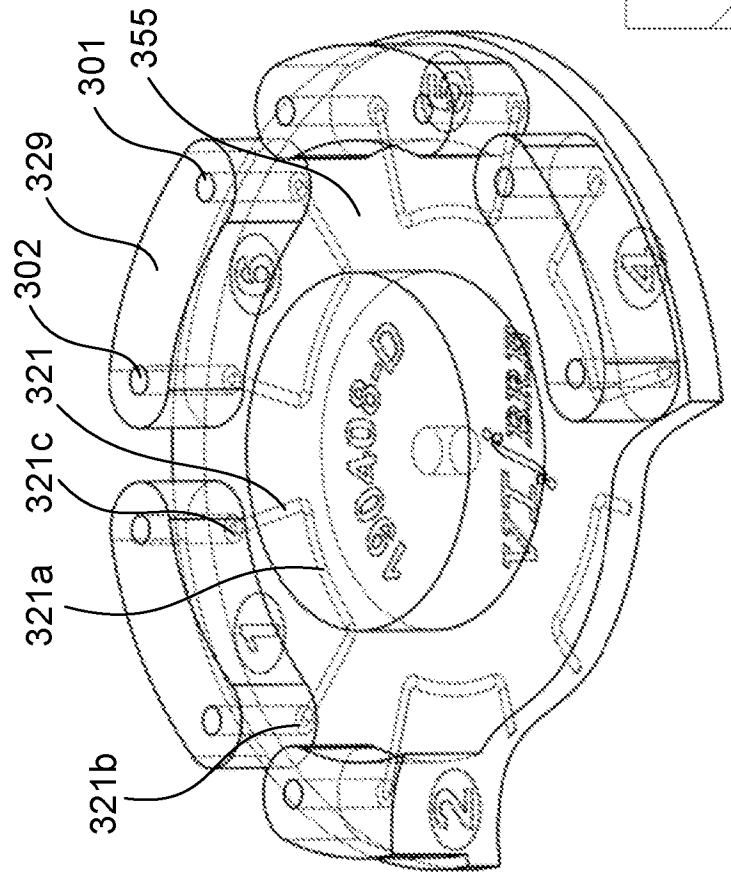


FIG. 3B

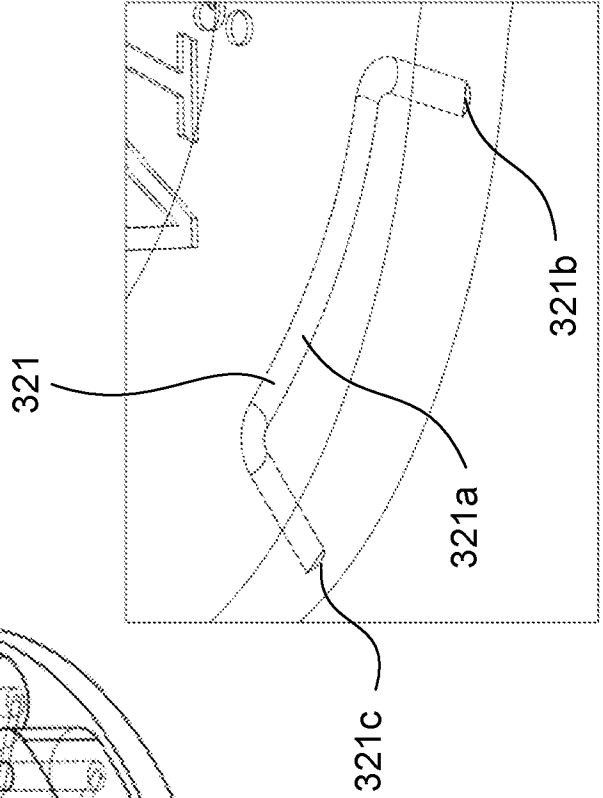


FIG. 3C

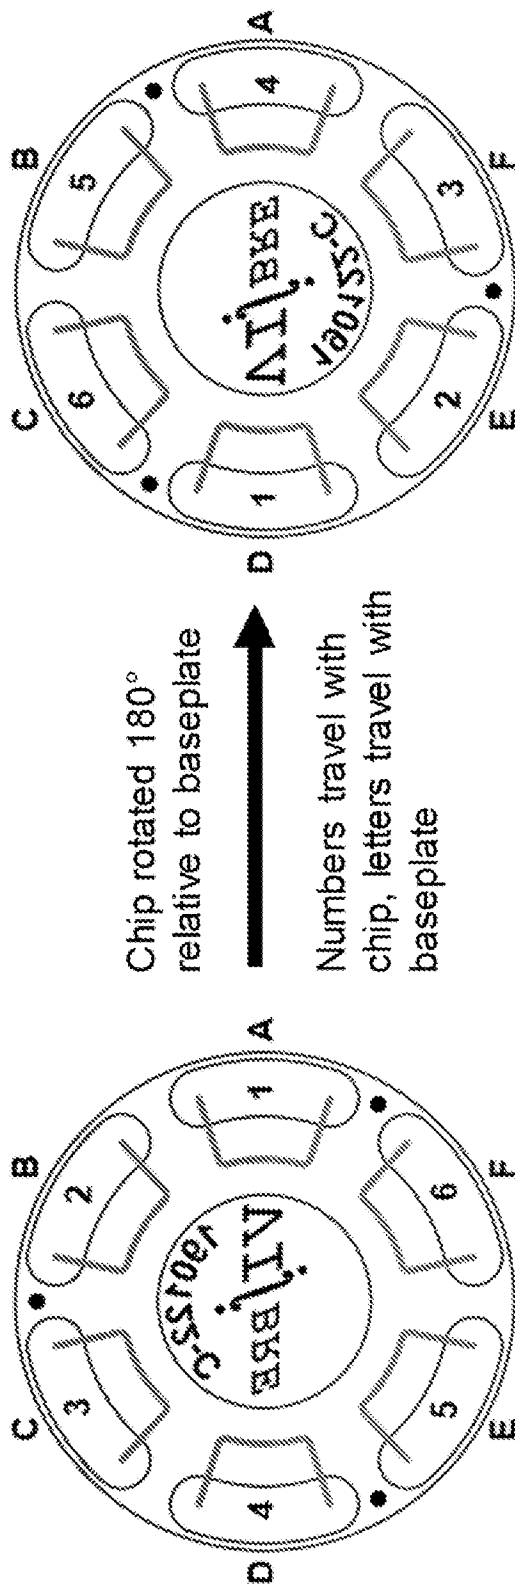


FIG. 4A

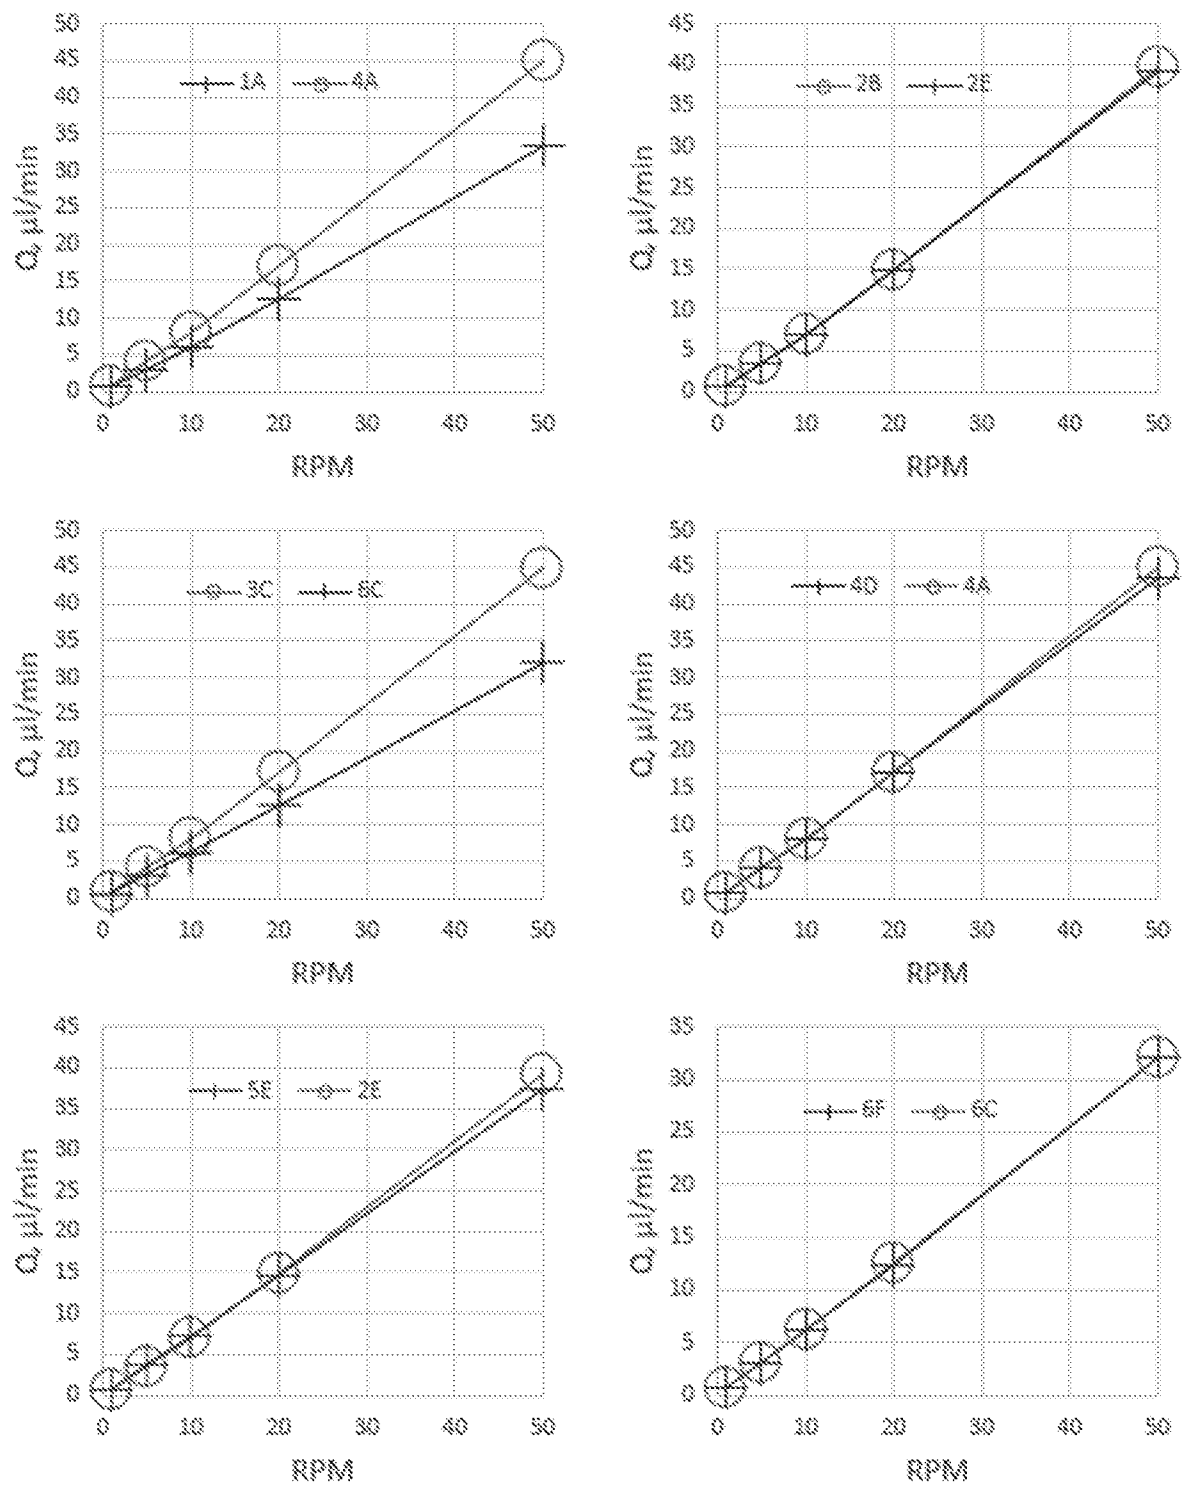


FIG. 4B

I = Inlet
O = Outlet

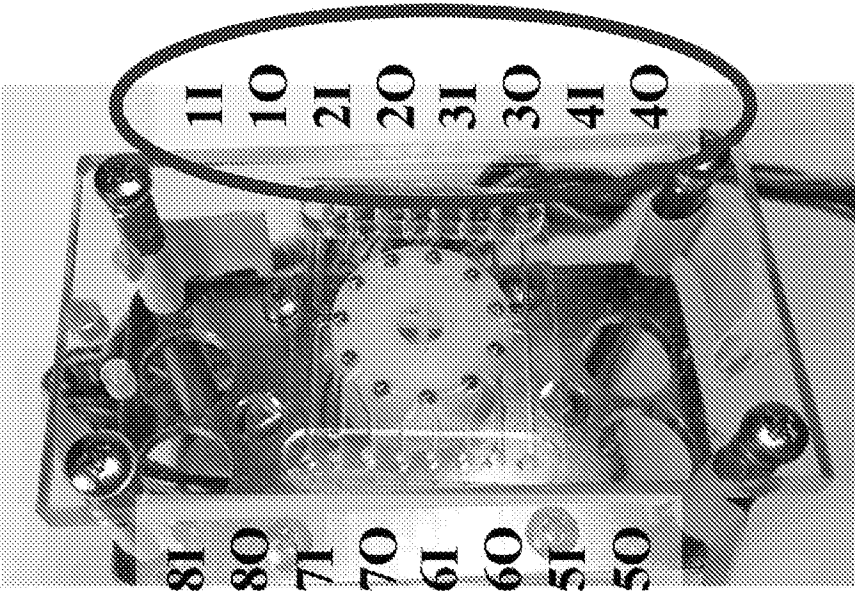


FIG. 5A

I = Inlet
O = Outlet

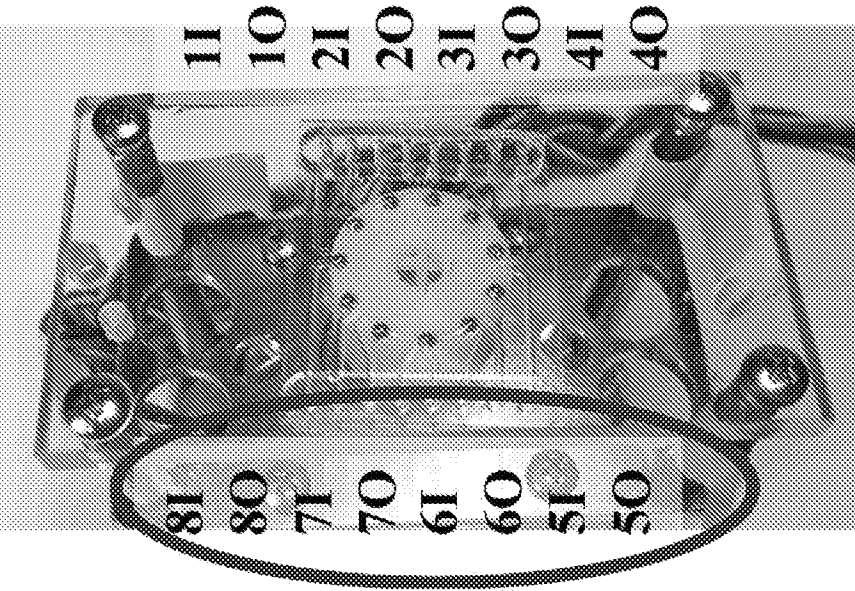


FIG. 5B

8 Channel Pump Data first Data Collection

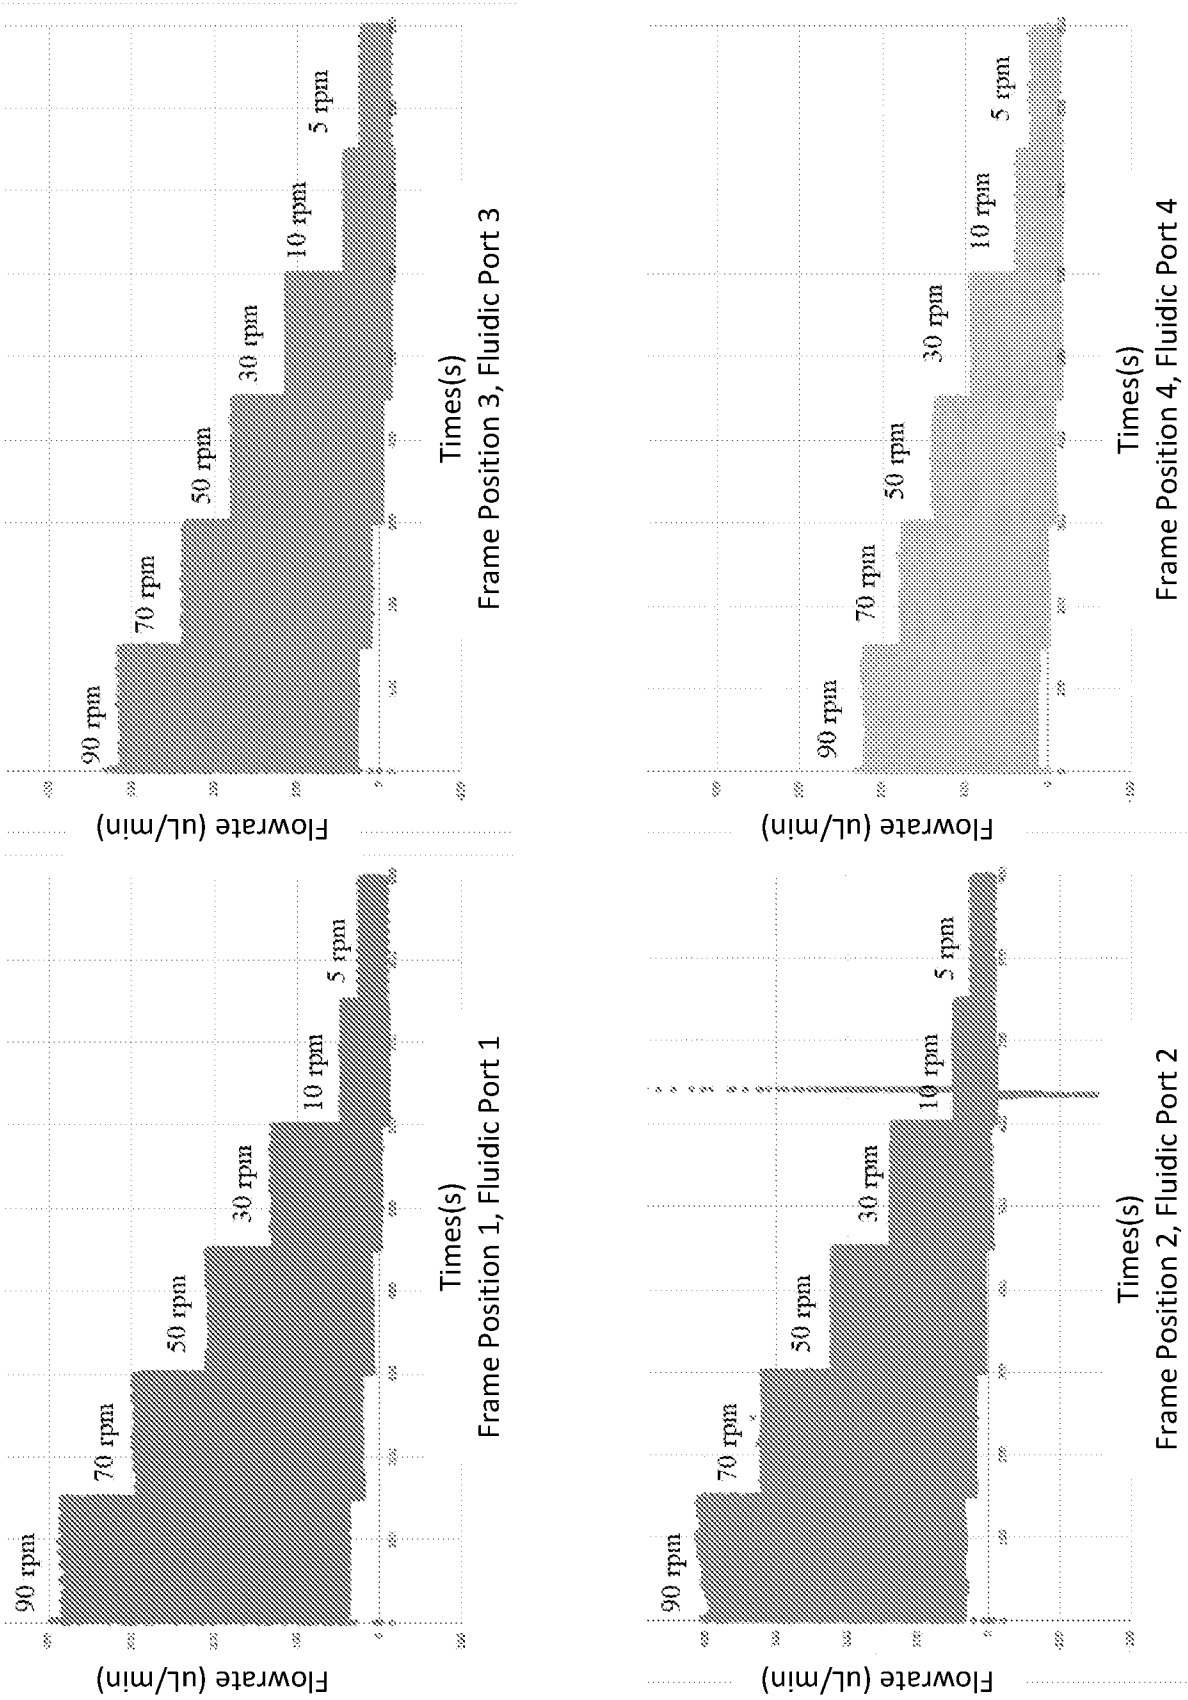


FIG. 5C

8 Channel Pump Data first Data Collection

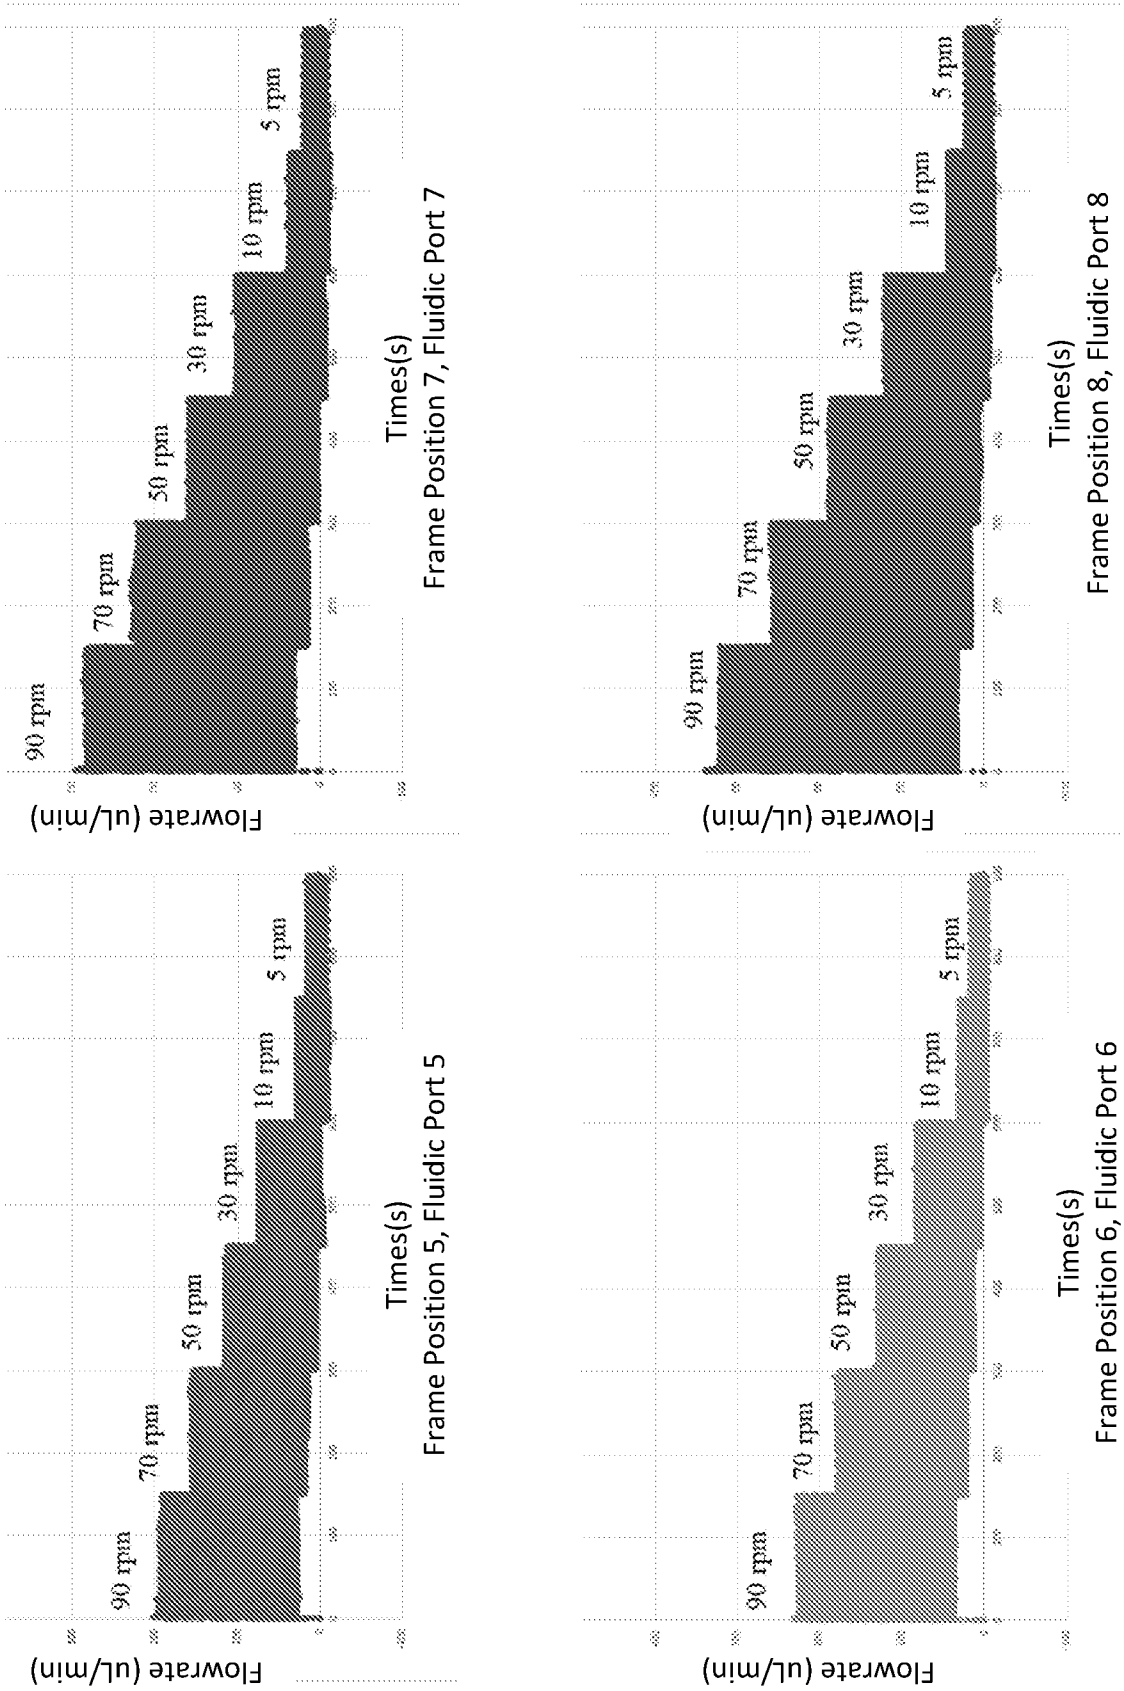


FIG. 5D

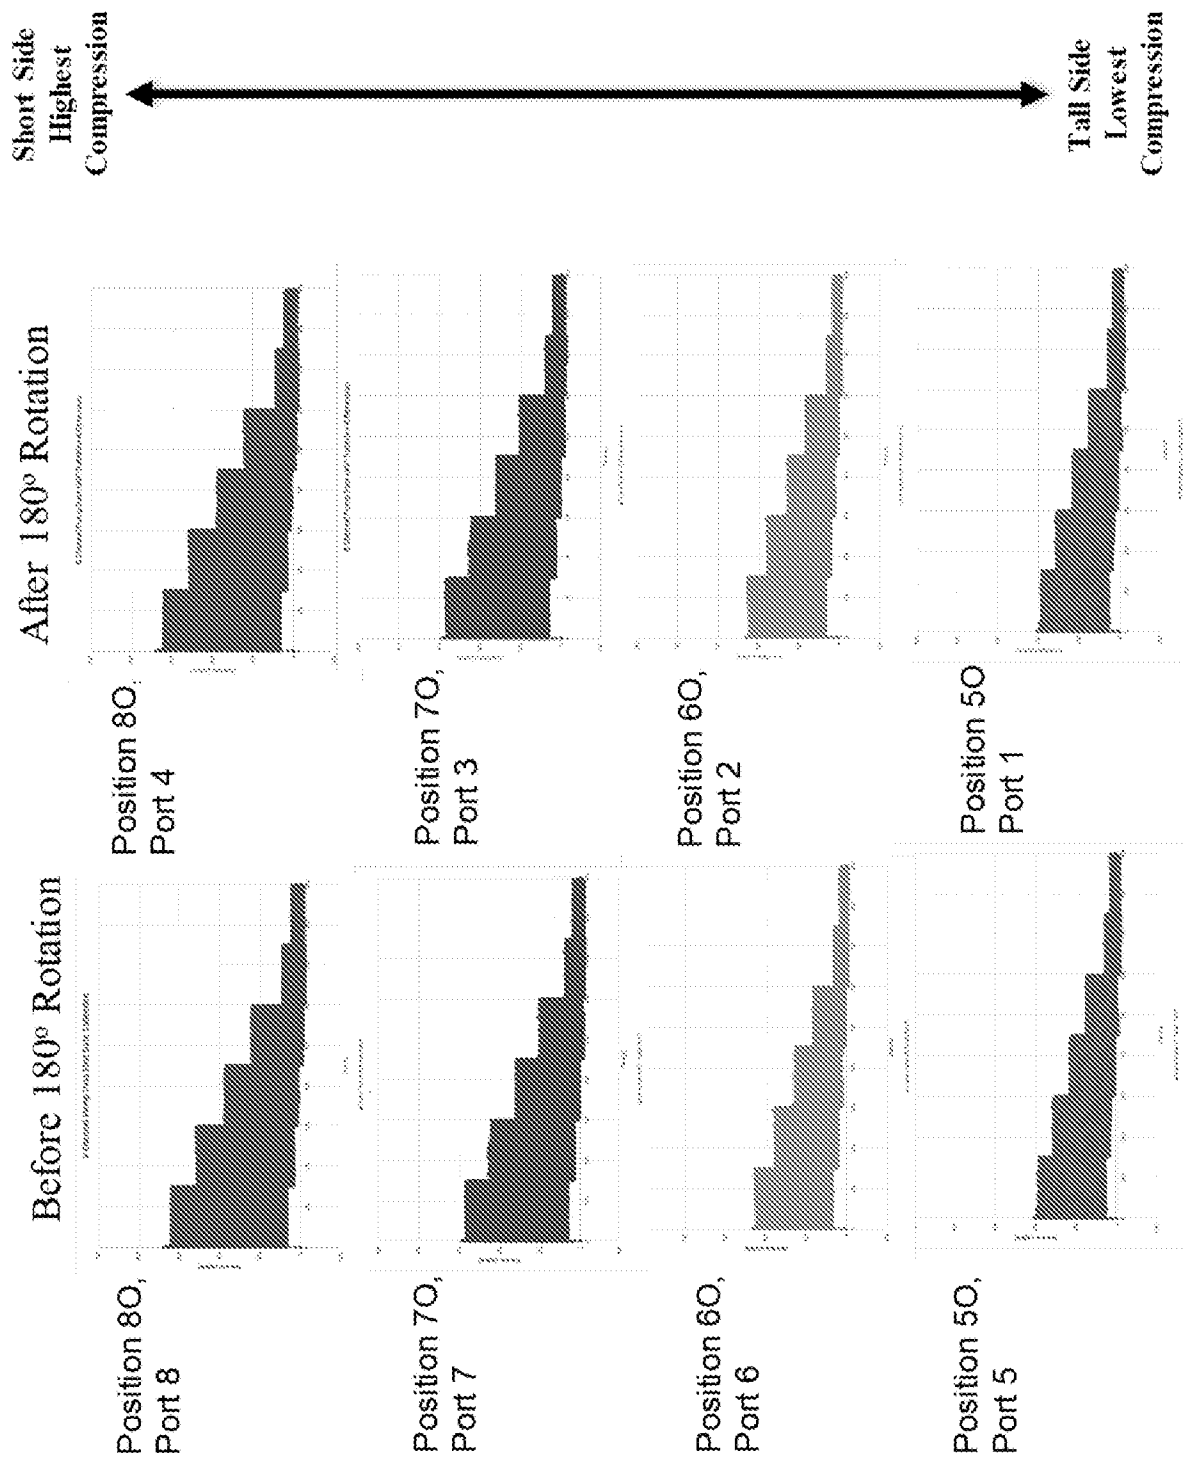


FIG. 5E

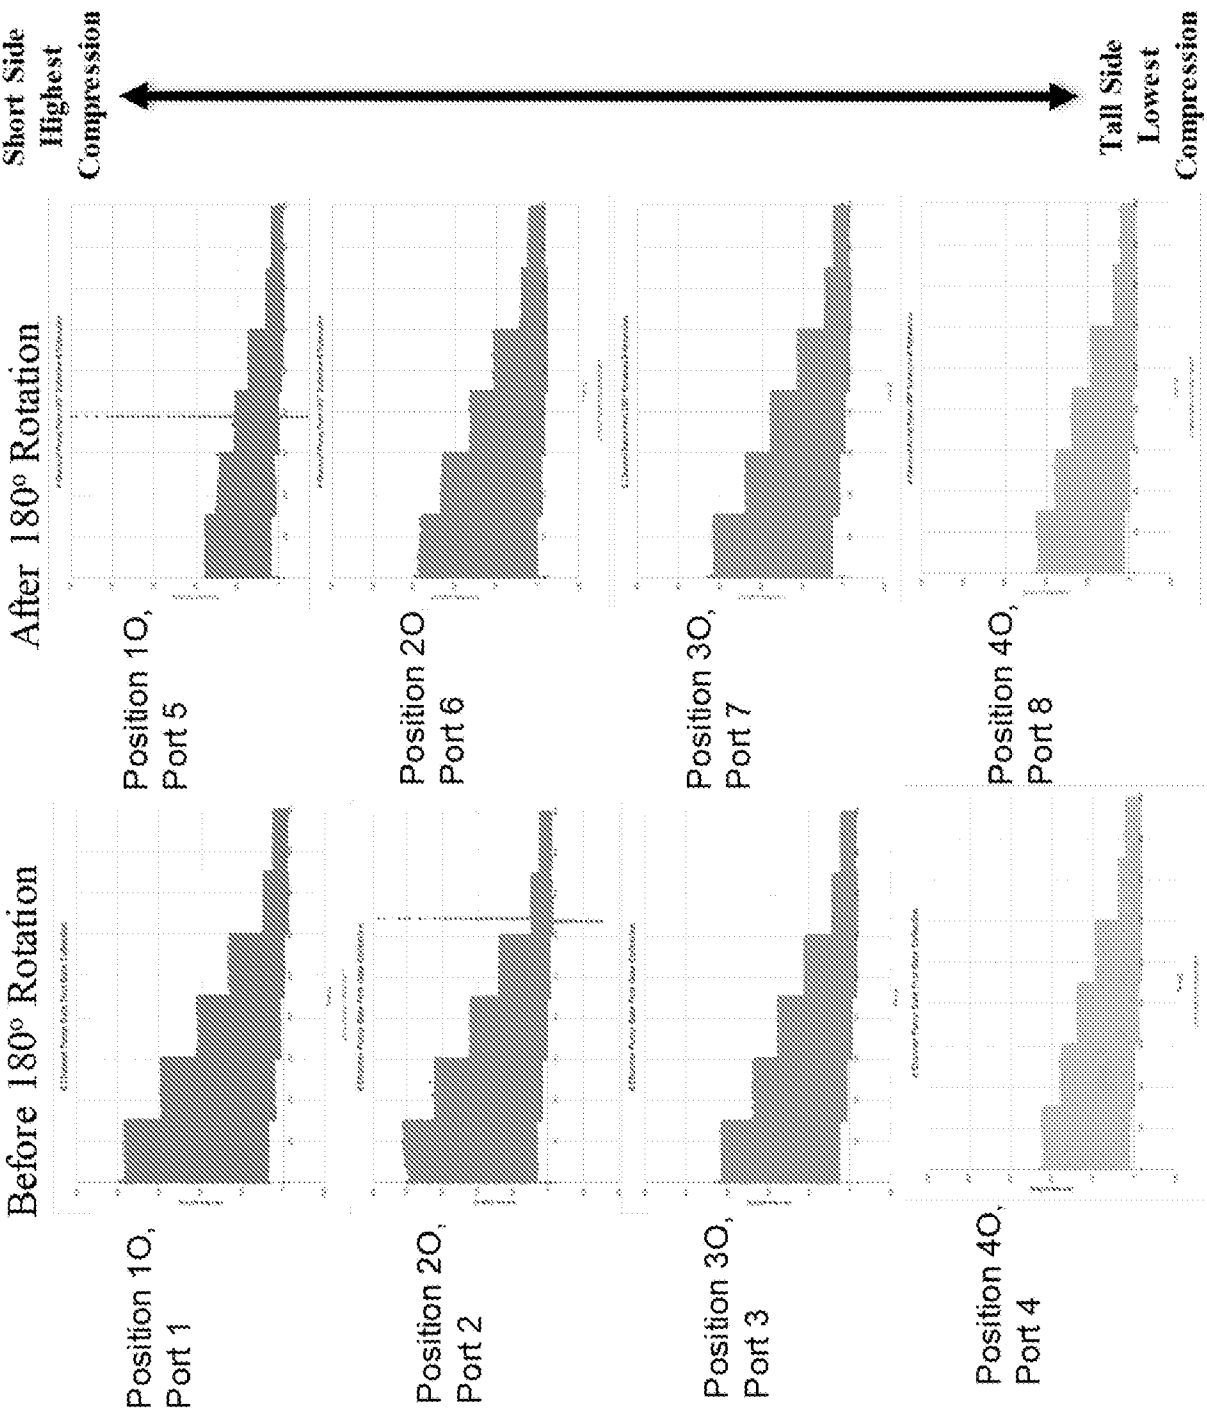
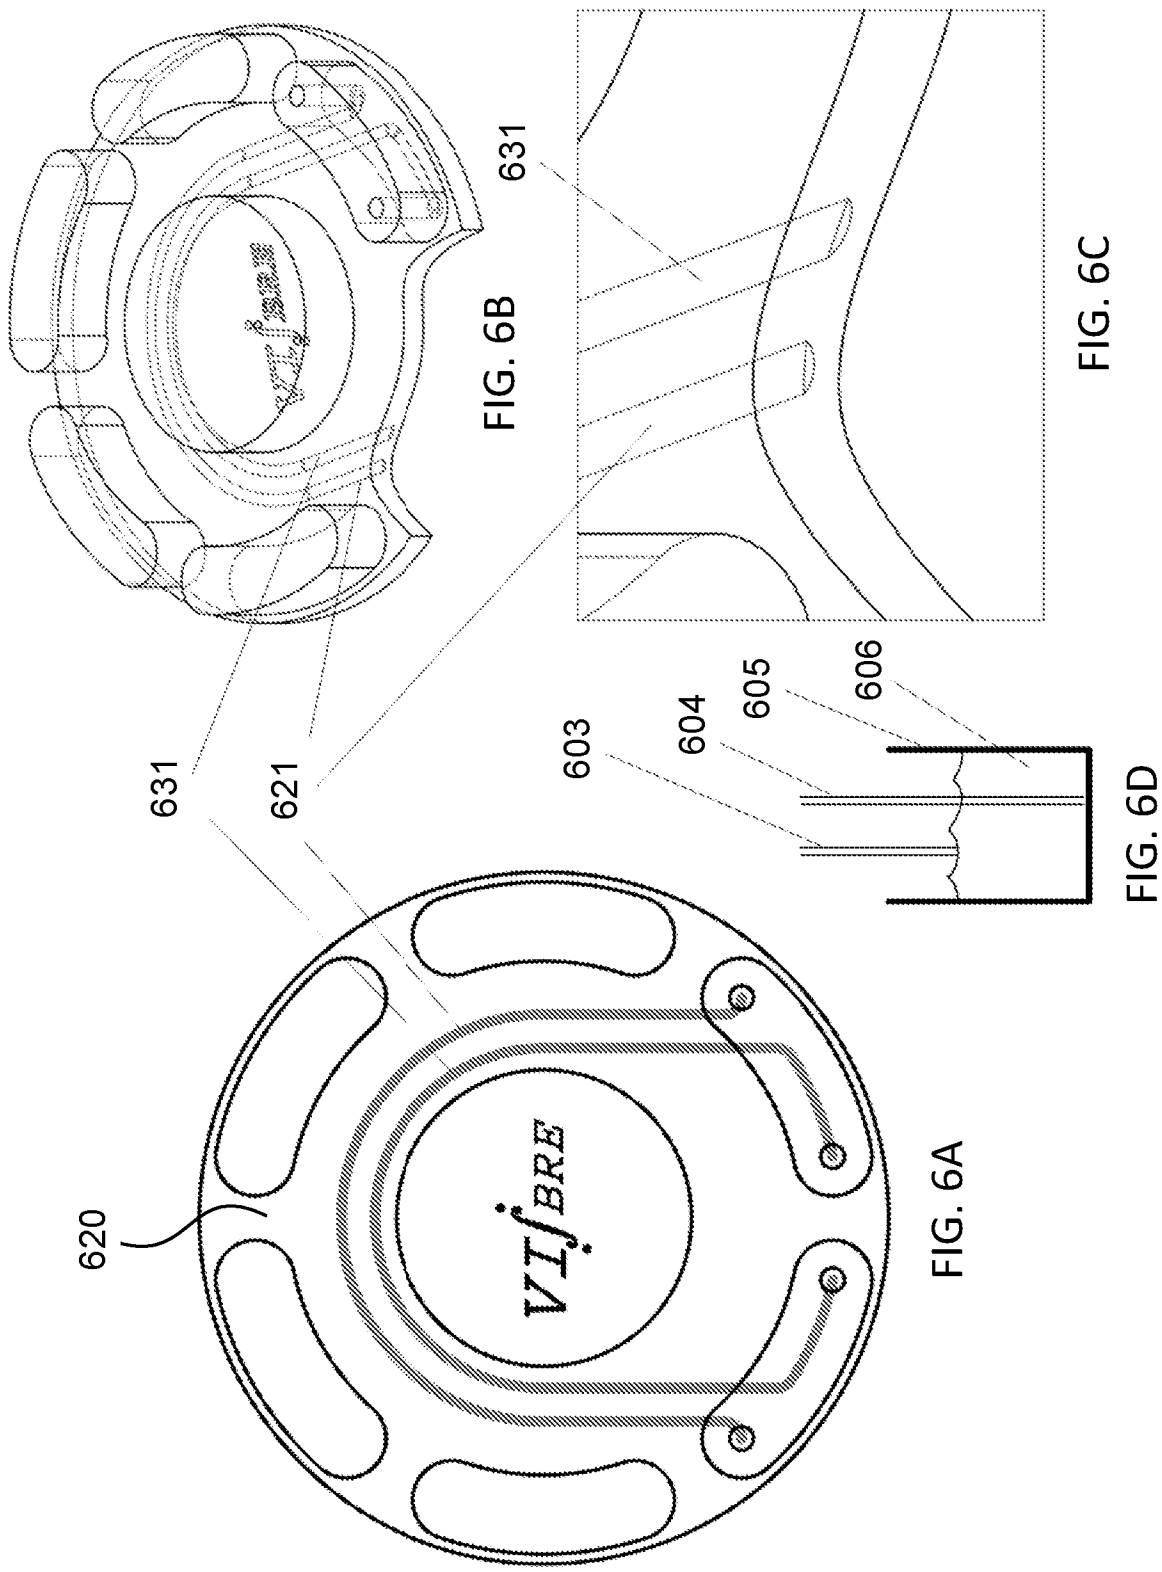


FIG. 5F



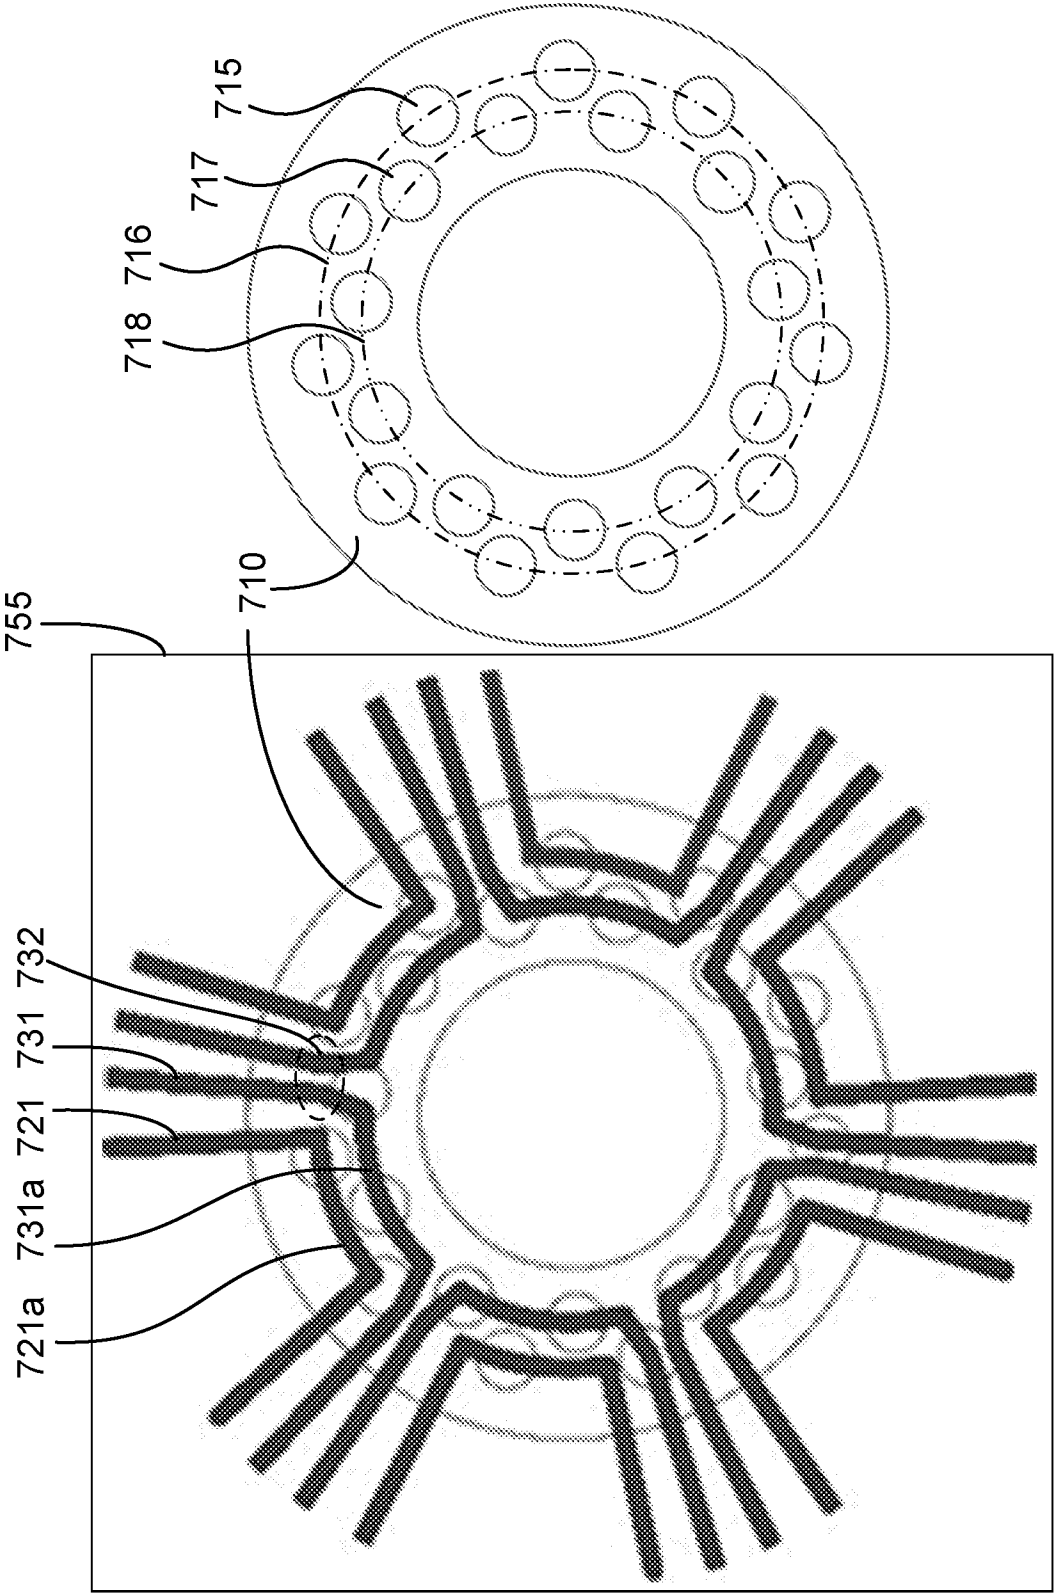


FIG. 7A

FIG. 7B

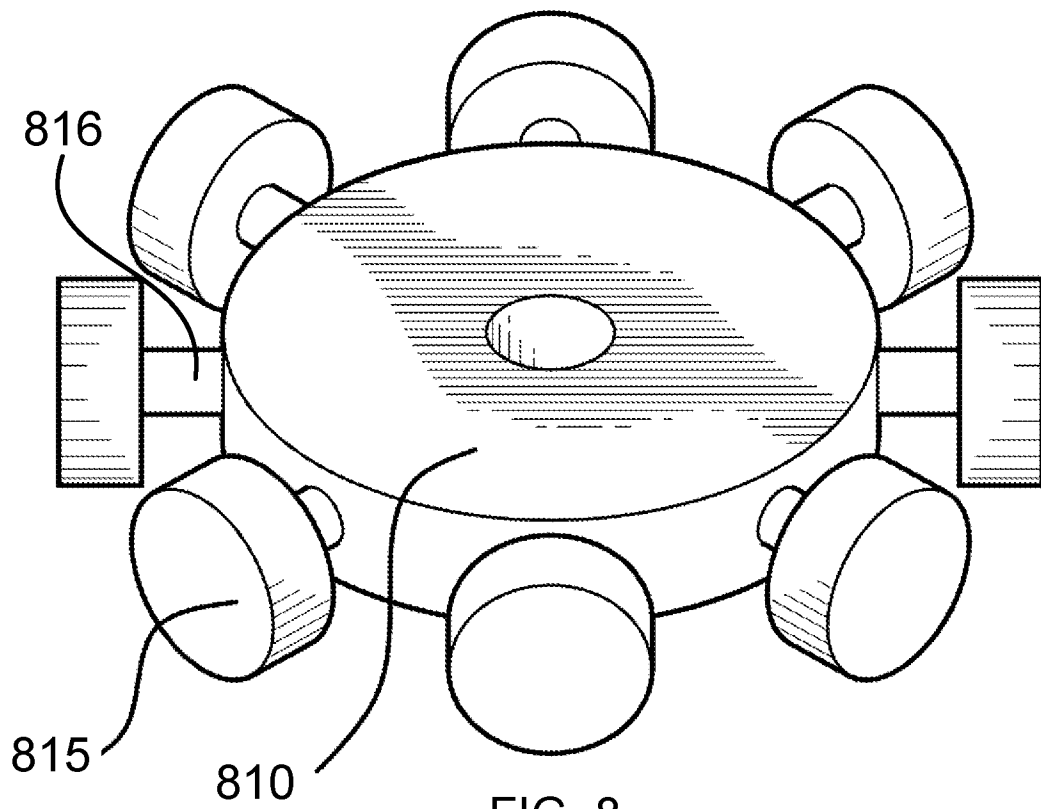


FIG. 8

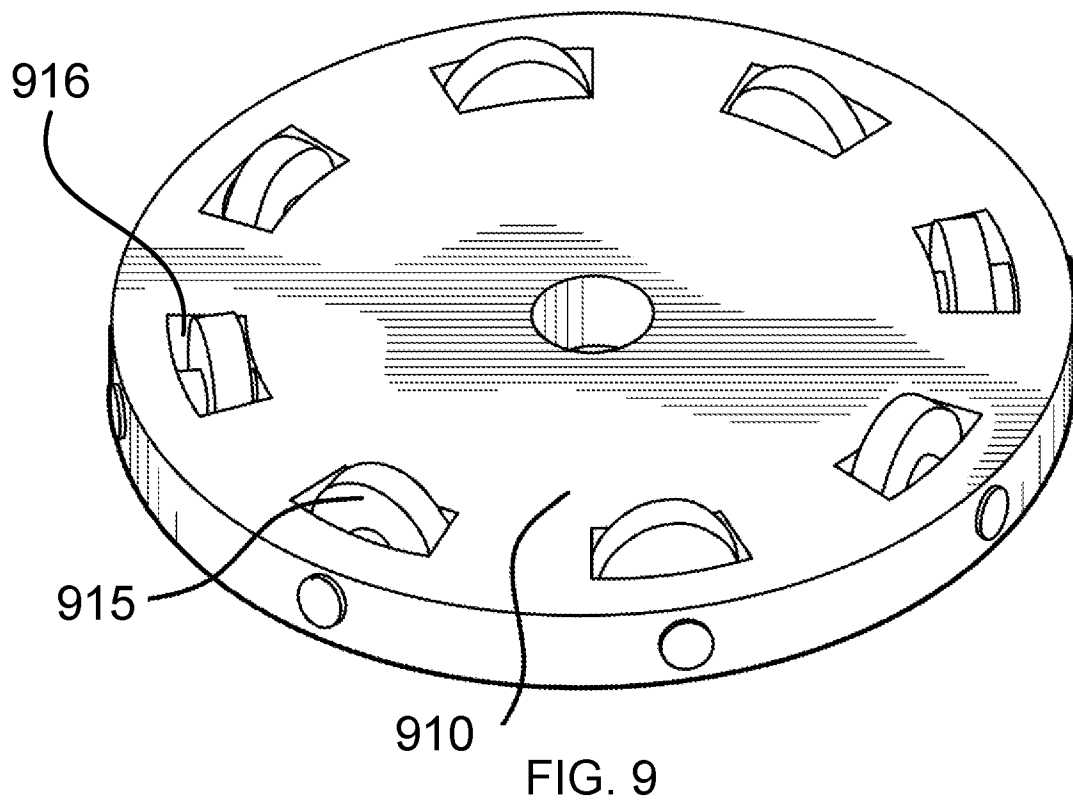


FIG. 9

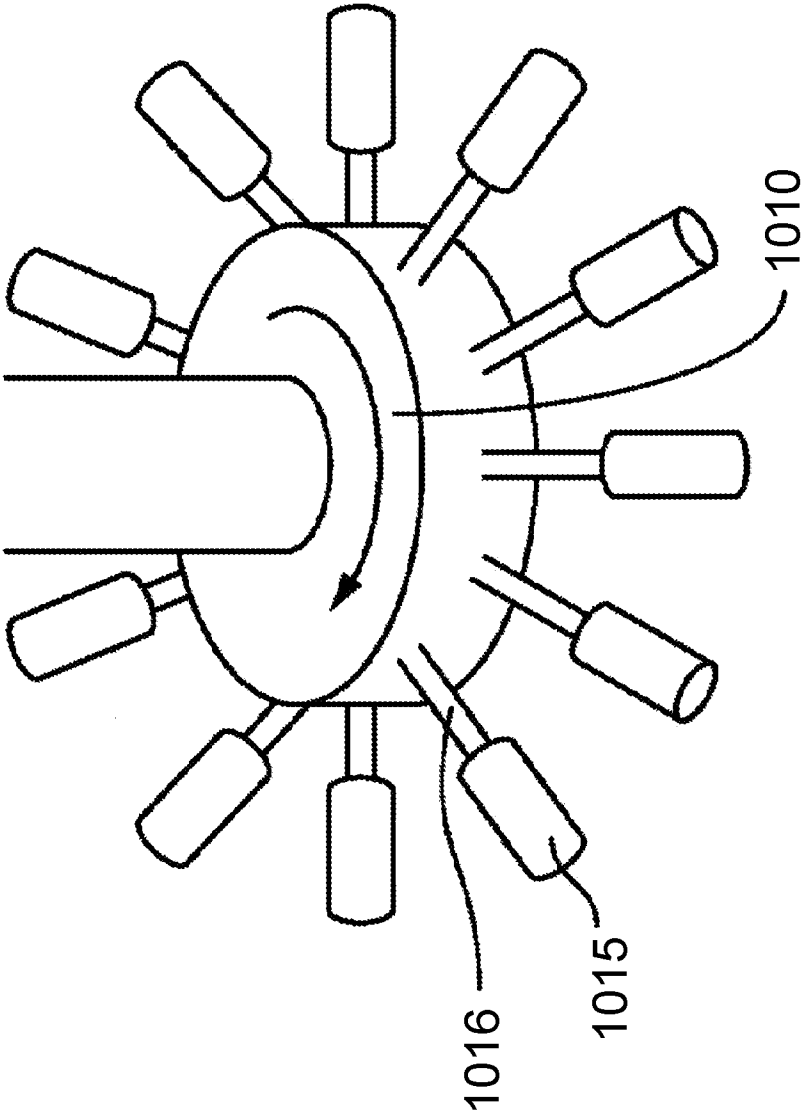


FIG. 10

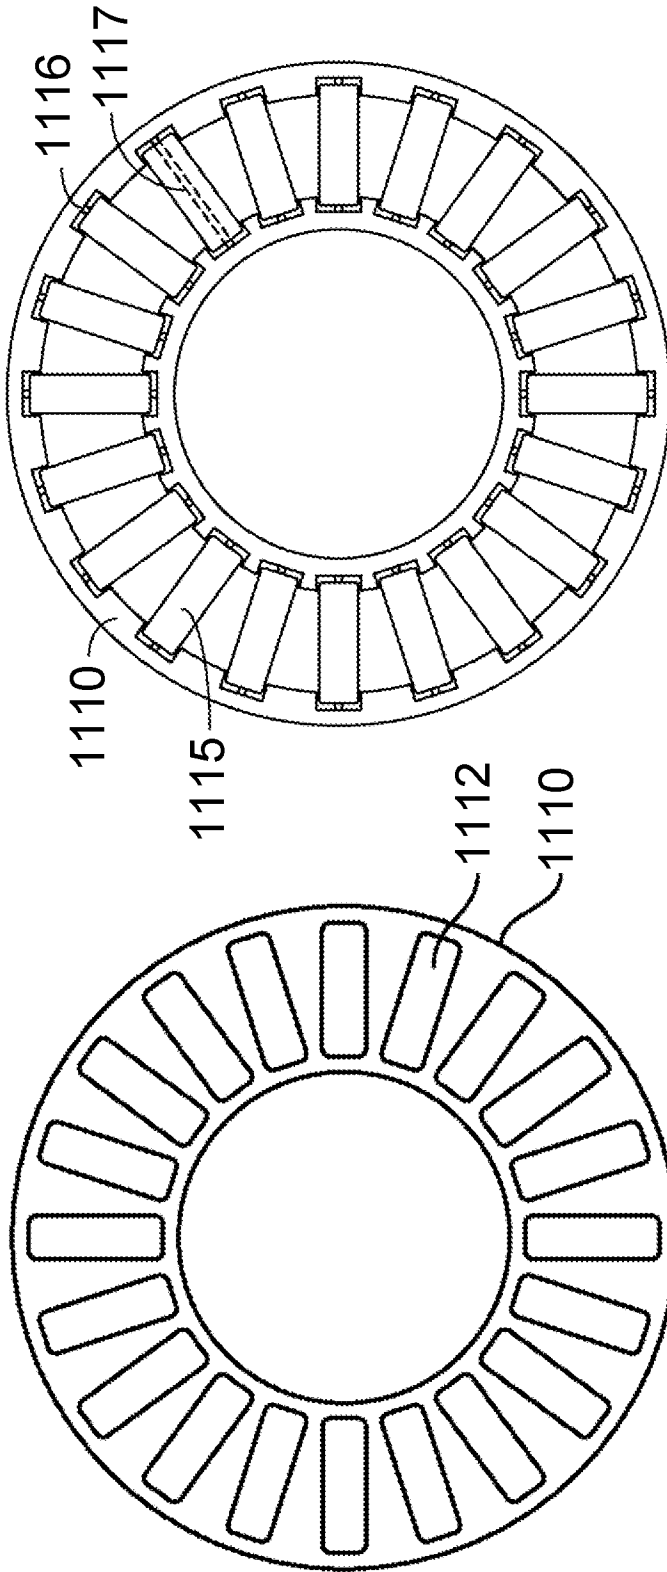


FIG. 11B

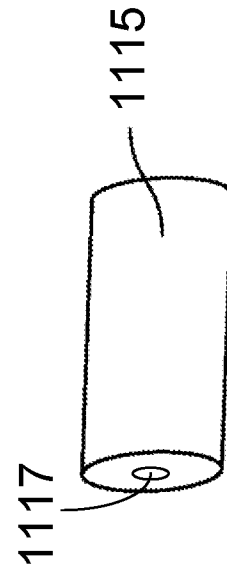


FIG. 11C

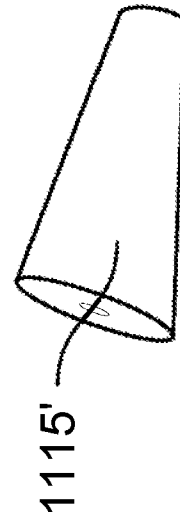


FIG. 11D

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/047190**A. CLASSIFICATION OF SUBJECT MATTER****F04B 43/12(2006.01)i, F04B 53/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
F04B 43/12; A61M 001/00; F16C 17/02; F16C 33/10; F16K 11/16; G01N 33/50; F04B 53/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: peristaltic, micropump, channel, flexible, actuator, rotate, bearing, roll, ball, cam**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5340290 A (CLEMENS, ANTON H.) 23 August 1994 See column 1, lines 8-11, column 2, line 52 - column 5, line 60, claim 1, and figure 2.	1-17, 17-1, 17-2 , 18-20, 20-1, 20-2 , 20-3, 21-40
Y	US 2014-0356849 A1 (VANDERBILT UNIVERSITY) 04 December 2014 See paragraphs [0338], [0348], claims 4-5, and figures 5, 13, 46.	1-17, 17-1, 17-2 , 18-20, 20-1, 20-2 , 20-3, 21-40
Y	US 2001-0016711 A1 (SORENSEN et al.) 23 August 2001 See paragraph [0019] and figures 4-6.	29-40
A	US 2015-0308578 A1 (VANDERBILT UNIVERSITY) 29 October 2015 See paragraphs [0091]-[0093] and figure 1A.	1-17, 17-1, 17-2 , 18-20, 20-1, 20-2 , 20-3, 21-40
A	KR 10-2012-0038588 A (AQUATECH CO., LTD.) 24 April 2012 See paragraphs [0044]-[0055] and figures 3-5. (Note: For the 17-1, 17-2, 20-1, 20-2, 20-3, the claims were renumbered by this authority because the 16, 17, 18, 19, 20 were found twice)	1-17, 17-1, 17-2 , 18-20, 20-1, 20-2 , 20-3, 21-40



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 December 2019 (04.12.2019)

Date of mailing of the international search report

04 December 2019 (04.12.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAHNG, Seung Hoon

Telephone No. +82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/047190

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5340290 A	23/08/1994	None	
US 2014-0356849 A1	04/12/2014	CA 3006063 A1	01/06/2017
		CN 107022482 A	08/08/2017
		EP 2625425 A2	14/08/2013
		EP 3190172 A2	12/07/2017
		EP 3190172 A3	30/08/2017
		EP 3380240 A1	03/10/2018
		EP 3380240 A4	19/06/2019
		EP 3415611 A1	19/12/2018
		US 10023832 B2	17/07/2018
		US 10078075 B2	18/09/2018
		US 10119622 B2	06/11/2018
		US 2013-0287613 A1	31/10/2013
		US 2015-0298123 A1	22/10/2015
		US 2015-0308578 A1	29/10/2015
		US 2017-0081625 A1	23/03/2017
		US 2018-0080570 A1	22/03/2018
		US 2018-0209552 A1	26/07/2018
		US 2018-0298319 A1	18/10/2018
		US 2018-0326417 A1	15/11/2018
		US 2019-0064144 A1	28/02/2019
		US 9618129 B2	11/04/2017
		US 9874285 B2	23/01/2018
		WO 2012-048261 A2	12/04/2012
		WO 2012-048261 A3	14/06/2012
		WO 2013-086505 A1	13/06/2013
		WO 2014-081840 A1	30/05/2014
		WO 2014-123600 A2	14/08/2014
		WO 2014-123600 A3	23/10/2014
		WO 2017-091718 A1	01/06/2017
US 2001-0016711 A1	23/08/2001	AR 033347 A1	17/12/2003
		AT 217392 T	15/05/2002
		AU 6137200 A	17/05/2001
		AU 751908 B2	29/08/2002
		BR 0005321 A	12/06/2001
		BR 0005321 B1	13/01/2009
		CA 2316640 A1	28/02/2001
		CA 2316640 C	27/02/2007
		CA 2323924 A1	10/05/2001
		CA 2323924 C	28/12/2004
		CA 2425729 A1	28/11/2003
		CA 2425729 C	12/09/2006
		DE 60000160 T2	12/12/2002
		DK 1099854 T3	26/08/2002
		EP 1080739 A2	07/03/2001
		EP 1080739 A3	30/01/2002
		EP 1080739 B1	10/03/2004

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/047190

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0308578 A1	29/10/2015	EP 1099854 A1	16/05/2001
		EP 1099854 B1	08/05/2002
		EP 1366776 A1	03/12/2003
		EP 1366776 B1	25/05/2005
		ES 2176160 T3	01/12/2002
		ES 2216813 T3	01/11/2004
		ES 2240885 T3	16/10/2005
		IL 155708 B	12/03/2006
		JP 2001-079031 A	27/03/2001
		JP 2001-165054 A	19/06/2001
		JP 2003-339733 A	02/12/2003
		JP 3803535 B2	02/08/2006
		JP 3825240 B2	27/09/2006
		JP 4202811 B2	24/12/2008
		MX PA00006670 A	08/03/2002
		MX PA03004103 A	15/10/2004
		PT 1080739 E	30/06/2004
		PT 1099854 E	30/09/2002
		US 2001-0004684 A1	21/06/2001
		US 2002-0004657 A1	10/01/2002
		US 2003-0190244 A1	09/10/2003
		US 2003-0221694 A1	04/12/2003
		US 2003-0225366 A1	04/12/2003
		US 2004-0253129 A1	16/12/2004
		US 2005-0186098 A1	25/08/2005
		US 2008-0200878 A1	21/08/2008
		US 6261283 B1	17/07/2001
		US 6293926 B1	25/09/2001
		US 6572349 B2	03/06/2003
		US 6632214 B2	14/10/2003
		US 6740074 B2	25/05/2004
		US 6902542 B2	07/06/2005
		US 6962488 B2	08/11/2005
		US 7393189 B2	01/07/2008
		CA 3006063 A1	01/06/2017
		CN 107022482 B	11/10/2019
		CN 110438001 A	12/11/2019
		EP 2625425 A2	14/08/2013
		EP 3190172 A2	12/07/2017
		EP 3190172 A3	30/08/2017
		EP 3380240 A1	03/10/2018
		EP 3380240 A4	19/06/2019
		EP 3415611 A1	19/12/2018
		US 10023832 B2	17/07/2018
		US 10078075 B2	18/09/2018
		US 10119622 B2	06/11/2018
		US 2013-0287613 A1	31/10/2013
		US 2014-0356849 A1	04/12/2014
		US 2015-0298123 A1	22/10/2015

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/047190

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2017-0081625 A1	23/03/2017
		US 2018-0080570 A1	22/03/2018
		US 2018-0209552 A1	26/07/2018
		US 2018-0298319 A1	18/10/2018
		US 2018-0326417 A1	15/11/2018
		US 2019-0064144 A1	28/02/2019
		US 9618129 B2	11/04/2017
		US 9874285 B2	23/01/2018
		WO 2012-048261 A2	12/04/2012
		WO 2012-048261 A3	14/06/2012
		WO 2013-086505 A1	13/06/2013
		WO 2014-081840 A1	30/05/2014
		WO 2014-123600 A2	14/08/2014
		WO 2014-123600 A3	23/10/2014
		WO 2017-091718 A1	01/06/2017
KR 10-2012-0038588 A	24/04/2012	None	