


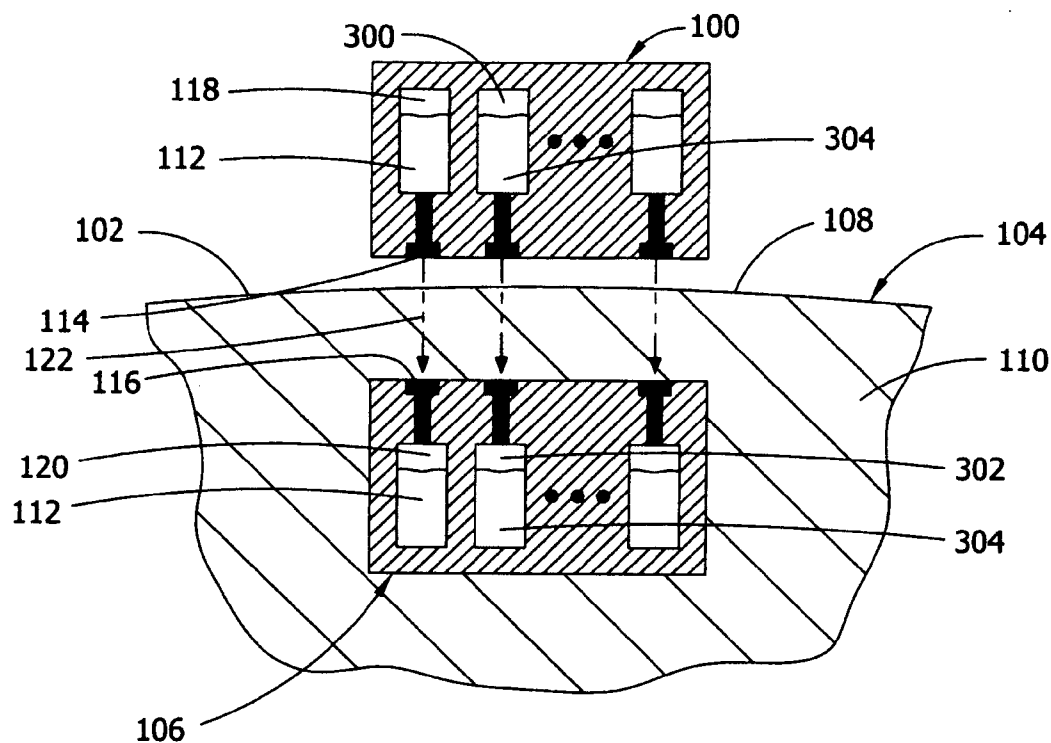

US 20090240189A1

(19) **United States**(12) **Patent Application Publication****Hyde et al.**(10) **Pub. No.: US 2009/0240189 A1**(43) **Pub. Date: Sep. 24, 2009**(54) **SUBDERMAL MATERIAL DELIVERY
DEVICE**(22) Filed: **Apr. 3, 2008**(75) Inventors: **Roderick A. Hyde**, Redmond, WA
(US); **Jordin T. Kare**, Seattle, WA
(US); **Dennis J. Rivet**, Portsmouth,
VA (US); **Lowell L. Wood, JR.**,
Bellevue, WA (US)**Related U.S. Application Data**(63) Continuation of application No. 12/077,938, filed on
Mar. 20, 2008.**Publication Classification**(51) **Int. Cl.**
A61N 1/30 (2006.01)(52) **U.S. Cl.** 604/20Correspondence Address:
IV - SUITER SWANTZ PC LLO
14301 FNB PARKWAY, SUITE 220
OMAHA, NE 68154 (US)(57) **ABSTRACT**(73) Assignee: **Searete LLC, a limited liability
corporation of the State of
Delaware**(21) Appl. No.: **12/080,810**A method may include placing a first device on a first side of
a skin portion of a subject and transferring a material through
the skin portion of the subject from the first device to a
subdermal second device disposed on a second side of the
skin portion of the subject.

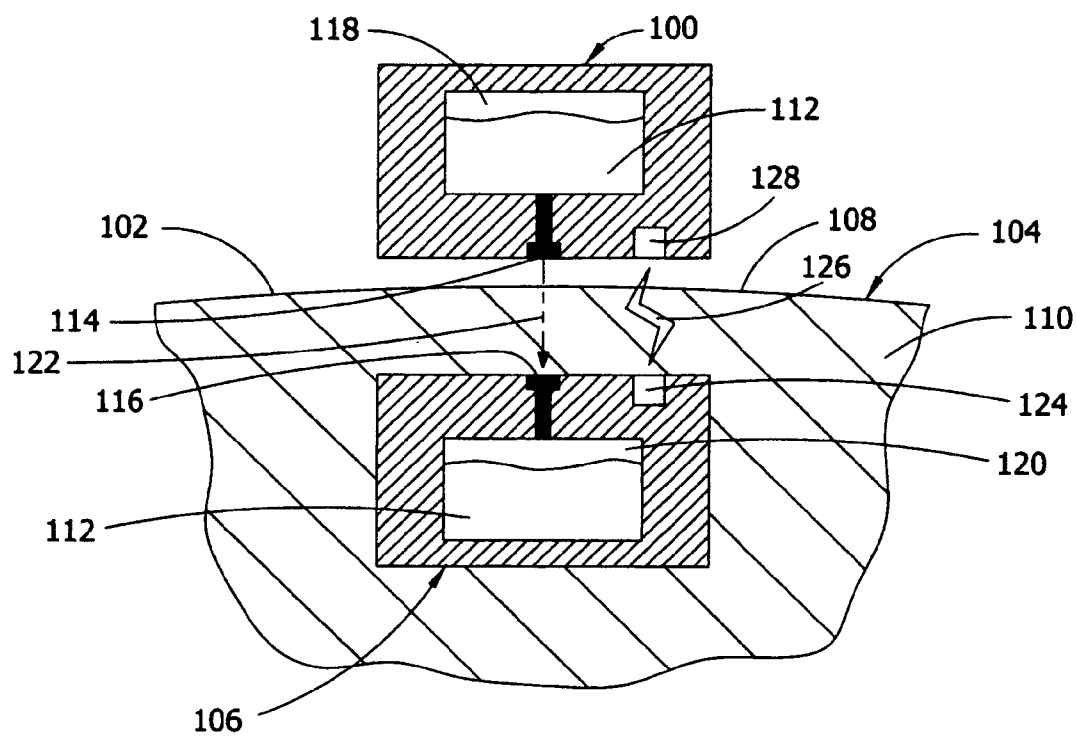


FIG. 1

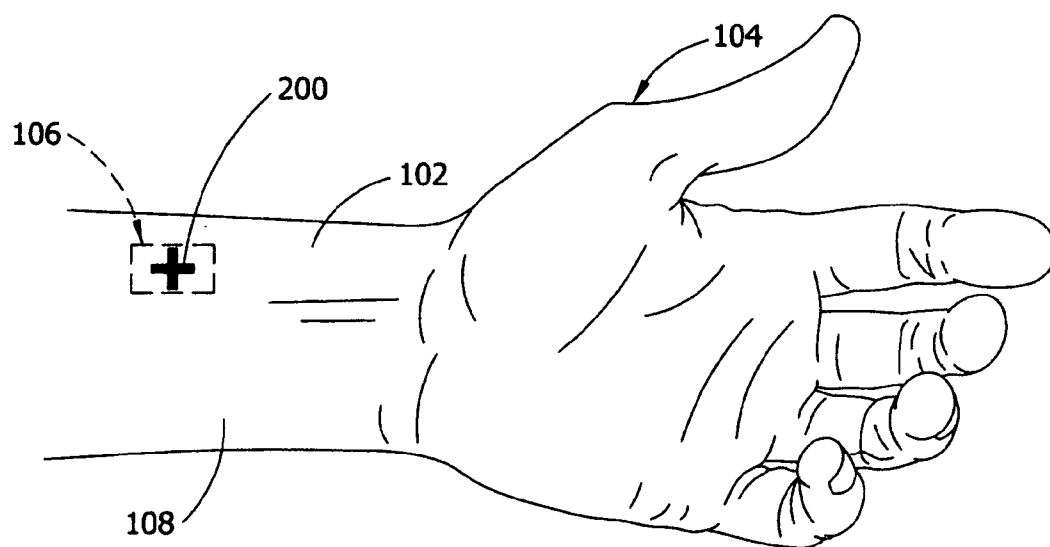
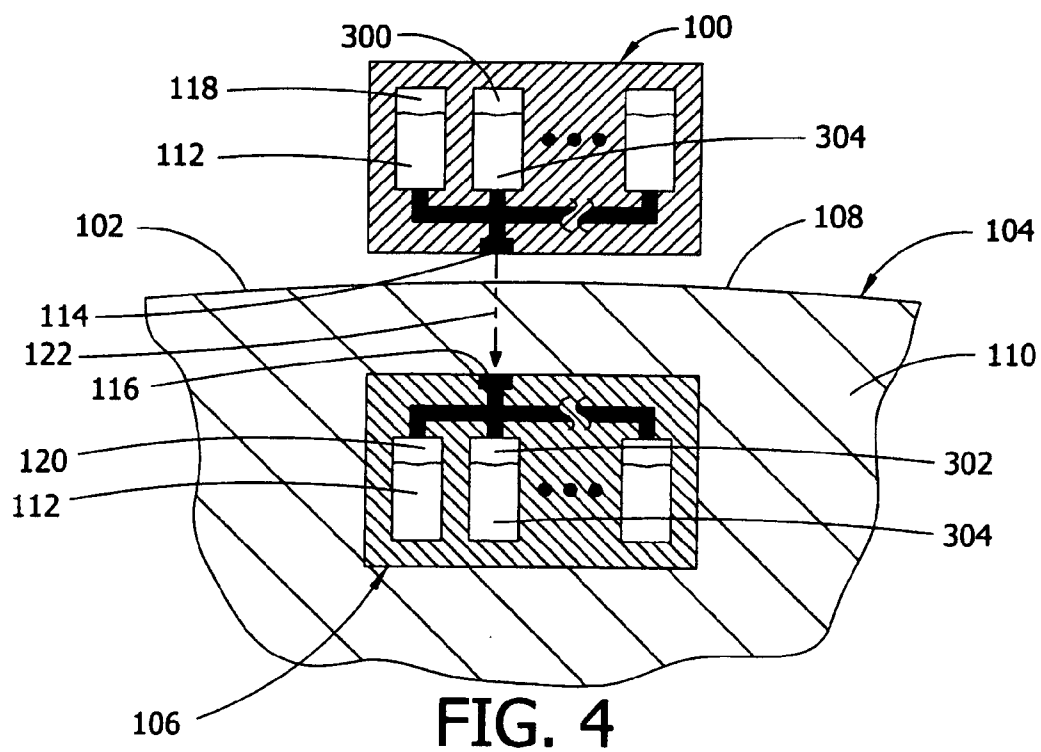
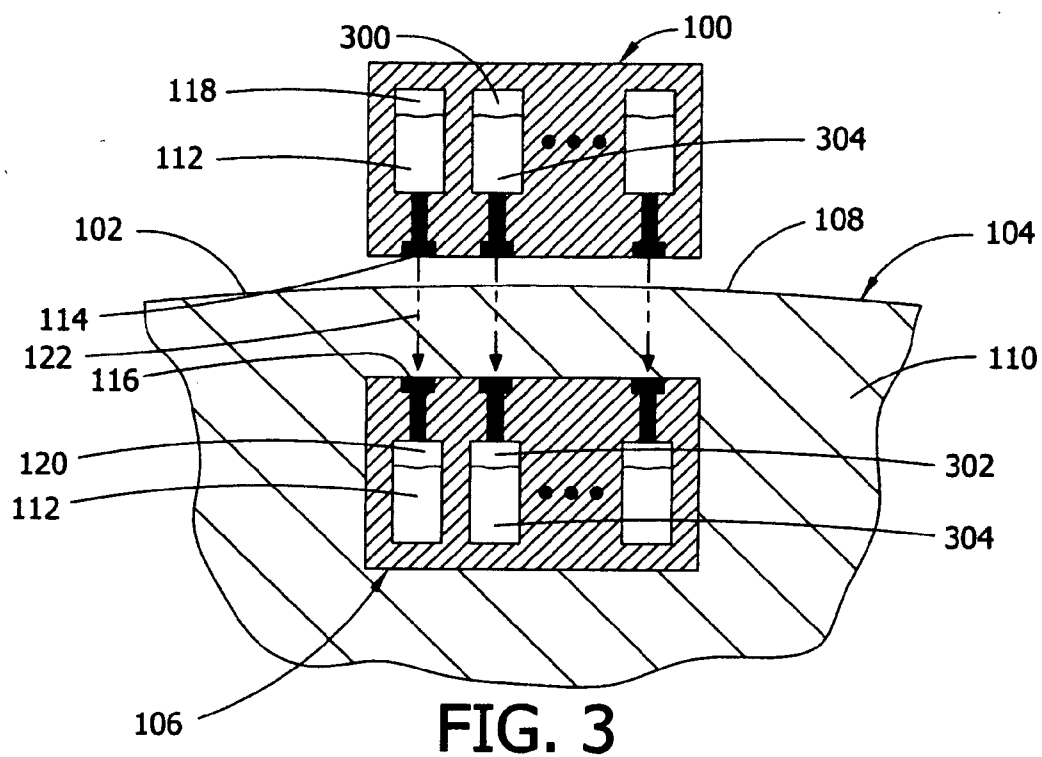


FIG. 2



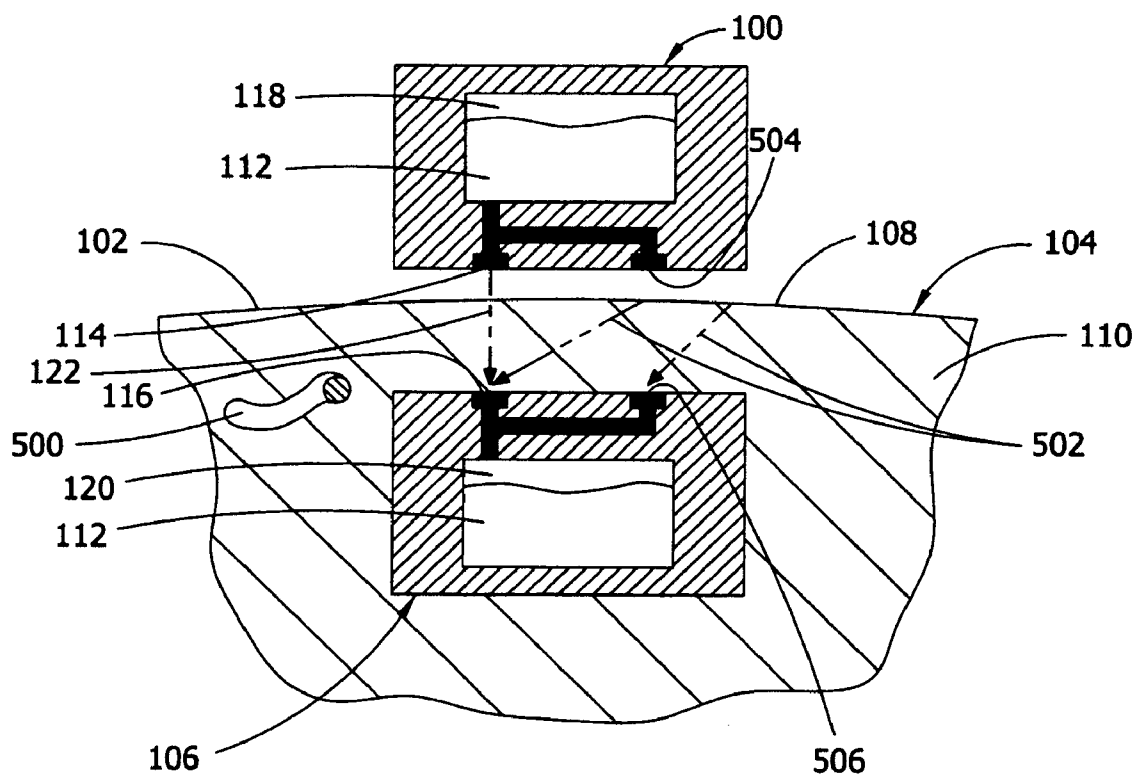


FIG. 5

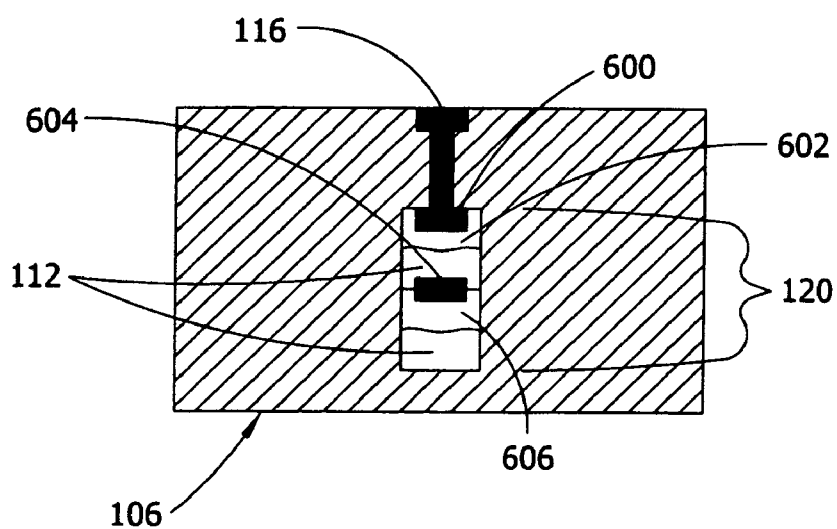


FIG. 6

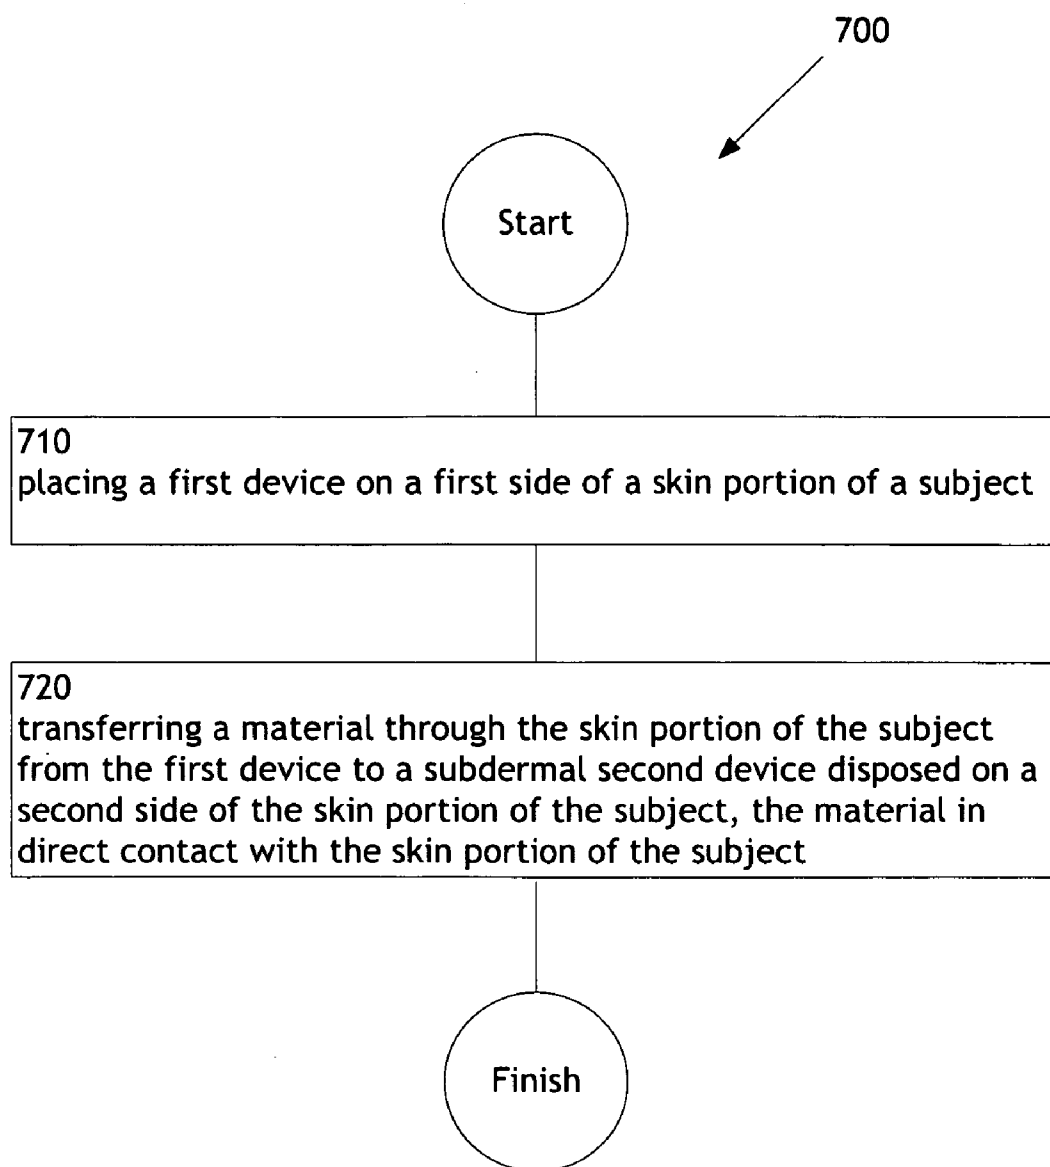


FIG. 7

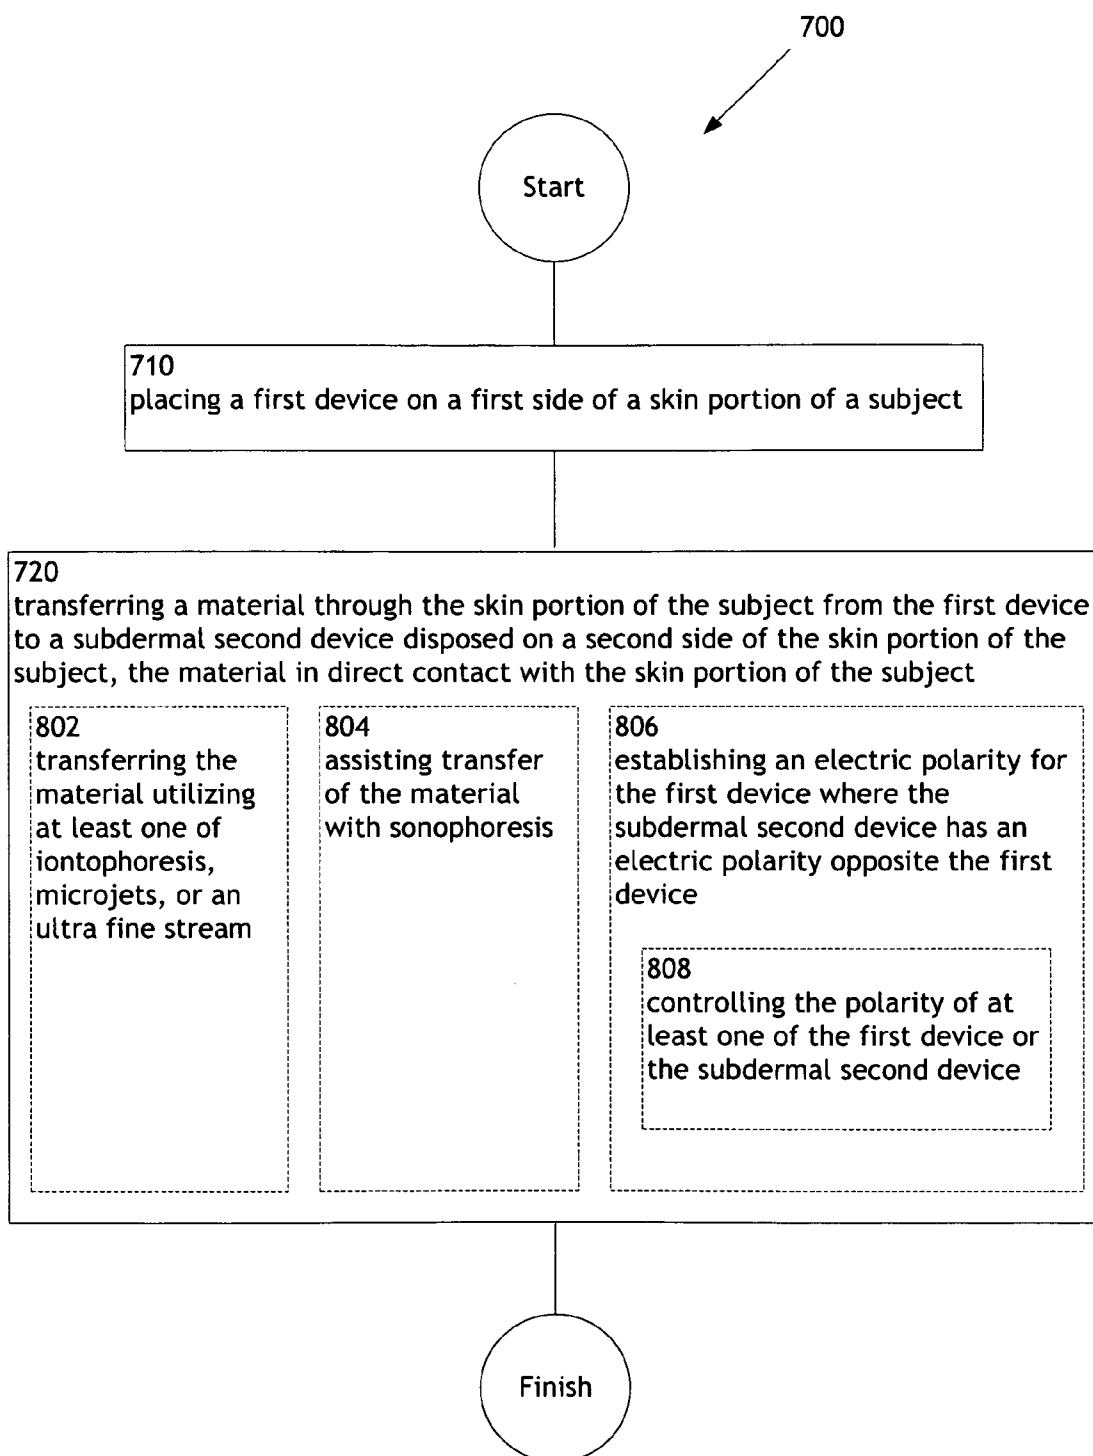


FIG. 8

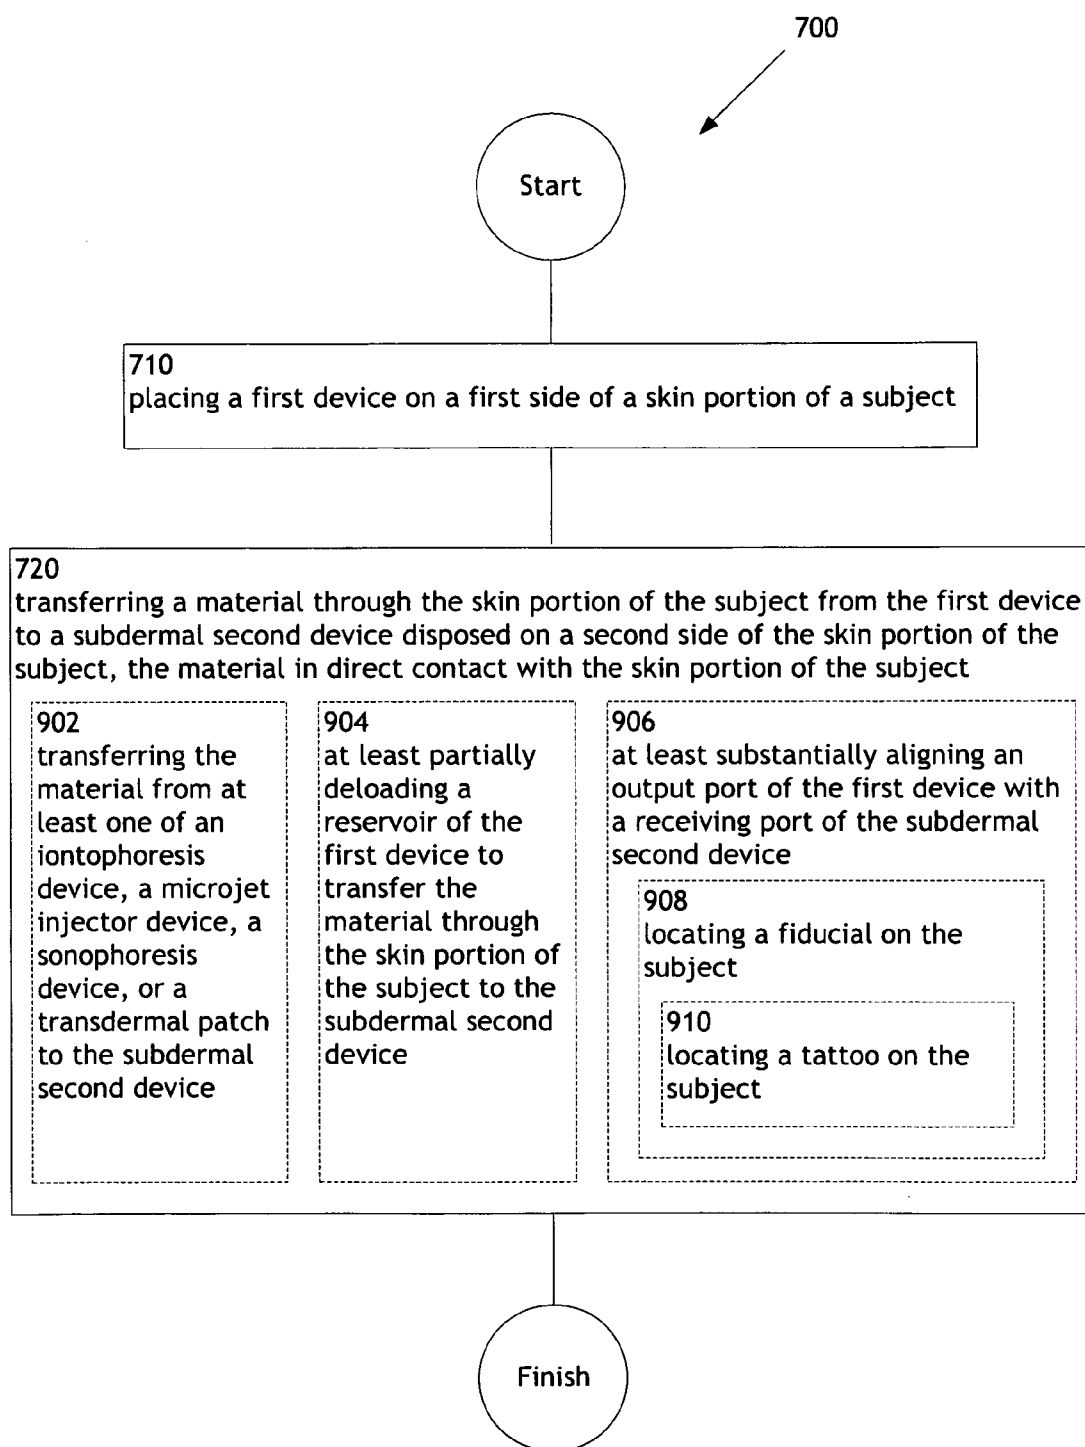


FIG. 9

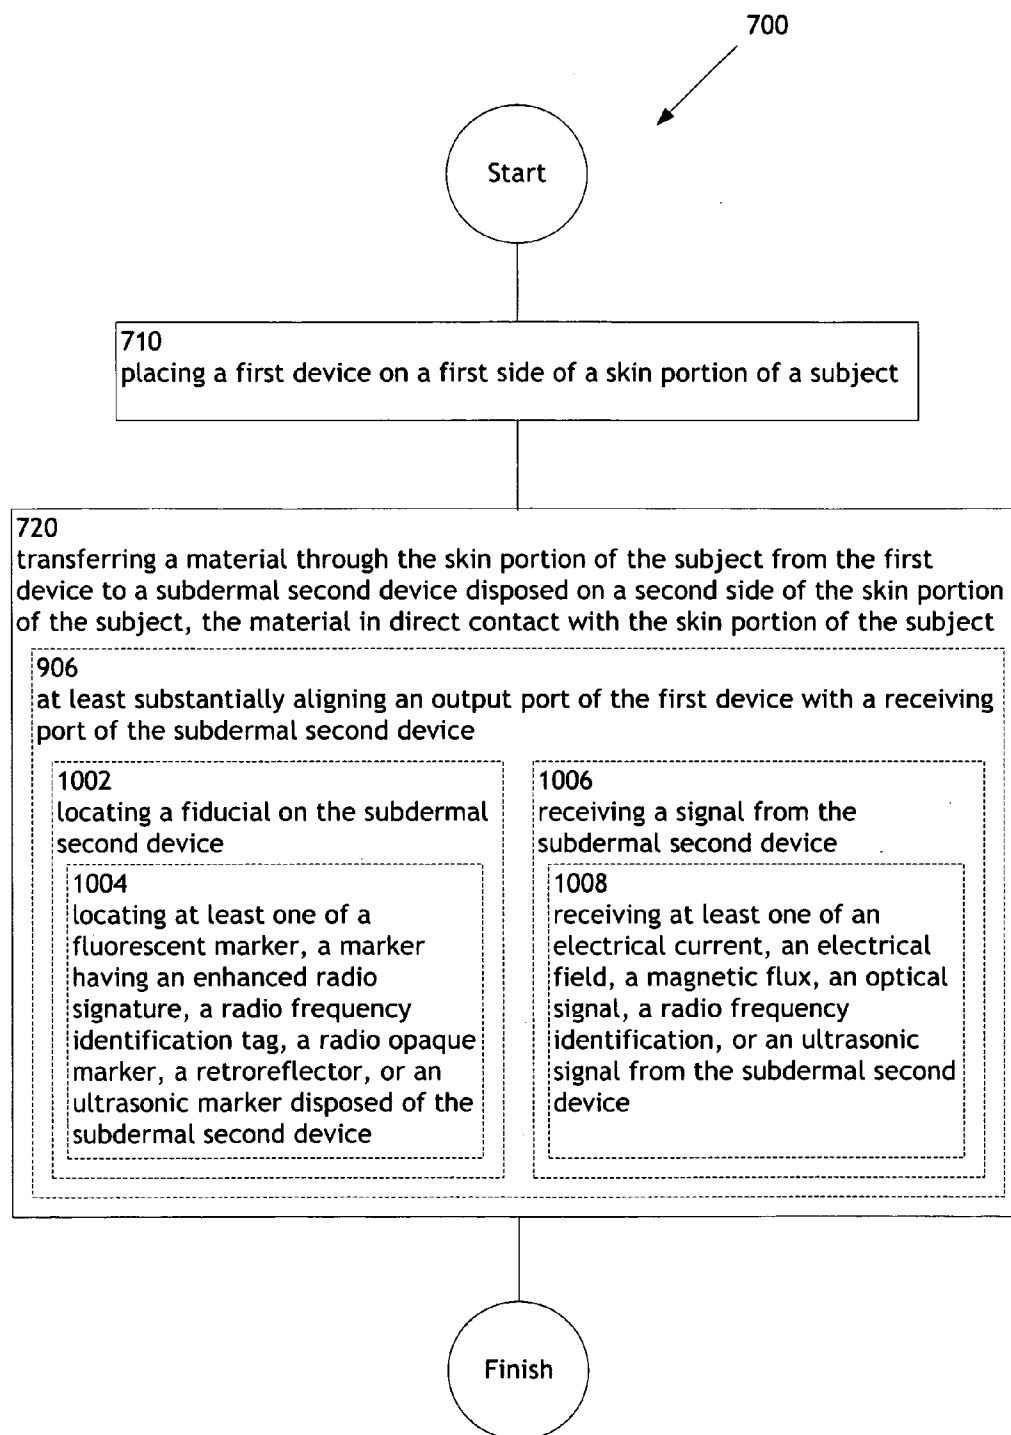


FIG. 10

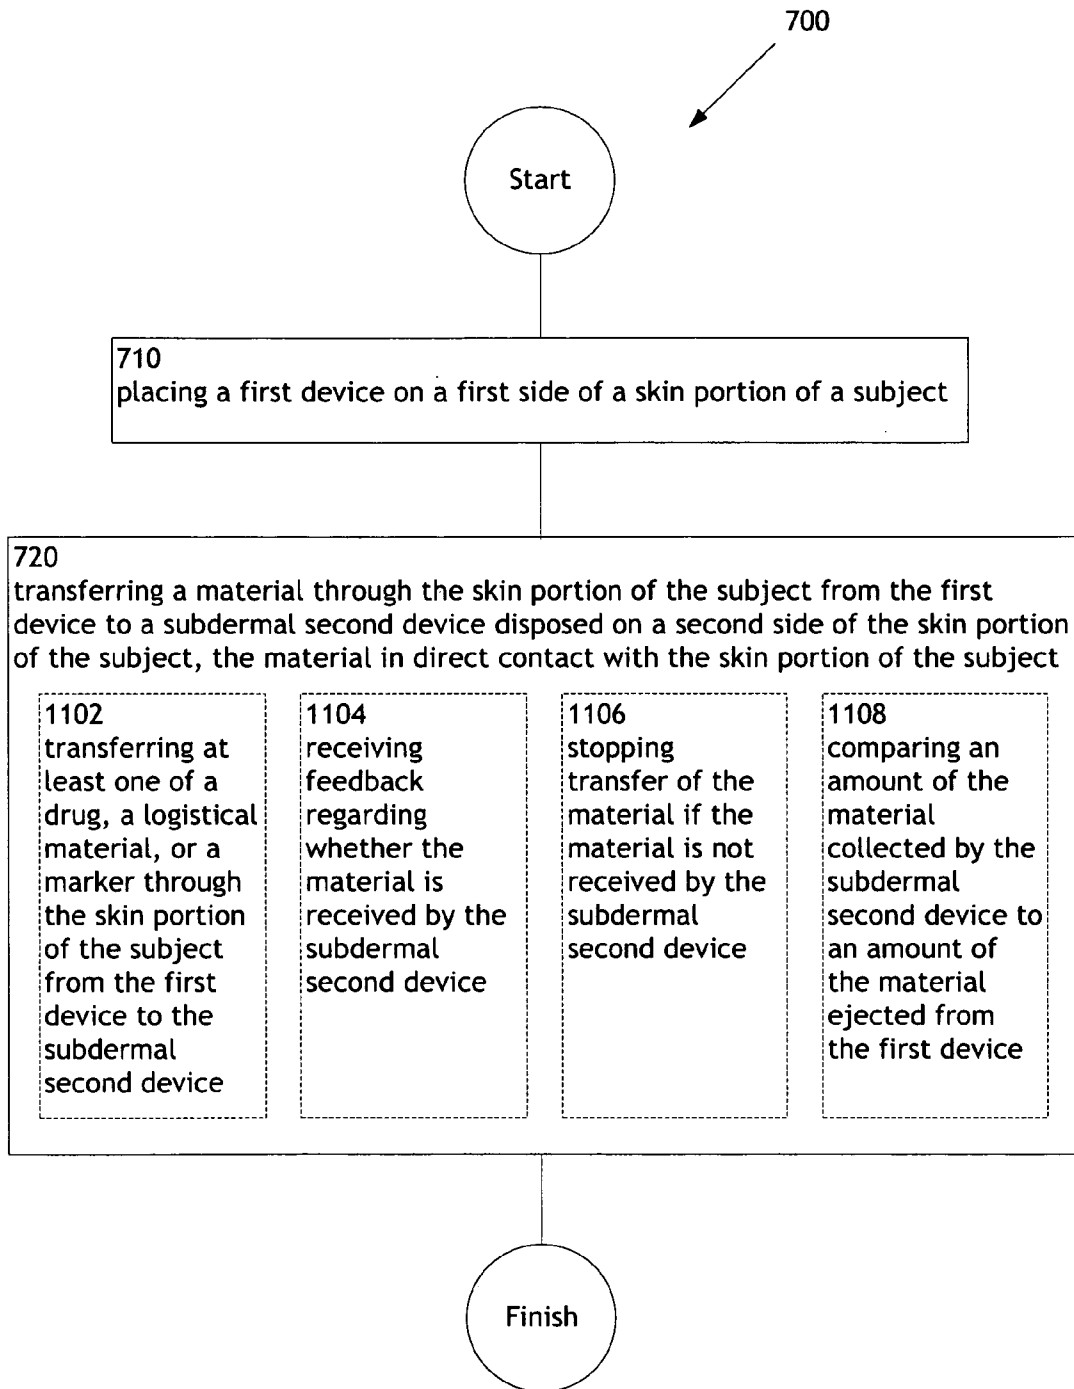


FIG. 11

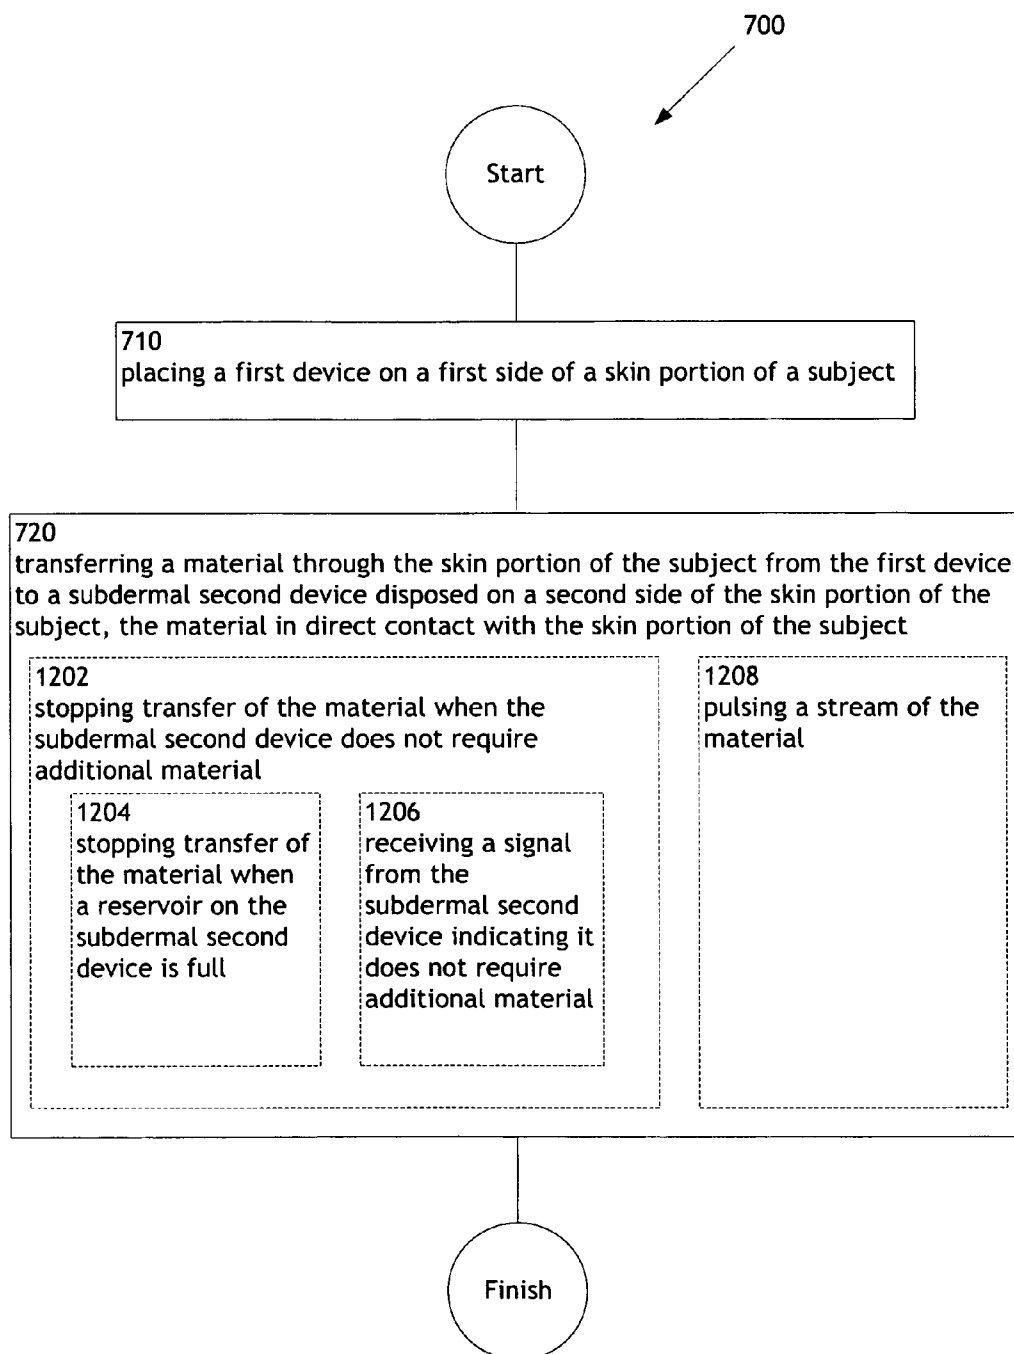


FIG. 12

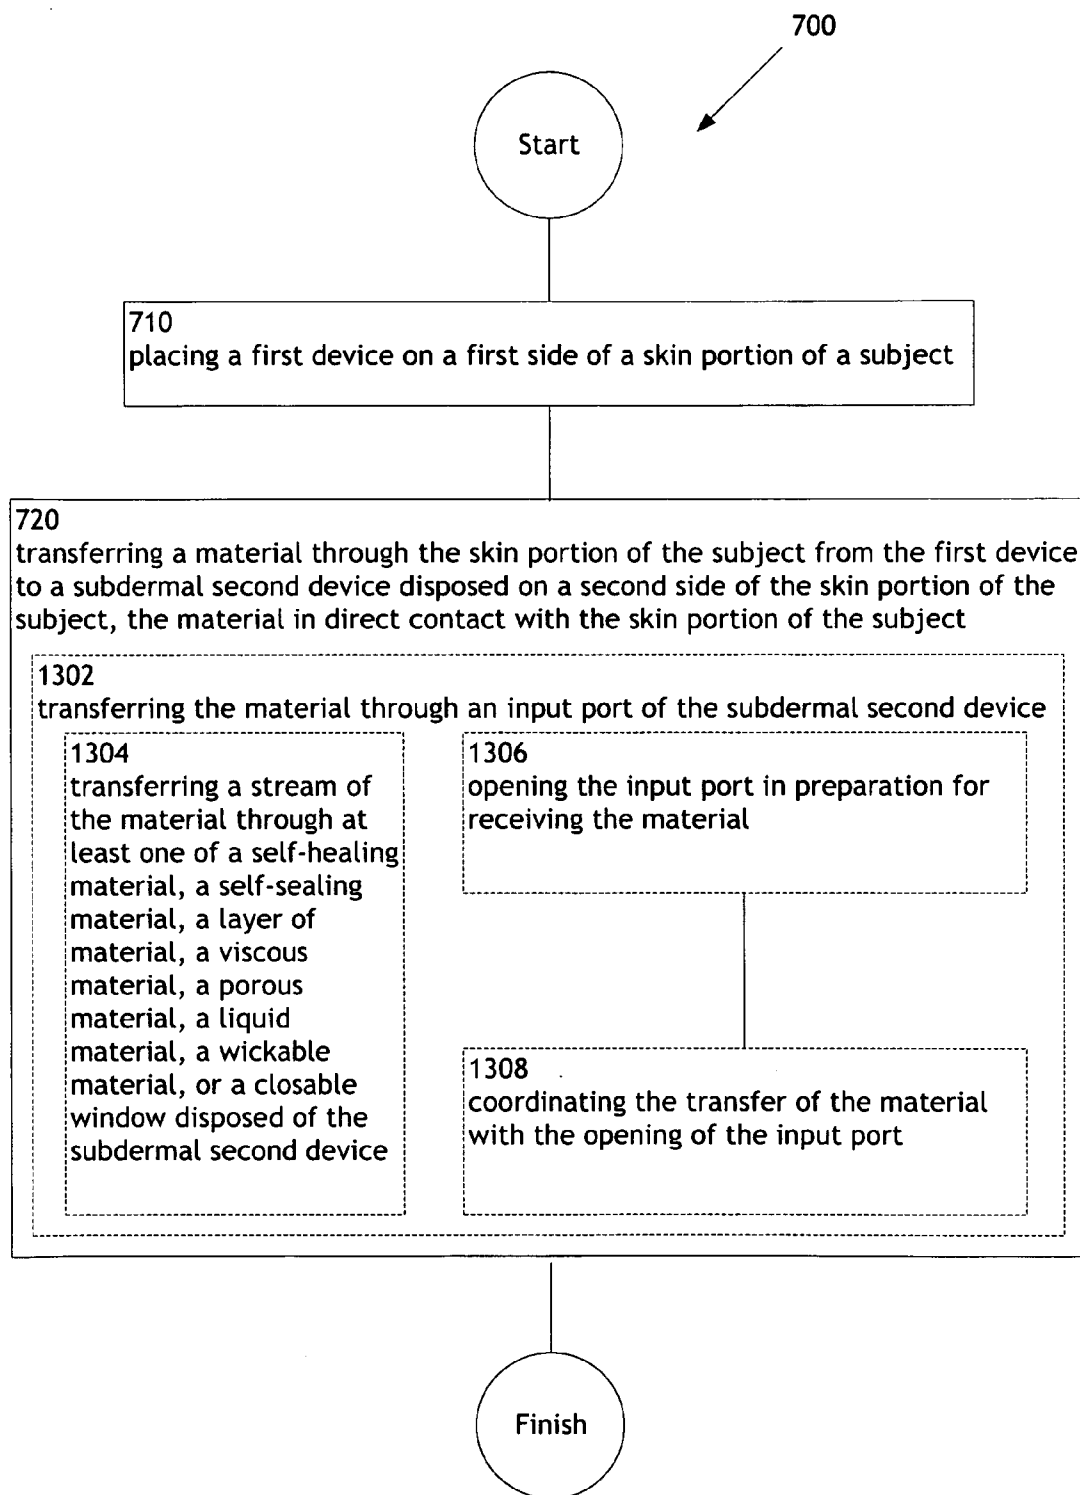


FIG. 13

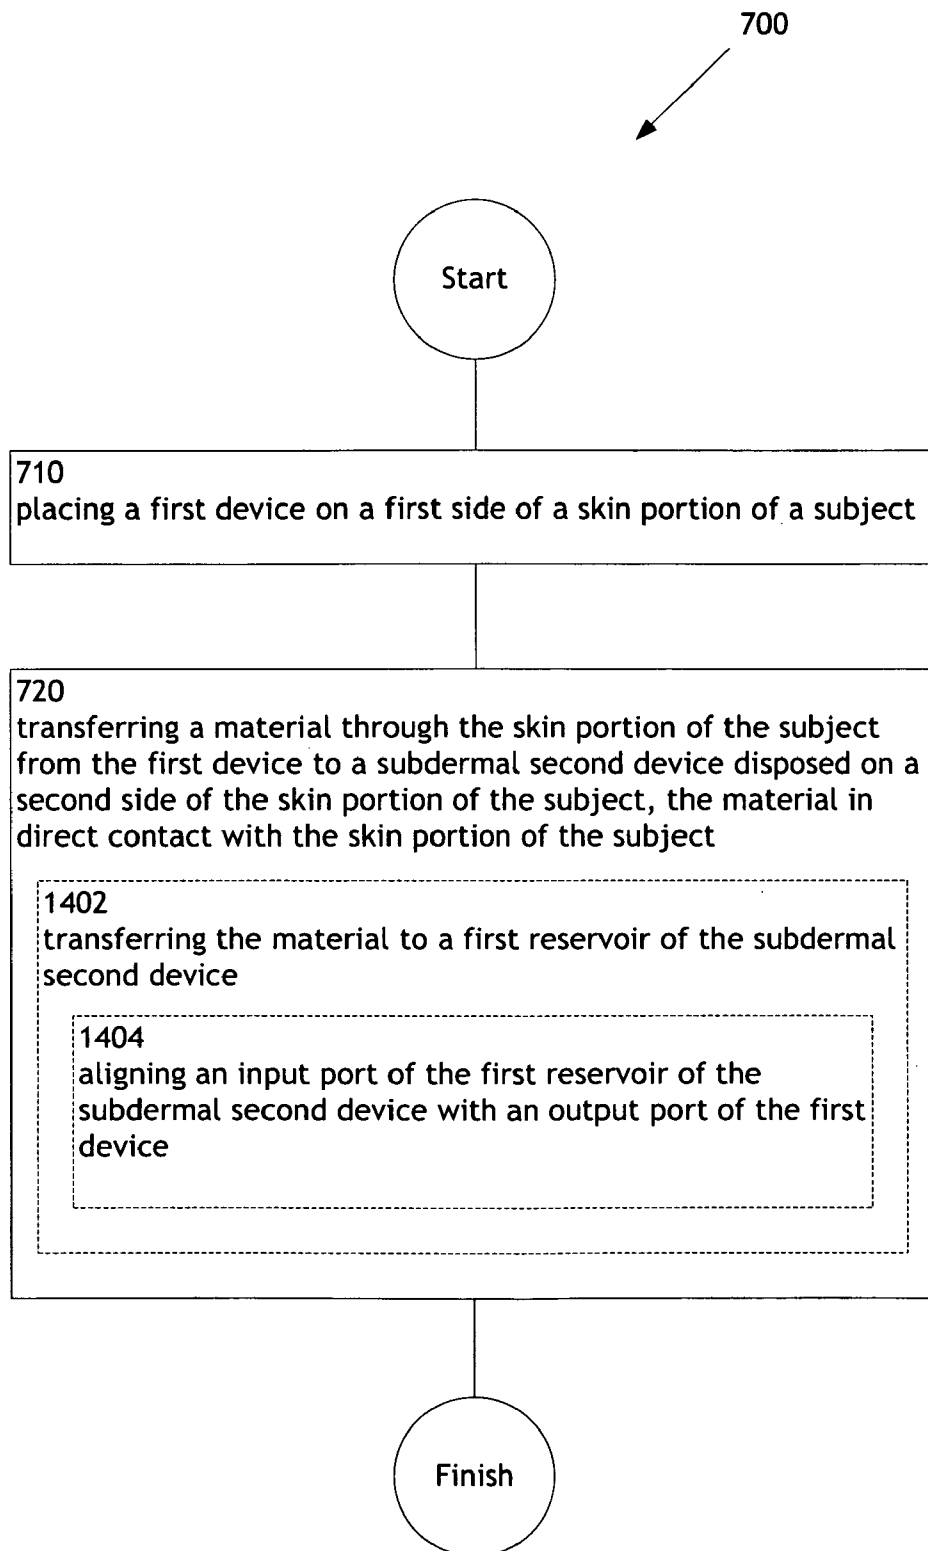


FIG. 14

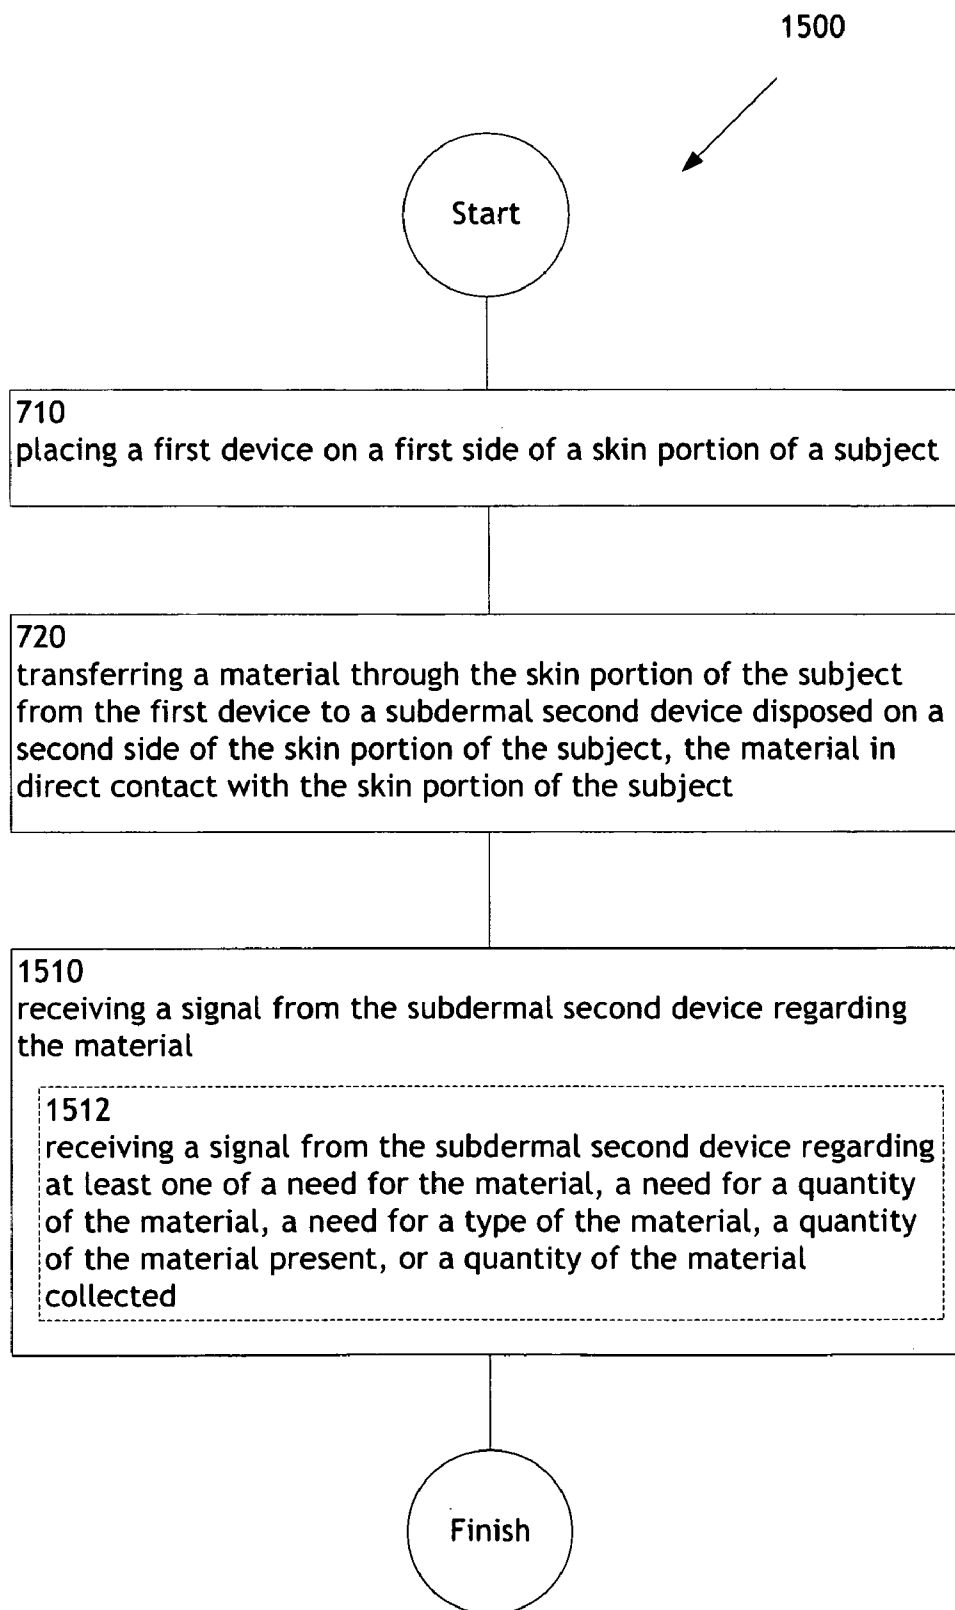


FIG. 15

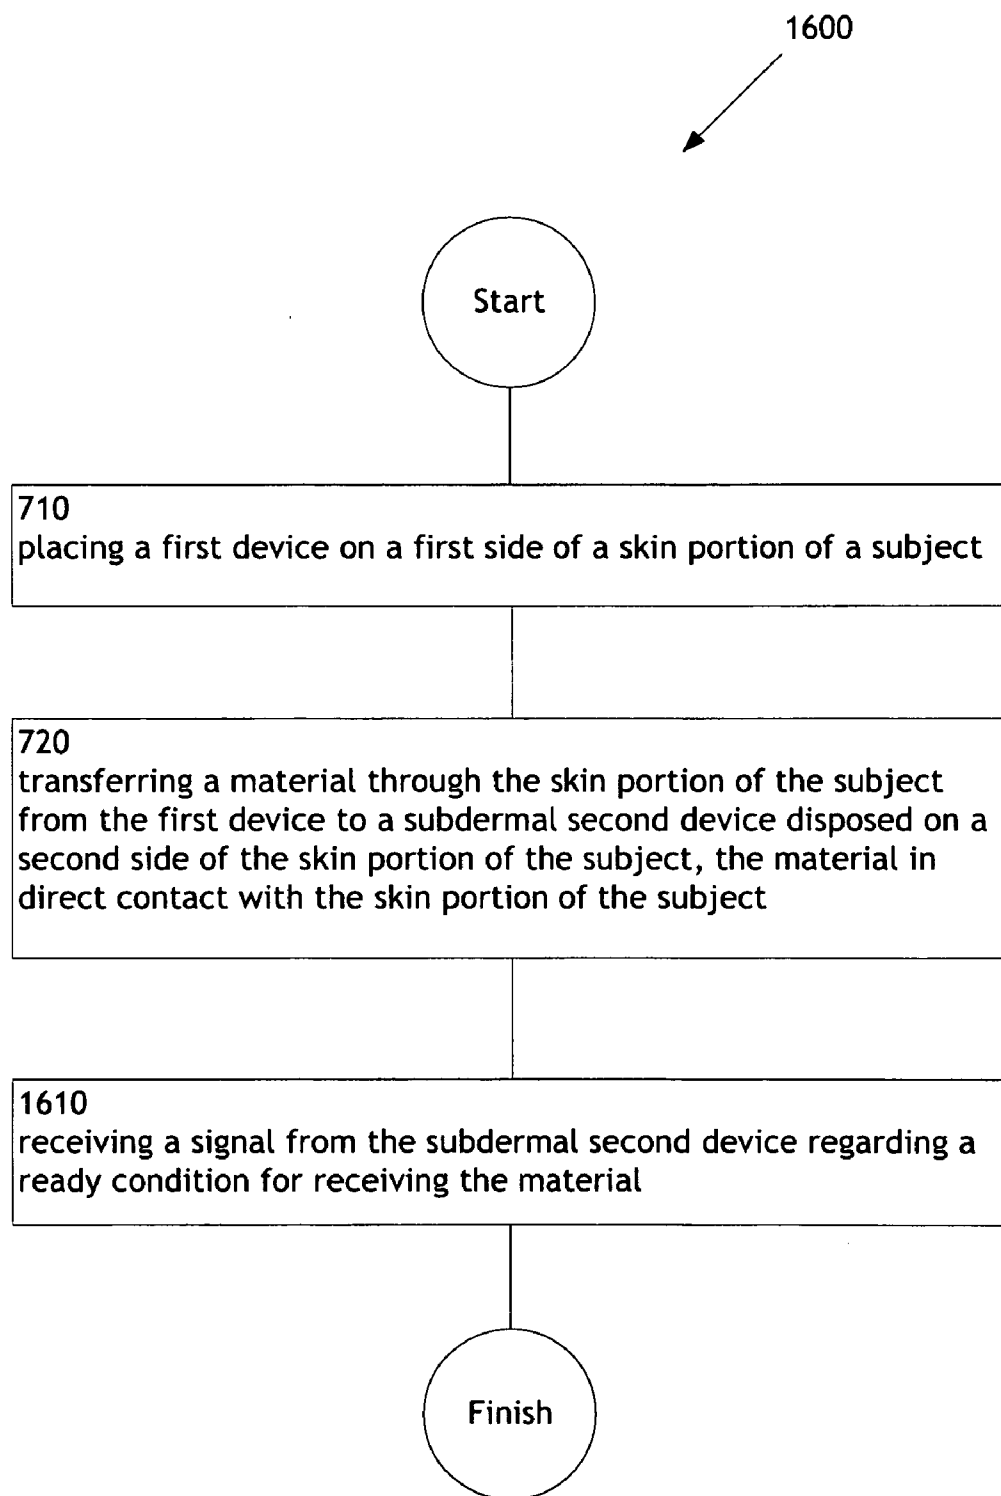


FIG. 16

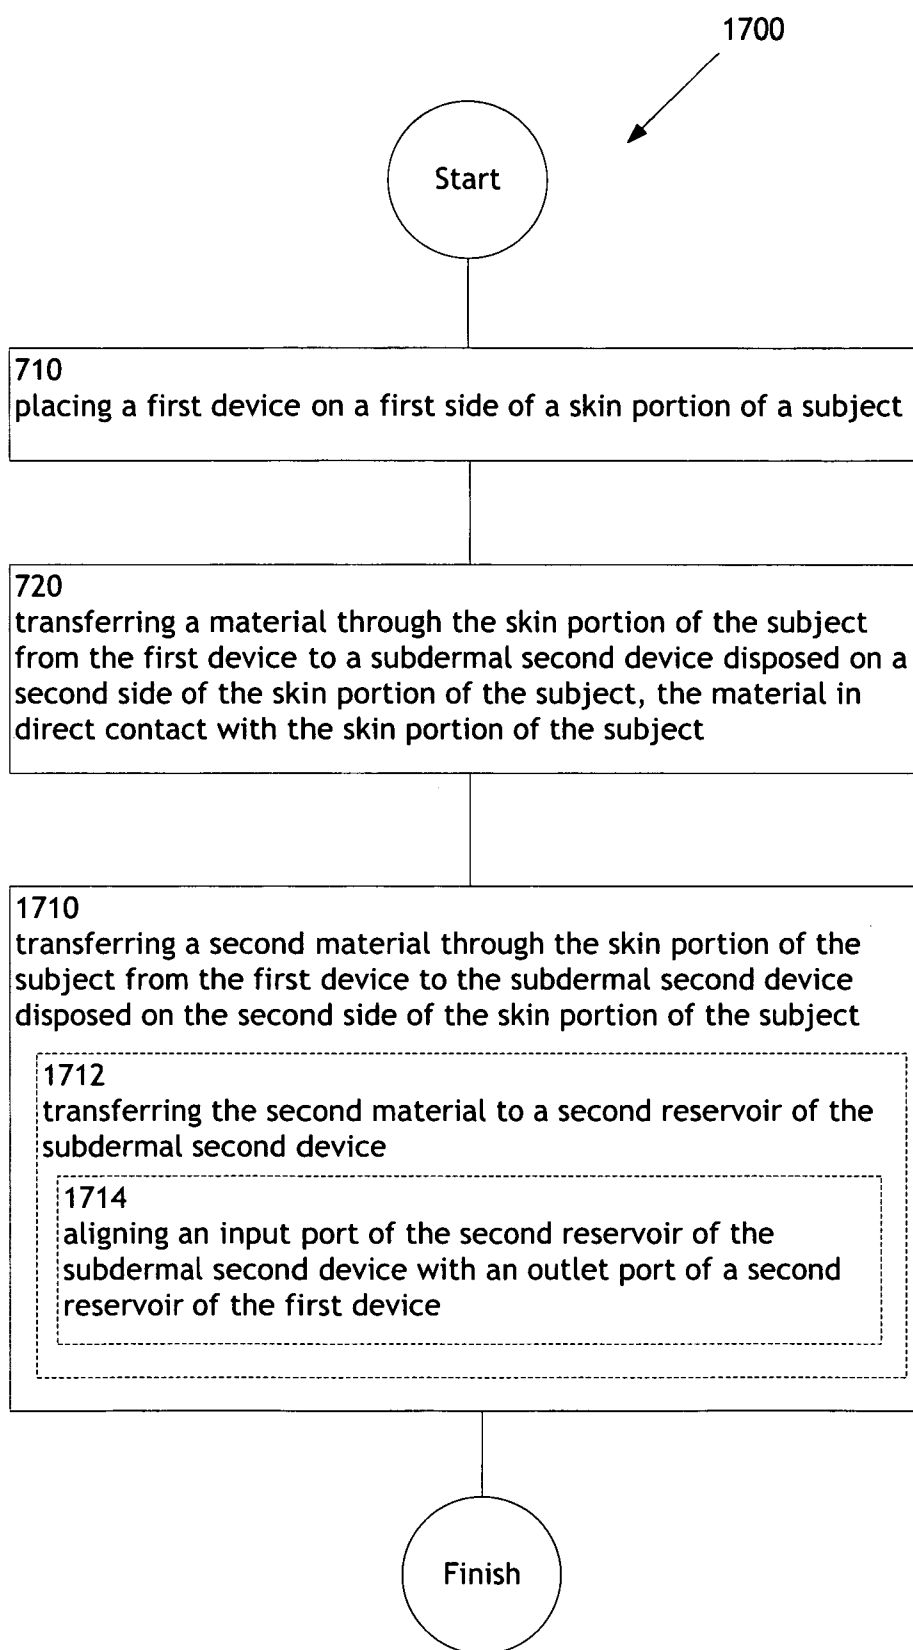


FIG. 17

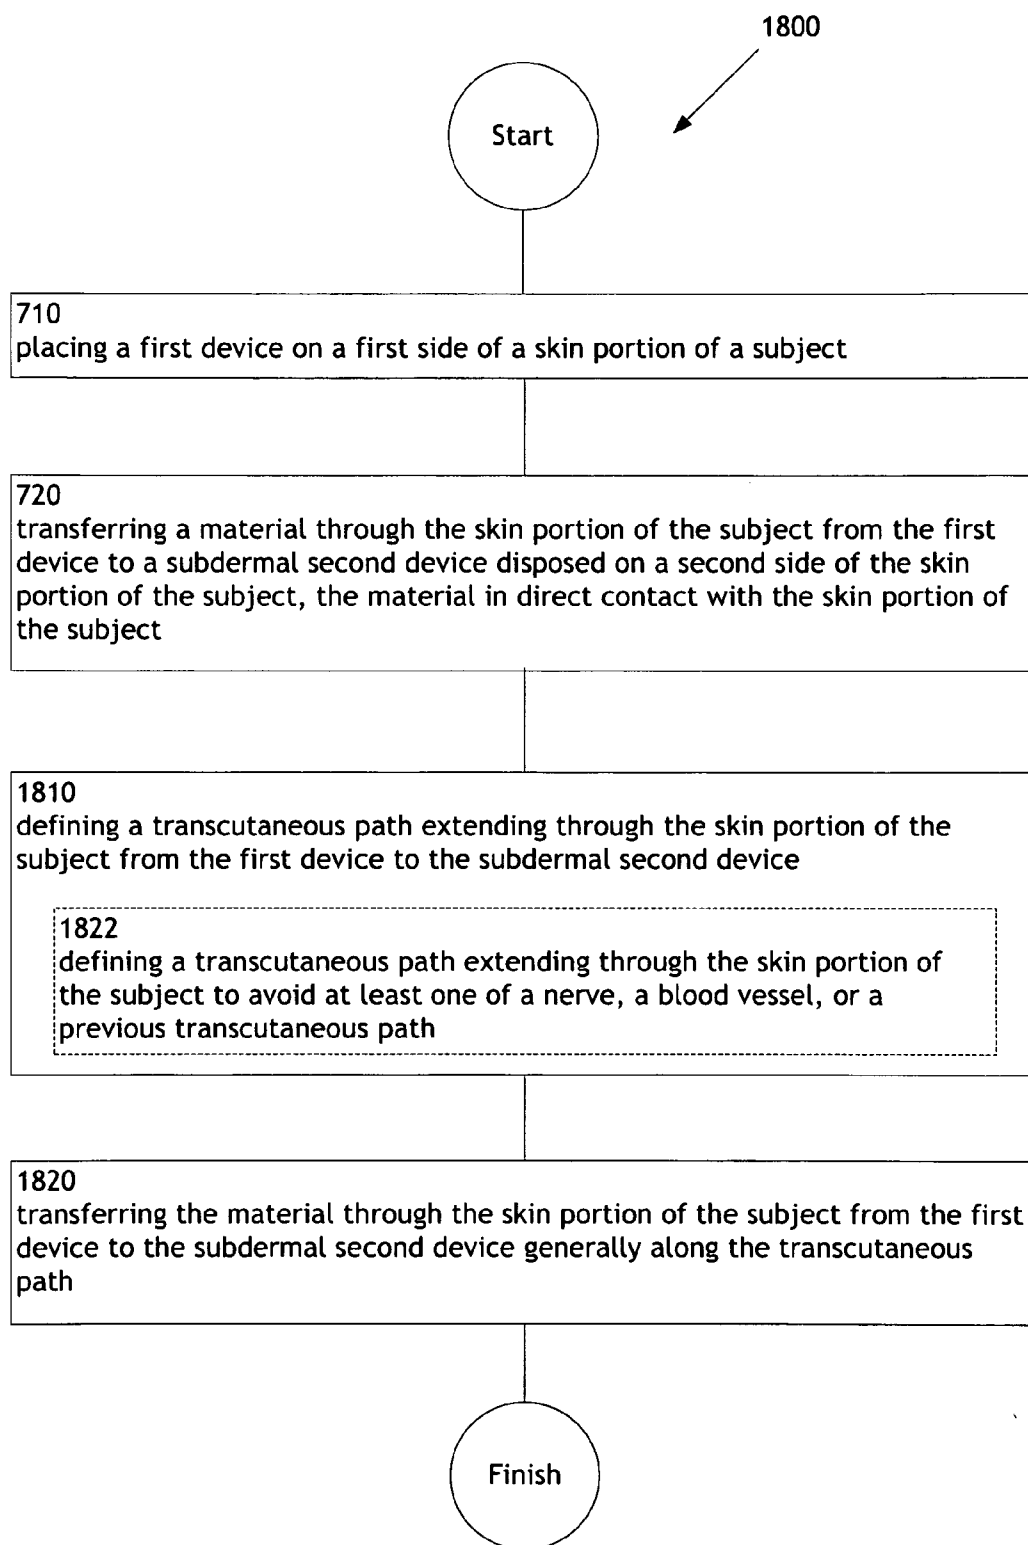


FIG. 18

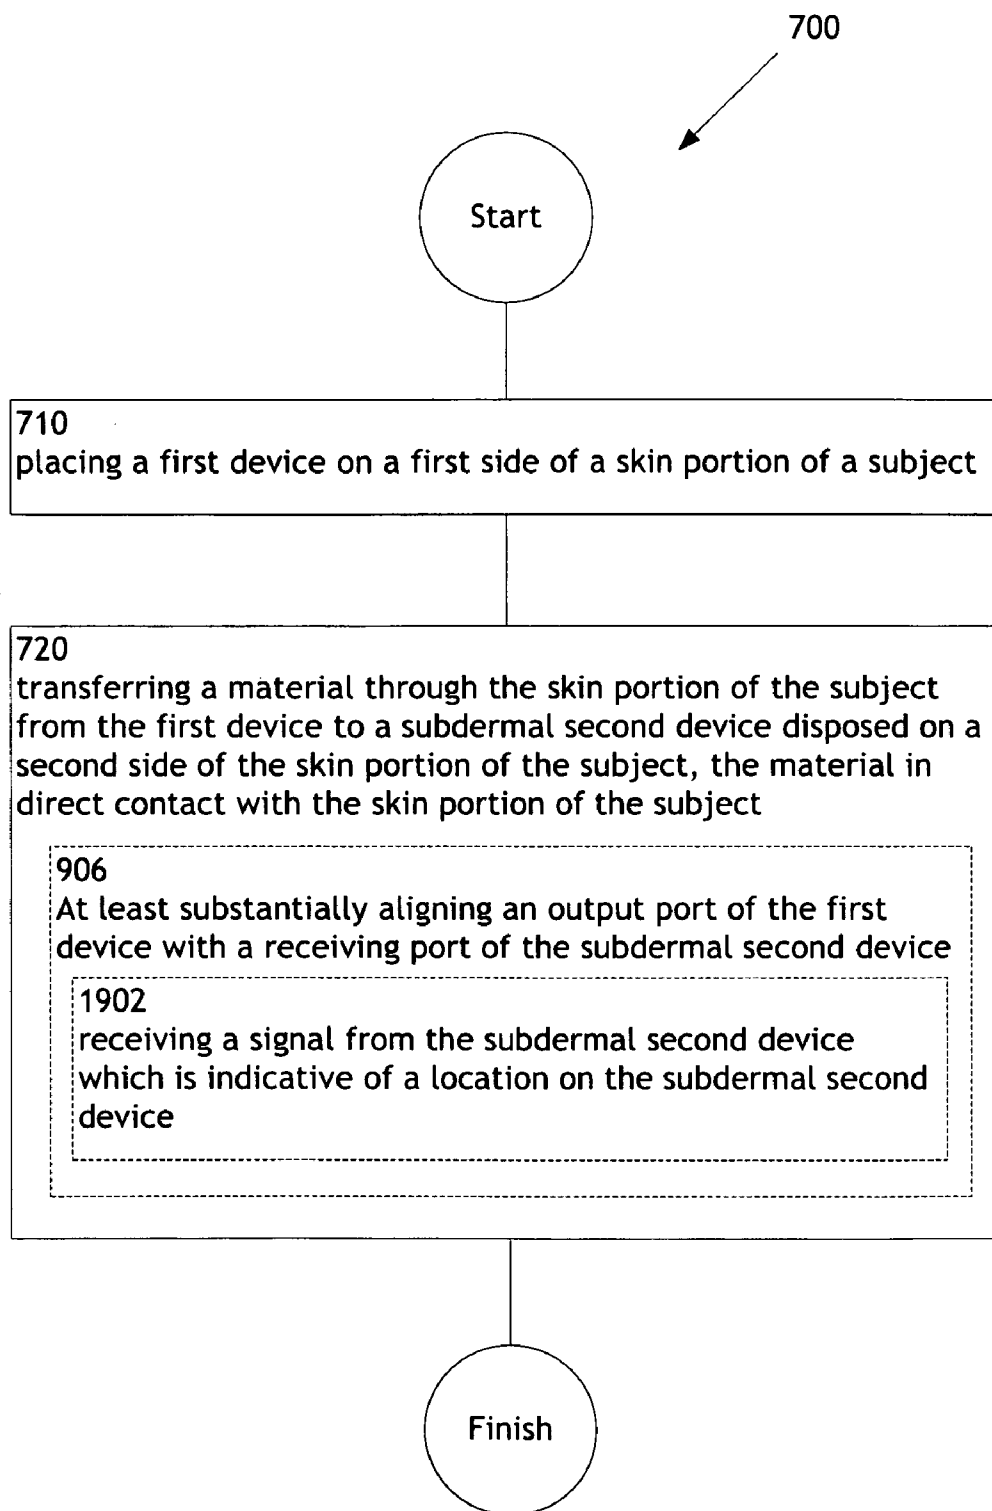


FIG. 19

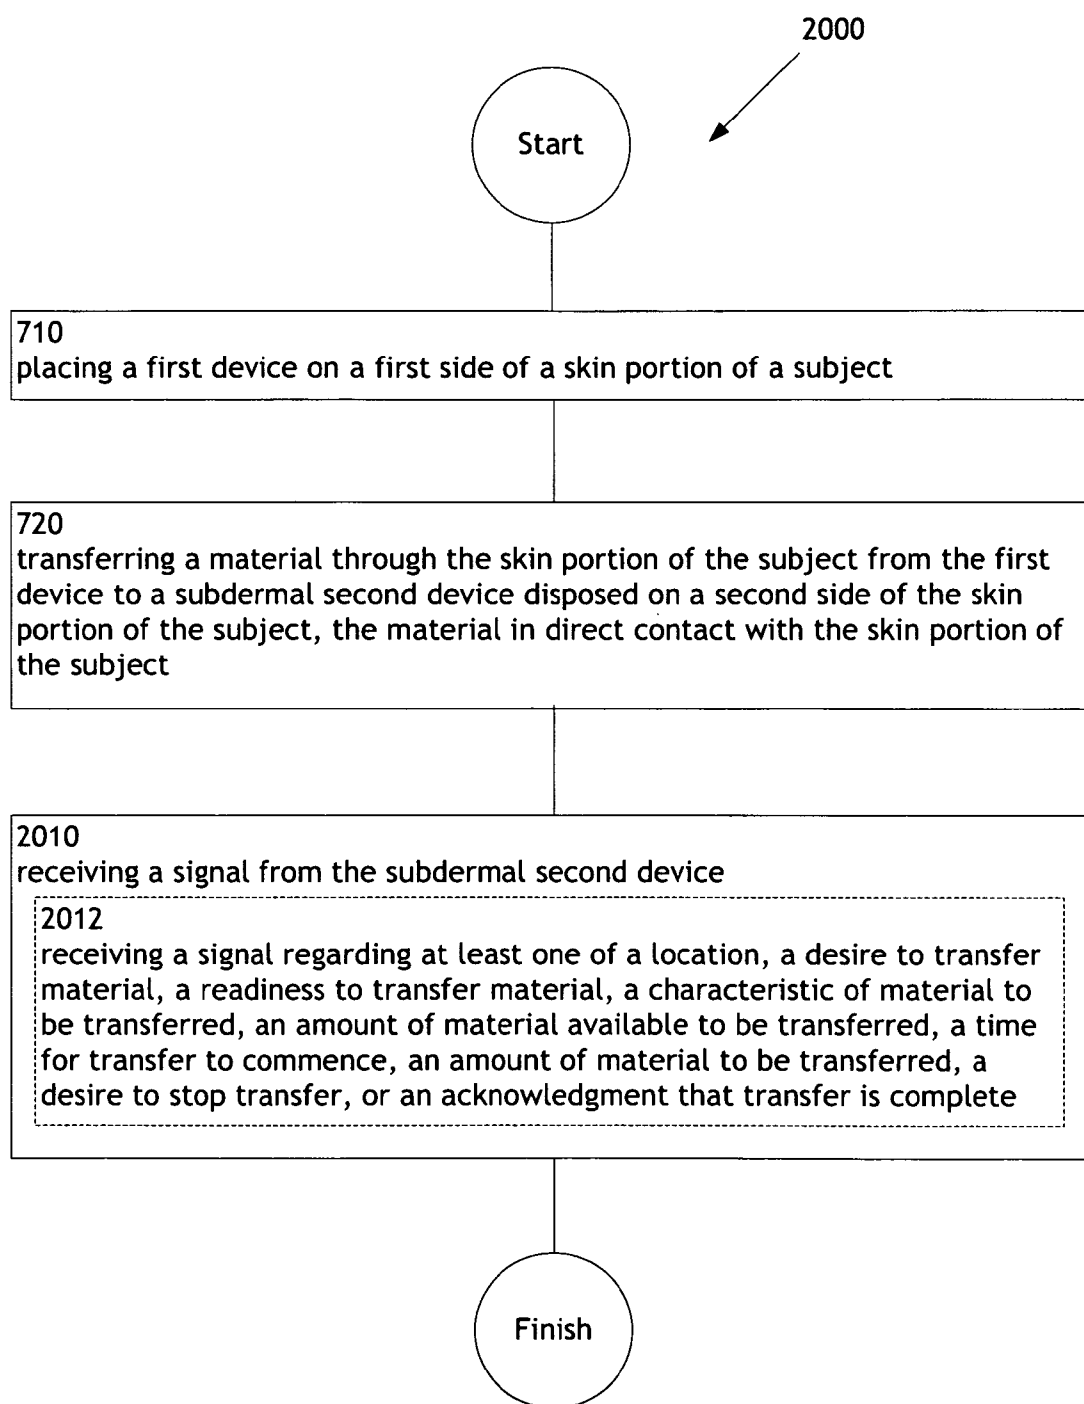


FIG. 20

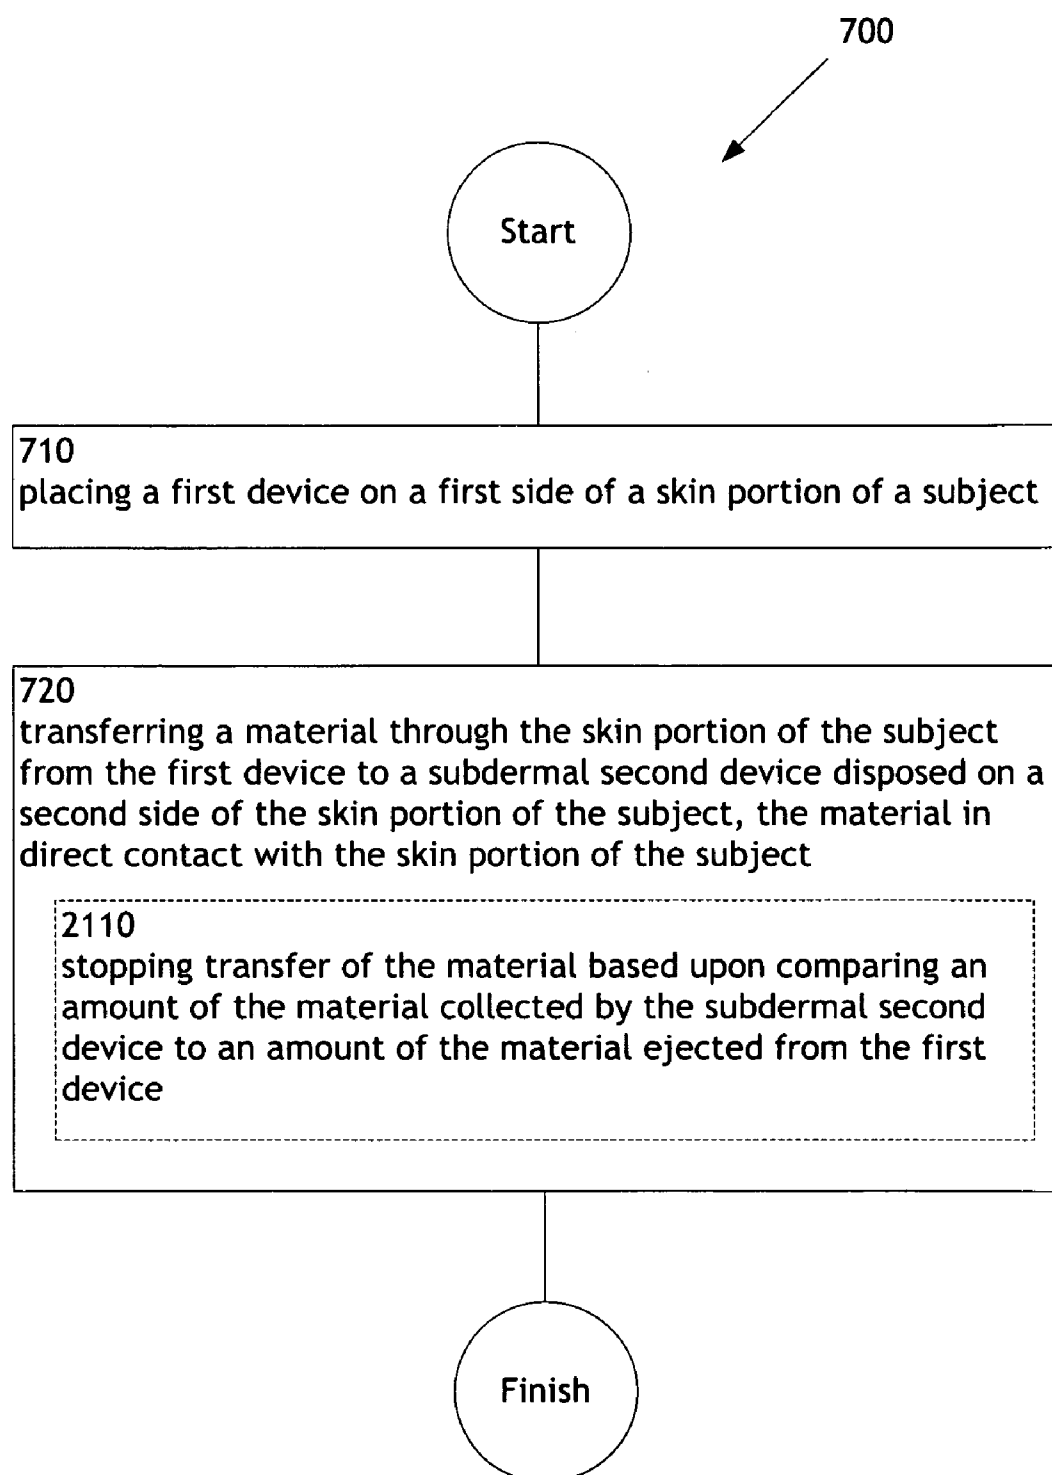


FIG. 21

SUBDERMAL MATERIAL DELIVERY DEVICE

BACKGROUND

[0001] Subcutaneous devices can be utilized to dispense material (such as medicine) to subjects in which such devices have been implanted. These devices may be desirable for ensuring patient compliance and convenience. However, reloading such devices may require invasive techniques for refilling the dispensed material, including repeatedly puncturing the skin of the subject or placing a port in the subject's skin.

SUMMARY

[0002] In one aspect, a method includes but is not limited to placing a first device on a first side of a skin portion of a subject and transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject. In addition to the foregoing, other method aspects are described in the claims, drawings, and text forming a part of the present disclosure.

[0003] In one or more various aspects, related systems include but are not limited to circuitry and/or programming for effecting the herein referenced method aspects; the circuitry and/or programming can be virtually any combination of hardware, software, and/or firmware configured to effect the herein-referenced method aspects depending upon the design choices of the system designer.

[0004] In one aspect, a system includes but is not limited to a means for placing a first device on a first side of a skin portion of a subject and a means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject. In addition to the foregoing, other system aspects are described in the claims, drawings, and text forming a part of the present disclosure.

[0005] In addition to the foregoing, various other method and/or system and/or program product aspects are set forth and described in the teachings such as text (e.g., claims and/or detailed description) and/or drawings of the present disclosure.

[0006] A device includes a reservoir configured for placement subdermally to a skin portion of a subject and an input port operably connected to the reservoir for receiving a material transferred through the skin portion of the subject from a second device placed on a second side of the skin portion of the subject.

[0007] A device includes a reservoir configured for placement externally to a skin portion of a subject and an output port operably connected to the reservoir for transferring a material through the skin portion of the subject to a second device placed on a second side of the skin portion of the subject.

[0008] The foregoing is a summary and thus may contain simplifications, generalizations, inclusions, and/or omissions of detail; consequently, those skilled in the art will appreciate that the summary is illustrative only and is NOT intended to be in any way limiting. Other aspects, features, and advan-

tages of the devices and/or processes and/or other subject matter described herein will become apparent in the teachings set forth herein.

BRIEF DESCRIPTION OF THE FIGURES

[0009] The use of the same symbols in different drawings typically indicates similar or identical items.

[0010] FIG. 1 is a schematic of a device for transferring material through a skin portion of a subject to a second subcutaneous device.

[0011] FIG. 2 is a schematic of a subject including a subcutaneous device.

[0012] FIG. 3 is another schematic of a device for transferring material through a skin portion of a subject to a second subcutaneous device.

[0013] FIG. 4 is a further schematic of a device for transferring material through a skin portion of a subject to a second subcutaneous device.

[0014] FIG. 5 is a still further schematic of a device for transferring material through a skin portion of a subject to a second subcutaneous device.

[0015] FIG. 6 is a schematic of a subcutaneous device for receiving material transferred through a skin portion of a subject.

[0016] FIG. 7 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0017] FIG. 8 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0018] FIG. 9 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0019] FIG. 10 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0020] FIG. 11 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0021] FIG. 12 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0022] FIG. 13 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0023] FIG. 14 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0024] FIG. 15 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0025] FIG. 16 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0026] FIG. 17 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0027] FIG. 18 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0028] FIG. 19 illustrates an alternative embodiment of the operational flow of FIG. 7.

[0029] FIG. 20 illustrates an operational flow representing example operations related to transferring material through a skin portion a subject to a subcutaneous device.

[0030] FIG. 21 illustrates an alternative embodiment of the operational flow of FIG. 7.

DETAILED DESCRIPTION

[0031] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description and drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here.

[0032] Referring generally to FIGS. 1 through 6, a first device 100 for transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106 is described in accordance with embodiments. The subject 104 may generally be defined as any biological entity having a protective skin covering, such as a mammalian entity (e.g., a human, a dog, a cat, or another mammal), an avian entity (e.g., a bird of prey), as well as other biological entities having protective skin coverings. The first device 100 is placed on a first side 108 of the skin portion 102 of the subject 104 (e.g., externally to the skin portion 102 of the subject 104), and the subdermal second device 106 is placed on a second side 110 of the skin portion 102 of the subject 104 (e.g., subdermally to the skin portion 102 of the subject 104). Then a material 112 may be transferred from the first device 100 to the subdermal second device 106 through the skin portion 102 of the subject 104.

[0033] In some embodiments, the subdermal second device 106 may be utilized for performing a bioassay/analytical procedure on the subject 104. For example, in one embodiment, an assay is performed utilizing a material 112 that reacts to the subject's blood. The material 112 may be replenished during the course of the assay by transferring additional material 112 through the skin portion 102 of the subject 104 from the first device 100 to the subdermal second device 106. It will be appreciated that while the material 112 has been described with some specificity as material selected for performing a bioassay/analytical procedure, a wide variety of materials may be utilized with the first device 100 or the subdermal second device 106, including materials selected for diagnosing, treating, preventing, or alleviating symptoms of an illness/disease. Further, it is contemplated that materials selected for establishing or maintaining an overall level of health/wellness for the subject 104 may be utilized as well, including vitamins, minerals, nutrients, and the like. In some embodiments, the first device 100 is configured for the transdermal transfer of material through the skin portion 102 of the subject 104 in a needle-free manner, i.e., without extending any portion of the first device 100 through the skin portion 102 of the subject 104 and without connecting the first device 100 to any mechanical instrument extending through the skin portion 102 of the subject 104.

[0034] In an embodiment, the material 112 is transferred utilizing iontophoresis (i.e., active transport within an electric field). For example, a first electrical polarity may be established for the first device 100 in opposition to a second electrical polarity for the skin portion 102 of the subject 104 or for the subdermal second device 106. Then, the material 112 may be transferred through the skin portion 102 of the subject 104 to the subdermal second device 106 utilizing iontophoresis. For instance, in an embodiment, the first electrical polarity for

the first device 100 is set in opposition to a second electrical polarity for the subdermal second device 106, creating an electric field between the first device 100 and the subdermal second device 106. The material 112, which may have a charge corresponding to the first electrical polarity of the first device 100, is then transported from the first device 100 through the skin portion 102 of the subject 104 to the subdermal second device 106 via repulsive electromotive force. It will be appreciated that the polarities of one or both of the first device 100 and the subdermal second device 106 may be controlled as needed to assist with the transfer of the material 112.

[0035] In another embodiment, the material 112 is transferred utilizing one or more jets for propelling the material 112. For example, the first device 100 may include an output port 114 with a microjet for propelling the material 112 through the skin portion 102 of the subject 104 to an input port/receiving port 116 of the subdermal second device 106. A microjet utilizes pressure to force or displace material through an extremely small diameter opening, i.e., a micro-nozzle (for example, approximately 50-200 μm), enabling the material to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. For example, the first device 100 may utilize pressure to force or displace the material 112 through a micro-nozzle, enabling the material 112 to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. In this example, the micro-nozzle may be approximately cylindrical in shape and have a diameter of approximately 50-150 μm . By way of another example, the output port 114 may comprise a MEMS (microelectromechanical systems) based microjet formed by a piezoelectric transducer bonded to a silicon wafer with a micro-nozzle which forces or displaces the material 112 through the micro-nozzle enabling the material 112 to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer.

[0036] The output port 114 may comprise a liquid microjet that utilizes pressure to force or displace a small volume of liquid through a micro-nozzle enabling the liquid to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. For example, the first device 100 may utilize pressure to force or displace a liquid material 112 through a micro-nozzle enabling the material 112 to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. In this example, the micro-nozzle may be cylindrical in shape and have a diameter of approximately 50-100 μm . By way of another example, the first device 100 may comprise a MEMS-based liquid microjet formed by a piezoelectric transducer bonded to a silicon wafer with a micro-nozzle which forces or displaces the material 112 as a liquid through the micro-nozzle enabling the material 112 to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer.

[0037] The output port 114 may comprise a pulsed liquid microjet that utilizes pressure to force one or more pulses of a liquid material 112 through a nozzle enabling the pulse of liquid to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. For example, the first device 100 may utilize pulses of pressure to force or displace liquid through a micro-nozzle at a frequency of approximately 1 Hz to 10 Hz enabling the material to penetrate at least one dermal layer of the subject 104 without substantially damaging the dermal layer. By way of another example, the first device 100 may comprise a MEMS-based

liquid microjet formed by a piezoelectric transducer bonded to a silicon wafer with a micro-nozzle which utilizes pulses of pressure at a frequency of approximately 1 Hz to 10 Hz to force or displace the material **112** as a liquid through the micro-nozzle enabling the material **112** to penetrate at least one dermal layer of the subject **104** without substantially damaging the dermal layer.

[0038] A microjet may include a liquid jet having a jet diameter in the range of micrometers or smaller. A microjet may include a liquid jet having a supersonic speed, or alternatively, a subsonic speed. In further embodiments, the material **112** may be transported through the skin portion **102** of the subject **104** to the receiving port **116** of the subdermal second device **106** in an ultra fine stream. An ultra fine stream may include a liquid stream having a diameter in the range of nanometers or larger. In still further embodiments, the material **112** may be transported through the skin portion **102** of the subject **104** to the receiving port **116** of the subdermal second device **106** in a pulsed stream.

[0039] In other embodiments, the first device **100** may force may force the material **112** through at least one dermal layer of the subject **104** utilizing high pressure. High pressure may allow a very thin stream to puncture an isolated portion of the at least one dermal layer of the subject **104** rather than transferring the impact to a larger area of the at least one dermal layer and thus not substantially damage the at least one dermal layer. High pressure may be pressure sufficient to force the material **112** through at least one dermal layer of the subject **104** without substantial damage to the at least one dermal layer of the subject **104**. For example, the first device **100** may force the material **112** through at least one dermal layer of the subject **104** at a velocity of at least approximately 100 m/s. The first device **100** may include a pressure generating mechanism for generating pressure including, but not limited to, a spring-loaded pressure generating mechanism or a piezoelectric pressure generating mechanism. For example, the first device **100** may comprise an electrically powered piezoelectric actuator which displaces a plunger in an acrylic micro-nozzle to force the material **112** through at least one dermal layer of the subject **104**. In this example, the volume and velocity of the material **112** may be controlled by controlling the voltage and rise time of the electrically powered piezoelectric actuator. By way of another example, the first device **100** may comprise a loaded spring which displaces a plunger in a micro-nozzle to force the material **112** through at least one dermal layer of the subject **104**. By way of still another example, the first device **100** may comprise a MEMS-based microjet formed by a piezoelectric transducer bonded to a silicon wafer with a micro-nozzle approximately 5-10 μm in diameter where a continuous pressure wave generated by the piezoelectric transducer propagates the material **112** toward the micro-nozzle to force the material **112** through at least one dermal layer of the subject **104**.

[0040] In an embodiment, at least one dermal layer of the subject **104** may be subjected to an energy field to aid in forcing the material **112** through the at least one dermal layer of the subject **104**. Subjecting the at least one dermal layer of the subject **104** to the energy field may create one or more pores in the at least one dermal layer or may increase the permeability of the at least one dermal layer, aiding in forcing the material **112** through the at least one dermal layer. The energy field may include, but is not limited to, an electrical energy field or an ultrasonic energy field. The first device **100**

or the subdermal second device **106** may subject the at least one dermal layer **102** to the energy field.

[0041] It will be appreciated, in light of the description provided herein, that a number of techniques may be utilized for transporting the material **112** from the first device **100** to the subdermal second device **106** through the skin portion **102** of the subject **104**. Further, more than one microjet, ultra fine stream, or pulsed stream may be utilized simultaneously over an area of the skin portion **102** of the subject **104**.

[0042] In certain embodiments, transfer of the material **112** from the first device **100** to the subdermal second device **106** may be assisted by sonophoresis, in which the skin portion **102** of the subject **104** becomes temporarily more permeable for increasing the absorption of topically applied compounds. For example, ultrasonic waves may be utilized to stimulate micro-vibrations within the skin portion **102** of the subject **104**, increasing the ability of the material **112** to migrate through the skin portion **102** to the subdermal second device **106**. In an embodiment, the material **112** is topically applied to the first side **108** of the skin portion **102** of the subject **104** (e.g., via the output port **114** of the first device **100**). The first device **100** or the subdermal second device **106** may then generate ultrasonic waves, assisting in the migration of the material **112** through the skin portion **102** of the subject **104** from the first side **108** of the skin portion **102** to the second side **110** of the skin portion **102**, and then to the receiving port **116** of the subdermal second device **106**.

[0043] The first device **100** may include a first reservoir **118** for storing the material **112**. Further, the subdermal second device **106** may include a second reservoir **120** for storing the material **112**. In an embodiment, the first reservoir **118** of the first device **100** is at least partially deloaded to transfer the material **112** through the skin portion **102** of the subject **104** to the subdermal second device **106**. The material **112** may then be collected by the subdermal second device **106** in the second reservoir **120**. In order to ensure that the material **112** reaches the subdermal second device **106**, the second reservoir **120** of the subdermal second device **106** may be aligned with the first reservoir **118** of the first device **100**. In an embodiment, this may be accomplished by at least substantially aligning the output port **114** of the first device **100** with the receiving port **116** of the subdermal second device **106**.

[0044] At least substantially aligning the output port **114** of the first device **100** with the receiving port **116** of the subdermal second device **106** may include defining a transcutaneous path **122** extending through the skin portion **102** of the subject **104** from the first device **100** to the subdermal second device **106**. The material **112** may then be transferred through the skin portion **102** of the subject **104** generally along the transcutaneous path **122**. In certain embodiments, the transcutaneous path **122** may be defined to avoid one or more undesirable obstacles, such as a blood vessel **500**, a previously utilized transcutaneous path **502**, a nerve, or the like, as illustrated in FIG. 5. A variety of techniques, including various techniques for medical imaging, may be utilized to identify such undesirable obstacles as necessary.

[0045] In order to align the output port **114** of the first device **100** with the receiving port **116** of the subdermal second device **106**, a fiducial may be located on the subject **104**. For example, as illustrated in FIG. 2, a marking (e.g., a tattoo **200**) may be placed on the subject **104**. The tattoo **200** may be a temporary tattoo, a marking made with a permanent or semi-permanent ink, or another type of marking not easily removed (e.g., not removable with soap and water in one or

two thorough washings). In an embodiment, the marking is selected to last for the duration of treatment or the lifetime of the subdermal second device **106**. In other embodiments, the marking may be reapplied as necessary. In a still further embodiment, the subdermal second device **106** may be placed within the subject **104** at a predefined location selected for its known proximity to a preexisting fiducial, such as a tattoo, a piercing, a birthmark, or a variety of readily identifiable body features and locations.

[0046] Alternatively, a fiducial **124** may be placed on the subdermal second device **106**. In an embodiment, the fiducial **124** may include a fluorescent marker. In another embodiment, the fiducial **124** may include a marker having an enhanced radio signature (e.g., a material for emitting or reflecting a radio signal). In a still further embodiment, the fiducial **124** may include a radio frequency identification tag. Alternatively, the fiducial **124** may include a radio opaque marker. The fiducial **124** may include a retroreflector (i.e., a device with enhanced optical reflection, making its surface appear brighter than it would otherwise be). Further, the fiducial **124** may include an ultrasonic marker. It will be appreciated, in light of the description provided herein, that the fiducial **124** may include a variety of location aids.

[0047] In certain embodiments, the subdermal second device **106** may transmit a signal **126** to the first device **100** for aligning the output port **114** of the first device **100** with the receiving port **116** of the subdermal second device **106**. In an embodiment, the signal **126** may include an electrical current. In another embodiment, the signal **126** may include an electrical field. In a still further embodiment, the signal **126** may include a magnetic flux. Alternatively, the signal **126** may include an optical signal, e.g., from a Light Emitting Diode (LED). The signal **126** may include a Radio Frequency Identification (RFID). Further, the signal **126** may include an ultrasonic signal. It will be appreciated, in light of the description provided herein, that the signal **126** may be transmitted in a variety of formats.

[0048] Alternatively, the signal **126** generated by the subdermal second device **106** may be transmitted from the subdermal second device **106** to inform the first device **100** (or another interested party) of information regarding the material **112**. Thus, the signal **126** may include information regarding a need for the material **112**, a need for a quantity of the material **112**, a need for a type of the material **112**, or a quantity of the material **112** collected. The signal **126** may also indicate a ready condition for receiving the material **112** or provide feedback regarding whether the material **112** is received by the subdermal second device **106**. Thus, the signal **126** may be utilized to stop transfer of the material **112** if the material is not received by the subdermal second device **106**. Alternatively, the signal **126** may be utilized to compare an amount of the material **112** collected by the subdermal second device **106** to an amount of the material **112** transferred by the first device **100**. Further, the signal **126** may be utilized to stop transfer of the material **112** when the subdermal second device **106** does not require more of the material (e.g., when the second reservoir **120** of the subdermal second device **106** is full). Further, the first device **100** may include a receiver **128** for receiving the signal **126** from the subdermal second device **106** and coordinating the transfer of the material **112** from the first device **100** to the subdermal second device **106**. For example, the subdermal second device **106** may contain one or more sensors for detecting an amount of material contained in the second reservoir **120**. When the

material is at a desired level within the second reservoir **120**, a sensor may cause a signal **126** to be sent by a signal generation and transmission mechanism, such as an ultrasonic transmitter, or the like. In this embodiment, receipt of the ultrasonic signal by the first device **100** may cause the first device **100** to stop transfer of the material **112**.

[0049] In certain embodiments, either or both of the first device **100** and the subdermal second device **106** may include one or more reservoirs for storing material. For example, in embodiments illustrated in FIGS. **3** and **4**, the first device **100** may include a third reservoir **300**, and the subdermal second device **106** may include a fourth reservoir **302**. The third reservoir **300** and the fourth reservoir **302** may be utilized for storing another material **304**. The material **304** may be a second material different from the first material **112** (e.g., in a case where multiple materials are stored by the subdermal second device **106**). Alternatively, the material **304** may be the same as the material **112** (e.g., in a case where multiple doses of the same material are stored by the subdermal second device **106**).

[0050] It will be appreciated in light of the description provided herein, that the third reservoir **300** and the fourth reservoir **302** may be connected to separate output ports and receiving ports (as illustrated in FIG. **3**) or connected to the same output ports and receiving ports as the first reservoir **118** and the second reservoir **120**, respectively (as illustrated in FIG. **4**). Further, in the embodiment illustrated in FIG. **3**, the output port of the third reservoir **300** may be aligned with the receiving port of the fourth reservoir **302** (as previously described) for transporting the material **304** from the first device **100** to the subdermal second device **106**. It is contemplated that the first device **100** and the subdermal second device **106** may each include more than two reservoirs for storing and receiving various materials, including three reservoirs, four reservoirs, and more than four reservoirs. Further, it will be appreciated, in light of the description provided herein, that the various reservoirs may be connected to various output ports and receiving ports. For example, in an embodiment illustrated in FIG. **5**, the first reservoir **118** and the second reservoir **120** may be connected to a second output port **504** and a second receiving port **506**.

[0051] In an embodiment illustrated in FIG. **6**, the receiving port **116** of the subdermal second device **106** includes a first window **600** for providing access to an antechamber **602** of the second reservoir **120**, and one or more second windows **604** for providing access to one or more inner chamber **606** of the second reservoir **120**. The first window **600** or the one or more second windows **604** may be controllable. For example, the subdermal second device **106** may include one or more motors or other device(s) for controlling the windows **600**, **604**. It will be appreciated that the amount the windows are open may be controllable as well, such as the diameter/opening width to which the windows are opened.

[0052] In an embodiment, the subdermal second device **106** is powered by a power source outside the body of the subject **104**. The first device **100** may include a power provider. The subdermal second device **106** may include a power receiver. The first device **100** may provide power to the subdermal second device **106** via the power provider and the power receiver. For example, the power provider may be connected to an AC power source and may provide power to the subdermal second device **106** via the power receiver utilizing at least one dermal layer of the subject **104** as a conductive medium.

[0053] In another embodiment, the subdermal second device 106 may include an energy storage mechanism. For example, the energy storage mechanism may include, but is not limited to, a lithium-ion battery, an alkaline battery, a lead acid battery, an absorbed glass mat battery, a thermal battery, a chloroaluminate battery, a nickel-zinc battery, a nickel cadmium battery, an aluminum battery, a lithium battery, or a nickel metal hydride battery. The energy storage mechanism may be charged by a power source outside the body of the subject 104. The first device 100 may include a power provider. The subdermal second device 106 may include a power receiver. The first device 100 may charge the energy storage mechanism via the power provider and the power receiver. For example, the power provider may be connected to an AC power source and may charge the energy storage mechanism via the power receiver utilizing mutual induction.

[0054] FIG. 7 illustrates an operational flow 700 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. In FIG. 7 and in following figures that include various examples of operational flows, discussion and explanation may be provided with respect to the above-described examples of FIGS. 1 through 6, or with respect to other examples and contexts. However, it will be understood, in light of the description provided herein, that the operational flows may be executed in a number of other environments and contexts, or in modified versions of FIGS. 1 through 6. Also, although the various operational flows are presented in the sequence(s) illustrated, it will be understood, in light of the description provided herein, that the various operations may be performed in other orders than those which are illustrated, or may be performed concurrently.

[0055] After a start operation, the operational flow 700 moves to a placing operation 710, where a first device may be placed on a first side of a skin portion of a subject. For example, as shown in FIGS. 1 through 6, the first device 100 may be placed on the first side 108 of the skin portion 102 of the subject 104.

[0056] Then, in a transferring operation 720, a material may be transferred through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject, the material in direct contact with the skin portion of the subject. For example, as shown in FIGS. 1 through 6, the material 112 may be transferred from the first device 100 to the subdermal second device 106 through the skin portion 102 of the subject 104, where the subdermal second device 106 is placed on the second side 110 of the skin portion 102 of the subject 104.

[0057] FIG. 8 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 8 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 802, an operation 804, an operation 806, or an operation 808.

[0058] At the operation 802, the material may be transferred utilizing at least one of iontophoresis, microjets, or an ultra fine stream. For example, as shown in FIGS. 1 through 6, the output port 114 of the first device 100 may include one or more microjets for propelling the material 112 through the skin portion 102 of the subject 104 to the input port/receiving port 116 of the subdermal second device 106.

[0059] At the operation 804, transfer of the material may be assisted with sonophoresis. For example, as shown in FIGS. 1 through 6, the material 112 may be topically applied to the

first side 108 of the skin portion 102 of the subject 104. The first device 100 or the subdermal second device 106 may then generate ultrasound waves, assisting in the migration of the material 112 through the skin portion 102 of the subject 104 to the receiving port 116 of the subdermal second device 106.

[0060] At the operation 806, an electric polarity may be established for the first device where the subdermal second device has an electric polarity opposite the first device. For example, as shown in FIGS. 1 through 6, a first electrical polarity may be established for the first device 100 in opposition to a second electrical polarity for the subdermal second device 106. Further, at the operation 808, the polarity of at least one of the first device or the subdermal second device may be controlled. For example, as shown in FIGS. 1 through 6, the polarity of the first device 100 may be controlled as needed to assist with the transfer of the material 112.

[0061] FIG. 9 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 9 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 902, an operation 904, an operation 906, an operation 908, or an operation 910.

[0062] At the operation 902, the material may be transferred from at least one of an iontophoresis device, a microjet injector device, a sonophoresis device, or a transdermal patch to the subdermal second device. For example, as shown in FIGS. 1 through 6, the first device 100 may be a microjet injector device, in which the output port 114 includes one or more microjets for propelling the material 112 through the skin portion 102 of the subject 104 to the receiving port 116 of the subdermal second device 106.

[0063] At the operation 904, a reservoir of the first device may be at least partially deloaded to transfer the material through the skin portion of the subject to the subdermal second device. For example, as shown in FIGS. 1 through 6, the first reservoir 118 of the first device 100 may be at least partially deloaded to transfer the material 112 through the skin portion 102 of the subject 104 to the subdermal second device 106.

[0064] At the operation 906, an output port of the first device may be at least substantially aligned with a receiving port of the subdermal second device. For example, as shown in FIGS. 1 through 6, the output port 114 of the first device 100 may be aligned with the receiving port 116 of the subdermal second device 106. Further, at the operation 908, a fiducial may be located on the subject. For example, as shown in FIGS. 1 through 6, the subdermal second device 106 may be placed within the subject 104 at a predefined location selected for its known proximity to a fiducial (e.g., a tattoo, a piercing, or a birthmark). The fiducial may then be located to determine the position of the subdermal second device 106. Further, at the operation 910, a tattoo may be located on the subject. For example, as shown in FIGS. 1 through 6, the tattoo 200 may be located on the subject 104.

[0065] FIG. 10 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 10 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1002, an operation 1004, an operation 1006, or an operation 1008. At the operation 1002, a fiducial may be located on the subdermal second device. For example, as shown in FIGS. 1 through 6, the fiducial 124 may be located on the subdermal second device 106. Further, at the operation 1004, at least one of a fluorescent marker, a marker

having an enhanced radio signature, a radio frequency identification tag, a radio opaque marker, a retroreflector, or an ultrasonic marker disposed of the subdermal second device may be located. For example, as shown in FIGS. 1 through 6, the fiducial 124 may include a radio frequency identification tag. Further, at the operation 1006, a signal from the subdermal second device may be received. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the subdermal second device 106 may broadcast a radio frequency identification signal 126 to the first device 100 for aligning the output port 114 of the first device 100 with the receiving port 116 of the subdermal second device 106. Further, at the operation 1008, at least one of an electrical current, an electrical field, a magnetic flux, an optical signal, a radio frequency identification, or an ultrasonic signal may be received from the subdermal second device. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the first device 100 receives the radio frequency identification signal 126 from the fiducial 124.

[0066] FIG. 11 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 11 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1102, an operation 1104, an operation 1106, or an operation 1108.

[0067] At the operation 1102, at least one of a drug, a logistical material, or a marker may be transferred through the skin portion of the subject from the first device to the subdermal second device. For example, as shown in FIGS. 1 through 6, the material 112 may include a marker/taggant for interacting with biological material, such as the subject's blood. Alternatively, the material 112 may include a drug for treating, preventing, or alleviating symptoms of an illness/disease. Further, the material 112 may include a logistical material (e.g., antibodies, nucleic acids, and the like).

[0068] At the operation 1104, feedback may be received regarding whether the material is received by the subdermal second device. For example, as shown in FIGS. 1 through 6, the signal 126 transmitted to the first device 100 (or another interested party) may provide feedback regarding whether the material 112 is received by the subdermal second device 106.

[0069] At the operation 1106, transfer of the material may be stopped if the material is not received by the subdermal second device. For example, as shown in FIGS. 1 through 6, the signal 126 may be utilized to stop transfer of the material 112 if the material is not received by the subdermal second device 106.

[0070] At the operation 1108, an amount of the material collected by the subdermal second device may be compared to an amount of the material ejected from the first device. For example, as shown in FIGS. 1 through 6, the signal 126 may be utilized to compare an amount of the material 112 collected by the subdermal second device 106 to an amount of the material 112 ejected from the first device 100.

[0071] FIG. 12 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 12 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1202, an operation 1204, an operation 1206, or an operation 1208.

[0072] At the operation 1202, transfer of the material may be stopped when the subdermal second device does not require additional material. For example, as shown in FIGS. 1 through 6, the signal 126 may be utilized to stop transfer of the

material 112 when the subdermal second device 106 does not require additional material 112. Further, at the operation 1204, transfer of the material may be stopped when a reservoir on the subdermal second device is full. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the signal 126 may be utilized to stop transfer of the material 112 when the second reservoir 120 of the subdermal second device 106 is full. Further, at the operation 1206, a signal may be received from the subdermal second device indicating it does not require additional material. For example, as shown in FIGS. 1 through 6, the signal 126 may be received by the first device 100 and utilized to stop transfer of the material 112.

[0073] At the operation 1208, a stream of the material may be pulsed. For example, as shown in FIGS. 1 through 6, the output port 114 of the first device 100 may be utilized for pulsing a stream of the material 112 through the skin portion 102 of the subject 104 to the receiving port 116 of the subdermal second device 106. The first device 100 may force the material 112 through the skin portion 102 of the subject 104 as a liquid in a pulse in order to determine if the subdermal second device 106 is receiving the material 112 (e.g., prior to continuing to transfer the material 112 through the skin portion 102 of the subject 104). The first device 100 or the subdermal second device 106 may include one or more processors, memories, transmitters, and receivers for determining if the subdermal second device 106 is receiving the material 112.

[0074] FIG. 13 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 13 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1302, an operation 1304, an operation 1306, or an operation 1308.

[0075] At the operation 1302, the material may be transferred through an input port of the subdermal second device. For example, as shown in FIGS. 1 through 6, the material 112 may be transferred through the receiving port 116 of the subdermal second device 106. Further, at the operation 1304, a stream of the material may be transferred through at least one of a self-healing material (e.g., an epoxy containing microcapsules filled with a liquid monomer or a supramolecular polymer), a self-sealing material (e.g., a hydrogel disposed of a porous substrate), a layer of material (e.g., a layer of plastic), a viscous material (e.g., a gel), a porous material (e.g., a material constructed utilizing a polymer or surfactant template), a liquid material (e.g., a water-based solution), a wickable material (e.g., synthetic resins or fibers), or a closable window (e.g., an aperture covered by a leaf shutter) disposed of the subdermal second device. For example, as shown in FIGS. 1 through 6, a stream of the material 112 may be transferred through the receiving port 116 of the subdermal second device 106, where the receiving port 116 includes a self-healing material (e.g., a material capable of fully or partially restoring its integrity after being punctured by the stream of material 112). Further, the receiving port 116 may include a self-sealing material (e.g., a material capable of fully or partially resealing itself after being penetrated by the stream of material 112). Still further, the receiving port 116 may include a viscous material (e.g., a material that is viscous at the body temperature of the subject). Alternatively, the receiving port 116 may include a closable window, where the window is openable for receiving the material 112. It will be appreciated that the material 112

may be retained by one or more layers of material. Additionally, it will be appreciated that the material 112 may be retained by the subdermal second device 106 via surface tension in the case of a liquid material. Further, at the operation 1306, the input port may be opened in preparation for receiving the material. For example, as shown in FIGS. 1 through 6 and continuing a previous example, the receiving port 116 may include a closable window, where the window is openable for receiving the material 112. The window may be opened in preparation for receiving the material 112. Then, at the operation 1308, transfer of the material may be coordinated with the opening of the input port. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the first device 100 or another external device, possibly connected to the first device 100, may transfer a signal to the subdermal second device 106 notifying the subdermal second device 106 to prepare for receiving the material 112. Subsequently, the subdermal second device 106 may open the closable window to receive the material 112.

[0076] FIG. 14 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 14 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1402, or an operation 1404.

[0077] At the operation 1402, the material may be transferred to a first reservoir of the subdermal second device. For example, as shown in FIGS. 1 through 6, the material 112 may be transferred from the first device 100 to the second reservoir 120 of the subdermal second device 106. In one embodiment, the second reservoir 120 of the subdermal second device 106 is configured to rotate for retaining the material 112. For example, the rotation of the second reservoir 120 may bias the material 112 towards the walls of the second reservoir 120, retaining the material within the second reservoir 120 even when the receiving port 116 is in an opened orientation for receiving the material 112 (e.g., in the case of a closable window). Alternatively, the second reservoir 120 may include one or more walls constructed to have an attraction to the material 112 (e.g., the wall may be hydrophilic in the case of a water-based material 112). Further, at the operation 1404, an input port of the first reservoir of the subdermal second device may be aligned with an output port of the first device. For example, as shown in FIGS. 1 through 6, this may be accomplished by at least substantially aligning the output port 114 of the first device 100 with the receiving port 116 of the subdermal second device 106.

[0078] FIG. 15 illustrates an operational flow 1500 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. FIG. 15 illustrates an embodiment where the example operational flow 700 of FIG. 7 may include at least one additional operation. Additional operations may include an operation 1510, or an operation 1512.

[0079] After a start operation, a placing operation 710, and a transferring operation 720, the operational flow 1500 moves to a receiving operation 1510, where a signal from the subdermal second device may be received regarding the material. For example, as shown in FIGS. 1 through 6, the first device 100 (or another interested party, such as a monitoring station, a doctor's office, or the like) may receive a signal 126 regarding the material 112.

[0080] At the operation 1512, a signal may be received from the subdermal second device regarding at least one of a need for the material, a need for a quantity of the material, a

need for a type of the material, a quantity of the material present, or a quantity of the material collected. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the signal 126 received by the first device 100 may include information regarding a need for the material 112 by the subdermal second device 106.

[0081] FIG. 16 illustrates an operational flow 1600 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. FIG. 16 illustrates an example embodiment where the example operational flow 700 of FIG. 7 may include at least one additional operation. Additional operations may include an operation 1610.

[0082] After a start operation, a placing operation 710, and a transferring operation 720, the operational flow 1600 moves to a receiving operation 1610, where a signal from the subdermal second device may be received regarding a ready condition for receiving the material. For example, as shown in FIGS. 1 through 6, the signal 126 may indicate a ready condition for receiving the material 112. In certain embodiments, a ready condition may include information regarding a port/pre-port that has been opened. For example, the signal 126 may indicate that a first window 600 for providing access to an antechamber 602 of the second reservoir 120 of the subdermal second device 106 has opened. Alternatively, the signal 126 may indicate that a second window 604 for providing access to an inner chamber 606 of the second reservoir 120 of the subdermal second device 106 has opened.

[0083] FIG. 17 illustrates an operational flow 1700 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. FIG. 17 illustrates an embodiment where the example operational flow 700 of FIG. 7 may include at least one additional operation. Additional operations may include an operation 1710, an operation 1712, or an operation 1714.

[0084] After a start operation, a placing operation 710, and a transferring operation 720, the operational flow 1700 moves to a second transferring operation 1710, where a second material may be transferred through the skin portion of the subject from the first device to the subdermal second device disposed on the second side of the skin portion of the subject. For example, as shown in FIGS. 1 through 6, the second material 304 may be transferred through the skin portion 102 of the subject 104 from the first device 100 to the subdermal second device 106.

[0085] At the operation 1712, the second material may be transferred to a second reservoir of the subdermal second device. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the second material 304 may be transferred from the third reservoir 300 of the first device 100 to the fourth reservoir 302 of the subdermal second device 106. Further, at the operation 1714, an input port of the second reservoir of the subdermal second device may be aligned with an outlet port of a second reservoir of the first device. For example, as shown in FIGS. 1 through 6 and continuing the previous example, the output port of the third reservoir 300 may be aligned with the receiving port of the fourth reservoir 302 in preparation for receiving the second material 304.

[0086] FIG. 18 illustrates an operational flow 1800 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. FIG. 18 illustrates an embodi-

ment where the example operational flow 700 of FIG. 7 may include at least one additional operation. Additional operations may include an operation 1810, an operation 1820, or an operation 1822.

[0087] After a start operation, a placing operation 710, and a transferring operation 720, the operational flow 1800 moves to a defining operation 1810, where a transcutaneous path extending through the skin portion of the subject from the first device to the subdermal second device may be defined. For example, as shown in FIGS. 1 through 6, a transcutaneous path 122 extending through the skin portion 102 of the subject 104 from the first device 100 to the subdermal second device 106 may be defined.

[0088] Then, in a transferring operation 1820, the material may be transferred through the skin portion of the subject from the first device to the subdermal second device generally along the transcutaneous path. For example, as shown in FIGS. 1 through 6, the material 112 may be transferred through the skin portion 102 of the subject 104 generally along the transcutaneous path 122.

[0089] At the operation 1822, a transcutaneous path extending through the skin portion of the subject may be defined to avoid at least one of a nerve, a blood vessel, or a previous transcutaneous path. For example, as shown in FIGS. 1 through 6, the transcutaneous path 122 may be defined to avoid a blood vessel 500.

[0090] FIG. 19 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 19 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 1902. At the operation 1902, a signal from the subdermal second device which is indicative of a location on the subdermal second device may be received. For example, as shown in FIGS. 1 through 6, the subdermal second device 106 may transmit a signal to the first device 100 indicating a location on the subdermal second device 106, such as the location of the receiving port 116. The location of the receiving port 116 may be transmitted as a set of coordinates, a vector oriented from a known position on the subdermal second device 106, or in another format as desired.

[0091] FIG. 20 illustrates an operational flow 2000 representing example operations related to transferring material through a skin portion 102 of a subject 104 to a subcutaneous/subdermal second device 106. FIG. 20 illustrates an embodiment where the example operational flow 700 of FIG. 7 may include at least one additional operation. Additional operations may include an operation 2010, or an operation 2012.

[0092] After a start operation, a placing operation 710, and a transferring operation 720, the operational flow 2000 moves to a receiving operation 2010, where a signal from the subdermal second device may be received. For example, as shown in FIGS. 1 through 6, the first device 100 may receive a signal 126 from the subdermal second device 106.

[0093] At the operation 2012, a signal may be received regarding at least one of a location, a desire to transfer material, a readiness to transfer material, a characteristic of material to be transferred, an amount of material available to be transferred, a time for transfer to commence, an amount of material to be transferred, a desire to stop transfer, or an acknowledgement that transfer is complete. For example, as shown in FIGS. 1 through 6, the first device 100 may receive a signal 126 from the subdermal second device 106 regarding a location for a material, such as the location of a receiving port 116. Alternatively, the signal 126 may indicate a desire to

transfer material (e.g., a signal indicating the subdermal second device 106 is in need of additional material), a readiness to transfer material (e.g., at a time when the subdermal second device 106 is ready to receive material), a characteristic of material to be transferred (e.g., a desired concentration of a drug), an amount of material available to be transferred (e.g., an amount of material present in the first device 100), a time for transfer to commence (e.g., for scheduling a transfer of material), an amount of material to be transferred (e.g., a specific number of grams of a material), a desire to stop transfer (e.g., a signal indicating the subdermal second device 106 is full), or an acknowledgement that transfer is complete (e.g., a signal indicating the subdermal second device 106 has as much of a material as it needs).

[0094] FIG. 21 illustrates alternative embodiments of the example operational flow 700 of FIG. 7. FIG. 21 illustrates embodiments where the transferring operation 720 may include at least one additional operation. Additional operations may include an operation 2110.

[0095] At the operation 2110, transfer of the material may be stopped based upon comparing an amount of the material collected by the subdermal second device to an amount of the material ejected from the first device. For example, as shown in FIGS. 1 through 6, the subdermal second device 106 may signal 126 the first device 100 regarding an amount of material received. In a case where the amount of material received is different from an amount of material sent/ejected from the first device 100, a determination may be made regarding the efficacy of the transfer. In a case where the material transferred from the first device 100 to the subdermal second device 106 is less than the amount of material received by the subdermal second device 106, the transfer may be stopped. In this instance, the first device 100 and the subdermal second device 106 may need to be realigned for a more effective transfer of material. Alternatively, a determination may be made that the material is being diverted by an obstacle, absorbed by the subject, or the like.

[0096] Following are a series of flowcharts depicting implementations. For ease of understanding, the flowcharts are organized such that the initial flowcharts present implementations via an example implementation and thereafter the following flowcharts present alternate implementations and/or expansions of the initial flowchart(s) as either sub-component operations or additional component operations building on one or more earlier-presented flowcharts. Those having skill in the art will appreciate that the style of presentation utilized herein (e.g., beginning with a presentation of a flowchart(s) presenting an example implementation and thereafter providing additions to and/or further details in subsequent flowcharts) generally allows for a rapid and easy understanding of the various process implementations. In addition, those skilled in the art will further appreciate that the style of presentation used herein also lends itself well to modular and/or object-oriented program design paradigms.

[0097] Those skilled in the art will appreciate that the foregoing specific exemplary processes and/or devices and/or technologies are representative of more general processes and/or devices and/or technologies taught elsewhere herein, such as in the claims filed herewith and/or elsewhere in the present application.

[0098] Those having skill in the art will recognize that the state of the art has progressed to the point where there is little distinction left between hardware, software, and/or firmware implementations of aspects of systems; the use of hardware,

software, and/or firmware is generally (but not always, in that in certain contexts the choice between hardware and software can become significant) a design choice representing cost vs. efficiency tradeoffs. Those having skill in the art will appreciate that there are various vehicles by which processes and/or systems and/or other technologies described herein can be effected (e.g., hardware, software, and/or firmware), and that the preferred vehicle will vary with the context in which the processes and/or systems and/or other technologies are deployed. For example, if an implementer determines that speed and accuracy are paramount, the implementer may opt for a mainly hardware and/or firmware vehicle; alternatively, if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware. Hence, there are several possible vehicles by which the processes and/or devices and/or other technologies described herein may be effected, none of which is inherently superior to the other in that any vehicle to be utilized is a choice dependent upon the context in which the vehicle will be deployed and the specific concerns (e.g., speed, flexibility, or predictability) of the implementer, any of which may vary. Those skilled in the art will recognize that optical aspects of implementations will typically employ optically-oriented hardware, software, and/or firmware.

[0099] In some implementations described herein, logic and similar implementations may include software or other control structures suitable to operation. Electronic circuitry, for example, may manifest one or more paths of electrical current constructed and arranged to implement various logic functions as described herein. In some implementations, one or more media are configured to bear a device-detectable implementation if such media hold or transmit a special-purpose device instruction set operable to perform as described herein. In some variants, for example, this may manifest as an update or other modification of existing software or firmware, or of gate arrays or other programmable hardware, such as by performing a reception of or a transmission of one or more instructions in relation to one or more operations described herein. Alternatively or additionally, in some variants, an implementation may include special-purpose hardware, software, firmware components, and/or general-purpose components executing or otherwise invoking special-purpose components. Specifications or other implementations may be transmitted by one or more instances of tangible transmission media as described herein, optionally by packet transmission or otherwise by passing through distributed media at various times.

[0100] Alternatively or additionally, implementations may include executing a special-purpose instruction sequence or otherwise invoking circuitry for enabling, triggering, coordinating, requesting, or otherwise causing one or more occurrences of any functional operations described above. In some variants, operational or other logical descriptions herein may be expressed directly as source code and compiled or otherwise invoked as an executable instruction sequence. In some contexts, for example, C++ or other code sequences can be compiled directly or otherwise implemented in high-level descriptor languages (e.g., a logic-synthesizable language, a hardware description language, a hardware design simulation, and/or other such similar mode(s) of expression). Alternatively or additionally, some or all of the logical expression may be manifested as a Verilog-type hardware description or other circuitry model before physical implementation in

hardware, especially for basic operations or timing-critical applications. Those skilled in the art will recognize how to obtain, configure, and optimize suitable transmission or computational elements, material supplies, actuators, or other common structures in light of these teachings.

[0101] The foregoing detailed description has set forth various embodiments of the devices and/or processes via the use of block diagrams, flowcharts, and/or examples. Insofar as such block diagrams, flowcharts, and/or examples contain one or more functions and/or operations, it will be understood by those within the art that each function and/or operation within such block diagrams, flowcharts, or examples can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, or virtually any combination thereof. In one embodiment, several portions of the subject matter described herein may be implemented via Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), digital signal processors (DSPs), or other integrated formats. However, those skilled in the art will recognize that some aspects of the embodiments disclosed herein, in whole or in part, can be equivalently implemented in integrated circuits, as one or more computer programs running on one or more computers (e.g., as one or more programs running on one or more computer systems), as one or more programs running on one or more processors (e.g., as one or more programs running on one or more microprocessors), as firmware, or as virtually any combination thereof, and that designing the circuitry and/or writing the code for the software and/or firmware would be well within the skill of one of skill in the art in light of this disclosure. In addition, those skilled in the art will appreciate that the mechanisms of the subject matter described herein are capable of being distributed as a program product in a variety of forms, and that an illustrative embodiment of the subject matter described herein applies regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of a signal bearing medium include, but are not limited to, the following: a recordable type medium such as a floppy disk, a hard disk drive, a Compact Disc (CD), a Digital Video Disk (DVD), a digital tape, a computer memory, etc.; and a transmission type medium such as a digital and/or an analog communication medium (e.g., a fiber optic cable, a waveguide, a wired communications link, a wireless communication link (e.g., transmitter, receiver, transmission logic, reception logic, etc.), etc.).

[0102] In a general sense, those skilled in the art will recognize that the various embodiments described herein can be implemented, individually and/or collectively, by various types of electromechanical systems having a wide range of electrical components such as hardware, software, firmware, and/or virtually any combination thereof; and a wide range of components that may impart mechanical force or motion such as rigid bodies, spring or torsional bodies, hydraulics, electromagnetically actuated devices, and/or virtually any combination thereof. Consequently, as used herein “electromechanical system” includes, but is not limited to, electrical circuitry operably coupled with a transducer (e.g., an actuator, a motor, a piezoelectric crystal, a Micro Electro Mechanical System (MEMS), etc.), electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a

computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of memory (e.g., random access, flash, read only, etc.)), electrical circuitry forming a communications device (e.g., a modem, communications switch, optical-electrical equipment, etc.), and/or any non-electrical analog thereto, such as optical or other analogs. Those skilled in the art will also appreciate that examples of electromechanical systems include but are not limited to a variety of consumer electronics systems, medical devices, as well as other systems such as motorized transport systems, factory automation systems, security systems, and/or communication/computing systems. Those skilled in the art will recognize that electromechanical as used herein is not necessarily limited to a system that has both electrical and mechanical actuation except as context may dictate otherwise.

[0103] In a general sense, those skilled in the art will recognize that the various aspects described herein which can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, and/or any combination thereof can be viewed as being composed of various types of “electrical circuitry.” Consequently, as used herein “electrical circuitry” includes, but is not limited to, electrical circuitry having at least one discrete electrical circuit, electrical circuitry having at least one integrated circuit, electrical circuitry having at least one application specific integrated circuit, electrical circuitry forming a general purpose computing device configured by a computer program (e.g., a general purpose computer configured by a computer program which at least partially carries out processes and/or devices described herein, or a microprocessor configured by a computer program which at least partially carries out processes and/or devices described herein), electrical circuitry forming a memory device (e.g., forms of memory (e.g., random access, flash, read only, etc.)), and/or electrical circuitry forming a communications device (e.g., a modem, communications switch, optical-electrical equipment, etc.). Those having skill in the art will recognize that the subject matter described herein may be implemented in an analog or digital fashion or some combination thereof.

[0104] Those skilled in the art will recognize that at least a portion of the devices and/or processes described herein can be integrated into a data processing system. Those having skill in the art will recognize that a data processing system generally includes one or more of a system unit housing, a video display device, memory such as volatile or non-volatile memory, processors such as microprocessors or digital signal processors, computational entities such as operating systems, drivers, graphical user interfaces, and applications programs, one or more interaction devices (e.g., a touch pad, a touch screen, an antenna, etc.), and/or control systems including feedback loops and control motors (e.g., feedback for sensing position and/or velocity; control motors for moving and/or adjusting components and/or quantities). A data processing system may be implemented utilizing suitable commercially available components, such as those typically found in data computing/communication and/or network computing/communication systems.

[0105] One skilled in the art will recognize that the herein described components (e.g., operations), devices, objects, and the discussion accompanying them are used as examples

for the sake of conceptual clarity and that various configuration modifications are contemplated. Consequently, as used herein, the specific exemplars set forth and the accompanying discussion are intended to be representative of their more general classes. In general, use of any specific exemplar is intended to be representative of its class, and the non-inclusion of specific components (e.g., operations), devices, and objects should not be taken limiting.

[0106] With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations are not expressly set forth herein for sake of clarity.

[0107] The herein described subject matter sometimes illustrates different components contained within, or connected with, different other components. It is to be understood that such depicted architectures are merely exemplary, and that in fact many other architectures may be implemented which achieve the same functionality. In a conceptual sense, any arrangement of components to achieve the same functionality is effectively “associated” such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as “associated with” each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being “operably connected”, or “operably coupled,” to each other to achieve the desired functionality, and any two components capable of being so associated can also be viewed as being “operably couplable,” to each other to achieve the desired functionality. Specific examples of operably couplable include but are not limited to physically mateable and/or physically interacting components, and/or wirelessly interactable, and/or wirelessly interacting components, and/or logically interacting, and/or logically interactable components.

[0108] In some instances, one or more components may be referred to herein as “configured to,” “configurable to,” “operable/operative to,” “adapted/adaptable,” “able to,” “conformable/conformed to,” etc. Those skilled in the art will recognize that “configured to” can generally encompass active-state components and/or inactive-state components and/or standby-state components, unless context requires otherwise.

[0109] While particular aspects of the present subject matter described herein have been shown and described, it will be apparent to those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from the subject matter described herein and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and scope of the subject matter described herein. It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as “open” terms (e.g., the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the fol-

lowing appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to claims containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (e.g., “a” and/or “an” should typically be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should typically be interpreted to mean at least the recited number (e.g., the bare recitation of “two recitations,” without other modifiers, typically means at least two recitations, or two or more recitations). Furthermore, in those instances where a convention analogous to “at least one of A, B, and C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., “a system having at least one of A, B, and C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to “at least one of A, B, or C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., “a system having at least one of A, B, or C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that typically a disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms unless context dictates otherwise. For example, the phrase “A or B” will be typically understood to include the possibilities of “A” or “B” or “A and B.”

[0110] With respect to the appended claims, those skilled in the art will appreciate that recited operations therein may generally be performed in any order. Also, although various operational flows are presented in a sequence(s), it should be understood that the various operations may be performed in other orders than those which are illustrated, or may be performed concurrently. Examples of such alternate orderings may include overlapping, interleaved, interrupted, reordered, incremental, preparatory, supplemental, simultaneous, reverse, or other variant orderings, unless context dictates otherwise. Furthermore, terms like “responsive to,” “related to,” or other past-tense adjectives are generally not intended to exclude such variants, unless context dictates otherwise.

(New)

[0111] The United States Patent Office (USPTO) has published a notice to the effect that the USPTO’s computer programs require that patent applicants reference both a serial number and indicate whether an application is a continuation or continuation-in-part. Stephen G. Kunin, *Benefit of Prior-Filed Application*, USPTO Official Gazette Mar. 18, 2003, available at <http://www.uspto.gov/web/offices/com/sol/og/2003/week11/patbene.htm>. The present Applicant has provided above a specific reference to the application(s) from

which priority is being claimed as recited by statute. Applicant understands that the statute is unambiguous in its specific reference language and does not require either a serial number or any characterization, such as “continuation” or “continuation-in-part,” for claiming priority to U.S. patent applications. Notwithstanding the foregoing, Applicant understands that the USPTO’s computer programs have certain data entry requirements, and hence Applicant is designating the present application as a continuation of its parent applications as set forth above, but expressly points out that such designations are not to be construed in any way as any type of commentary and/or admission as to whether or not the present application contains any new matter in addition to the matter of its parent application(s).

1. A system comprising:

means for transferring a material through a skin portion of a subject from a first device to a subdermal second device disposed on a second side of the skin portion of the subject, the material in direct contact with the skin portion of the subject.

2. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for transferring the material utilizing at least one of iontophoresis, microjets, or an ultra fine stream.

3. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for assisting transfer of the material with sonophoresis.

4. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for establishing an electric polarity for the first device where the subdermal second device has an electric polarity opposite the first device.

5. The system of claim 4, wherein the means for establishing an electric polarity for the first device where the subdermal second device has an electric polarity opposite the first device comprises:

means for controlling polarity of at least one of the first device or the subdermal second device.

6. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for transferring the material from at least one of an iontophoresis device, a microjet injector device, a sonophoresis device, or a transdermal patch to the subdermal second device.

7. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for at least partially deloading a reservoir of the first device to transfer the material through the skin portion of the subject to the subdermal second device.

8. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for at least substantially aligning an output port of the first device with a receiving port of the subdermal second device.

9. The system of claim 8, wherein the means for at least substantially aligning an output port of the first device with a receiving port of the subdermal second device comprises:

means for locating a fiducial on the subject.

10. The system of claim 9, wherein the means for locating a fiducial on the subject comprises:

means for locating a tattoo on the subject.

11. The system of claim 8, wherein the means for at least substantially aligning an output port of the first device with a receiving port of the subdermal second device comprises:

means for locating a fiducial on the subdermal second device.

12. The system of claim 11, wherein the means for locating a fiducial on the subdermal second device comprises:

means for locating at least one of a fluorescent marker, a marker having an enhanced radio signature, a radio frequency identification tag, a radio opaque marker, a retroreflector, or an ultrasonic marker disposed of the subdermal second device.

13. The system of claim 8, wherein the means for at least substantially aligning an output port of the first device with a receiving port of the subdermal second device comprises:

means for receiving a signal from the subdermal second device.

14. The system of claim 13, wherein the means for receiving a signal from the subdermal second device comprises:

means for receiving at least one of an electrical current, an electrical field, a magnetic flux, an optical signal, a radio frequency identification, or an ultrasonic signal from the subdermal second device.

15. The system of claim 8, wherein the means for at least substantially aligning an output port of the first device with a receiving port of the subdermal second device comprises:

means for receiving a signal from the subdermal second device which is indicative of a location on the subdermal second device.

16. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for transferring at least one of a drug, a logistical material, or a marker through the skin portion of the subject from the first device to the subdermal second device.

17. The system of claim 1, further comprising:

means for receiving a signal from the subdermal second device.

18. The system of claim 17, wherein the means for receiving a signal from the subdermal second device comprises:

means for receiving a signal regarding at least one of a location, a desire to transfer material, a readiness to transfer material, a characteristic of material to be transferred, an amount of material available to be transferred, a time for transfer to commence, an amount of material to be transferred, a desire to stop transfer, or an acknowledgement that transfer is complete.

19. The system of claim 1, further comprising:

means for receiving a signal from the subdermal second device regarding the material.

20. The system of claim 19, wherein the means for receiving a signal from the subdermal second device regarding the material comprises:

means for receiving a signal from the subdermal second device regarding at least one of a need for the material, a need for a quantity of the material, a need for a type of the material, a quantity of the material present, or a quantity of the material collected.

21. The system of claim 1, further comprising:

means for receiving a signal from the subdermal second device regarding a ready condition for receiving the material.

22. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for receiving feedback regarding whether the material is received by the subdermal second device.

23. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for stopping transfer of the material if the material is not received by the subdermal second device.

24. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

mean for comparing an amount of the material collected by the subdermal second device to an amount of the material ejected from the first device.

25. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for stopping transfer of the material based upon comparing an amount of the material collected by the subdermal second device to an amount of the material ejected from the first device.

26. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject further comprises:

means for stopping transfer of the material when the subdermal second device does not require additional material.

27. The system of claim 26, wherein the means for stopping transfer of the material when the subdermal second device does not require additional material comprises:

means for stopping transfer of the material when a reservoir on the subdermal second device is full.

28. The system of claim 26, wherein the means for stopping transfer of the material when the subdermal second device does not require additional material further comprises:

means for receiving a signal from the subdermal second device indicating it does not require additional material.

29. The system of claim 1, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for pulsing a stream of the material.

30. The system of claim **1**, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for transferring the material through an input port of the subdermal second device.

31. The system of claim **30**, wherein the means for transferring the material through an input port of the subdermal second device comprises:

means for transferring a stream of the material through at least one of a self-healing material, a self-sealing material, a layer of material, a viscous material, a porous material, a liquid material, a wickable material, or a closable window disposed of the subdermal second device.

32. The system of claim **30**, wherein the means for transferring the material through an input port of the subdermal second device comprises:

means for opening the input port in preparation for receiving the material; and means for coordinating the transfer of the material with the opening of the input port.

33. The system of claim **1**, wherein the means for transferring a material through the skin portion of the subject from the first device to a subdermal second device disposed on a second side of the skin portion of the subject comprises:

means for transferring the material to a first reservoir of the subdermal second device.

34. The system of claim **33**, wherein the means for transferring the material to a first reservoir of the subdermal second device further comprises:

means for aligning an input port of the first reservoir of the subdermal second device with an output port of the first device.

35. The system of claim **1**, further comprising:

means for transferring a second material through the skin portion of the subject from the first device to the subdermal second device disposed on the second side of the skin portion of the subject.

36. The system of claim **35**, wherein the means for transferring a second material through the skin portion of the subject from the first device to the subdermal second device disposed on the second side of the skin portion of the subject comprises:

means for transferring the second material to a second reservoir of the subdermal second device.

37. The system of claim **36**, wherein the means for transferring the second material to a second reservoir of the subdermal second device further comprises:

means for aligning an input port of the second reservoir of the subdermal second device with an outlet port of a second reservoir of the first device.

38. The system of claim **1**, further comprising:

means for defining a transcutaneous path extending through the skin portion of the subject from the first device to the subdermal second device; and

means for transferring the material through the skin portion of the subject from the first device to the subdermal second device generally along the transcutaneous path.

39. The system of claim **38**, wherein the means for defining a transcutaneous path extending through the skin portion of the subject from the first device to the subdermal second device comprises:

means for defining a transcutaneous path extending through the skin portion of the subject to avoid at least one of a nerve, a blood vessel, or a previous transcutaneous path.

* * * * *