

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 2941160 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **A 47 J 37/07 (2006.01)** **F 24 C 15/18 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2020-09-28**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2020-08-26**
- (86) Europæisk ansøgning nr.: **13866355.4**
- (86) Europæisk indleveringsdag: **2013-12-18**
- (87) Den europæiske ansøgnings publiceringsdag: **2015-11-11**
- (86) International ansøgning nr.: **US2013076030**
- (87) Internationalt publikationsnr.: **WO2014100128**
- (30) Prioritet: **2012-12-19 US 201261739135 P**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **W.C. Bradley Co., 1017 Front Avenue, Columbus, GA 31904, USA**
- (72) Opfinder: **AHMED, Mallik, 1517 Ridge Creek Way, Columbus, GA 31904, USA**
ROBERTS, Bruce, 7317 E. Wynfield Loop, Midland, GA 31820, USA
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **HØJEFFEKTIV VINDMODSTANDSDYGTIG KUGLEGRILL**
- (56) Fremdragne publikationer:
WO-A1-2013/006849
US-A- 4 924 847
US-A- 5 230 325
US-A- 5 535 733
US-A- 5 797 386
US-A- 6 125 838
US-A1- 2010 258 104
US-B1- 6 314 955
US-B1- 7 984 709

DESCRIPTION

FIELD OF THE INVENTION

[0001] The present invention relates to outdoor cooking grills which burn charcoal or other solid fuel and have a kettle-type shape.

BACKGROUND OF THE INVENTION

[0002] Kettle-type outdoor cooking grills which burn charcoal are well known in the art. An example of a typical prior art kettle-type grill **2** is illustrated in FIGS. 1 and 2. The prior art grill **2** comprises: a hemispherical, bowl-shaped lower housing **4** which has an open top **5** and is supported above the ground at a suitable height by a plurality of legs **6**; a fuel grate **8** positioned within the lower housing **4** for supporting a bed of charcoal fuel; a cooking grate **10** positioned within the lower housing **4**, possibly at or near the upper opening **5**, above the fuel grate **8**; a hemispherical cover **12** which is removably positionable on the open top **5** of the lower housing **4** for closing the grill **2**; one or more adjustable air intake openings **14** positioned in the bottom of the bowl-shaped lower housing **4** of the grill **2**; and a plurality of adjustable air exhaust openings **15** positioned in the top of the hemispherical cover **12**.

[0003] The prior art grill **2** is operated by first placing a bed of charcoal on the fuel grate **8** and then igniting the charcoal in some manner and allowing the charcoal to burn until the charcoal is converted into a bed of glowing red coals. Next, the food is placed on the cooking grate **10** and can be cooked either with the cover **12** in place over the top **5** of the bowl-shaped lower housing **4** or with the top **5** of the lower housing **4** open.

[0004] Unfortunately, the prior art kettle grill **2** has various significant shortcomings and disadvantages. When exposed to winds of as much as 5 miles per hour, or sometimes less, the flow of the wind across the bottom of the lower housing **4** and across the top of the cover **12** creates negative pressure conditions outside of both the bottom air intake openings **14** and the top air exhaust openings **15**. The creation of a negative pressure condition outside of the bottom air intake openings **14** at least reduces the amount of air flowing into the air intake openings **14** and, in some cases, can create a reverse flow situation wherein air from inside the grill **2** flows out of the bottom air intake openings **14**.

[0005] As a result, the desired upward flow of air through the charcoal bed of the prior art grill **2** is reduced or eliminated, thus slowing or retarding the combustion of the charcoal fuel. Therefore, either the cooking process in the prior art kettle grill **2** is significantly delayed, or the user will attempt to counteract the increased cooking time and reduced cooking temperature caused by the wind by using a significantly greater amount of charcoal. But in either case, the lack of a consistent, positive air flow through the charcoal bed diminishes the ability of the prior

art grill 2 to cook by infrared radiation or convection.

[0006] Another problem with the prior art kettle grill 2 is that, even under zero wind conditions, air preferentially flows upwardly from the bottom air intake openings 14 through the center of the charcoal bed. This results in uneven or incomplete burning of the bed and causes the center of the bed to be significantly hotter than the remainder thereof. Consequently, the cooking temperatures produced across the surface of the cooking grate 10 are also very uneven and the time required to adequately combust the entire charcoal bed prior to cooking is increased significantly.

[0007] In addition, because the airflow to a large portion of the charcoal bed is inadequate, the cooking temperatures achieved across at least most of the cooking grate 10 typically are not hot enough to produce attractive sear marks on the food. Moreover, as a further result of the various operational and performance deficiencies listed above, a standard size load of charcoal used in the prior art grill 2 is often effective for cooking only one batch of hamburger patties.

[0008] Another prior art kettle grill 20 described in Danish Patent PA 200101276 is illustrated in FIG. 3. The prior art kettle grill 20 illustrated in FIG. 3 is substantially identical to the prior grill 2 illustrated in FIGS. 1 and 2 except that air received through the bottom opening(s) 22 of the grill 20 does not flow directly upward through the center of the charcoal bed. Rather, the air received through the bottom openings 22 of the grill 20 is routed through a gap 24 formed between the outer wall 25 of the hemispherical lower housing 26 of the grill 20 and a correspondingly shaped inner liner 28 positioned within the housing 26. The air flowing through the gap 20 is delivered to a series of ports 30 provided through the inner liner 28 which encircle the outer periphery of the fuel grate 32.

[0009] The delivery of the combustion air through the surrounding side ports 30, along with a corresponding circulation of air which is also produced within the center housing 26, cause the charcoal bed on the fuel grate 32 to burn more evenly as described above with respect to prior art kettle grill 2 of FIGS. 1 and 2. In addition the combustion air is preheated as it is delivered through the gap 24 between the outer wall 25 and the inner liner 28 of the bowl-shaped housing 26. This increases the amount of convective heating occurring thus increases the efficiency of the grill. In this case, the delivery of the combustion air through the gap 24 also operates to cool the inner liner. Consequently, although the amount of convective heating that occurs in the grill 20 is increased, this increase in convective heating is produced at the expense of radiant heating from the inner liner 28. Since convective heating is in some respects less desirable than infrared heating at these cooking temperatures, the replacement of infrared heating within the prior art kettle grill 20 with convective heating may be detrimental to the overall performance of the unit.

[0010] However, because the air intake openings 22 of the prior art grill 20 are located on the bottom of the cooking bowl 26, the prior art grill 20 is still highly susceptible to the conditions described above.

[0011] Thus, for the reasons explained above, a need exists for an improved kettle-type grill wherein: (a) the performance of the grill will not be significantly effected even when the grill is operated in winds of up to 5 mph or greater; (b) the charcoal bed within the kettle-type lower housing will burn more evenly; (c) more even temperature and cooking profiles will be achieved at the cooking grate; (d) the temperature at the cooking grate will be increased so that the grill will cook more effectively and will produce attractive sear marks; (e) the charcoal burning time required before cooking will be significantly reduced; (f) the grill will be more efficient and will use less charcoal; and (g) a single load of charcoal will be able to cook from two to three or more times more food than can be cooked by the same load of charcoal in the prior art kettle grills.

[0012] US 6,314,955 B1 discloses a collapsible cooking stove including a lower housing which supports an upper housing within which is received a fire chamber. There is provided a fire grate which is retained by grate supports. Below the fire grate is provided a series of vent holes. The fuel pan is located within a cylinder. Vent holes in the cylinder are vertically aligned with the vent holes in the fuel pan. WO 2013/006849 A1 describes various embodiments of a multi-configurable cooking grill. Some embodiments relate to gas burner assemblies, others to solid fuel grills. US 7,984,709 B1 discloses a vent control for a grill. US 2010/0258104 A1 discloses a cook stove assembly. US 5,797,386 discloses a portable cooking device including a main housing and a burner housing.

[0013] The problems above, and related problems, are addressed by the devices and methods of the present disclosure.

SUMMARY OF THE INVENTION

[0014] The invention of the present disclosure, in one aspect thereof, comprises a grill as claimed in claim 1. In some embodiments, a cooking grate is situated above the fuel grate. An upper cover may be positionable on the lower housing to cover the cooking grate and may provide an exhaust opening. A baffle ring may reside in the lower housing, proximate the plurality of air intakes

[0015] In some embodiments, the lower housing has a double walled construction with a second, inner wall providing a plurality of air intake openings. The openings of the inner wall may be vertically proximate the openings of the first wall or may be substantially vertically offset from the openings of the first wall. At least the plurality of openings of the inner wall may be below the fuel grate or the plurality of openings of the first wall and the plurality of openings of the second wall may both be below the fuel grate.

[0016] In other embodiments, the grill further comprises a second wall, interior to the first wall, having at least one opening below the fuel grate and defining a first air passageway between the first and second wall, and a third wall, interior to the second wall, having a termination

proximate the fuel grate, and defining a second air passageway between the second and third wall. Air communicates between the first and second air passageways via the at least one opening of the second wall. Air is communicated to the fuel grate at the termination of the third wall.

[0017] In one embodiment, there is provided a grill with a lower kettle housing having a cooking grate supported above a fuel grate in an interior of the housing, and a cover at least partially covering the cooking grate and defining an exhaust opening. The lower housing provides a plurality of air intake openings proximate a level of the fuel grate. In some embodiments, a baffle ring is proximate the plurality of air intake openings and circumscribing at least part of the fuel grate.

[0018] In some embodiments, the housing has a double walled construction comprising an inner wall with a plurality of openings proximate the fuel grate and an outer wall with a plurality of openings proximate those openings of the inner wall. The plurality of openings of the inner wall may be below the fuel grate as may the openings of the outer wall.

[0019] In other embodiments, the grill housing has a double walled construction comprising an outer wall with a plurality of openings proximate a vertical level of the fuel grate and an inner wall with a plurality of openings substantially offset from those openings of the outer wall. In further embodiments, the housing has a triple walled construction with air passing from openings on an outer wall that are proximate a vertical level of the fuel grate to an opening on a middle wall that is below the fuel grate, and air passing thence to a termination of an interior wall proximate the vertical level of the fuel grate.

[0020] The invention of the present disclosure, in another aspect thereof, comprises a method as claimed in claim 8.

[0021] Forming a housing may further comprise forming a double walled housing, and creating a plurality of openings in the housing may further comprise forming a plurality of openings in an outer wall proximate a vertical level of the cooking grate. Forming a housing may further comprise forming a triple walled housing, and creating a plurality of openings in the housing further comprises forming a plurality of openings in an outer wall proximate a vertical level of the cooking grate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

FIG. 1 is a perspective view of a prior art kettle grill **2**.

FIG. 2 is a cutaway elevational view of a kettle-type lower housing **4** of the prior art grill **2**.

FIG. 3 is a cutaway elevational view of a kettle-type lower housing **26** of a prior art kettle grill

20.

FIG. 4 is a perspective view of an embodiment of grill **100** according to the present disclosure.

FIG. 5A is a cutaway elevational view of the grill **100**.

FIG. 5B is an cutaway elevational view of the grill **100**.

FIG. 6 is a perspective view of another embodiment a grill **200** according to the present disclosure.

FIG. 7 is a cutaway elevational view of a grill **300**.

FIG. 8 is a cutaway elevational view of another embodiment of a grill **400** according to the present disclosure.

FIG. 9 is a cutaway elevational view of a grill **500**.

FIG. 10 is a cutaway elevational view of another embodiment of a grill **600** according to the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0023] The grills of the present disclosure satisfy the needs and alleviate the problems discussed above, and others. Various embodiments of the present disclosure provide kettle-type cooking grill comprising: (a) a kettle-type lower housing which has a heating chamber therein and an open upper end; (b) a fuel support grate positionable within the heating chamber; (c) a food support grate positionable above the fuel grate; (d) a top cover which is removably positionable over the upper opening of the lower housing; and (e) one or more air exhaust openings provided in the top of the cover. One improvement to the cooking grill comprises a plurality of air intake openings which are formed through and substantially around an upwardly extending portion of an outer wall of the kettle-type lower housing such that the air intake openings substantially surround the heating chamber.

[0024] The air intake openings are preferably located substantially in a horizontal plane which extends transversely through the lower housing at a similar level as the food support grate and above the bottom of the heating chamber. The air intake openings are more preferably located substantially in a horizontal plane which is not more than 3 inches below the fuel grate and not more than 3 inches above the fuel grate.

[0025] Further aspects, features, and advantages of the present invention will be apparent to those of ordinary skill in the art upon examining the accompanying drawings and upon reading the following detailed description of the preferred embodiments.

[0026] An exemplary preferred embodiment of a grill **100** is illustrated in FIGS. 4, 5A and 5B. The grill **100** comprises: a generally hemispherical kettle-type lower housing **102** having an open top **104**; a heating chamber **105** defined within the lower housing **102**; a plurality of legs **106** or other support structure which supports the lower housing **102** above the ground; a fuel grate **108** which is removably positioned in the heating chamber **105** for supporting a bed of charcoal or other solid fuel **107**; a cooking grate **110** which is removably positionable above the fuel grate **108** at a location within the heating chamber **105** possibly at or near the open top **104** of the lower housing **102**; a cover **112** which is removably positionable on the lower housing **102** over the open top **104** thereof; a series of perforations or air intake openings **114** which are formed laterally around and through an upwardly extending portion of outer wall **116** of the lower housing **102** such that the openings **114** preferably encircle or otherwise transversely surround the heating chamber **105** within the lower housing **102**; one or more (preferably a plurality of) air exhaust openings **118** formed through the top of the cover **112**; and one or more (preferably a plurality of) dampers or shutter plates **120** movably attached to the top of the cover **112** for selectively opening, closing, or partially closing the air exhaust openings **118** to any degree desired.

[0027] As used herein, and in the claims, the term "kettle-type lower housing" refers to a grill bottom structure which contains and defines the heating chamber wherein charcoal or other solid fuel is placed and burned and which is shaped such that, along at least 90% of the vertical height of the lower housing structure, the horizontal cross-sectional shape of the lower housing structure is generally circular. More preferably, the horizontal cross-sectional shape of the lower housing structure along substantially the entire vertical height thereof will be circular or substantially circular. Consequently, by way of example, but not by way of limitation, a "kettle-type lower housing" could have: (a) hemispherical or generally hemispherical shape, (b) a paraboloid shape, (c) a frustoconical or generally frustoconical shape, (d) a cylindrical or generally cylindrical shape, or (e) a combination thereof. Despite the foregoing, it is understood that in some embodiments, the lower housing **102** may be of a shape that departs from what might be considered a kettle type lower housing and relies instead upon various shapes and geometries as are known to those of skill in the art.

[0028] The air intake openings **114** of the grill **100** are preferably positioned in substantially a horizontal plane **122**, which extends transversely through the kettle-type lower housing **102**. The horizontal plane **122** is preferably located at a similar level to the cooking grate **110** and above the bottom **115** of the heating chamber **105**. The horizontal plane **122** is more preferably located at an elevation of anywhere from about 2 inches below to about 2 inches above the fuel grate **108** and is most preferably located at an elevation in the range of from about 1 inch below to about 1 inch above the fuel grate **108**.

[0029] In the grill **100**, as illustrated in FIGS. 4 and 5, the air intake openings **114** are positioned elevationally above the fuel grate **108** and encircle the heating chamber **105**. The air intake openings **114** place the heating chamber **105** in direct fluid communication with the air outside of the upwardly extending outer wall **116** of the lower housing **102** such that the outside air is allowed to flow horizontally directly through the air intake openings **114** into the

interior heating chamber **105**.

[0030] The lower housing **102** can be of a single wall, double wall, partial double wall, or even a triple wall construction. A double wall or partial double wall construction will help to (a) prevent heat loss, (b) increase the radiating temperature of the inner wall of the lower housing, and (c) shield the outer wall of the lower housing **102** from direct exposure to the heating chamber **105** to thereby reduce the temperature of the outer wall.

[0031] As illustrated in FIG. 5A, the lower housing **102** of the grill **100** includes an inner lining wall **124** which can be a permanent liner or can operate as a removable ash pan which only covers a lower portion of the interior of the lower housing **102** below the air intake openings **114**. If the inner lining wall **124** is a removable ash pan, it will also be understood that the grill **100** can be operated either with or without the ash pan in place. Alternatively, the inner liner could be a removable or permanent liner which covers substantially the entire interior of the lower housing **102** such that the air intake openings **114** would extend directly through both the outer wall and the inner liner of the lower housing **102** into the heating chamber **105**.

[0032] If desired, in order to adjust the amount of air flowing into the heating chamber through the air intake openings **114**, a thin, sliding, sheet metal shutter (or other selective opening) can be provided for opening, closing, or partially restricting the air intake openings **114**.

[0033] Although the air intake openings **114** of the grill **100** are circular in shape, it will be understood that the openings can be in the form of squares, rectangles, slits or other shapes and can be of any desired size, number, and spacing suitable for providing sufficient outside air to the heating chamber **105** for combustion of the charcoal or other solid fuel **107**.

[0034] In windy conditions, in the present embodiment, the positioning of the air intake openings **114** through an upwardly extending portion of the outer wall **116** of the lower housing **102** allows the direct horizontal flow of outside air into the heating chamber **105** through the particular openings **114** which are directly facing the wind (i.e., for reference purposes, are facing into the wind at a downward angle of 0° and a sideways angle of 0°) or are at least facing the wind at a downward angle of preferably not more than 75° and/or a right or left sideways angle of preferably not more than 75° . To summarize, various embodiments of grills of the present disclosure produce a positive flow of air into the heating chamber below the cooking grate even in the presence of wind. Moreover, regardless of whether the grill is operated under windy conditions or with no wind, the incoming flow through the openings **114**, along with the circulation of the air in the center of the heating chamber **105** which this flow also produces, provides a more uniform flow of air to the entire fuel grate **108** than is provided in the prior art kettle grills.

[0035] The more uniform distribution of air across the entire fuel grate **108**, and the more uniform combustion which it produces, also operate to provide more uniform temperatures and cooking conditions at the cooking grate **110** and to significantly increase the temperature at the cooking grate **110**, even under any wind conditions. Consequently, with or without wind, the

food will cook more rapidly at a higher temperature in the grill **100** so that the cooking performance is significantly enhanced and attractive searing marks can be produced.

[0036] The grill **100** is also much more stable under windy conditions and is much less susceptible diminution in cooking efficacy or other problems due to wind. Because the air intake openings **114** of the grill **100** are located near to and around the fuel grate **108**, a positive pressure is created at the air intake openings **114** which face or partially face the wind. Thus, not only will the flow of air through these openings **114** and across the fuel grate **108** continue even under sustained winds of 5 mph, 10 mph or more, but the amount of air flowing through the windward openings will increase and will compensate for the reduction of flow which may occur through the remaining air intake openings which are located on the opposite side of the grill or which face in a direction which is substantially perpendicular to the direction of the wind. Consequently, not only does the grill **100** substantially ensure against charcoal blowout, but a high level of combustion resulting in a high level of infrared heat transfer to the food is maintained.

[0037] The cooking grate **110** used in the grill **100** can be (a) a wire mesh or other type of open convective food support grate or (b) an infrared re-emitting food support grate of any desired single or multiple piece construction. The cooking grate **110** will preferably be an infrared food support grate which is placed close to (i.e., within about 3 inches of) the fuel grate **108**. Placing the cooking grate **110** in close proximity to the fuel bed **107** significantly increases the thermal efficiency of the grill **100**.

[0038] The fuel grate **108** can be any type of perforated pan, perforated tray, wire grate, or other structure which is used in cooking grills for supporting a bed of charcoal or other solid fuel. The fuel grate **108** will preferably be a porcelain-coated or stainless steel wire grate having gaps between the support wires in range of from about .25 to about .5 inch.

[0039] Also shown in FIG. 5A is the baffle ring **119**, which extends around the inside of the heating chamber, generally on a plane common to the combustion air intake openings **114**. The ring may circumscribe all of a portion of the fuel grate **102**. This ring can be incorporated in some embodiments to prevent ash and sparks from flowing out through downstream air inlet holes in windy conditions but will not necessarily need to be used in all embodiments. The dimensions, spacing, and construction of this ring for may be varied according to normal engineering practice so long as the result of arresting at least some sparks, embers, and/or ash from flowing out of the housing **102** is achieved.

[0040] Another embodiment **200** of a grill according to the present disclosure is illustrated in FIG. 6. The grill **200** is substantially identical to the grill **100** except that the kettle-type lower housing **202** of the grill **200** does not have a hemispherical shape but instead comprises a lower frusto-conical portion **204** and an upper cylindrical portion **206**. In addition, the bottom **208** of the kettle **202** of the grill **200** is a removable ash pan which has a handle **210** extending therefrom which the user can grasp for rotating the ash pan **208** to a locked position on the bottom of the kettle **202**. After use, the ash pan **208** can be rotated to an unlocked position in

order to remove the ash and food debris which have collected on the pan 208.

[0041] Another example 300 of a grill is illustrated in FIG. 7. The kettle-type lower housing 302 of the grill 300 differs from that of the grill 100 in that the interior of the lower housing 302 is entirely covered by a lining structure 306 comprising: an upper portion 308 which receives air from the air intake openings 310 provided through the outer wall 312; a lower portion 314 which is preferably removably positioned within the lower portion of the lower housing 302 to operate as a removable ash pan; and an air flow gap or a plurality of interior air flow openings 316 formed between the upper portion 308 of the liner and the ash pan 302.

[0042] The interior air openings 316 of the inner lining structure 306 are positioned elevationally below the air intake openings 310 provided in the outer wall 312 so that the combustion air flowing into the intake openings 310 flows downwardly through a gap 318 formed between the upper portion 308 of the inner liner and outer wall and is discharged by the interior openings 316 into the heating chamber 305 at a location below the fuel grate 320. It will be appreciated that, in this embodiment, a baffle ring 119 may not be needed.

[0043] Another alternative embodiment 400 of the grill is illustrated in FIG. 8. The grill 400 differs from the grill 100 in that the kettle-type lower housing 402 of the grill 400 is of a triple-walled construction wherein air is received through air intake openings 406 formed through the outer wall 408 at a location at or above the fuel grate 409 and flows downwardly behind a first inner wall 410 to an opening 412 provided in the bottom of the kettle. The air then flows upwardly through a gap 414 formed between the first inner wall 410 and a second inner wall 415 and is released from the circular upper end 416 of the gap 414 around the outer periphery of the fuel grate 409. Thus the innermost wall 415 may be said to terminate proximate the fuel grate 409.

[0044] An example 500 of a grill is illustrated in FIG. 9. The grill 500 differs from the grill 100 in that air is received through intake openings 504 located in the outer wall 506 of the kettle-type lower housing 508 at a location below the fuel grate 510 and flows directly through corresponding interior openings 512 formed in an inner liner 514 which are also located below the fuel grate 510.

[0045] It will be seen that the variations 300 and 500 shown in Figs 7 and 9 illustrate that in the context of a double walled construction the air openings (310, 504) in the outer wall (312, 506) can be offset from the air openings (316, 512) in the inner wall (306, 514), or aligned with the openings in the inner wall. In some cases they may be substantially vertically offset (for purposes of this disclosure, this means that air passing from outside to inside the housing (202, 302, 402, etc.) is required to take a tortured path as shown in FIGs. 7 and 8). The air openings in the outer wall can be above the level of the fuel grate or below the level of the fuel grate as previously disclosed and the air openings in the inner wall can be above or below the level of the fuel grate as similarly disclosed. Any combination of relative position of air openings that prevents wind from starving the fuel of oxygen will be effective and/or provides air supply to the fuel may be suitable.

[0046] Another alternative embodiment **600** of the grill is illustrated in FIG. 10. The grill **600** differs from the grill **100** in that both the kettle-type lower housing **602** and the cover **604** of the grill **600** are of a double-walled construction. In addition, the grill **600** includes a charcoal lighter can **606** which is removably attachable to the bottom of the lower housing **602** for holding crumpled newspaper or other combustible material which can be burned in the can **606** for igniting the charcoal or other solid fuel placed on the fuel grate **610**. The can **606** includes inlet air openings **612** having dampers or shutters thereon such that the openings **612** can be opened for burning the newspaper or other starter material and then closed during operation after the charcoal on the fuel grate **610** is ignited so that all combustion air for consumption of charcoal once lit is provided by the openings such as **114**, shown in FIGS. 4 and 5, openings such as **318** and **316** found in FIG. 7, etc.

[0047] Thus, the present invention is well adapted to carry out the objectives and attain the ends and advantages mentioned above as well as those inherent therein. While presently preferred embodiments have been described for purposes of this disclosure, numerous changes and modifications will be apparent to those of ordinary skill in the art. Such changes and modifications are encompassed within the invention as defined by the claims.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [DK200101276 \[0008\]](#)
- [US6314955B1 \[0012\]](#)
- [WO2013006849A1 \[0012\]](#)
- [US7984709B1 \[0012\]](#)
- [US20100258104A1 \[0012\]](#)
- [US5797386A \[0012\]](#)

Patentkrav**1.** Grill (100) omfattende:

et nedre hus (102) som definerer et varmekammer; og

5 en brændstofrist (108) situeret ved et forudbestemt niveau i det nedre hus til at bære en fast brændstofkilde;

en grillrist (110) situeret over brændstofristen;

10 hvor det nedre hus har en første væg (116) som definerer en flerhed af luftindtagsåbninger (114) hævet over niveauet af brændstofristen, hvilken grill yderligere omfatter en mellemlægsring (119) i det nedre hus, som strækker sig omkring et indre af varmekammeret, på et plan fælles med og i nærheden af flerheden af luftindtagsåbninger, **kendetegnet ved, at** nævnte flerhed af luftindtagsåbninger og mellemlægsringen er konfigureret til at levere luft til varmekammeret mellem brændstofristen og grillristen.

15 **2.** Grillen ifølge krav 1, yderligere omfattende:

et øvre dække (112) positionerbart på det nedre hus til at dække grillristen;

hvor det øvre dække tilvejebringer en udledningsåbning (118).

20 **3.** Grillen ifølge krav 1, hvor det nedre hus har en dobbeltvægget konstruktion med en anden, indvendig væg der tilvejebringer en flerhed af luftindtagsåbninger.

4. Grillen ifølge krav 3, hvor åbningerne af den indvendige væg er vertikalt i nærheden af åbningerne af den første væg.

25

5. Grillen ifølge krav 3, hvor åbningerne af den indvendige væg er i alt væsentligt vertikalt forskudt fra åbningerne af den første væg.

6. Grillen ifølge krav 1, yderligere omfattende:

en anden væg, indvendig af den første væg, som har mindst en åbning under brændstofristen og som definerer en første luftvej mellem den første og anden væg; og

5 en tredje væg, indvendig af den anden væg, som har en ende i nærheden af brændstofristen, og som definerer en anden luftvej mellem den anden og tredje væg;

hvor luft strømmer mellem de første og anden luftveje via den mindst ene åbning af den anden væg; og

10 hvor luft ledes til brændstofristen ved enden af den tredje væg.

7. Grillen ifølge krav 1, hvor mellemlægsringen omgiver mindst en del af brændstofristen.

8. Fremgangsmåde omfattende:

15 dannelse af et hus (102) som definerer et varmekammer;

tilvejebringelse af en fast brændstofrist (108) i huset;

tilvejebringelse af en grillrist (110) over brændstofristen;

skabelse af en flerhed af åbninger (114) i huset over et vertikalt niveau af den faste brændstofrist; og

20 tilvejebringelse af en mellemlægsring (119) inden i huset på et plan fælles med og i nærheden af flerheden af åbninger;

hvor flerheden af luftindtagsåbninger og mellemlægsringen er konfigureret til at levere luft til varmekammeret mellem brændstofristen og grillrist.

25 **9.** Fremgangsmåden ifølge krav 8, omfattende:
dannelse af et dække med en udledningsåbning.

10. Fremgangsmåden ifølge krav 9, hvor:

30 dannelse af huset yderligere omfatter dannelse af et dobbeltvægget hus;
og

skabelse af flerheden af åbninger i huset yderligere omfattende dannelse af flerheden af åbninger i en udvendig væg i nærheden af et vertikalt niveau af grillristen.

5 **11.** Fremgangsmåden ifølge krav 9, hvor:

dannelse af huset yderligere omfatter dannelse af et tripelvægget hus; og
skabelse af flerheden af åbninger i huset yderligere omfatter dannelse af flerheden af åbninger i en udvendig væg i nærheden af et vertikalt niveau af grillristen.

DRAWINGS

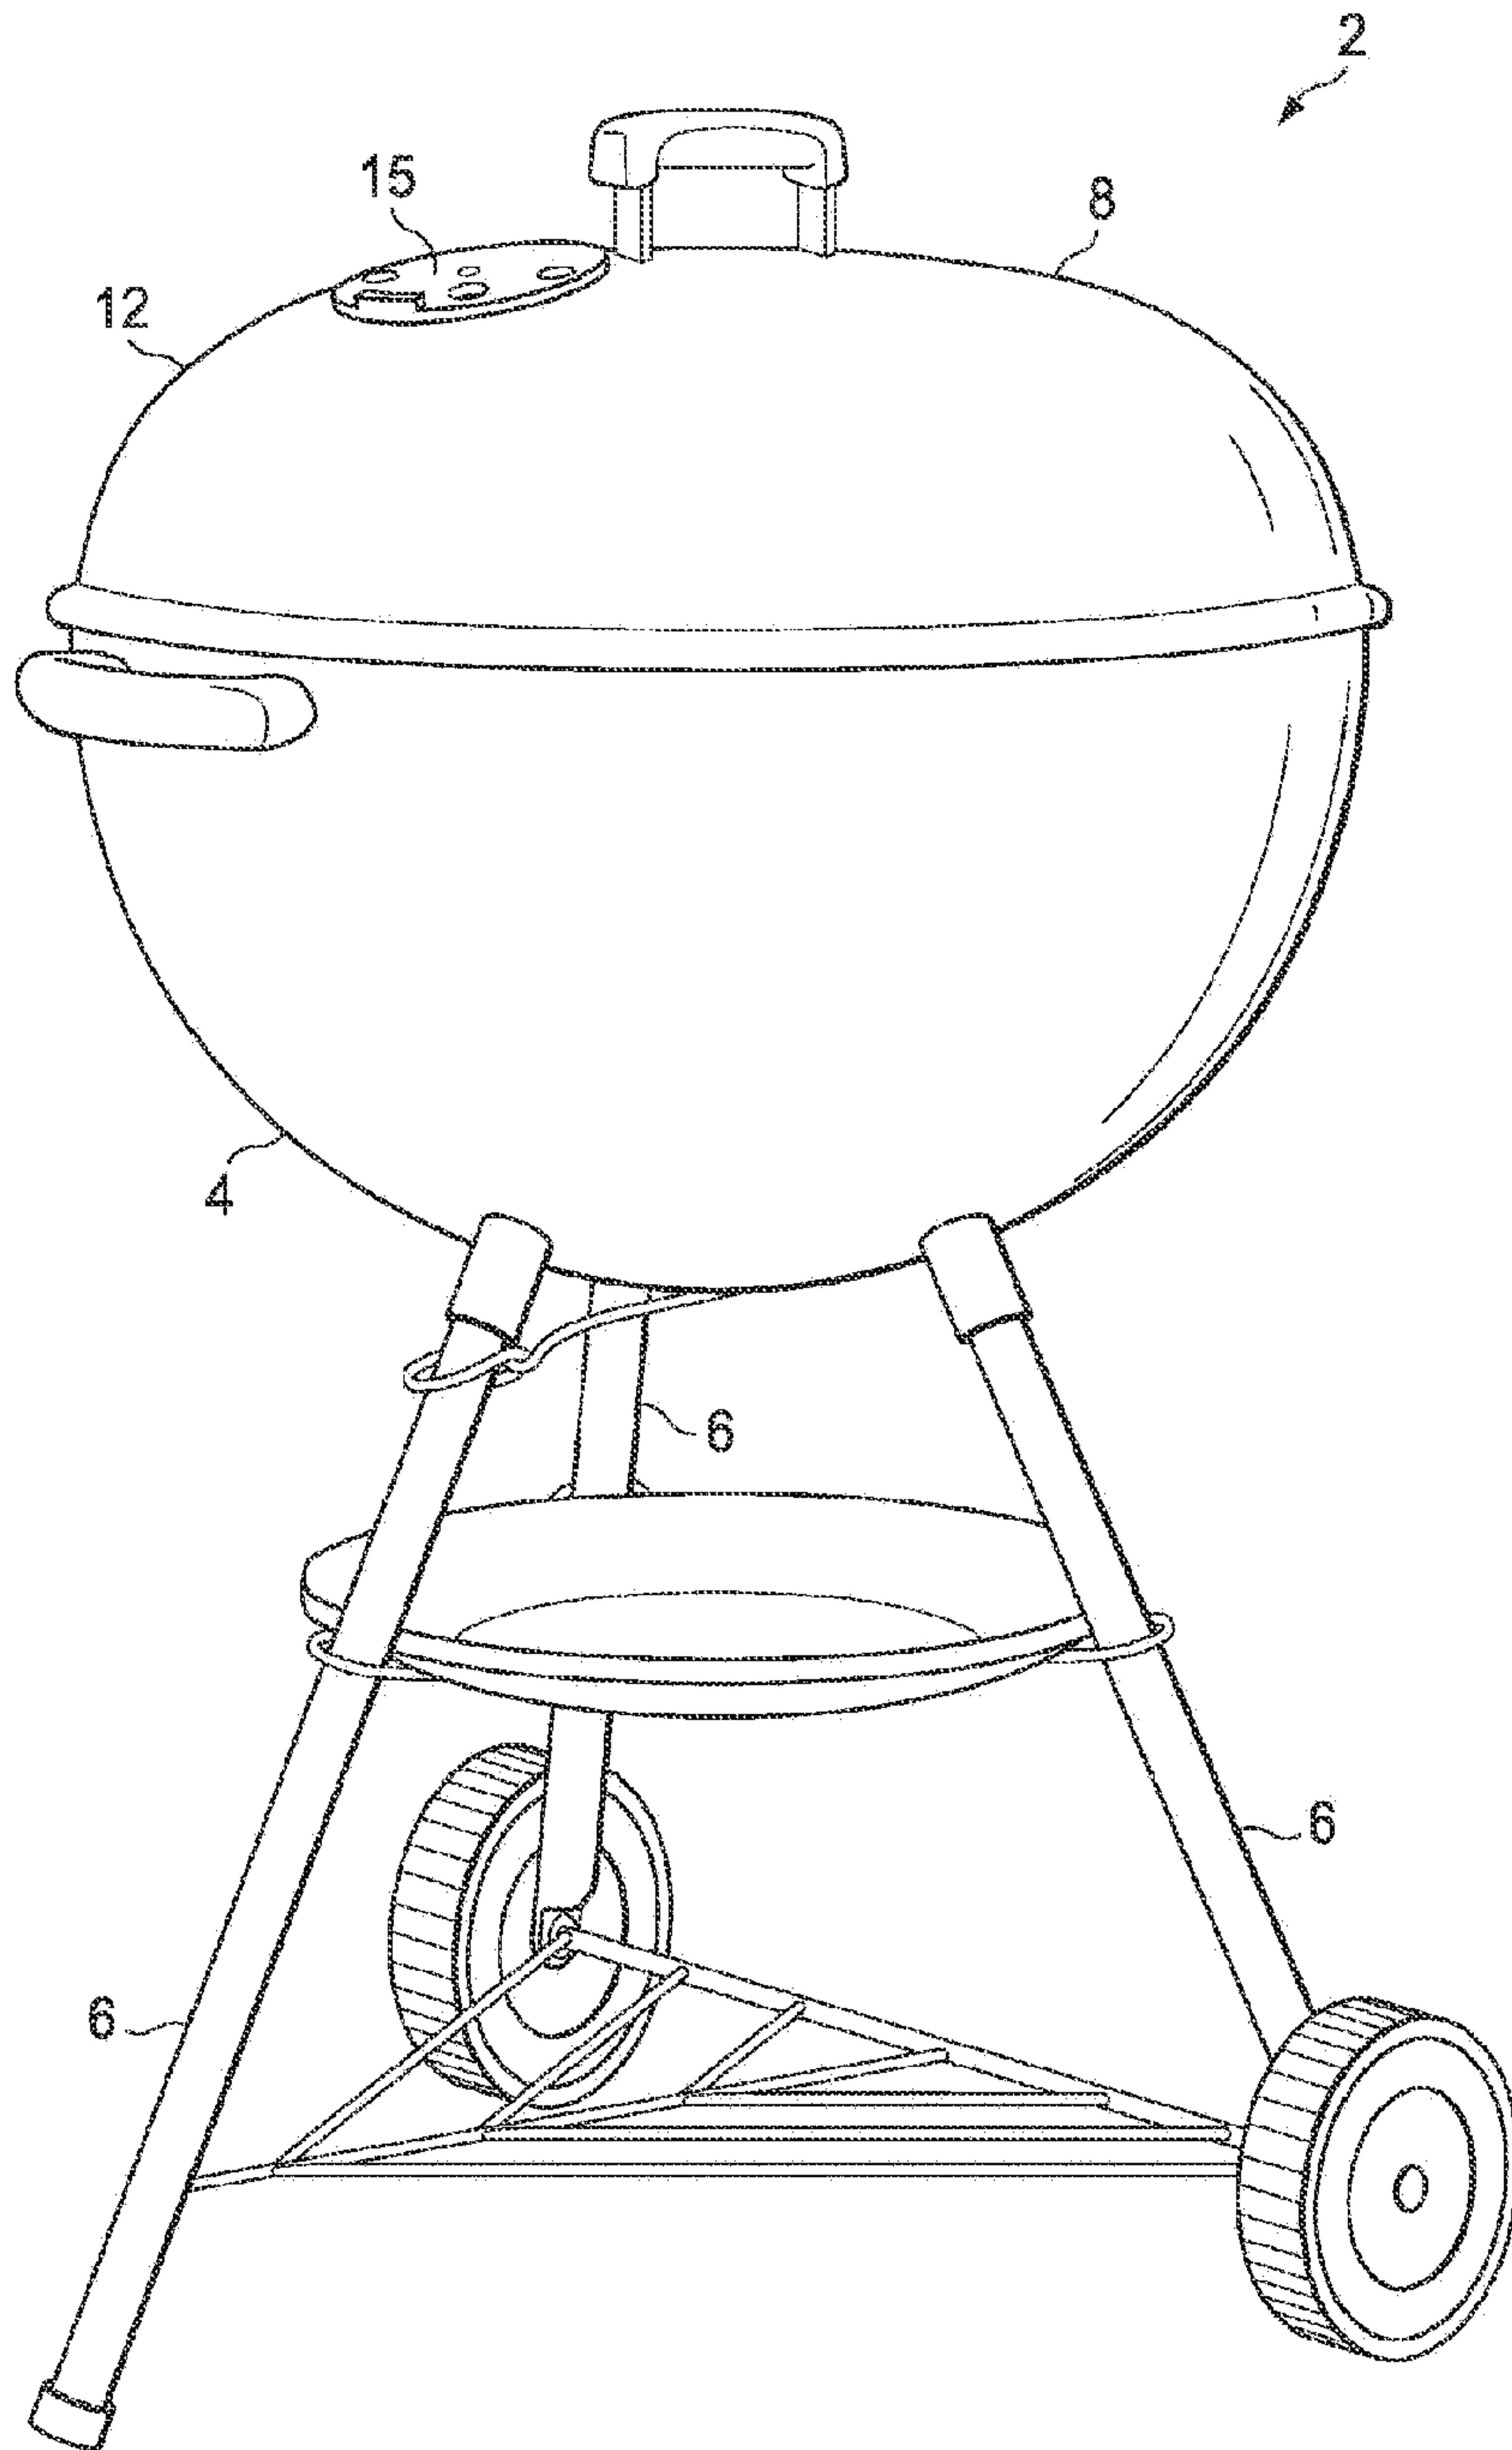


FIG. 1
(PRIOR ART)

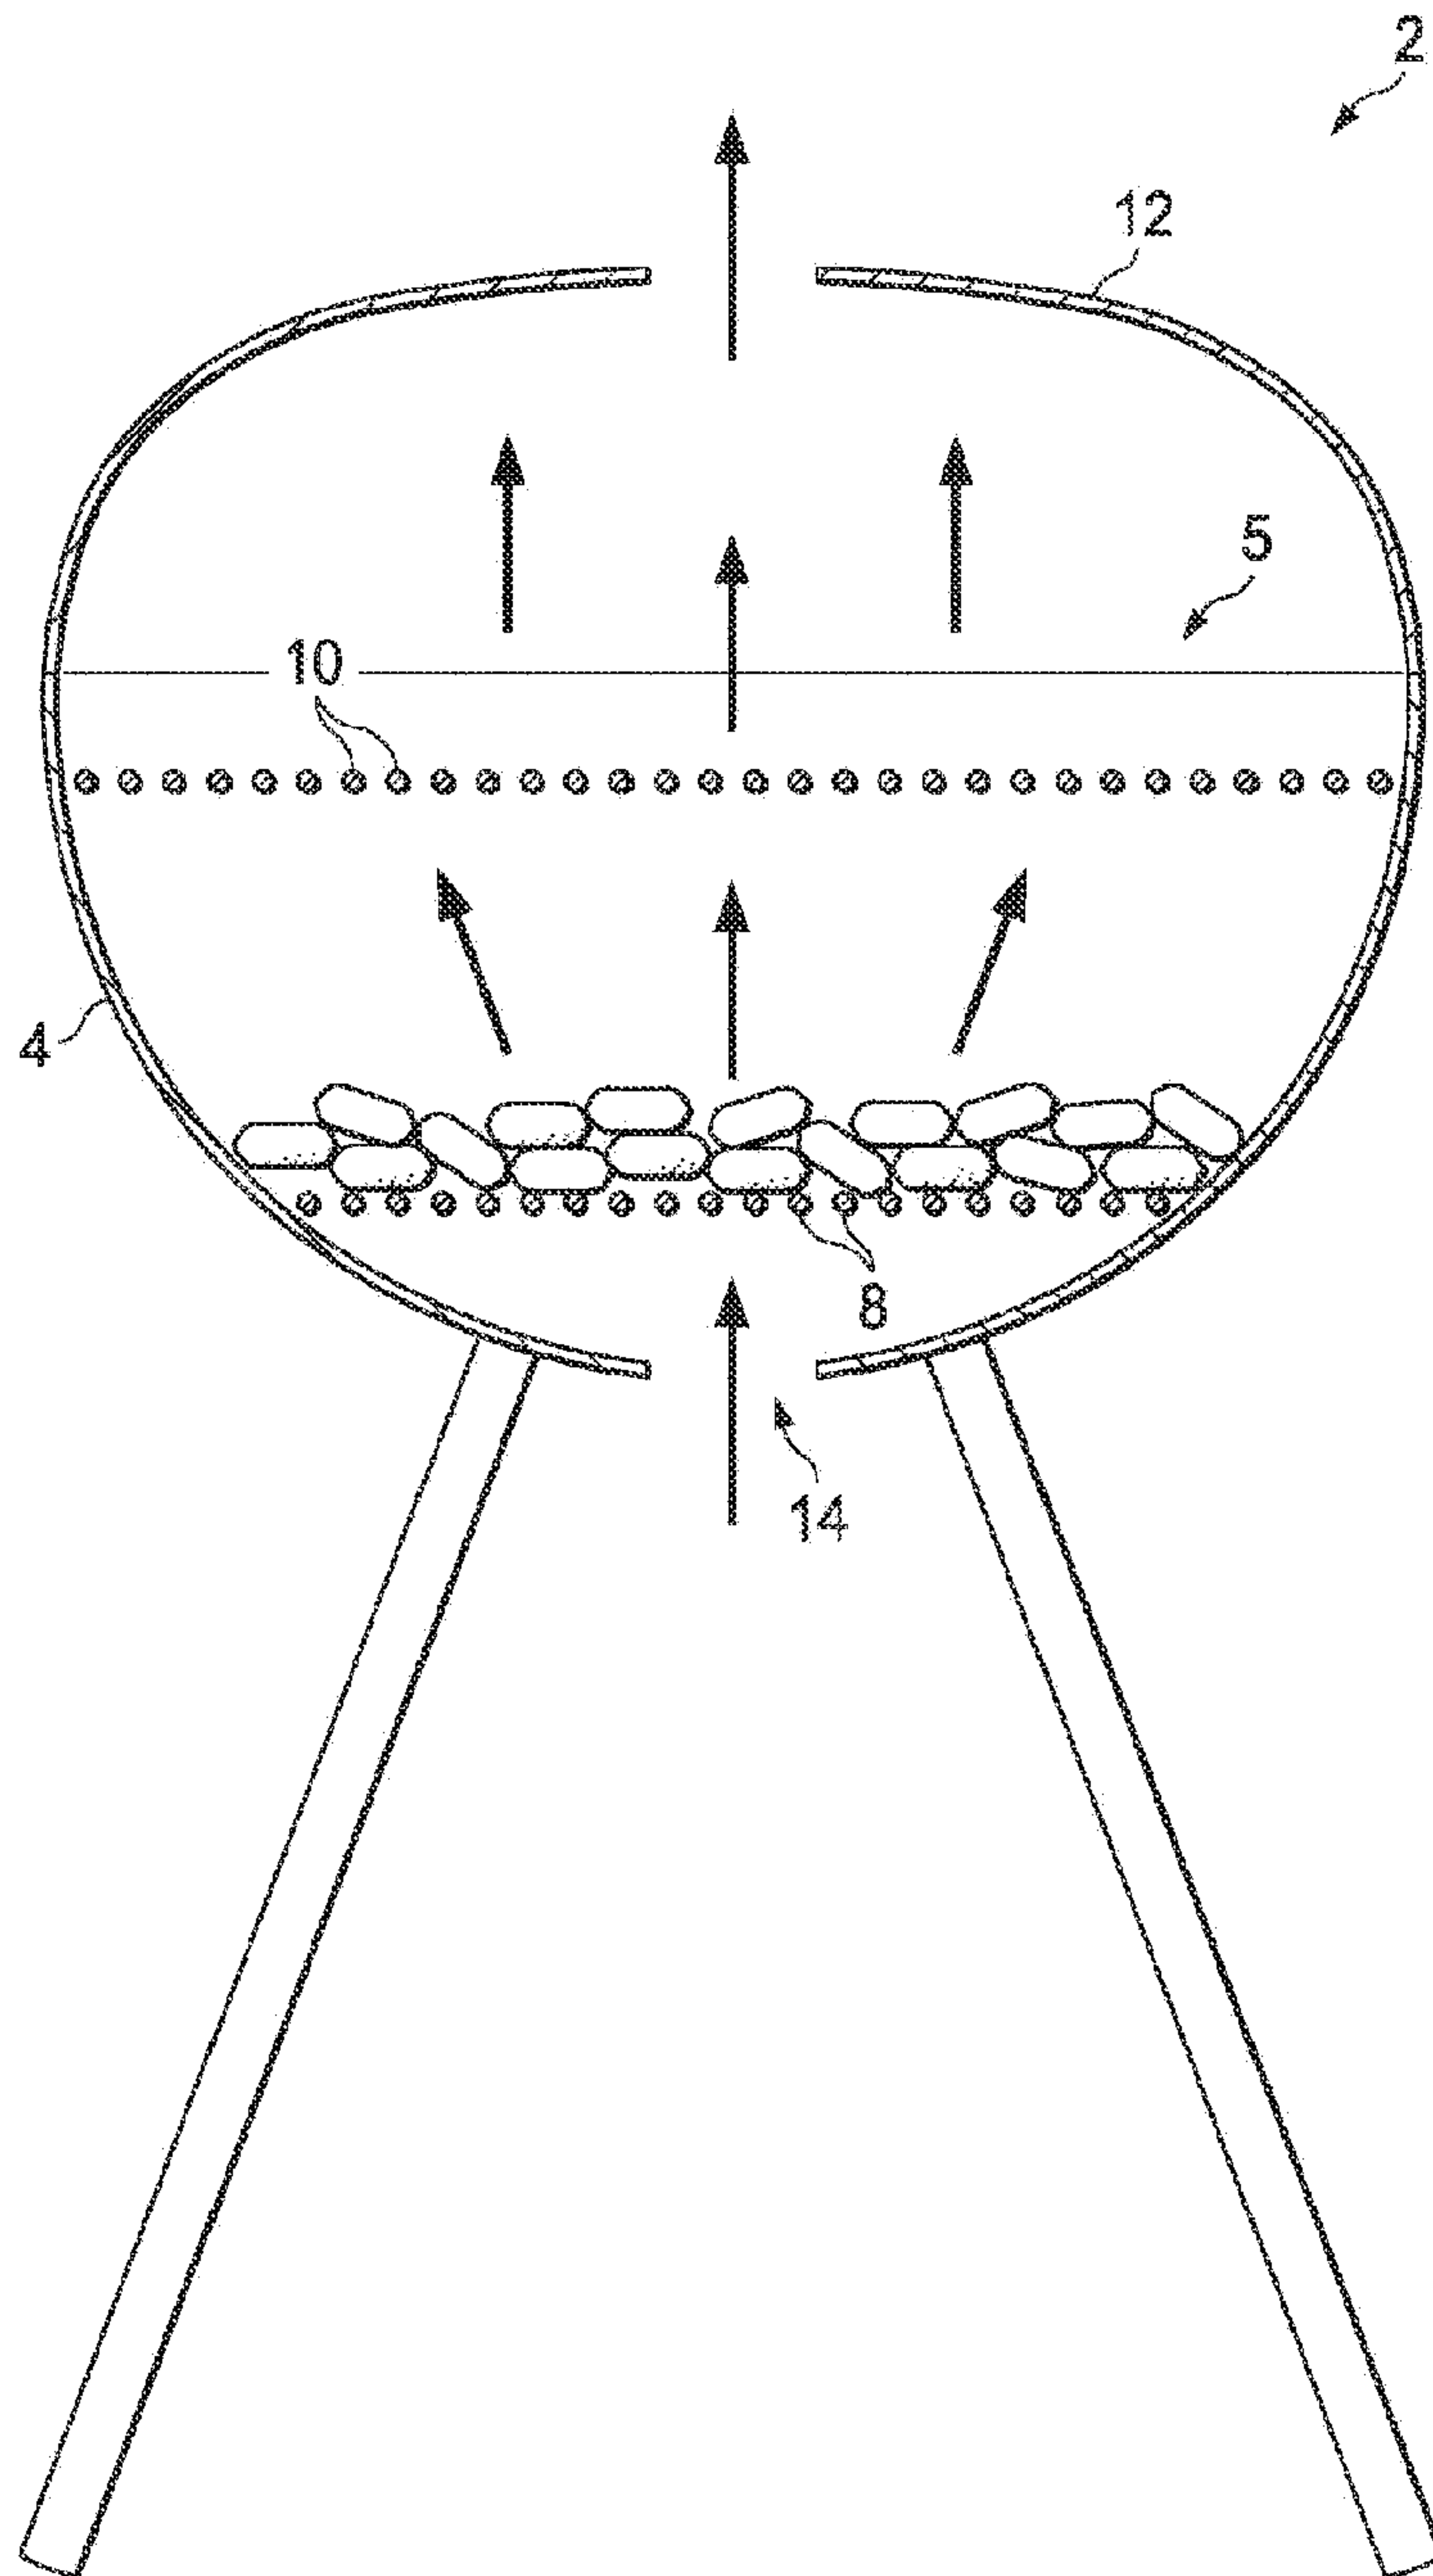


FIG. 2
(PRIOR ART)

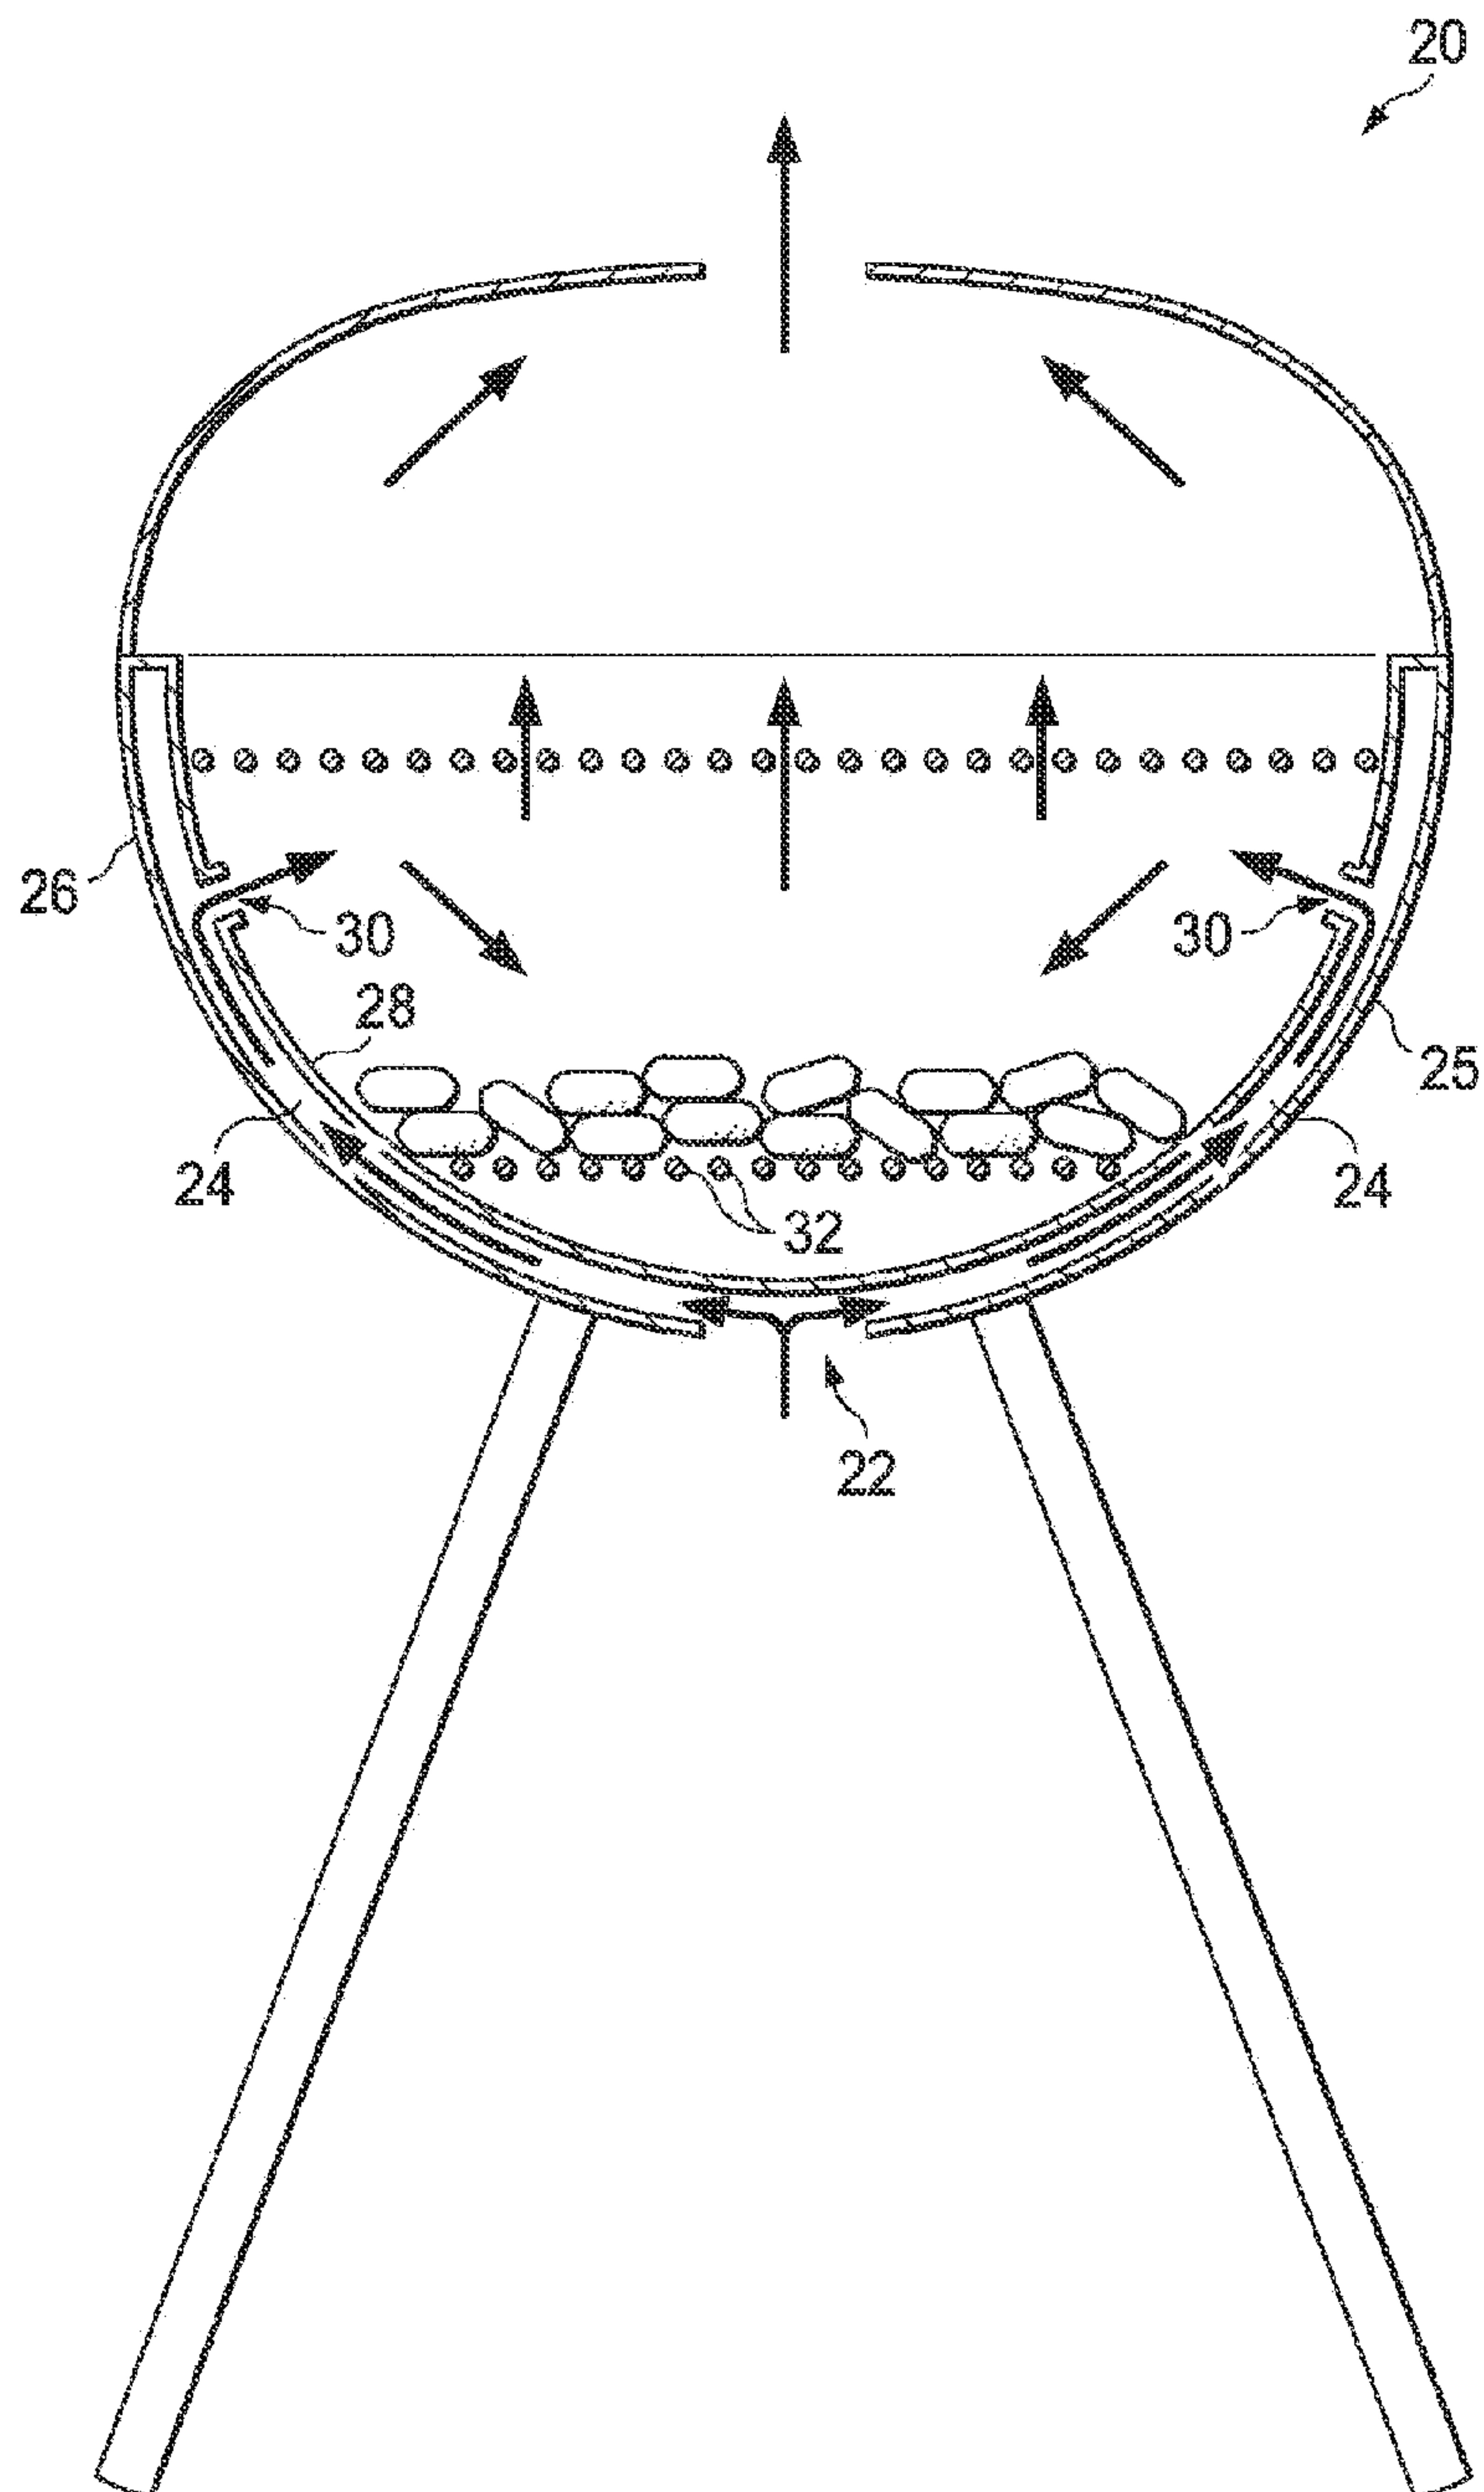


FIG. 3
(PRIOR ART)

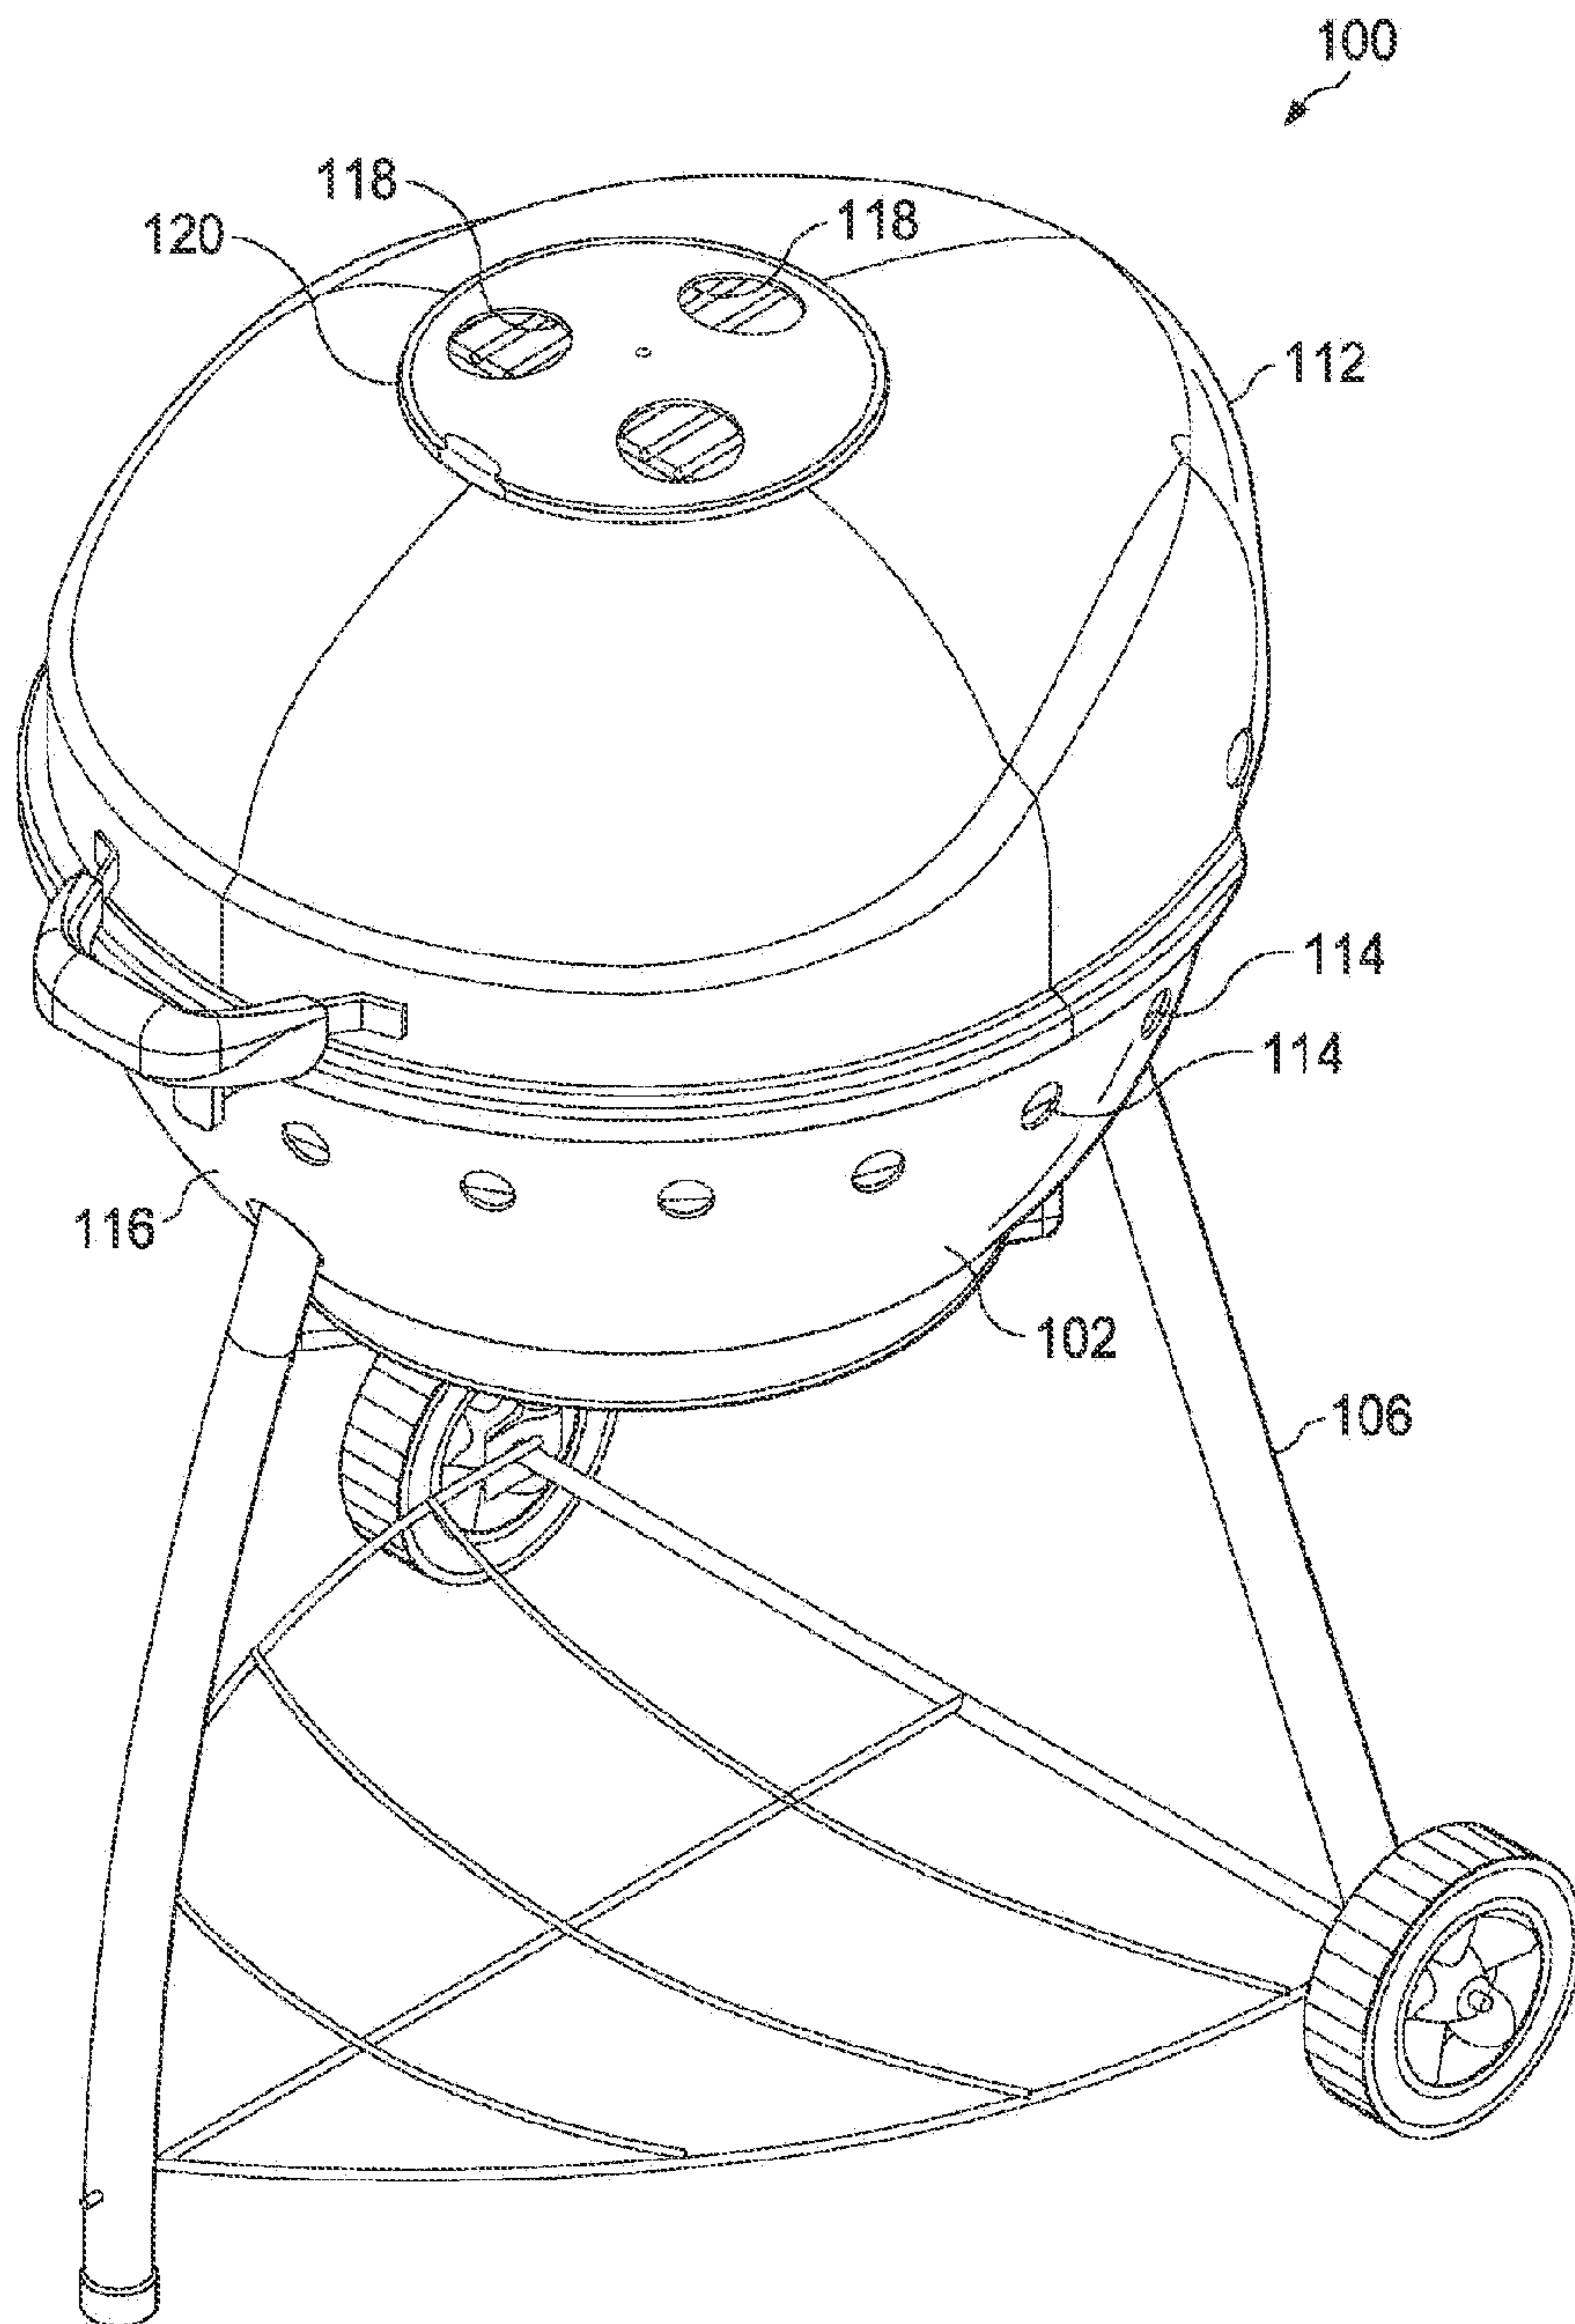


FIG. 4

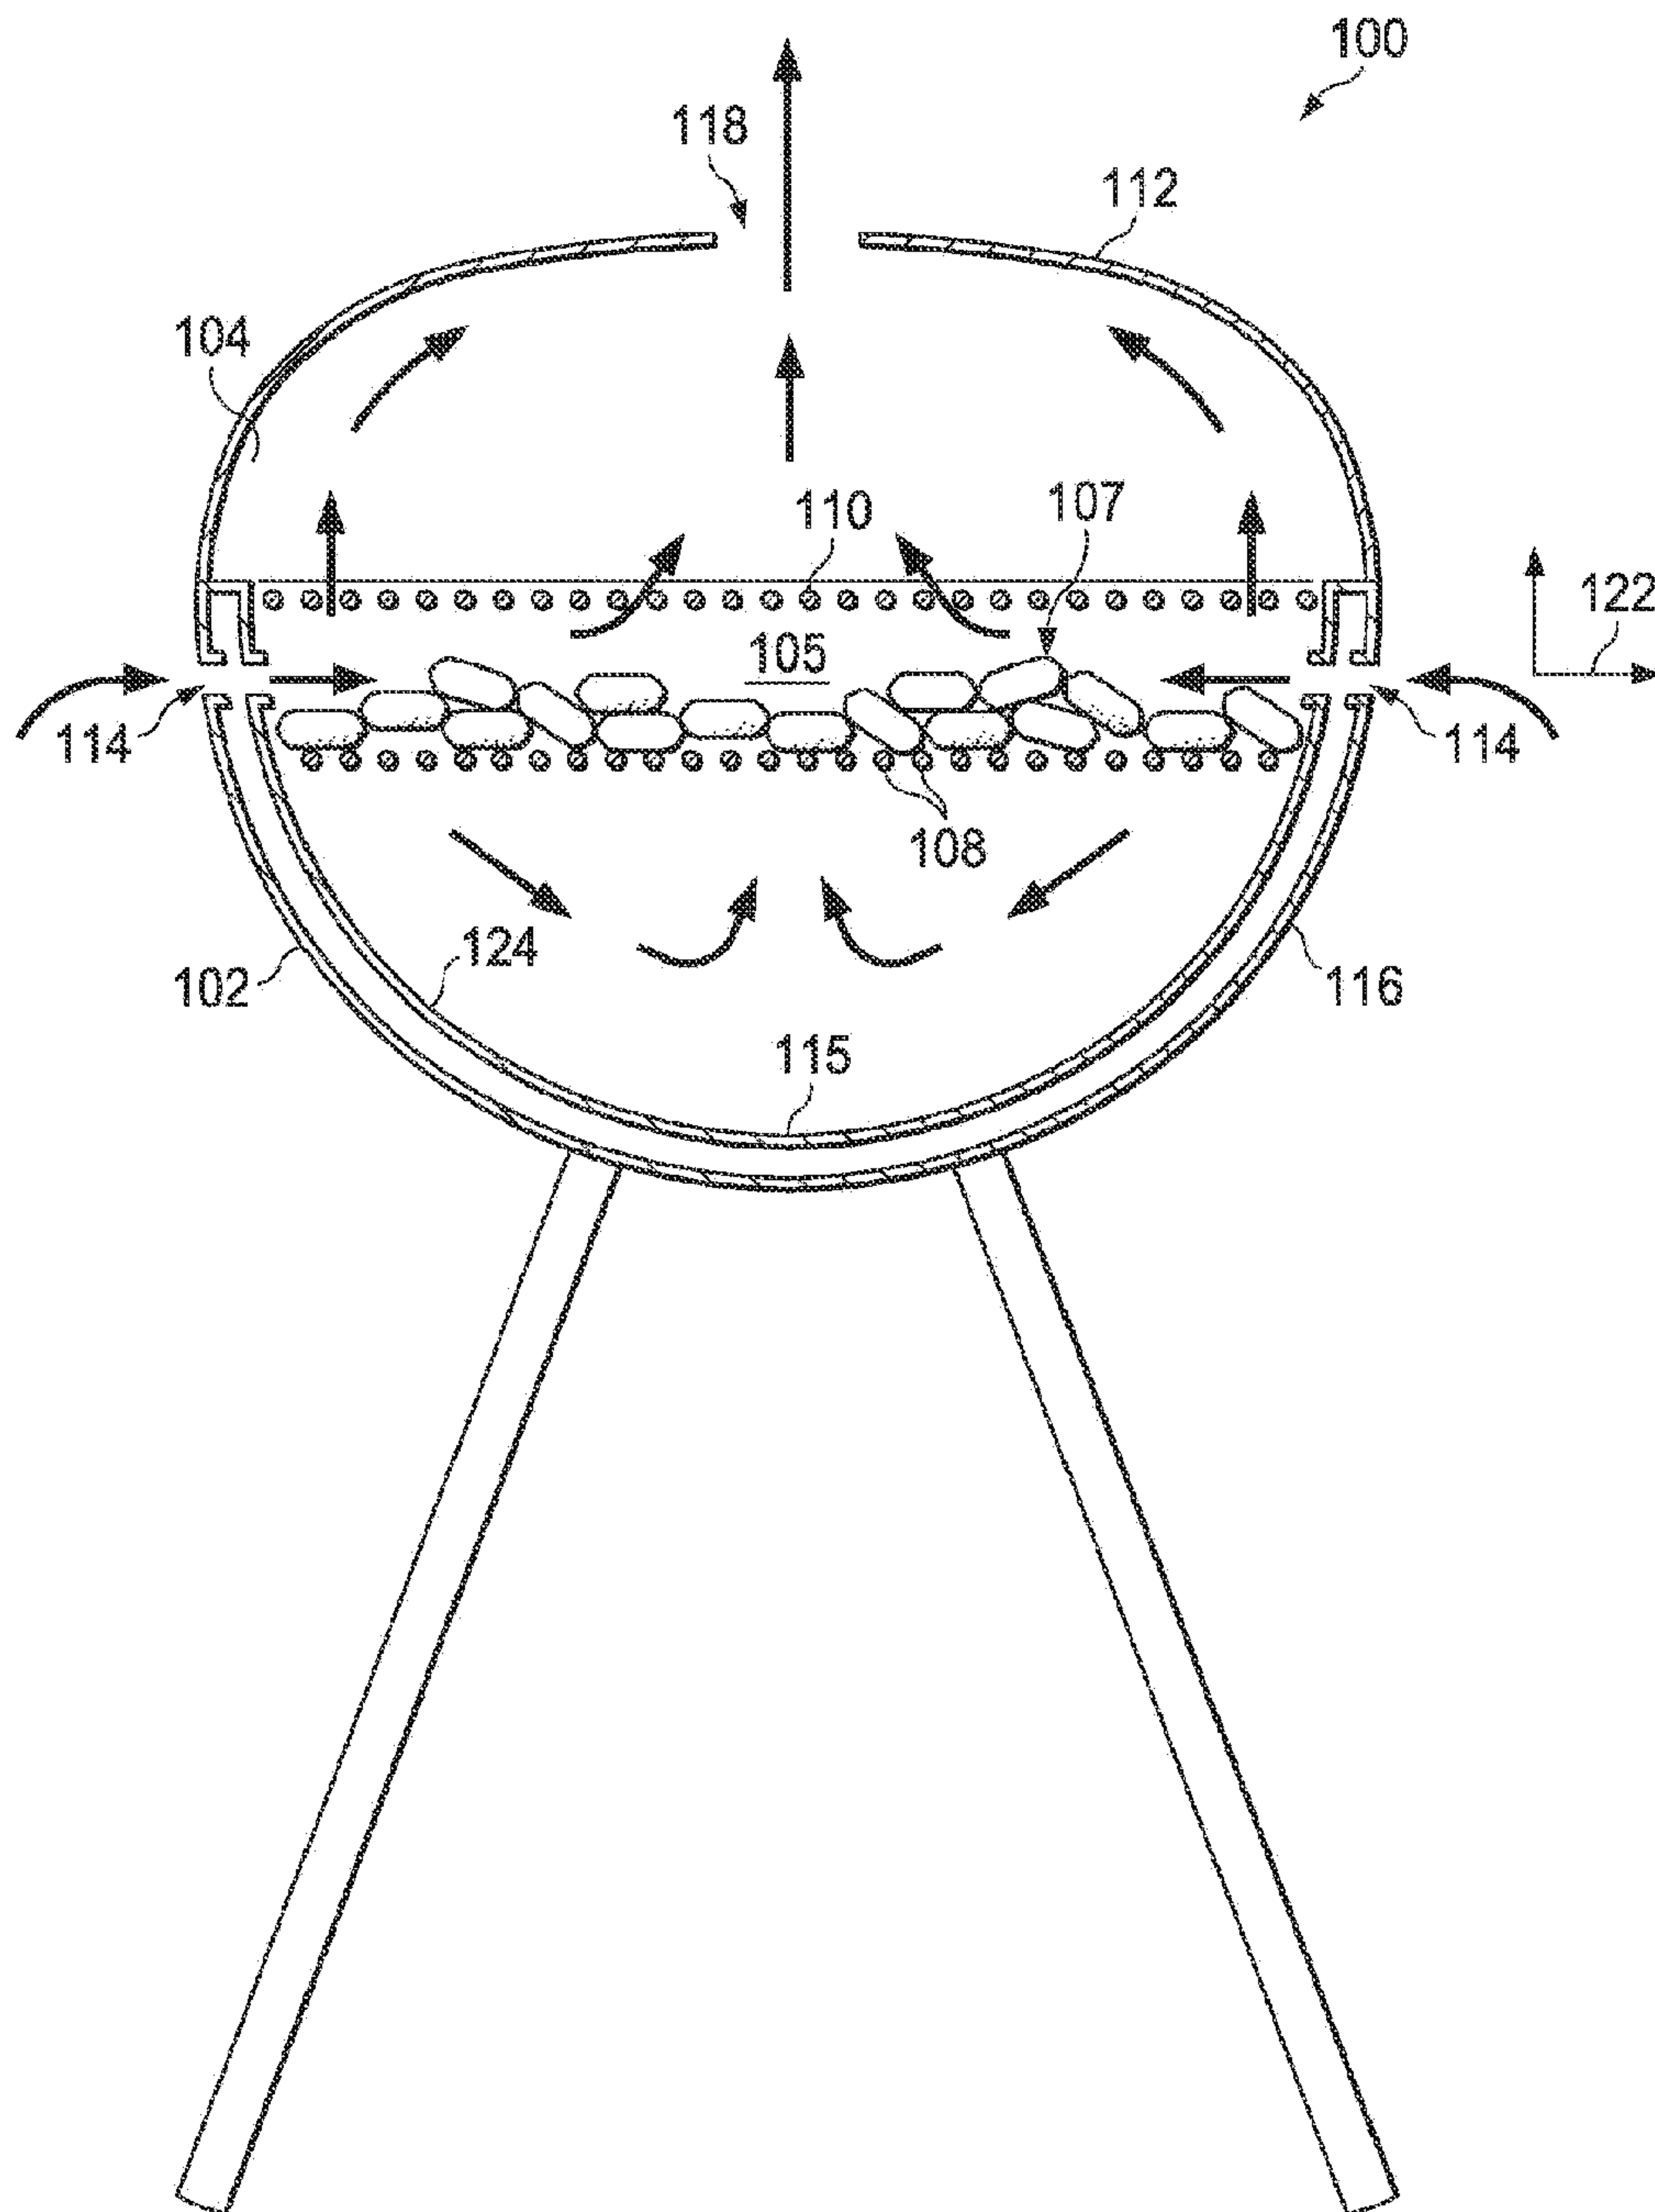


FIG. 5A

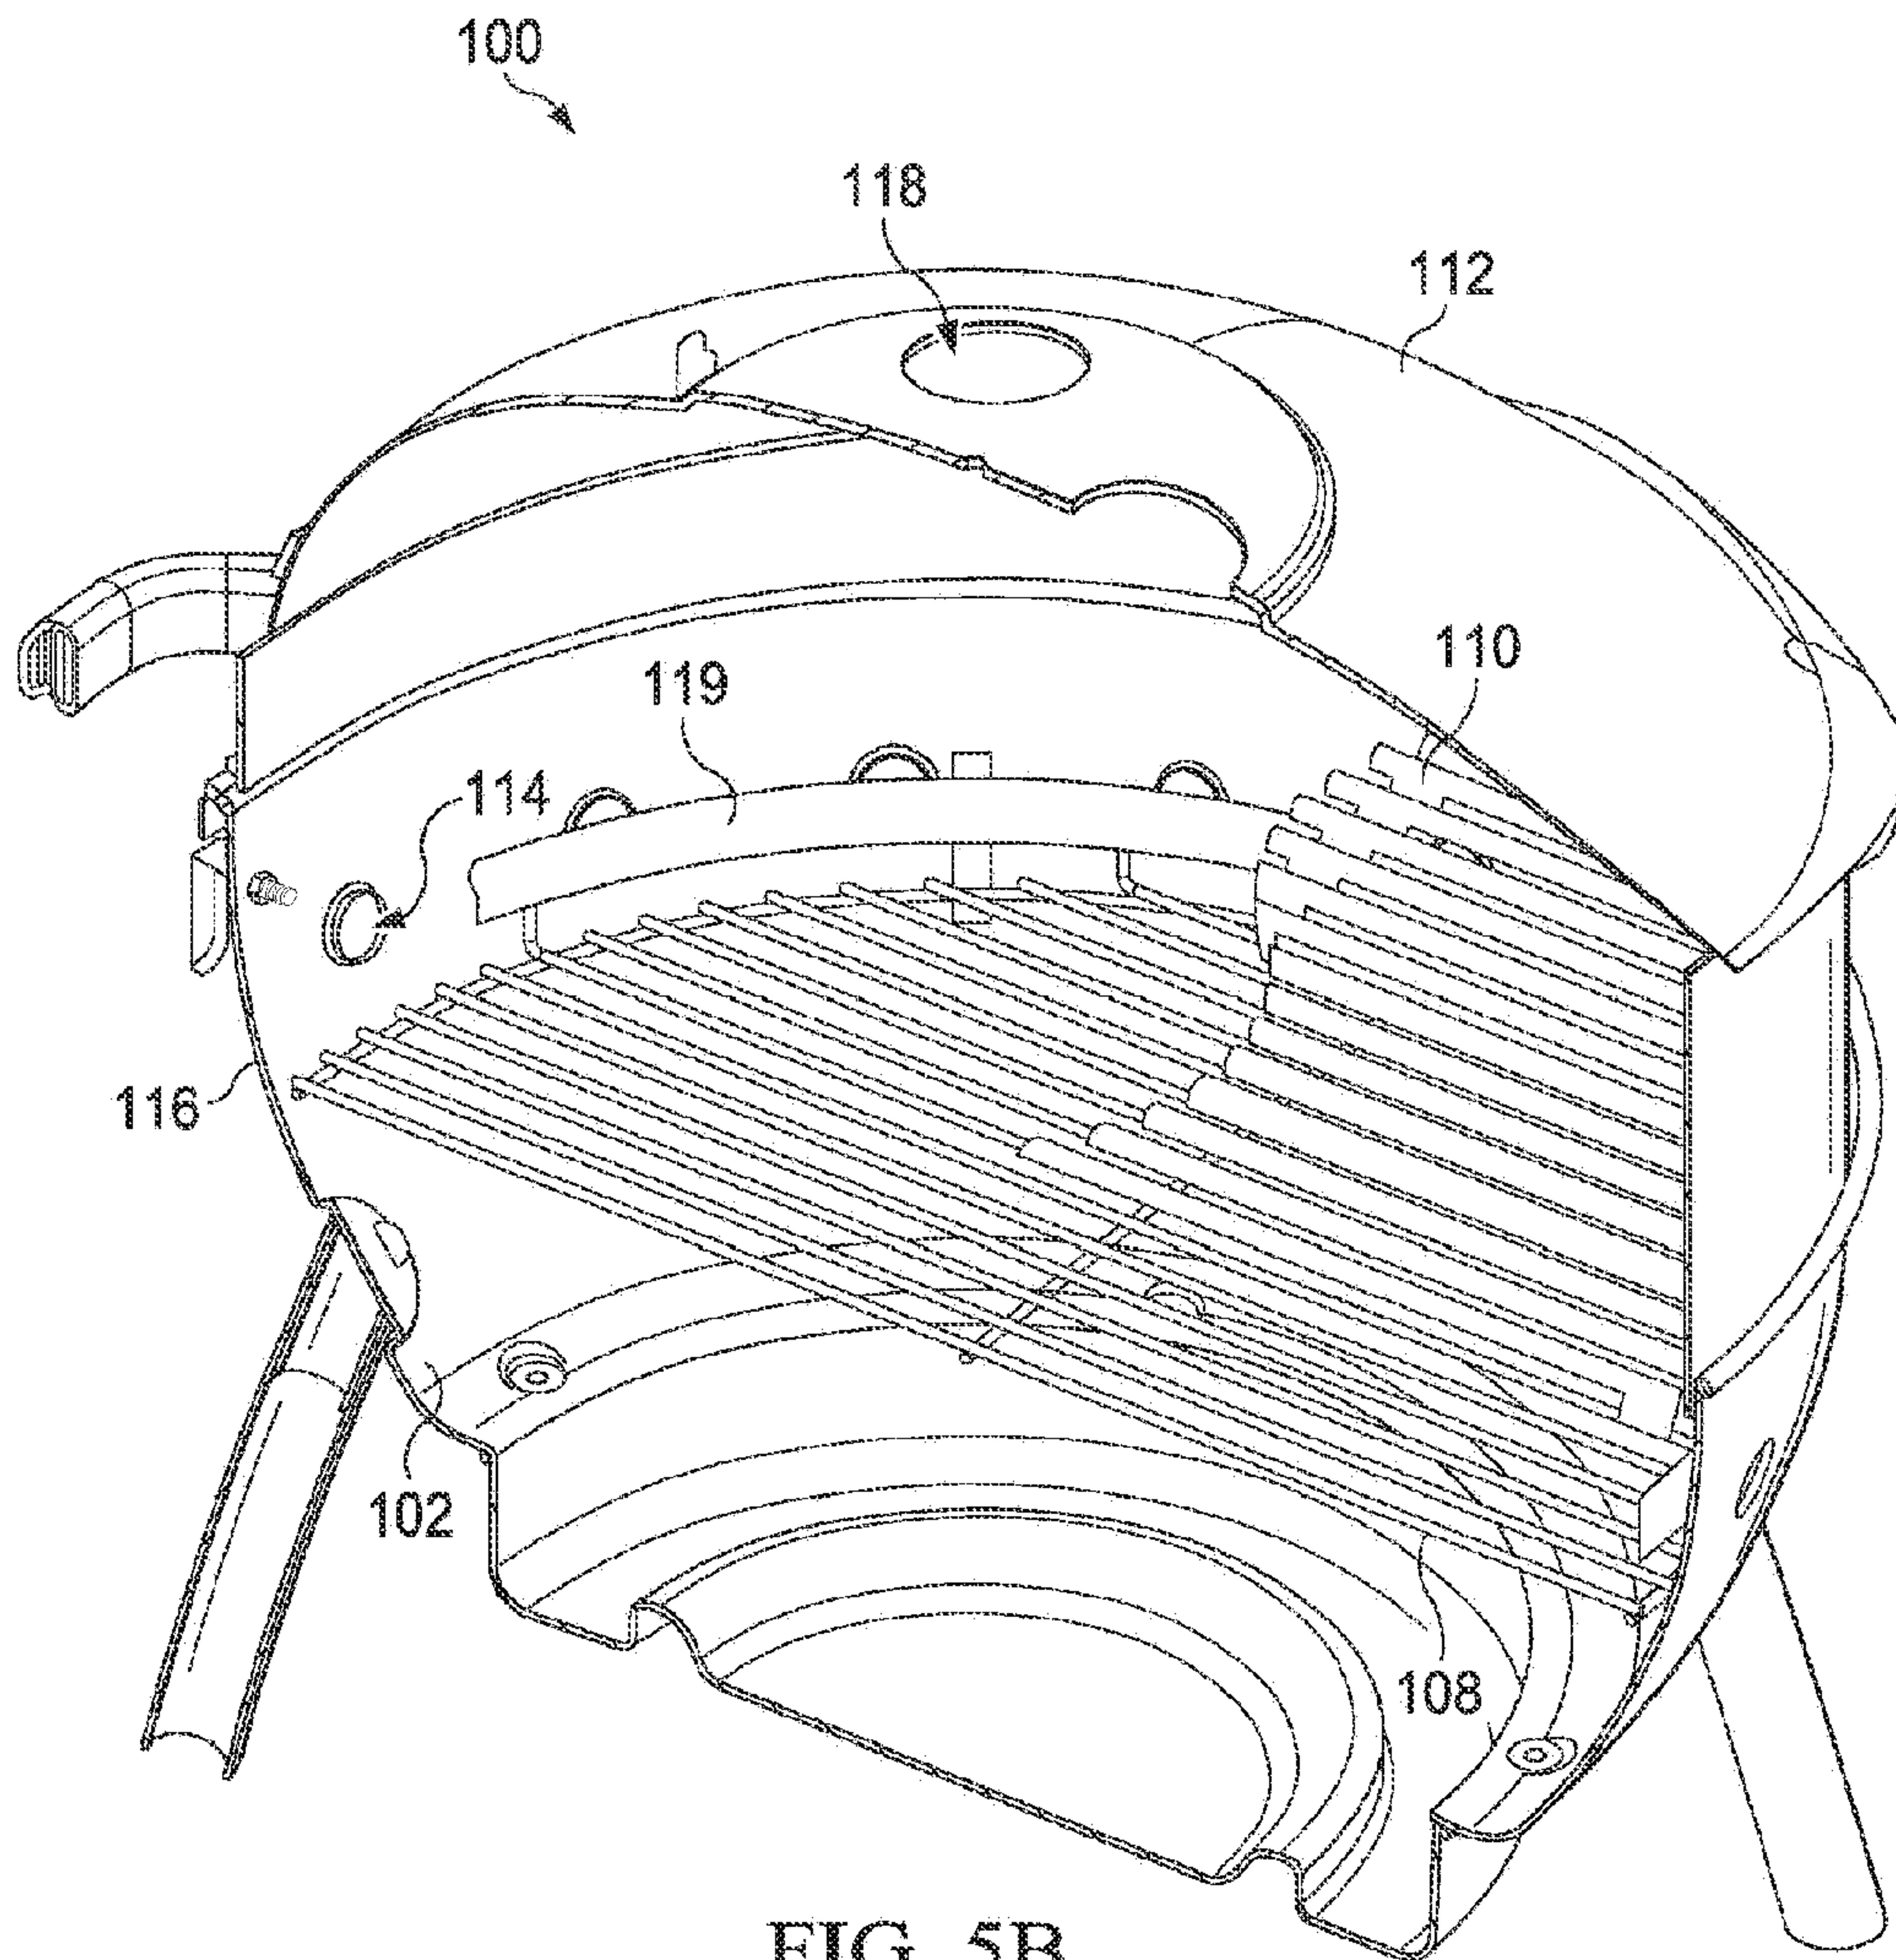


FIG. 5B

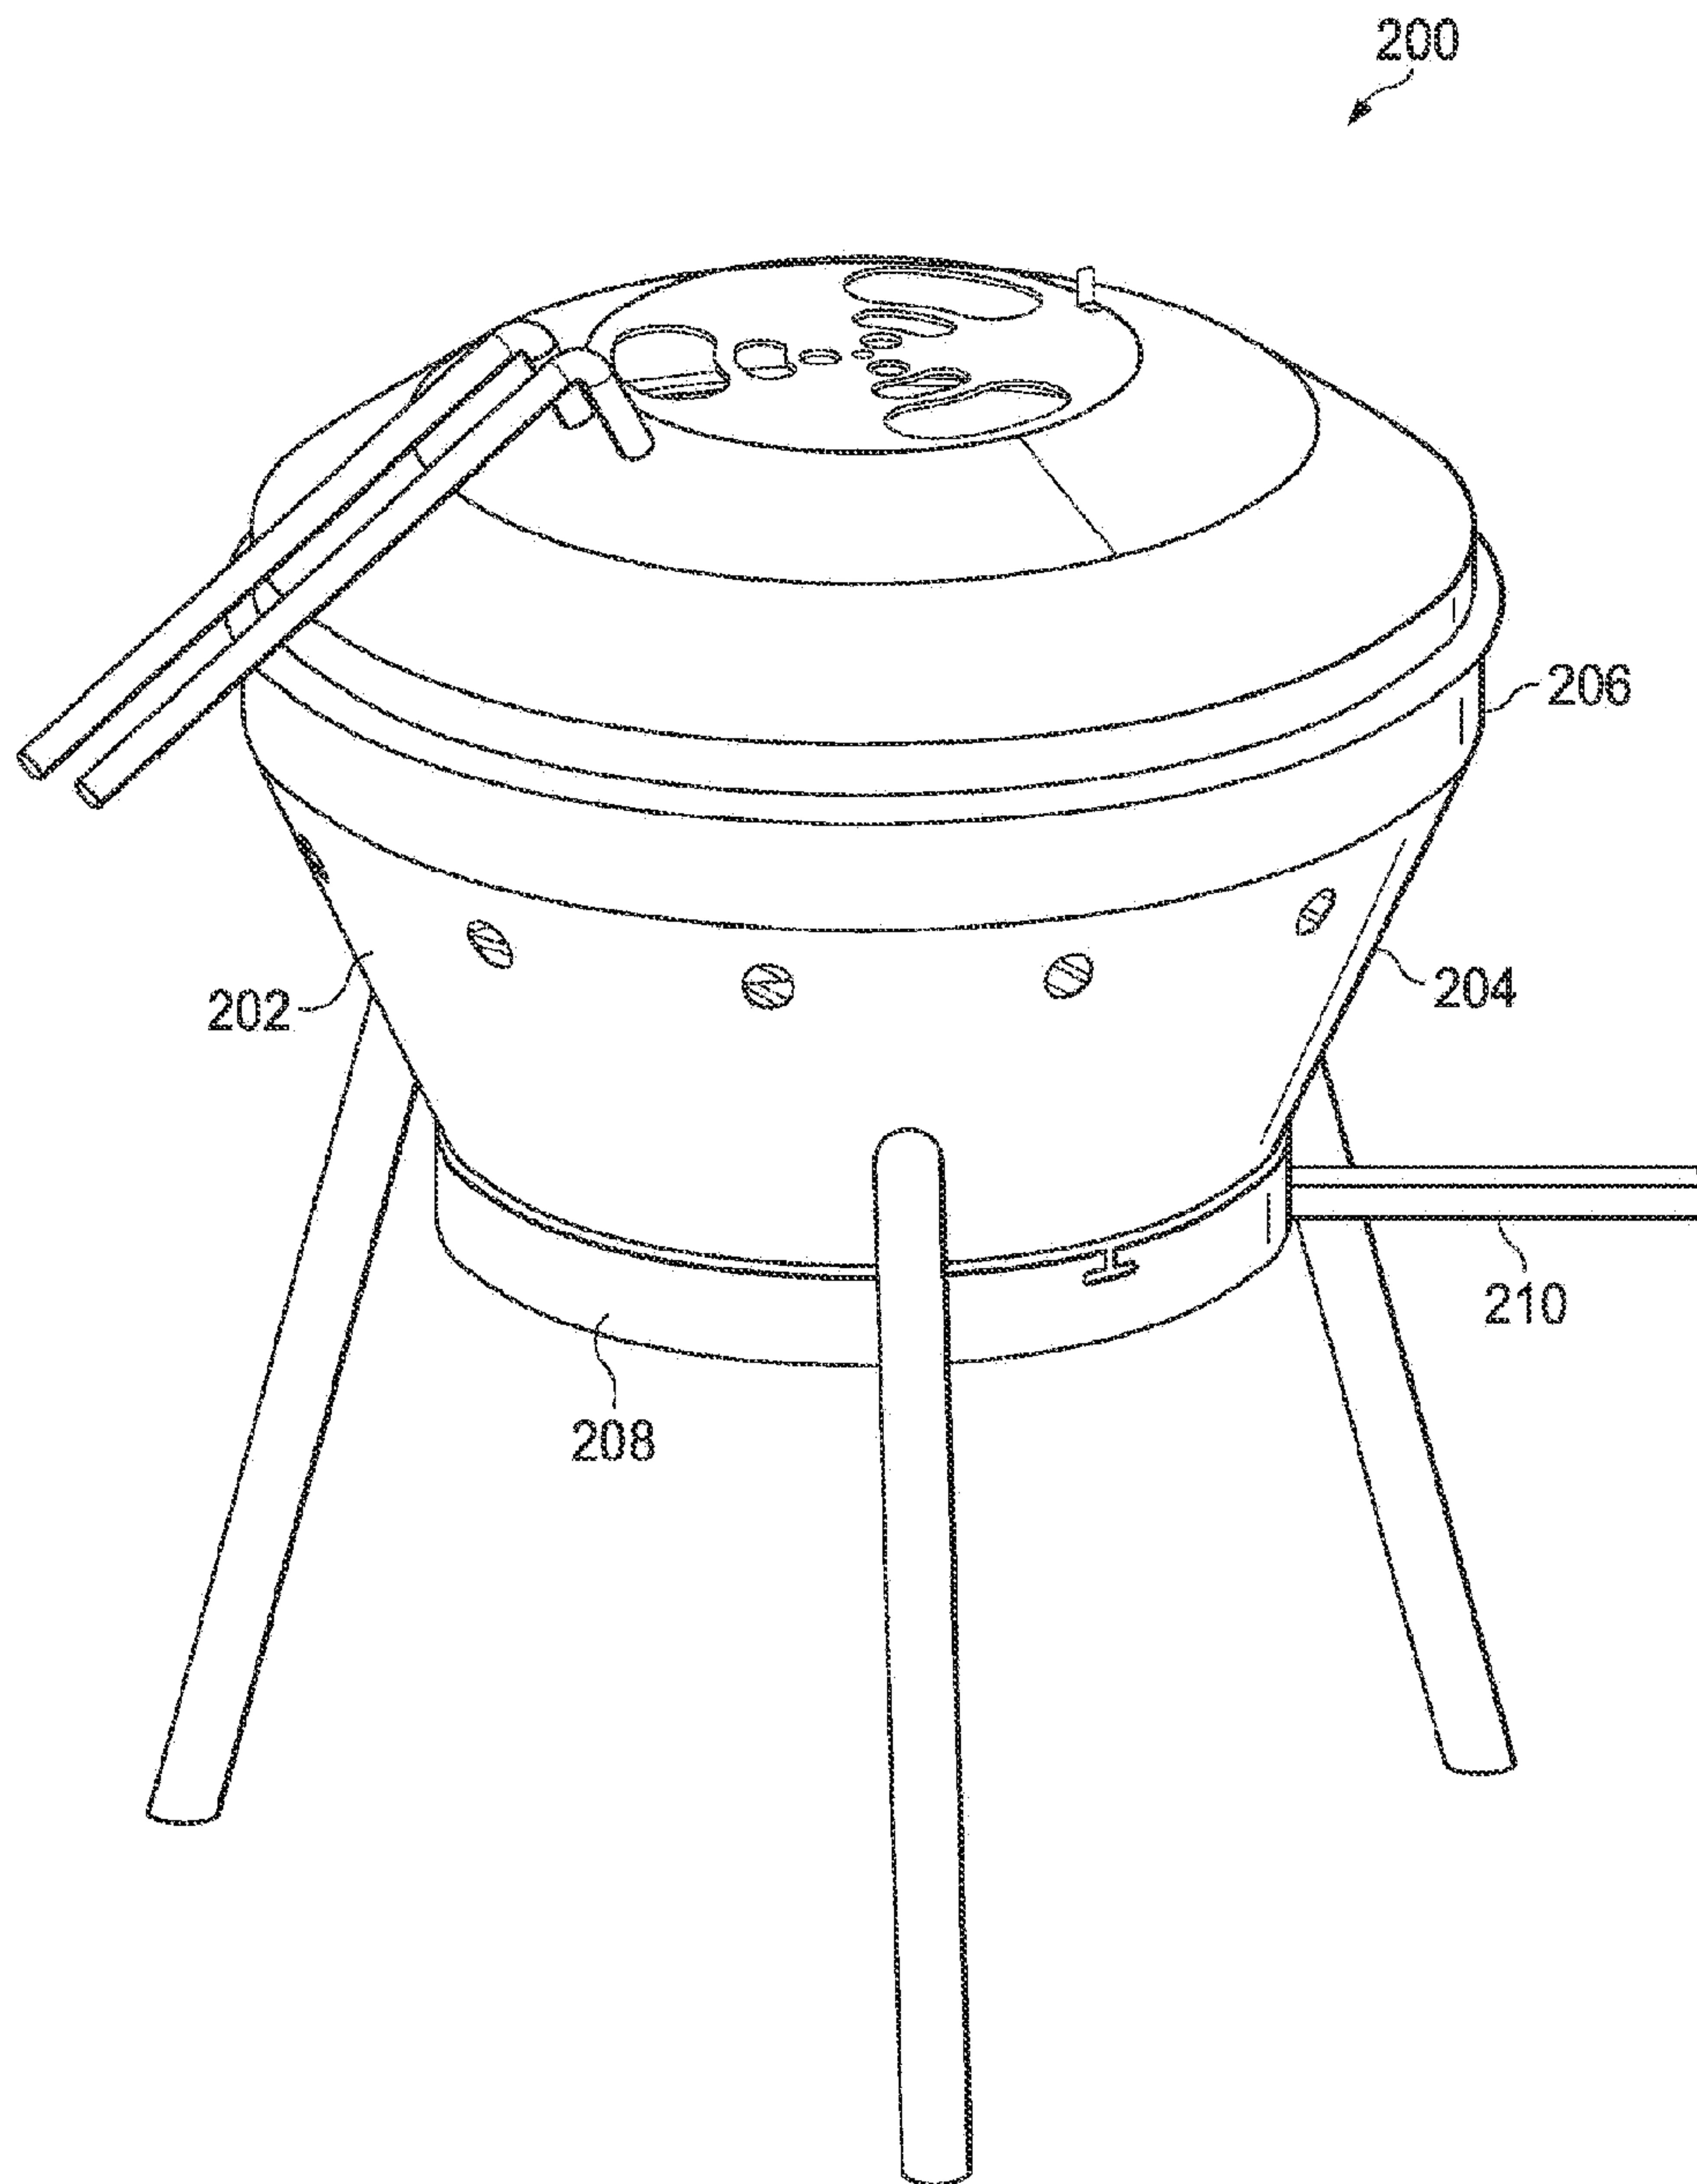


FIG. 6

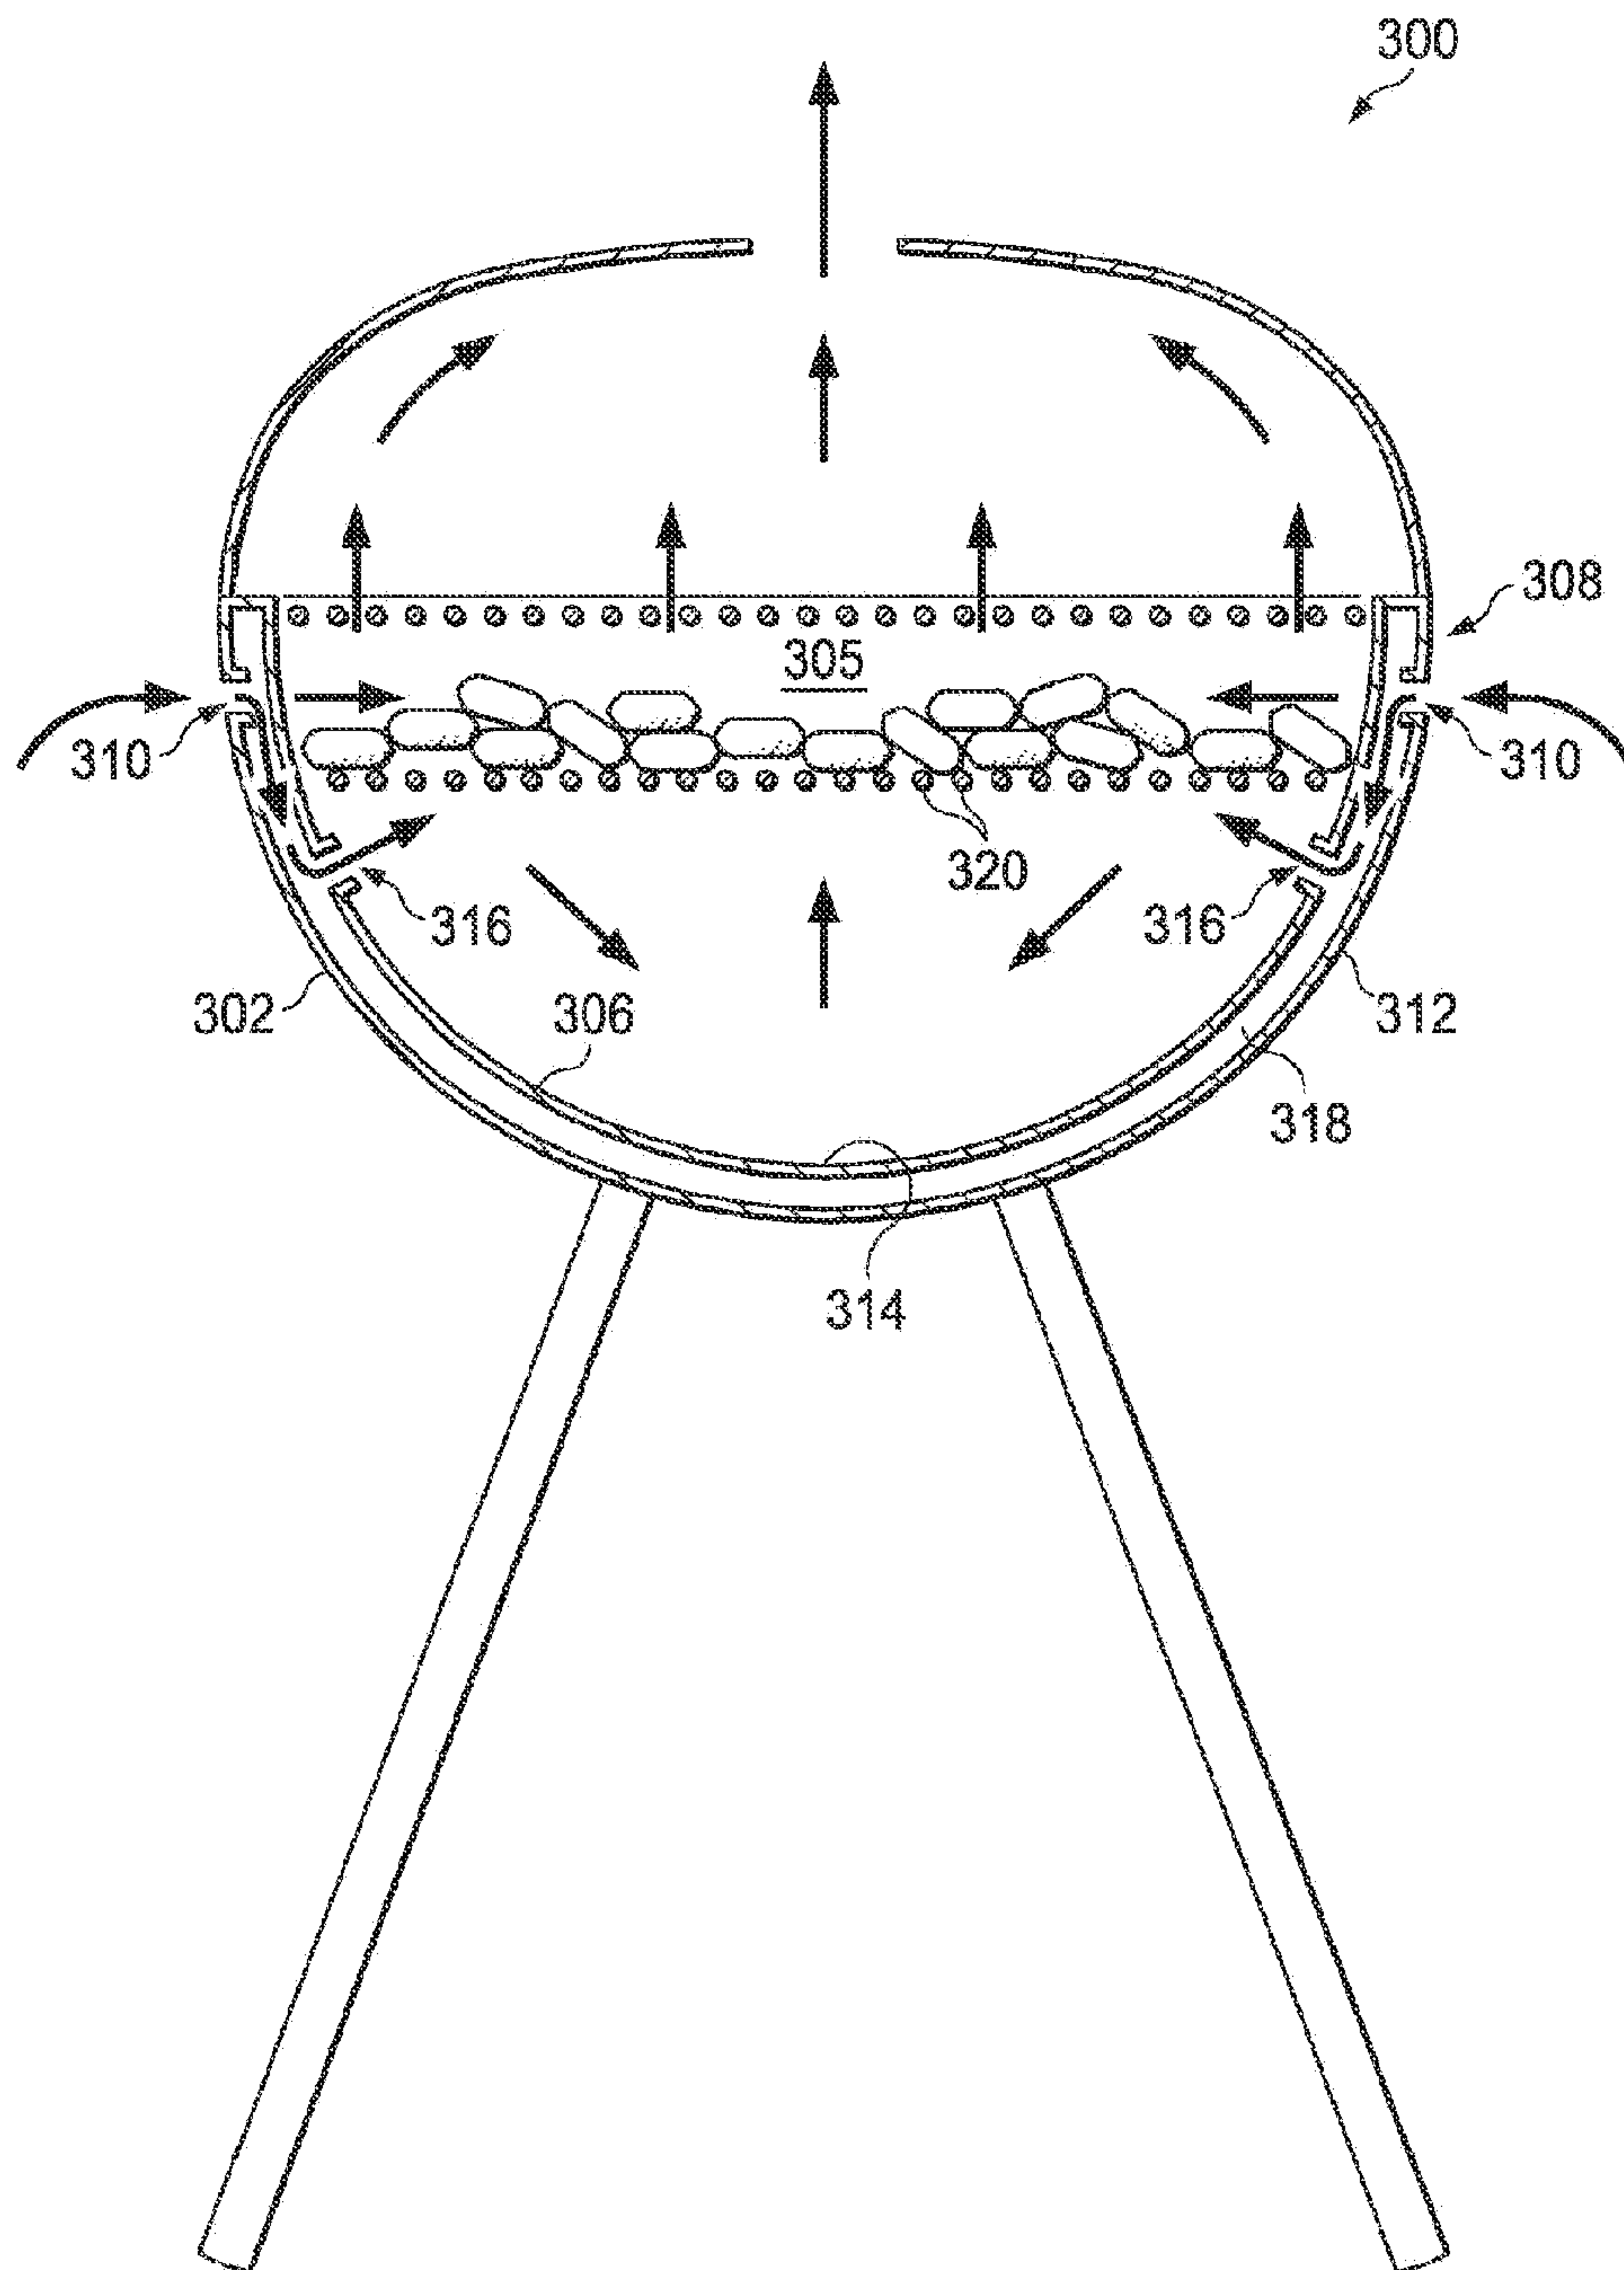


FIG. 7

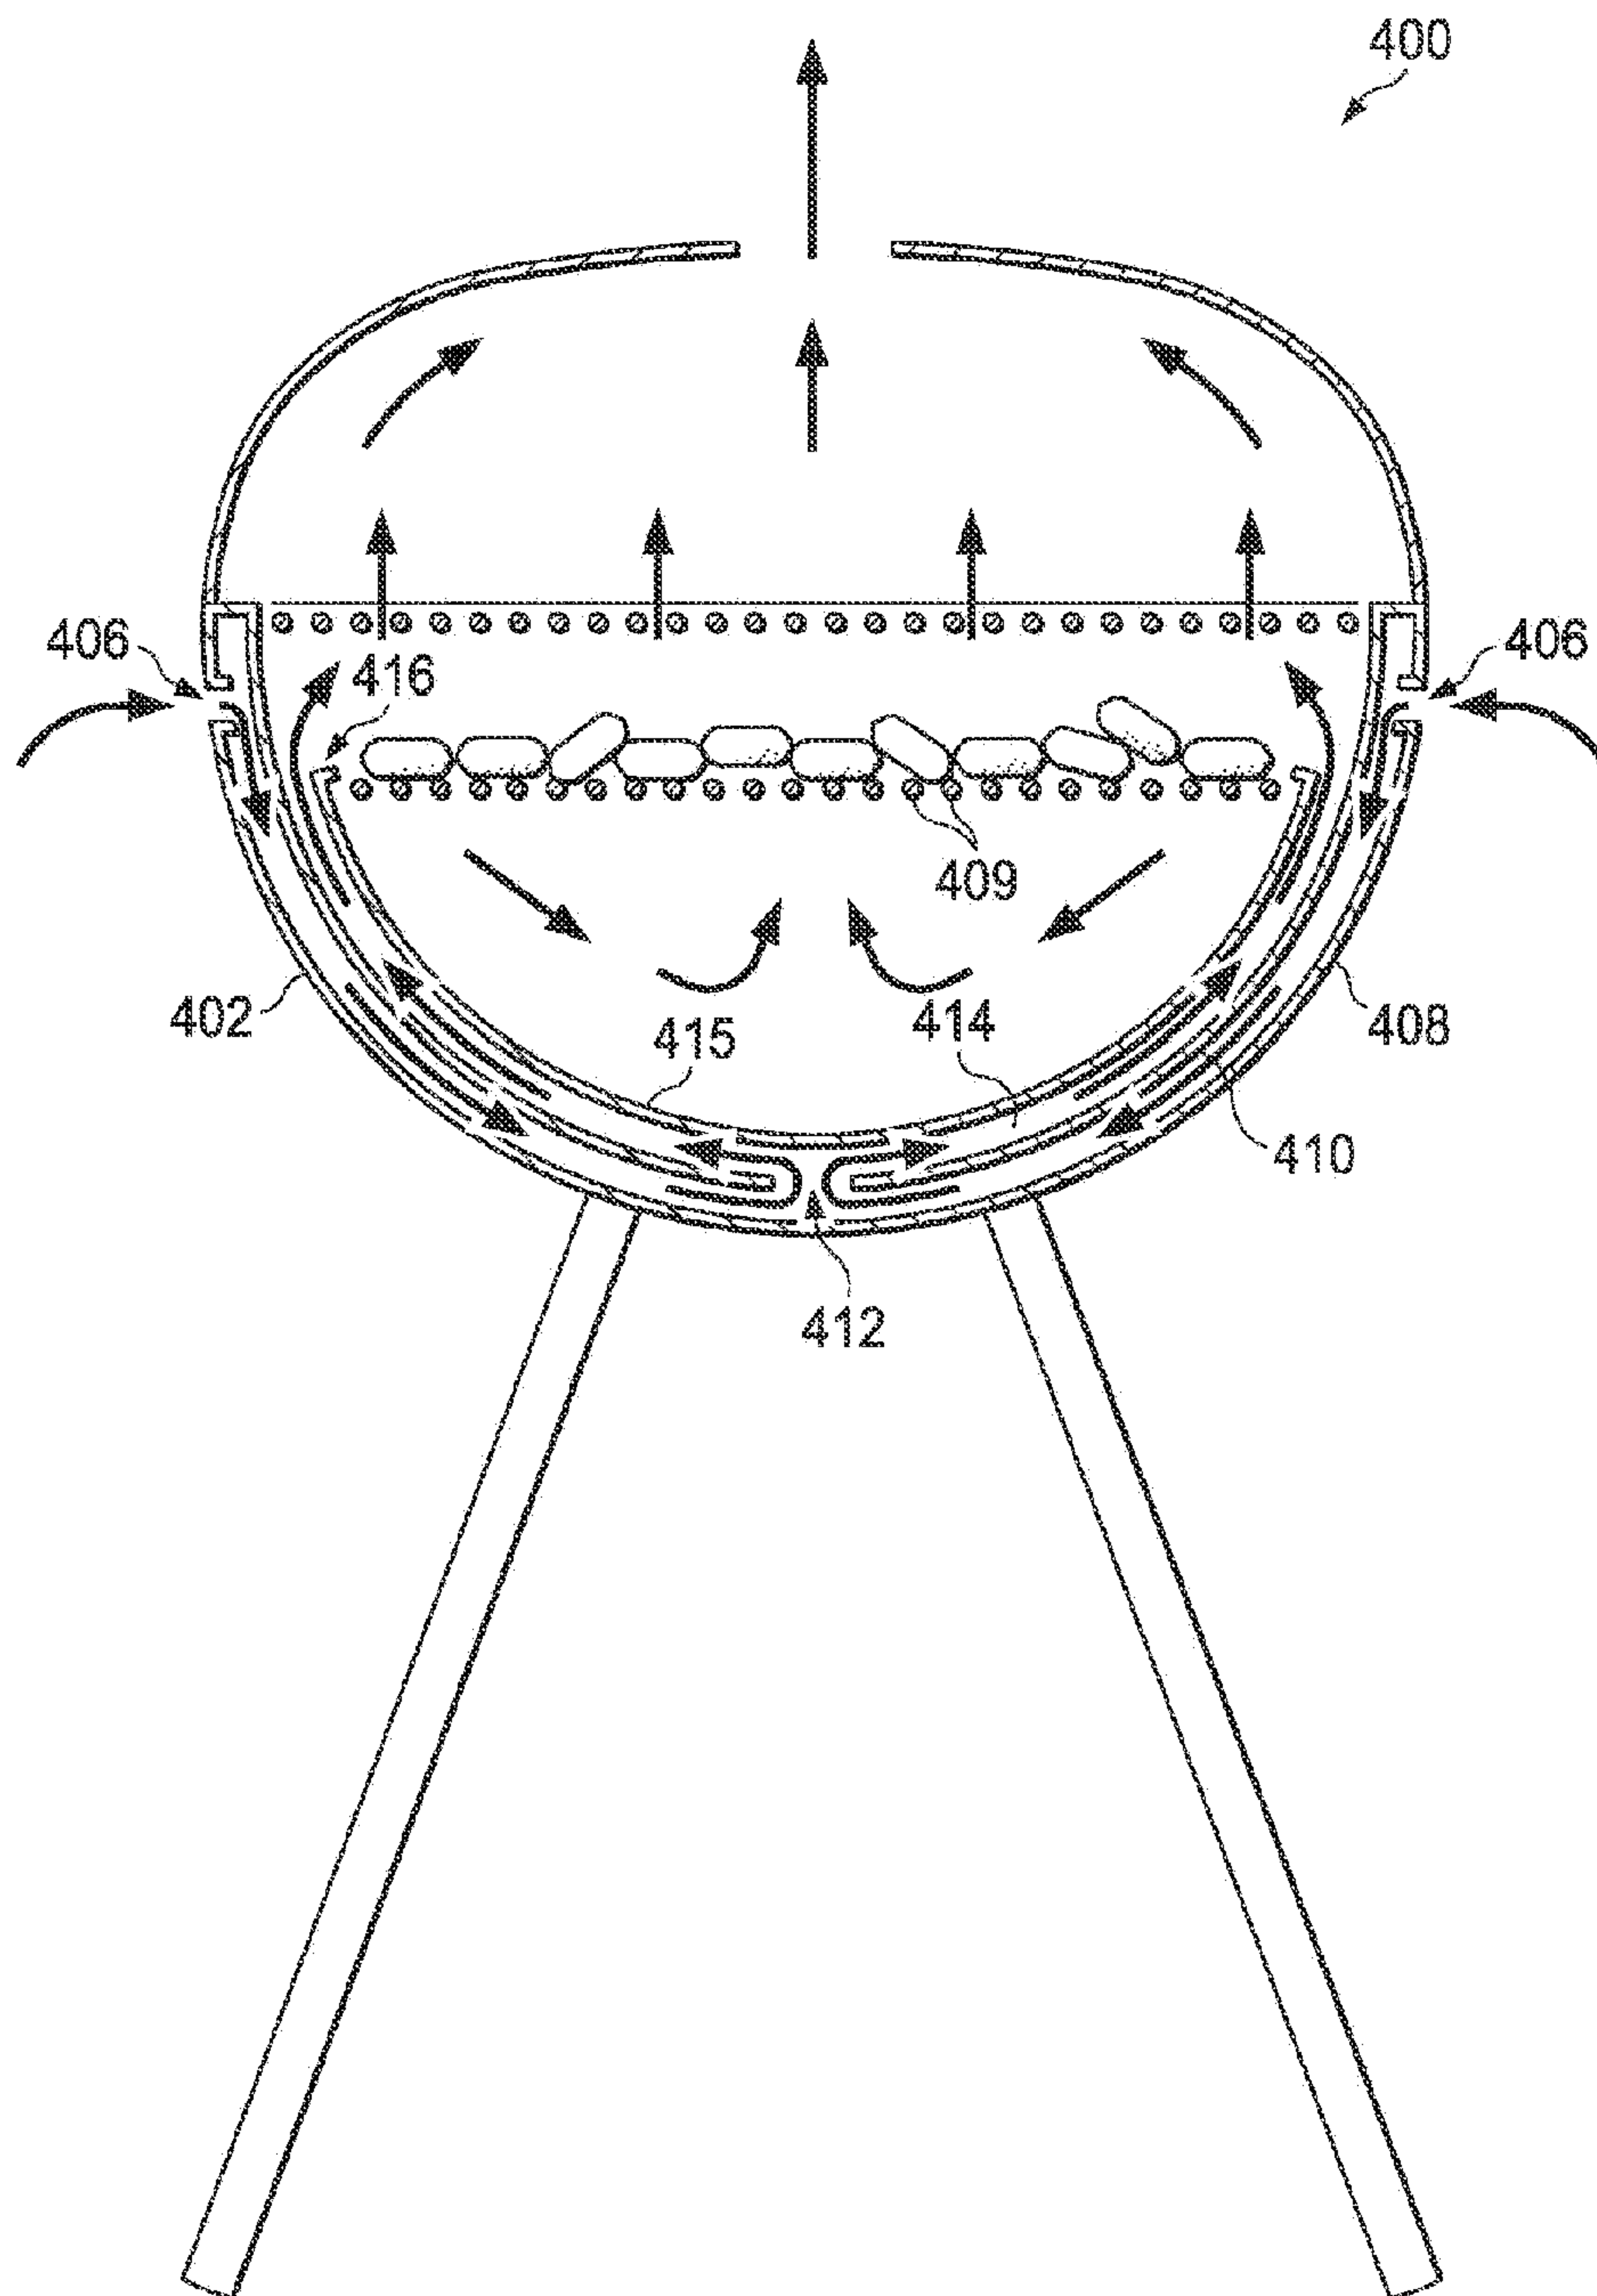


FIG. 8

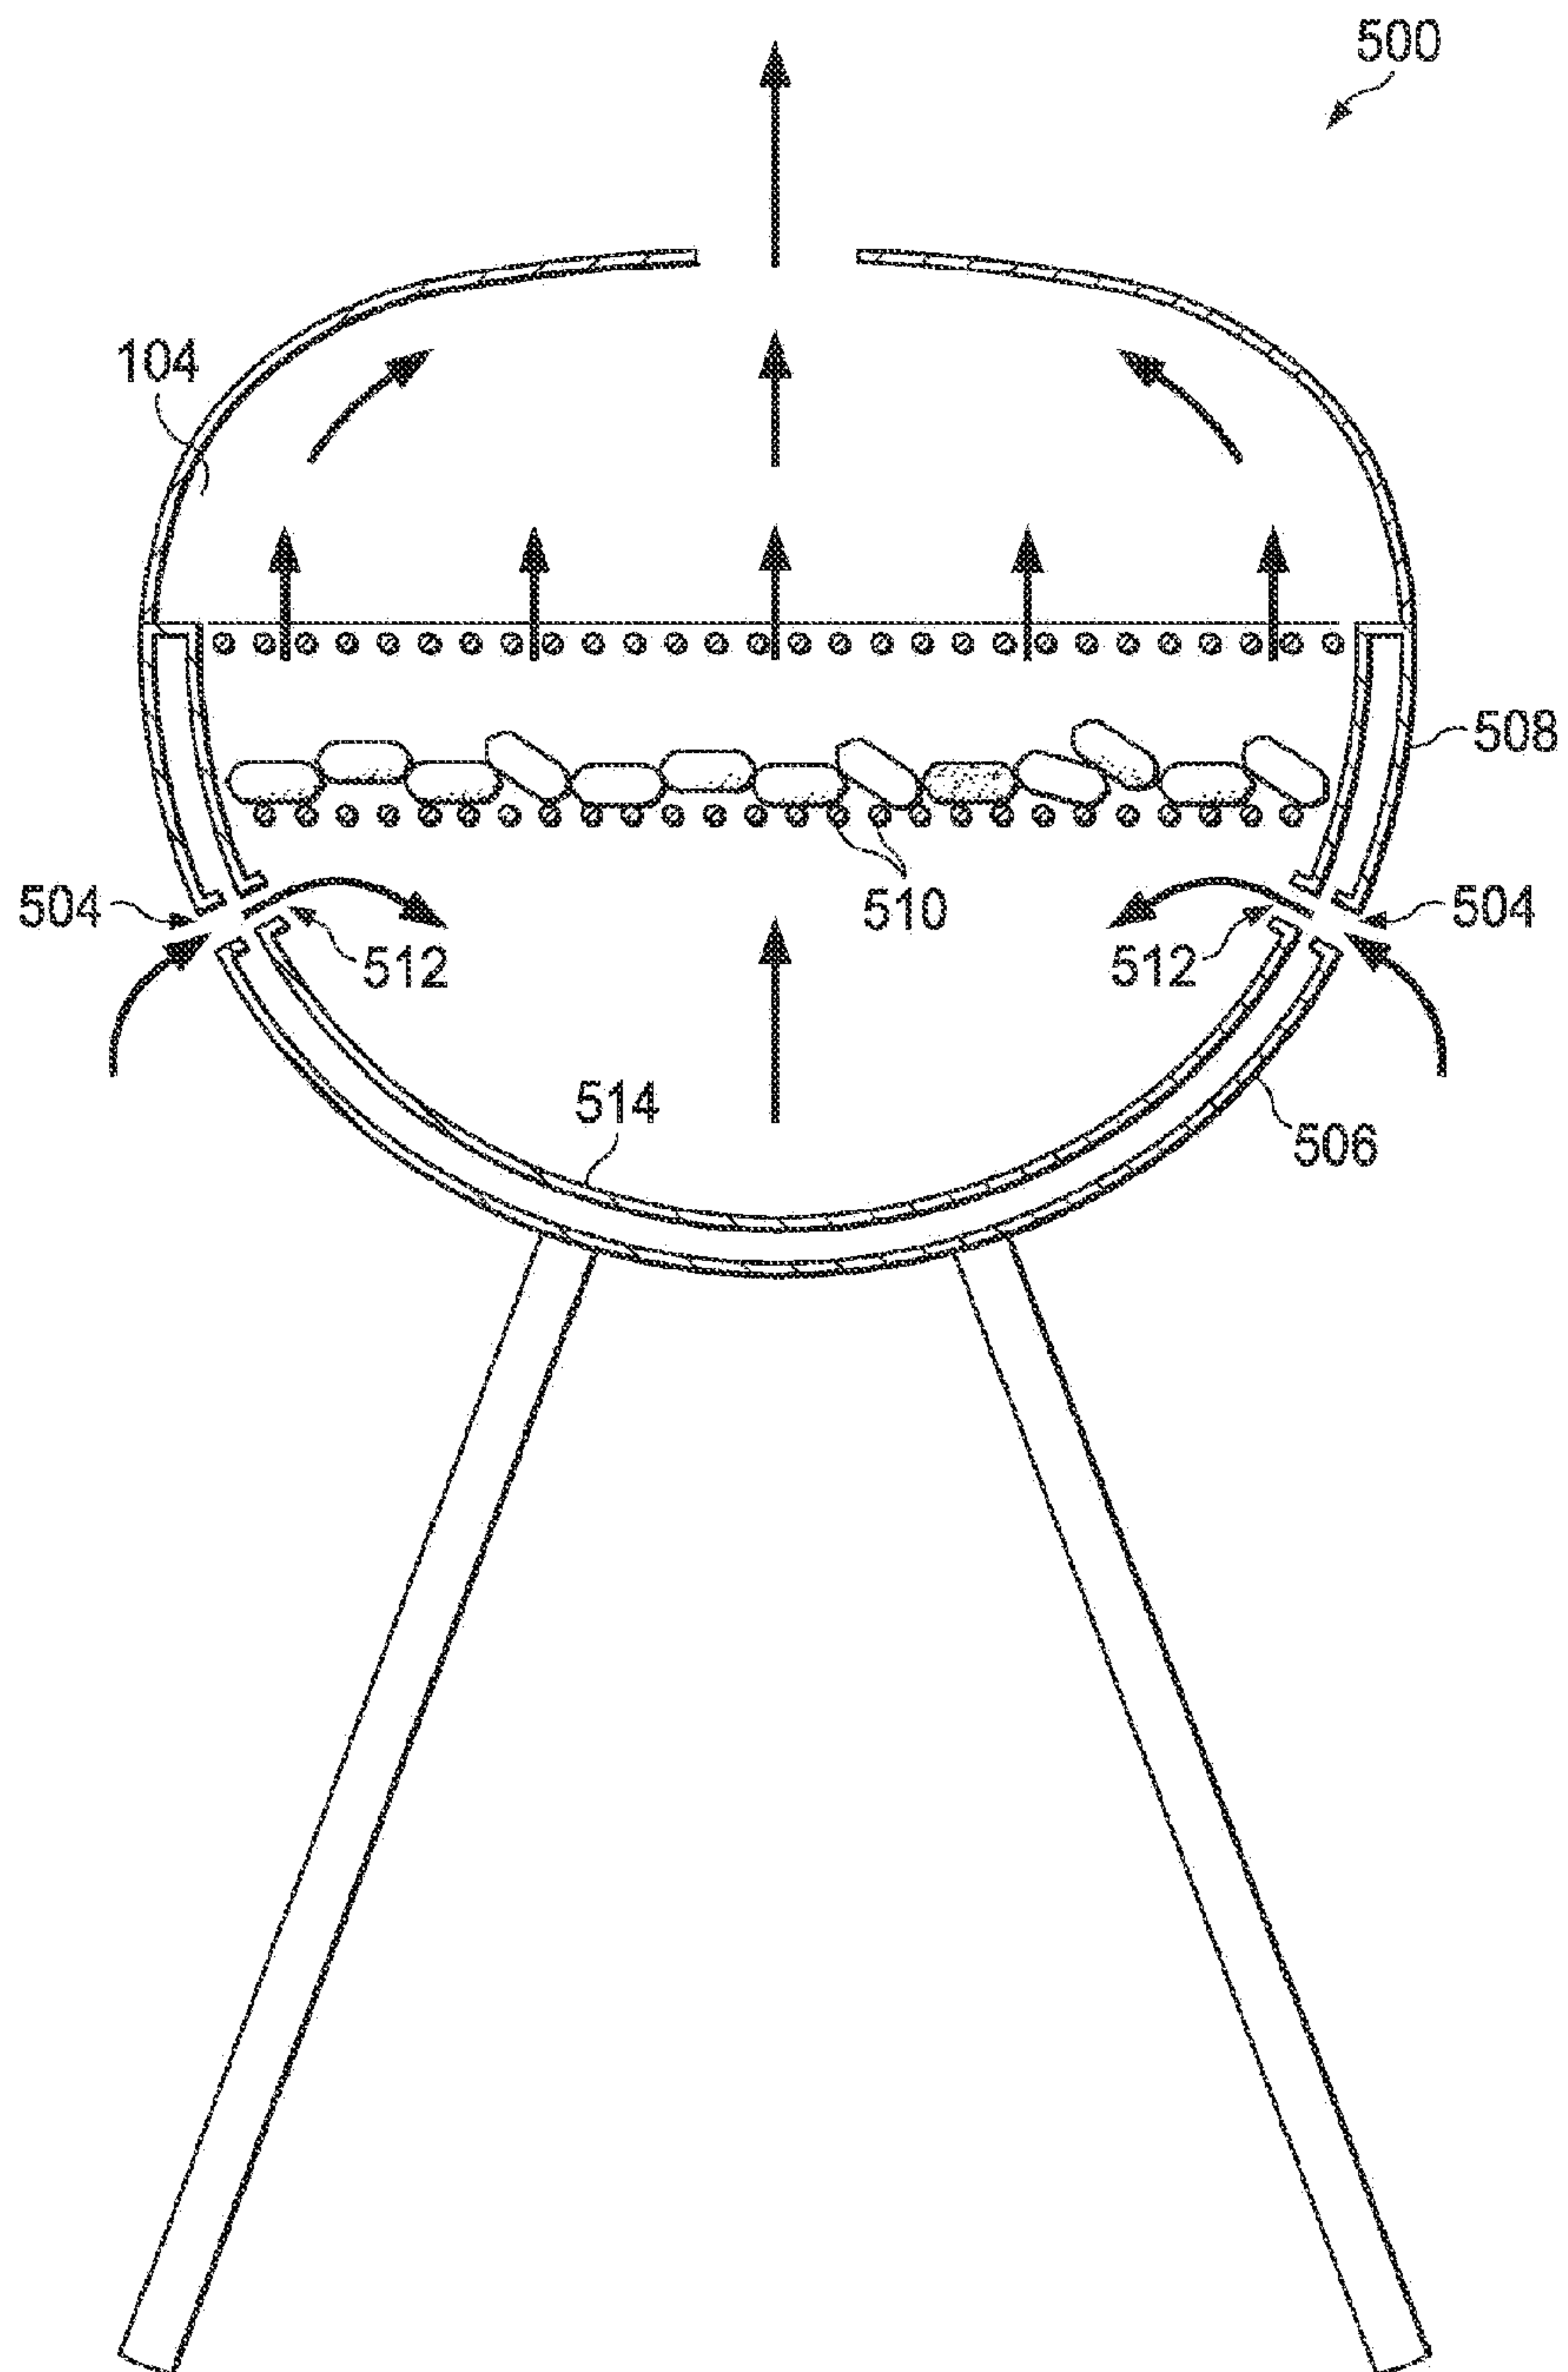


FIG. 9

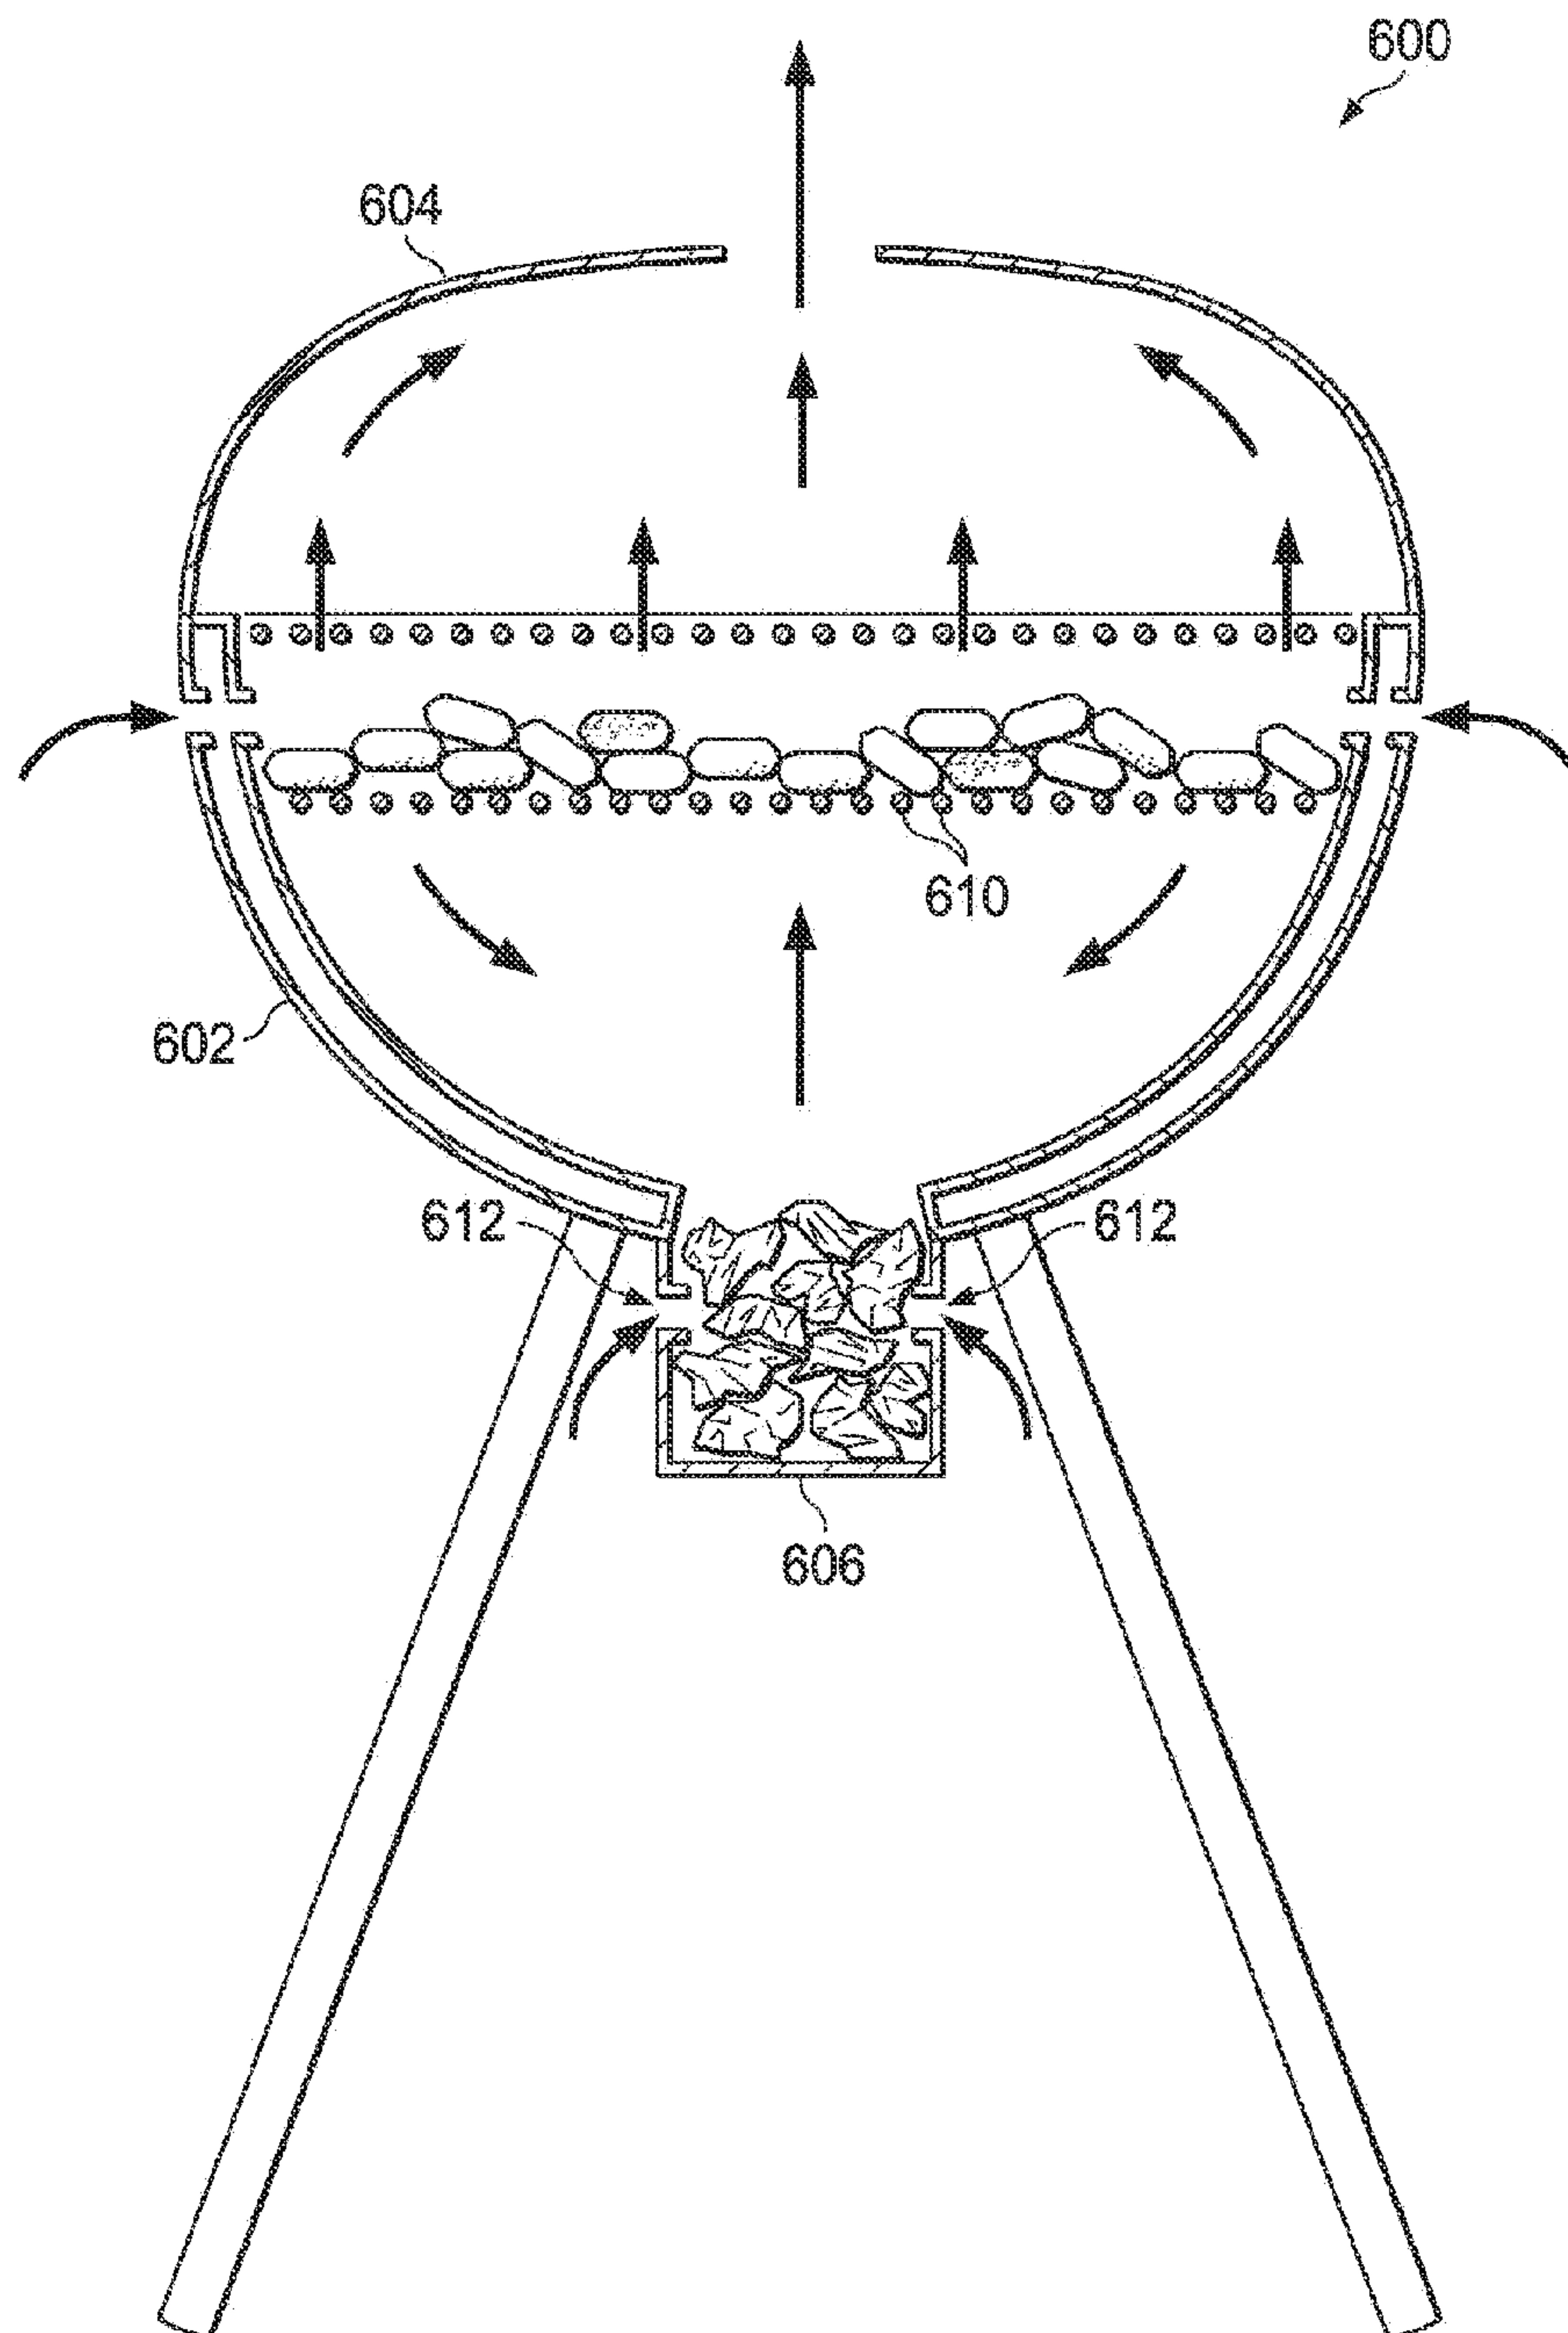


FIG. 10