

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2012378606 B2**

(54) Title
Black-plated steel sheet

(51) International Patent Classification(s)
C23C 2/06 (2006.01) **C23C 22/36** (2006.01)
B32B 15/095 (2006.01) **C23C 22/40** (2006.01)
C22C 18/04 (2006.01) **C23C 22/42** (2006.01)
C23C 8/16 (2006.01) **C23C 22/44** (2006.01)
C23C 22/08 (2006.01) **C23C 28/00** (2006.01)
C23C 22/34 (2006.01)

(21) Application No: **2012378606** (22) Date of Filing: **2012.06.29**

(87) WIPO No: **WO13/160973**

(30) Priority Data

(31) Number	(32) Date	(33) Country
2012-134807	2012.06.14	JP
2012-100437	2012.04.25	JP

(43) Publication Date: **2013.10.31**

(44) Accepted Journal Date: **2016.07.07**

(71) Applicant(s)
Nisshin Steel Co., Ltd.

(72) Inventor(s)
Nakano, Tadashi; Yamamoto, Masaya; Taketsu, Hirofumi

(74) Agent / Attorney
Cullens Pty Ltd, Level 32 239 George Street, Brisbane, QLD, 4000

(56) Related Art
JP 2008-261024
JP 2001-279414
JP 2004-256838

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2013年10月31日(31.10.2013)



(10) 国際公開番号
WO 2013/160973 A1

- (51) 国際特許分類:
C23C 2/06 (2006.01) C23C 22/36 (2006.01)
B32B 15/095 (2006.01) C23C 22/40 (2006.01)
C22C 18/04 (2006.01) C23C 22/42 (2006.01)
C23C 8/16 (2006.01) C23C 22/44 (2006.01)
C23C 22/08 (2006.01) C23C 28/00 (2006.01)
C23C 22/34 (2006.01)
- (21) 国際出願番号: PCT/JP2012/004254
- (22) 国際出願日: 2012年6月29日(29.06.2012)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2012-100437 2012年4月25日(25.04.2012) JP
特願 2012-134807 2012年6月14日(14.06.2012) JP
- (71) 出願人(米国を除く全ての指定国について): 日新製鋼株式会社(NISSHIN STEEL CO., LTD.) [JP/JP]; 〒1008366 東京都千代田区丸の内三丁目4番1号 Tokyo (JP).
- (72) 発明者; および
- (75) 発明者/出願人(米国についてのみ): 中野 忠 (NAKANO, Tadashi), 山本 雅也 (YAMAMOTO, Masaya), 武津 博文(TAKETSU, Hirofumi).
- (74) 代理人: 鷲田 公一 (WASHIDA, Kimihito); 〒1600023 東京都新宿区西新宿1-23-7 新宿ファーストウエスト8階 Tokyo (JP).
- (81) 指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国(表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

添付公開書類:
— 国際調査報告 (条約第 21 条(3))

(54) Title: BLACK-PLATED STEEL SHEET

(54) 発明の名称: 黒色めっき鋼板

[図1]

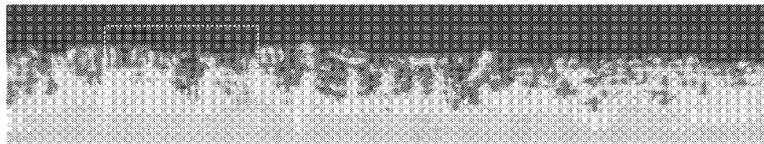



図1A



図1B

(57) Abstract: A black-plated steel sheet has a Zn-plating layer containing molten Al and Mg, containing Al in the amount of 1.0-22.0 mass%, containing Mg in the amount of 1.3-10.0 mass%, and having a Zn black oxide distributed in a lamella pattern in the plating layer. The Zn black oxide is a Zn oxide derived from a Zn₂Mg phase. The brightness of the surface of the Zn-plating layer containing the molten Al and Mg has an L* value of 60 or less.

(57) 要約: 黒色めっき鋼板は、Al: 1.0~22.0質量%、Mg: 1.3~10.0質量%を含み、かつZnの黒色酸化物がめっき層中にラメラ状に分布している溶融Al、Mg含有Znめっき層を有する。Znの黒色酸化物は、Zn₂Mg相に由来するZnの酸化物である。溶融Al、Mg含有Znめっき層表面の明度は、L*値で60以下である。



WO 2013/160973 A1

DESCRIPTION

Title of Invention

BLACK-PLATED STEEL SHEET

5 Technical Field

[0001] The present invention relates to a black-plated steel sheet.

Background Art

[0002] In the field such as roofing materials and exterior materials of a building, home
10 appliances and automobiles, the needs for steel sheets having a black appearance is
increasing from the viewpoints of design and so on. The surface of a steel sheet may be
blackened by applying a black coating material to the surface of a steel sheet so as to form
a black coating film. In the field described above, however, steel sheets with plating such
as hot-dip Zn-plating, hot-dip Al-containing Zn-plating, and hot-dip Al and Mg-containing
15 Zn-plating are used in many cases from the viewpoint of corrosion resistance. The plated
steel sheet has a metallic gloss surface with silver gray color. Accordingly, in order to
obtain a black appearance of quality design by application of a black coating material, a
thick coating film is required to conceal the color of the plated steel sheet, resulting in high
coating costs. Furthermore, the thick coating film precludes resistance welding such as
20 spot welding, which is another disadvantage.

[0003] As a method for concealing the metallic gloss with silver gray color of a plated
steel sheet without formation of a black coating film, a method for blackening a plating
layer itself has been proposed (e.g. refer to PTL 1). PTL 1 discloses a method for forming
a thin black layer at the plating layer surface by blowing high-temperature water vapor
25 onto a hot-dip Al-containing Zn-plated steel sheet for 24 hours or more. The black-plated
steel sheet according to PTL 1 has a plating layer which contains elements for accelerating

blackening such as Mg, Cu and Bi. According to the description, however, with a content of elements for accelerating blackening more than 1%, the effect for accelerating blackening rather decreases due to suppression of the oxidation of Zn.

5 Citation List

Patent Literature

[0004]

PTL 1

Japanese Patent Application Laid-Open No. SHO 64-56881

10

Summary of Invention

Technical Problem

[0005] The black-plated steel sheet according to PTL 1 has a problem that a thick black layer cannot be formed due to reduction in adhesion, since blackening over the total thickness of a plating layer causes embrittlement of the plating layer. Accordingly, the black-plated steel sheet has no endurance for powerful processing, since scratches to be formed on the plating layer surface by processing spoils the surface appearance due to the exposure of the silver gray color of the plating layer itself. Further, the black-plated steel sheet according to PTL 1 requires a long time for blackening treatment, which is another problem.

[0006] An object of the present invention is to provide a black-plated steel sheet which has excellent retention of the black appearance after processing and can be produced by blackening treatment in a short time.

25 Solution to Problem

[0007] The present inventors have found that the problem can be solved by contacting an

original plate of hot-dip Al and Mg-containing Zn-plated steel including 1.0 to 22.0mass% of Al and 1.3 to 10.0mass% of Mg, including Zn_2Mg phases distributed in a plating layer, with water vapor in a closed vessel, and have made further investigations to complete the present invention.

5 [0008] More specifically, the present invention relates to the following black-plated steel sheet:

[1] A black-plated steel sheet including a hot-dip Al and Mg-containing Zn-plated layer which contains 1.0 to 22.0mass% of Al and 1.3 to 10.0mass% of Mg, with a black oxide of Zn distributed in the plating layer, the hot-dip Al and Mg-containing Zn-plated
10 layer having a surface lightness represented by L^* value of 60 or less.

[2] The black-plated steel sheet according to [1], wherein the black oxide of Zn is distributed in a lamellar form in the hot-dip Al and Mg-containing Zn-plated layer.

[3] The black-plated steel sheet according to [1] or [2], wherein the black oxide of Zn is an oxide of Zn derived from a Zn_2Mg phase.

15 [4] The black-plated steel sheet according to any one of [1] to [3], further including an inorganic coating film on the hot-dip Al and Mg-containing Zn-plated layer.

[5] The black-plated steel sheet according to [4], wherein the inorganic coating film includes one or more compounds selected from the group consisting of an oxide of valve metal, an oxoate of valve metal, a hydroxide of valve metal, a phosphate of valve metal,
20 and a fluoride of valve metal.

[6] The black-plated steel sheet according to [5], wherein the valve metal is one or more metals selected from the group consisting of Ti, Zr, Hf, V, Nb, Ta, W, Si and Al.

[7] The black-plated steel sheet according to any one of [1] to [3], further including an organic resin coating film on the hot-dip Al and Mg-containing Zn-plated layer.

25 [8] The black-plated steel sheet according to [7], wherein an organic resin comprised in the organic resin coating film is urethane-based resin obtained by the reaction of polyols

consisting of an ether-based polyol and an ester-based polyol with polyisocyanate, a proportion of the ether-based polyol in the polyols being 5 to 30mass%.

[9] The black-plated steel sheet according to [8], wherein the organic resin coating film further includes a polyvalent phenol.

5 [10] The black-plated steel sheet according to any one of [7] to [9], wherein the organic resin coating film includes a lubricant.

[11] The black-plated steel sheet according to any one of [7] to [10], wherein the organic resin coating film includes one or more compounds selected from the group consisting of an oxide of valve metal, an oxoate of valve metal, a hydroxide of valve metal,
10 a phosphate of valve metal, and a fluoride of valve metal.

[12] The black-plated steel sheet according to [11], wherein the valve metal is one or more metals selected from the group consisting of Ti, Zr, Hf, V, Nb, Ta, W, Si and Al.

[13] The black-plated steel sheet according to any one of [7] to [12], wherein the organic resin coating film is a laminate layer or a coating layer.

15 [14] The black-plated steel sheet according to any one of [7] to [13], wherein the organic resin coating film is a clear coating film.

Advantageous Effects of Invention

[0009] According to the present invention, a black-plated steel sheet which has
20 black-color appearance with quality design and excellent retention of the black appearance after processing can be produced by blackening treatment in a short time. The produced black-plated steel sheet of the present invention is excellent in design, retention of the appearance, press formability and corrosion resistance, being applicable as a plated steel sheet for, for example, roofing materials and exterior materials of a building, home
25 appliances, and automobiles.

Brief Description of Drawings

[0010]

FIG. 1A is an optical microscopic image of the cross section of plating layer of a hot-dip Al and Mg-containing Zn-plated steel sheet after water vapor treatment;

5 FIG. 1B is a scanning electron microscopic image of a cross section in the same view field as in FIG. 1A;

FIG. 2A is an optical microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B;

10 FIG. 2B is a scanning electron microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B;

FIG. 2C is a schematic diagram illustrating a microstructure of the region indicated in FIG. 2A and FIG. 2B;

FIG. 3 illustrates element distribution images in the plating layer of a hot-dip Al and Mg-containing Zn-plated steel sheet before and after water vapor treatment;

15 FIG. 4A is an electron spin resonance (ESR) spectrum for a powder sample prepared from the surface of a Zn₂Mg plate before water vapor treatment;

FIG. 4B is an electron spin resonance (ESR) spectrum for a powder sample prepared from the surface of a Zn₂Mg plate after water vapor treatment for blackening;

20 FIG. 5 is a graph illustrating XPS analysis results of the plating layer of a hot-dip Al and Mg-containing Zn-plated steel sheet before and after water vapor treatment;

FIG. 6A is a photograph illustrating the surface of a hot-dip Al and Mg-containing Zn-plated steel sheet after water vapor treatment in an open system; and

FIG. 6B is a photograph illustrating the surface of a hot-dip Al and Mg-containing Zn-plated steel sheet after water vapor treatment in a closed system.

25

Description of Embodiments

[0011] 1. Black-plated steel sheet

The black-plated steel sheet of the present invention includes a steel substrate and a hot-dip Al and Mg-containing Zn-plating layer (hereinafter also referred to as "plating layer"). The black-plated steel sheet of the present invention may further include an inorganic coating film or an organic resin coating film on the plating layer.

[0012] The black plated steel sheet of the present invention has a feature including: 1) a black oxide of Zn being distributed in the plating layer; and 2) the plating layer surface having a lightness L^* value of 60 or less (preferably 40 or less, more preferably 35 or less). The lightness (L^* value) of a plating layer surface is measured by spectral reflectance with a spectroscopic color difference meter, in accordance with JIS K 5600.

[0013] [Steel substrate]

The type of the steel substrate is not specifically limited. Examples of the steel substrate for use include a steel sheet of low-carbon steel, medium-carbon steel, high-carbon steel, or alloy steel. When the steel substrate is required to have good press formability, use of a steel sheet for deep drawing made of, for example, Ti-added low-carbon steel or Nb-added low-carbon steel is preferred. Alternatively, a high-strength steel sheet with the addition of P, Si and Mn etc. may be used.

[0014] [Hot-dip Al and Mg-containing Zn-plating layer]

As the original plate for the black-plated steel sheet of the present invention, a hot-dip Al and Mg-containing Zn-plated steel sheet is used, including a hot-dip Al and Mg-containing Zn-plated layer which contains 1.0 to 22.0mass% of Al and 1.3 to 10.0mass% of Mg, with Zn_2Mg phases distributed in the plating layer. More preferably, a hot-dip Al and Mg-containing Zn-plated steel sheet is used, including a hot-dip Al and Mg-containing Zn-plating layer which further contains a single phase of Al as the microstructure of the plating layer. The term "single phase of Al" means an Al phase having no eutectic structure such as Al" phase with Zn in solid solution state. The single

phase of Al is, for example, a primary Al". Al and Mg, i.e. elements for improving the corrosion resistance of a Zn-based plated steel sheet, are essential elements for blackening of the present invention as described in the following. With an Mg content or an Al content less than the lower limit in the range, sufficient corrosion resistance cannot be obtained. In contrast, with a content more than the upper limit, a beautiful plated steel sheet cannot be obtained due to excessive generation of oxides (dross) on a plating bath surface during production of the plated steel sheet.

[0015] The hot-dip Al and Mg-containing Zn-plating layer having the composition described above includes a ternary eutectic structure of Al/Zn/Zn₂Mg. When the cross section of a plating layer is observed, for example, as in FIGS. 2A to 2C, the proportion of the ternary eutectic structure of Al/Zn/Zn₂Mg in the entire cross section, however is different depending on a plating composition. In the ternary system of Zn-Al-Mg, the eutectic composition includes about 4mass% of Al and about 3mass% of Mg. In the case of a plating composition close to the eutectic composition, the ternary eutectic structure of Al/Zn/Zn₂Mg accordingly is a phase having the largest area in the plating cross section, having an area ratio of about 80%. The area ratio, however, decreases as the composition deviates from the eutectic composition, so that a phase other than the ternary eutectic structure of Al/Zn/Zn₂Mg may have the largest area ratio in some cases. Depending on a plating composition, the hot-dip Al and Mg-containing Zn-plating layer further includes a primary Al". The cross sectional schematic view of a plating layer having a plating composition with an Al concentration of 6.0mass%, an Mg concentration of 3.0mass%, and a balance of Zn is illustrated, for example, in Figure 2C. In the plating layer, the ternary eutectic structure of Al/Zn/Zn₂Mg (denoted as "Zn phase" and "Zn₂Mg phase (including fine Al phase and Zn phase) in the drawing) and the primary crystal structure of Al (denoted as "primary Al" in the drawing) are mixed. The primary Al" can be clearly discriminated from the Al phase of the ternary eutectic in microscopic observation.

Depending on a plating composition, the primary crystal of a plating layer may be formed of a Zn phase, a Zn_2Mg phase, or an Mg_2Si phase, instead of the Al phase.

[0016] In FIG. 2C, each of the phases (an Al phase, a Zn phase and a Zn_2Mg phase) of the ternary eutectic structure of Al/Zn/ Zn_2Mg is of irregular size and shape, having a lamellar structure. The lamellar structure means a state having phases alternately arranged to form the eutectic structure, respectively.

[0017] The Al phase in the ternary eutectic structure is derived from an Al" phase (an Al solid solution with dissolved Zn, containing a small amount of Mg) at high temperature in a ternary equilibrium phase diagram of Al-Zn-Mg. The Al" phase at high temperature

usually forms into fine Al phases and fine Zn phases, which are separated from each other, at normal temperature. The fine Al phases and the fine Zn phases are dispersed in a Zn_2Mg phase (In FIG. 2C, the fine Al phases and the fine Zn phases dispersed in a Zn_2Mg phase are not shown in the drawing). The Zn phase in the ternary eutectic structure is a

Zn solid solution which dissolves a small amount of Al and further dissolves Mg in some cases. The Zn_2Mg phase in the ternary eutectic structure is an intermetallic compound phase existing in the vicinity of a point corresponding to about 84wt% Zn in the binary equilibrium phase diagram of Zn-Mg system. As shown in FIG. 2C, the Zn_2Mg phases are distributed in a lamellar form over the entire plating layer. Although the Zn_2Mg phase

distributed in the plating layer of the hot-dip Al and Mg-containing Zn-plated steel sheet,

i.e. the black-plated steel sheet of the present invention, has been so far described for the case of a phase to form a ternary eutectic structure of Al/Zn/ Zn_2Mg , the phase may emerge

to form a binary eutectic structure of Al/ Zn_2Mg or a binary eutectic structure of Zn/ Zn_2Mg in the plating layer of the present invention in some cases. Even in the case of a Zn_2Mg phase derived from these, the present invention can achieve the effect as long as the Zn_2Mg phase forms a eutectic structure. Depending on the cooling conditions and the plating composition of a plating layer, a $Zn_{11}Mg_2$ phase may exist in a plating layer in some cases.

The presence of the $Zn_{11}Mg_2$ phase in the plating layer of the hot-dip Al and Mg-containing Zn-plated steel sheet, i.e. the original plate of the black-plated steel sheet of the present invention, causes no problem. The present invention can achieve the advantageous effect, even in the case, for example, that a portion of the ternary eutectic structure of Al/Zn/ Zn_2Mg is the ternary eutectic structure of Al/Zn/ $Zn_{11}Mg_2$.

[0018] In the present specification, oxides and hydrated oxides are collectively referred to as an oxide. In the present specification, the content of each component in a plating layer is represented by percentage of the mass of each metal component contained in the plating layer divided by the mass of total metals contained in the plating layer.

Accordingly, the mass of oxygen and water contained in oxides is not included in the components in a plating layer. When no elution of metal components occurs during water vapor treatment, the content of each component in the plating layer is, therefore, kept constant before and after water vapor treatment.

[0019] The hot-dip Al and Mg-containing Zn-plating layer for use may include, for example, 1.0 to 22.0mass% Al, 1.3 to 10.0mass% Mg, and the balance of Zn and unavoidable impurities. In order to improve the adhesion between the steel substrate and the plating layer, Si which can suppress the growth of Al-Fe alloy layer at the interface between the steel substrate and the plating layer, can be added to the plating layer in the range of 0.005mass% to 2.0mass%. An Si concentration more than 2.0mass% may cause

generation of Si-based oxides to block blackening on the plating layer surface. Ti, B, a Ti-B alloy, a Ti-containing compound or a B-containing compound may be added to the plating layer. The amount of the compounds to be added is preferably set such that Ti content is 0.001mass% to 0.1mass% and B content is 0.0005mass% to 0.045mass%. An excessive amount of addition of Ti or B may cause the growth of precipitates on the plating

layer. Incidentally, the addition of Ti, B, a Ti-B alloy, a Ti-containing compound or a B-containing compound into a plating layer hardly affects the blackening by water vapor

treatment.

[0020] The thickness of a plating layer is not specifically limited, preferably in the range of 3 to 100 μm . With a thickness of a plating layer less than 3 μm , scratches easily reach the steel substrate during handling, which may lower the black appearance retention and corrosion resistance. In contrast, with a thickness of a plating layer more than 100 μm , the plating layer may detach from the steel substrate at a processed part due to the difference in ductility between the plating layer and the steel substrate under compression.

[0021] [Black oxides]

The black-plated steel sheet of the present invention contains black oxides of Zn distributed in a plating layer (refer to FIG. 1A, FIG. 2A, and FIG. 3). The term "in a plating layer" includes both at the plating layer surface and in the layer interior.

[0022] FIG. 1A is an optical microscopic image showing the cross section of plated layer of the black-plated steel sheet of the present invention. FIG. 1B is a scanning electron microscopic image of the cross section in the same view field as in FIG. 1A. FIG. 2A is an optical microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B. FIG. 2B is a scanning electron microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B. FIG. 2C is a schematic diagram illustrating a microstructure of the region indicated in FIG. 2A and FIG. 2B. In FIG. 2C, for convenience of description, the region of oxidized metal is classified into the same group as before oxidation (a Zn phase, a Zn_2Mg phase, and a primary Al") in the drawing.

[0023] As illustrated in the drawings, the black-plated steel sheet of the present invention includes black oxides of Zn derived from Zn_2Mg phases. The black oxides of Zn are distributed in a lamellar form (Black oxides of Al derived from a primary Al" are to be described in the following). The mechanism for the generation of black oxides of Zn can be assumed as follows.

[0024] The hot-dip Al and Mg-containing Zn-plated steel sheet is contacted with water

vapor in a closed vessel, so that the oxide layer at the plating layer surface first reacts with H_2O to form into hydrated oxide, while H_2O passed through the oxide layer reacts with metal in the plating layer. On this occasion, Zn contained in the Zn_2Mg phase to constitute the ternary eutectic structure is preferentially oxidized. At time advances, oxidation of Zn contained in the Zn_2Mg phase proceeds in the depth direction of the plating layer. Under water vapor atmosphere with low oxygen potential, Mg in the vicinity of oxides of Zn, having high reactivity with oxygen, robs oxides of Zn of oxygen so as to form oxides of Mg. It is believed that the oxides of Zn change into oxygen-deficient oxides with a non-stoichiometric composition (e.g. ZnO_{1-x}). In this way, the generation of oxygen-deficient oxide allows light to be trapped in the defect level, so that the oxide has a black appearance. The black plated steel sheet of the present invention, therefore, allows for acceleration of blackening as the Mg content in a plating layer increases, which is different from the black-plated steel sheet of PTL 1. On the other hand, the oxidation reaction of Zn contained in a Zn phase proceeds slowly, so that the most part of Zn remains as metal. As a result, the plating layer of a black-plated steel sheet obtained by the present invention includes a microstructure of black oxides of Zn derived from Zn_2Mg phases. The black oxides of Zn are distributed in a lamellar form. Depending on a plating composition and cooling conditions of the plating layer, $Zn_{11}Mg_2$ phases may also exist in the plating layer in some cases. In this case, Zn contained in the $Zn_{11}Mg_2$ phase is also oxidized, and Mg existing in the circumference is robbed of oxygen, so as to form oxygen-deficient oxides of Zn having a black color.

[0025] In the case of a plating layer having primary Al crystals, the black oxides of Zn develop in the interior of the plating layer in a shorter time. Al has higher reactivity with H_2O compared with Zn and Mg. As a result, metal Al coming into contact with water vapor at high temperature rapidly forms into oxides. After Al contained in the primary Al" is rapidly oxidized, oxidation of Zn contained in the Zn_2Mg phase located thereunder

proceeds in the depth direction of a plating layer. The Al single phase such as primary Al" thus functions as a "passage" for accelerating the oxidation of Al in the interior of a plating layer. As a result, the presence of an Al single phase such as primary Al" in a plating layer allows for formation of black oxides of Zn in the plating layer for a shorter
5 time. It is presumed that Al in a ternary eutectic also functions as a "passage" for accelerating the oxidation of Zn. With reference to FIG. 2A, it is shown that the depth where the black oxides of Zn exist is different between a region having the primary Al" and a region having no primary Al". As also shown in FIG. 2A, the primary Al" has blackened appearance, since Zn dissolved in solid solution state in the primary Al" is
10 oxidized and the oxidized Zn allows oxygen to be robbed of by Al in the circumference so as to form ZnO_{1-x} .

[0026] In the black-plated steel sheet described in PTL 1, the surface of a plating layer only is blackened due to generation of needle crystals of ZnO_{1-x} . In contrast, in the black-plated steel sheet of the present invention, a layer of black oxides is formed on a
15 plating layer surface and black oxides of Zn are distributed in the interior of a plating layer, based on the reaction mechanism described above. Consequently, the black-plated steel sheet of the present invention can maintain the black appearance even when the plating layer is scratched in processing. The blackened oxides in the interior of the plating layer can be confirmed by optical microscopic observation of the cross section of a plating layer
20 (refer to FIG. 1A and FIG. 2A), or by amalgamating metals Zn, Al and Mg in a plating layer with saturated $HgCl_2$ solution for removal and collecting oxides only. The interior of black oxides in a plated layer may be blackened, or alternatively the surface only may be blackened.

[0027] FIG. 4A is an electron spin resonance (ESR) spectrum for a powder sample
25 prepared from the surface of a Zn_2Mg plate before water vapor treatment. FIG. 4B is an electron spin resonance (ESR) spectrum for a powder sample prepared from the surface of

a Zn₂Mg plate after water vapor treatment. The Zn₂Mg plate after water vapor treatment has a black appearance.

[0028] With reference to FIG. 4A, no ESR spectrum is observed from Zn₂Mg. In contrast, with reference to FIG. 4B, six large peaks are observed. From the positions of the peaks, it is found out that Zn₂Mg after water vapor treatment has unpaired electrons with a nuclear spin of 5/2. The presence of unpaired electrons with a nuclear spin of 5/2 means the presence of crystal structure with defects. From the results shown in FIG. 4B, it is found out that the Zn₂Mg plate having a black appearance after water vapor treatment includes oxygen-deficient oxides. It is also suggested that water vapor treatment of a Zn₂Mg-containing plating layer generates blackened oxygen-deficient oxides of Zn as in the present invention.

[0029] FIG. 5 is a graph illustrating X-ray photoelectron spectroscopy (XPS) analysis results of the plating layer of a hot-dip Al and Mg-containing Zn-plated steel sheet before and after water vapor treatment. The cross sections of a plating layer before and after water vapor treatment were exposed by oblique cutting for the inspection of the bonding state of Zn, Al and Mg in a region with a diameter of 10 μm approximately at the center of the plating layer. As a result, it was confirmed that oxides (oxides and hydrated oxides) of the respective elements were generated by water vapor treatment as shown in FIG. 5.

[0030] [Inorganic coating film and organic resin coating film]

The surface of plating layer of the black-plated steel sheet of the present invention may be applied with an inorganic coating film or an organic resin coating film. The inorganic coating film and the organic resin coating film improve the corrosion resistance and the galling resistance (retention of black appearance) of a black-plated steel sheet.

[0031] (Inorganic coating film)

The inorganic coating film preferably includes one or more compounds (hereinafter referred to as "valve metal compound") selected from the group consisting of an oxide of

valve metal, an oxoate of valve metal, a hydroxide of valve metal, a phosphate of valve metal, and a fluoride of valve metal. Inclusion of a valve metal compound reduces an environmental load and imparts an excellent barrier function. The valve metal means a metal the oxide of which exhibits high insulation resistance. Examples of the valve metal include one or more metals selected from the group consisting of Ti, Zr, Hf, V, Nb, Ta, W, Si, and Al. A known compound may be used as the valve metal compound.

[0032] Inclusion of a soluble fluoride of valve metal in an inorganic coating film can impart a self-repairing function. The fluoride of valve metal dissolved in moisture in atmosphere forms oxides or hydroxides having poor solubility, reprecipitating on the steel sheet exposed from defect regions in a coating film so as to bury the defect regions. For inclusion of the soluble fluoride of valve metal in an inorganic coating film, a soluble fluoride of valve metal may be added to the inorganic coating material, or a soluble fluoride such as $(\text{NH}_4)\text{F}$ may be added in addition to a valve metal compound.

[0033] The inorganic coating film may further include a soluble or poorly soluble metal phosphate or complex phosphate. The soluble phosphate eluted from the inorganic coating film to defective regions in a coating film reacts with the metal of a plated steel sheet so as to form an insoluble phosphate, complementing the self-repairing function of valve metal imparted by the soluble fluoride. The poorly soluble phosphate is dispersed in the inorganic coating film so as to improve the strength of the coating film. Examples of the metal contained in the soluble metal phosphate or complex phosphate include an alkali metal, an alkali earth metal and Mn. Examples of the poorly soluble metal phosphate or complex phosphate include Al, Ti, Zr, Hf and Zn.

[0034] (Organic resin coating film)

The organic resin for constituting the organic resin coating film may be a urethane-based resin, an epoxy-based resin, an olefin-based resin, a styrene-based resin, a polyester-based resin, an acrylic-based resin, a fluorine-based resin, a combination of these

resins, or a copolymer or a modified product of these resins. The use of these organic resins having flexibility prevents occurrence of cracks during forming of a black-plated steel sheet, improving the corrosion resistance. Further, the valve metal compounds included in the organic resin film can be dispersed in the organic resin film (organic resin
5 matrix), as described in the following.

[0035] Preferably the organic resin coating film includes a lubricant. Inclusion of a lubricant reduces the friction between a mold and the surface of a plated steel sheet during processing such as pressing so that galling of the plated steel sheet can be suppressed (improvement in galling resistance). The type of lubricant is not specifically limited and
10 may be selected from known lubricants. Examples of the lubricants include an organic wax such as a fluorine-based wax, a polyethylene-based wax, and a styrene-based wax, and an inorganic lubricant such as molybdenum disulfide and talc.

[0036] Similarly to an inorganic coating film, the organic resin coating film preferably includes the valve metal compounds described above. Inclusion of a valve metal
15 compound reduces an environmental load and imparts excellent barrier function.

[0037] Similarly to an inorganic coating film, the organic resin coating film may further include a soluble or poorly soluble metal phosphate or complex phosphate. The soluble phosphate eluted from the organic coating film to defective regions in a coating film reacts with the metal of a plated steel sheet so as to form an insoluble phosphate, complementing
20 the self-repairing function of valve metal imparted by the soluble fluoride. The poorly soluble phosphate is dispersed in the organic coating film so as to improve the strength of the coating film.

[0038] The organic resin coating film including a valve metal compound and a phosphate usually allows for formation of an interface reaction layer between a plated steel sheet and
25 the organic resin coating film. The interface reaction layer is a dense layer formed of zinc fluoride, zinc phosphate, and a fluoride of valve metal or a phosphate which are reaction

products of a fluoride or a phosphate contained in an organic coating material with metals contained in the plated steel sheet or a valve metal. The interface reaction layer has excellent environment blocking capability, preventing corrosive components in atmosphere from reaching the plated steel sheet. Meanwhile, the organic resin coating film includes
5 particles of oxide of valve metal, hydroxide of valve metal, fluoride of valve metal and phosphate, which are dispersed in an organic resin matrix. Since the particles of oxides of valve metal are three-dimensionally dispersed in an organic resin matrix, the corrosive components such as moisture passing through the organic resin matrix can be captured. As a result, the organic resin coating film substantially reduces corrosive components
10 reaching the interface reaction layer. Owing to the organic resin coating film and the interface reaction layer, excellent anti-corrosion effect can be achieved.

[0039] The organic resin coating film may be, for example, a urethane-based resin coating film which contains urethane based resin having excellent flexibility. The urethane-based resin for constituting the urethane-based resin coating film may be obtained
15 by reacting polyol with polyisocyanate. In the case of treating with water vapor for blackening after formation of the urethane-based resin coating film, the polyol for use preferably includes a combination of an ether-based polyol (polyol having an ether bond) and an ester-based polyol (polyol having an ester bond) at a predetermined ratio.

[0040] A urethane-based resin coating film formed of ester-based polyol alone as polyol
20 allows ester bonds in the urethane-based resin to be hydrolyzed by water vapor, so that the corrosion resistance cannot be sufficiently improved. On the other hand, a urethane-based resin coating film formed of ether-based polyol alone as polyol has insufficient adhesion to a plated steel sheet, so that the corrosion resistance cannot be sufficiently improved. In contrast, the present inventors found that use of the combination of an ether-based polyol
25 and an ester-based polyol at a predetermined ratio markedly improves the corrosion resistance of a plated steel sheet, with making effective use of the advantages of both an

ether-based polyol and an ester-based polyol, and complementing the disadvantages of each other. The effect of the urethane-based resin coating film for improving the corrosion resistance can be thereby maintained even when treated with water vapor to impart black color (described below) after formation of the urethane-based resin coating
5 film. A black-plated steel sheet which has black color and excellent corrosion resistance can be thus produced.

[0041] The type of the ether-based polyol is not specifically limited, and may be properly selected from known ones. Examples of the ether-based polyol include polyethylene glycol, polypropylene glycol, and a straight chain polyalkylene polyol such as an ethylene
10 oxide or propylene oxide adduct of glycerin.

[0042] The type of the ester-based polyol is also not specifically limited, and may be properly selected from known ones. The ester-based polyol for use may be, for example, a linear polyester having a hydroxyl group in a molecular chain which is obtained by the reaction of dibasic acid with low-molecular weight polyol. Examples of the dibasic acid
15 include adipic acid, azelaic acid, dodecanedioic acid, dimer acid, isophthalic acid, hexahydro phthalic anhydride, terephthalic acid, dimethyl terephthalate, itaconic acid, fumaric acid, maleic anhydride, and esters of each of the acids.

[0043] The proportion of the ether-based polyol in polyol formed of a combination of an ether-based polyol and an ester-based polyol is preferably in the range of 5 to 30mass%.

20 A proportion of the ether-based polyol less than 5mass% results in excessively increased proportion of the ester-based polyol, so that the urethane-based resin coating film is easily hydrolyzed. Consequently the corrosion resistance may not be sufficiently improved. On the other hand, a proportion of the ether-based polyol more than 30mass% results in excessively increased proportion of the ether-based polyol, so that the adhesion to a plated
25 steel sheet is reduced. Consequently the corrosion resistance may not be sufficiently improved.

[0044] The type of polyisocyanate is not specifically limited, and may be properly selected from known ones. The polyisocyanate for use may be, for example, a polyisocyanate compound having an aromatic ring. Examples of the polyisocyanate compounds having an aromatic ring include hexamethylene diisocyanate, o-, m-, or
5 p-phenylene diisocyanate, 2,4- or 2,6-tolylene diisocyanate, 2,4- or 2,6-tolylene diisocyanate having a hydrogenated aromatic ring, diphenylmethane-4,4'-diisocyanate, 3,3'-dimethyl-4,4'-biphenylene diisocyanate, ω,ω' -diisocyanate-1,4-dimethylbenzene, and ω,ω' -diisocyanate-1,3-dimethylbenzene. These may be used alone or may be used in combination of two or more.

10 [0045] Preferably the urethane-based resin coating film further includes a polyvalent phenol. A urethane-based resin coating film including a polyvalent phenol allows for formation of a layer of concentrated polyvalent phenol at the interface between a plated steel sheet and the urethane-based resin coating film so as to make strong adhesion between them. Accordingly, blending of polyvalent phenol in the urethane-based resin
15 coating film further improves the corrosion resistance of the urethane-based resin coating film.

[0046] The type of polyvalent phenol is not specifically limited and may be properly selected from known ones. Examples of the polyvalent phenol include tannic acid, gallic acid, hydroquinone, catechol, and phloroglucinol. The amount of blended polyvalent
20 phenol in the urethane-based resin coating film is preferably in the range of 0.2 to 30mass%. An amount of the blended polyvalent phenol less than 0.2mass% has insufficient effect of the polyvalent phenol. On the other hand, with an amount of the blended polyvalent phenol more than 30mass%, the stability of the coating material may be reduced.

25 [0047] The organic resin coating film may be a coating layer or a laminate layer. The organic resin coating film is preferably a clear coating film for taking advantage of the

black appearance of the black-plated steel sheet.

[0048] The black-plated steel sheet of the present invention includes black oxides to impart black color not only on the surface of a plated layer but also in the interior. Accordingly, the black-plated steel sheet of the present invention can maintain the black appearance even when the surface is scraped off, having excellent retention of the black appearance.

[0049] The black-plated steel sheet of the present invention includes black oxides for imparting black color which are dispersed in a plated layer without forming one coating film. As a result, the black-plated steel sheet of the present invention has excellent press formability without reduction in adhesion of the plating layer. Of course, the black-plated steel sheet of the present invention also has excellent corrosion resistance similar to that of a normal hot-dip Al and Mg-containing Zn-plated steel sheet.

[0050] The black-plated steel sheet of the present invention has no coating film, to which spot welding can be applied as similar to a normal hot-dip Al and Mg-containing Zn-plated steel sheet.

[0051] The method for producing the black-plated steel sheet of the present invention is not specifically limited and the black-plated steel sheet of the present invention may be produced, for example, by the following method.

[0052] 2. Production method of black-plated steel sheet

The production method of a black-plated steel sheet of the present invention includes: 1) a first step of preparing a hot-dip Al and Mg-containing Zn-plated steel sheet; and 2) a second step of contacting the Al and Mg-containing Zn-plated steel sheet with water vapor in a closed vessel. The method may further include: 3) a third step of forming an inorganic coating film or organic resin coating film on the surface of the hot-dip Al and Mg-containing Zn-plated steel sheet, before or after the second step as an optional step.

[0053] [First step]

In the first step, the hot-dip Al and Mg-containing Zn-plated steel sheet is prepared.

[0054] The hot-dip Al and Mg-containing Zn-plated steel sheet may be produced by hot-dip plating with use of an alloy plating bath including, for example, 1.0 to 22.0mass% Al, 1.3 to 10.0mass% Mg, and the balance substantially of Zn. A plating layer formed of 1.0 to 22.0mass% Al, 1.3 to 10.0mass% Mg, and the balance of Zn and unavoidable impurities, with Zn₂Mg phases distributed in the plating layer can be thus formed. To the alloy plating bath, Si, Ti, B, a Ti-B alloy, a Ti-containing compound or a B-containing compound may be added. The hot-dip Al and Mg-containing Zn-plated steel sheet can be produced using, for example, a plating bath at a temperature of 430°C, with an air cooling method after plating at an average cooling rate of 11°C/sec from the plating bath temperature to solidification temperature of the plating layer.

[0055] [Second step]

In a second step, the plated steel sheet prepared in the first step is contacted with water vapor in a closed vessel, so that the plated layer is blackened. The process allows the lightness (L* value) of a plating layer surface to be reduced to 60 or less (preferably 40 or less, more preferably 35 or less). The lightness (L* value) of a plating layer surface is measured with a spectroscopic color difference meter.

[0056] In the second step, the presence of oxygen in the atmosphere for the water vapor treatment prevents a plating layer from being sufficiently blackened. It is presumed that the water vapor treatment in an oxygen-rich atmosphere allows the basic zinc aluminum carbonate having gray color in the surface layer to be more preferentially formed compared to the oxygen-deficient oxides of Zn having black color. In the second step, therefore, it is necessary to reduce the oxygen concentration in the atmosphere (oxygen partial pressure) for water vapor treatment. More specifically, the oxygen concentration in water vapor treatment is preferably 13% or less. The method for lowering the oxygen

concentration in the atmosphere is not specifically limited. For example, the water vapor concentration (relative humidity) may be increased, the air in a vessel may be replaced with an inert gas, or the air in a vessel may be removed with a vacuum pump. In any case, the water vapor treatment is required to be performed in a closed vessel.

5 [0057] In the production method of a black-plated steel sheet described in PTL 1, high-temperature water vapor is sprayed to the surface of a plated steel sheet. It is accordingly believed that the water vapor treatment is performed in an open system the oxygen concentration of which cannot be adjusted. The plating layer cannot be, however, sufficiently blackened by the water vapor treatment of the hot-dip Al and Mg-containing
10 Zn-plated steel sheet prepared in the step 1 in an open system the oxygen concentration of which cannot be adjusted. FIG. 6A and FIG. 6B are photographs illustrating the results of water vapor treatment of a hot-dip Al and Mg-containing Zn-plated steel sheet having a plating composition with an Al concentration of 6.0mass%, an Mg concentration of 3.0mass%, and the balance of Zn. FIG. 6A is a photograph illustrating the hot-dip Al and
15 Mg-containing Zn-plated steel sheet after spraying water vapor at 98°C for 60 hours in an open system with an oxygen concentration more than 13% (L* value: 62). FIG. 6B is a photograph illustrating the hot-dip Al and Mg-containing Zn-plated steel sheet after contacting with water vapor at 140°C for 4 hours in a closed system with an oxygen concentration of 13% or less (L* value: 32). The photographs indicate that the water
20 vapor treatment is required to be performed in a closed system the oxygen concentration of which can be adjusted for sufficient blackening of the hot-dip Al and Mg-containing Zn-plated layer.

[0058] (Treatment temperature)

The temperature for water vapor treatment is preferably in the range of 50°C or
25 higher and 350°C or lower. In the case of a temperature for water vapor treatment below 50°C, the productivity is lowered due to a slow blackening rate. More preferably the

temperature for water vapor treatment is 100°C or higher, since the oxygen concentration in the atmosphere can be easily lowered when water is heated to 100°C or higher in a closed vessel so as to have a pressure in the vessel of 1 atmospheric pressure or higher. In contrast, in the case of a temperature for water vapor treatment higher than 350°C, the control is difficult due to an extremely high blackening rate. Furthermore, not only a large-sized processing apparatus is required, but also prolonged total processing time is required including the time required for raising and lowering temperature, which is impractical. Accordingly, a temperature for water vapor treatment in the range of 105°C or higher and 200°C or lower is particularly preferred, from the viewpoints of removal of oxygen in the atmosphere and control of the blackening rate.

[0059] When a temperature lower than 100°C is required for water vapor treatment, an inert gas at an atmospheric pressure or higher may be contained in the vessel so as to prevent air from being mixed. The type of inert gas is not specifically limited as long as not involving the blackening reaction. Examples of the inert gas include Ar, N₂, He, Ne, Kr and Xe. Among these, Ar, N₂ and He are preferred, being available at low cost. Alternatively, the water vapor treatment may be performed after removal of air in the vessel by a vacuum pump or the like.

[0060] (Relative humidity)

In water vapor treatment, the relative humidity of water vapor is preferably in the range of 30% or more and 100% or less, more preferably in the range of 30% or more and less than 100%. A relative humidity of water vapor less than 30% reduces productivity due to a slow blackening rate. A relative humidity of water vapor of 100% may easily cause defects in appearance due to attachment of dew condensation water to the surface of a plated steel sheet.

[0061] The processing time for water vapor treatment may be properly set depending on the conditions for the water vapor treatment (temperature, relative humidity, pressure and

the like), the amount of Al and Mg in a plating layer, and the lightness to be required.

[0062] (Preheating)

Prior to water vapor treatment, a plated steel sheet may be heated to form $Zn_{11}Mg_2$ from Zn_2Mg in the plating layer, so that the time for water vapor treatment for obtaining
5 black appearance of the plating layer can be shortened. The heating temperature of the plated steel sheet is preferably in the range of 150 to 350°C. A heating temperature lower than 150°C prolongs the processing time for forming $Zn_{11}Mg_2$ from Zn_2Mg by preheating, so that the advantage of shortening the time of water vapor treatment cannot be obtained. In contrast, although a heating temperature higher than 350°C allows for the change of
10 Zn_2Mg to $Zn_{11}Mg_2$ in a short time, the further progress of reaction may form a plating layer having lower corrosion resistance due to separation of each of the phases with progress of the change in the state of the plated layer, so that the preheating cannot be easily controlled. The processing time for the preheating may be properly set depending on the processing temperature and the amount of Al and Mg in the plating layer. The preheating may be
15 typically performed at 250°C for about 2 hours.

[0063] The water vapor treatment may be applied to any of a plated steel sheet wound in a coil form, a flat plated steel sheet before processing, and a plated steel sheet after molding or welding.

[0064] [Optional step]

20 In an optional step optionally performed before or after the second step, an inorganic coating film or an organic resin coating film is formed on the surface of a hot-dip Al and Mg-containing Zn-plated steel sheet.

[0065] The inorganic coating film may be formed by a known method. For example, an inorganic coating material which contains a valve metal may be applied to the surface of a
25 hot-dip Al and Mg-containing Zn-plated steel sheet before or after contact with water vapor, and then dried without washing with water. Examples of the application method include a

roll coating method, a spin coating method, and a spray coating method. In the case of adding a valve metal compound to an inorganic coating material, an organic acid having a chelating function may be added to the inorganic coating material so that the valve metal compound can stably exist in the inorganic coating material. Examples of the organic acid include tannic acid, tartaric acid, citric acid, oxalic acid, malonic acid, lactic acid, and acetic acid.

[0066] An organic resin coating film may be also formed by a known method. In the case of an organic resin coating film formed of, for example, coating layer, an organic coating material which contains an organic resin and a valve metal may be applied to the surface of a hot-dip Al and Mg-containing Zn-plated steel sheet before or after contact with water vapor, and then dried without washing with water. Examples of the application method include a roll coating method, a spin coating method, and a spray coating method. In the case of adding a valve metal compound to an organic coating material, an organic acid having a chelating function may be added to the organic coating material so that the valve metal compound can stably exist in the organic coating material. In the case of application of an organic coating material which contains an organic resin, a valve metal compound, a fluoride, and a phosphate to the surface of a plated steel sheet, a coating film (interface reaction layer) including a reaction product of inorganic negative ions such as fluorine ions and phosphoric ions with metals contained in the plated steel sheet or a valve metal is preferentially and densely formed on the surface of the plated steel sheet, on which an organic resin coating film including dispersed particles of oxides of valve metal, hydroxides of valve metal, fluorides of valve metal and phosphates is formed. In contrast, in the case of the organic resin coating film formed of a laminate layer, an organic resin film which contains a valve metal or the like may be laminated on the surface of a plated steel sheet.

[0067] In the case of forming an organic resin coating film on the surface of a hot-dip Al

and Mg-containing Zn-plated steel sheet before contacting the hot-dip Al and Mg-containing Zn-plated steel sheet with water vapor, the organic resin coating film is preferably the urethane-based resin coating film. The urethane-based resin coating film formed from polyol including a combination of an ether-based polyol and an ester-based polyol at a predetermined ratio can maintain the effect for improving the corrosion resistance even when treated with water vapor. A black-plated steel sheet having black color and excellent corrosion resistance can be therefore produced, even when the second step is performed after any step.

[0068] According to the procedures described above, a plating layer can be blackened to produce a black-plated steel sheet excellent in retention of the black appearance and press formability.

[0069] The production method of the present invention uses water vapor for blackening, so that a black-plated steel sheet can be produced without placing a load to the environment.

Examples

[0070] The following examples further illustrate the present invention, but the scope of the present invention is not limited to the examples.

[0071] [Example 1]

A hot-dip Al and Mg-containing Zn-plated steel sheet having a plating layer with a thickness of 3 to 100 μm was prepared from a substrate of SPCC with a sheet thickness of 1.2 mm. The plating bath composition (concentration of Zn, Al and Mg) was changed to prepare 20 kinds of plated steel sheets, each of which had a plating layer with a different composition and a different thickness. The plating bath composition and the plating layer thickness for each of the 20 kinds of prepared plated steel sheets are shown in Table 1. The plating bath composition and the plating layer composition are the same.

[0072]

[Table 1]

Plated steel sheet No.	Plating bath composition (mass%)		Plating layer thickness(μm)
	Al	Mg	
1	1.0	3.0	15
2	6.0	3.0	15
3	11.0	3.0	15
4	22.0	3.0	15
5	6.0	1.3	15
6	6.0	10.0	15
7	1.8	1.9	15
8	3.7	3.1	15
9	2.3	2.2	15
10	4.0	3.3	15
11	6.0	3.0	18
12	6.0	3.0	3
13	6.0	3.0	6
14	6.0	3.0	10
15	6.0	3.0	30
16	6.0	3.0	100
17	0.5	3.0	15
18	30.0	3.0	15
19	6.0	1.1	15
20	6.0	15.0	15

[0073] The cross section of a plating layer was observed by a scanning electron
5 microscope and analyzed by X-ray diffraction for identification of phases for each of the
plated steel sheets Nos. 1 to 16. As a result, a ternary eutectic structure of Al/Zn/Zn₂Mg
was found in any of the plating textures. An Al primary crystal was also found in the
plating texture of Nos. 2 to 5. The primary crystal of the plated steel sheets No. 1 and
Nos. 7 to 9 was Zn, and the primary crystal of the plated steel sheet No. 6 was Zn₂Mg.
10 The ternary eutectic structure of Al/Zn/Zn₂Mg only was found in the plated steel sheet No.
10. In contrast, the ternary eutectic of Al/Zn/Zn₂Mg, the primary crystal of Zn, and a
binary eutectic structure of Zn/Zn₂Mg were found in the plated steel sheet No. 17. The

ternary eutectic structure of Al/Zn/Zn₂Mg was found in each of the plated steel sheets Nos. 18 to 20. The primary crystal was Al in Nos. 18 and 19, and Zn₂Mg phase in No. 20.

[0074] The prepared plated steel sheet was placed in a high-temperature and high-pressure heat-moisture treatment apparatus (made by Hisaka Works, Ltd.), and the plating layer was contacted with water vapor under the conditions shown in Table 2.

[0075] FIG. 1A is an optical microscopic image of the cross section of plated layer of the plated steel sheet after water vapor treatment in Example 21. FIG. 1B is a scanning electron microscopic image of a cross section in the same view field as in FIG. 1A. FIG. 2A is an optical microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B. FIG. 2B is a scanning electron microscopic image of the region indicated by dashed lines in FIG. 1A and FIG. 1B. FIG. 2C is a schematic diagram illustrating a microstructure of the region indicated in FIG. 2A and FIG. 2B. In FIG. 2C, for convenience of description, the region of oxidized metal is also classified into the same group as before oxidation (a Zn phase, a Zn₂Mg phase, and a primary Al^{''}) in the drawing.

As illustrated in the photographs, the Zn₂Mg phase distributed in a lamellar form is blackened. It was observed that in each of the plating layers of the plated steel sheets in other Examples (Examples 1 to 20, and 22 to 23), the Zn₂Mg phases distributed in a lamellar form were blackened also in the interior of the plating layer.

[0076] In FIG. 1A, the blackened part has a depth of about 8 μm, so that it was confirmed that blackening reached a deeper layer in the plating layer. In other Examples, blackening also reached a deeper layer of the plated steel sheet. In order to examine the adhesion of the black-plated steel sheet after processing, a 180 degree bending test was also performed for each of the plated steel sheet after water vapor treatment (Examples 1 to 23). In the 180 degree bending test, a sample piece cut out from each of the plated steel sheets was bent at 180 degrees (3 t), and a cellophane tape peeling test was performed for the bent part. As a result, no peeling was found for any one in Examples 1 to 23. It was, therefore,

demonstrated that the black-plated steel sheet of the present invention has excellent adhesion even when processed. It was also confirmed that the Zn₂Mg phases dispersed in a plating layer in Comparative Examples 1 to 4 were blackened.

[0077] FIG. 3 illustrates element distribution images of plated steel sheet before and after water vapor treatment in Example 20 (plated steel sheet No. 13) analyzed by electron probe micro analyzer (EPMA). In the upper row, the cross sections of the plated steel sheet No. 13 before water vapor treatment are shown, and in the lower row, the cross sections of the plated steel sheet after water vapor treatment in Example 20 are shown. The visual field in the photographs is different between before and after water vapor treatment. "SEI" represents secondary electron images, "Zn" represents Zn distribution images, "Al" represents Al distribution images, "Mg" represents Mg distribution images, and "O" represents O distribution images. From the results, it was found that Zn contained in the primary Al" and Zn contained in the Zn₂Mg phase were mainly oxidized. In plated steel sheets in other Examples (Examples 1 to 19, and 21 to 23), Zn contained in the Zn₂Mg phase and Zn contained in the primary Al" were also oxidized. On the other hand, also in Comparative Examples 1 to 4, O (oxygen) was distributed after water vapor treatment, and it was confirmed that Zn contained in the primary Al" and Zn contained in the Zn₂Mg phase were oxidized.

[0078] The lightness (L* value) of a plating layer surface was measured for each of the plated steel sheets after water vapor treatment (Examples 1 to 23, and Comparative Examples 1 to 4) by spectral reflectance with a spectroscopic color difference meter (TC-1800, made by Tokyo Denshoku Co., Ltd.), in accordance with JIS K 5600. The measurement conditions are shown in the following:

Optical conditions: d/8° method (double beam optical system)

Visual field: 2 degrees

Measurement method: reflectometry

Standard light: C

Color system: CIELAB

Measurement wavelength: 380 to 780 nm

Measurement wavelength interval: 5 nm

5 Spectroscope: diffraction grating 1,200/mm

Lighting: halogen lamp (voltage: 12 V, power: 50 W, rated life: 2,000 hours)

Measurement area: diameter=7.25 mm

Detection element: photomultiplier (R928 made by Hamamatsu Photonics K.K.)

Reflectance: 0 to 150%

10 Measurement temperature: 23°C

Standard plate: white

[0079] For each of the plated steel sheets after water vapor treatment (Examples 1 to 23 and Comparative Examples 1 to 4), having an L* value of 35 or less was evaluated as "A", more than 35 and 40 or less as "B", more than 40 and 60 or less as "C", and more than 60
15 as "D".

[0080] The corrosion resistance was evaluated for each of the plated steel sheets after water vapor treatment (Examples 1 to 23 and Comparative Examples 1 to 4). After sealing the end faces of a sample piece (150 mm long and 70 mm wide) cut out from each of the plated steel sheets, the sample piece was subjected to repeated cycles including a salt
20 water spraying step, a drying step, and a moistening step in one cycle (8 hours). Evaluation was made based on the number of cycles when the proportion of red-rusted area reached 5%. In the salt water spraying step, 5% NaCl aqueous solution at 35°C was sprayed to the sample piece for 2 hours. In the drying step, the sample piece was left standing for 4 hours in an environment at an atmospheric temperature of 60°C and a
25 relative humidity of 30%. In the moistening step, the sample piece was left standing for 2 hours in an environment at an atmospheric temperature of 50°C and a relative humidity of

95%. The sample piece which requires more than 120 cycles for the proportion of red-rusted area to reach 5% was evaluated as "A", more than 70 cycles and 120 or less as "B", and 70 cycles or less as "D".

[0081] The lightness and the results of corrosion resistance testing for the plating layer surface of each of the plated steel sheets after water vapor treatment are shown in Table 2.

[0082]

[Table 2]

	Plated steel sheet (refer to Table 1)	Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Temperature (°C)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	Cycle number (repeat count)
Example 1	1	120	85	3	20	34(A)	110(B)
Example 2	2	120	85	3	20	33(A)	120<(A)
Example 3	3	120	85	3	20	31(A)	120<(A)
Example 4	4	120	85	3	20	30(A)	120<(A)
Example 5	5	120	85	3	20	32(A)	85(B)
Example 6	6	120	85	3	20	33(A)	120<(A)
Example 7	7	120	85	3	20	35(A)	90(B)
Example 8	8	120	85	3	20	32(A)	120<(A)
Example 9	9	120	85	3	20	33(A)	90(B)
Example 10	10	120	85	3	20	31(A)	120<(A)
Example 11	11	105	98	0.4	20	42(C)	120<(A)
Example 12	11	105	35	13	115	55(C)	120<(A)
Example 13	11	130	95	1	8	38(B)	120<(A)
Example 14	11	145	85	3	8	31(A)	120<(A)
Example 15	11	190	70	6	1	29(A)	120<(A)
Example 16	11	210	90	2	0.5	32(A)	120<(A)
Example 17	11	260	100	0.05	0.2	31(A)	120<(A)
Example 18	11	340	100	0.05	0.1	28(A)	120<(A)
Example 19	12	120	85	3	20	31(A)	73(B)
Example 20	13	120	85	3	20	32(A)	120<(A)
Example 21	14	120	85	3	20	32(A)	120<(A)
Example 22	15	120	85	3	20	33(A)	120<(A)
Example 23	16	120	85	3	20	34(A)	120<(A)
Comparative Example 1	17	120	85	3	20	38(B)	68(D)
Comparative Example 2	18	120	85	3	20	31(A)	120<(A)
Comparative Example 3	19	120	85	3	20	33(A)	48(D)
Comparative Example 4	20	120	85	3	20	31(A)	120<(A)

[0083] As shown in Table 2, the plated steel sheets in Comparative Examples 1 and 3 had

a plating layer with reduced corrosion resistance due to the content of Al or Mg in the plating layer beyond the proper range. The plated steel sheets in Comparative Examples 2 and 4 were not beautifully plated, since excessive generation of oxides (dross) on a plating bath surface during production of the plated steel sheet caused attachment of the dross to the plating layer surface.

[0084] The results proved that the black-plated steel sheet of the present invention has a high degree of blackness, being excellent in the corrosion resistance and the retention of black appearance after processing.

[0085] [Example 2]

10 A hot-dip Al and Mg-containing Zn-plated steel sheet having a plating layer with a thickness of 10 μm was prepared from a substrate of SPCC with a sheet thickness of 1.2 mm. The plating bath composition (concentration of Zn, Al, Mg, Si, Ti and B) was changed to prepare 35 kinds of plated steel sheets, each of which had a plating layer with a different composition. The plating bath composition and the plating layer thickness for
15 each of the 35 kinds of prepared plated steel sheet are shown in Table 3. The plating bath composition and the plating layer composition are the same.

[0086]

[Table 3]

Plated steel sheet No.	Plating bath composition (mass%)					Plating layer thickness (μm)
	Al	Mg	Si	Ti	B	
21	6.0	3.0	0.005	-	-	10
22	6.0	3.0	0.020	-	-	
23	6.0	3.0	0.200	-	-	
24	6.0	3.0	2.000	-	-	
25	6.0	3.0	-	0.001	-	
26	6.0	3.0	-	0.002	-	
27	6.0	3.0	-	0.100	-	
28	6.0	3.0	-	-	0.0005	
29	6.0	3.0	-	-	0.045	
30	6.0	3.0	-	0.001	0.0005	
31	6.0	3.0	-	0.001	0.045	
32	6.0	3.0	-	0.100	0.0005	
33	6.0	3.0	-	0.100	0.045	
34	6.0	3.0	-	0.002	0.0005	
35	6.0	3.0	0.020	0.020	-	
36	6.0	3.0	0.020	0.020	0.0005	
37	11.0	3.0	0.005	-	-	
38	11.0	3.0	0.020	-	-	
39	11.0	3.0	0.200	-	-	
40	11.0	3.0	2.000	-	-	
41	11.0	3.0	-	0.001	-	
42	11.0	3.0	-	0.002	-	
43	11.0	3.0	-	0.100	-	
44	11.0	3.0	-	-	0.0005	
45	11.0	3.0	-	-	0.045	
46	11.0	3.0	-	0.001	0.0005	
47	11.0	3.0	-	0.001	0.045	
48	11.0	3.0	-	0.100	0.0005	
49	11.0	3.0	-	0.100	0.045	
50	11.0	3.0	-	0.002	0.0005	
51	11.0	3.0	0.200	0.002	-	
52	11.0	3.0	0.200	0.002	0.0005	
53	1.8	1.9	0.006	0.002	-	
54	2.3	2.3	0.005	-	-	
55	3.8	3.2	0.005	-	-	

[0087] The prepared plated steel sheet was placed in a high-temperature and high-pressure heat-moisture treatment apparatus, and the plating layer was contacted with water vapor under the conditions shown in Table 4.

[0088] The cross section of a plating layer was observed for each of the plated steel sheets after water vapor treatment (Examples 24 to 58) with an optical microscope. It was observed that the Zn₂Mg phases distributed in the plating layer were blackened even in the interior of the plating layer.

[0089] The lightness (L* value) of a plating layer surface was measured for each of the plated steel sheets after water vapor treatment (Examples 24 to 58) with a spectroscopic color difference meter. The corrosion resistance testing was also performed for each of the plated steel sheets after water vapor treatment (Examples 24 to 58). The measurement of the lightness and the corrosion resistance testing were performed in the same way as in Example 1. The lightness and the results of corrosion resistance testing for the plating layer surface of each of the plated steel sheets after water vapor treatment are shown in Table 4.

[0090]

[Table 4]

	Plated steel sheet (refer to Table 3)	Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Temperature (°C)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	Cycle number (repeat count)
Example 24	21	110	80	4	28	32(A)	120<(A)
Example 25	22	110	80	4	28	32(A)	120<(A)
Example 26	23	110	80	4	28	32(A)	120<(A)
Example 27	24	110	80	4	28	32(A)	120<(A)
Example 28	25	110	80	4	28	32(A)	120<(A)
Example 29	26	110	80	4	28	32(A)	120<(A)
Example 30	27	110	80	4	28	32(A)	120<(A)
Example 31	28	110	80	4	28	32(A)	120<(A)
Example 32	29	110	80	4	28	32(A)	120<(A)
Example 33	30	110	80	4	28	32(A)	120<(A)
Example 34	31	110	80	4	28	32(A)	120<(A)
Example 35	32	110	80	4	28	32(A)	120<(A)
Example 36	33	110	80	4	28	32(A)	120<(A)
Example 37	34	110	80	4	28	32(A)	120<(A)
Example 38	35	110	80	4	28	32(A)	120<(A)
Example 39	36	110	80	4	28	32(A)	120<(A)
Example 40	37	110	85	3	28	30(A)	120<(A)
Example 41	38	110	85	3	28	30(A)	120<(A)
Example 42	39	110	85	3	28	30(A)	120<(A)
Example 43	40	110	85	3	28	30(A)	120<(A)
Example 44	41	110	85	3	28	30(A)	120<(A)
Example 45	42	110	85	3	28	30(A)	120<(A)
Example 46	43	110	85	3	28	30(A)	120<(A)
Example 47	44	110	85	3	28	30(A)	120<(A)
Example 48	45	110	85	3	28	30(A)	120<(A)
Example 49	46	110	85	3	28	30(A)	120<(A)
Example 50	47	110	85	3	28	30(A)	120<(A)
Example 51	48	110	85	3	28	30(A)	120<(A)
Example 52	49	110	85	3	28	30(A)	120<(A)
Example 53	50	110	85	3	28	30(A)	120<(A)
Example 54	51	110	85	3	28	30(A)	120<(A)
Example 55	52	110	85	3	28	30(A)	120<(A)
Example 56	53	110	80	4	28	36(B)	74(B)
Example 57	54	110	80	4	28	35(A)	78(B)
Example 58	55	110	80	4	28	34(A)	120<(A)

[0091] As shown in Table 4, the plated steel sheets in Examples 24 to 58 were sufficiently blackened and had good results in corrosion resistance of the plating layer. A 180 degree bending test was also performed for each of the plated steel sheets after water vapor treatment (Examples 24 to 58). In the 180 degree bending test, a sample piece cut
5 out from each of the plated steel sheets was bent at 180 degrees (3 t), and the cellophane tape peeling test was performed for the bent part. As a result, no peeling was found for any one in Examples 24 to 58.

[0092] The results proved that the black-plated steel sheet of the present invention has a high degree of blackness, being excellent in the corrosion resistance and the retention of
10 black appearance after processing.

[0093] [Example 3]

A plated steel sheet No. 36 or 52 in Table 3 was coated with an inorganic chemical treatment liquid shown in Table 5, and placed in an electric oven without washing with water so as to be heated and dried under conditions for the plate temperature to reach
15 120°C. Consequently an inorganic coating film was formed on the surface of the plated steel sheet.

[0094]

[Table 5]

Treatment liquid No.	Valve metal compound		Phosphate		Organic acid	
	Type	Concentration (g/L)	Type	Concentration (g/L)	Type	Concentration (g/L)
1	H ₂ TiF ₆	Ti:2	H ₃ PO ₄	P:10	-	-
2	(NH ₄) ₂ TiF ₆	Ti:6	H ₃ PO ₄	P:10	-	-
3	H ₂ TiF ₆	Ti:8	-	-	Tannic acid	10
4	(NH ₄)VO ₃	V:5	-	-	-	-
5	V ₂ O ₅ (NH ₄) ₂ ZrO(CO ₃) ₂	V:5 Zr:6	H ₃ PO ₄	P:10	-	-
6	H ₂ ZrF ₆	Zr:6	-	-	-	-
7	Zr(SO ₄) ₂	Zr:6	-	-	-	-
8	HfF ₄	Hf:1	-	-	-	-
9	H ₂ SiF ₆	Si:2	H ₃ PO ₄	P:10	-	-
10	Al(NO ₃) ₃ ·9H ₂ O	Al:1	-	-	-	-
11	(NH ₄) ₁₀ W ₁₂ O ₄₁	W:3	-	-	-	-
12	Niobic acid sol	Nb:2	-	-	Tartaric acid	10
13	Ta ₂ O ₅ ·nH ₂ O	Ta:1	-	-	-	-
14	V ₂ O ₅ ZrO(NO ₃) ₂ ·2H ₂ O	V:5 Zr:6	H ₃ PO ₄	P:10	-	-
15	ZrO(NO ₃) ₂ ·2H ₂ O	Zr:10	-	-	-	-

[0095] The prepared plated steel sheet having the inorganic coating film was placed in a high-temperature and high-pressure heat-moisture treatment apparatus, and the plating layer was contacted with water vapor under the conditions shown in Tables 6 and 7.

[0096] The cross section of a plating layer was observed for each of the plated steel sheets after water vapor treatment (Examples 59 to 90) with an optical microscope. It was observed that the Zn₂Mg phases distributed in a lamellar form mainly in the ternary eutectic structure were blackened. It was confirmed that partially crystallized Zn₂Mg phases and Zn₂Mg phases of the binary eutectic of Al/Zn₂Mg were also blackened.

[0097] The lightness (L* value) of a plating layer surface was measured for each of the plated steel sheets after water vapor treatment (Examples 59 to 90) with a spectroscopic

color difference meter in the same way as in Example 1. The corrosion resistance testing was also performed for each of the plated steel sheets after water vapor treatment (Examples 59 to 90). In the corrosion resistance testing, NaCl aqueous solution at 35°C was sprayed to the sample piece for 12 hours in accordance with JIS Z 2371. The sample
5 piece with a proportion of white-rusted area after spraying of 0% was evaluated as "A", more than 0% and less than 5% as "B", 5% or more and less than 10% as "C", and 10% or more as "D".

[0098] The lightness and the results of corrosion resistance testing for the plating layer surface of each of the plated steel sheets after water vapor treatment are shown in Tables 6
10 and 7.

[0099]

[Table 6]

	Plated steel sheet (refer to Table 3)	Inorganic treatment		Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Treatment liquid No. (refer to Table 5)	Attachment amount of valve metal (mg/m ²)	Temperature (°C)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	White-rusted area ratio (%)
Example 59	36	1	Ti:60	110	80	4	24	34(A)	0(A)
Example 60		2	Ti:70					34(A)	0(A)
Example 61		3	Ti:80					34(A)	0(A)
Example 62		4	V:50					35(A)	0(A)
Example 63		5	V:50					34(A)	0(A)
Example 64		6	Zr:100					35(A)	0(A)
Example 65		7	Zr:60					36(B)	0(A)
Example 66		8	Hf:100					34(A)	0(A)
Example 67		9	Si:200					35(A)	0(A)
Example 68		10	Al:150					36(B)	0(A)
Example 69		11	W:90					34(A)	0(A)
Example 70		12	Nb:80					35(A)	0(A)
Example 71		13	Ta:70					34(A)	0(A)
Example 72		14	V:60					35(A)	0(A)
Example 73		15	Zr:100					36(B)	0(A)
Example 74	None		32(A)	70(D)					

[0100]

[Table 7]

	Plated steel sheet (refer to Table 3)	Inorganic treatment		Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Treatment liquid No. (refer to Table 5)	Attachment amount of valve metal (mg/m ²)	Temperature (°C)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	White-rusted area ratio (%)
Example 75	52	1	Ti:60	110	80	4	24	33(A)	0(A)
Example 76		2	Ti:70					35(A)	0(A)
Example 77		3	Ti:80					35(A)	0(A)
Example 78		4	V:50					34(A)	0(A)
Example 79		5	V:50					33(A)	0(A)
Example 80		6	Zr:100					36(B)	0(A)
Example 81		7	Zr:60					35(A)	0(A)
Example 82		8	Hf:100					36(B)	0(A)
Example 83		9	Si:200					37(B)	0(A)
Example 84		10	Al:150					35(A)	0(A)
Example 85		11	W:90					35(A)	0(A)
Example 86		12	Nb:80					34(A)	0(A)
Example 87		13	Ta:70					35(A)	0(A)
Example 88		14	V:60					34(A)	0(A)
Example 89		15	Zr:100					33(A)	0(A)
Example 90	None		31(A)	73(D)					

[0101] From Tables 6 and 7, it was proved that the corrosion resistance of a black-plated steel sheet can be further improved by the formation of the inorganic coating film. A 180 degree bending test was also performed for each of the plated steel sheets after water vapor treatment (Examples 59 to 90). In the 180 degree bending test, a sample piece cut out from each of the plated steel sheets was bent at 180 degrees (3 t), and the cellophane tape peeling test was performed for the bent part. As a result, no peeling was found for any one in Examples 59 to 90.

[0102] [Example 4]

A black-plated steel sheet in Example 39 (L^* value: 32) and a black-plated steel sheet in Example 55 (L^* value: 30) in Table 4 were coated with an organic chemical treatment liquid shown in Table 8, and placed in an electric oven without washing with water so as to be heated and dried under conditions for the plate temperature to reach 160°C. Consequently an organic resin coating film was formed on the surface of the black-plated steel sheet. The urethane resin for use was APX-601 (made by DIC Corporation). The epoxy resin for use was EM-0718 (made by ADEKA Corporation). The acrylic resin for use was SFC-55 (made by DIC Corporation).

[0103]

[Table 8]

Treatment liquid No.	Organic resin		Lubricant	Valve metal compound		Phosphate		Organic acid	
	Type	Concentration (g/L)	Concentration (g/L)	Type	Concentration (g/L)	Type	Concentration (g/L)	Type	Concentration (g/L)
1	Urethane resin	100	-	-	-	H ₃ PO ₄	P:1	-	-
2	Epoxy resin	100	-	(NH ₄) ₂ TiF ₆	Ti:1	H ₃ PO ₄	P:1	-	-
3	Urethane resin	100	-	H ₂ TiF ₆	Ti:1	-	-	-	-
4	Acrylic resin	100	-	(NH ₄)VO ₃	V:1	-	-	-	-
5	Urethane resin	100	-	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
6	Urethane resin	100	5	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
7	Polyolefin resin	100	-	Zr(SO ₄) ₂	Zr:1	-	-	-	-
8	Acrylic resin	100	-	HfF ₄	Hf:1	-	-	-	-
9	Urethane resin	100	-	H ₂ SiF ₆	Si:1	H ₃ PO ₄	P:1	-	-
10	Fluorine resin	100	-	Al(NO ₃) ₃ ·9H ₂ O	Al:1	-	-	-	-
11	Polyester resin	100	-	-	-	-	-	Tannic acid	10
12	Urethane resin	100	-	Niobic acid sol	Nb:1	-	-	-	-
13	Urethane resin	100	-	Ta ₂ O ₅ ·nH ₂ O	Ta:1	-	-	-	-
14	Acrylic resin	100	-	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
15	Urethane resin	100	-	ZrO(NO ₃) ₂ ·2H ₂ O	Zr:1	-	-	-	-

Lubricant: polyethylene-based wax (average particle diameter : 1.0μm)

[0104] A corrosion resistance testing and a galling resistance testing were performed for each of the plated steel sheets having the organic resin coating film (Examples 91 to 122). The corrosion resistance testing was performed in accordance with JIS Z 2371 in the same way as in Example 3. In the galling resistance testing, a 30-mm by 250-mm sample piece
5 was subjected to a bead drawing test (bead height: 4 mm, applied pressure: 3.0 kN), and the sliding surface was visually observed after testing. The sample piece with a proportion of scratched area in the sliding surface of 0% (no scratch) was evaluated as "A", more than 0% and less than 5% as "B", 5% or more and less than 10% as "C", and 10% or more as "D".

10 [0105] The results of the corrosion resistance testing and the galling resistance testing for each plated steel sheet are shown in Table 9.

[0106]

[Table 9]

	Black-plated steel sheet (refer to Table 4)	Organic treatment		Corrosion resistance	Galling resistance
		Treatment liquid No. (refer to Table 8)	Film thickness (μm)	White-rusted area ratio (%)	Scratched area ratio (%)
Example 91	Example 39	1	2	0(A)	3(B)
Example 92		2	2	0(A)	9(C)
Example 93		3	2	0(A)	3(B)
Example 94		4	2	0(A)	6(C)
Example 95		5	2	0(A)	3(B)
Example 96		6	2	0(A)	0(A)
Example 97		7	2	0(A)	5(C)
Example 98		8	2	0(A)	6(C)
Example 99		9	2	0(A)	3(B)
Example 100		10	2	0(A)	2(B)
Example 101		11	2	0(A)	5(C)
Example 102		12	2	0(A)	3(B)
Example 103		13	2	0(A)	3(B)
Example 104		14	2	0(A)	6(C)
Example 105		15	2	0(A)	3(B)
Example 106		None		70(D)	90(D)
Example 107	Example 55	1	2	0(A)	2(B)
Example 108		2	2	0(A)	8(C)
Example 109		3	2	0(A)	4(B)
Example 110		4	2	0(A)	7(C)
Example 111		5	2	0(A)	4(B)
Example 112		6	2	0(A)	0(A)
Example 113		7	2	0(A)	6(C)
Example 114		8	2	0(A)	7(C)
Example 115		9	2	0(A)	4(B)
Example 116		10	2	0(A)	3(B)
Example 117		11	2	0(A)	6(C)
Example 118		12	2	0(A)	2(B)
Example 119		13	2	0(A)	4(B)
Example 120		14	2	0(A)	7(C)
Example 121		15	2	0(A)	2(B)
Example 122		None		75(D)	85(D)

[0107] From Table 9, it was proved that the corrosion resistance and the galling resistance of a black-plated steel sheet can be further improved by the formation of the organic resin coating film.

[0108] [Example 5]

5 A plated steel sheet No. 36 or 52 in Table 3 was coated with an organic chemical treatment liquid shown in Table 10, and placed in an electric oven without washing with water so as to be heated and dried under conditions for the plate temperature to reach 160°C. Consequently an organic resin coating film (urethane-based resin coating film) was formed on the surface of the plated steel sheet. The ether-based polyol for use was
10 polypropylene glycol. The ester-based polyol for use was adipic acid. The polyisocyanate for use was hydrogenated tolylenediisocyanate.

[0109]

[Table 10]

Treatment liquid No.	Urethane-based resin			Valve metal compound		Phosphate		Polyvalent phenol	
	Polyol ratio (mass%)		Concentration (g/L)	Type	Concentration (g/L)	Type	Concentration (g/L)	Type	Concentration (g/L)
	Ether-based (polypropylene glycol)	Ester-based (adipic acid)							
16	5	95	100	-	-	-	-	-	-
17	5	95	100	H ₂ Tf ₆	Ti:1	H ₃ PO ₄	P:1	-	-
18	5	95	100	(NH ₄)VO ₃	V:1	H ₃ PO ₄	P:1	-	-
19	5	95	100	ZrO(NO ₃) ₂ ·2H ₂ O	Zr:1	-	-	-	-
20	5	95	100	HF ₄	HF:1	-	-	-	-
21	5	95	100	H ₂ SiF ₆	Si:1	-	-	-	-
22	5	95	100	Niobic acid sol	Nb:1	-	-	-	-
23	5	95	100	Al(NO ₃) ₃ ·9H ₂ O	Al:1	-	-	-	-
24	5	95	100	Ta ₂ O ₅ ·nH ₂ O	Ta:1	-	-	-	-
25	5	95	100	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
26	5	95	100	-	-	-	-	Tannic acid	10
27	30	70	100	-	-	-	-	-	-
28	30	70	100	(NH ₄)VO ₃	V:1	H ₃ PO ₄	P:1	-	-
29	30	70	100	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
30	30	70	180	ZrO(NO ₃) ₂ ·2H ₂ O	Zr:1	-	-	-	-
31	30	70	100	-	-	-	-	Tannic acid	10
32	0	100	100	-	-	-	-	-	-
33	0	100	100	(NH ₄)VO ₃	V:1	H ₃ PO ₄	P:1	-	-
34	0	100	100	V ₂ O ₅	V:1	H ₃ PO ₄	P:1	-	-
35	0	100	100	ZrO(NO ₃) ₂ ·2H ₂ O	Zr:1	-	-	-	-
36	0	100	100	-	-	-	-	Tannic acid	10
37	2	98	100	-	-	-	-	-	-
38	35	65	100	-	-	-	-	-	-
39	2	98	100	-	-	-	-	Tannic acid	10
40	35	65	100	-	-	-	-	Tannic acid	10

[0110] The plated steel sheet having the organic resin coating film was placed in a high-temperature and high-pressure heat-moisture treatment apparatus, and the plating layer was contacted with water vapor under the conditions shown in Tables 11 and 12.

[0111] The cross section of a plating layer was observed for each of the plated steel sheets after water vapor treatment (Examples 123 to 172) with an optical microscope. It was observed that the Zn_2Mg phases distributed in a lamellar form mainly in the ternary eutectic, partially crystallized Zn_2Mg phases, and Zn_2Mg phases of Al/ Zn_2Mg were blackened.

[0112] The measurement of the lightness of a plating layer surface and a corrosion resistance testing were performed for each of the plated steel sheets after water vapor treatment (Examples 123 to 172). The measurement of the lightness of a plating layer surface was performed in the same way as in Example 1. The corrosion resistance testing was performed in the same way as in Example 3.

[0113] The lightness and the results of corrosion resistance testing for the plating layer surface of each of the plated steel sheets after water vapor treatment are shown in Tables 11 and 12.

[0114]

[Table 11]

	Plated steel sheet (refer to Table 3)	Organic treatment		Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Treatment liquid No. (refer to Table 10)	Film thickness (μm)	Temperature ($^{\circ}\text{C}$)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	White-rusted area ratio (%)
Example 123	36	16	2	110	90	4	21	31(A)	9(C)
Example 124		17	2					32(A)	4(B)
Example 125		18	2					32(A)	3(B)
Example 126		19	2					31(A)	4(B)
Example 127		20	2					32(A)	4(B)
Example 128		21	2					32(A)	4(B)
Example 129		22	2					31(A)	3(B)
Example 130		23	2					31(A)	4(B)
Example 131		24	2					33(A)	4(B)
Example 132		25	2					32(A)	3(B)
Example 133		26	2					33(A)	0(A)
Example 134		27	2					31(A)	9(C)
Example 135		28	2					31(A)	3(B)
Example 136		29	2					31(A)	3(B)
Example 137		30	2					30(A)	3(B)
Example 138		31	2					30(A)	0(A)
Example 139		32	2					33(A)	20(D)
Example 140		33	2					32(A)	15(D)
Example 141		34	2					33(A)	14(D)
Example 142		35	2					31(A)	15(D)
Example 143	36	2	31(A)	13(D)					
Example 144	37	2	33(A)	15(D)					
Example 145	38	2	32(A)	15(D)					
Example 146	39	2	33(A)	10(D)					
Example 147	40	2	31(A)	10(D)					

[0115]

[Table 12]

	Plated steel sheet (refer to Table 3)	Organic treatment		Conditions for contacting with water vapor				Blackness degree	Corrosion resistance
		Treatment liquid No. (refer to Table 10)	Film thickness (μm)	Temperature ($^{\circ}\text{C}$)	Relative humidity (%)	Oxygen concentration (%)	Treatment time (hour)	Lightness (L* value)	White-rusted area ratio (%)
Example 148	52	16	2	110	90	4	21	32(A)	8(C)
Example 149		17	2					31(A)	4(B)
Example 150		18	2					33(A)	4(B)
Example 151		19	2					32(A)	3(B)
Example 152		20	2					33(A)	3(B)
Example 153		21	2					30(A)	3(B)
Example 154		22	2					32(A)	4(B)
Example 155		23	2					33(A)	3(B)
Example 156		24	2					32(A)	3(B)
Example 157		25	2					31(A)	4(B)
Example 158		26	2					30(A)	0(A)
Example 159		27	2					32(A)	8(C)
Example 160		28	2					33(A)	4(B)
Example 161		29	2					32(A)	4(B)
Example 162		30	2					31(A)	4(B)
Example 163		31	2					32(A)	0(A)
Example 164		32	2					31(A)	25(D)
Example 165		33	2					33(A)	17(D)
Example 166		34	2					32(A)	15(D)
Example 167		35	2					30(A)	14(D)
Example 168	36	2	32(A)	12(D)					
Example 169	37	2	32(A)	17(D)					
Example 170	38	2	33(A)	14(D)					
Example 171	39	2	31(A)	11(D)					
Example 172	40	2	33(A)	13(D)					

[0116] In the present example, after an organic resin coating film was formed on a hot-dip Al and Mg-containing Zn-plated steel sheet, the plated steel sheet having the organic resin coating film was contacted with water vapor so as to be blackened. In this instance, the formation of an organic resin coating film insufficiently improved the

corrosion resistance in some cases (refer to Examples 139 to 147, and 164 to 172). The formation of the inorganic coating film or the organic coating film of the present invention on a plating layer did not interfere blackening. In contrast, the black-plated steel sheet in Examples 123 to 138 and 148 to 163 having a urethane-based resin coating film in combination of an ether-based polyol and an ester-based polyol with a proportion of the ether-based polyol of 5 to 30% had sufficient corrosion resistance. It was also found that the addition of an organic acid to the urethane-based resin coating film further improved the corrosion resistance compared to the addition of a valve metal compound or a phosphate (refer to Examples 133, 138, 158 and 163). A 180 degree bending test was also performed for each of the plated steel sheets after water vapor treatment (Examples 123 to 172). In the 180 degree bending test, a sample piece cut out from each of the plated steel sheets was bent at 180 degrees (3 t), and the cellophane tape peeling test was performed for the bent part. As a result, no peeling was found for any one in Examples 123 to 172.

15 [0117] [Example 6]

A black-plated steel sheet in Example 39 (L^* value: 32) and a black-plated steel sheet in Example 55 (L^* value: 30) in Table 4 were coated with an inorganic chemical treatment liquid shown in Table 5, and placed in an electric oven without washing with water so as to be heated and dried under conditions for the plate temperature to reach 20 140°C. Consequently an inorganic coating film was formed on the surface of the black-plated steel sheet.

[0118] A corrosion resistance testing was performed for each of the plated steel sheets having the inorganic coating film (Examples 173 to 204). The corrosion resistance testing was performed in accordance with JIS Z 2371 in the same way as in Example 3. The results of the corrosion resistance testing for each plated steel sheet are shown in Table 13.

[0119]

[Table 13]

	Black-plated steel sheet (refer to Table 4)	Inorganic treatment		Corrosion resistance
		Treatment liquid No. (refer to Table 8)	Attachment amount of valve metal (mg/m ²)	White-rusted area ratio (%)
Example 173	Example 39	1	Ti:20	0(A)
Example 174		2	Ti:10	0(A)
Example 175		3	Ti:30	0(A)
Example 176		4	V:40	0(A)
Example 177		5	V:25	0(A)
Example 178		6	Zr:15	0(A)
Example 179		7	Zr:80	0(A)
Example 180		8	Hf:70	0(A)
Example 181		9	Si:100	0(A)
Example 182		10	Al:120	0(A)
Example 183		11	W:60	0(A)
Example 184		12	Nb:85	0(A)
Example 185		13	Ta:50	0(A)
Example 186		14	V:30	0(A)
Example 187		15	Zr:45	0(A)
Example 188		None		74(D)
Example 189	Example 55	1	Ti:20	0(A)
Example 190		2	Ti:10	0(A)
Example 191		3	Ti:30	0(A)
Example 192		4	V:40	0(A)
Example 193		5	V:25	0(A)
Example 194		6	Zr:15	0(A)
Example 195		7	Zr:80	0(A)
Example 196		8	Hf:70	0(A)
Example 197		9	Si:100	0(A)
Example 198		10	Al:120	0(A)
Example 199		11	W:60	0(A)
Example 200		12	Nb:85	0(A)
Example 201		13	Ta:50	0(A)
Example 202		14	V:30	0(A)
Example 203		15	Zr:45	0(A)
Example 204		None		76(D)

[0120] From Table 13, it was proved that the formation of an inorganic coating film

5 further improves the corrosion resistance of a black-plated steel sheet.

[0121] A 180 degree bending test was also performed for each of the plated steel sheets after water vapor treatment (Examples 173 to 204). In the 180 degree bending test, a sample piece cut out from each of the plated steel sheets was bent at 180 degrees (3 t), and the cellophane tape peeling test was performed for the bent part. As a result, no peeling was found for any one in Examples 173 to 204.

[0122] The present application claims priority based on Japanese Patent Application No. 2012-100437 filed on April 25, 2012 and Japanese Patent Application No. 2012-134807 filed on June 14, 2012. The disclosure in specification and drawing of the applications is incorporated herein by reference in its entirety.

Industrial Applicability

[0123] The black-plated steel sheet of the present invention is excellent in the design, the retention of black appearance, and the press formability, being applicable as a plated steel sheet for, for example, roofing materials and exterior materials of a building, home appliances, and automobiles.

[0124] Mere reference to background art herein should not be construed as an admission that such art constitutes common general knowledge in relation to the invention.

[0125] Throughout this specification, including the claims, where the context permits, the term “comprise” and variants thereof such as “comprises” or “comprising” are to be interpreted as including the stated integer or integers without necessarily excluding any other integers.

CLAIMS

1. A black-plated steel sheet comprising a hot-dip Al and Mg-containing Zn-plated layer which comprises 1.0 to 22.0mass% of Al and 1.3 to 10.0mass% of Mg, with a
5 black oxide of Zn distributed in a lamellar form in the plating layer,
the hot-dip Al and Mg-containing Zn-plated layer having a surface lightness represented by L* value of 60 or less.
2. The black-plated steel sheet according to claim 1, wherein the black oxide of Zn
10 is an oxide of Zn derived from a Zn₂Mg phase.
3. The black-plated steel sheet according to claim 1 or 2, further comprising an inorganic coating film on the hot-dip Al and Mg-containing Zn-plated layer.
- 15 4. The black-plated steel sheet according to claim 3, wherein the inorganic coating film comprises one or more compounds selected from the group consisting of an oxide of valve metal, an oxoate of valve metal, a hydroxide of valve metal, a phosphate of valve metal, and a fluoride of valve metal,
the valve metal is one or more metals selected from the group consisting of Ti,
20 Zr, Hf, V, Nb, Ta, W, Si and Al.
5. The black-plated steel sheet according to claim 1 or 2, further comprising an organic resin coating film on the hot-dip Al and Mg-containing Zn-plated layer.
- 25 6. The black-plated steel sheet according to claim 5, wherein an organic resin comprised in the organic resin coating film is urethane-based resin obtained by the

reaction of polyols including an ether-based polyol and an ester-based polyol with polyisocyanate,

a proportion of the ether-based polyol in the polyols being 5 to 30mass%.

5 7. The black-plated steel sheet according to claim 6, wherein the organic resin coating film further comprises a polyvalent phenol.

8. The black-plated steel sheet according to any one of claims 5-7, wherein the organic resin coating film comprises a lubricant.

10

9. The black-plated steel sheet according to any one of claims 5-8, wherein the organic resin coating film comprises one or more compounds selected from the group consisting of an oxide of valve metal, an oxoate of valve metal, a hydroxide of valve metal, a phosphate of valve metal, and a fluoride of valve metal,

15

the valve metal is one or more metals selected from the group consisting of Ti, Zr, Hf, V, Nb, Ta, W, Si and Al.

10. The black-plated steel sheet according to any one of claims 5-9, wherein the organic resin coating film is a laminate layer or a coating layer.

20

11. The black-plated steel sheet according to any one of claims 5-10, wherein the organic resin coating film is a clear coating film.



FIG. 1A

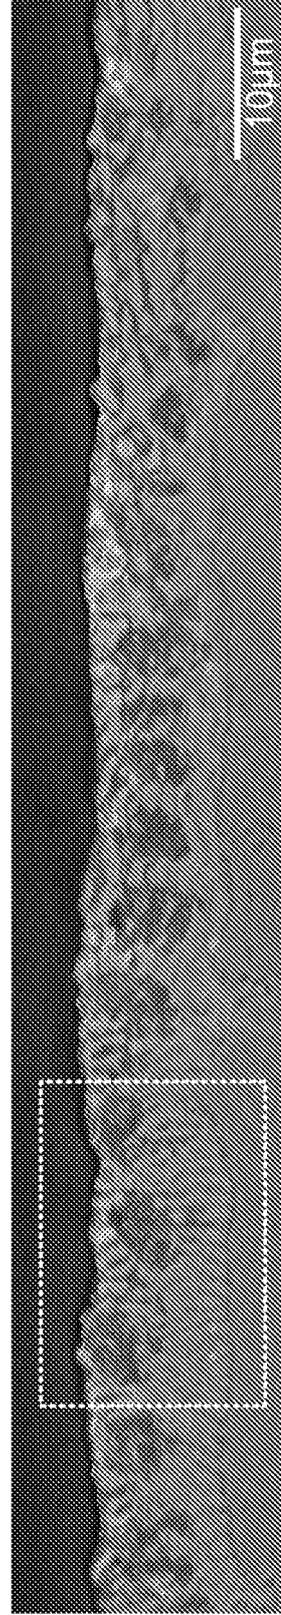


FIG. 1B

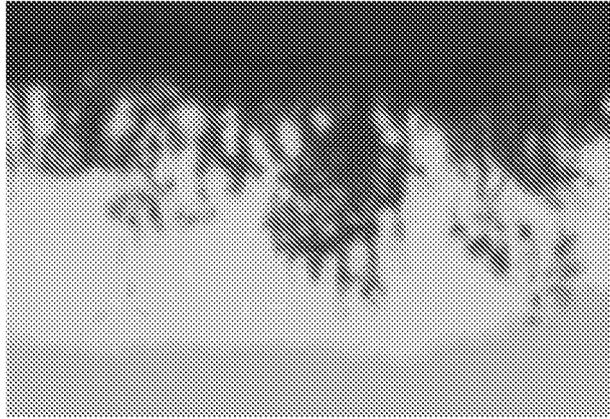


FIG. 2A

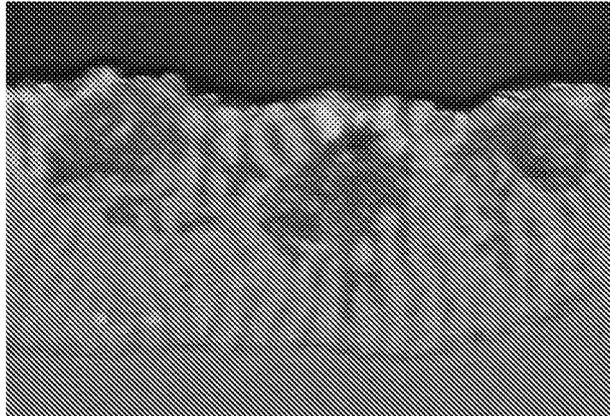


FIG. 2B

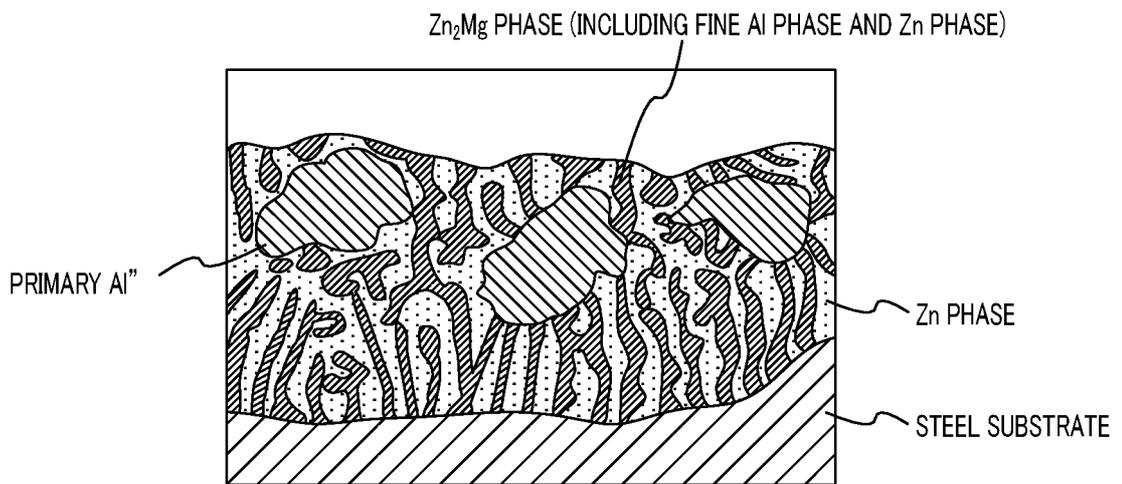


FIG. 2C

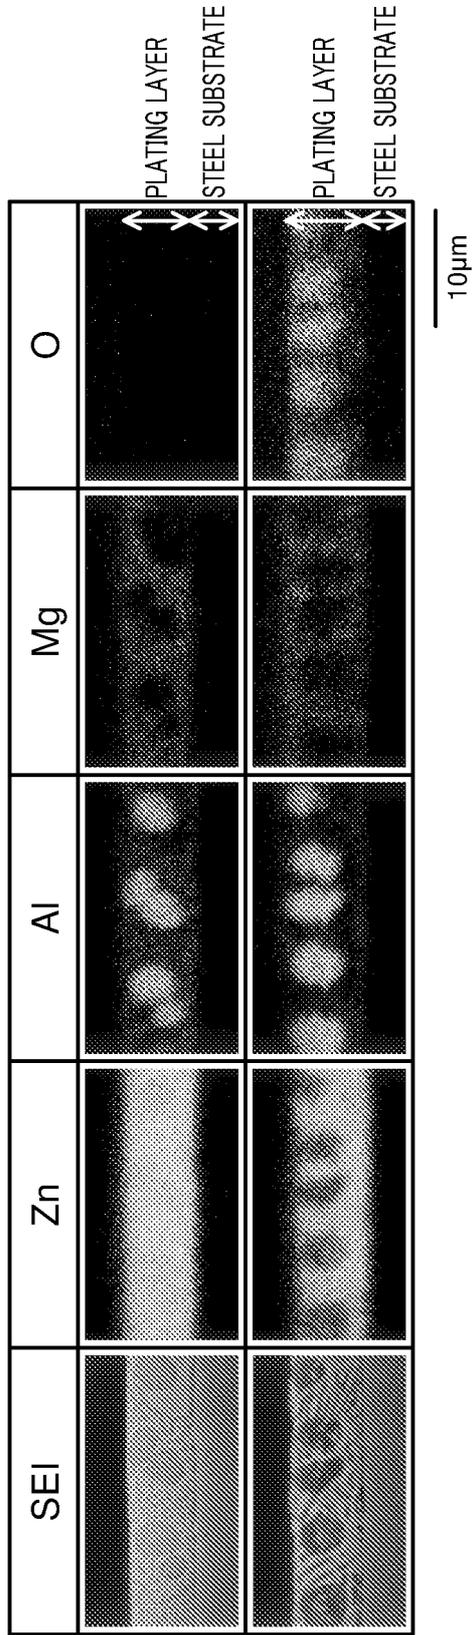


FIG. 3

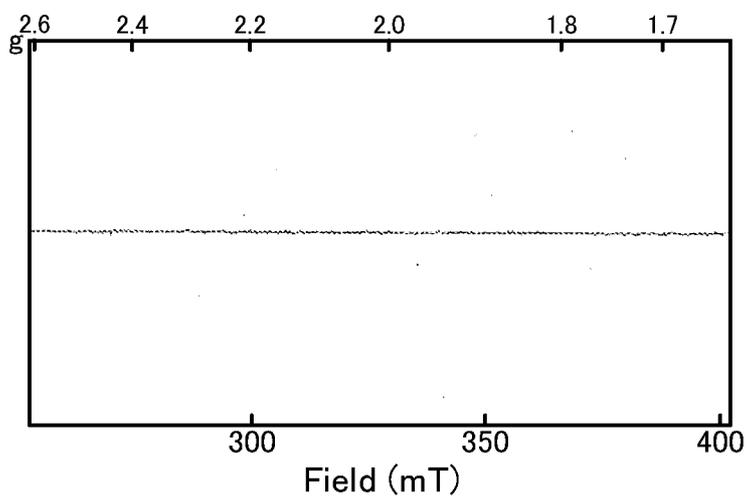


FIG. 4A

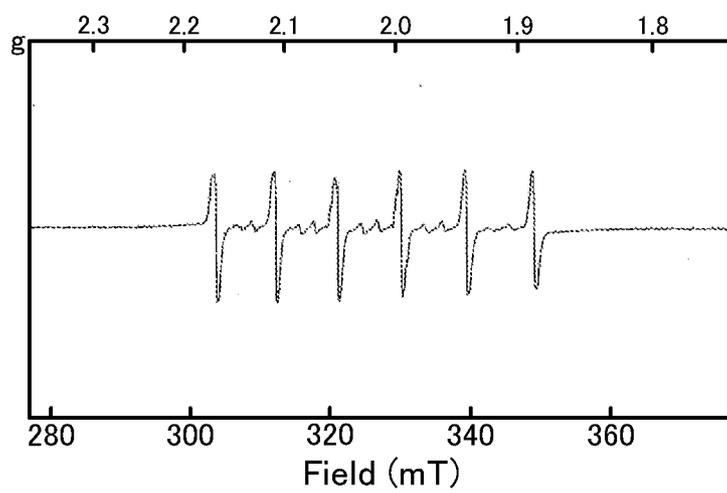


FIG. 4B

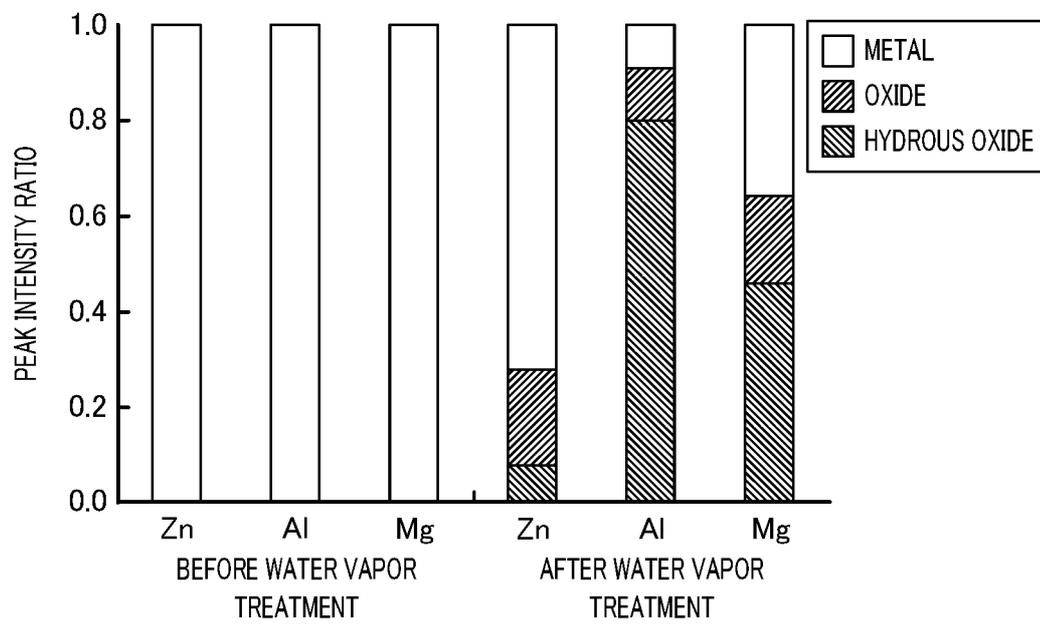


FIG. 5

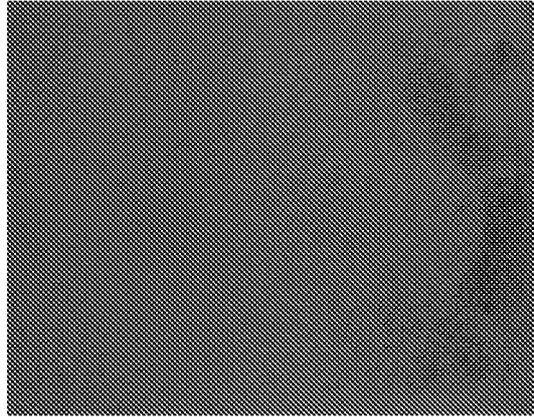


FIG. 6A

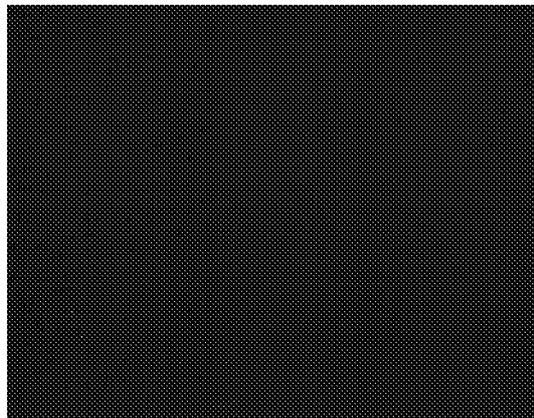


FIG. 6B