



(22) 1996/12/12

(43) 1998/03/13

(45) 2001/07/03

(72) Stav, Elisha, US

(72) Burkard, Edward A., US

(72) Finkelstein, Ronald S., US

(73) NATIONAL GYPSUM PROPERTIES LLC, US

(51) Int.Cl.<sup>6</sup> C04B 11/30, C09K 21/02, B32B 13/00

(30) 1996/09/13 (08/713,727) US

(54) **COMPOSITIONS CIMENTAIRES CONTENANT DU GYPSE ET  
MATERIAUX FABRIQUES A PARTIR DE CES  
COMPOSITIONS**

(54) **CEMENTITIOUS GYPSUM-CONTAINING COMPOSITIONS  
AND MATERIALS MADE THEREFORE**

(57) A cementitious composition useful for water-resistant construction materials, including floor underlayments, backing boards, self-leveling floor materials, road patching materials, fiberboard, fire-proofing sprays, and fire-stopping materials includes about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate, about 10 wt.% to about 50 wt.% Portland cement, about 4 wt.% to about 20 wt.% silica fume and about 1 wt.% to about 50 wt.% pozzolanic aggregate. The Portland cement component may also be a blend of Portland cement with fly ash and/or ground blast slag.

2192733

CEMENTITIOUS GYPSUM-CONTAINING COMPOSITIONS  
AND MATERIALS MADE THEREFROM

ABSTRACT OF THE DISCLOSURE

A cementitious composition useful for water-resistant construction materials, including floor underlayments, backing boards, self-leveling floor materials, road patching materials, fiberboard, fire-proofing sprays, and fire-stopping materials includes about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate, about 10 wt.% to about 50 wt.% Portland cement, about 4 wt.% to about 20 wt.% silica fume and about 1 wt.% to about 50 wt.% pozzolanic aggregate. The Portland cement component may also be a blend of Portland cement with fly ash and/or ground blast slag.

CEMENTITIOUS GYPSUM-CONTAINING COMPOSITIONS  
AND MATERIALS MADE THEREFROM

5

10

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates to cementitious compositions and in particular to cementitious construction materials such as floor underlayments, backer boards, floor and road patching materials, fiberboard, fire-proofing sprays, and fire-stopping materials made from a composition comprising gypsum, Portland cement and silica fume.

Description of Related Technology

Construction materials, such as backer boards for showers and floor underlayments, typically do not contain gypsum because gypsum-containing materials are usually not water resistant. However, gypsum is a desirable component in construction materials due to its rapid cure and early strength characteristics. Attempts to improve the water-resistance of gypsum boards by mixing Portland cement and gypsum (calcium sulfate hemihydrate) have met with limited success because such a mixture can result in the formation of ettringite, which causes expansion of the gypsum/Portland cement product and thus leads to its deterioration. Ettringites are formed when

tricalcium aluminate ( $3\text{CaO}\cdot\text{Al}_2\text{O}_3$ ) in the Portland cement reacts with sulfate.

A cementitious composition useful as a pavement patching compound which contains Portland cement and alpha gypsum is disclosed in Harris, U.S. Patent No. 4,494,990. The composition also includes a pozzolan source, such as, for example, silica fume, fly ash or blast furnace slag. The Harris patent discloses that the pozzolan blocks the interaction between the tricalcium aluminate and the sulfate from gypsum. The Harris patent discloses mixing a three-component blend of Type I Portland cement, alpha gypsum and silica fume with a fine aggregate to prepare a mortar used to cast mortar cubes for evaluating the strength of the resulting composition.

Ortega et al., U.S. Patent No. 4,661,159 discloses a floor underlayment composition that includes alpha gypsum, beta gypsum, fly ash and Portland cement. The patent also discloses that the floor underlayment material can be used with water and sand or other aggregate to produce a fluid mixture which may be applied to a substrate.

#### SUMMARY OF THE INVENTION

It is an object of the invention to overcome one or more of the problems described above.

According to the invention, a cementitious composition includes about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate, about 10 wt.% to about 50 wt.% Portland cement, about 4 wt.% to about 20 wt.% silica fume and about 1 wt.% to about 50 wt.% pozzolanic aggregate. The Portland cement component may also be a blend of Portland cement

with fly ash and/or ground blast slag. The invention further includes construction compositions and materials made from the inventive cementitious composition.

5 Other objects and advantages of the invention will be apparent to those skilled in the art from the following detailed description taken in conjunction with the drawings and the appended claims.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of a covered board according to the invention.

15 Fig. 2 is a graph depicting compressive strength vs. curing time for a composition #1 according to the invention and a comparative composition #2.

20 Fig. 3 is a scanning electron microscope (SEM) micrograph (500x) of a board made from a composition according to the invention disclosed in Example 3.

Fig. 4 is an SEM micrograph (100x) of the board shown in Fig. 3.

Fig. 5 is an SEM micrograph (1000x) of the board shown in Fig. 3.

25 DETAILED DESCRIPTION OF THE INVENTION

30 According to the invention, a composition for use in construction materials is provided which is particularly useful in areas where water resistance is an important consideration, such as for backer boards for baths and showers, floor underlay applications and exterior sheathing boards. Further uses of the inventive composition include materials such as self-leveling floors and road

patching materials, fire-proofing sprays, fire-stopping materials, and fiberboard.

Compositions according to the invention include about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate (i.e., beta-gypsum), about 5 10 wt.% to about 50 wt.% Portland cement (Type III is preferred), about 4 wt.% to about 20 wt.% silica fume, and about 1 wt.% to about 50 wt.% pozzolanic aggregate as filler.

10 The beta-gypsum component of the inventive composition is calcium sulfate beta hemihydrate, commonly referred to as stucco. Beta-gypsum is traditionally less expensive than alpha-gypsum. Alpha-hemihydrate powder has a higher apparent 15 density and smaller related surface area than beta-hemihydrate, resulting in a lower water requirement for the same workability and a higher compressive strength of the set material. However, boards made from the inventive composition have exhibited more 20 than adequate strength for interior applications such as backer boards and floor underlayments and exterior applications, such as exterior sheeting and eaves.

The Portland cement component of the 25 composition according to the invention may be any of Types I, II, III, IV, or IV (or mixtures thereof) as set forth according to ASTM standards. However, Type III Portland cement is preferred. Type III Portland cement cures faster than Type I and Type II 30 Portland cement and exhibits an early high strength.

Blended cements also may be used in compositions according to the invention. Blended cements are blends of Portland cement with one or more pozzolanic materials such as fly ash and blast- 35 furnace slag. The pozzolanic materials that are

added to produce a "blend" with Portland cement are distinguished from the pozzolanic aggregate filler component according to the invention of the application in that the components of the cement "blend" have a particle size which is in the same range as the particle size range of Portland cement. Portland cement particle size may be defined as having approximately 15% of the particles retained on a 325 mesh screen. In other words, at least 85% of the Portland cement particles pass through a 325 mesh screen (allows particles having a diameter of up to 45 microns to pass through). Thus, for example, blast furnace slag and certain fly ash must be ground prior to mixing with Portland cement to result in a "blend" for use in the invention.

The silica fume component of compositions according to the invention is an extremely active pozzolan and prevents the formation of ettringite. Silica fume is very fine (particle average diameter of between about 0.1 microns and about 0.3 microns), has a high surface area (between about 20 meter<sup>2</sup>/gram and about 30 meter<sup>2</sup>/gram), and is highly amorphous (between about 98 wt.% and about 100 wt.% amorphous SiO<sub>2</sub> (glassy material)).

The pozzolanic aggregate filler component of compositions according to the invention may be a natural or man-made filler that contains a high percentage of amorphous silica. Natural pozzolanic aggregates are of volcanic origin and include trass, pumice, and perlite. Man-made pozzolanic aggregate fillers include fly ash and FILLITE™ (hollow silicate) spheres which may be made from fly ash; produced by Fillite Division of Boliden Intertrade, Inc. Atlanta, Georgia). As compared to cement "blend" components of the invention, pozzolanic aggregates

used as fillers according to the invention are defined herein as having an average particle size larger than that of Portland cement (i.e., average particle size larger than 45 microns).

5           Pozzolanic aggregate fillers contain a high percentage of amorphous silica which possesses little or no cementitious properties. However, in the presence of moisture, pozzolanic aggregates have surfaces that are chemically reactive with calcium  
10 hydroxide at standard temperatures to form hydrated calcium silicate (CSH) which, in compositions and methods according to the invention, are believed to become a homogeneous part of a cementitious system due also to the presence of the finely divided  
15 pozzolan of the invention, silica fume.

Compositions according to the invention which include both a pozzolanic aggregate and a finely divided pozzolan result in cementitious materials wherein the transition zone between the aggregate  
20 and a cement paste is densified and thus produces a cured product of higher compressive strength than compositions which utilize a pozzolanic aggregate alone or a finely divided pozzolan alone. It is believed that the mechanism which causes changes in  
25 the microstructure of compositions according to the invention to result in higher compressive strengths is associated with two effects: a pozzolanic effect and a micro-filler effect (due to the fine size and spherical shape of the silica fume).

30           Compositions for construction materials such as backer boards and floor underlays according to the invention preferably include about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate (about 30 wt.% to about 50 wt.% is preferred), about  
35 10 wt.% to about 50 wt.% Portland cement (about 6

wt.% to about 35 wt.% is preferred), about 4 wt.% to about 20 wt.% silica fume (about 4 wt.% to about 10 wt.% is preferred), and about 10 wt.% to about 50 wt.% a pozzolanic aggregate filler (about 25 wt.% to about 35 wt.% is preferred). A preferred aggregate filler for use in such construction materials is pumice. Pumice is desirable as it is relatively light weight and can be sized to result in a product of desirable strength and physical properties. For example, Hess Pumice Products Inc. manufactures a size No. 10 pumice aggregate that measures about 93% greater than 1400 microns, while the size No. 5 pumice aggregate has a particle size measurement of about 23% greater than 1400 microns.

Although fillers such as calcium carbonate, crystalline silica and different types of clay could be included in the composition, it has been found that the use of a pozzolanic aggregate filler results in a product according to the invention having superior properties. As explained above, this is believed to occur because the surfaces of the pozzolanic aggregate filler react with free lime to form hydrated calcium silicate (pozzolanic reaction) which becomes part of the product matrix. Such a reaction is only possible with pozzolanic aggregate fillers.

The composition according to the invention produces building materials which set up quickly, exhibit high strength and durability, and are water resistant. Gypsum boards produced from compositions according to the invention may be produced on a continuous line. Because the composition according to the invention sets up quickly (typically in three minutes or less), building materials made from the composition can be handled (e.g. sheets can be cut

into smaller sheets or boards) much faster than products made from Portland cement alone. Unlike traditional gypsum board, boards or other products made from a composition according to the invention do not require kiln drying, and in fact, kiln drying should be avoided.

With reference to Figure 1, a backer board 1 according to the invention comprises a core 3 made from a cementitious composition according to the invention and adjacent cover sheets 5 and 7 disposed at either side thereof. Such a board may be manufactured by the following process:

Raw gypsum may be calcined at about 160°C (320°F) to about 175°C (347°F) to form calcium sulfate hemihydrate. The calcined gypsum can be post-ground to a finer particle size if, for example, certain strengths, water requirements, and working properties are desired. The gypsum powder is fed to a mixer and blended with Portland cement, silica fume and a pozzolanic aggregate filler. The pozzolanic filler may be pumice, perlite, trass, or fly ash or a mixture thereof. Other ingredients that may be included in the composition are set control additives (e.g. accelerators), water reducing agents, water repellent additives and latex or polymer modifiers. The resulting blend is combined with a slight stoichiometric excess of water to produce a slurry. The slurry, which forms the core 3 of the board, is poured onto a lower, continuous cover sheet 5 which is disposed on a conveyor. Then, an upper continuous cover sheet 7 is placed on the core as it moves on the conveyor. The cover sheets 5 and 7 are preferably made from fiberglass matt, fiberglass scrim, or a composite of both. The cover sheets may also be made from

polyethylene, polypropylene or nylon; however, such materials are not as desirable as fiberglass as they are more expensive. As the slurry sets, scrim and mat are imbedded into the slurry matrix during the forming process. As the covered board moves along the conveyor line in a continuous sheet, the board gains sufficient strength so that it can be handled. The board is then cut into sections, (for backer boards, usually either 3 ft. x 5 ft. or 3 ft. x 4 ft. sheets) and transferred to pallets. The board thickness preferably ranges between about 1/8 inch and about 5/8 inch. The boards are then preferably stacked and cured from one to seven days (particularly preferred about three days) at a temperature of about 16°C (60°F) to about 27°C (80°F) (i.e. room temperature) and a humidity of about 40% to about 70%, after which the boards may be sent to a customer. The stacking of the boards advantageously provides a moist environment for curing. The boards may be cured at temperatures and humidities outside of the above-stated ranges resulting in an acceptable product. However, this may extend the curing time. A board according to the invention usually substantially reaches its full strength about fourteen to about twenty-eight days after formation.

When preparing a board or other product according to the invention, the forced drying required for gypsum board should be avoided. An alternative curing procedure is to cover or wrap the boards in plastic wrapping for about three days to retain moisture for continuous curing. Such covered boards have exhibited about 50% higher strength than normal gypsum boards of the same density. Also, the

covered boards develop about 70% to about 80% of their ultimate strength in three days.

When a board or other product having a thickness of about 1/8 inch is desired, the cementitious composition thereof preferably includes  
5 about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate, about 10 wt.% to about 50 wt.% Portland cement, about 4 wt.% to about 20 wt.% silica fume, and about 1 wt.% to about 50 wt.% pozzolanic  
10 aggregate filler, resulting in a very strong thin product, especially useful, for example, for floor underlayments. A preferred cementitious composition for use in very thin boards (i.e. about 1/8 inch) and floor underlayments includes about 70 wt.% to  
15 about 75 wt.% calcium sulfate beta hemihydrate (about 74 wt.% is particularly preferred), about 15 wt.% to about 40 wt.% Portland cement (about 35 wt.% is particularly preferred), about 4 wt.% to about 10 wt.% silica fume (about 10 wt.% is particularly  
20 preferred), and about 1 wt.% to about 25 wt.% pozzolanic filler.

Compositions according to the invention may also be used to prepare self-leveling floor compositions and road patching materials. In such  
25 materials, a master blend composition according to the invention is prepared which includes about 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate (i.e. beta-gypsum) (about 30 wt.% to about 50 wt.% is preferred), about 10 wt.% to about  
30 50 wt.% Portland cement (about 6 wt.% to about 25 wt.% is preferred), about 4 wt.% to about 20 wt.% silica fume (about 4 wt.% to about 8 wt.% is preferred), and about 1 wt.% to about 50 wt.% a pozzolanic aggregate filler (about 1 wt.% to about  
35 15 wt.% is preferred; about 1 wt.% to about 5 wt.%

particularly preferred). The master blend is then mixed with silica aggregates (i.e., predominately quartz local sand) to form the floor or road patching material.

5 Preferably, a self-leveling floor composition according to the invention includes (i) about 25 wt.% to about 75 wt.% of the master blend; and (ii) about 75 wt.% to about 25 wt.% sand. Most preferably, a self-leveling floor composition master  
10 blend includes about 71 wt.% calcium sulfate beta-hemihydrate, about 20 wt.% Portland cement, about 6 wt.% silica fume and about 2 wt.% FILLITE™ pozzolanic filler. Because of its low density, FILLITE™  
15 addition of amounts as low as about 1 wt.% of the composition provide a considerable volume of filler (see Example 2, Table II for FILLITE™ physical properties).

A road patching composition according to the invention includes (i) about 25 wt.% to about  
20 100 wt.% of the master blend described herein with respect to the self-leveling floor compositions of the invention; and (ii) about 75 wt.% to about 0 wt.% sand.

Compositions according to the invention  
25 may also be used in fiberboards according to the invention. Such fiberboards include (i) about 70 wt.% to about 90 wt.% of the master blend described herein with respect to the self-leveling floor compositions and road patching compositions of the  
30 invention; and (ii) about 30 wt.% to about 10 wt.% of a fiber component. The fiber component is preferably selected from the following: wood fibers, paper fibers, glass fibers, polyethylene fibers, polypropylene fibers, nylon fibers, and  
35 other plastic fibers.

Most preferably, a master blend according to the invention for use in such a fiberboard includes about 74 wt.% calcium sulfate beta-hemihydrate, about 20 wt.% Portland cement, and  
5 about 6 wt.% silica fume.

Fire-proofing sprays and fire-stopping materials may also be prepared utilizing compositions according to the invention. Such fire-proofing and fire-stopping materials include about  
10 20 wt.% to about 75 wt.% calcium sulfate beta-hemihydrate (about 30 wt.% to about 50 wt.% is preferred), about 10 wt.% to about 50 wt.% Portland cement (about 10 wt.% to about 25 wt.% is preferred), about 4 wt.% to about 20 wt.% silica  
15 fume (about 4 wt.% to about 10 wt.% is preferred), and about 1 wt.% to about 50 wt.% a pozzolanic aggregate filler (about 1 wt.% to about 10 wt.% is preferred). Preferably, the pozzolanic filler is FILLITE or perlite or mixtures thereof. Fire-  
20 proofing sprays and fire-stopping materials according to the invention also preferably include about 1 wt.% to about 30 wt.% unexpanded vermiculite filler. Such fire-proofing and fire-stopping materials may also include up to about 2 wt.% glass  
25 fibers and up to about 2 wt.% of a thickening agent. The thickening agent is preferably selected from the following: cellulose derivatives, acrylic resins and mixtures thereof.

30

EXAMPLE 1

A cementitious composition according to the invention was prepared with components set forth in the amounts stated in Table I below:

TABLE I

	<u>Material</u>	<u>Weight Percent</u>
	Beta-gypsum (Stucco)	45.1
	Type III Portland Cement	19.2
5	Silica Fume	9.5
	Pumice Filler	24.6
	Perlite	1.47
	W.R.A. <sup>1</sup>	0.87
	Water Repellent Agent <sup>2</sup>	0.11
10	Accelerator (ball-milled $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ gypsum dihydrate <sup>3</sup> )	0.042

<sup>1</sup> Water reducing agent or wetting agent including  
15 lignosulfonates and/or naphthalene sulfonates  
manufactured by Georgia Pacific Corp. and Henkel  
Corp., respectively.

<sup>2</sup> A silicone product or like material, e.g.,  
20 Veoceil 2100 and Veoceil 1311 (both TM designations  
of products manufactured by Wacker Silicone Corp.)

<sup>3</sup> See U.S. Patent Nos. 3,920,465, 3,870,538  
and 4,019,920

The materials identified in Table I were  
mixed and 100 grams thereof was mixed with 35.6  
25 grams of water. About 1 wt.% to about 5 wt.% of a  
polymer latex (acrylic or SBR) was added to the  
mixture to improve flexibility. The mixture was  
then formed into boards according to the invention  
using a glass matt/scrim composite. The boards were  
30 tested for water absorption, nail holding  
properties, deflection, compression strength (wet  
and dry), water wicking characteristics and other  
ASTM specification requirements. The boards met the  
ASTM specifications with respect to each test.

2192733

- 14 -

EXAMPLE 2

A self-leveling floor composition #1 according to the invention was prepared with the components set forth in the amounts stated in Table II below. A cementitious composition #2 with components also set forth in the amounts stated in Table II below (which did not include a pozzolanic filler) was also prepared.

TABLE II

	<u>Material</u>	<u>Composition #1</u> <u>(weight percent)</u>	<u>Composition #2</u> <u>(weight percent)</u>
	Beta-Gypsum (Stucco)	36.1	40.0
5	Type III Portland Cement	9.8	10.8
	Silica Fume	2.96	3.24
	FILLITE™ 500 Pozzolanic Filler <sup>1</sup>	0.0	1.35
10	Sand (quartz; crystallized silica)	49.4	43.26
	W.R.A. <sup>2</sup>	0.82	0.9
15	Retarder <sup>3</sup>	0.06	0.06
	Anti-foaming agent <sup>4</sup>	0.33	0.26

<sup>1</sup> Fillite Division of Boliden Intertrade, Inc., Atlanta Georgia. Hollow silicate spheres with the following physical properties: average particle density of 0.6-0.8 g/cc; average bulk density of 0.35-0.45 g/cc; and typical particle size of 5-300 microns. The shell composition includes 27 wt.% to 33 wt.% Al<sub>2</sub>O<sub>3</sub>, 55 wt.% to 65 wt.% SiO<sub>2</sub>, and maximum of 4 wt.% Fe<sub>2</sub>O<sub>3</sub>.

<sup>2</sup> Water reducing agent or wetting agent including lignosulfonates and/or naphthalene sulfonates manufactured by Georgia Pacific Corp. and Henkel Corp., respectively.

<sup>3</sup> A natural protein-based material.

<sup>4</sup> A vegetable oil-based dry powder.

In order to form a floor composition of a smooth consistency, composition #1 was mixed with about 26 wt.% water and composition #2 was mixed with about 24 wt.% water. The density of composition #1 was 107 lbs./ft<sup>3</sup>. The density of composition #2 was 111.62 lbs./ft<sup>3</sup>.

Both compositions were allowed to dry at about 21°C (70°F) and a relative humidity of about 50%. The compressive strengths of samples (2 inch by 2 inch by 2 inch cubes) of each of the  
5 compositions were tested after 2 hours of drying, and after 1, 3, 7 and 28 days by pressing in an Instron press according to ASTM C472-9A.

The results of the compressive strength tests are shown in Fig. 2. Composition #1 according  
10 to the invention exhibited a greater compressive strength than Composition #2 for all samples tested. Although the compressive strengths of both compositions were similar after curing for 28 days, the advantage of a composition according to the  
15 invention is evident when the densities of the two compositions are taken into consideration. Typically, a composition having a higher density should also exhibit a higher compressive strength. However, in this instance, Composition #1 according  
20 to the invention had a lower density than Composition #2, and yet exhibited a slightly higher compressive strength.

### EXAMPLE 3

A cementitious composition according to  
25 the invention was prepared with components set forth in the amounts stated in Table III below:

TABLE III

	<u>Material</u>	<u>Weight Percent</u>
	Beta-gypsum (Stucco)	35.9
	Type III Portland Cement	15.6
5	Silica Fume	7.8
	Pumice Filler	39.5
	W.R.A. <sup>1</sup>	0.87
	Water Repellent Agent <sup>2</sup>	0.11
10	Accelerator (ball-milled $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ gypsum dihydrate <sup>3</sup> )	0.058
15	<sup>1</sup> Water reducing agent or wetting agent including lignosulfonates and/or naphthalene sulfonates manufactured by Georgia Pacific Corp. and Henkel Corp., respectively.	
	<sup>2</sup> A silicone product or like material, e.g., Veoceil 2100 and Veoceil 1311 (both TM designations of products manufactured by Wacker Silicone Corp.)	
20	<sup>3</sup> See U.S. Patent Nos. 3,920,465, 3,870,538 and 4,019,920	

The materials identified in Table III were mixed and 100 grams thereof was mixed with 35.6 grams of water. About 1 wt.% to about 5 wt.% of a polymer latex (acrylic or SBR) was added to the mixture to improve flexibility. The mixture was then formed into boards according to the invention using a glass matt/scrim composite. The boards were tested for water absorption, nail holding properties, deflection, compression strength (wet and dry), water wicking characteristics and other ASTM specification requirements. The boards met the ASTM specifications with respect to each test.

The scanning electron microscope (SEM) micrographs shown in Figs. 3, 4, and 5 were made of a cured sample of Example 3. An arrow 30 points to

pumice in the sample, illustrating that in a composition according to the invention, the pumice becomes part of the hydrated calcium silicate (CSH) matrix, substantially eliminating any transition zone 32 between the pumice filler and the cement paste.

EXAMPLE 4

A cementitious master blend binder according to the invention was prepared with the components set forth in the amounts stated in Table IV below:

TABLE IV

	<u>Material</u>	<u>Approx. Weight Percent</u>
	Beta-gypsum (Stucco)	40
15	Type III Portland Cement	46
	Silica Fume	14
	Accelerator <sup>1</sup>	0.35

<sup>1</sup> BMA (board milling accelerator, a fine-ground gypsum produced by National Gypsum Company).

The materials identified in Table IV were mixed to form the master blend binder. Then, about 75 wt.% of the binder was mixed with about 25 wt.% pumice aggregate (Hess Products, Inc., Malard City, Idaho) and 100 grams thereof was mixed with 43 grams of water. To improve the workability of the mixture, a water reducing agent (lignosulfonates and/or naphthalene sulfonates manufactured by Georgia Pacific Corp. and Henkel Corp.,

respectively) was added. The mixture was then formed into two-inch by two-inch (2" x 2") cubes to evaluate strength gain over the time lapse of twenty-eight days. The cubes were sealed in a plastic bag and kept at room temperature (about 25°C).

For the purpose of comparison, about 75 wt.% of the master blend binder of Table IV was mixed with about 25 wt.% of CaCO<sub>2</sub>, a non-pozzolanic aggregate having about the same particle size as the pumice, and 100 grams thereof was mixed with 44 grams of water. This mixture also was formed into two-inch by two-inch (2" x 2") cubes to evaluate strength gain over the time lapse of twenty-eight days. The cubes were sealed in a plastic bag and kept at room temperature (about 25°C)

The density and wet compressive strengths for the samples made according to the invention and the comparative samples made with CaCO<sub>3</sub> were measured and are shown in Table V below:

TABLE V

Time Elapsed	Sample Made With Pozzolanic Aggregate		Sample Made With Non-Pozzolanic Aggregate	
Days	Density <sup>1</sup>	Wet Compressive Strength <sup>2</sup>	Density <sup>1</sup>	Wet Compressive Strength <sup>2</sup>
5 1	79.8	1151	87.0	725
3	83.3	1779	88.9	1329
7	83.3	2646	92.6	2155
28	84.8	4267	92.8	3983

10 <sup>1</sup> Pounds/cubic foot.  
<sup>2</sup> Pounds/square inch.

Table V illustrates the acceptable weight strength development of the samples made from a composition according to the invention.

15 A second test was performed on the composition made from 75 wt.% master blend binder of Table IV and the pumice aggregate to study durability. A four and one-half inch (4 1/2") diameter, one-half inch (1/2") thick patty of the  
 20 composition was placed under running water for a period of two months. No deterioration of the patty was visible and the total weight loss of the patty after the two-month test was 0.5%.

In other tests, the master blend binder  
 25 disclosed in Table IV was blended with up to about 50 wt.% pozzolanic aggregate filler (pumice or perlite), with and without foaming agent, to produce

2192733

- 21 -

boards according to the invention. Such boards exhibited acceptable physical properties.

The foregoing detailed description is given for clearness of understanding only, and no unnecessary limitations should be understood  
5 therefrom, as modifications within the scope of the invention will be apparent to those skilled in the art.

CLAIMS

1. A cementitious composition comprising:

(a) about 20 wt% to about 30 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

2. A cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 40 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

**B**

3. A cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 40 wt% to about 50 wt% pozzolanic aggregate.

4. The composition of any one of claims 1-3 wherein said composition is free of alpha-gypsum.

5. The composition of any one of claims 1-3 wherein the Portland cement is Type III Portland cement.

6. The composition of any one of claims 1-3 wherein the silica fume is about 4 wt% to about 8 wt% of the composition.

7. The composition of claim 1 or 2 wherein the pozzolanic aggregate is about 10 wt% to about 50 wt% of the composition and comprises pumice.

8. The composition of claim 1 or 2 wherein the pozzolanic aggregate is about 1 wt%

B

to about 10 wt% of the composition and comprises hollow silicate spheres.

9. The composition of any one of claims 1-3 further comprising at least one component selected from the group consisting of set control additives, water reducing agents and water repellent additives.

10. A self-leveling floor composition comprising:

(i) about 25 wt% to about 75 wt% of the composition of any one of claims 1-3; and

(ii) about 75 wt% to about 25 wt% sand.

11. A road patching composition comprising:

(i) about 25 wt% to about 100 wt% of the composition of any one of claims 1-3; and

(ii) about 75 wt% to about 0 wt% sand.

12. Fire-proofing sprays and fire-stopping materials comprising the composition of any one of claims 1-3 wherein said pozzolanic aggregate comprises at least one of FILLITE and perlite.

13. Fire-proofing sprays and fire-stopping materials of claim 12 further comprising about 1 wt% to about 30 wt% unexpanded vermiculite.

14. The fire-proofing sprays and fire-stopping materials of claim 12 further comprising:

(e) up to about 2 wt% glass fibers; and

(f) up to about 2 wt% of a thickening agent selected from the group consisting of cellulose derivatives, acrylic resins and mixtures thereof.

15. A water resistant construction material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 30 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

16. A water resistant construction material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 40 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

17. A water resistant construction material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 40 wt% to about 50 wt% pozzolanic aggregate.

18. The construction material of any one of claims 15-17 wherein the cementitious composition is free of alpha-gypsum.

19. The construction material of any one of claims 15-17 wherein the Portland cement is Type III Portland cement.

20. The construction material of claim 15 or 16 wherein the pozzolanic aggregate is about 10 wt% to about 50 wt% of the composition and comprises pumice.

21. The construction material of any one of claims 15-17 wherein the silica fume is about 4 wt% to about 8 wt% of the composition.

22. The construction material of any one of claims 15-17 wherein the cementitious composition further comprises at least one component selected from the group consisting of set control additives, water reducing agents and water repellent additives.

23. A water resistant construction material having a thickness of about 1/8 inch, said material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 30 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and

fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

24. A water resistant construction material having a thickness of about 1/8 inch, said material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 40 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

25. A water resistant construction material having a thickness of about 1/8 inch, said material prepared by combining a cementitious composition with a slight stoichiometric excess of water, said cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 40 wt% to about 50 wt% pozzolanic aggregate.

26. The construction material of any one of claims 23-25 wherein the cementitious composition is free of alpha-gypsum.

27. The construction material of any one of claims 23-25 wherein the Portland cement is Type III Portland cement.

28. The construction material of claim 23 wherein the cementitious composition further comprises at least one component selected from the group consisting of set control additives, water reducing agents and water repellent additives.

29. A board comprising:

first and second cover sheets; and

a cementitious composition disposed between the first and second cover sheets, said composition comprising:

(a) about 20 wt% to about 30 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume; and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

30. A board comprising:

first and second cover sheets; and

a cementitious composition disposed between the first and second cover sheets, said composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 40 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

**B**

31. A board comprising:

first and second cover sheets; and

a cementitious composition disposed between the first and second cover sheets, said composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 40 wt% to about 50 wt% pozzolanic aggregate.

32. The board of any one of claims 29-31 wherein the cementitious composition is free of alpha-gypsum.

33. The board of any one of claims 29-31 wherein the first and second cover sheets are made from at least one of a fiberglass matt and a fiberglass scrim.

34. The board of any one of claims 29-31 wherein the Portland cement of paragraph (b) is Type III Portland cement.

35. The board of claim 29 wherein the pozzolanic aggregate of paragraph (d) is about

B

10 wt% to about 50 wt% of the composition and comprises pumice.

36. A method of preparing a construction material comprising the steps of:

(a) mixing about 20 wt% to about 30 wt% calcium sulfate beta-hemihydrate, about 10 wt% to about 50 wt% Portland cement, about 4 wt% to about 20 wt% silica fume, and about 1 wt% to about 50 wt% pozzolanic aggregate to result in a cementitious composition; and

(b) mixing the cementitious composition formed in step (a) with a slight stoichiometric excess of water.

37. A method of preparing a construction material comprising the steps of:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 40 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 1 wt% to about 50 wt% pozzolanic aggregate.

38. A method of preparing a construction material comprising the steps of:

(a) about 20 wt% to about 75 wt% calcium sulfate beta-hemihydrate;

(b) about 10 wt% to about 50 wt% of a cement selected from the group consisting of Portland cement, a blend of Portland cement and fly ash, a blend of Portland cement and ground blast slag; and mixtures thereof;

(c) about 4 wt% to about 20 wt% silica fume, and

(d) about 40 wt% to about 50 wt% pozzolanic aggregate.

39. The method of claim 36 further comprising:

(c) pouring the cementitious composition on a first cover sheet; and

(d) placing a second cover sheet over the cementitious composition.

40. The method of claim 39 wherein the first and second cover sheets are made from at least one of a fiberglass matt and a fiberglass scrim.

41. The method of claim 39 further comprising:

(e) cutting the material produced in step (d) into boards; and

(f) curing the boards at room temperature and a humidity of about 30% to about 90% for one to seven days.

42. The method of claim 39 further comprising:

(e) cutting the material produced in step (d) into boards; and

(f) wrapping the boards in plastic for at least about three days.

43. The composition of any one of claims 1-11 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

44. The composition of any one of claims 1-11 wherein the silica fume has a particle average diameter between about 0.1 and about 0.3 microns.

45. The composition of any one of claims 1-11 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$  and has a particle average diameter between about 0.1 and about 0.3 microns.

46. The fire-proofing sprays and fire stopping materials of any one of claims 12-14 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

47. The fire-proofing sprays and fire stopping materials of any one of claims 12-14 wherein the silica fume has a particle average

diameter between about 0.1 and about 0.3 microns.

48. The fire-proofing sprays and fire stopping materials of any one of claims 12-14 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$  and has a particle average diameter between about 0.1 and about 0.3 microns.

49. The construction material of any one of claims 15-28 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

50. The construction material of any one of claims 15-28 wherein the silica fume has a particle average diameter between about 0.1 and about 0.3 microns.

51. The construction material of any one of claims 15-28 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$  and has a particle average diameter between about 0.1 and about 0.3 microns.

52. The board of any one of claims 29-35 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

53. The board of any one of claims 29-35 wherein the silica fume has a particle average diameter between about 0.1 and about 0.3 microns.

54. The board of any one of claims 29-35 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$  and has a particle average diameter between about 0.1 and about 0.3 microns.

55. The method of any one of claims 36-42 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

56. The method of any one of claims 36-42 wherein the silica fume has a particle average diameter between about 0.1 and about 0.3 microns.

57. The method of any one of claims 36-42 wherein the silica fume comprises about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$  and has a particle average diameter between about 0.1 and about 0.3 microns.

58. A cementitious composition comprising:

(a) calcium sulfate hemihydrate;

(b) a cement component comprising Portland cement; and

(c) a third component comprising silica fume, said silica fume comprising about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

59. A cementitious composition comprising:

(a) about 20 wt% to about 75 wt% calcium sulfate hemihydrate;

(b) about 10 wt% to about 55 wt% of a cement component comprising Portland cement; and

(c) about 4 wt% to about 20 wt% of a third component comprising silica fume, said silica fume comprising about 98 wt% to about 100 wt% amorphous  $\text{SiO}_2$ .

60. The composition of claim 58 or 59, wherein the silica fume has a particle average diameter of between about 0.1 and about 0.3 microns.

FIG. 1



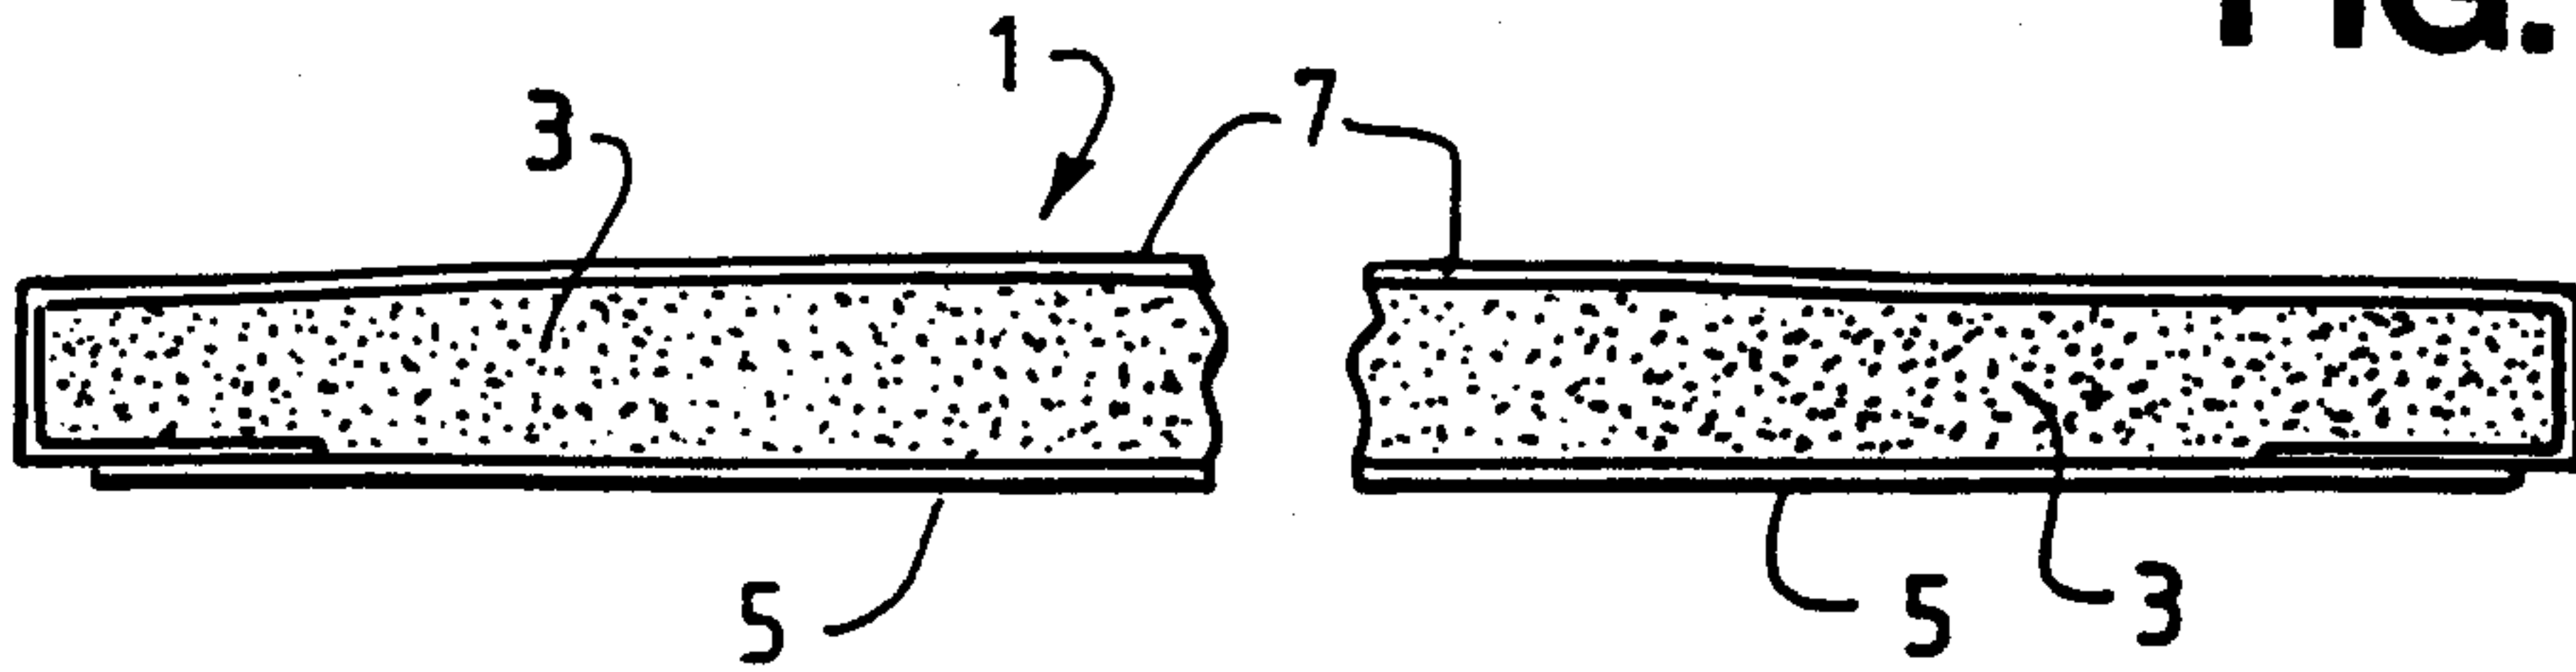


FIG. 2


COMPR. STR. (PSI)

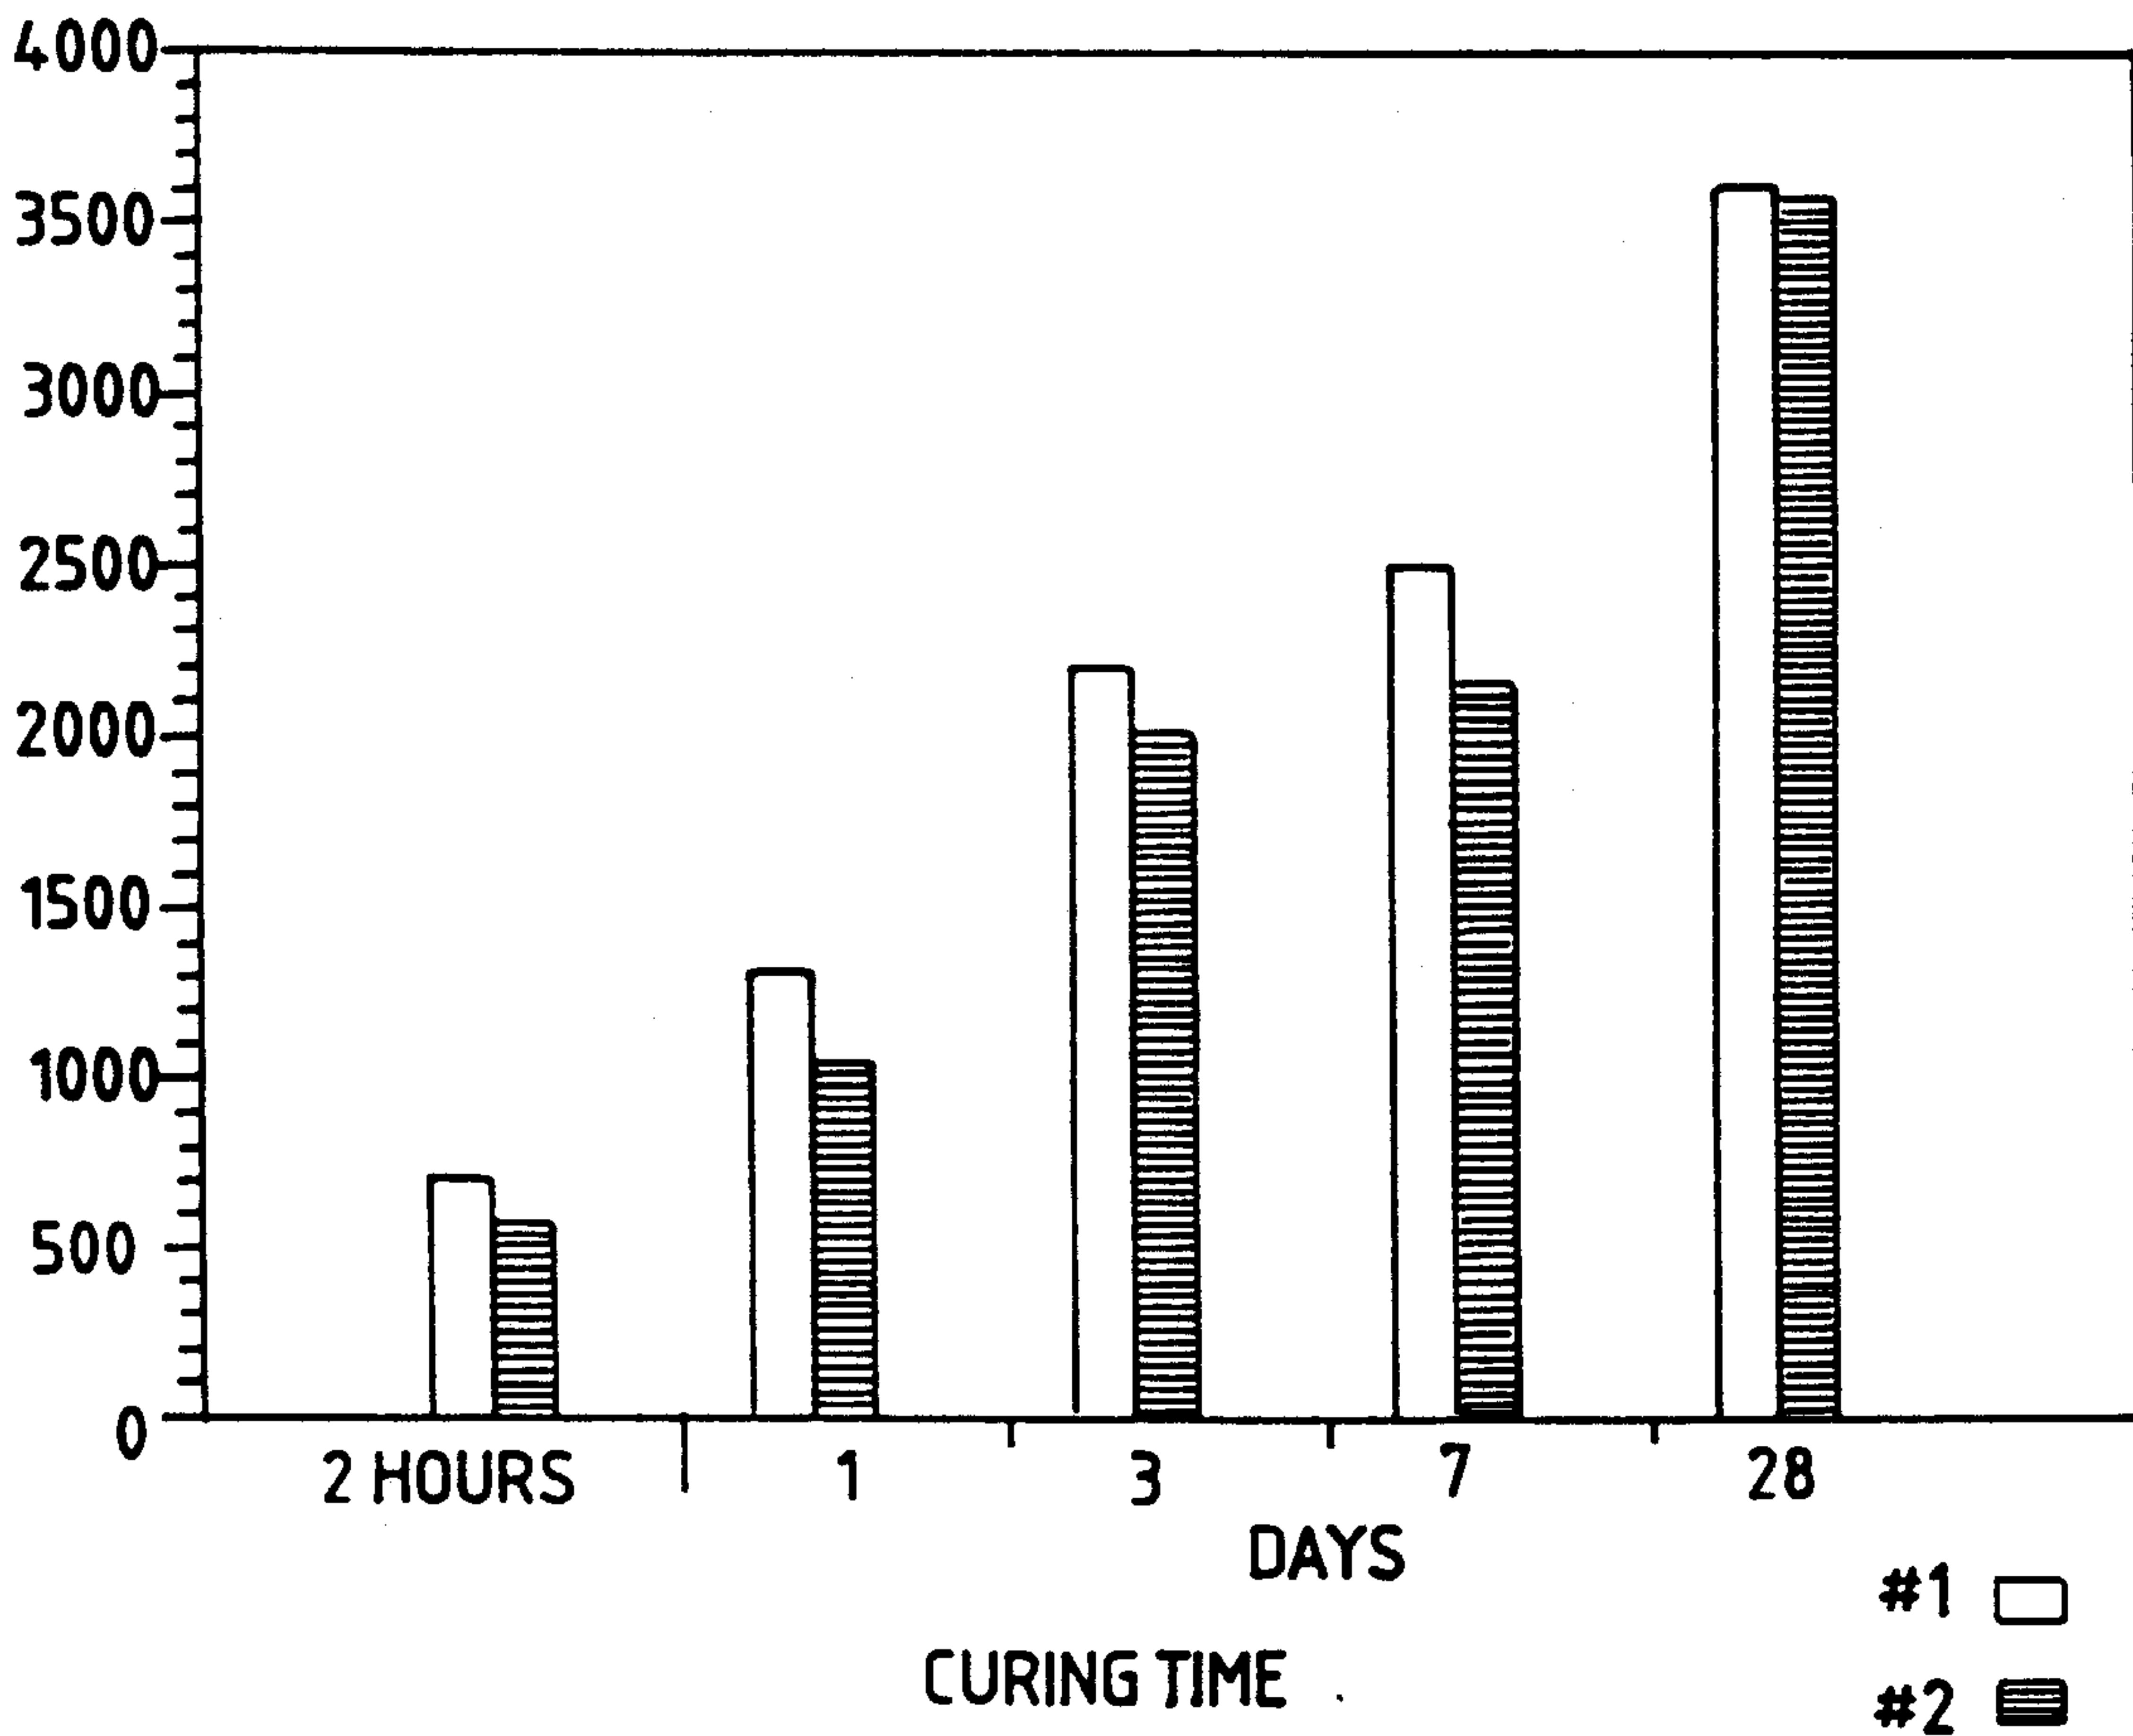

**FIG. 3**

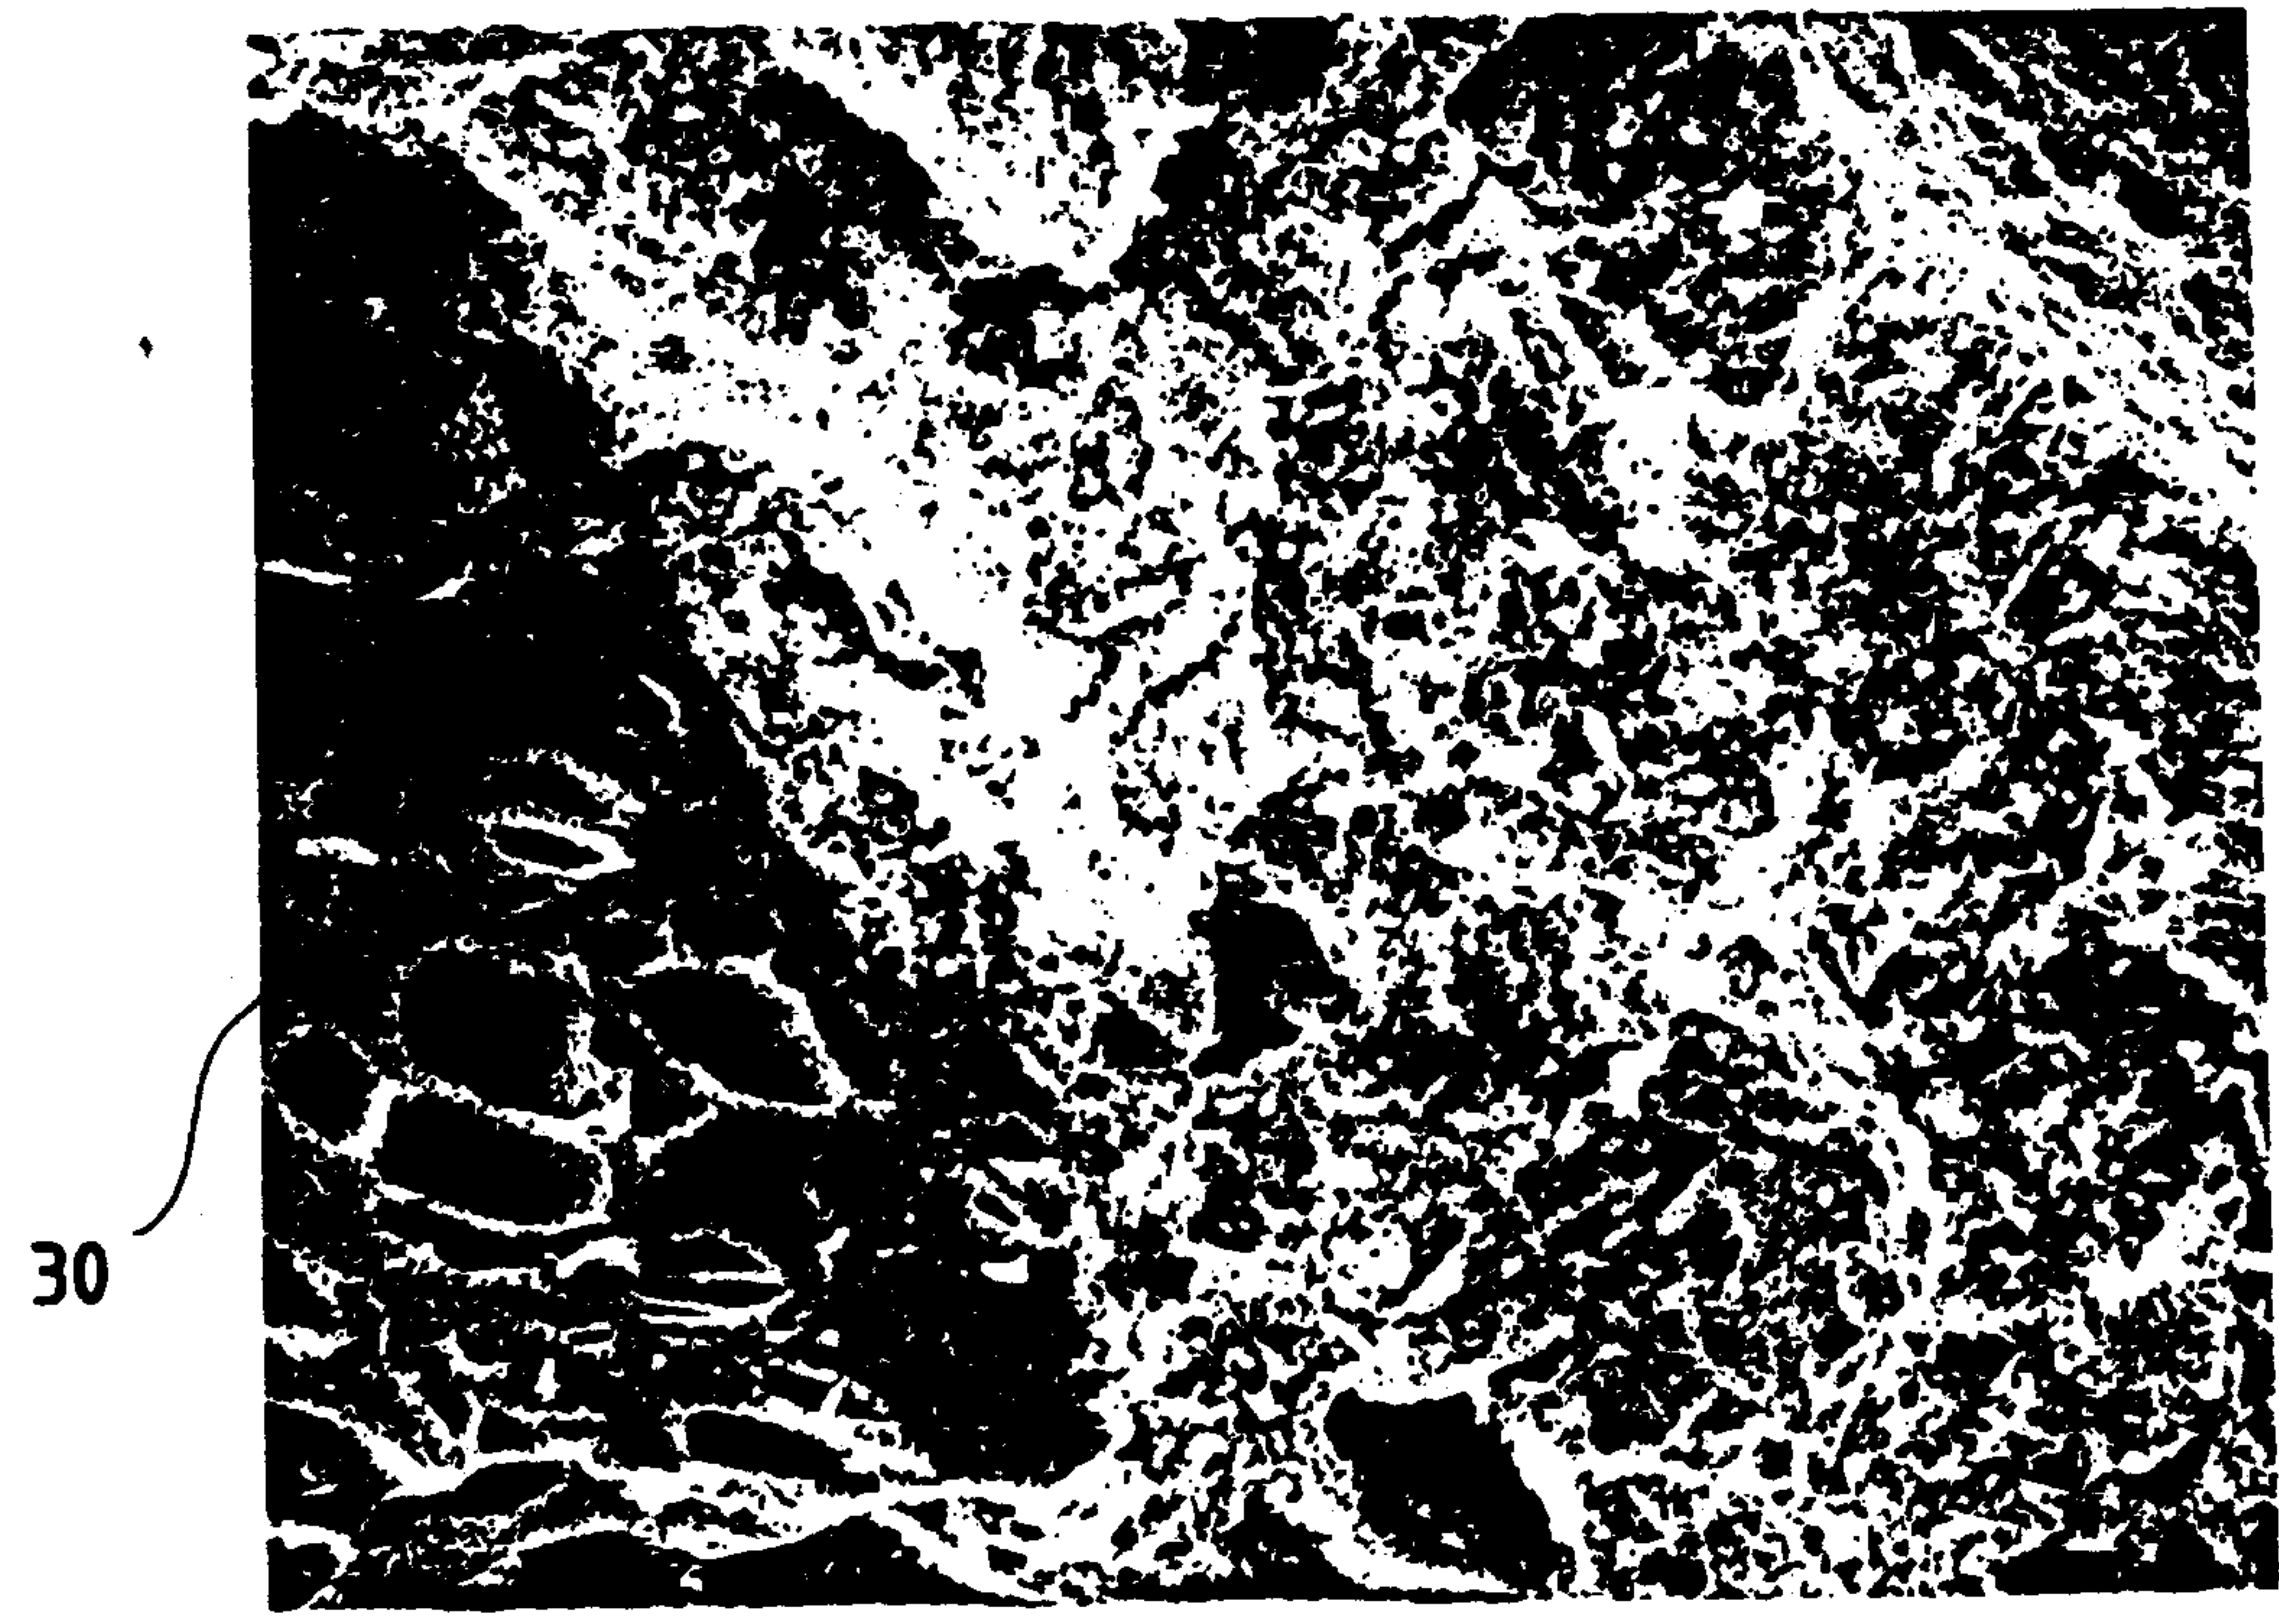

**FIG. 4**

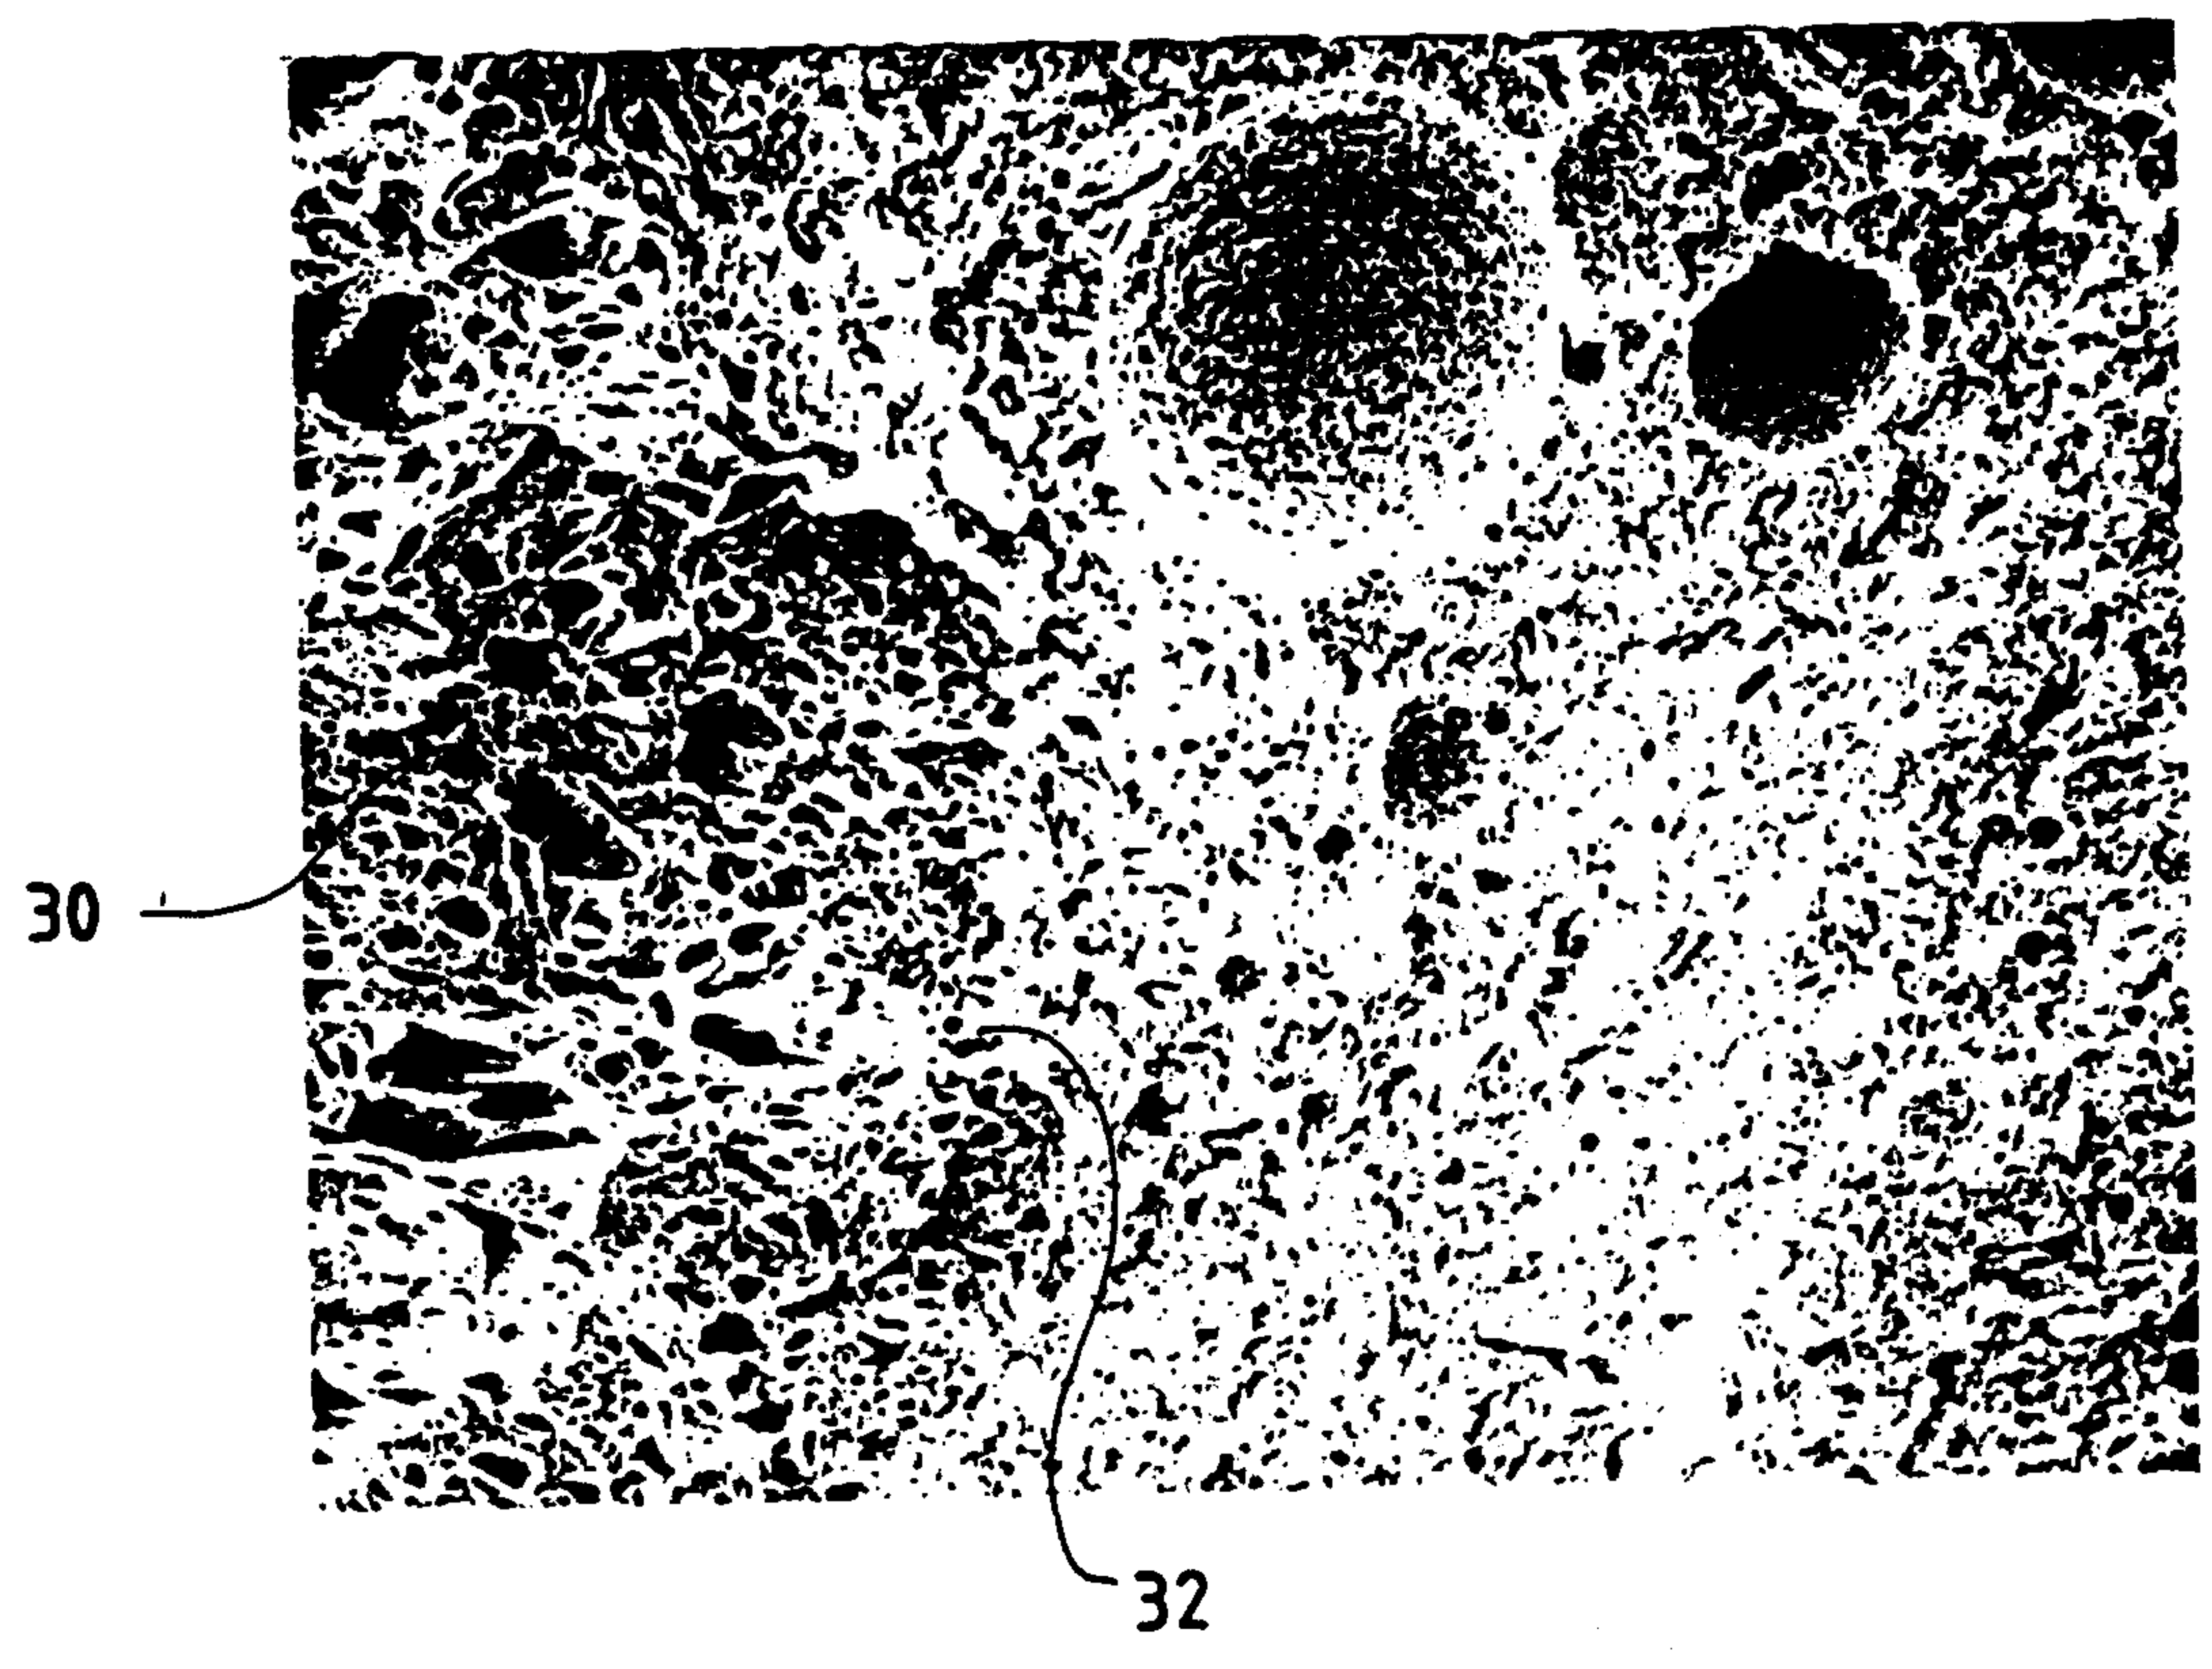

**FIG. 5**

