



(11) **EP 2 413 015 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**01.02.2012 Bulletin 2012/05**

(51) Int Cl.:  
**F21K 99/00 (2010.01)** **F21V 17/12 (2006.01)**  
**F21V 17/14 (2006.01)** **F21V 23/06 (2006.01)**

(21) Application number: **10170965.7**

(22) Date of filing: **27.07.2010**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**  
Designated Extension States:  
**BA ME RS**

- **Wu, Ching-Wen**  
**Tainan Hsien (TW)**
- **Yang, Tsai-Yi**  
**Tainan Hsien (TW)**

(71) Applicant: **Cirocomm Technology Corp.**  
**Kuntien Hsiang, Tainan Hsien 720 (TW)**


(74) Representative: **ter Meer, Nicolaus**  
**TER MEER STEINMEISTER & PARTNER GbR**  
**Patentanwälte**  
**Mauerkircherstraße 45**  
**81679 München (DE)**

(72) Inventors:  
• **Wang, Chun-Yuan**  
**Tainan Hsien (TW)**  
• **Wu, Shu-Hsien**  
**Tainan Hsien (TW)**

Remarks:  
Amended claims in accordance with Rule 137(2) EPC.

(54) **LED lamp with replaceable light unit**

(57) An LED lamp with replaceable light unit according to the invention includes a heat dissipation housing (1), a metal connector (2), a driver circuit board (3), a light unit slice (4), a pad (5) and a shade (6). The heat dissipation housing (1) has an opening (12) at one end and a joint portion (13) at another end. The metal connector (2) is disposed to the joint portion (13) of the heat dissipation housing (1). The driver circuit board (3) disposed inside the heat dissipation housing (1) to electrically connect with metal connector (2). The light unit slice (4) and the pad (5) are disposed inside the opening (12), and the light unit slice (4) is electrically connected with the driver circuit board (3). The shade (6) is disposed inside the opening (12). The LED lamp with replaceable light unit can be realized by the assembly of the above elements according to the different preferred embodiment of the present invention.

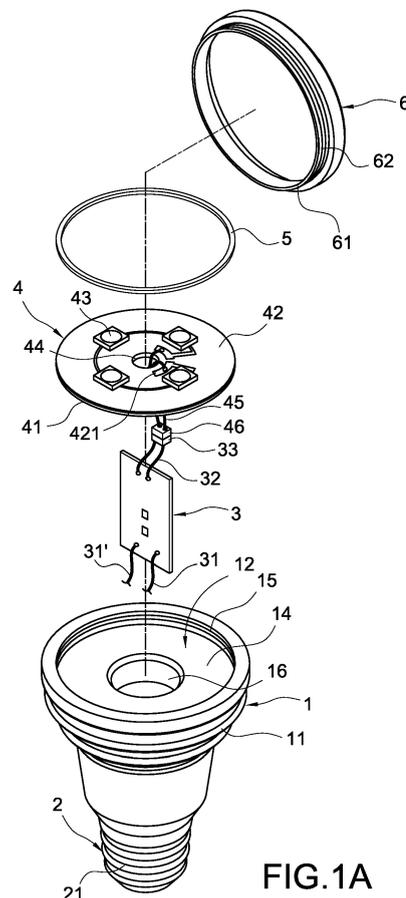

**FIG. 1A**

**EP 2 413 015 A1**

**Description**

## BACKGROUND OF THE INVENTION

## Field of the Invention

**[0001]** The invention relates to a lamp, and in particular to a lamp with a replaceable light unit for mounting on a lighting.

## Description of Prior Art

**[0002]** Light emitting diode (LED) has gradually replaced the traditional light bulb, due to its small size, lower power consumption and durability, and intensively used in traffic light signal, vehicle direction lights, flashlights, cell phones, lighting and large outdoor billboard.

**[0003]** So far the lamp structure used in the lighting is formed by mounting plural light-emitting diodes on a circuit board or substrate, and then disposing the substrate to the inside of a heat dissipation housing, and disposing a shade on the front end of the heat dissipation housing, for example, Taiwan Patent Nos. M354691, M356067, M356852, M358239, M371846, M372427, M372798, M373439 and M374538. In the most of LED lamp structure disclosed in these granted patents, when light unit of a LED lamp internal structure is damaged, the damaged LED lamp is discarded and directly replaced with a new one. It is unable for users only to replace the light unit of a LED lamp so that the discarded LED lamps would worsen the problems of environmental protection, and also result in a consumption of resources and waste money.

## SUMMARY OF THE INVENTION

**[0004]** Therefore, the main purpose of the present invention is to solve the above deficiencies of prior art. The present invention provides a LED lamp with a replaceable light unit.

**[0005]** To achieve the above purpose, the present invention provides a LED lamp with a replaceable light unit, comprising:

a heat dissipation housing having a plurality of annular fins on the outer surface of upper part, an opening at one end and a joint portion at another end, and the opening inside having a spacer with a hole in the center and a screw thread portion; the heat dissipation housing having a chamber to communicate with the hole and the joint portion;

a metal connector disposed to the joint portion, the metal connector having an annular screw connection portion and a lamp head connected to thereto in insulation;

a driver circuit board disposed inside the chamber, the driver circuit board having two power input wires and two power output wires, one of the power input

wire electrically connected to the screw connection portion, and the other power input wire electrically connected to the lamp head; the two power output wires being connected to a joint;

a light unit slice having a substrate with a slice shape made of aluminum, the substrate having a circuit board disposed on a surface thereof and insulated thereto, electrically connecting to at least one light emitting element and further including a welding area for electrically connecting to two power source wires; moreover, a through hole disposed on the aluminum substrate and the circuit board, through which the two power source wires pass, and a joint provided to connect two power source wires and inserted into the joint of the two power output wires of the driver circuit board so that the driver circuit board can transmit a driving signal to the light unit slice for lighting the light emitting elements;

a pad disposed on a surface of the substrate; a shade disposed on the opening, the shade having a connecting portion thereon, and the connecting portion having a screw thread face on its outer surface for screwing to the screw thread portion of the opening.

**[0006]** With the replaceable light unit, the LED lamps may be reused without discarding in order to reach the purpose of environmental protection and cost savings.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0007]**

FIG. 1A shows an exploded view of LED lamp according to a first preferred embodiment of the present invention.

FIG. 1B shows schematically a cross section structure of FIG. 1A.

FIG. 2A shows an exploded view of LED lamp according to a second preferred embodiment of the present invention.

FIGS. 2B to 2D show schematically the connection action of the shade and the heat dissipation housing of FIG.2A.

FIG. 3A shows an exploded view of LED lamp according to a third preferred embodiment of the present invention.

FIGS. 3B to 3E show schematically the connection action of the shade, light unit slice and the heat dissipation housing of FIG. 3A.

FIG. 4A shows an exploded view of LED lamp according to a fourth preferred embodiment of the present invention.

FIGS. 4B to 4F show schematically the connection action of the shade, the light unit slice and the heat dissipation housing of FIG.4A.

FIG. 5A shows an exploded view of LED lamp according to a fifth preferred embodiment of the present

invention.

FIG. 5B shows schematically the connection action of the shade, the light unit slice and the heat dissipation housing of FIG.5A.

#### DETAILED DESCRIPTION OF THE INVENTION

**[0008]** A preferred embodiment of the present invention will be described with reference to the drawings.

**[0009]** Please refer to FIGS. 1A and 1B, wherein FIG. 1A shows an exploded view of LED lamp according to a first preferred embodiment of the present invention and FIG. 1B shows schematically a cross section structure of FIG. 1A. As shown in the drawings, the LED lamp with a replaceable light unit according to the invention includes a heat dissipation housing 1, a metal connector 2, a driver circuit board 3, a light unit slice 4, a pad 5 and a shade 6.

**[0010]** The heat dissipation housing 1 is made of metal material (aluminum) and formed to be a cup-shape, and the heat dissipation housing 1 has a plurality of annular fins 11 on the outer surface of upper part, an opening 12 at one end and a joint portion 13 at another end. The opening 12 inside has a spacer 14 having a hole 16 in the center and a screw thread portion 15. In addition, the heat dissipation housing 1 has a chamber 17 to communicate with the hole 16 and the joint portion 13.

**[0011]** The metal connector 2 is disposed to the joint portion 13 of the heat dissipation housing 1, and the metal connector 2 has an annular screw connection portion 21 and a lamp head 22 connected to thereto. Since the technology of metal connector 2 is well known, the detail is omitted herefrom.

**[0012]** The driver circuit board 3 is disposed inside the chamber 17 of the heat dissipation housing 1, and the driver circuit board 3 has two power input wires 31, 31' and two power output wires 32. The power input wire 31 electrically connects to the screw connection portion 21, and the power input wire 31' electrically connects to the lamp head 22. Furthermore, the two power output wires 32 connect to a joint 33.

**[0013]** The light unit slice 4 has a substrate 41 with a slice shape made of aluminum, and the substrate 41 has a circuit board 42 disposed on a surface thereof and insulated thereto, electrically connecting to at least one light emitting element 43 and further including a welding area 421 for electrically connecting to two power source wires 45. Moreover, a through hole 44 is disposed on the aluminum substrate 41 and the circuit board 42, through which the two power source wires 45 pass. A joint 46 is provided to connect two power source wires 45 and insert into the joint 33 of the two power output wires 32 of the driver circuit board 3 so that the driver circuit board 3 can transmit a driving signal to the light unit slice 4 for lighting the light emitting elements 43. In the preferred embodiment, the light emitting elements 43 are LED.

**[0014]** The pad 5 is made of plastic material or rubber, which is annular. The pad 5 is disposed on a surface of

the substrate 41.

**[0015]** The shade 6 is made of transparent plastic material, and has a connecting portion 61 thereon. The connecting portion 61 has a screw thread face 62 on its outer surface for screwing to the screw thread portion 15 of the opening 12. Also, the bottom of connecting portion 61 may press on one surface of the substrate 41 to fasten the substrate 41 to the inside of the opening 12.

**[0016]** Please refer to FIG. 1B, which shows schematically a cross section structure of FIG. 1A. As shown in FIG. 1B, after assembling the metal connector 2, the driver circuit board 3, the light unit slice 4, the pad 5 and the shade 6 with the heat dissipation housing 1, the metal connector 2 may connect to a traditional lamp holder (not shown in the Figure) for lighting the LED lamp. When connecting the metal connector 2 to the lamp holder, the outer power source may flow through the lamp holder and the metal connector 2 to drive the driver circuit board 3 and light the light emitting element 43 on the light unit slice 4 through two power input wires 31, 31'. The ray produced from the light emitting element 43 may irradiate to outside through the shade 6.

**[0017]** When the light emitting element 43 of the light unit slice 4 is damaged, due to the design of screw connection of the shade 6 and the opening 12, users may replace the light unit slice 4 by screwing the shade 6 off the opening 12 and taking out the pad 5, and then disengaging the joint 46 of the two power source wires 45 of the substrate 41 and the joint 33 of the two power output wires 32. Therefore, a lamp can be reused without discarding in order to reach the environmental protection and cost savings.

**[0018]** Please refer to FIG. 2A, which shows an exploded view of LED lamp according to a second preferred embodiment of the present invention. As shown in the figure, except that a plurality of wedges 63 are applied to replace the screw thread face 62 of the connecting portion 61 of the shade 6 and a plurality of slots 18 are applied to replace the screw thread portion 15 of the opening 12 of the heat dissipation housing 1 in this preferred embodiment, the other portions are substantially the same to that of FIGS. 1A and 1B. For example, the slot 18 is L-shape, having an inserting port 181 and a slide 182.

**[0019]** Please refer to FIGS. 2B to 2D, which show schematically the connection action of the shade 6 and the heat dissipation housing 1 of FIG 2A. As shown in the figures, after assembling the metal connector 2, the driver circuit board 3, the light unit slice 4 and the pad 5 with the heat dissipation housing 1, the wedges 63 of the shade 6 are inserted into the inserting ports 181 of the slots 18, the shade 6 is rotated and the wedges 63 slide along the slides 182 to rapidly and easily connect the shade 6 with the opening 12 of the heat dissipation housing 1.

**[0020]** Please refer to FIG. 3A, which shows an exploded view of LED lamp according to a third preferred embodiment of the present invention. As shown in the

figure, except that a plurality of notches 47 are provided on the substrate 41, a plurality of position blocks 141 provided on the spacer 14 of the heat dissipation housing 1 to have a gap 19 with the inner surface of the opening 12 in this preferred embodiment, the other portions are substantially the same to that of FIG. 2A.

**[0021]** Please refer to FIGS. 3B to 3E, which show schematically the connection action of the shade 6, light unit slice 4 and the heat dissipation housing 1 of FIG. 3A. As shown in the figures, after assembling the metal connector 2, the driver circuit board 3, the light unit slice 4 and the pad 5 with the heat dissipation housing 1, the connecting portion 61 of the shade 6 is first held in the gap 19 formed between the position blocks 141 and the inner surface of the opening 12, while the wedges 63 of the shade 6 are inserted exactly into the inserting ports 181 of the slots 18, the shade 6 is rotated, and the wedges 63 slide along the slides 182 to connect the shade 6 with the opening 12 of the heat dissipation housing 1 rapidly and easily.

**[0022]** Please refer to FIG. 4A, which shows an exploded view of LED lamp according to a fourth preferred embodiment of the present invention. As shown in the figure, position blocks 141 provided on the spacer 14 of the heat dissipation housing 1 may be changed into a resilient press mechanism 10. The press mechanism 10 has a post 101 disposed on the spacer 14, a spring 102 hinged in the post 101, and a pressing piece 103. The pressing piece 103 has a square cross section, and two wings 1031 are slightly raised. Also, the notch 47 provided on the substrate 41 has an enlarged perimeter to cooperate with the design of changing direction of the press mechanism 10.

**[0023]** Please refer to FIGS. 4B to 4F, which show schematically the connection action of the shade 6, the light unit slice 4 and the heat dissipation housing 1 of FIG. 4A. As shown in the figures, after assembling the metal connector 2 and the driver circuit board 3 with the heat dissipation housing 1, the direction of pressing piece 103 is changed until the two wings 1031 of pressing piece 103 have the same direction with the notches 47, the notches 47 is aligned with the pressing piece 103, the substrate 41 is provided on the spacer 14, and the pressing piece 103 is rotated to press the two wings 1031 of the pressing piece 103 on the substrate 41. Next, the connecting portion 61 of the shade 6 is first held in the gap 19 formed between the press mechanism 10 and the inner surface of the opening 12, while the wedge 63 of the shade 6 is inserted exactly into the inserting port 181 of the slot 18, the shade 6 is rotated, and the wedge 63 slides along the slide 182 to connect the shade 6 with the opening 12 of the heat dissipation housing 1 rapidly and easily.

**[0024]** Please refer to FIG. 5A, which shows an exploded view of LED lamp according to a fifth preferred embodiment of the present invention. As shown in the figure, except that a hollow cylinder 48 communicating with the through hole 44 are provided on the other surface

of the substrate 41, which has two electrode terminals 49 on the bottom and a screw connection part 40 on the outer surface. The two electrode terminals 49 are connected with the two power source wires 45 of the substrate 41. Further, the hole 16 of the heat dissipation housing 1 has screw thread face 161 on the inner surface to screw with screw connection part 40 of the cylinder 48, the other portions are substantially the same to that of FIG. 2A.

**[0025]** Please refer to FIG. 5B, which shows schematically the connection action of the shade 6, the light unit slice 4 and the heat dissipation housing 1 of FIG.5A. As shown in the figures, after assembling the metal connector 2 and the driver circuit board 3 with the heat dissipation housing 1, the post 48 of the substrate 41 is aligned with the hole 16 of the heat dissipation housing 1, the screw connection part 40 of the post 48 is screwed with the screw thread face 161 of the hole 16, while the two electrode terminals 49 are contacted with the two conductive terminals 34 of the driver circuit board 3, and the shade 6 is screwed with the opening 12 of the heat dissipation housing 1. When the external power is inputted to light the light emitting elements 43 through the metal connector 2 transmitting to the two power input wires 31, 31' and driving the driver circuit board 3.

**[0026]** Although the present invention has been described with reference to the foregoing preferred embodiment, it will be understood that the invention is not limited to the details thereof. Various equivalent variations and modifications can still occur to those skilled in this art in view of the teachings of the present invention. Thus, all such variations and equivalent modifications are also embraced within the scope of the invention as defined in the appended claims.

## Claims

1. An LED lamp with replaceable light unit comprising:
  - a heat dissipation housing (1) having an opening (12) at one end and a joint portion (13) at another end, and the opening (12) inside having a spacer (14) with a hole (16) and a screw thread portion (15) on the inner surface; the heat dissipation housing (1) having a chamber (17) to communicate with the hole (16) and the joint portion (13);
  - a metal connector (2) disposed to the joint portion (13), the metal connector (2) having a screw connection portion (21) and a lamp head (22) connected to thereto in insulation;
  - a driver circuit board (3) disposed inside the chamber (17), the driver circuit board (3) having two power input wires (31, 31') and two power output wires (32, 32'), one of the power input wire (31) electrically connected to the screw connection portion (21), and the other power input

- wire (31') electrically connected to the lamp head (22); the two power output wires (32, 32') being connected to a joint (33);  
 a light unit slice (4) having a substrate (41), the light unit slice (4) having a circuit board (42) disposed on a surface thereof and insulated there-  
 to, electrically connecting to at least one light emitting element (43) and further including two welding areas (421) for electrically connecting to two power source wires (45); and  
 a shade (6) disposed on the opening (12), the shade having a connecting portion (61) thereon, and the connecting portion having a screw thread face (62) on its outer surface for screwing to the screw thread portion (15) of the opening (12); and  
 a pad (5) is disposed between the shade (6) and the light unit slice (4).
2. The LED lamp with replaceable light unit of claim 1 wherein the heat dissipation housing (1) is made of metal material and formed to be a cup-shape, the heat dissipation housing (1) having a plurality of annular fins (11) on the outer surface.
3. The LED lamp with replaceable light unit of claim 1 wherein the substrate (41) is made of aluminum to have a slice shape, a through hole (44) is disposed on the substrate (41) and the circuit board (42), through which the two power source wires (45) pass, and a joint (46) provided to connect two power source wires (45) and inserted into the joint (33) of the two power output wires (32, 32') of the driver circuit board (3) so that the driver circuit board (3) can transmit a driving signal to the light unit slice (4) for lighting the light emitting elements (43), wherein the light emitting elements (43) are light emitting diodes.
4. An LED lamp with replaceable light unit comprising:  
 a heat dissipation housing (1) having an opening (12) at one end and a joint portion (13) at another end, and the opening (12) inside having a spacer (14) with a hole (16) and a plurality of slots (18) on the inner surface; the heat dissipation housing (1) having a chamber (17) to communicate with the hole (16) and the joint portion (13);  
 a metal connector (2) disposed to the joint portion (13), the metal connector (2) having a screw connection portion (21) and a lamp head (22) connected to thereto in insulation;  
 a driver circuit board (3) disposed inside the chamber (17), the driver circuit board (3) having two power input wires (31, 31') and two power output wires (32, 32'), one of the power input wire (31) electrically connected to the screw connection portion (21), and the other power input wire (31') electrically connected to the lamp head (22); the two power output wires (32, 32') being connected to a joint (33);  
 a light unit slice (4) having a substrate (41), the substrate (41) having a circuit board (42) disposed on a surface thereof and insulated there-  
 to, electrically connecting to at least one light emitting element (43) and further including two welding areas (421) for electrically connecting to two power source wires (45); and  
 a shade (6) disposed on the opening (12), the shade having a connecting portion (61) thereon, and the connecting portion (61) having a plurality of wedges (63) for inserting into the slots (18); and  
 a pad (5) is disposed between the shade (6) and the light unit slice (4).
5. The LED lamp with replaceable light unit of claim 4 wherein the heat dissipation housing (1) is made of metal material and formed to be a cup-shape, and the heat dissipation housing (1) having a plurality of annular fins (11) on the outer surface, and the slot (18) of the heat dissipation housing (1) being L-shape, having an inserting port (181) and a slide (182).
6. The LED lamp with replaceable light unit of claim 4 wherein the substrate (41) is made of aluminum to have a slice shape, a through hole (44) disposed on the substrate (41) and the circuit board (42) through which the two power source wires (45) pass, and a joint (46) provided to connect two power source wires (45) and inserted into the joint (33) of the two power output wires (32, 32') of the driver circuit board (3) so that the driver circuit board (3) can transmit a driving signal to the light unit slice (4) for lighting the light emitting elements (43), wherein the light emitting elements (43) are light emitting diodes.
7. The LED lamp with replaceable light unit of claim 4 wherein a plurality of position blocks (141) are provided on the spacer (14) to have a gap (19) with the inner surface of the opening (12), and a plurality of notches (47) are provided on the substrate (41) to correspond to the position blocks (141).
8. An LED lamp with replaceable light unit comprising:  
 a heat dissipation housing (1) having an opening (12) at one end and a joint portion (13) at another end, the opening (12) inside having a spacer (14) and a plurality of slots (18), and the spacer (14) having a hole (16) and a plurality of press mechanisms (10) to have a gap (19) with the inner surface of the opening (12); the heat dissipation housing (1) having a chamber (17) to communicate with the hole (16) and the joint portion (13);

- a metal connector (2) disposed to the joint portion (13), the metal connector (2) having a screw connection portion (21) and a lamp head (22) connected to thereto in insulation;
- a driver circuit board (3) disposed inside the chamber (17), the driver circuit board (3) having two power input wires (31, 31') and two power output wires (32, 32'), one of the power input wire (31) electrically connected to the screw connection portion (21), and the other power input wire (31') electrically connected to the lamp head (22); furthermore, the two power output wires (32, 32') being connected to a joint (33); a light unit slice (4) having a substrate (41), the substrate (41) having a circuit board (42) disposed on a surface thereof and insulated thereto, electrically connecting to at least one light emitting element (43) and further including two welding areas (421) for electrically connecting to two power source wires (45); a plurality of notches (47) provided on the periphery of substrate (41); and
- a shade (6) disposed on the opening (12), the shade having a connecting portion (61) thereon, and the connecting portion (61) having a plurality of wedges (63) for inserting into the slots (18).
9. The LED lamp with replaceable light unit of claim 8 wherein the heat dissipation housing (1) is made of metal material and formed to be a cup-shape, the heat dissipation housing (1) having a plurality of annular fins (11) on the outer surface, and the slot (18) of the heat dissipation housing (1) being L-shape, having an inserting port (181) and a slide (182).
10. The LED lamp with replaceable light unit of claim 8 wherein the press mechanism (10) has a post (101) disposed on the spacer (14), a spring (102) and a pressing piece (103) hinged in the post (101), and the pressing piece (103) has a square cross section, and two wings (1031) are slightly raised.
11. The LED lamp with replaceable light unit of claim 8 wherein the substrate (41) is made of aluminum to have a slice shape, a through hole (44) disposed on the substrate (41) and the circuit board (42), through which the two power source wires (45) pass, and a joint (46) provided to connect two power source wires (45) and inserted into the joint (33) of the two power output wires (32, 32') of the driver circuit board (3) so that the driver circuit board (3) can transmit a driving signal to the light unit slice (4) for lighting the light emitting elements (43), wherein the light emitting elements (43) are light emitting diodes.
12. An LED lamp with replaceable light unit comprising:
- a heat dissipation housing (1) having an opening (12) at one end and a joint portion (13) at another end, the opening (12) inside having a spacer (14) and a screw thread portion (15), and the spacer (14) having a hole (16) with screw thread face (161) on the inner surface; the heat dissipation housing (1) inside having a chamber (17) to communicate with the hole (16) and the joint portion (13);
- a metal connector (2) disposed to the joint portion (13), the metal connector (2) having a screw connection portion (21) and a lamp head (22) connected to thereto in insulation;
- a driver circuit board (3) disposed inside the chamber (17), the driver circuit board (3) having two power input wires (31, 31') and two power output wires (32, 32'), one of the power input wire (31) electrically connected to the screw connection portion (21), and the other power input wire (31') electrically connected to the lamp head (22);
- a light unit slice (4) having a substrate (41), the substrate (41) having a circuit board (42) disposed on a surface thereof and insulated thereto, electrically connecting to at least one light emitting element (43) and further including two welding areas (421) for electrically connecting to two power source wires (45); a hollow cylinder (48) provided on the other surface of the substrate (41), having two electrode terminals (49) for contacting with the two conductive terminals (34) on the bottom and a screw connection part (40) for screwing with the screw thread face (161) of the hole (16) on the outer surface; the two electrode terminals (49) being electrically connected to two power source wires (45) of the substrate (41);
- a shade (6) disposed on the opening (12), the shade having a connecting portion (61) thereon, and the connecting portion (61) having a screw thread face (62) on its outer surface for screwing to the screw thread portion (15) of the opening (12).
13. The LED lamp with replaceable light unit of claim 12 wherein the heat dissipation housing (1) is made of metal material and formed to be a cup-shape, the heat dissipation housing (1) having a plurality of annular fins (11) on the outer surface.
14. The LED lamp with replaceable light unit of claim 12 wherein the substrate (41) is made of aluminum to have a slice shape, a through hole (44) disposed on the substrate (41) and the circuit board (42), through which the two power source wires (45) pass, and a joint (46) provided to connect two power source wires (45) and inserted into the joint (33) of the two power output wires (32, 32') of the driver circuit board (3) so that the driver circuit board (3) can transmit a driv-

ing signal to the light unit slice (4) for lighting the light emitting elements (43), wherein the light emitting elements (43) are light emitting diodes.

15. The LED lamp with replaceable light unit of claim 12 wherein the shade (6) is made of transparent plastic material. 5

**Amended claims in accordance with Rule 137(2) EPC.** 10

8. An LED lamp with replaceable light unit comprising: 15

a heat dissipation housing (1) having an opening (12) at one end and a joint portion (13) at another end, the opening (12) inside having a spacer (14) and a plurality of slots (18), and the spacer (14) having a hole (16) and a plurality of press mechanisms (10), each comprising a post (101) disposed on the spacer (14), a spring (102) and a pressing piece (103), to have a gap (19) with the inner surface of the opening (12); the heat dissipation housing (1) having a chamber (17) to communicate with the hole (16) and the joint portion (13); 20

a metal connector (2) disposed to the joint portion (13), the metal connector (2) having a screw connection portion (21) and a lamp head (22) connected to thereto in insulation; 25

a driver circuit board (3) disposed inside the chamber (17), the driver circuit board (3) having two power input wires (31, 31') and two power output wires (32, 32'), one of the power input wire (31) electrically connected to the screw connection portion (21), and the other power input wire (31') electrically connected to the lamp head (22); furthermore, the two power output wires (32, 32') being connected to a joint (33); 30

a light unit slice (4) having a substrate (41), the substrate (41) having a circuit board (42) disposed on a surface thereof and insulated thereto, electrically connecting to at least one light emitting element (43) and further including two welding areas (421) for electrically connecting to two power source wires (45); a plurality of notches (47) provided on the periphery of substrate (41); and 35

a shade (6) disposed on the opening (12), the shade having a connecting portion (61) thereon, and the connecting portion (61) having a plurality of wedges (63) for inserting into the slots (18). 40

45

50

55

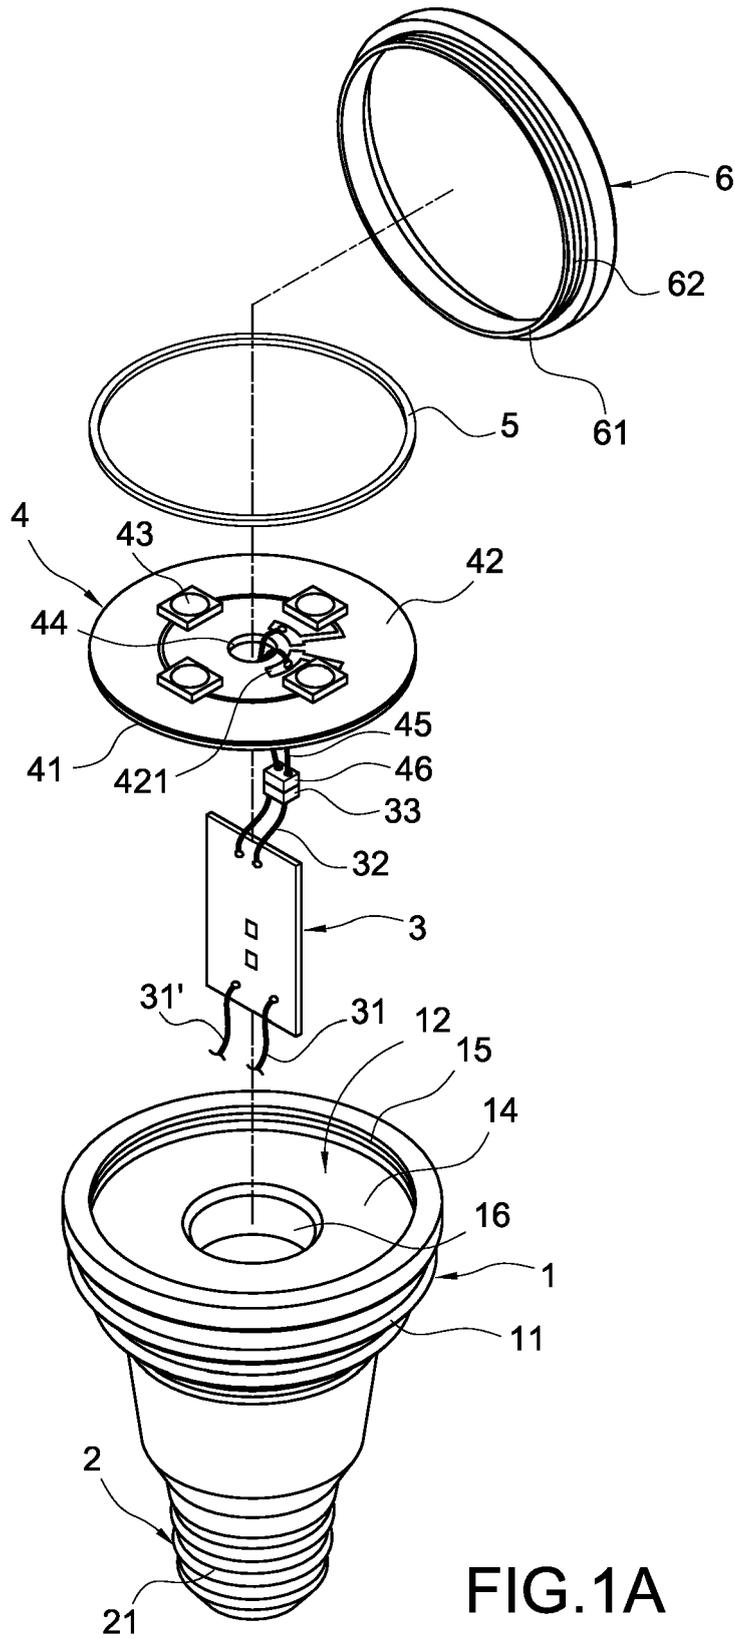


FIG.1A

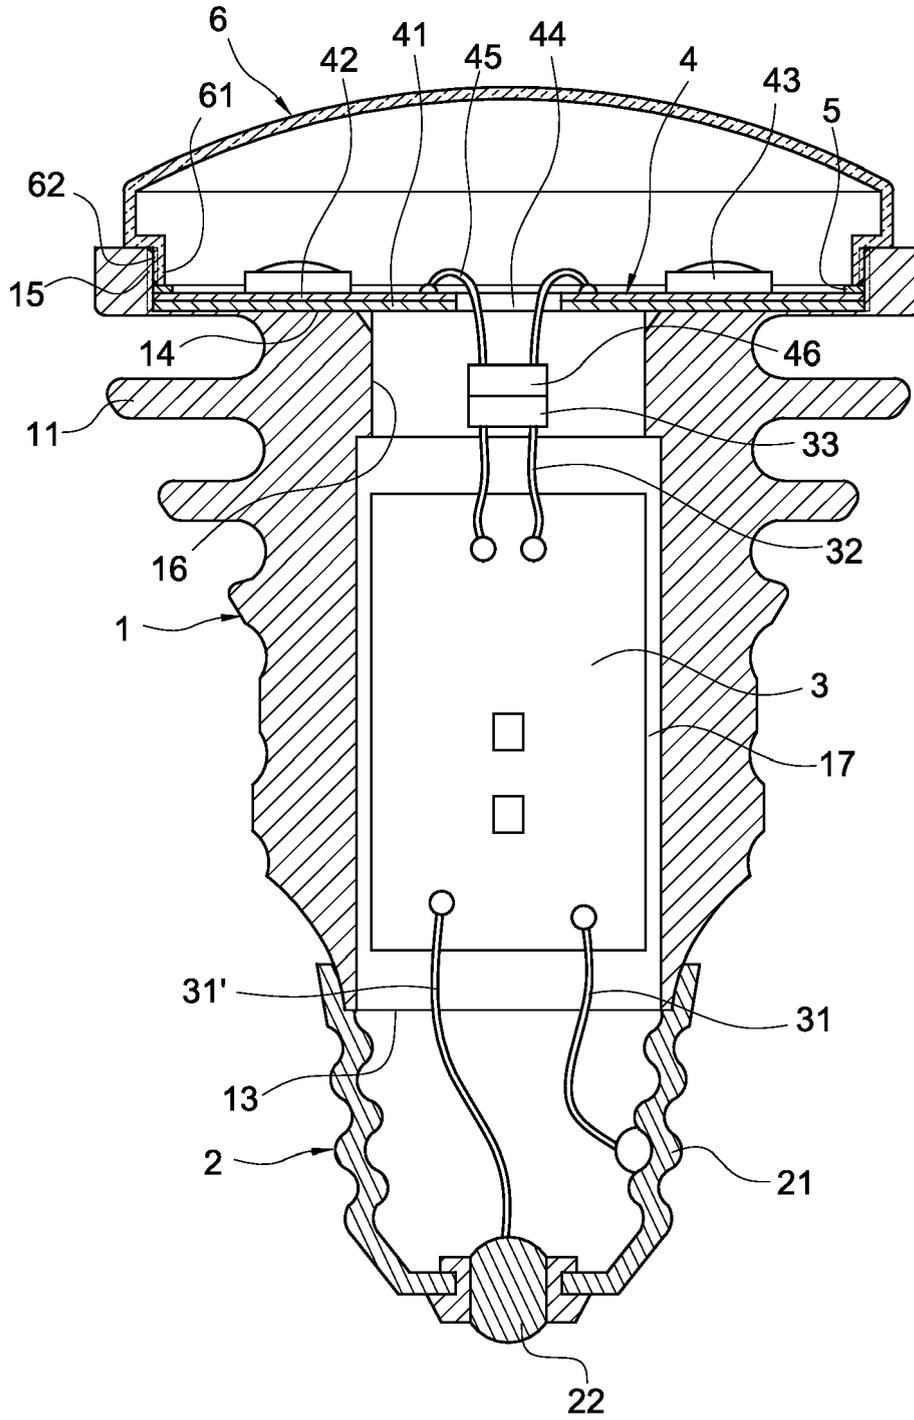


FIG.1B

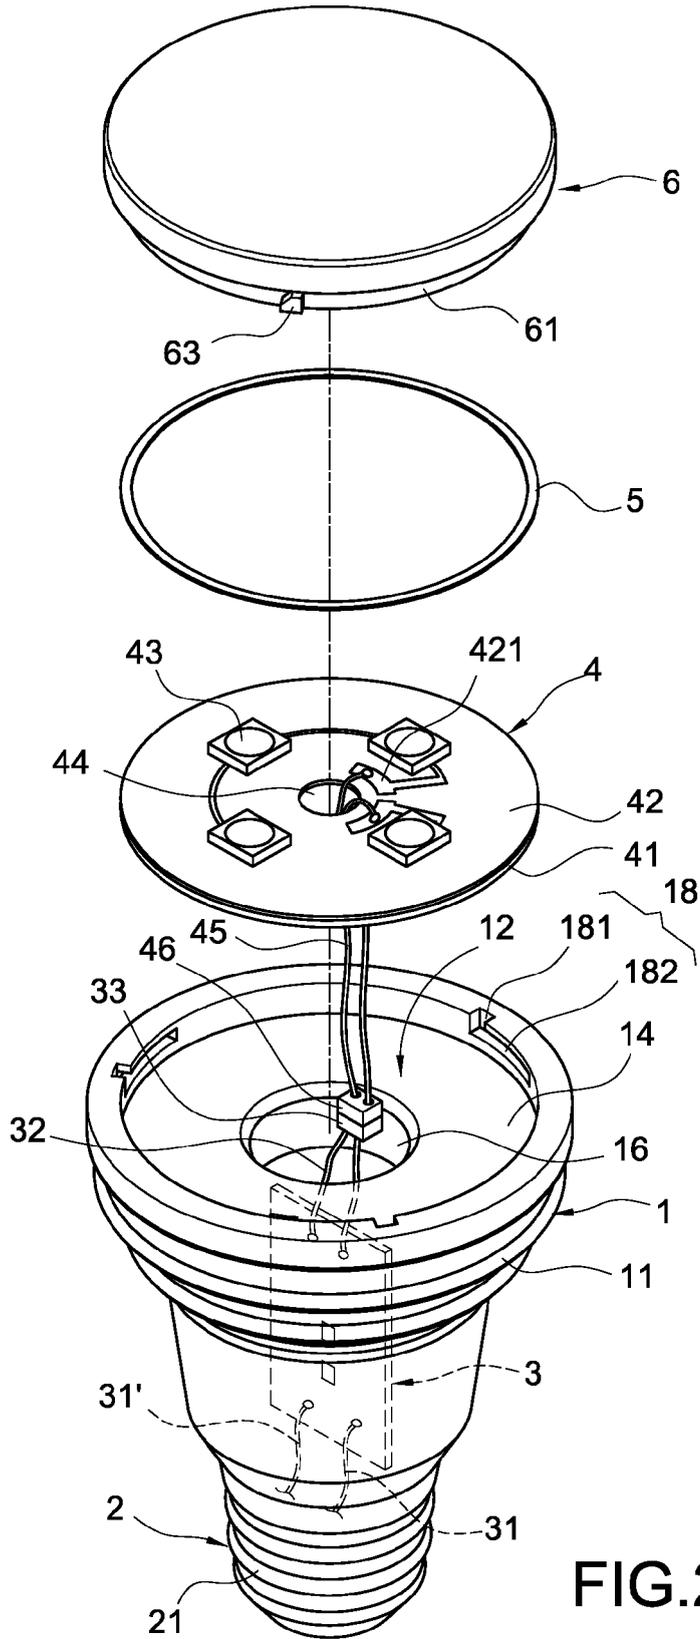


FIG.2A

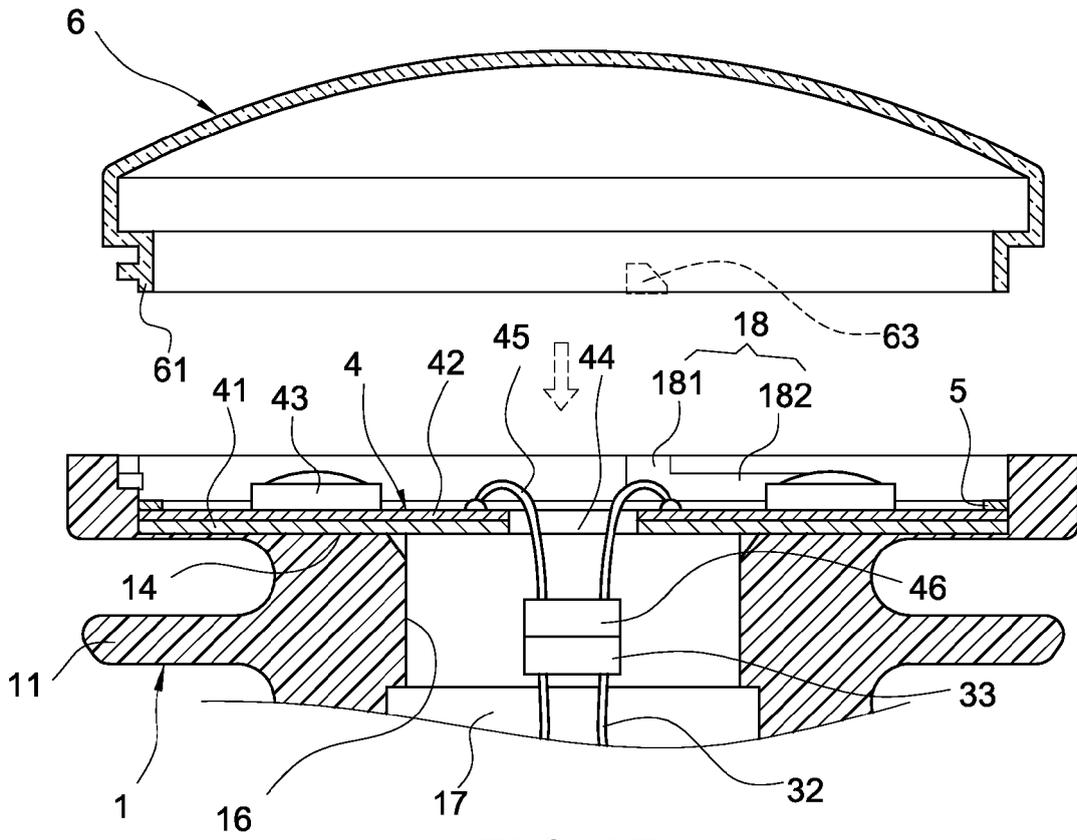


FIG. 2B

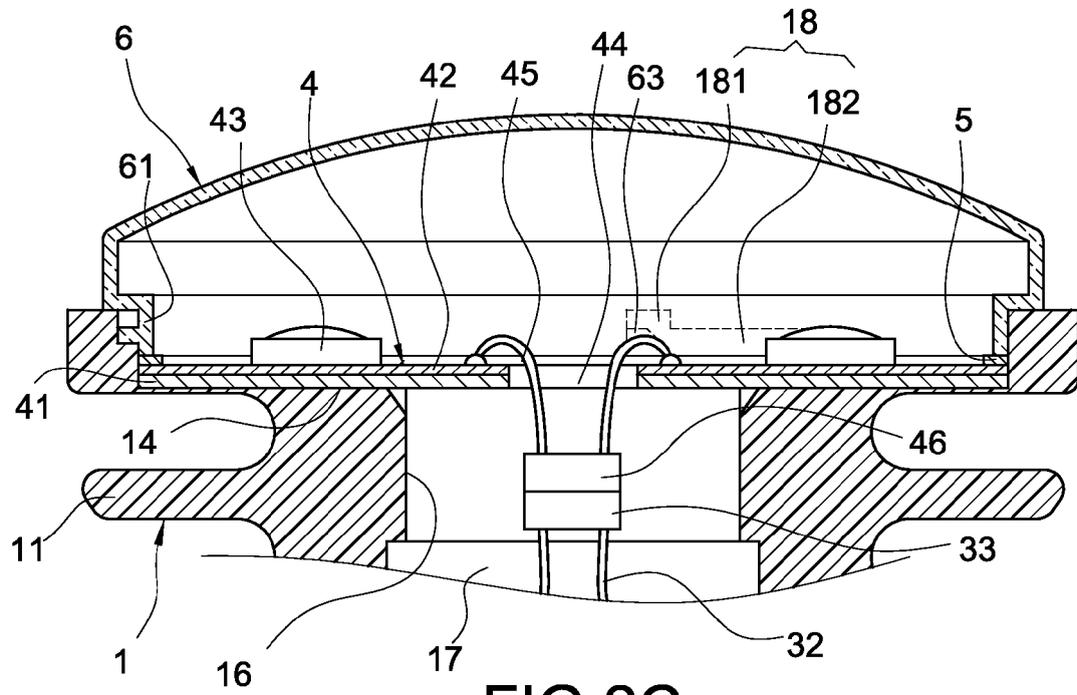


FIG. 2C



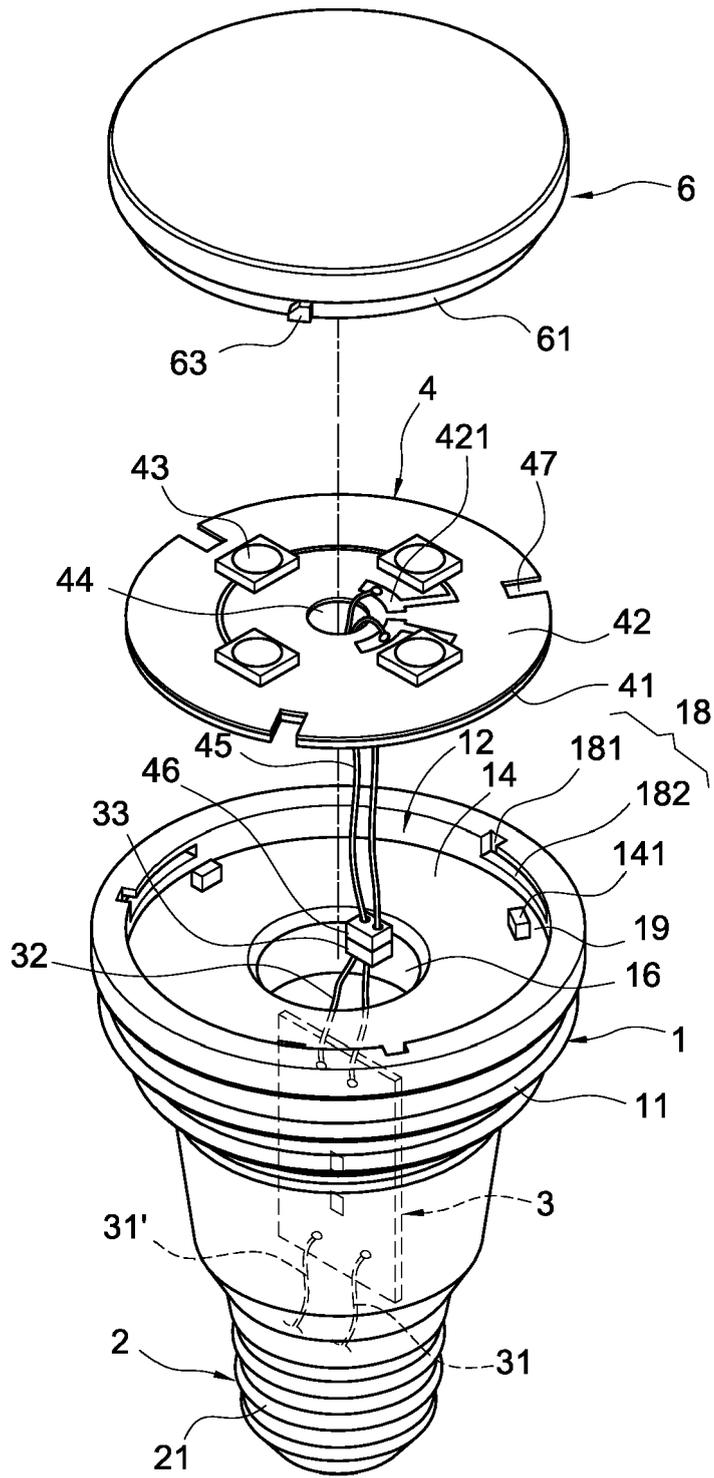


FIG.3A

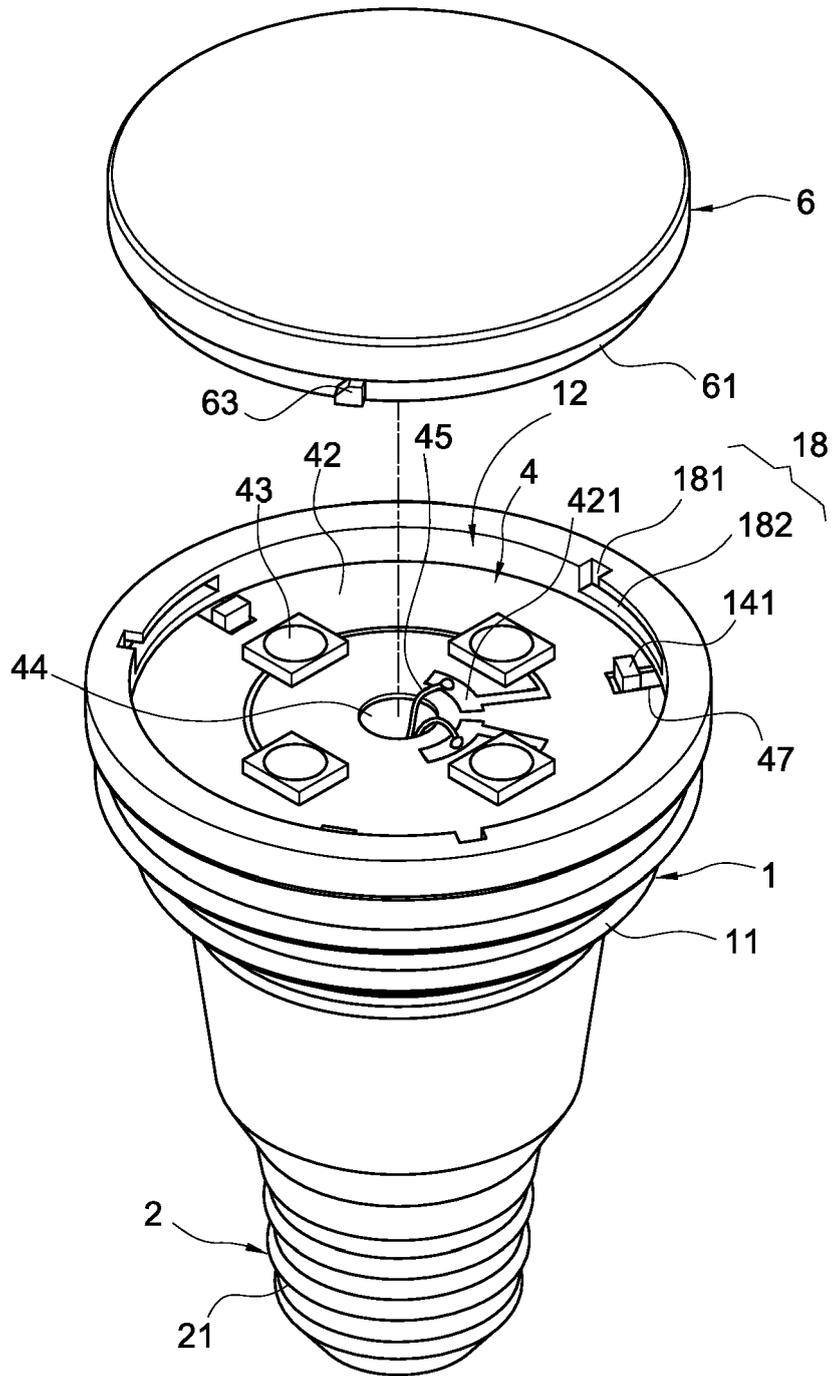


FIG.3B

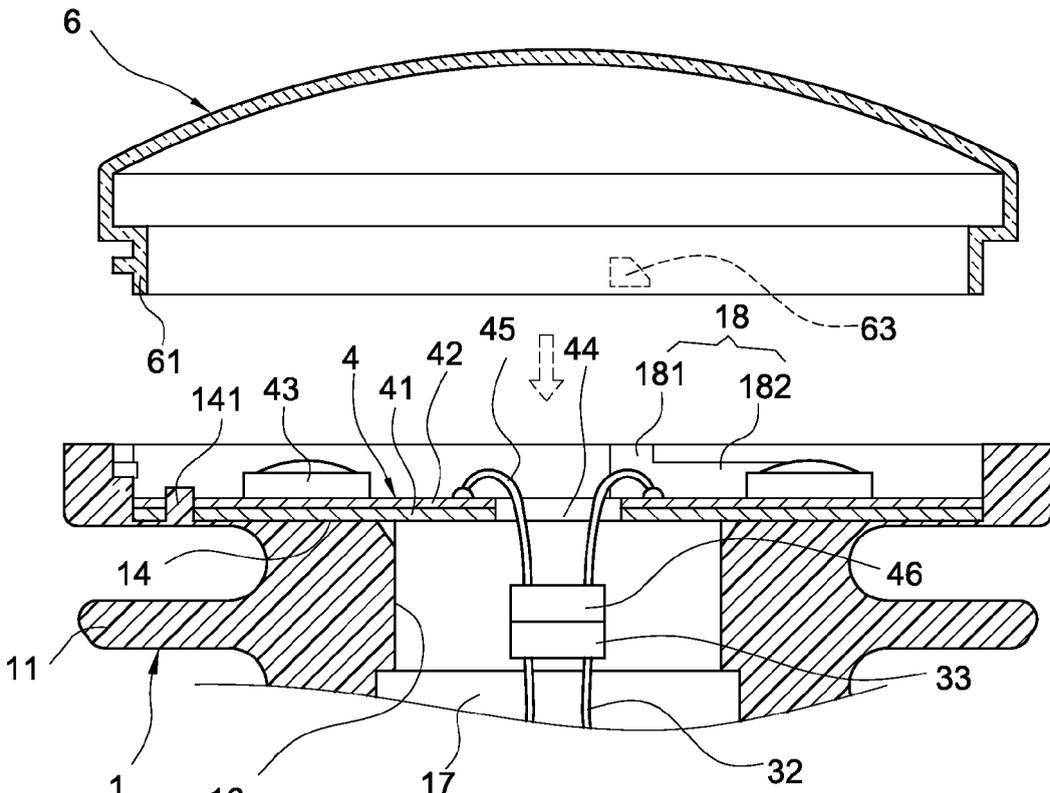


FIG. 3C

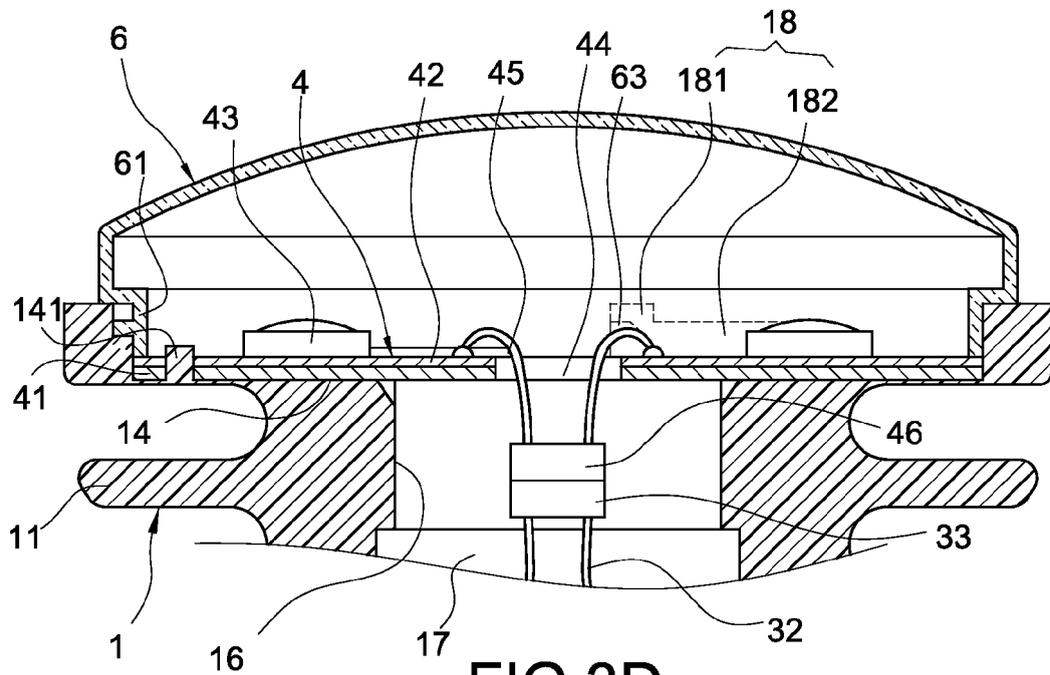


FIG. 3D

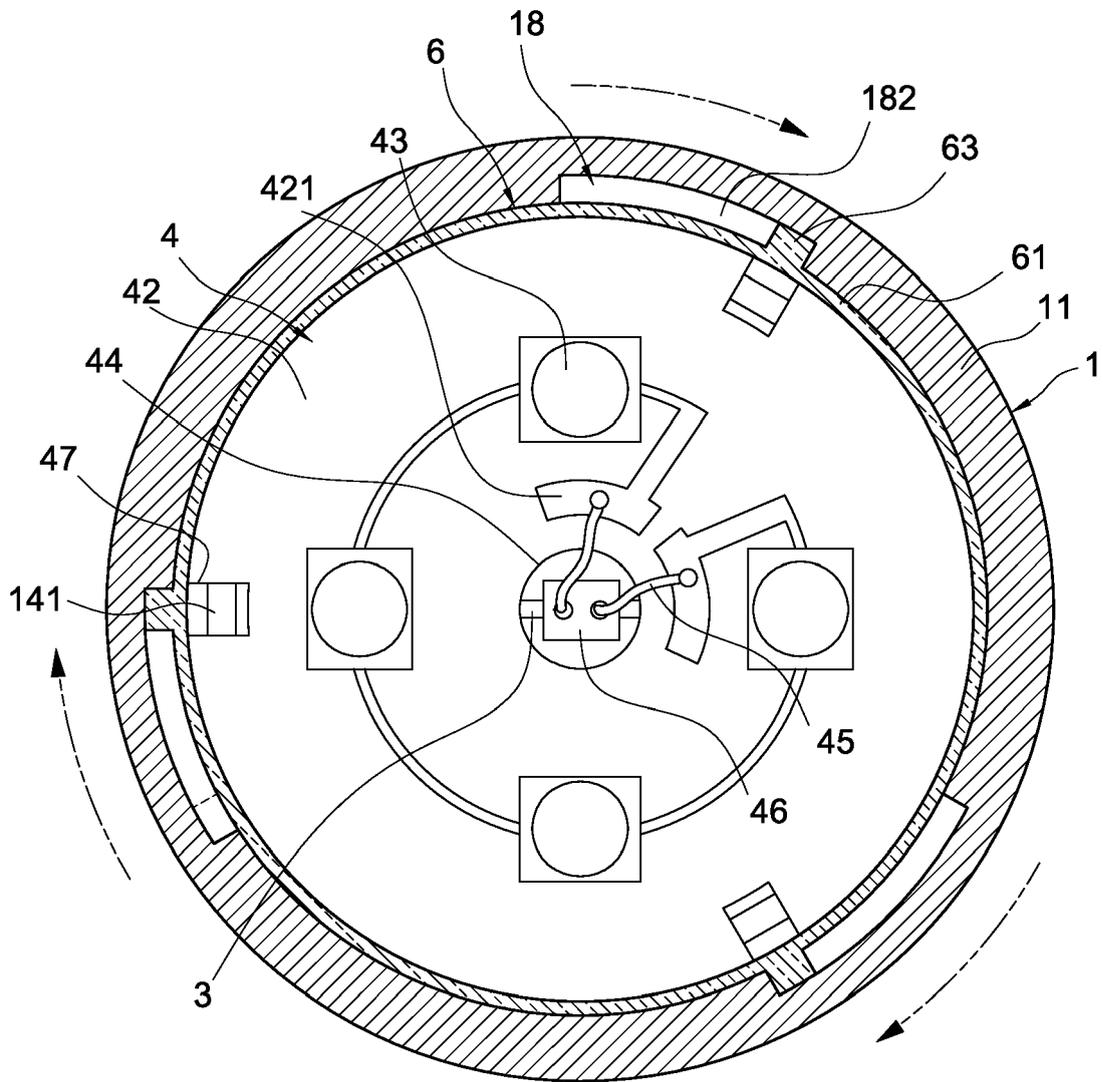


FIG.3E

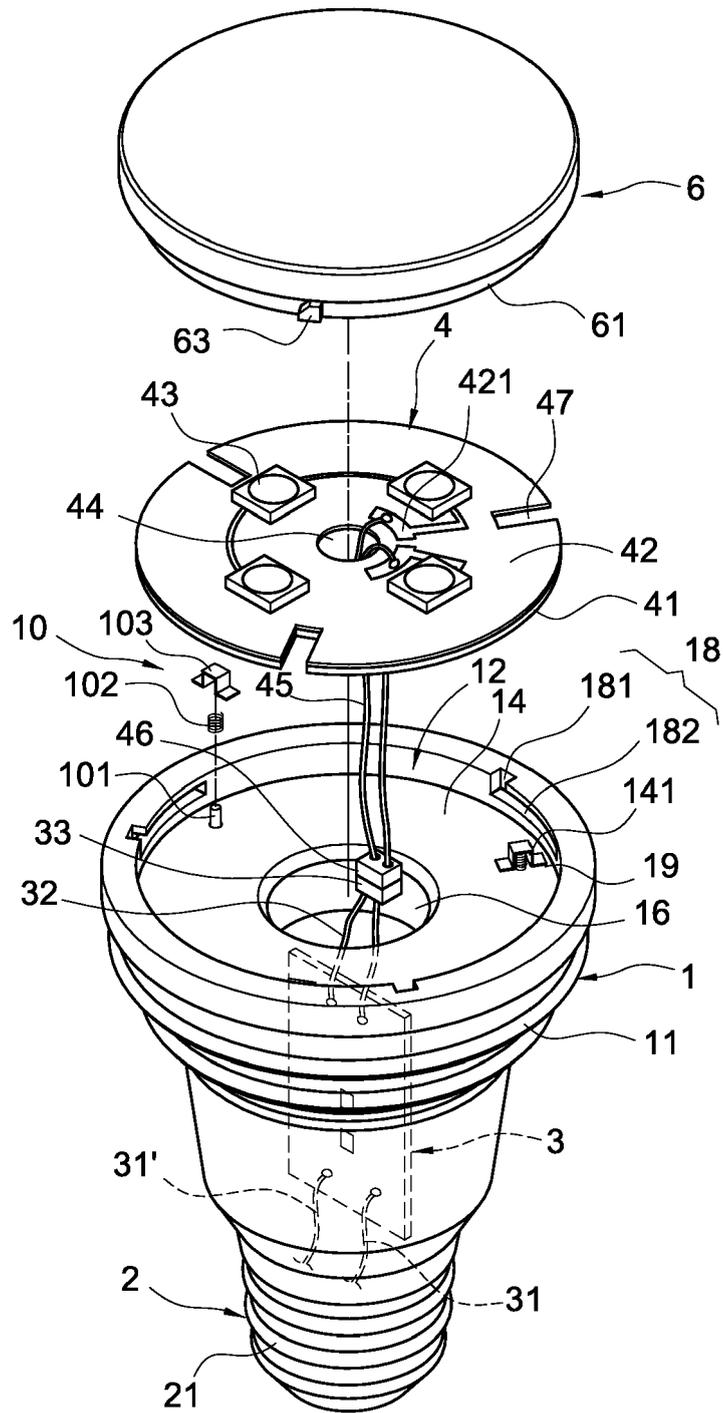
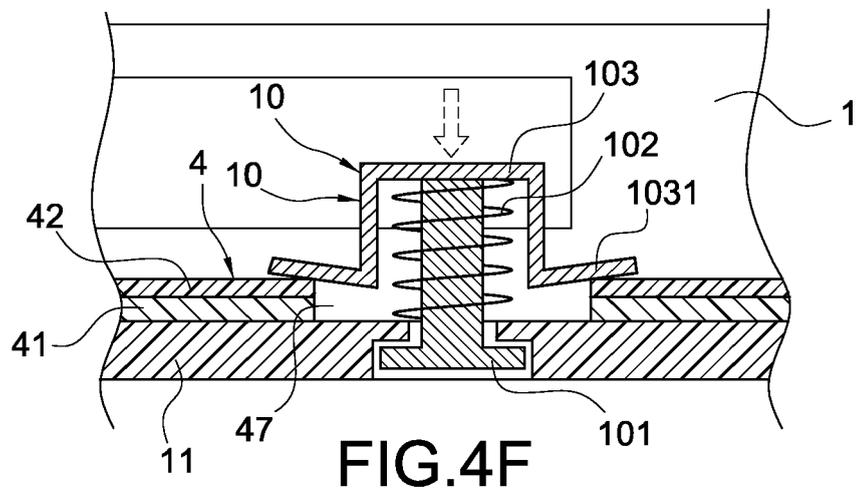
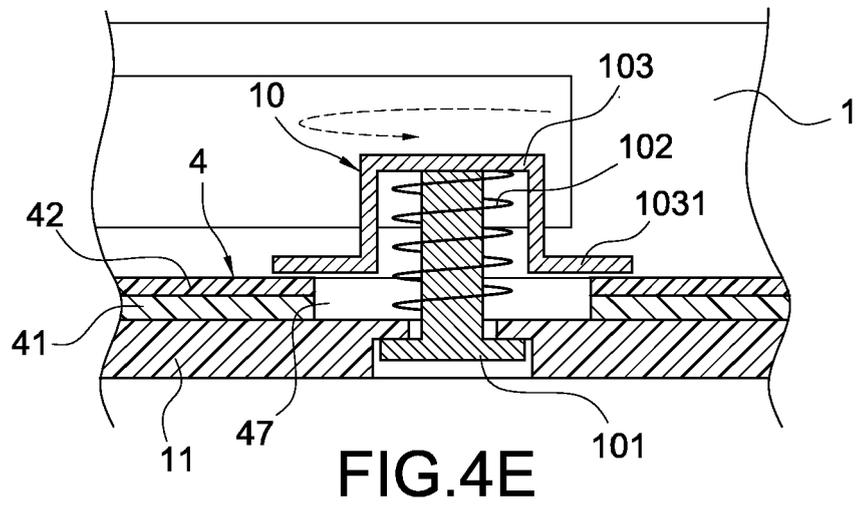
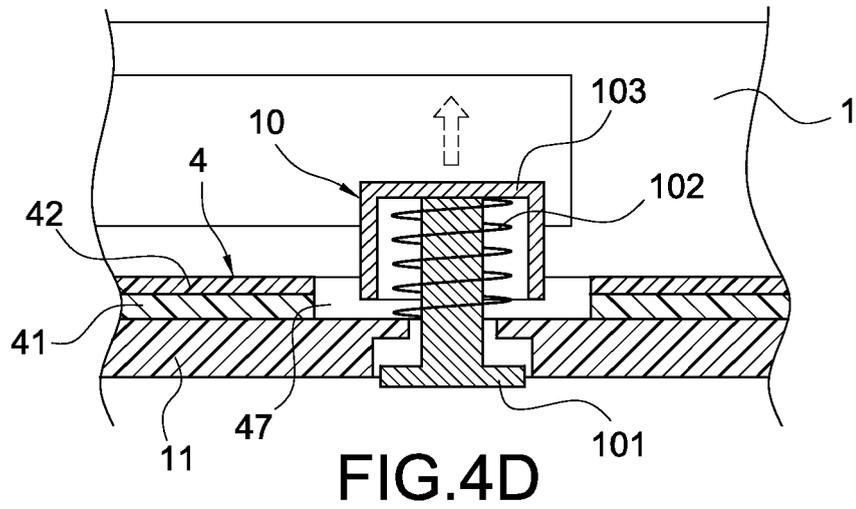


FIG.4A







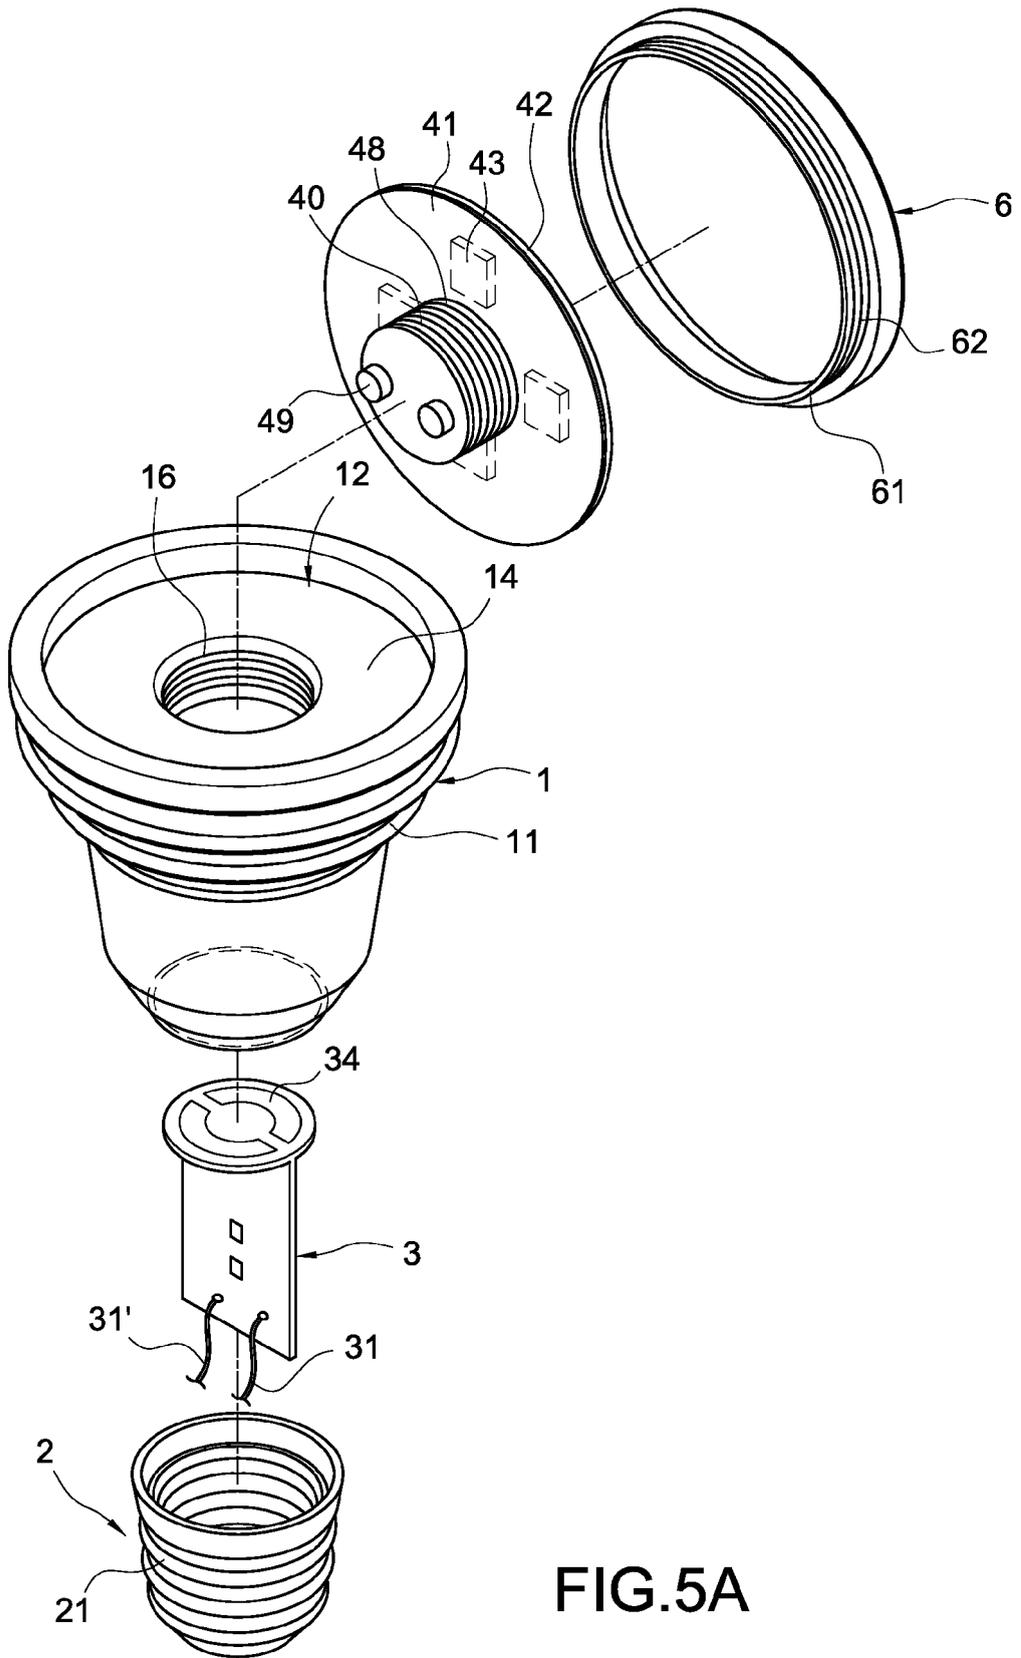


FIG.5A

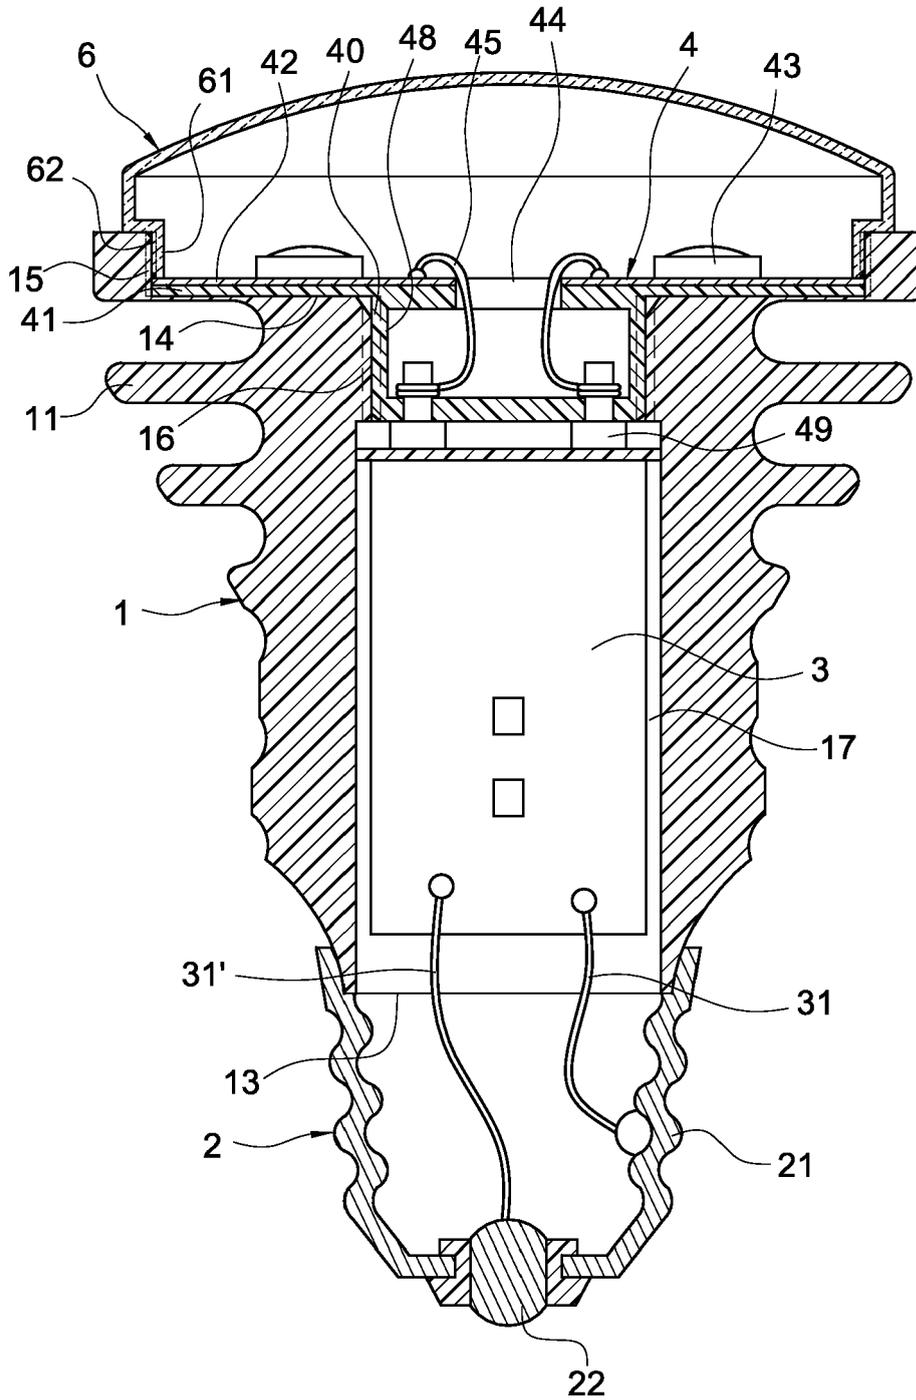


FIG.5B



EUROPEAN SEARCH REPORT

Application Number  
EP 10 17 0965

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2009/237940 A1 (WU CHING-HUEI [TW] ET AL) 24 September 2009 (2009-09-24) * paragraph [0018] * * figures 2,4 *	1-3	INV. F21K99/00 F21V17/12 F21V17/14 F21V23/06
A	US 2009/244899 A1 (CHYN WEN-LONG [TW]) 1 October 2009 (2009-10-01) * paragraphs [0020], [0022], [0027], [0028] * * figure 3 *	1,2	
A	US 2008/024067 A1 (ISHIBASHI KAZUO [JP]) 31 January 2008 (2008-01-31) * paragraphs [0032], [0035], [0038] * * figure 6B * * figure 2 *	1-3	
A	AU 2008 101 029 A4 (CERAMATE TECHNICAL CO LTD) 8 January 2009 (2009-01-08) * page 6, line 7 - line 12 * * figures 1,2,3,5 * * page 7, line 6 - line 12 * * page 9, line 12 - page 10, line 6 * * figures 1,3,4,7 *	1,2	
A	US 2009/296402 A1 (CHANG KUN-JUNG [TW] ET AL) 3 December 2009 (2009-12-03) * paragraphs [0015], [0021] * * figures 3,6B *	1-3, 12-15	
A	US 2010/110691 A1 (HSU ZU-CHAO [TW] ET AL) 6 May 2010 (2010-05-06) * paragraphs [0019] - [0021], [0023], [0026], [0030] * * figures 1-3 *	1-3, 12-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) F21K F21V
1	Place of search The Hague	Date of completion of the search 2 February 2011	Examiner Lange, Christian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)



EUROPEAN SEARCH REPORT

Application Number  
EP 10 17 0965

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2008/298075 A1 (LIAO JUI-TSUNG [TW] ET AL) 4 December 2008 (2008-12-04) * paragraph [0014] * * figure 3 *	12,13	
A	DE 296 16 794 U1 (GIERSIEPEN GIRA GMBH [DE]) 7 November 1996 (1996-11-07) * page 3, paragraph 7 - page 4, paragraph 2 * * figures 1-6 *	4,8	
A	EP 1 811 227 A1 (BJB GMBH & CO KG [DE]) 25 July 2007 (2007-07-25) * paragraphs [0026], [0030] - [0032] * * figures 1,3-7,10 *	8	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 2 February 2011	Examiner Lange, Christian
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 03.82 (P04001)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 10 17 0965

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-02-2011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2009237940	A1	24-09-2009	NONE	
US 2009244899	A1	01-10-2009	NONE	
US 2008024067	A1	31-01-2008	JP 2008034140 A	14-02-2008
AU 2008101029	A4	08-01-2009	NONE	
US 2009296402	A1	03-12-2009	NONE	
US 2010110691	A1	06-05-2010	NONE	
US 2008298075	A1	04-12-2008	NONE	
DE 29616794	U1	07-11-1996	NONE	
EP 1811227	A1	25-07-2007	CN 101004255 A DE 102006002667 A1 ES 2310386 T3 US 2007165415 A1	25-07-2007 09-08-2007 01-01-2009 19-07-2007

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- TW M354691 [0003]
- TW M356067 [0003]
- TW M356852 [0003]
- TW M358239 [0003]
- TW M371846 [0003]
- TW M372427 [0003]
- TW M372798 [0003]
- TW M373439 [0003]
- TW M374538 [0003]