

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 June 2002 (20.06.2002)


PCT

(10) International Publication Number  
**WO 02/47530 A1**

- (51) International Patent Classification<sup>7</sup>: **A47L 15/46**
- (21) International Application Number: PCT/EP01/13615
- (22) International Filing Date:  
22 November 2001 (22.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
00204536.7 15 December 2000 (15.12.2000) EP
- (71) Applicant (for all designated States except AG, AU, BB, BZ, CA, CY, GB, GD, GH, GM, IE, IL, IN, KE, LK, LS, MN, MW, MZ, NZ, SD, SG, SL, SZ, TT, TZ, UG, ZA, ZM, ZW): **UNILEVER N.V.** [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL).
- (71) Applicant (for AG, AU, BB, BZ, CA, CY, GB, GD, GH, GM, IE, IL, KE, LK, LS, MN, MW, MZ, NZ, SD, SG, SL, SZ, TT, TZ, UG, ZA, ZW only): **UNILEVER PLC** [GB/GB]; Unilever House, Blackfriars, London, Greater London EC4P 4BQ (GB).
- (71) Applicant (for IN only): **HINDUSTAN LEVER LTD** [IN/IN]; Hindustan Lever House, 165-166 Backbay Reclamation, 400 020 Mumbai (IN).
- (72) Inventors: **AULBERS, Anton**; TNO Industrie, De Wielen 6, NL-5600 HE Eindhoven (NL). **FLENDRIG, Leonard, M.**; Unilever Research Vlaardingen, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL). **NIEUWKOOP, Evert**; TNO Technische Fysische, Dienst, Stieltjesweg 1, NL-2628 CK Delft (NL). **REINHOUDT, Hank, R.**; Unilever Research Vlaardingen, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL). **VOLANSCHI, Alexandru**; Unilever Research Vlaardingen, Olivier van

[Continued on next page]

(54) Title: DEVICE FOR MONITORING A WASH PROCESS

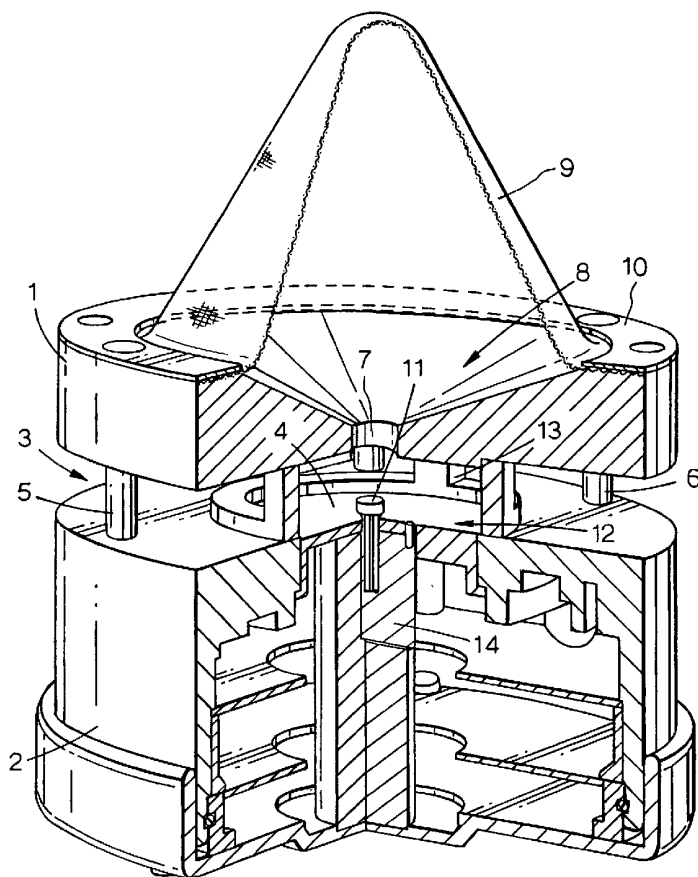

(57) Abstract: A device is provided for monitoring a wash process inside a mechanical washing apparatus, comprising sensor means for measuring physical and/or mechanical parameters of the wash process and recording means for recording the measured parameters within the device. This device comprises means for conducting a washing liquor past the sensor means and means for determining a certain contact time between the washing liquor and the sensor means.



WO 02/47530 A1



Noortlaan 120, NL-3133 AT Vlaardingen (NL). **VAN DER WERFF, John, J.**; TNO Industrie, De Wielen 6, NL-5600 HE Eindhoven (NL).

(74) **Agent: ROSEN JACOBSON, Frans, L., M.**; Unilever N.V., Patent Department, Olivier van Noortlaan 120, NL-3133 AT Vlaardingen (NL).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Device for monitoring a wash process****5 Field of the invention**

The invention relates to a device for monitoring a wash process inside a mechanical washing apparatus, comprising sensor means for measuring physical and/or mechanical parameters of the wash process and recording means for recording the measured  
10 parameters within the device.

With the expression "mechanical washing apparatus" each apparatus for washing objects is meant which functions based upon, at least, a mechanical action (however without excluding  
15 any other, such as for example chemical or biological, action). An example of such an apparatus may be a ware washing apparatus, however also apparatuses for washing other objects, such as for example laundry, are meant. Further, "physical" is to be understood as including biological and chemical too.

20

**Background of the invention**

The optimisation of the operation of mechanical washing apparatuses becomes more and more an important customer request. By such an optimisation not only the obtained  
25 performance of the apparatus may be optimised, but it also becomes possible to take into account other factors, such as an improved use of materials, a reduced energy consumption and a reduction of environmental pollution. It is evident that the possibility of optimising the operation of such an apparatus  
30 constitutes an increasingly important economical factor. As a first step to such an optimisation the parameters defining the wash process have to be determined.

It is an object of the present invention to provide an improved  
35 device for enabling such a determination.

**Definition of the invention**

Thus, according to the invention, the device is characterized by means for conducting a washing liquor past the sensor means and means for determining a certain contact time between the washing liquor and the sensor means. As a result the above-mentioned parameters can be determined in an effective way, notwithstanding the sometimes short periods the device is in contact with the washing liquor.

**10 Detailed description of the invention**

The device according to the invention may be applied to different wash processes, industrial as well as domestic. Thus it is possible, that the wash process is a domestic laundry wash process, wherein the monitoring device is introduced into a revolving drum of a washing machine. Another possibility is, that the wash process is an industrial laundry wash process, wherein the monitoring device is introduced into a tunnel washing machine. In this latter case the device will follow the laundry through the entire tunnel, thus measuring at all different stages of the wash process.

However, the device according to the invention is not only applicable to a laundry wash process, but also to a ware wash process. Thus, the wash process might be a domestic ware wash process, wherein the monitoring device is introduced into a ware washer, but also the wash process might be an industrial ware wash process, wherein the monitoring device is introduced onto, and moves along with a conveyor belt of an industrial ware washer. In this aspect, the expression "ware" is to be understood as comprising, among others, dishes, bottles (glass as well as plastic), pots, pans etcetera.

According to a preferred embodiment of the device the sensor means are located in a central cavity of the device, wherein an entry channel connects the surroundings with the central cavity.

In the central cavity the sensor means are protected against damage, whereas nevertheless the entry channel exposes the sensor means to the washing liquor. The central cavity further contributes to a sufficient contact time.

5 Further it is possible that the entry channel is provided with an entry funnel. Such a funnel promotes the entry of washing liquor into the device.

Also further, an embodiment is proposed in which the entry channel is covered by a filter. Such a filter may physically  
10 block solids from the washing liquor to avoid soiling of the sensor means.

When the central cavity further connects with the surroundings by means of an exit channel a continuous refreshment of the  
15 washing liquor in contact with the sensor means is guaranteed.

The means for determining a certain contact time between the washing liquor and the sensor means can be optimised in different ways. As a first possibility the cross-section of the  
20 exit channel is smaller than the cross-section of the entry channel. However it is also possible, that in the exit channel obstruction means are provided.

Still another possibility is, that the entry channel and exit channel are interconnected by a meandering channel section,  
25 wherein the central cavity adjoins the meandering section.

In a preferred embodiment of the device according to the invention the entry channel extends substantially centrally of the device, whereas the exit channel comprises a  
30 circumferential slot extending radially outward from the central cavity. The washing liquor enters the device centrally (axially) through the entry channel and reaches the central cavity with sensor means. From there the washing liquor flows radially out of the device.

35

When, in this embodiment, the central cavity is surrounded by a ledge partially separating the central cavity from the exit

channel, the above-mentioned contact time still can be enlarged. This contact time is also determined by the width of the slot.

5 In a very special embodiment the entry channel is shaped similar to a bottle. Thus the washing process within a bottle-washer may be reproduced and monitored. In its most simple form a bottle without its bottom is positioned on top of a basis supporting the sensor means. Exit means for the washing liquor  
10 should be provided preventing the bottle from overflowing.

When the device comprises attachment means for attaching it to the mechanical washing apparatus, it can follow predetermined tracks through the apparatus.

15

Another embodiment of the device is mentioned, wherein it is part of a diagnosis rack with substantially planar shape. Such a diagnosis rack is especially useful in an industrial dishwasher. If, for example, the diagnosis rack further  
20 comprises an array of sensor means, a two dimensional monitoring can be accomplished, such as of the temperature and mechanical action which both vary with the widthwise position within the apparatus (as an example the position and functioning of sprinklers for the washing liquor may be  
25 monitored effectively in this manner).

To obtain additional information about the washing process, the diagnosis rack further may comprise standard soiled substrates, such as plates or alike, enabling benchmarking the performance  
30 of the apparatus against other apparatuses. The degree of cleaning will provide a performance rating and from the pattern of remaining soil, additional information may be obtained.

Apart from the means mentioned before, the device may comprise  
35 other means enhancing its operation. Without being complete there may be mentioned means for the measurement of time (timer or clock), means for powering the device, and means for reading

out the measured parameters by proximity to a docking station. The mechanical parameters may include, among others, force and acceleration (for example for the impact of a jet of washing liquor and the movements of the device, respectively). The  
5 physical parameters may include, among others, concentration, conductivity, pH, turbidity, redox, pCa, pNa and EC. The use of dynamic surface tension sensors is contemplated too.

The invention will be elucidated referring to the drawings in  
10 which embodiments of a device according to the invention are shown.

Figure 1 shows, partly broken-away a perspective view of a first embodiment of the device according to the invention;  
15 figure 2 shows, schematically, a second embodiment of the device according to the invention;  
figure 3 shows, schematically, a third embodiment of the device according to the invention, and  
figure 4 shows, again schematically, a top plan view of a  
20 fourth embodiment of the device according to the invention.

The device for monitoring a wash process inside a mechanical washing apparatus as shown in figure 1 comprises an upper housing part 1 and a lower housing part 2 separated by a  
25 circumferential slot 3 extending radially outward from a central cavity 4. The upper housing part 1 and lower housing part 2 are interconnected and kept at a certain distance by means of distance pins 5. Further a ground pin 6 is shown.

30 The central cavity 4 connects to the surroundings by an entry channel 7 provided with an entry funnel 8. Furthermore a filter 9, which is attached to the upper housing part 1 with a filter ring 10, covers the entry funnel 8 of the entry channel 7.

35 Within the central cavity 4 sensor means for measuring, among others, physical and/or mechanical parameters of the wash process are positioned. Of these sensor means figure 1 shows

clearly a protruding temperature sensor 11. This temperature sensor 11, but also the other sensor means not illustrated, are positioned such in a sensor cartridge 12 that washing liquor entering the central cavity 4 through the entry funnel 8 and entry channel 7 will contact these sensor means. Thereafter the washing liquor will leave the device through the slot 3.

The central cavity 4 is surrounded by a ledge 13 partially separating the central cavity 4 from the slot 3 which functions as an exit channel. The dimensions of the ledge 13 as well as the dimensions of the slot 3 determine the flow rate of the washing liquor through the slot 3, and thus the contact time between the washing liquor and the sensor means. Among others, by amending the length of the distance pins 5 this flow rate may be amended. Thus, a sufficient contact time between the sensor means and entering washing liquor may be guaranteed, also in cases where the device resides only a short time in the washing liquor.

The interior 14 of the lower housing part 2 is hollow and houses several components of the device, such as recording means for recording the measured parameters, energy means for powering the device, means for measuring of the elapsed time, such as a timer or clock, and means for reading out the information stored in the recording means by proximity to a docking station etcetera. For example, parameters measured by the sensors means will be exchanged with an external device (not shown) by exchanging means, for example an inductive link. This inductive link also may be used for automatically recharging energy means such as batteries of the device when the monitoring device interacts with the external device. In such a case the batteries are rechargeable.

In figure 2 schematically a second embodiment of a monitoring device according to the invention is illustrated. An entry channel 15 with entry funnel 16 is connected to an exit channel



18 by means of a meandering channel section 17. The flow of a washing liquor is indicated by arrow 19.

The central part of the meandering channel section 17 is in contact with sensor means 20 which are surrounded by a housing 21 which may correspond with the lower housing part 2 of the embodiment according to figure 1.

The meandering channel section 17 creates a flow restriction, thus enabling a certain contact time between a washing liquor and the sensor means 20. Further, as visible in figure 2, the cross-section of the exit channel 18 is smaller than the cross-section of the entry channel 15. This also is helpful in providing a certain contact time. Another way of realising the desired contact time could be the provision of obstruction means in the exit channel 18 (not shown).

The device according to figure 2 is particularly useful for monitoring a wash process inside a mechanical ware washing apparatus or dishwasher.

Figure 3 shows, extremely simplified, the basic characteristic of still another embodiment of the monitoring device according to the invention. A base 22 is provided which might correspond with the lower housing part 2 according to figure 1, and which is provided with sensor means (not shown). On top of said base a bottle-like part 23 is positioned defining an entry channel 24. An exit channel 25 is defined between the lower part of the bottle-like part 23 and the base 22.

30

This embodiment of the device for monitoring a wash process is meant for use in a bottle-washer. The bottle-like part 23 simulates the conditions inside a bottle to be washed. By the way, the bottle-like part 23 indeed may be a bottle, of which the bottom has been removed.

35

Finally, reference is made to figure 4 in which a diagnosis rack 26 is shown in a top plan view. This diagnosis rack 26 is meant to be put on a conveyor belt of a mechanical ware washing apparatus and to travel along therewith through the apparatus, in the same way as the ware to be washed. Two parallel arrays 27 and 28 of sensors (for example, temperature sensors and pressure sensors) extend in parallel along the diagnosis rack 26. A space 29 is provided for other sensors, for energy means, for recording means or for a monitoring device, for example as illustrated in one of the previous figures. The rack (26) also contains means (not shown) for attaching a device according to the present invention as shown in Figure 1 thereto.

The importance of such a diagnosis rack may be illustrated as follows. While travelling through a washing apparatus, the parameters to be measured vary. However, these parameters may also vary over the width of the conveyor belt, since for example sprinklers for the washing liquor may not be placed optimally, or due to wall effects. Therefore, a two-dimensional scan of, for example, the temperature and the mechanical action is performed by the arrays 27, 28 of sensors. This provides a good way to visualise the wash process inside of the apparatus. More particularly, this scan gives information on the value of the measured parameters over the width of the apparatus as a function of time (during the period wherein the rack travels through the apparatus).

Because the temperature, and especially the mechanical action, on the surface of the ware to be washed may be different from the values measured by the sensor arrays 27, 28, it is proposed to equip additional plates 30 with temperature and force sensors. Furthermore, the cleaning performance of a specific mechanical ware washing apparatus can be benchmarked against other apparatuses by putting standard soiled plates 31 on the diagnosis rack 26. The degree of cleaning of these standard soiled plates 31 will provide a performance rating and from the

pattern of the remaining soil additional information may be obtained.

Finally, figure 4 shows shield plates 32 and customer soiled 5 plates 33.

The invention is not limited to the embodiments described before which may be varied widely within the scope of the invention.

**Claims**

1. Device for monitoring a wash process inside a mechanical washing apparatus, comprising sensor means for measuring physical and/or mechanical parameters of the wash process and recording means for recording the measured parameters within the device, **characterized** by means for conducting a washing liquor past the sensor means and means for determining a certain contact time between the washing liquor and the sensor means.

2. Device according to claim 1, **characterized** in that the sensor means are located in a central cavity of the device and wherein an entry channel connects the surroundings with the central cavity.

3. Device according to claim 2, **characterized** in that the entry channel is provided with an entry funnel.

4. Device according to claim 2 or 3, **characterized** in that the entry channel is covered by a filter.

5. Device according to any of claims 2-4, **characterized** in that the central cavity further connects with the surroundings by means of an exit channel.

6. Device according to claim 5, **characterized** in that the cross-section of the exit channel is smaller than the cross-section of the entry channel.

7. Device according to claim 5, **characterized** in that in the exit channel obstruction means are provided.

8. Device according to claim 5, **characterized** in that the entry channel and exit channel are interconnected by a meandering channel section, wherein the central cavity adjoins the meandering section.

9. Device according to claim 5, **characterized** in that the entry channel extends substantially centrally of the device, whereas the exit channel comprises a circumferential slot extending radially outward from the central cavity.
10. Device according to claim 9, **characterized** in that the central cavity is surrounded by a ledge partially separating the central cavity from the exit channel.
11. Device according to any of claims 2-10, **characterized** in that the entry channel is shaped similar to a bottle.
12. Device according to any of the previous claims, **characterized** in that it comprises attachment means for attaching the device to the mechanical washing apparatus.
13. Device according to claim 1, **characterized** in that it is part of a diagnosis rack with substantially planar shape.
14. Device according to claim 13, **characterized** in that the diagnosis rack further comprises an array of sensor means.
15. Device according to claim 13 or 14, **characterized** in that the diagnosis rack further comprises standard soiled substrates, such as plates or alike.
16. Device according to any of claims 13-15, **characterized** in that the diagnosis rack is capable of making a 2-dimensional scan of the measured parameters.

Fig.1.

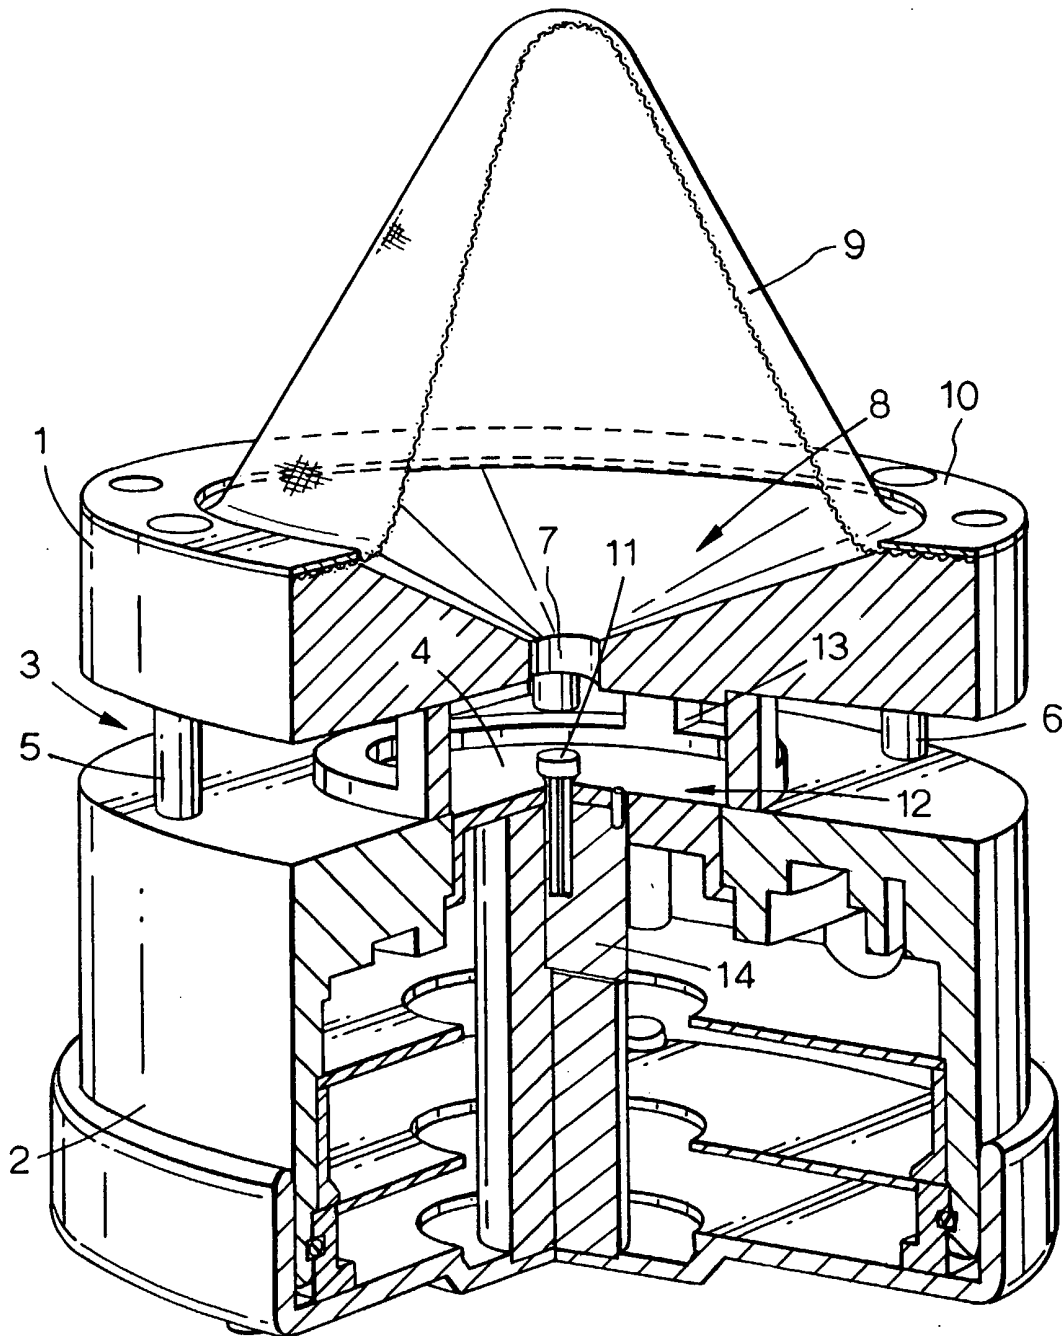


Fig.2.

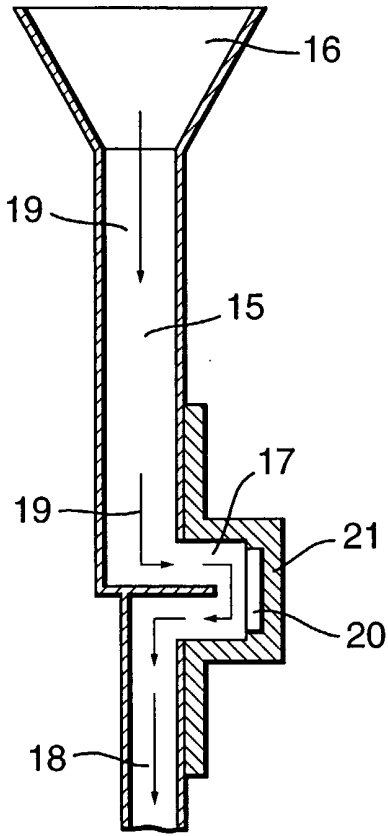


Fig.3.


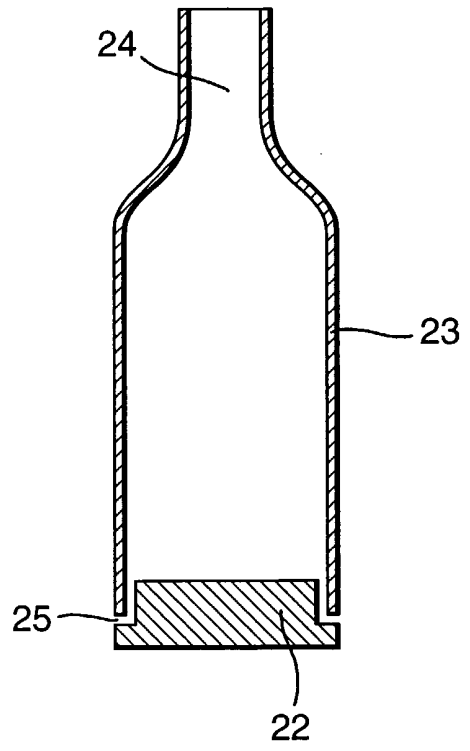


Fig.4.

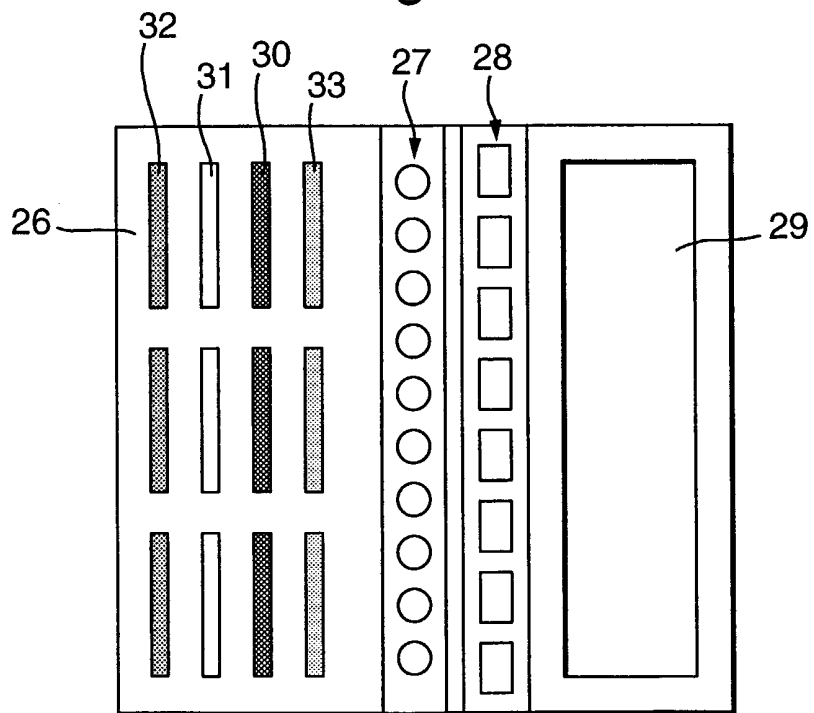

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/13615

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A47L15/46

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A47L D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 01 07702 A (UNILEVER PLC) 1 February 2001 (2001-02-01) page 6, line 22 -page 7, line 28 page 8, line 27 -page 9, line 3 claims 1-21 figures 1-4	1-3,5-9, 12-15
A	DE 197 14 695 A (ELEKTROMANUFAKTUR ZANGENSTEIN HANAUER GMBH & CO.) 15 October 1998 (1998-10-15) abstract figure 1	1
A	WO 96 21390 A (GENERAL ELECTRIC COMPANY) 18 July 1996 (1996-07-18) page 7, line 22 -page 8, line 30 page 27, line 13 -page 28, line 28 figure 2	1
	-/--	

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

11 April 2002

Date of mailing of the international search report

18/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Courrier, G



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/13615

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 197 14 664 A (ELEKTROMANUFAKTUR ZANGENSTEIN HANAUER GMBH & CO.) 15 October 1998 (1998-10-15) -----	

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No  
PCT/EP 01/13615

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0107702	A	01-02-2001	AU	5825500 A		13-02-2001
			WO	0107702 A1		01-02-2001
-----						
DE 19714695	A	15-10-1998	DE	19714695 A1		15-10-1998
-----						
WO 9621390	A	18-07-1996	US	5560060 A		01-10-1996
			AU	702495 B2		25-02-1999
			AU	4653096 A		31-07-1996
			EP	0750466 A1		02-01-1997
			JP	9510662 T		28-10-1997
			WO	9621390 A1		18-07-1996
-----						
DE 19714664	A	15-10-1998	DE	19714664 A1		15-10-1998
			US	5875783 A		02-03-1999
-----						