

19



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

0 257 577
A2

12

EUROPEAN PATENT APPLICATION

21 Application number: 87112145.5

51 Int. Cl.4: **B41M 5/26**

22 Date of filing: 21.08.87

30 Priority: 22.08.86 US 899273
06.10.86 US 915451
08.06.87 US 59443

43 Date of publication of application:
02.03.88 Bulletin 88/09

84 Designated Contracting States:
BE CH DE FR GB LI NL

71 Applicant: **EASTMAN KODAK COMPANY**
Patent Department 343 State Street
Rochester New York 14650(US)


72 Inventor: **Byers, Gary Wayne**
EASTMAN KODAK COMPANY Patent Dpt. 343
State Street
Rochester New York 14650(US)
Inventor: **Evans, Steven**
EASTMAN KODAK COMPANY Patent Dpt. 343
State Street
Rochester New York 14650(US)
Inventor: **Weber, Helmut**
EASTMAN KODAK COMPANY Patent Dpt. 343
State Street
Rochester New York 14650(US)

74 Representative: **Brandes, Jürgen, Dr.rer.nat.**
Thierschstrasse 8
D-8000 München 22(DE)

54 **N-alkyl- or n-aryl-aminopyrazolone merocyanine dye-donor element used in thermal dye transfer.**

57 A dye-donor element for thermal dye transfer comprises a support having thereon a 3-(N-alkyl-or N-aryl-amino)-2-pyrazolin-5-one merocyanine dye dispersed in a polymeric binder, the merocyanine dye being capable of transfer by diffusion to a dye-receiving element upon the application of heat and being incapable of substantial photolysis, the merocyanine dye being substituted or unsubstituted on the bridging methine carbon atoms.

In a preferred embodiment, the merocyanine dye has the formula:

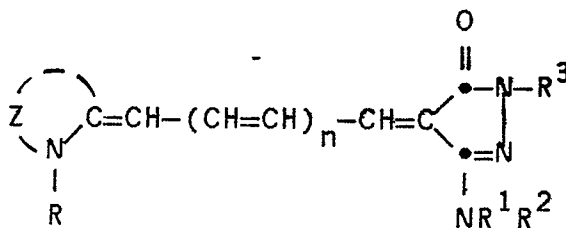

wherein:

R represents a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms;

R¹ and R² each independently represents hydrogen, with the proviso that only one of R¹ and R² may be hydrogen at the same time; a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a

EP 0 257 577 A2

substituted or unsubstituted aryl group of from 6 to 10 carbon atoms; or R¹ and R² may be combined together with the nitrogen to which they are attached to form a heterocyclic ring system;

R³ is R;

n represents 0 or 1; and

Z represents the atoms necessary to complete a 5-or 6-membered substituted or unsubstituted heterocyclic ring.

hydrogen at the same time; a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms, such as those discussed above for R; or R¹ and R² may be combined together with the nitrogen to which they are attached to form a heterocyclic ring system;

5 R³ is R;

n represents 0 or 1; and

Z represents the atoms necessary to complete a 5-or 6-membered substituted or unsubstituted heterocyclic ring such as 3H-indole, benzoxazole, thiazoline, benzimidazole, oxazole, thiazole, etc., and may include linking groups such as -CR₂-, -CR=CR-, -O-, -S-, -Te-, -Se-, or -NR-.

10 In a preferred embodiment of the invention, Z represents the atoms necessary to complete an indoline ring. In another preferred embodiment of the invention, R¹ and R² are both methyl. In another preferred embodiment of the invention, R³ is phenyl.


These dyes may be prepared by synthetic procedures similar to those described in copending Application Serial No. _____, by Byers and Chapman entitled "Mercocyanine Dye-Donor Element Used in
15 Thermal Dye Transfer", filed of even date herewith.

Compounds included within the scope of the invention include the following:

20

25

30

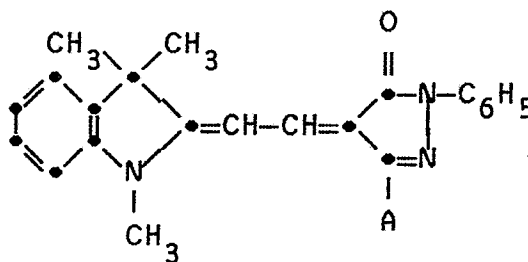

Yellow Dye


35

Compound


A

40


1




2



3




4




45

5




50

6



55

5

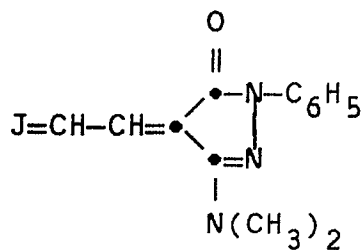

10


Yellow Dye

Compound

J


15

7



20


8



25

30


9



35

40


10

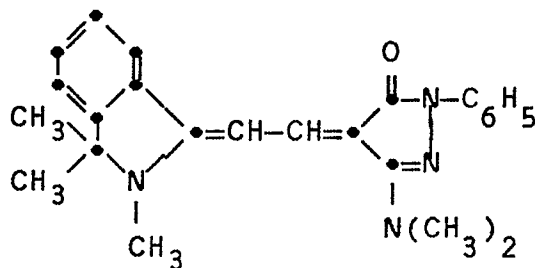

45

50


11

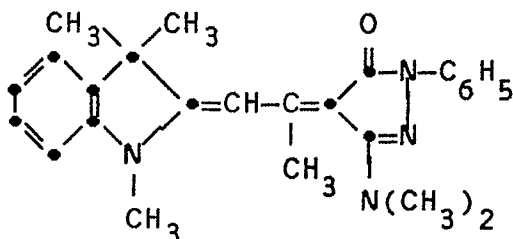

55

5


12

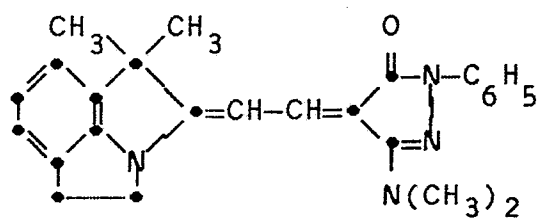

10

15


13

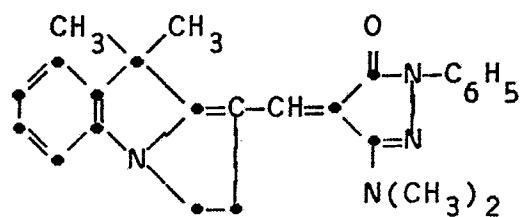

20

25


14

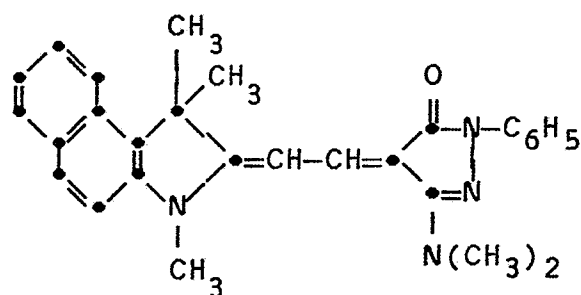

30

35


15

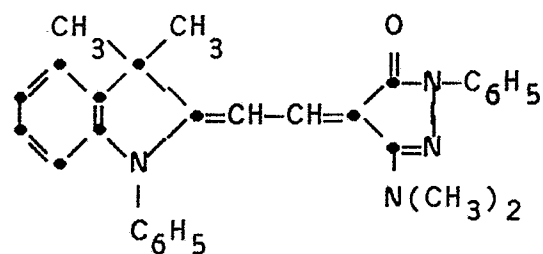

40

45


16

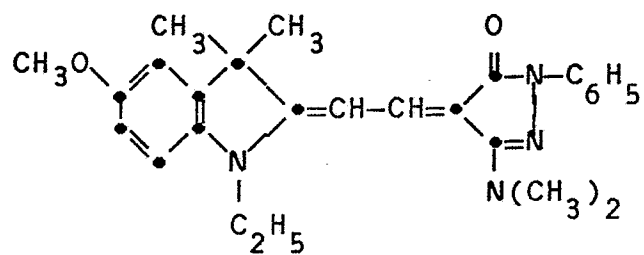

50


55

17

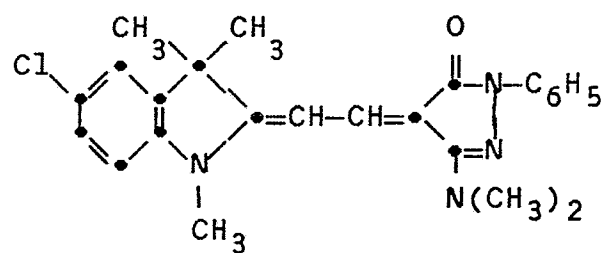

5


18

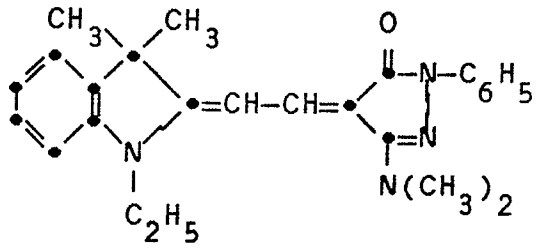

10

15


19

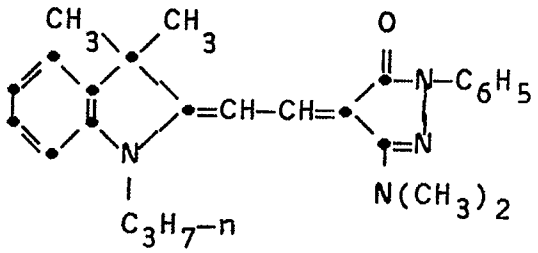

20

25


20

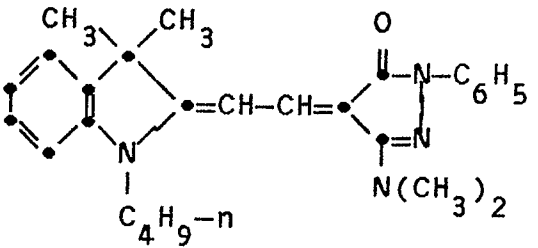

30

35

21

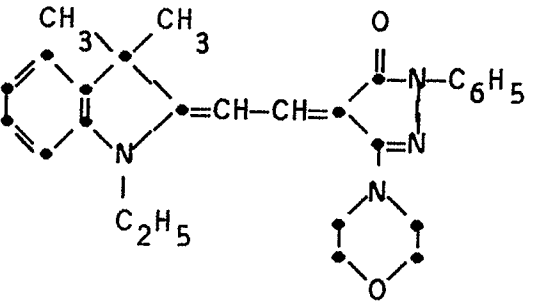


40

Magenta Dyes

45


22

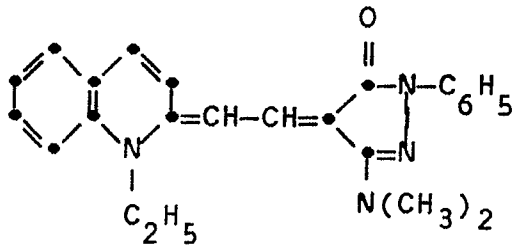

50


55

23

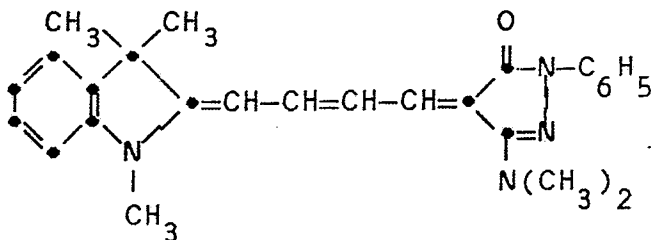

10

24

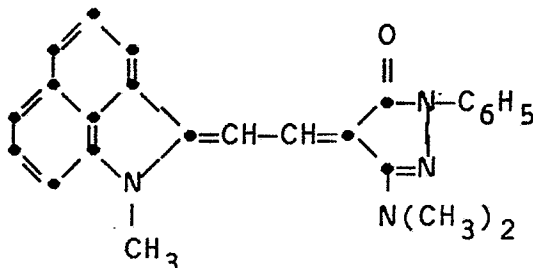

15

20

A dye-barrier layer comprising a hydrophilic polymer may be employed in the dye-donor element of the invention between its support and the dye layer to improve the density of the transferred dye.

The dye in the dye-donor element of the invention is dispersed in a polymeric binder such as a cellulose derivative, e.g., cellulose acetate hydrogen phthalate, cellulose acetate, cellulose acetate propionate, cellulose acetate butyrate, cellulose triacetate; a polycarbonate; poly(styrene-co-acrylonitrile), a poly(sulfone) or a poly(phenylene oxide). The binder may be used at a coverage of from 0.1 to 5 g/m².

The dye layer of the dye-donor element may be coated on the support or printed thereon by a printing technique such as a gravure process.

Any material can be used as the support for the dye-donor element of the invention provided it is dimensionally stable and can withstand the heat of the thermal printing heads. Such materials include polyesters such as poly(ethylene terephthalate); polyamides; polycarbonates; glassine paper; condenser paper; cellulose esters; fluorine polymers; polyethers; polyacetals; polyolefins; and polyimides. The support generally has a thickness of from 2 to 30 μm. It may also be coated with a subbing layer, if desired.

The reverse side of the dye-donor element may be coated with a slipping layer to prevent the printing head from sticking to the dye-donor element. Such a slipping layer would comprise a lubricating material such as a surface active agent, a liquid lubricant, a solid lubricant or mixtures thereof, with or without a polymeric binder.

The dye-receiving element that is used with the dye-donor element of the invention usually comprises a support having thereon a dye image-receiving layer. The support may be a transparent film such as a poly(ether sulfone), a polyimide, a cellulose ester such as cellulose acetate, a poly(vinyl alcohol-co-acetal) or a poly(ethylene terephthalate). The support for the dye-receiving element may also be reflective such as baryta-coated paper, polyethylene-coated paper, white polyester (polyester with white pigment incorporated therein), an ivory paper, a condenser paper or a synthetic paper such as duPont Tyvek®. In a preferred embodiment, polyester with a white pigment incorporated therein is employed.

The dye image-receiving layer may comprise, for example, a polycarbonate, a polyurethane, a polyester, polyvinyl chloride, poly(styrene-co-acrylonitrile), poly(caprolactone) or mixtures thereof. The dye image-receiving layer may be present in any amount which is effective for the intended purpose. In general, good results have been obtained at a concentration of from 1 to 5 g/m².

As noted above, the dye-donor elements of the invention are used to form a dye transfer image. Such a process comprises imagewise-heating a dye-donor element as described above and transferring a dye image to a dye-receiving element to form the dye transfer image.

The dye-donor element of the invention may be used in sheet form or in a continuous roll or ribbon. If a continuous roll or ribbon is employed, it may have only the dye thereon as described above or may have alternating areas of other different dyes, such as sublimable cyan, yellow, magenta and/or black or other dyes. Such dyes are disclosed in U.S. Patent 4,541,830. Thus, one-, two-, three- or four-color elements (or higher numbers also) are included within the scope of the invention.

In a preferred embodiment of the invention, the dye-donor element comprises a poly(ethylene terephthalate) support coated with sequential repeating areas of cyan, magenta and yellow dye, at least one of the dyes being a merocyanine dye as described above, and the above process steps are sequentially performed for each color to obtain a three-color dye transfer image. Of course, when the process is only performed for a single color, then a monochrome dye transfer image is obtained.

A thermal dye transfer assemblage of the invention comprises

- a) a dye-donor element as described above, and
- b) a dye-receiving element as described above, the dye-receiving element being in a superposed relationship with the dye-donor element so that the dye layer of the donor element is in contact with the dye image-receiving layer of the receiving element.

The above assemblage comprising these two elements may be preassembled as an integral unit when a monochrome image is to be obtained. This may be done by temporarily adhering the two elements together at their margins. After transfer, the dye-receiving element is then peeled apart to reveal the dye transfer image.

When a three-color image is to be obtained, the above assemblage is formed on three occasions during the time when heat is applied by the thermal printing head. After the first dye is transferred, the elements are peeled apart. A second dye-donor element (or another area of the donor element with a different dye area) is then brought in register with the dye-receiving element and the process repeated. The third color is obtained in the same manner.

The following examples are provided to illustrate the invention.

Example 1 - Yellow Dyes

A yellow dye-donor element was prepared by coating the following layers in the order recited on a 6 μm poly(ethylene terephthalate) support:

- 1) Dye-barrier layer of poly(acrylic) acid (0.16 g/m²) coated from water, and
- 2) Dye layer containing a yellow dye as identified in the following Table 1 (0.63 mmoles/m²), a cellulose acetate binder (40% acetyl) at a weight equal to 1.2X that of the dye, and FC-431® 3M Corp. (2.2 mg/m²), coated from a 2-butanone-cyclohexanone solvent mixture. On the back side of the element was coated a typical slipping layer.

A dye-receiving element was prepared by coating a solution of Makrolon 5705® (Bayer AG Corporation) polycarbonate resin (2.9 g/m² in a methylene chloride and trichloroethylene solvent mixture on an ICI Melinex 990® white polyester support.

The dye side of the dye-donor element strip 0.75 inches (19 mm) wide was placed in contact with the dye image-receiving layer of the dye-receiver element of the same width. The assemblage was fastened in the jaws of a stepper motor driven pulling device. The assemblage was laid on top of a 0.55 inch (14 mm) diameter rubber roller and a TDK Thermal Head (No. L-133) and was pressed with a spring at a force of 8.0 pounds (3.6 kg) against the dye-donor element side of the assemblage pushing it against the rubber roller.

The imaging electronics were activated causing the pulling device to draw the assemblage between the printing head and roller at 0.123 inches/sec (3.1 mm/sec). Coincidentally, the resistive elements in the thermal print head were pulse-heated at increments from 0 to 8.3 msec to generate a graduated density test pattern. The voltage supplied to the print head was approximately 22v representing approximately 1.5 watts/dot (12 mjoules/dot) for maximum power.


The dye-receiving element was separated from the dye-donor element and the status A blue reflection density at the maximum density was read. The image was then subjected to "HID fading", 7 days, 50 Klux, 5400° K, 32°C, approximately 25% RH. The percent density loss was then calculated. The following results were obtained:

50

55

5
10
15
20
25
30
35
40
45
50
55

TABLE I

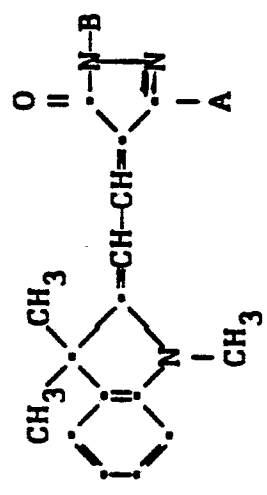

Compound	A	B	Initial Transferred Density	% Loss After Fade
1	-NH(C ₆ H ₅)	C ₆ H ₅	2.0	23
2	-N(C ₂ H ₅)(C ₆ H ₅)	C ₆ H ₅	1.7	8
3	-NH(CH ₂ CH ₂ OCH ₃)	C ₆ H ₅	2.6	18
4	-N(CH ₃)(CH ₃)	C ₆ H ₅	2.5	8, 11
5		C ₆ H ₅	2.3	27
6		C ₆ H ₅	2.3	7

5

10

15

20

25

30

35

40

45

50

55





TABLE 1 (cont'd)

Control 1	-H	C ₆ H ₅	2.0	54
Control 2	-NH ₂	C ₆ H ₅	2.0	39, 45
Control 3	-OCH ₂ CH ₃	C ₆ H ₅	2.3	31, 33
Control 4	-NHCOC ₄ H ₉ -t	C ₆ H ₅	1.7	57
Control 5	-CH ₃	C ₆ H ₅	1.9	65
Control 6	-CH ₃	CH ₃	1.9	69
Control 7	-CO ₂ C ₂ H ₅	C ₆ H ₅	1.1	37

The above results indicate that the merocyanine yellow dyes of the invention had better light stability than the control dyes.

Example 2 - Yellow Dyes

Example 1 was repeated except that the following compounds listed in Table 2 were evaluated which do not have indoline moieties. They were compared to similar control dyes which do not have amino groups. The following results were obtained:

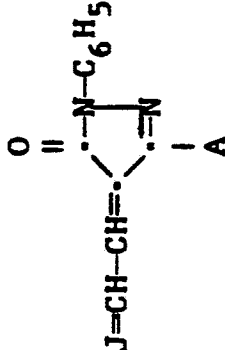Compound	A	J	Initial Transferred Density	% Loss After Fade
7	-N(CH ₃) ₂		1.4	30
Control 8	-CH ₃		0.9	87
8	-N(CH ₃) ₂		2.2	6
Control 9	-CH ₃		1.6	80

5

10

15

20

25

30

35


40

45

50

55

TABLE 2 (cont'd)

9 $-N(CH_3)_2$ Control 10 $-CH_3$

13

1.2

78

1.4

The above results again indicate that the merocyanine yellow dyes of the invention had better light stability than similar control dyes which did not have amino groups.

Example 3 - Yellow Dyes

Example 1 was repeated except that the following compounds listed in Table 3 were evaluated. Four control yellow dyes were prepared and tested which are similar to dyes employed in the invention except that they have a 3-methyl instead of a 3-(N,N-dialkylamino) substitution on the 2-pyrazolin-5-one ring. The following results were obtained:

5

10

15

Table 3

20	<u>Compound</u>	Initial Transferred <u>Density</u>	% Loss <u>After Fade</u>
	10	1.4	23
	11	1.9	18
25	12	1.8	15
	13	1.3	32
30	14	1.6	24
	Control 11	1.3	79
35	15	2.0	9
	Control 12	1.8	69
40	16	1.8	18
	Control 13	1.6	52
45	17	2.3	8
	Control 14	2.0	63

50

55

5


Table 3 (cont'd)

<u>Compound</u>	Initial Transferred <u>Density</u>	% Loss After Fade
18	2.3	5
19	2.0	1
20	1.9	6
21	2.2	8

20

Control 11

25

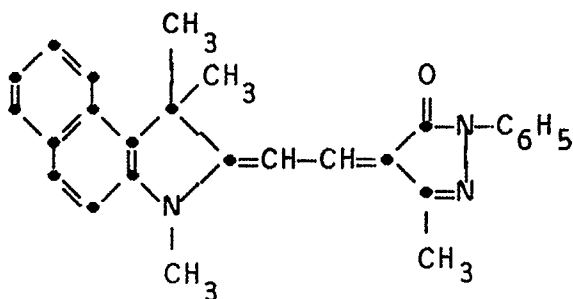


30

Similar to Compound 14 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution

Control 12

35

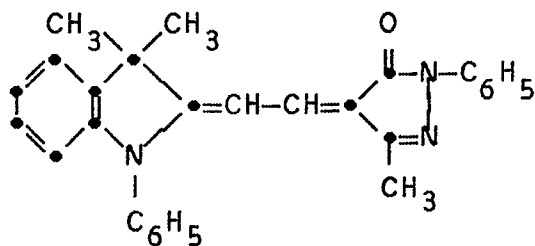


40

Similar to Compound 15 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution

Control 13


45

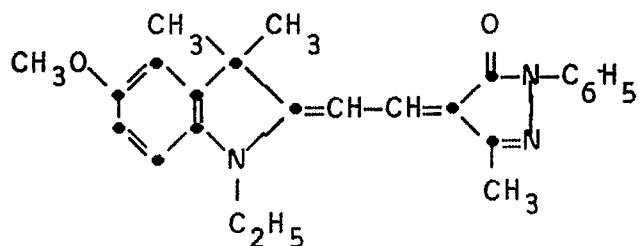

50

Similar to Compound 16 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution

55

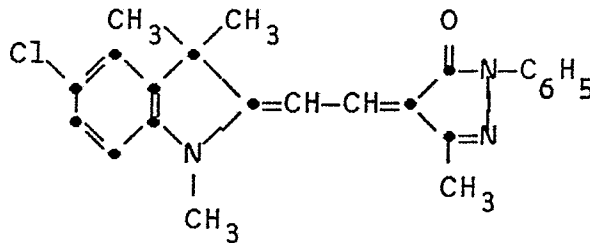Control 14

Similar to Compound 17 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution

The above results indicate that the dyes employed according to the invention had higher transfer densities and much better light stability than similar control dyes which did not have amino groups.

Example 4 - Magenta Dyes


Example 1 was repeated except that the following magenta compounds listed in Table 4 were evaluated and the Green Status A maximum density was measured. Three control magenta dyes were prepared and tested which are similar to dyes employed in the invention except that they have a 3-methyl instead of a 3-(N,N-dialkylamino) substitution on the 2-pyrazolin-5-one ring. The following results were obtained:

Table 4

<u>Compound</u>	<u>Initial Transferred Density</u>	<u>% Loss After Fade</u>
22	0.9	62
Control 15	0.5	78
23	1.9	42
Control 16	2.1	93
24	2.0	16
Control 17	0.9	70

Control 15


5

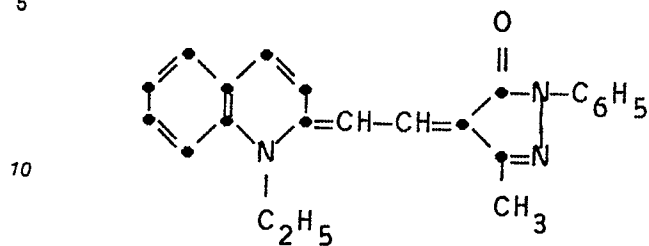

10

Similar to Compound 22 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution


15

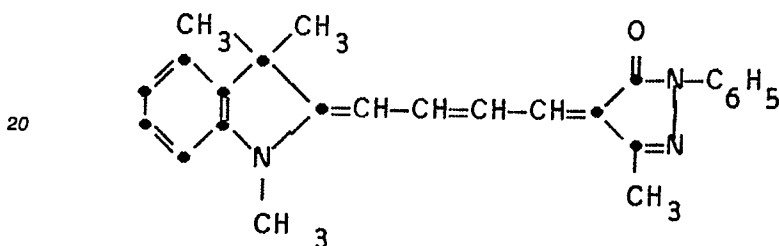Control 16

20

Similar to Compound 23 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution

25

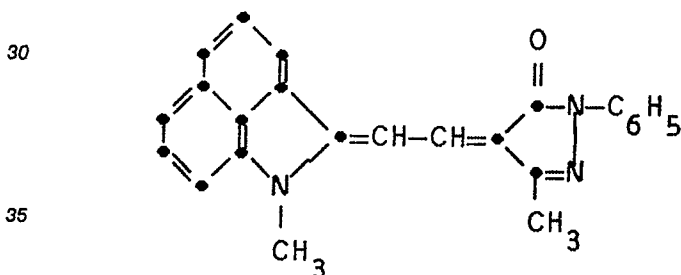Control 17

30

35

Similar to Compound 24 except for a 3-methyl group instead of a 3-(N,N-dialkylamino) substitution


The above results indicate that the dyes employed according to the invention had much better light stability than similar control dyes which did not have amino groups.

Claims

1. A dye-donor element for thermal dye transfer comprising a support having thereon a dye layer characterized in that the dye comprises a 3-(N-alkyl-or N-aryl-amino)-2-pyrazolin-5-one merocyanine dye dispersed in a polymeric binder, said merocyanine dye being capable of transfer by diffusion to a dye-receiving element upon the application of heat and being incapable of substantial photolysis, said merocyanine dye being substituted or unsubstituted on the bridging methine carbon atoms.

2. The element of Claim 1 characterized in that said 3-(N-alkyl-or N-aryl-amino)-2-pyrazolin-5-one merocyanine dye has the formula:

55

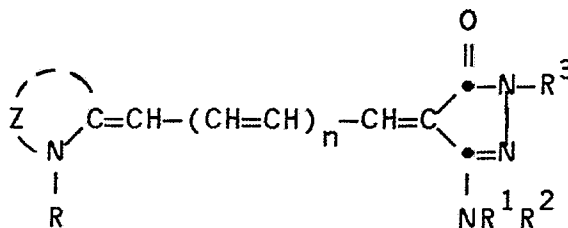

wherein:

R represents a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms;

R¹ and R² each independently represents hydrogen, with the proviso that only one of R¹ and R² may be hydrogen at the same time; a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms; or R¹ and R² may be combined together with the nitrogen to which they are attached to form a heterocyclic ring system;

R³ is R;

n represents 0 or 1; and

Z represents the atoms necessary to complete a 5- or 6-membered substituted or unsubstituted heterocyclic ring.

3. The element of Claim 2 characterized in that Z represents the atoms necessary to complete an indoline ring.

4. The element of Claim 2 characterized in that R¹ and R² are both methyl.

5. The element of Claim 2 characterized in that R³ is phenyl.

6. The element of Claim 1 characterized in that said support comprises poly(ethylene terephthalate), the side of the support opposite the side having thereon said dye layer is coated with a slipping layer comprising a lubricating material, and said dye layer comprises sequential repeating areas of cyan, magenta and said yellow dye.


7. A thermal dye transfer assemblage comprising:

a) a dye-donor element comprising a support having thereon a dye layer comprising a dye dispersed in a polymeric binder, and

b) a dye-receiving element comprising a support having thereon a dye image-receiving layer, said dye-receiving element being in a superposed relationship with said dye-donor element so that said dye layer is in contact with said dye image-receiving layer,

characterized in that said dye comprises a 3-(N-alkyl- or N-aryl-amino)-2-pyrazolin-5-one merocyanine dye, said merocyanine dye being capable of transfer by diffusion to a dye-receiving element upon the application of heat and being incapable of substantial photolysis, said merocyanine dye being substituted or unsubstituted on the bridging methine carbon atoms.

8. The assemblage of Claim 7 characterized in that said 3-(N-alkyl- or N-aryl-amino)-2-pyrazolin-5-one merocyanine dye has the formula:

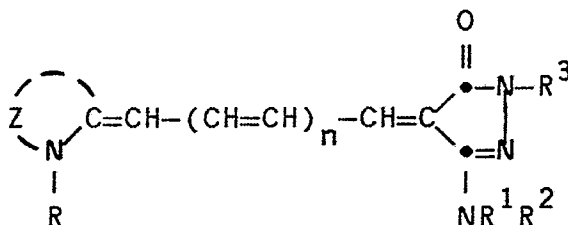

wherein:

R represents a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms;

R¹ and R² each independently represents hydrogen, with the proviso that only one of R¹ and R² may be hydrogen at the same time; a substituted or unsubstituted alkyl group of from 1 to 6 carbon atoms or a substituted or unsubstituted aryl group of from 6 to 10 carbon atoms; or R¹ and R² may be combined

together with the nitrogen to which they are attached to form a heterocyclic ring system;

R³ is R;

n represents 0 or 1; and

Z represents the atoms necessary to complete a 5-or 6-membered substituted or unsubstituted heterocyclic ring.

9. The assemblage of Claim 8 characterized in that Z represents the atoms necessary to complete an indoline ring.

10. The assemblage of Claim 8 characterized in that R¹ and R² are both methyl and R³ is phenyl.

10

15

20

25

30

35

40

45

50

55