



(11) **EP 2 017 464 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
21.01.2009 Bulletin 2009/04

(51) Int Cl.:
F02M 59/36 (2006.01) F02M 59/46 (2006.01)

(21) Application number: **07742132.9**

(86) International application number:
PCT/JP2007/058697

(22) Date of filing: **23.04.2007**

(87) International publication number:
WO 2007/129556 (15.11.2007 Gazette 2007/46)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(72) Inventors:
• **SATO, Sakae**
Higashimatsuyama-shi, Saitama 355-8603 (JP)
• **HAYASHIDA, Masatsugu**
Higashimatsuyama-shi, Saitama 355-8603 (JP)
• **HATANAKA, Koji**
Higashimatsuyama-shi, Saitama 355-8603 (JP)

(30) Priority: **01.05.2006 JP 2006127448**

(74) Representative: **Knapp, Thomas**
Dreiss, Fuhlendorf, Steimle & Becker
Patentanwälte
Postfach 10 37 62
70032 Stuttgart (DE)

(71) Applicant: **Bosch Corporation**
Shibuya-ku
Tokyo 150-8360 (JP)


(54) **FUEL FEEDING PUMP**

(57) To provide a fuel supply pump that can improve the durability of a fuel inlet valve and stably pressure-feed high pressure fuel of a large flow rate.

locks, the valve piston is inserted into the open portion of the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by a spring to cause the fastener to lock to the step portion, whereby the spring seat is fixed to the valve piston, and a clearance is disposed between the fastener and at least one of an edge portion of the groove portion on an energizing direction side and an edge portion of the step portion on the opposite side of the energizing direction.


In a fuel inlet valve, a valve piston includes, in its outer surface in the vicinity of an end portion on an opposite side of a collar portion, a groove portion to which a fastener for fixing the valve piston and a spring seat locks, the spring seat includes an open portion into which the valve piston is inserted and includes, along an edge of the open portion, a step portion to which the fastener

FIG.3 (a)

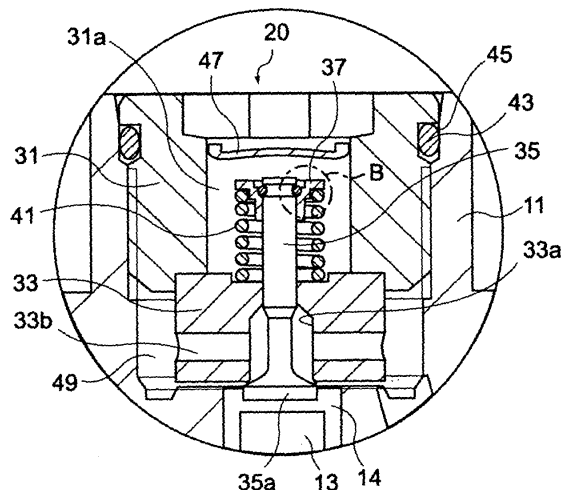

EP 2 017 464 A1

FIG.3 (b)

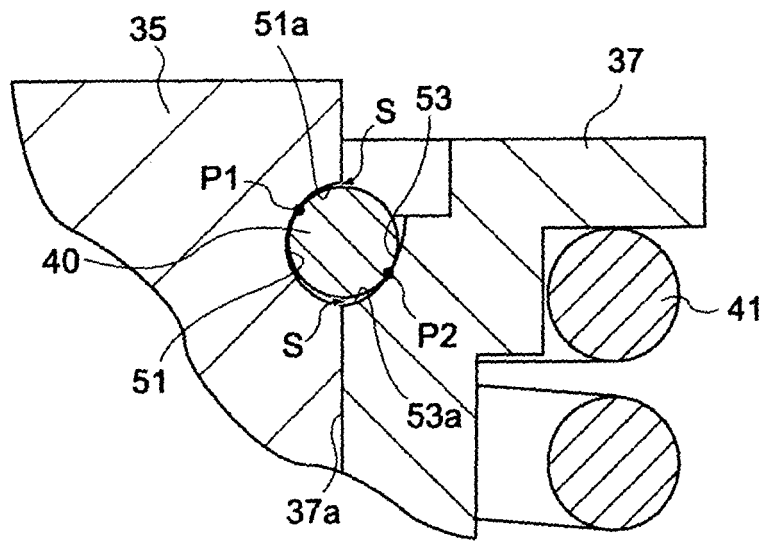

Description

TECHNICAL FIELD

[0001] The present invention relates to a fuel supply pump that is disposed with a fuel inlet valve and particularly to a fuel supply pump that is suited for pressure-feeding high pressure fuel of a large flow rate.

[0002] Conventionally, in diesel engines and the like, various accumulator fuel injection devices (CRS: Common Rail Systems) that use a pressure accumulator (common rail) in order to efficiently inject high pressure fuel have been proposed.

FIG. 13 shows an example of a fuel supply pump that is used in such accumulator fuel injection system. This fuel supply pump 410 is disposed with a cam 429 in a pump housing 421 and includes a cylindrical space 421a in which a plunger barrel 415 is attached above the cam 429, with a fuel inlet valve 422 being attached to an upper open portion of the plunger barrel 415 that is attached in this cylindrical space 421a. Further, inside the plunger barrel 415, a fuel pressurization chamber 425 that is closed off by a plunger 423 and the fuel inlet valve 422 is formed, and a fuel passage 431 that is connected to a fuel outlet valve 428 is disposed in the portion that faces the fuel pressurization chamber 425. In this fuel supply pump 410, fuel that has been supplied to the fuel pressurization chamber 425 via the fuel inlet valve 422 is pressurized by the plunger 423 that reciprocally moves in accompaniment with the rotation of the cam 429 and is pressure-fed with respect to a common rail via the fuel outlet valve 428.

[0003] Here, the fuel inlet valve 422 that is used in the fuel supply pump is disposed with a valve body 433, a valve piston 435 that includes a collar portion 436 on one end and is slidably held in the valve body 433, a spring 441 that energizes the valve piston 435 in a valve closing direction, and a spring seat 437 that is fixed in the vicinity of an end portion of the valve piston 435 on the opposite side of the end portion where the collar portion 436 is disposed and which receives one end of the spring 441 (see Patent Document 1). Fuel is supplied to a fuel reservoir portion 433a via a fuel inlet hole, the fuel inlet valve 422 is opened when the difference between the pressure inside the fuel pressurization chamber 425 and the pressure inside the fuel reservoir portion 433a exceeds a predetermined pressure value, and the fuel is supplied to the inside of the fuel pressurization chamber 425. Meanwhile, the pressure inside the fuel pressurization chamber 425 rises in accompaniment with the rising of the plunger 423 and the pressure inside the fuel reservoir portion 433a drops, whereby the valve piston 435 is seated on a seat portion of the valve body 433 and the fuel inlet valve 422 is closed.

Patent Document 1: JP-A-2004-211580 (FIG. 1, FIG. 13)

DISCLOSURE OF THE INVENTION

PROBLEM THAT THE INVENTION IS TO SOLVE

[0004] However, in the fuel inlet valve that is used in the fuel supply pump disclosed in Patent Document 1, the valve piston and the spring seat are configured as separate bodies for assembly reasons. Additionally, this fuel inlet valve usually has a size of about 3 to 4 cm, so when the valve piston and the spring seat are to be fixed, laser welding is employed as an easy fixing method. Consequently, it is necessary to select a material that is easy to weld as the material of the valve piston, and it has been difficult to employ a relatively high-strength material such as high-carbon steel. As a result, there has been the potential for the portion of the valve piston that is seated in the valve body to easily wear and for its durability to become poor. In particular, when, beginning with accumulator fuel injection devices, the fuel supply pump is rotated at a high speed in order to pressure-feed even higher pressure fuel in a large amount, there has been the potential for the durability of the valve piston to drop excessively and for the valve piston to become unable to stably pressurize the fuel.

[0005] Thus, as a result of their extensive investigations, the inventors of the present invention have discovered that this problem can be solved by employing a mechanical fixing method that uses a predetermined fastener rather than welding as the method of fixing the valve piston and the spring seat and giving the place of the valve piston or the spring seat to which the fastener locks a predetermined structure.

That is, it is an object of the present invention to provide a fuel supply pump where, even when the fuel supply pump is driven at a high speed to pressure-feed high pressure fuel of a large flow rate, it is difficult for the fuel inlet valve to sustain damage and whose durability is improved.

MEANS FOR SOLVING THE PROBLEM

[0006] According to the present invention, there is provided a fuel supply pump comprising a fuel pressurization chamber for pressurizing fuel to a high pressure and a fuel inlet valve for supplying fuel to the fuel pressurization chamber, wherein the fuel inlet valve is disposed with a valve body, a valve piston that includes a collar portion on one end side and is slidably held in the valve body, a spring that energizes the valve piston in a valve closing direction, and a spring seat that is fixed in the vicinity of an end portion of the valve piston on the opposite side of the one end side and which receives one end of the spring, the valve piston includes, in its outer surface in the vicinity of the end portion on the opposite side, a groove portion to which a fastener for fixing the valve piston and the spring seat locks, the spring seat includes an open portion into which the valve piston is inserted and includes, along an edge of the open portion, a step

portion to which the fastener locks, the valve piston is inserted into the open portion of the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by the spring to cause the fastener to lock to the step portion, whereby the spring seat is fixed to the valve piston, and a clearance is disposed between the fastener and at least one of an edge portion of the groove portion on the energizing direction side and an edge portion of the step portion on the opposite side of the energizing direction, and the aforementioned problem can be solved.

[0007] Further, in configuring the fuel supply pump of the present invention, it is preferable for the cross-sectional shape of the groove portion or the step portion to be a circular arc shape and for the clearance to be disposed by offsetting the center of a circle that draws the circular arc from an outer surface position of the valve piston.

Below, in the present specification, "outer surface position of the valve piston" means a surface position on the circumferential direction outer side with respect to the axial line of the valve piston and a surface position that exists when it is assumed that that surface position on the circumferential direction outer side extends.

[0008] Further, in configuring the fuel supply pump of the present invention, it is preferable for a frictional force generating member to be intervened between the groove portion or the step portion and the fastener.

[0009] Further, in configuring the fuel supply pump of the present invention, it is preferable for the fastener to be a C-ring that comprises an alloy that has high elasticity.

[0010] Further, in configuring the fuel supply pump of the present invention, it is preferable for the valve piston and the spring seat to comprise carburized steel or bearing steel.

[0011] Further, another aspect of the present invention is a fuel supply pump comprising a fuel pressurization chamber for pressurizing fuel to a high pressure and a fuel inlet valve for supplying fuel to the fuel pressurization chamber, wherein the fuel inlet valve is disposed with a valve body, a valve piston that includes a collar portion on one end side and is slidably held in the valve body, a spring that energizes the valve piston in a valve closing direction, and a spring seat that is fixed in the vicinity of an end portion of the valve piston on the opposite side of the one end side and which receives one end of the spring, the valve piston includes, in its outer surface in the vicinity of the end portion on the opposite side, a groove portion to which a fastener for fixing the valve piston and the spring seat locks, the spring seat includes an open portion into which the valve piston is inserted and includes, along an edge of the open portion, a step portion to which the fastener locks, the valve piston is inserted into the open portion of the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by the spring to cause the fastener to lock to the step portion,

whereby the spring seat is fixed to the valve piston, and a contact portion between the groove portion and the fastener and a contact portion between the step portion and the fastener are connected in a diagonal direction with respect to the energizing direction.

EFFECTS OF THE INVENTION

[0012] According to the fuel supply pump of the present invention, the valve piston and the spring seat are fixed by a mechanical fixing method that uses a predetermined fastener, so the degree of freedom of selecting the material that configures the valve piston expands, and a high-strength material that is not suited for welding can be selected. Consequently, the strength of the valve piston is raised and wear of the portion that is seated with respect to the valve body can be reduced.

Further, the fastener and at least one of the groove portion of the valve piston and the step portion of the spring seat to which the fastener locks are placed in a predetermined state of contact, so a situation where shear force acts on the fastener due to the downward pushing force of the valve piston resulting from fuel pressure and the energizing force of the spring can be controlled, and a situation where the fastener sustains damage can be prevented.

Consequently, the durability of the fuel inlet valve improves, so even when the pump is caused to rotate at a high speed and is used, the fuel supply pump can stably pressure-feed high pressure fuel of a large flow rate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

[FIG. 1] A side diagram including a partial cutout of a fuel supply pump pertaining to an embodiment of the present invention.

[FIG. 2] A cross-sectional diagram of the fuel supply pump pertaining to the embodiment of the present invention.

[FIG. 3] Cross-sectional diagrams of a fuel inlet valve that is disposed in the fuel supply pump.

[FIG. 4] Diagrams provided for describing parts that configure the fuel inlet valve.

[FIG. 5] Diagrams provided for describing a method of assembling the fuel inlet valve.

[FIG. 6] A diagram provided for describing the directions of forces that act on a fastener.

[FIG. 7] Diagrams provided for describing other configuration examples of the fuel inlet valve.

[FIG. 8] Diagrams provided for describing a groove portion of a valve piston and a step portion of a spring seat that have circular arc-shaped cross sections.

[FIG. 9] A diagram provided for describing a groove portion of a valve piston and a step portion of a spring seat that have linear cross sections.

[FIG. 10] A diagram provided for describing the con-

figuration of the fuel inlet valve in which a frictional force generating member is intervened.

[FIG. 11] A diagram provided for describing an accumulator fuel injection system with a pressure amplifying piston (APCRS). [FIG. 12] A diagram conceptually showing a fuel pressure amplification method resulting from the accumulator fuel injection system with a pressure amplifying piston (APCRS). [FIG. 13] A diagram provided for describing the structure of a conventional fuel supply pump.

BEST MODE FOR IMPLEMENTING THE INVENTION

[0014] Below, an embodiment relating to a fuel supply pump of the present invention will be specifically described with reference to the drawings. However, this embodiment represents one aspect of the present invention, is not intended to limit this invention, and is capable of being arbitrarily altered within the scope of the present invention.

It will be noted that, in each of the drawings, members to which identical reference numerals have been added represent identical members, and description will be appropriately omitted.

[0015] The embodiment of the present invention is a fuel supply pump that comprises a fuel pressurization chamber for pressurizing fuel to a high pressure and a fuel inlet valve for supplying fuel to the fuel pressurization chamber.

In the fuel supply pump of the present embodiment, the fuel inlet valve is disposed with a valve body, a valve piston that includes a collar portion on one end side and is slidably held in the valve body, a spring that energizes the valve piston in a valve closing direction, and a spring seat that is fixed in the vicinity of an end portion of the valve piston on the opposite side of the one end side where the collar portion is disposed and which receives one end of the spring, the valve piston includes, in its outer surface in the vicinity of the end portion on the opposite side, a groove portion to which a fastener for fixing the valve piston and the spring seat locks, the spring seat includes an open portion into which the valve piston is inserted and includes, along the edge of the open portion, a step portion to which the fastener locks, the valve piston is inserted into the open portion of the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by the spring to cause the fastener to lock to the step portion, whereby the spring seat is fixed to the valve piston, and a clearance is disposed between the fastener and at least one of an edge portion of the groove portion on the energizing direction side and an edge portion of the step portion on the opposite side of the energizing direction. Below, the fuel supply pump of the present embodiment will be divided into its respective members and specifically described.

1. Overall Configuration

[0016] The overall configuration of the fuel supply pump of the present invention is not particularly limited, and one example thereof is shown in FIG. 1. This fuel supply pump 1 is a so-called line-type pump where cylinders (cylindrical spaces) 11b and 11c in which plungers 13 that pressurize fuel are disposed are disposed in parallel, and the fuel supply pump 1 is disposed with a pump body portion 10 that pressurizes fuel to a high pressure and pressure-feeds the fuel, a feed pump 3 for sucking up fuel from a fuel tank (not shown), and a control valve 5 for regulating the flow rate of the fuel that is to be pressurized.

It will be noted that the example of this fuel supply pump 1 has a configuration that uses the two plungers 13 to pressurize fuel to a high pressure and pressure-feed the fuel, but the number of the plungers can also be increased to an even greater number in order to pressurize an even larger amount of fuel to a high pressure.

2. Feed Pump

[0017] The feed pump 3 is a part for sucking up the fuel inside the fuel tank and delivering the fuel with respect to the control valve 5. This feed pump 3 comprises a gear pump structure that includes a drive gear that is coupled to an end portion of a cam shaft 23 and a passive gear that is coupled to the drive gear, for example, and the feed pump 3 is driven directly or via an appropriate gear ratio with the cam shaft 23. This feed pump 3 is driven, whereby the fuel is sucked up from the fuel tank and delivered with respect to the control valve 5 utilizing negative pressure.

Further, when a prefilter (not shown) is intervened between the feed pump 3 and the fuel tank and foreign particles are mixed in with the fuel inside the fuel tank, those foreign particles can be primarily trapped such that they do not flow into the inside of the fuel supply pump 1.

3. Control Valve

[0018] The control valve 5 is attached to the pump body portion 10 and is a part which, when delivering the fuel that has been delivered from the feed pump 3 to fuel pressurization chambers 14 of the pump body portion 10, regulates the amount of that fuel. This control valve 5 can be given a configuration that uses a proportional control valve, for example. Because of this control valve 5, the amount of fuel can be regulated in correspondence to the fuel pressure that internal combustion requires, and the fuel can be sent to the fuel pressurization chambers 14 of the pump body portion 10.

4. Overflow Valve

[0019] Further, although it is not illustrated, the fuel supply pump is disposed with an overflow valve that

branches from the middle of a fuel passage that interconnects the feed pump and the control valve and is disposed in parallel with the control valve. Because of this overflow valve, when the pressure of the fuel that is delivered to the control valve exceeds a stipulated value or when the flow rate of the fuel that is delivered to the control valve exceeds a stipulated amount, the fuel can be refluxed to the fuel tank or the like via the overflow valve. At this time, fuel flowing to the overflow valve side can also be delivered to the inside of a later-described cam chamber of the pump body portion and be used as a lubricant. Thus, the fuel can be effectively utilized without having to separately supply lubricating oil or the like as a lubricant inside the cam chamber, and an increase in the size of the entire fuel supply pump and an increase in the complexity of its configuration can be prevented.

5. Pump Body Portion

(1) Basic Configuration

[0020] The pump body portion 10 is a part for pressurizing the fuel that is delivered via the control valve 5 to a high pressure and pressure-feeding the fuel to a common rail and the like on the downstream side.

Here, FIG. 2 shows a cross-sectional diagram when an XX cross section of the fuel supply pump 1 of FIG. 1 is seen from the direction of the arrows. As shown in this FIG. 2, the pump body portion 10 is, for example, disposed with a pump housing 11, a plunger barrel 12 that is attached inside the cylindrical space 11b of the pump housing 11, the plunger 13 that is slidably held in an inner space 12a of the plunger barrel 12, a spring seat 19 that is locked to an end portion of the plunger 13, a spring 15 whose both ends are locked to the plunger barrel 12 and the spring seat 19 and which is for energizing the plunger 13 downward, and a tappet structure body 18 that is intervened between the plunger 13 and a cam 21 and is for centering and pushing up the plunger 13 in accompaniment with the rotation of the cam 21. Further, a fuel inlet valve 20 is disposed in an upper open portion of the inner space 12a of the plunger barrel 12, and a fuel outlet valve 22 is disposed via a fuel passage 12b that extends sideways from the inner space 12a of the plunger barrel 12.

[0021] Further, part of the inner space 12a of the plunger barrel 12 forms the fuel pressurization chamber 14 that is closed off by the inner peripheral surface of the plunger barrel 12, the plunger 13 and the fuel inlet valve 20. Additionally, fuel that is supplied via the fuel inlet valve 20 is pressurized to a high pressure inside this fuel pressurization chamber 14 by the plunger 13 that is pushed up in accompaniment with the rotational movement of the cam 21 and is pressure-fed to the common rail and the like on the downstream side via the fuel outlet valve 22.

(2) Pump Housing

[0022] The pump housing 11 is a casing to which the plunger barrel 12 is attached and in which the plunger 13, the tappet structure body 18 and the cam 21 are housed. This pump housing 11 can, for example, be given a configuration that is disposed with a cam chamber 11a and the cylindrical space 11b that opens above the cam chamber 11a and in which the plunger barrel 12 is attached.

It will be noted that the configuration of the pump housing beginning with the number of the cylindrical spaces can be appropriately altered in correspondence to the type of the fuel supply pump.

(3) Plunger Barrel

[0023] The plunger barrel 12 is a casing that is attached in the cylindrical space 11b of the pump housing 11, slidably holds the plunger 13 in its inner space 12a, and where the fuel inlet valve 20 is disposed in the upper open portion of the inner space 12a. Further, the inner space 12a of the plunger barrel 12 becomes an element that configures the fuel pressurization chamber 14 for pressurizing fuel to a high pressure together with the plunger 13 and the fuel inlet valve 20.

It will be noted that when the type of the fuel supply pump is an inline type or a radial type, the configuration of the plunger barrel can be appropriately altered in correspondence to the respective types.

(4) Plunger

[0024] The plunger 13 is slidably held in the inner space 12a of the plunger barrel 12, is pushed up in accompaniment with the rotation of the cam 21, and is a part for pressurizing the fuel inside the fuel pressurization chamber 14 to a high pressure. Further, the spring seat 19, which receives one end of the spring 15 and pulls down the plunger 13 toward the cam 21 side by the energizing force of the spring 15, is locked to an end portion of the plunger 13. Additionally, the plunger 13 is held such that it may freely rise and fall by downward force resulting from the energizing force of the spring 15 and by rising force accompanying the rotation of the cam 21.

(5) Fuel Pressurization Chamber

[0025] The fuel pressurization chamber 14 is a small chamber that is closed off and formed by the plunger 13 and the fuel inlet valve 20 in the inner space 12a of the plunger barrel 12. In this fuel pressurization chamber 14, fuel that flows in via the fuel inlet valve 20 can be pressurized efficiently and in a large amount as a result of the plunger 13 being driven at a high speed. Further, the fuel that has been pressurized by the plunger 13 is supplied to the common rail and the like via the fuel outlet valve 22.

(6) Cam

[0026] The cam 21 is disposed with one or several cam mountains and is a main element for causing the plunger 13 to rise via the tappet structure body 18 in accompaniment with the rotation of the cam shaft 23. This cam 21 attaches and is fixed to the cam shaft 23 that continues into a diesel engine inside the cam chamber 11a. Additionally, the cam shaft 23 is coupled via a gear to a crankshaft of the engine and is configured such that the cam 21 rotates by the driving of the engine.

This cam 21 is positioned below the cylindrical space 11b of the pump housing 11 and is disposed in parallel with a predetermined clearance in an axial line direction of the cam shaft 23.

(7) Tappet Structure Body

[0027] The tappet structure body 18 is intervened between the plunger 13 and the cam 21 and is a member for causing the plunger 13 to move up and down while performing centering of the plunger 13 in correspondence to the rotation of the cam 21 that accompanies the rotation of the cam shaft 23. The configuration of this tappet structure body 18 is not particularly limited; for example, the tappet structure body 18 shown in FIG. 2 is configured by the spring seat 19, a tappet body portion 16 that comprises a roller holding portion 16b and a sliding portion 16a, and a roller 17. In addition, for example, a tappet that does not include a roller can also be used.

(8) Fuel Inlet Valve

[0028] The fuel inlet valve 20 is disposed in the upper open portion of the inner space 12a that is disposed in the plunger barrel 12 and is a part for supplying the fuel delivered via the control valve to the fuel pressurization chamber 14.

FIG. 3(a) shows an enlarged cross-sectional diagram of the periphery (the portion indicated by A in FIG. 2) of the fuel inlet valve 20 in the fuel supply pump 1 of the present embodiment, and FIG. 3(b) shows an enlarged cross-sectional diagram of the portion indicated by B in FIG. 3 (a).

The fuel inlet valve 20 shown in this FIG. 3 (a) is disposed with a holder portion 31, a valve body 33, a valve piston 35 that includes a collar portion 35a on one end side and is slidably held in the valve body 33, a spring 41 that energizes the valve piston 35 in a valve closing direction, and a spring seat 37 that is fixed in the vicinity of an end portion of the valve piston 35 on the opposite side of the end portion where the collar portion 35a is disposed and which receives one end of the spring 41. Further, a seal ring groove 45 is disposed in the outer peripheral surface of the holder portion 31, and sealing between the holder portion 31 and the pump housing 11 is ensured by a seal ring 43 that is disposed inside this seal ring groove 45. Further, the inside of a space portion 31a of the holder

portion 31 is filled with fuel that serves as a lubricant for ensuring lubricity of the sliding surface of the valve piston 35, and a plug 47 is press-inserted from above the space portion 31a into the space portion 31a to contain the lubricating fuel. Moreover, a clearance 49 that serves as a passage for fuel that flows into an inlet path 33b of the valve body 33 is disposed between the valve body 33 and the pump housing 11 in the outer peripheral direction (sideways in the drawing) of the valve body 33. Because of this clearance 49, it becomes possible to suck in fuel from the inlet path 33b that is radially disposed in the valve body 33.

[0029] In this fuel inlet valve 20, the valve piston 35 is always energized in the valve closing direction by the spring 41. Additionally, fuel that is delivered via the control valve passes through the clearance 49 and the radially formed inlet path 33b and flows into a fuel reservoir chamber 33a, and when the difference between the pressure inside the fuel pressurization chamber 14 and the pressure inside the fuel reservoir chamber 33a exceeds a predetermined pressure value, the fuel inlet valve 20 is opened and the fuel is supplied to the inside of the fuel pressurization chamber 14. Thereafter, when the pressure inside the fuel reservoir chamber 33a drops and the fuel inside the fuel pressurization chamber 14 rises in accompaniment with the rising of the plunger 13 inside the fuel pressurization chamber 14, the fuel inlet valve 20 is again closed by the energizing force of the spring 41. At this time, the fuel inside the fuel reservoir chamber 33a of the valve body 33 or inside the space portion 31a of the holder portion 31 enters the sliding surface of the valve piston 35 that is slidably held in the valve body 33, lubricity is ensured, and burning is prevented.

[0030] Here, as shown in FIG. 3(b), the fuel inlet valve in the fuel supply pump of the present invention is characterized in that the valve piston 35 includes, in its circumferential direction outer surface in the vicinity of the end portion on the opposite side of the collar portion, a groove portion 51 to which a fastener 40 for fixing the valve piston 35 and the spring seat 37 locks, the spring seat 37 includes an open portion 37a into which the valve piston 35 is inserted or press-inserted and includes, along the edge of the open portion 37a, a step portion 53 to which the fastener 40 locks, the valve piston 35 is inserted or press-inserted into the open portion 37a of the spring seat 37, the fastener 40 is thereafter caused to lock to the groove portion 51 of the valve piston 35, and the spring seat 37 is energized by the spring 41 to cause the fastener 40 to lock to the step portion 53, whereby the spring seat 37 is fixed to the valve piston 35, and a clearance S is disposed between the fastener 40 and at least one of an edge portion 51a of the groove portion 51 on the energizing direction side and an edge portion 53a of the step portion 53 on the opposite side of the energizing direction.

[0031] More specifically, in the conventional fuel inlet valve, as shown in FIG. 13, the valve piston 435 and the spring seat 437 have been fixed by laser welding, so

carburized steel or bearing steel whose joining strength resulting from welding is low could not be used as the material of the valve piston 435. For that reason, the wear resistance of the valve piston 435 has been relatively low, and as the pump is caused to rotate at a high speed and the fuel pressure becomes a high pressure, there has been the potential for the portion that contacts the seat portion of the valve body 433 to easily wear and for its durability to be poor. Further, carburized steel or the like could not be used for the spring seat 437 either, and it has been necessary to intervene a high-hardness shim (not shown) in order to protect the receiving surface of the spring 441 from damage.

[0032] For that reason, the fuel inlet valve that is used in the fuel supply pump of the present invention employs, as shown in FIG. 3(b), a fixing method that uses the pre-determined fastener 40 as the method of fixing the valve piston 35 and the spring seat 37 in the fuel inlet valve 20. Consequently, the valve piston 35 and the spring seat 37 can be configured using a material such as carburized steel or bearing steel that deforms relatively difficultly. Thus, the strength of the valve piston 35 is raised, and even when the pump is caused to rotate at a high speed and the fuel pressure becomes a high pressure, the fuel can be stably pressure-fed. Further, the strength of the spring seat 37 is also raised, and it becomes possible for the one end of the spring 41 to be directly received by the spring seat 37, so it becomes unnecessary to intervene a shim or the like and the number of parts can be reduced.

[0033] The fuel inlet valve 20 shown in FIG. 3 (a) to (b) is assembled using the spring seat 37, a C-ring 40A that serves as the fastener 40, the valve body 33 and the valve piston 35, which are respectively shown in FIG. 4 (a) to (d).

That is, first, as shown in FIG. 5(a), the valve piston 35 is inserted into the valve body 33, and the spring 41 is disposed on the upper surface of the valve body 33. Next, as shown in FIG. 5(b), the valve piston 35 is inserted or press-inserted into the inside of the open portion 37a of the spring seat 37 such that the spring 41 is pushed and compressed. In this state, as shown in FIG. 5(c), the C-ring 40A is caused to lock to the groove portion 51 of the valve piston 35 and, thereafter, as shown in FIG. 5(d), the spring seat 37 is energized by the spring 41 such that the C-ring 40A is caused to lock to the step portion 53 of the spring seat 37. Assembled in this manner, the spring seat 37 is fixed to the valve piston 35.

[0034] However, when this fixing method is employed, the energizing force of the spring and the downward pushing force of the valve piston resulting from the fuel pressure inside the fuel reservoir chamber push the spring seat and the valve piston in mutually opposite directions, so it becomes easy for shear force resulting from the edge of the groove portion of the valve piston and the edge of the step portion of the spring seat to work on the fastener that respectively locks to the groove portion of the valve piston and the step portion of the spring

seat.

Thus, in the present invention, as shown in FIG. 3(b), the clearance S is disposed between the fastener 40 and at least one of the edge portion 51a of the groove portion 51 of the valve piston 35 on the energizing direction side of the spring 41 (the opposite side of the collar portion of the valve piston 35) and the edge portion 53a of the step portion 53 of the spring seat 37 on the opposite side of the energizing direction of the spring 41 (the collar portion side of the valve piston 35), whereby shear force that acts on the fastener 40 is reduced and damage to the fastener 40 is prevented.

In other words, a contact portion P1 between the groove portion 51 of the valve piston 35 and the fastener 40 and a contact portion P2 between the step portion 53 of the spring seat 37 and the fastener 40 are configured such that they are connected in a diagonal direction with respect to the energizing direction of the spring 41.

[0035] For example, in the fuel inlet valve shown in FIG. 3(b), the clearance S is respectively disposed between the fastener 40 and the edge portion 51a of the groove portion 51 of the valve piston 35 on the energizing direction side of the spring 41 (the upper side in the drawing) and between the fastener 40 and the edge portion 53a of the step portion 53 of the spring seat 37 on the opposite side of the energizing direction of the spring 41 (the lower side in the drawing). Thus, as shown in FIG. 6, the force that acts on the fastener 40 from the spring seat 37 resulting from the energizing force of the spring 41 and the force that acts on the fastener 40 from the valve piston 35 by the downward pushing force of the valve piston 35 resulting from the fuel pressure inside the fuel reservoir chamber act in diagonal directions, and the forces that act on the fastener 40 are changed from a shearing direction to a compressing direction. Additionally, usually, if they are the same material, the allowable compressive stress is higher than the allowable shear stress, so the durability of the fastener 40 becomes improved.

[0036] In this manner, in order to reduce shear force that acts on the fastener, it is alright even if the clearance is disposed only between the fastener and the edge portion of the groove portion of the valve piston on the energizing direction side of the spring or between the fastener and the edge portion of the step portion of the spring seat on the opposite side in the energizing direction of the spring.

For example, FIG. 7 (a) is an example where the clearance S is disposed only between the fastener 40 and the edge portion 51a of the groove portion 51 of the valve piston 35 on the energizing direction side of the spring 41 (the upper side in the drawing). By configuring the fuel inlet valve in this manner also, the force that acts on the fastener 40 from the spring seat 37 and the force that acts on the fastener 40 from the valve piston 35 can be caused to act in diagonal directions. Consequently, the forces that act on the fastener 40 are changed from a shearing direction to a compressing direction, shear force

that acts on the fastener 40 can be reduced, and the durability of the fastener 40 can be improved.

[0037] Further, FIG. 7(b) is an example where the clearance S is disposed only between the fastener 40 and the edge portion 53a of the step portion 53 of the spring seat 37 on the opposite side of the energizing direction of the spring 41 (the lower side in the drawing). By configuring the fuel inlet valve in this also, the force that acts on the fastener 40 from the spring seat 37 and the force that acts on the fastener 40 from the valve piston 35 can be caused to act in diagonal directions. Consequently, the forces that act on the fastener 40 are changed from a shearing direction to a compressing direction, shear force that acts on the fastener 40 can be reduced, and the durability of the fastener 40 can be improved.

[0038] In this manner, when disposing the clearance between the fastener and the edge portion of the groove portion of the valve piston on the energizing direction side of the spring and/or between the fastener and the edge portion of the step portion of the spring seat on the opposite side of the energizing direction of the spring, the predetermined clearance can be disposed by giving the cross-sectional shape of the groove portion or the step portion a circular arc shape whose diameter is larger than the diameter of the cross section of the fastener and offsetting the center of the circle that draws that circular arc from an outer surface position of the valve piston.

That is, when the clearance is to be disposed between the fastener and the predetermined edge portion of the groove portion of the valve piston, as shown in FIG. 8(a), a center position Q of the circle of the circular arc-shaped cross section of the groove portion 51 of the valve piston 35 is offset outward in the outer peripheral direction from an outer surface position of the valve piston 35, whereby the curvature of the groove portion 51 becomes larger than the curvature of the fastener 40 and the predetermined clearance S can be formed. Similarly, when the clearance is to be disposed between the fastener and the cut portion of the spring seat, as shown in FIG. 8(b), the center position Q of the circle of the circular arc-shaped cross section of the cut portion 53 of the spring seat 37 is offset in the inside direction of the valve piston 35 from an outer surface position of the valve piston 35, whereby the curvature of the cut portion 53 becomes larger than the curvature of the fastener 40 and the predetermined clearance S can be formed.

It will be noted that "outer surface position of the valve piston" means a surface position on the circumferential direction outer side with respect to the axial line of the valve piston and a surface position that exists when it is assumed that that surface position on the circumferential direction outer side extends.

[0039] Further, as shown in FIG. 9, the predetermined clearance S can also be formed by giving the cross-sectional shapes of the groove portion 51 of the valve piston 35 and the step portion 53 of the spring seat 37 linear shapes.

However, when the cross-sectional shapes of the groove portion 51 and the step portion 53 are given such linear shapes, the fastener and the valve piston, or the spring seat and the fastener, linearly contact each other, the contact area ends up becoming excessively small, and there is the potential for pressure to become concentrated. Speaking in terms of this standpoint, it is more preferable for the cross-sectional shapes to be given circular arc shapes because the contact area between the groove portion of the valve piston and the fastener and the contact area between the step portion of the spring seat and the fastener can be ensured as largely as possible and rattling between the valve piston and the spring seat can be prevented.

[0040] Further, as shown in FIG. 10, it is preferable for a frictional force generating member 55 to be intervened between the groove portion 51 of the valve piston 35 and the fastener 40 or between the step portion 53 of the spring seat 37 and the fastener 40.

By intervening this frictional force generating member 55, the contact position between the groove portion 51 of the valve piston 35 or the step portion 53 of the spring seat 37 and the fastener 40, that is, the acting points P1 and P2 of the forces that act on the fastener 40, can be held in positions away from the edges of the groove portion 51 and the step portion 53. Consequently, the force that acts on the fastener 40 from the valve piston 35 and the force that acts on the fastener 40 from the spring seat 37 can be easily caused to act in diagonal directions and shear force that acts on the fastener 40 can be easily reduced.

[0041] Further, as long as the fastener that locks to the groove portion of the valve piston and the step portion of the spring seat is one that can be caused to lock with respect to both the groove portion and the step portion, it is not particularly limited, and a clip member or the like can be used in addition to the aforementioned C-ring. However, in order to be able to dispose the fastener inside the space in the holder portion of the fuel inlet valve, it is preferable to use a C-ring because it can be configured as a relatively small fastener, and it is particularly preferable to use a C-ring that comprises a high-elasticity alloy. By using such a C-ring as the fastener, the strength of the C-ring can be ensured, and the shape of the C-ring can be returned to its initial shape and reliably locked to the groove portion of the valve piston after the C-ring is widened and the valve piston is inserted during assembly of the fuel inlet valve.

Examples of the high-elasticity alloy include an Ni-Ti alloy and a Co-Cr alloy, but the high-elasticity alloy is not limited to these.

[0042] Further, it is preferable to configure the valve piston and the spring seat that configure the fuel inlet valve using carburized steel or bearing steel. This is because, as has been mentioned up to now, the fuel inlet valve in the fuel supply pump of the present invention employs a fixing method that uses a predetermined fastener as the method of fixing the spring seat to the valve

piston, so in terms of the material that configures the spring seat and the valve piston, joining force resulting from welding is no longer called into question.

Consequently, the strength of the valve piston and the spring seat can be raised and, even when fuel of an even higher pressure is to be pressure-fed in a large amount, the durability of the fuel supply pump improves and the fuel can be stably pressure-fed. Further, it becomes unnecessary for the fuel inlet valve to be disposed member with a high-strength shim or the like that prevents wear of the spring seat, the number of parts can be reduced, and assembly efficiency can be improved.

(9) Fuel Outlet Valve

[0043] Further, the fuel outlet valve 22 shown in FIG. 2 is disposed on the side of the fuel pressurization chamber 14 in the cylindrical space 11b of the pump housing 11 and is a part for delivering the fuel that has been pressurized to a high pressure to the common rail and the like. For example, a ball valve 61 is always energized in a valve closing direction by a spring 63 and, when the plunger 13 is pushed up by the cam 21 and the inside of the fuel pressurization chamber 14 reaches a high pressure, the fuel outlet valve 22 can be opened by the pressure of the fuel and allow the fuel to pass therethrough.

6. Example of Use in an Accumulator Fuel Injection System with a Pressure-Amplifying Piston

[0044] The fuel supply pump of the present invention that has been described up to now can be suitably used as a fuel supply pump that is used in an accumulator fuel injection system with a pressure amplifying piston (APCRS) that further amplifies, with a pressure amplifying piston, the pressure of high pressure fuel that has been supplied from a pressure accumulator (common rail) and thereafter injects that fuel from injectors.

FIG. 11 shows a configuration example of an APCRS. This APCRS is configured by a fuel tank 62, the fuel supply pump 1 that pressurizes the fuel inside the fuel tank 62 to a high pressure and pressure-feeds the high pressure fuel, a pressure accumulator (common rail) 66 for pressure-accumulating the high pressure fuel that has been pressure-fed from this fuel supply pump 1, pressure amplifying devices (pressure amplifying pistons) 68 for further amplifying the pressure of the fuel that has been pressure-accumulated by the common rail 66, and injectors 70.

[0045] The configuration of the common rail 66 is not particularly limited, and a publicly known configuration can be used. The plural injectors 70 are connected to the common rail 66, the fuel that has been pressurized to a high pressure by the fuel supply pump 1 is supplied equally with respect to all of the injectors 70, and the injectors 70 are controlled such that the injectors 70 can be caused to inject the fuel at a desired injection timing to an internal combustion engine (not shown). Because the APCRS is

disposed with this common rail 66, the fuel can be injected to the engine via the injectors 70 at an injection pressure commensurate with the number of rotations without the rotation of the pump directly affecting the injection pressure.

Further, a pressure detector (not shown) is connected to the common rail 66, and a pressure-detection signal obtained by this pressure detector is sent to an electronic control unit (ECU: Electrical Controlling Unit). Additionally, the ECU receives the pressure-detection signal from the pressure detector and controls an electromagnetic control valve (not shown) similarly disposed in the common rail 66 such that the common rail pressure becomes a predetermined pressure.

[0046] Further, each of the pressure amplifying devices can be given a configuration which, as exemplified in FIG. 11, includes a cylinder 75, a mechanical piston (pressure amplifying piston) 74, a pressure reception chamber 78, a pressurization chamber 79, an electromagnetic valve 80 and a circulation path 77, with a pressure receiver 72 and a pressurizer 76 whose area is relatively smaller than that of the pressure receiver 72 being disposed in the mechanical piston 74.

In each of these pressure amplifying devices, the mechanical piston 74 that is housed inside the cylinder 75 is pushed by fuel that has the common rail pressure in the pressure receiver 72 and moves such that the fuel inside the pressurization chamber 79 is compressed and its pressure is amplified by the pressurizer 76.

[0047] That is, as shown in the schematic diagram of FIG. 12, by configuring the pressure amplifying device as a mechanical piston that is disposed with the pressure receiver and the pressurizer whose area is relatively smaller than that of the pressure receiver and considering the stroke amount of the piston, it is possible to efficiently amplify the pressure of the fuel that has the common rail pressure while reducing pressure loss as much as possible.

More specifically, the fuel from the common rail (pressure: p_1 , volume: V_1 , workload: W_1) can be made into even higher pressure fuel (pressure: p_2 , volume: V_2 , workload: W_2) by the mechanical piston that is disposed with the pressure receiver whose area is relatively large and the pressurizer whose area is relatively small.

[0048] Each of the pressure amplifying devices 68 shown in FIG. 11 uses the fuel that has the common rail pressure in a large amount in order to push the mechanical piston 74, but after pressurization, the fuel is refluxed to the fuel tank 62 via the electromagnetic valve 80. That is, a large portion of the fuel that has the common rail pressure pushes the mechanical piston 74, is thereafter refluxed to the fuel tank 62 via a line 93, for example, and can again be used as high pressure fuel.

On the other hand, fuel whose pressure has been amplified by the pressurizer 76 is sent to injection holes 73 side of the injectors and injected, and fuel that has been used in back pressure control of the injectors 70 and discharged from the electromagnetic valve 71 becomes re-

fluxed to the fuel tank 62 via the line 93.

By disposing this pressure amplifying device, the mechanical piston can be effectively pushed by the fuel that has the common rail pressure in an arbitrary time period and without making the common rail excessively large.

[0049] Further, the configuration of the injectors 70 is not particularly limited and can, as exemplified in FIG. 11, be given a configuration that is disposed with a nozzle body 103 that includes a seat surface 102 on which a needle valve body 101 sits and an injection hole 73 that is formed further on the downstream side than the valve body abutment portion of this seat surface 102, with the ejector 70 guiding, to the injector hole 73, fuel that is supplied from the upstream side of the seat surface 102 when the needle valve body 101 lifts.

Further, in each of the injectors 70, the needle valve body 101 is always energized toward the seat surface 102 by a spring 104 or the like, and the needle valve body 101 can be configured as an electromagnetic valve type that is opened and closed by switching between energization/no energization of a solenoid (not shown).

[0050] In this pressure amplifying accumulator fuel injection system, a fuel supply pump that can pressure-feed even higher pressure fuel to the common rail in a large amount is required, but when the fuel supply pump is the fuel supply pump of the present invention such as has been described above, the durability of the fuel inlet valve is improved and the fuel supply pump can withstand long-term use even in use in an APCRS. Consequently, even when the fuel supply pump is caused to operate at a high pressure and a high speed over a long period of time, the fuel supply pump can stably supply a large amount of high pressure fuel.

Claims

1. A fuel supply pump comprising a fuel pressurization chamber for pressurizing fuel to a high pressure and a fuel inlet valve for supplying fuel to the fuel pressurization chamber, wherein
the fuel inlet valve is disposed with a valve body, a valve piston that includes a collar portion on one end side and is slidably held in the valve body, a spring that energizes the valve piston in a valve closing direction, and a spring seat that is fixed in the vicinity of an end portion of the valve piston on the opposite side of the one end side and which receives one end of the spring,
the valve piston includes, in its outer surface in the vicinity of the end portion on the opposite side, a groove portion to which a fastener for fixing the valve piston and the spring seat locks,
the spring seat includes an open portion into which the valve piston is inserted and includes, along an edge of the open portion, a step portion to which the fastener locks,
the valve piston is inserted into the open portion of

the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by the spring to cause the fastener to lock to the step portion, whereby the spring seat is fixed to the valve piston, and a clearance is disposed between the fastener and at least one of an edge portion of the groove portion on the energizing direction side and an edge portion of the step portion on the opposite side of the energizing direction.

2. The fuel supply pump of claim 1, wherein the cross-sectional shape of the groove portion or the step portion is a circular arc shape, and the clearance is disposed by offsetting the center of a circle that draws the circular arc from an outer surface position of the valve piston.
3. The fuel supply pump of claim 1 or 2, wherein a frictional force generating member is intervened between the groove portion or the step portion and the fastener.
4. The fuel supply pump of any one of claims 1 to 3, wherein the fastener is a C-ring that comprises an alloy that has high elasticity.
5. The fuel supply pump of any one of claims 1 to 4, wherein the valve piston and the spring seat comprise carburized steel or bearing steel.
6. A fuel supply pump comprising a fuel pressurization chamber for pressurizing fuel to a high pressure and a fuel inlet valve for supplying fuel to the fuel pressurization chamber, wherein
the fuel inlet valve is disposed with a valve body, a valve piston that includes a collar portion on one end side and is slidably held in the valve body, a spring that energizes the valve piston in a valve closing direction, and a spring seat that is fixed in the vicinity of an end portion of the valve piston on the opposite side of the one end side and which receives one end of the spring,
the valve piston includes, in its outer surface in the vicinity of the end portion on the opposite side, a groove portion to which a fastener for fixing the valve piston and the spring seat locks,
the spring seat includes an open portion into which the valve piston is inserted and includes, along an edge of the open portion, a step portion to which the fastener locks,
the valve piston is inserted into the open portion of the spring seat, the fastener is thereafter caused to lock to the groove portion of the valve piston, and the spring seat is energized by the spring to cause the fastener to lock to the step portion, whereby the spring seat is fixed to the valve piston, and a contact portion between the groove portion and

the fastener and a contact portion between the step portion and the fastener are connected in a diagonal direction with respect to the energizing direction.

5

10

15

20

25

30

35

40

45

50

55

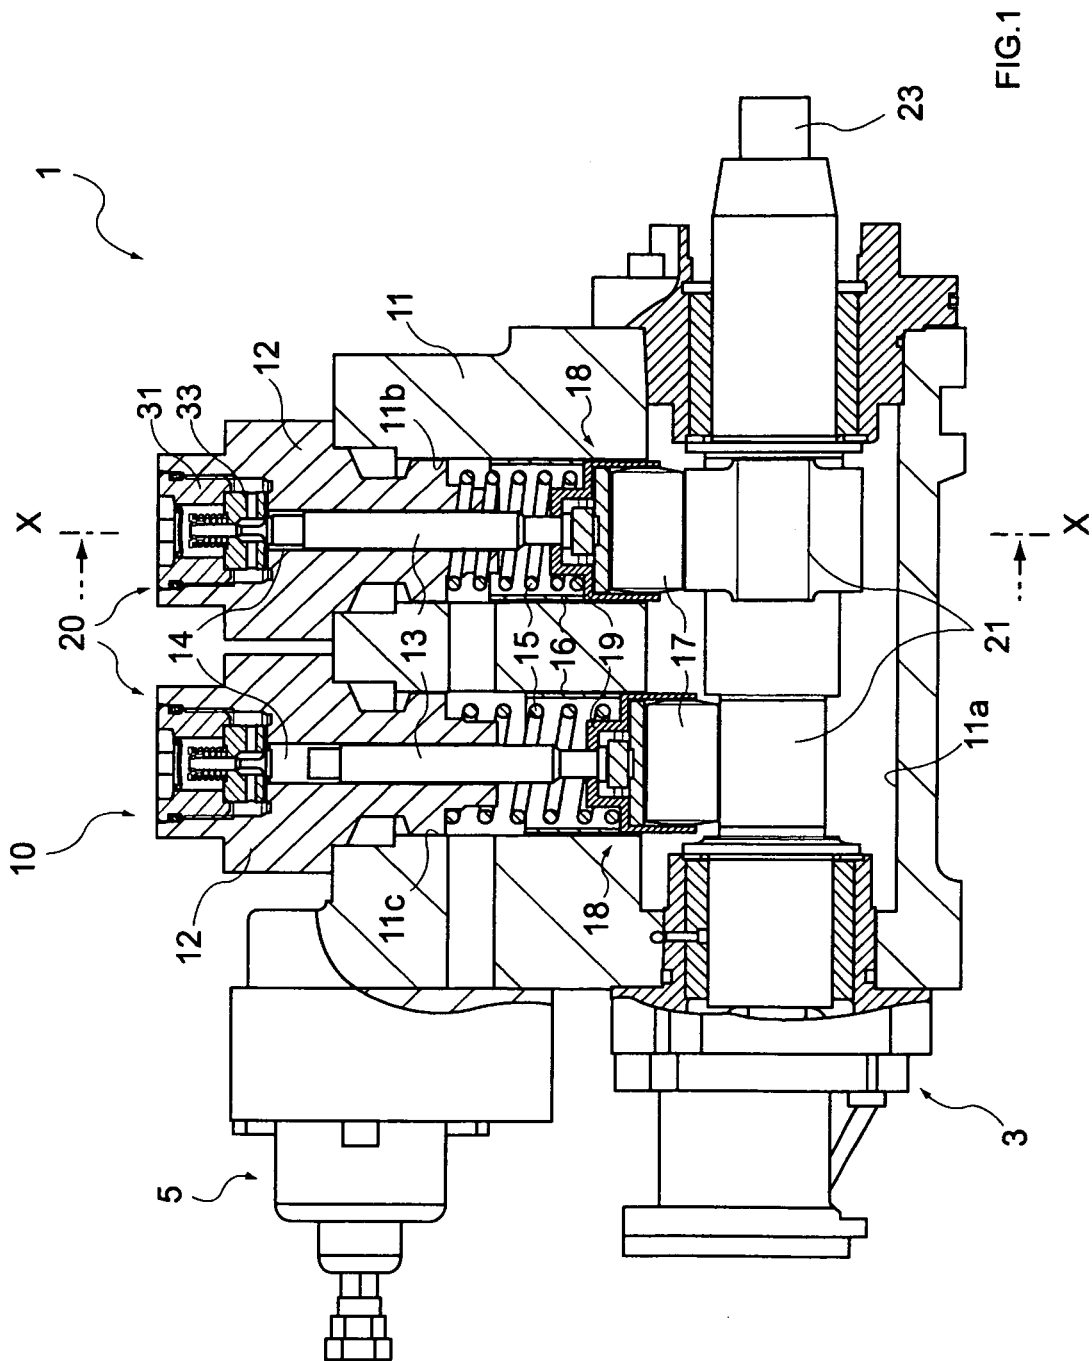


FIG.2

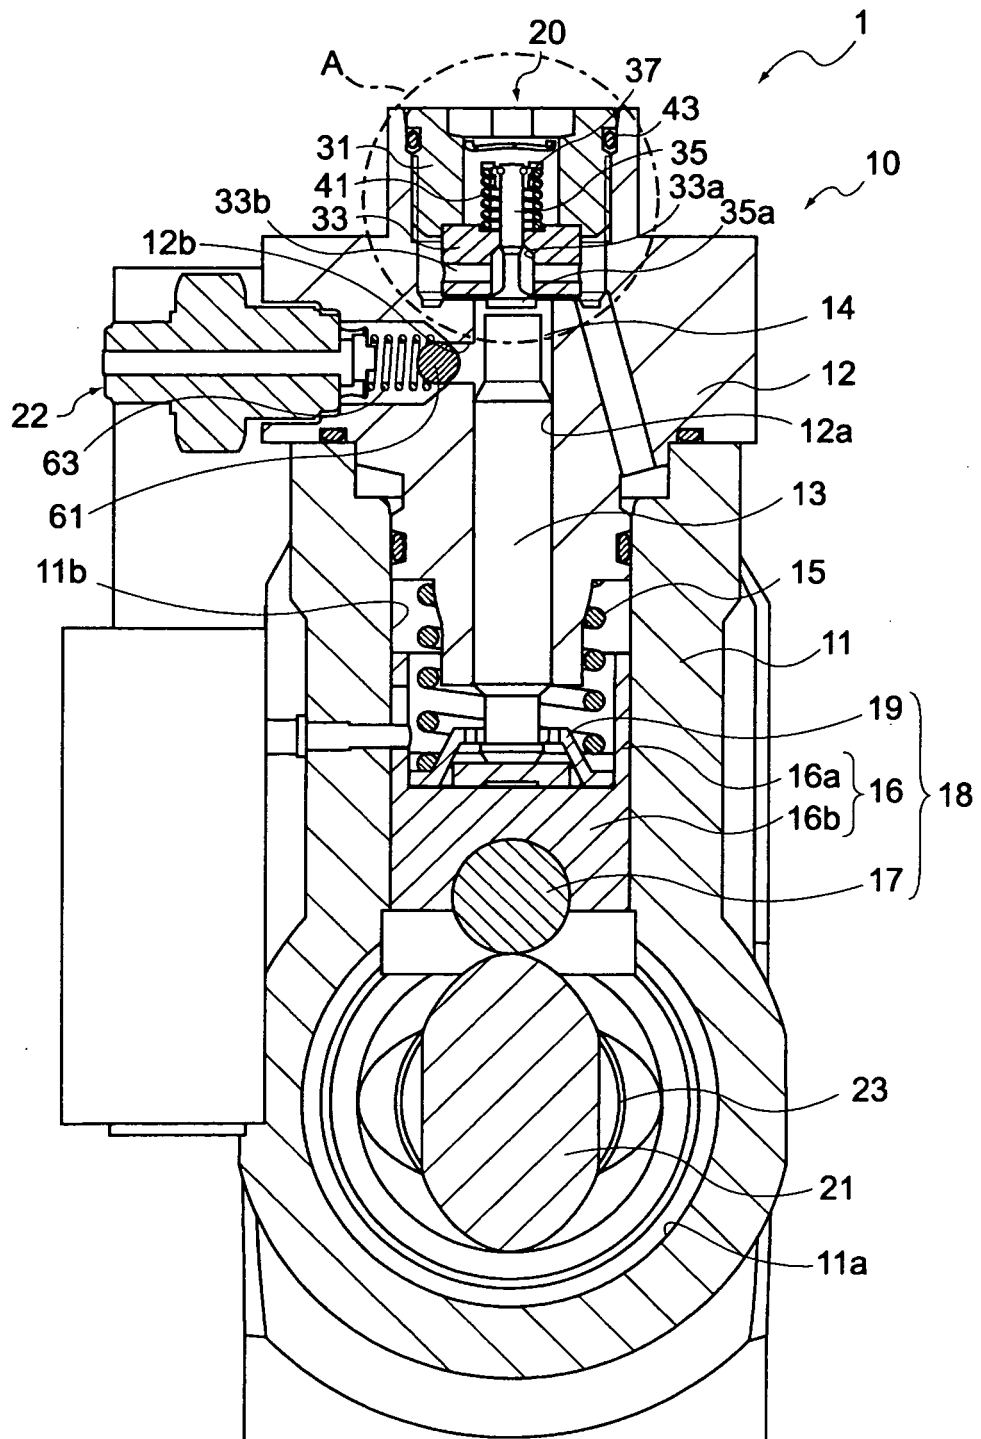


FIG.3 (a)

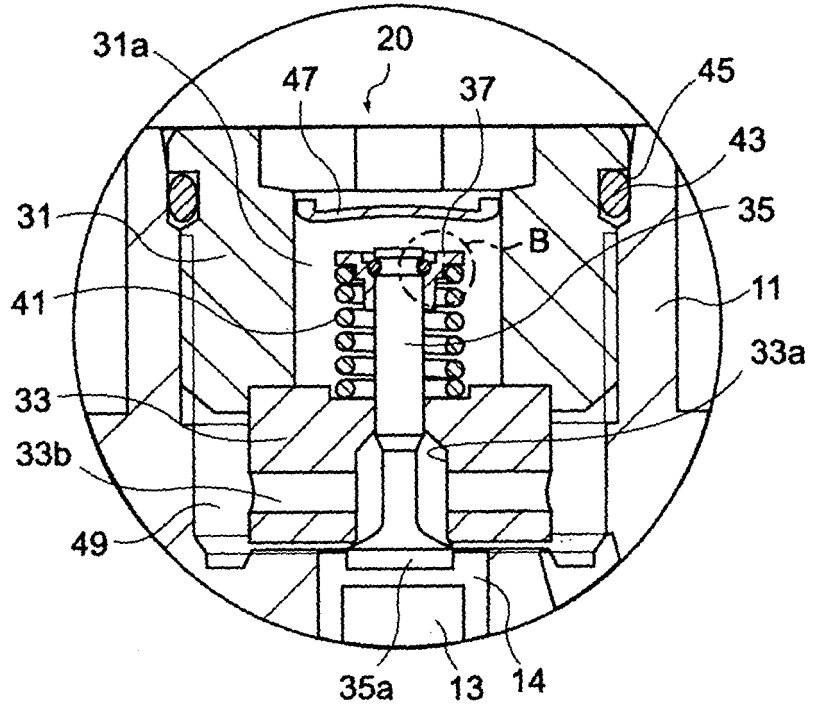
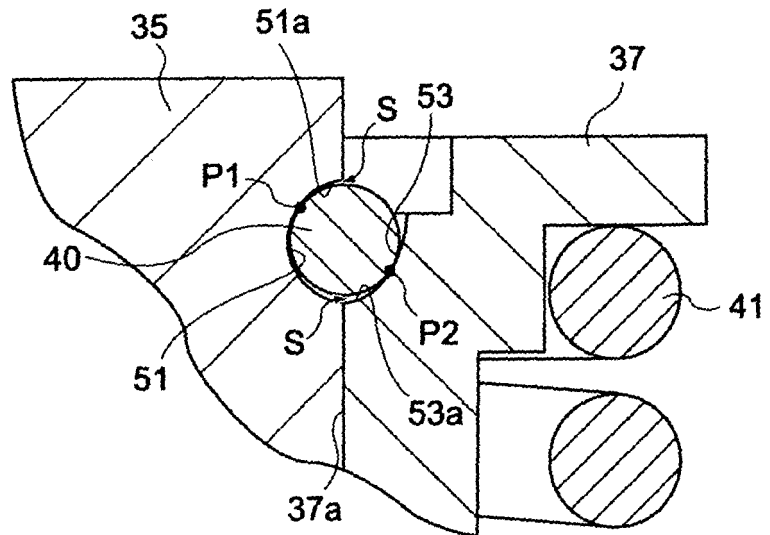


FIG.3 (b)



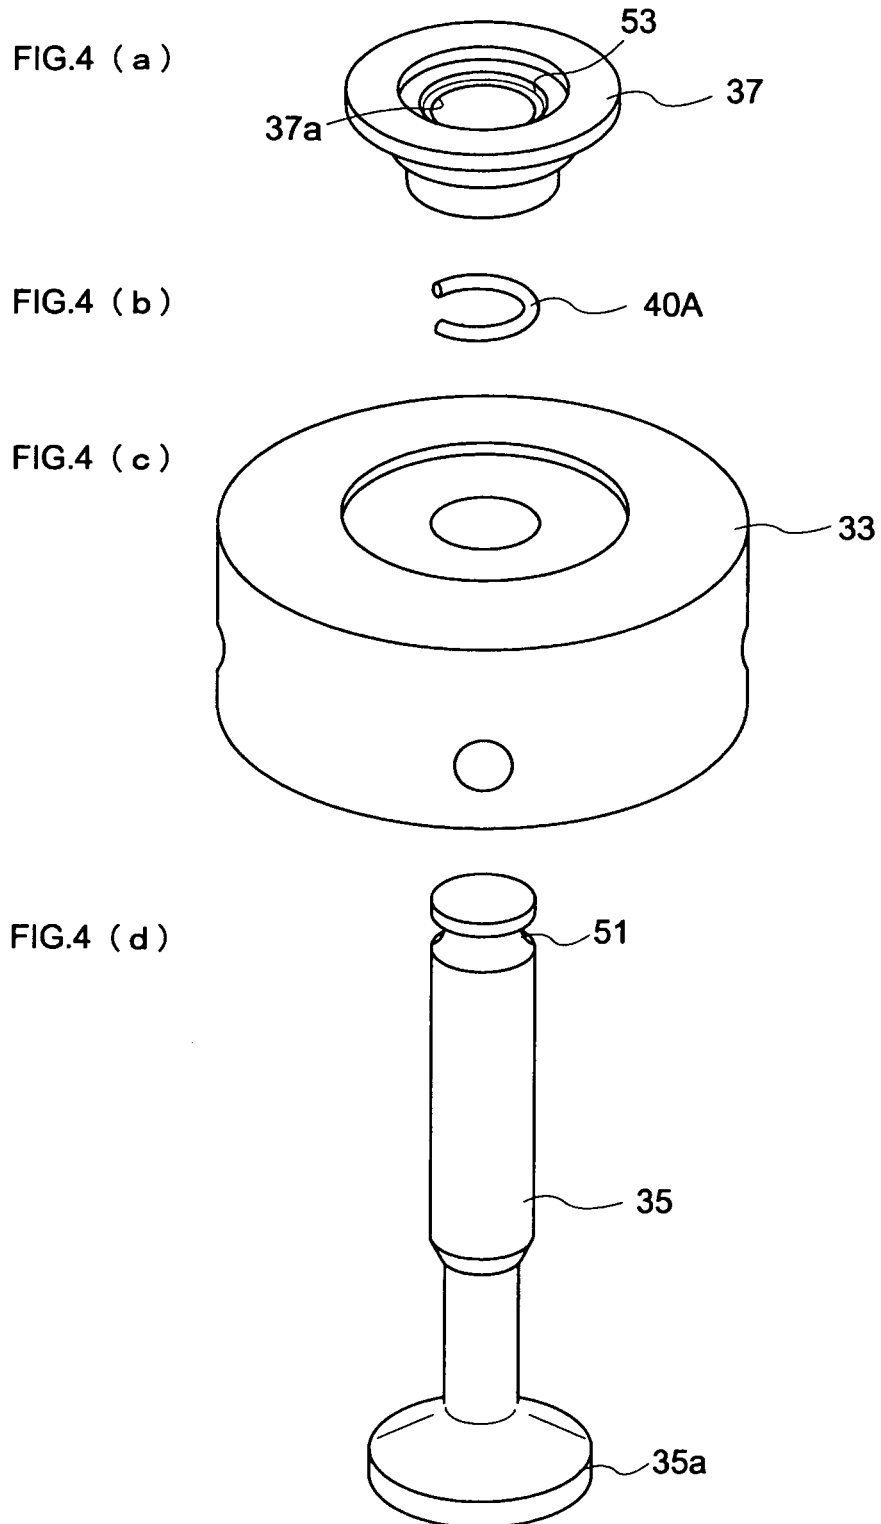


FIG.5 (a)

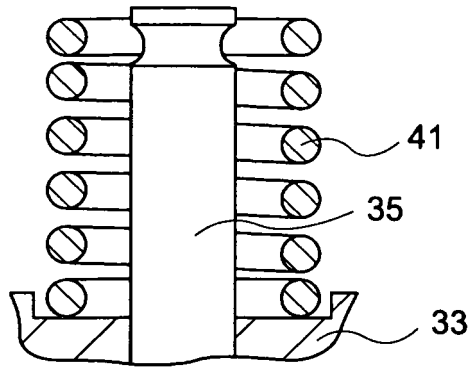


FIG.5 (b)

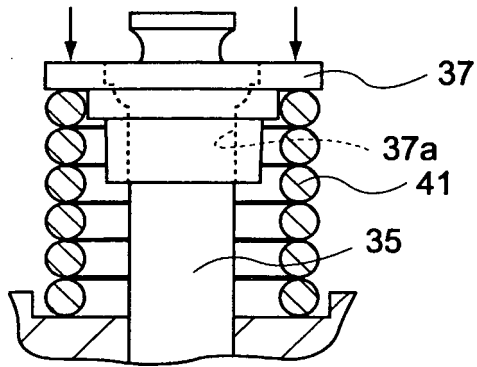


FIG.5 (c)

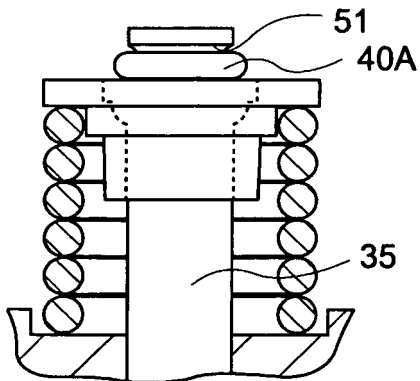


FIG.5 (d)

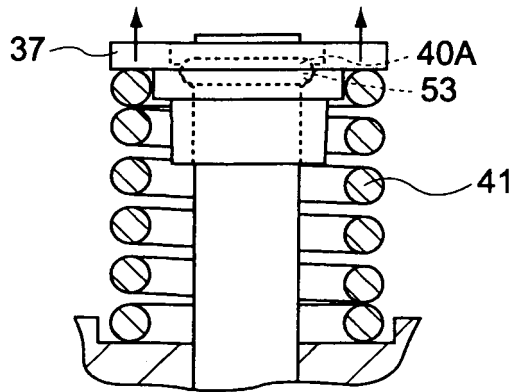


FIG.6

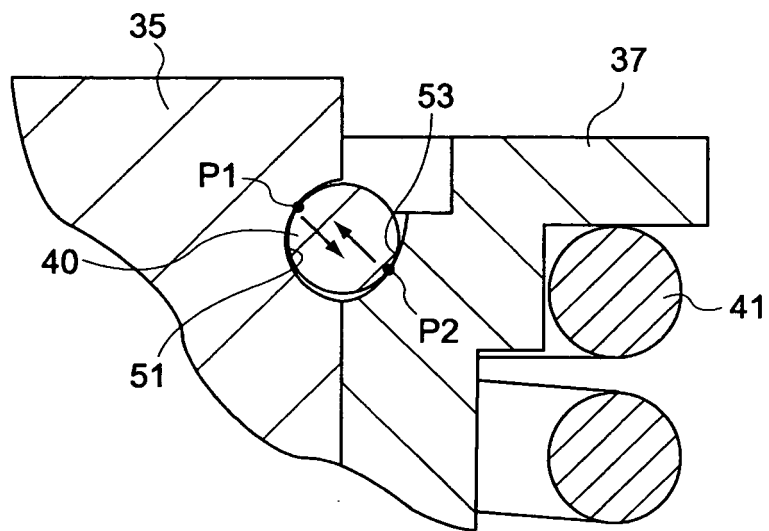


FIG.7 (a)

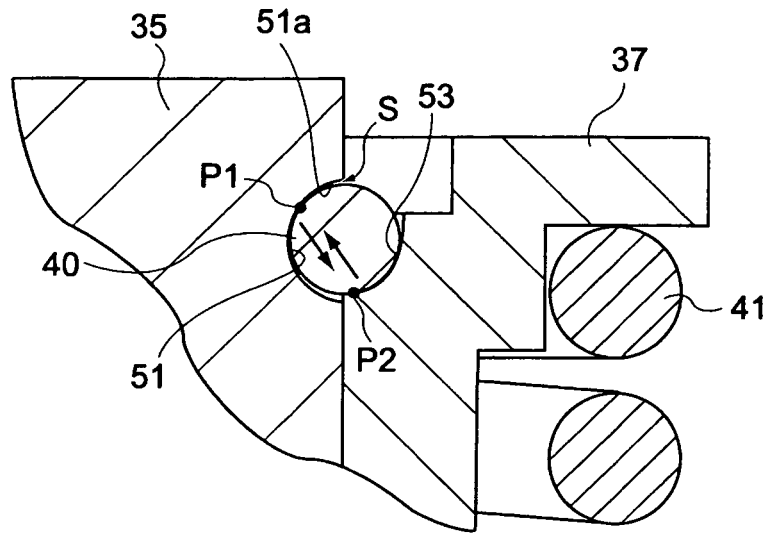


FIG.7 (b)

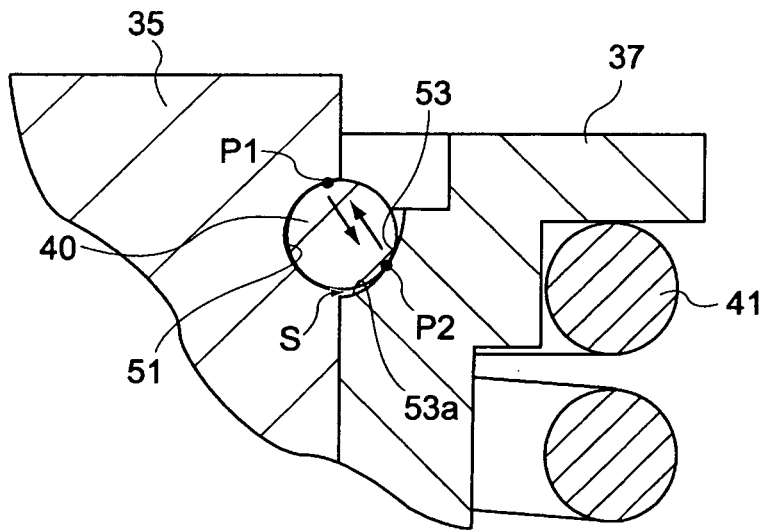


FIG.8(a)

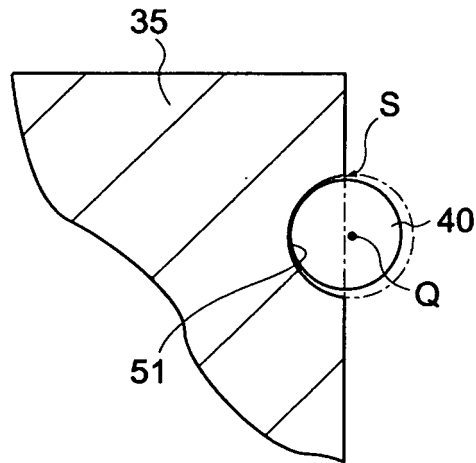


FIG.8(b)

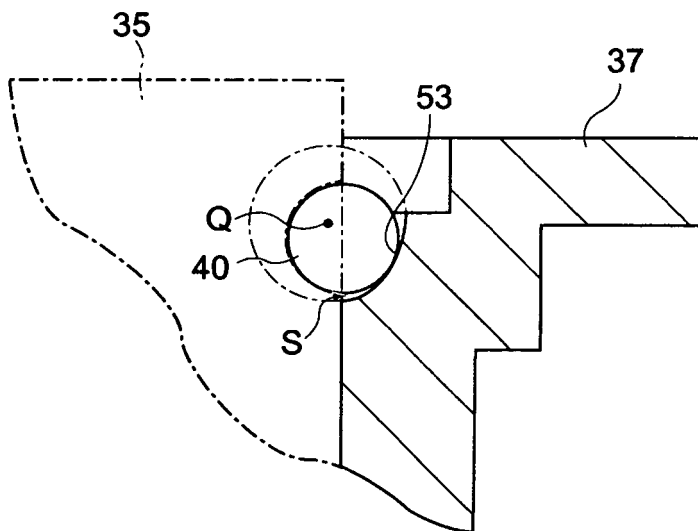


FIG.9

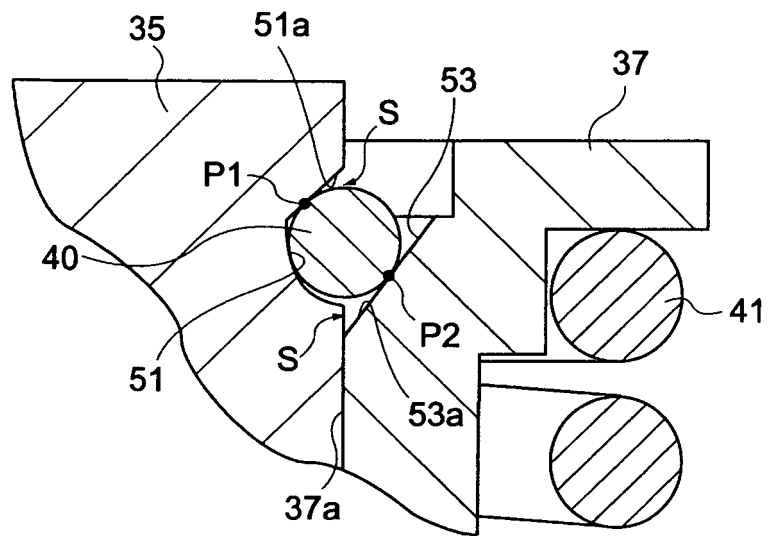
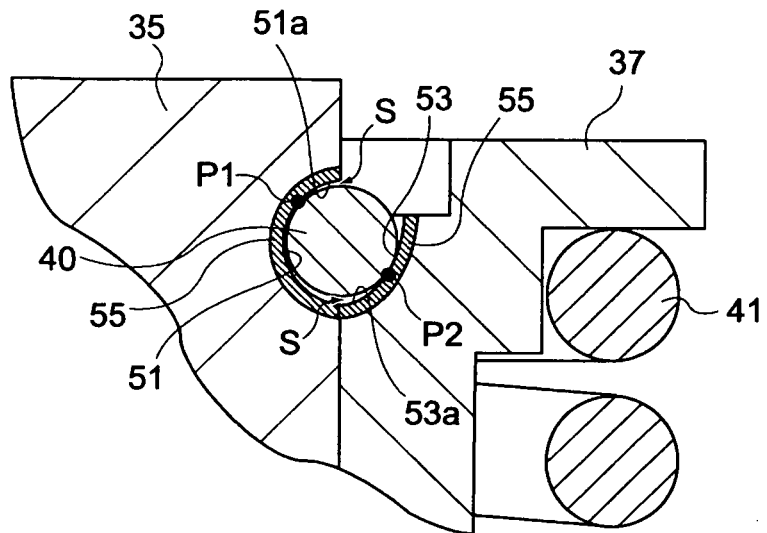


FIG.10



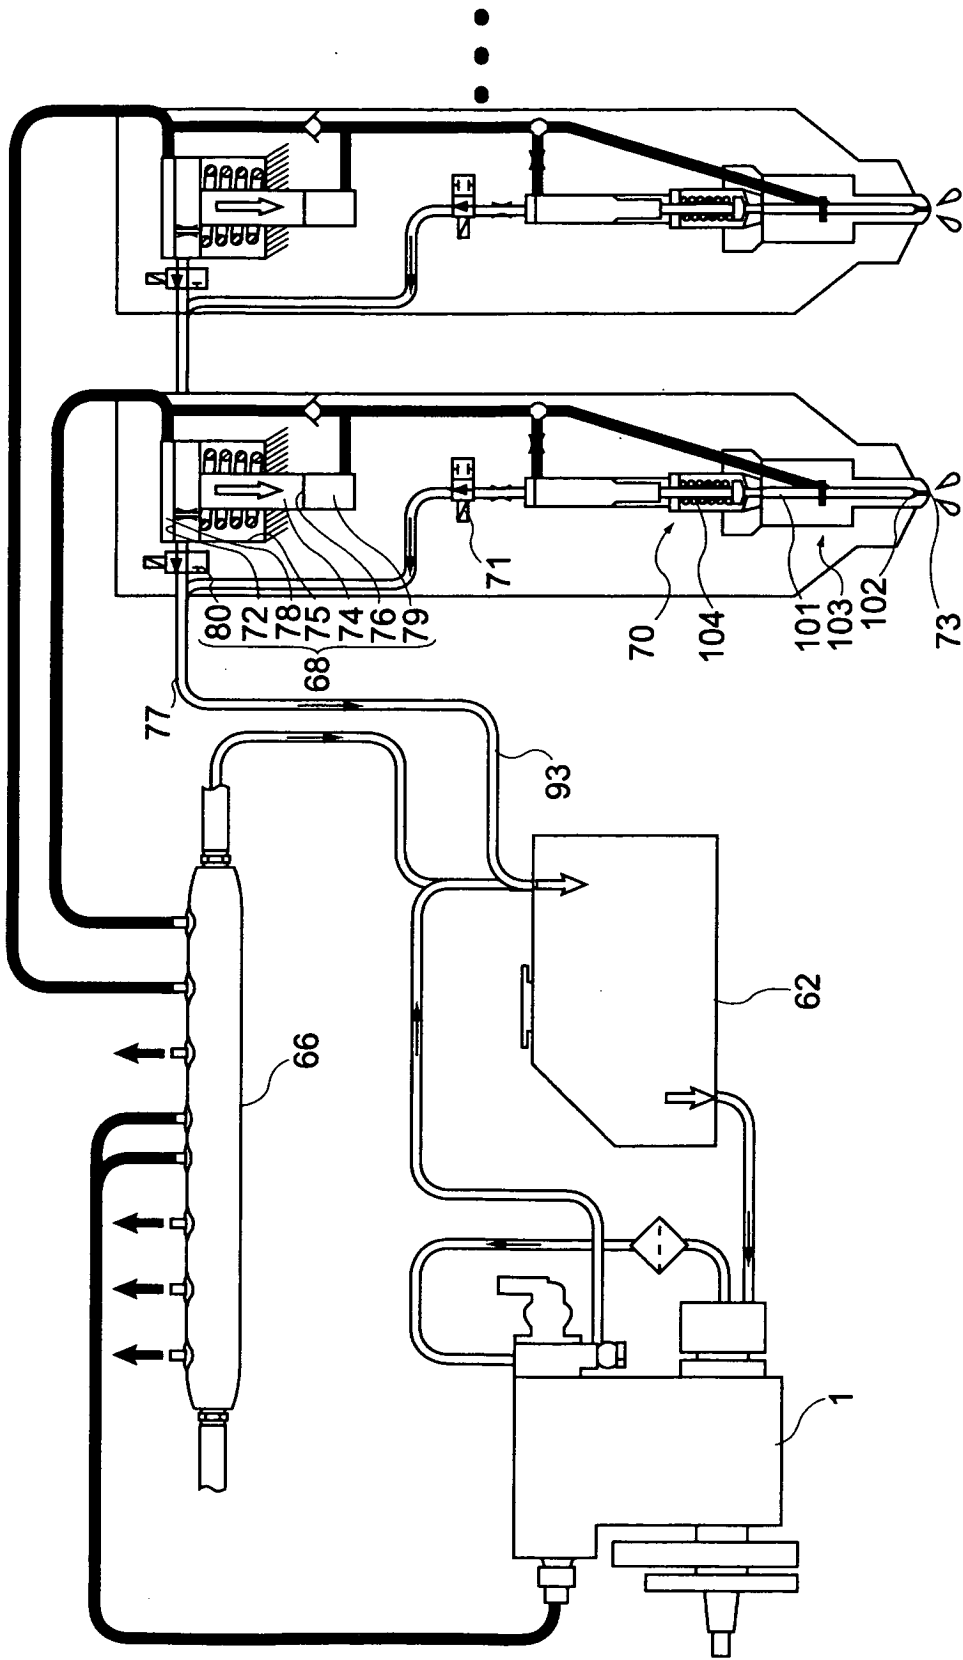


FIG.11

FIG.12


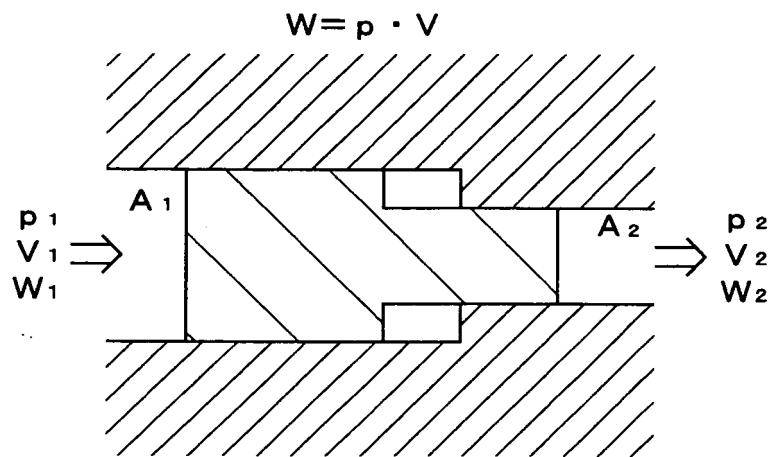


FIG.13

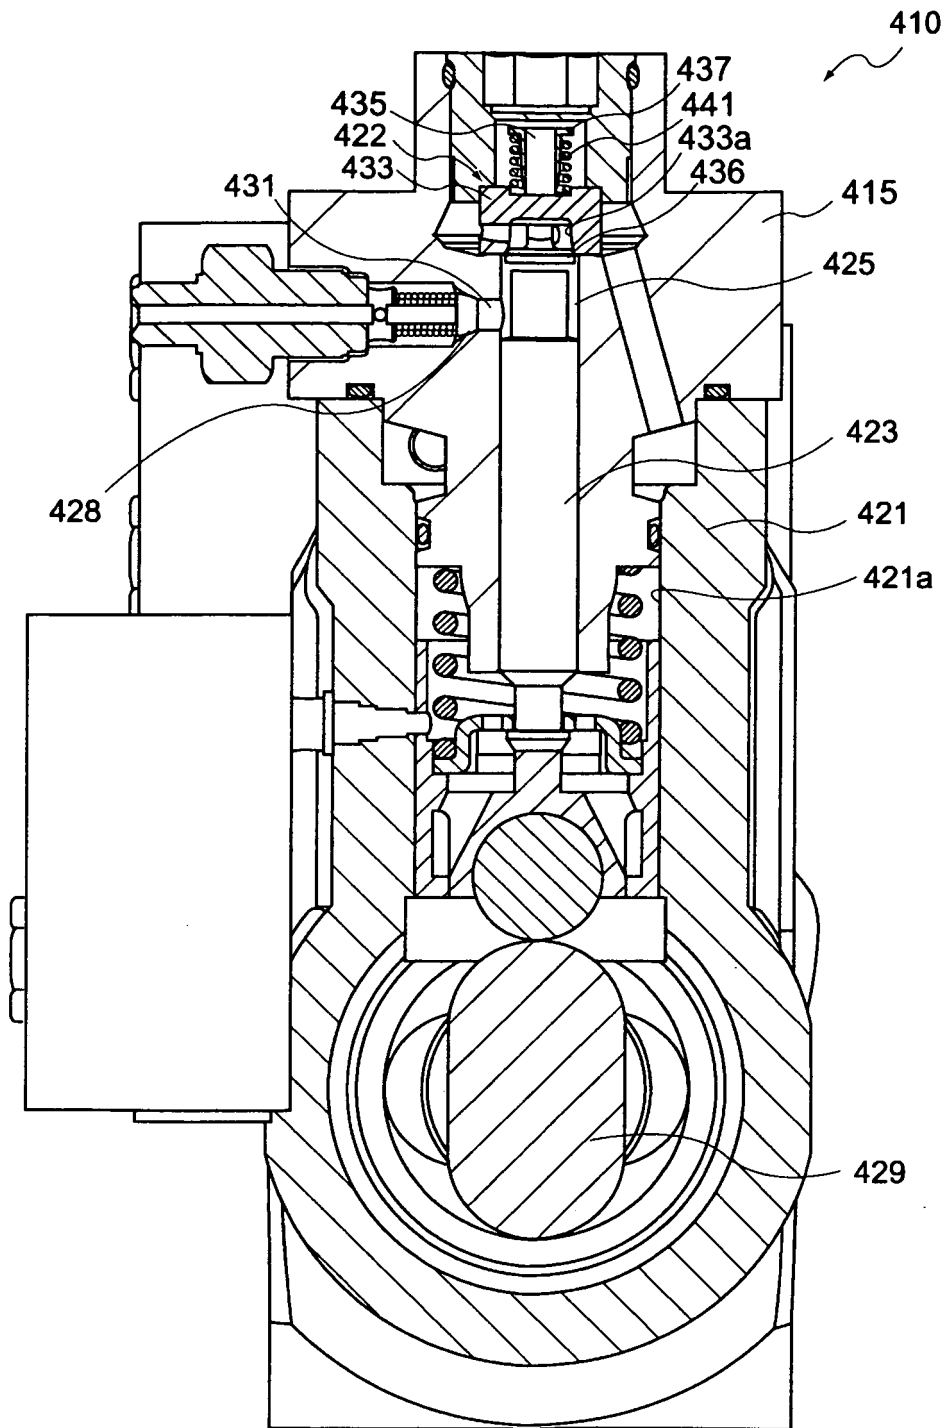

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2007/058697

A. CLASSIFICATION OF SUBJECT MATTER <i>F02M59/36(2006.01) i, F02M59/46(2006.01) i</i>														
According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED														
Minimum documentation searched (classification system followed by classification symbols) <i>F02M59/36, F02M59/46, F01L3/10, B23P19/02</i>														
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched <table border="0"> <tr> <td><i>Jitsuyo Shinan Koho</i></td> <td><i>1922-1996</i></td> <td><i>Jitsuyo Shinan Toroku Koho</i></td> <td><i>1996-2007</i></td> </tr> <tr> <td><i>Kokai Jitsuyo Shinan Koho</i></td> <td><i>1971-2007</i></td> <td><i>Toroku Jitsuyo Shinan Koho</i></td> <td><i>1994-2007</i></td> </tr> </table>			<i>Jitsuyo Shinan Koho</i>	<i>1922-1996</i>	<i>Jitsuyo Shinan Toroku Koho</i>	<i>1996-2007</i>	<i>Kokai Jitsuyo Shinan Koho</i>	<i>1971-2007</i>	<i>Toroku Jitsuyo Shinan Koho</i>	<i>1994-2007</i>				
<i>Jitsuyo Shinan Koho</i>	<i>1922-1996</i>	<i>Jitsuyo Shinan Toroku Koho</i>	<i>1996-2007</i>											
<i>Kokai Jitsuyo Shinan Koho</i>	<i>1971-2007</i>	<i>Toroku Jitsuyo Shinan Koho</i>	<i>1994-2007</i>											
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT														
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
Y	JP 2003-329151 A (Denso Corp.), 19 November, 2003 (19.11.03), Par. Nos. [0009] to [0022]; Figs. 1, 3 (Family: none)	1, 4, 5, 6												
Y A	JP 2004-60616 A (Fuji Oozx Inc.), 26 February, 2004 (26.02.04), Par. Nos. [0023] to [0042]; Figs. 1 to 4 (Family: none)	1, 4, 5 2, 3												
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.														
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family													
"O" document referring to an oral disclosure, use, exhibition or other means														
"P" document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search 26 June, 2007 (26.06.07)		Date of mailing of the international search report 10 July, 2007 (10.07.07)												
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer												
Facsimile No.		Telephone No.												

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2007/058697

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	Microfilm of the specification and drawings annexed to the request of Japanese Utility Model Application No. 27007/1989 (Laid-open No. 118104/1990) (Nissan Motor Co., Ltd.), 21 September, 1990 (21.09.90), Description, page 6, line 18 to page 11, line 20; Fig. 2, 8(C); Fig. 6(A) (Family: none)	6 2, 3
A	JP 9-317417 A (Suzuki Motor Corp.), 09 December, 1997 (09.12.97), Par. Nos. [0011] to [0027]; Figs. 1, 2 (Family: none)	1-6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004211580 A [0003]