

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/056549 A1

- (51) International Patent Classification⁷: **B29C 44/34**
- (21) International Application Number:
PCT/SE2003/002043
- (22) International Filing Date:
18 December 2003 (18.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02445192.4 20 December 2002 (20.12.2002) EP
- (71) Applicant (for all designated States except US): **AKZO NOBEL N.V.** [NL/NL]; P.O. Box 9300, NL-6800 SB ARNHEM (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SVEDBERG, Lars-Olof** [SE/SE]; Floxvägen 2, S-862 34 KVISSLEBY (SE). **HOVLAND, Guy** [SE/SE]; Näset 132, S-862 95 NJURUNDA (SE). **HOLMLUND, Thomas** [SE/SE]; Solvågen 6, S-854 68 SUNDSVALL (SE).
- (74) Agent: **BÄCKSTRÖM, Hans**; Eka Chemicals AB, Patent Department, P.O. Box 11556, S-100 61 STOCKHOLM (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR PRE- EXPANDING THERMOPLASTIC MICROSPHERES

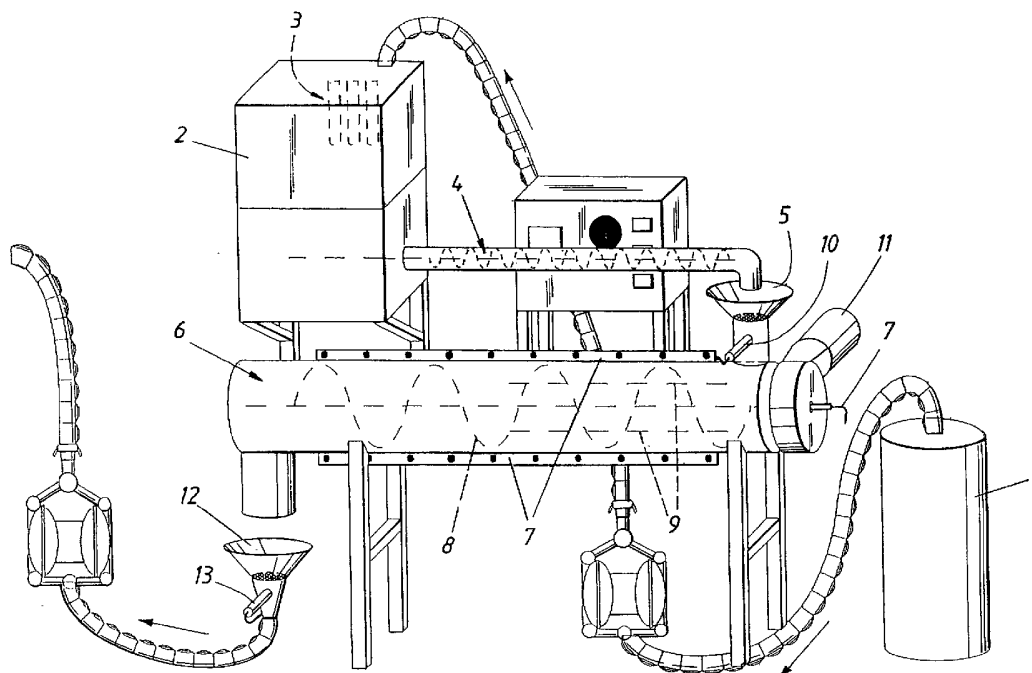

(57) Abstract: The present invention relates to a method of preparing expanded thermoplastic microspheres, comprising charging thermally expandable microspheres into an expansion device (6) comprising rotating feeding means (8) enveloped by a hollow body, and one or more scrapers (9). The invention further relates to an expansion device for expanding thermoplastic microspheres.

METHOD AND DEVICE FOR PRE-EXPANDING THERMOPLASTIC MICROSPHERES

The present invention relates to a method and an expansion device for preparing
5 expanded thermoplastic microspheres.

Thermally expandable microspheres are known in the art and described in detail
in, for example, US Patent No. 3615972, EP 486080, EP 566367 and EP 1 067 151,
which documents hereby are incorporated by reference. In such microspheres, a
propellant is encapsulated within a thermoplastic shell. Upon heating, the propellant
10 evaporates to increase the internal pressure, at the same time as the shell softens,
resulting in significant expansion of the microspheres, normally from about 2 to about 5
times their diameter.

Thermoplastic microspheres can be used in various applications as unexpanded
or pre-expanded. Examples of applications for expanded microspheres are solvent based
15 resins, like polyester, for dry spheres, and water based application systems, like paint, for
wet spheres.

Full expansion of thermoplastic microspheres may lead to problems with
agglomeration due to the higher temperature needed for full expansion, in combination
with the thin thermoplastic shell which results from the expansion. There is a need for
20 providing a method and an expansion device for preparing expanded thermoplastic
microspheres, where the degree of expansion can be controlled in order to have the
possibility to provide different densities of expanded microspheres. There is also a need
for a method and an expansion device for expanding thermoplastic microspheres, which
is simple and requires small space, which is comparatively inexpensive, and which is
25 easily used by the end-users, at the place where expanded microspheres are to be used,
thereby saving transport volumes and costs.

EP 0 348 372 discloses a process for preparation of expanded thermoplastic
microspheres where the expansion takes place on a conveyor belt. The process works
well but takes up considerable space and is comparatively expensive.

30 US Patent No. 4,722,943 and US Patent No. 5,342,689 describe methods for
expanding microspheres where microspheres are mixed with a surface barrier coating to
prevent agglomeration during a drying step. However, the amount of processing aid, such
as talc, is very high which affects the possibilities of fast cooling. This causes difficulties in
controlling the degree of expansion of the microspheres.

35 It is an object of the present invention to provide a method of preparing
expanded thermoplastic microspheres, which can be made in small equipment, which
gives minimum of dust problems, which gives minimum of agglomeration, where the
degree of expansion of the microspheres can be more easily controlled than before, and

which also gives a possibility to continuously producing a product of expanded microspheres having a narrow density distribution. It is a further object of the present invention to provide an expansion device for preparing expanded thermoplastic microspheres, suitable for the above-mentioned method.

5 According to the invention it has surprisingly been found to achieve the above mentioned objects by a method and an expansion device for preparing expanded thermoplastic microspheres. The method, according to the invention, comprises charging thermally expandable microspheres into an expansion device comprising rotating feeding means enveloped by a hollow body, and one or more scrapers, wherein the scrapers
10 prevent layers of microspheres being built-up in the expansion device, transporting the microspheres through the expansion device while increasing the temperature of the microspheres to achieve expansion thereof, and discharging the microspheres. The one or more scrapers are suitably positioned between the outer radius of the feeding means and the inner surface of the hollow body. The resulting feeding direction in the expansion
15 device is suitably substantially perpendicular to the rotational movement of the feeding means.

 The invention further concerns an expansion device for preparing expanded thermoplastic microspheres, comprising rotatable feeding means enveloped by a hollow body, and one or more scrapers positioned between the outer radius of the feeding
20 means and the inner surface of the hollow body.

 The method and the expansion device allow for a continuous production of expanded thermoplastic microspheres.

 The one or more scrapers, or a surface layer of the one or more scrapers, are/is suitably made of a polymeric material, preferably a heat-resistant polymeric material. The
25 polymeric material is preferably a fluoroplastic material, such as PTFE, PVDF, PFA or FEP. If the polymeric material is a thermoplastic, the melting point of the polymeric material is suitably above about 200°C, preferably above 250°C.

 Preferably, the one or more scrapers are at least partly in contact with the inner surface of the hollow body. The one or more scrapers suitably have certain flexibility so
30 that the one or more scrapers, when pressed against the inner surface of the hollow body, will provide a tight contact between the one or more scrapers and the inner surface of the hollow body.

 The hollow body is suitably provided with one or more heaters. The heaters are suitably jacket heaters. The feeding means itself is also suitably provided with one or
35 more heaters.

 The thermally expandable microspheres are suitably transported to the inlet of the expansion device by using a screw feeder, which can be provided with heaters.

The thermally expandable microspheres are suitably pre-mixed, before entering the expansion device, with a filler preventing agglomeration of the microspheres. The filler is suitably in the form of fine particles having a particle diameter range from about $1 \cdot 10^{-9}$ to about $1 \cdot 10^{-3}$ m, preferably from about $1 \cdot 10^{-8}$ to about $3 \cdot 10^{-5}$ m. Examples of fillers are inorganic compounds such as: aluminium powder, magnesium carbonate, magnesium phosphates, magnesium hydroxide, dolomite, calcium carbonate, calcium phosphates, calcium sulphate, talc, kaolin, silicon oxides, iron oxides, titanium oxide, aluminium oxides and hydroxides, zinc oxide, hydrotalcite, mica, barytes, glass spheres, fly ash, fine sand, mineral fibres and generally reinforcing fibres, wollastonite, feldspars, diatomaceous earth, pearlites, vermicullites, hollow quartz and ceramic spheres. Also organic compounds may be used, especially polymers with a sufficient high softening temperature, and cellulose, wood flour, carbon black, carbon fibres and graphite fibres. Preferably, the filler is a silicon oxide such as silicon dioxide. The filler may be used in its pure form or it may be surface treated in different ways in order to increase the agglomerate preventing effect. One way of surface treating the filler is to make it hydrophobic. The weight ratio added filler to microspheres is depending on which filler is used, but is suitably from about 1:1000 to about 5:1, preferably from about 1:500 to about 1:1, even more preferably from about 1:100 to about 1:3, and most preferably from about 1:25 to about 1:5.

The method and the expansion device according to the invention can be used for all known kinds of expandable thermoplastic microspheres, such as those marketed under the trademark Expancel®. Suitable microspheres may have a thermoplastic shell made from polymers or co-polymers obtainable by polymerizing various ethylenically unsaturated monomers which can be nitrile containing monomers such as acrylo nitrile, methacrylo nitrile, α -chloroacrylo nitrile, α -ethoxyacrylo nitrile, fumaro nitrile, croto nitrile, acrylic esters such as methylacrylate or ethyl acrylate, methacrylic esters such as methyl methacrylate, isobornyl methacrylate or ethyl methacrylate, vinyl halides such as vinyl chloride, vinylidene halides such as vinylidene chloride, vinyl pyridine, vinyl esters such as vinyl acetate, styrenes such as styrene, halogenated styrenes or α -methyl styrene, or dienes such as butadiene, isoprene and chloroprene. Any mixtures of the above mentioned monomers may also be used. It may sometimes be desirable that the monomers for the polymer shell also comprise crosslinking multifunctional monomers, such as one or more of divinyl benzene, ethylene glycol di(meth)acrylate, diethylene glycol di(meth)acrylate, triethylene glycol di(meth)acrylate, propylene glycol di(meth)acrylate, 1,4-butanediol di(meth)acrylate, 1,6-hexanediol di(meth)acrylate, glycerol di(meth)acrylate, 1,3-butanediol di(meth)acrylate, neopentyl glycol di(meth)acrylate, 1,10-decanediol di(meth)acrylate, pentaerythritol tri(meth)acrylate,

pentaerythritol tetra(meth)acrylate, pentaerythritol hexa(meth)acrylate, dimethylol tricyclodecane di(meth)acrylate, triallylformal tri(meth)acrylate, allyl methacrylate, trimethylol propane tri(meth)acrylate, trimethylol propane triacrylate, tributanediol di(meth)acrylate, PEG #200 di(meth)acrylate, PEG #400 di(meth)acrylate, PEG #600 di(meth)acrylate, 3-acryloyloxyglycol monoacrylate, triacryl formal or triallyl isocyanate, triallyl isocyanurate etc. If present, such crosslinking monomers preferably constitute from about 0.1 to about 1 wt%, most preferably from about 0.2 to about 0.5 wt% of the total amounts of monomers for the polymer shell. Preferably the polymer shell constitutes from about 60 to about 95 wt%, most preferably from about 75 to about 85 wt% of the total microsphere.

The propellant in a microsphere is normally a liquid having a boiling temperature not higher than the softening temperature of the thermoplastic polymer shell. The propellant, also called the blowing agent or foaming agent, can be hydrocarbons such as n-pentane, isopentane, neopentane, butane, isobutane, hexane, isohexane, neohexane, heptane, isoheptane, octane and isooctane, or mixtures thereof. Also, other hydrocarbon types can also be used, such as petroleum ether, and chlorinated or fluorinated hydrocarbons, such as methyl chloride, methylene chloride, dichloro ethane, dichloro ethylene, trichloro ethane, trichloro ethylene, trichlorofluoro methane etc. The propellant suitably makes up from about 5 to about 40 weight % of the microsphere.

The temperature at which the expansion of the microspheres starts is called T_{start} , while the temperature at which maximum expansion is reached is called T_{max} , both determined at a temperature increase rate of 20°C per minute. The thermally expandable microspheres used in the present invention suitably have a T_{start} of from about 20 to about 200°C, preferably from about 40 to about 180°C, most preferably from about 60 to about 150°C. The thermally expandable microspheres used in the present invention suitably have a T_{max} of from about 50 to about 300°C, preferably from about 100 to about 250°C, most preferably from about 140 to about 200°C.

The volume weighted average particle size of the thermally expandable microspheres, according to the invention, is suitably from about 1 to about 500 μm , preferably from about 3 to about 100 μm , most preferably from about 5 to about 50 μm . By heating to a temperature above T_{start} , it is normally possible to expand the microspheres from about 2 to about 7 times, preferably from about 4 to about 7 times, their diameter.

The density of the microspheres discharged is controlled by choosing a suitable heating temperature and/or length of time during which the microspheres are present in the expansion device. The temperature in the expansion device is suitably above T_{start} , preferably 5 to 150°C above T_{start} , most preferably 20 to 50°C above T_{start} . The average

residence time of the microspheres in the expansion device is from about 5 to about 200 s, preferably from about 10 to about 100 s, most preferably from about 30 to about 90 s.

Both wet and dry thermally expandable microspheres can be used in the method according to the invention. However, the method according to the invention is especially
5 suitable for thermally expandable microspheres having a low wet content. Suitably, the thermally expandable microspheres have a dry solids content of more than about 50 weight %, preferably more than about 80 weight %, most preferably more than about 97 weight %.

The rate of rotation of the feeding means is suitably from about 1 to about 100
10 r.p.m., preferably from about 5 to about 90 r.p.m., most preferably from about 40 to about 80 r.p.m.

The one or more scrapers are suitably mounted on the feeding means and suitably extend radially beyond the outer radius of the feeding means towards the inner surface of the hollow body. Furthermore, the one or more scrapers suitably extend
15 longitudinally in the feeding direction. The one or more scrapers are suitably mounted so that the scrapers, alone, or in combination, effect a scraping of from about 1 to about 100 % of the longitudinal length of the inner surface of the hollow body, preferably from about 10 to about 100 %, most preferably from about 20 to about 95 %. The scrapers can be of different individual length. For example, there may be a combination of one or more long
20 scrapers and one or more short scrapers. Preferably, one or two scrapers effecting a scraping of from about 70 to about 100 % of the longitudinal length of the inner surface of the hollow body is used together with 1 to 5, preferably 2 to 4, scrapers effecting a scraping of from about 10 to about 40 % of the longitudinal length of the inner surface of the hollow body. If too many long scrapers are used, there is a risk of clogging of
25 microspheres within the screw, especially if the screw pitch is low. Suitably, the length of the scrapers are adjusted to be the most suitable depending on other process parameters such as dimension of the expansion device, rate of rotation, microsphere type, filler content etc.

In some cases, for example at weight ratios of added filler to microspheres of
30 from about 1:100 to about 1:10, the scrapers effect a scraping of from about 20 to about 60 % of the longitudinal length of the inner surface of the hollow body. In other cases, for example at weight ratios of added filler to microspheres of from about 1:10 to about 1:3, the scrapers effect a scraping of from about 50 to about 100 % of the longitudinal length of the inner surface of the hollow body.

35 The number of scrapers mounted on the feeding means is suitably from 1 to 6, preferably from 2 to 4.

The scraping movement can be made at any part of the inner surface of the hollow body. Suitably, the one or more scrapers are mounted on the feeding means starting at the inlet side of the expansion device, i.e. where the unexpanded microspheres are added, and extending therefrom.

5 In a preferred embodiment of the present invention, the feeding means is in the form of a screw. The screw has suitably a pitch to diameter ratio of from about 0.05 to about 1.5, preferably from about 0.15 to about 0.5. The pitch of the screw is suitably lower at the beginning of the screw, i.e. near the inlet, than at the end of the screw. The pitch can be gradually increasing along the screw. Alternatively, the pitch can be
10 increasing in discrete steps, so that one portion of the screw has a different pitch than another portion of the screw.

In another preferred embodiment of the invention, the feeding means is in the form of one or more paddles, suitably protruding from a central core. The paddles are suitably arranged so that their projected angle (α) against the feeding direction is $0^\circ < \alpha < 90^\circ$, preferably from about 10° to about 60° .
15

By the method and an expansion device according to the invention, an easier way of expanding thermally expandable microspheres is provided requiring small equipment and reducing transport costs of expanded microspheres. The degree of expansion of the microspheres can also be more easily controlled than before.
20

Brief description of the drawings

Figure 1 shows an embodiment of the present invention wherein the feeding means is a screw. Figure 2 shows feeding means being of a screw-type, and figure 3 shows feeding means being of a paddle-type.
25

Detailed description of the drawings

Figure 1 shows an embodiment of the method where the unexpanded thermoplastic microspheres are pumped from a storage tank 1 into a silo 2 and filtered through a filter 3. Thereafter, the microspheres are being fed into a first screw feeder 4
30 and transported to an inlet 5 of an expansion device 6 comprising heating means 7, and a screw 8 with mounted scrapers 9. The inlet 5 is provided with a vibrator 10 and the screw is suitably connected to a motor 11. Expanded microspheres are suitably discharged through an outlet 12, provided with a vibrator 13, and suitably pumped away.

Figure 2 shows the screw 8 with a mounted scraper 9, and having the diameter d . One portion A of the screw has a pitch p_1 and another portion B of the screw has a different pitch p_2 .
35

Figure 3 shows an embodiment of the feeding means in the form of paddles 14 protruding from a central core 15. The paddles are provided with scrapers 16. Each paddle has an angle α against the feeding direction. Different paddles may have different angles α . The feeding means described in figure 3 can substitute the screw in figure 1.

5

The benefits of the present invention will now further be described in connection with the following examples which, however, should not be interpreted as limiting the scope of the invention.

10

Examples

Example 1:

An expansion device comprising a hollow body according to the present invention having a screw as feeding means is used for expanding thermoplastic expandable microspheres. The screw is 2200 mm long and its diameter 205 mm. The screw is divided into three sections of equal length each having a different screw pitch which is 40, 50 and 60 mm, starting at the inlet. The screw has 4 scrapers mounted of which one has a length corresponding to 90% of the length of the inner surface of the hollow body, and the three other scrapers each have a length corresponding to 25% of the same. The rotational speed of the screw is 54 r.p.m. Microspheres of the type Expancel® 461 DU having a volume weighted average particle size of 12 μm , having $T_{\text{start}} = 99^\circ\text{C}$ and $T_{\text{max}} = 140^\circ\text{C}$, is pre-mixed with hydrophobic silicon dioxide in a relation 85 parts by weight microspheres and 15 parts by weight silicon dioxide. Then the microsphere-mixture is charged into the expansion device. The residence time of the microspheres in the expansion device is 60 s.

14 kg/h of expanded microspheres of even density can be discharged. There is no significant agglomeration of microspheres in the screw.

Claims

1. A method of preparing expanded thermoplastic microspheres, comprising charging thermally expandable microspheres into an expansion device (6) comprising rotating feeding means (8) enveloped by a hollow body, and one or more scrapers (9) preventing layers of microspheres being built-up in the expansion device, transporting the microspheres through the expansion device while increasing the temperature of the microspheres to achieve expansion thereof, and discharging the microspheres.

2. An expansion device for preparing expanded thermoplastic microspheres comprising rotatable feeding means (8) enveloped by a hollow body, and one or more scrapers (9) positioned between the outer radius of the feeding means and the inner surface of the hollow body.

3. A method according to claim 1, wherein said one or more scrapers are positioned between the outer radius of the feeding means and the inner surface of the hollow body.

4. A method according to any one of the claims 1 or 3, or an expansion device according to claim 2, wherein said one or more scrapers are mounted on the feeding means and extend radially beyond the outer radius of the feeding means towards the inner surface of the hollow body.

5. A method according to any one of the claims 1 or 3-4, or an expansion device according to any one of the claims 2 or 4, wherein said one or more scrapers, alone, or in combination, effect a scraping of from about 20 to about 95 % of the longitudinal length of the inner surface of the hollow body.

6. A method according to any one of the claims 1 or 3-5, or an expansion device according to any one of the claims 2 or 4-5, wherein one or two scrapers effects a scraping of from about 70 to about 100 % of the longitudinal length of the inner surface of the hollow body and 2 to 4 scrapers effect a scraping of from about 10 to about 40 % of the longitudinal length of the inner surface of the hollow body.

7. A method according to any one of the claims 1 or 3-6, or an expansion device according to any one of the claims 2 or 4-6, wherein said one or more scrapers are mounted to the feeding means starting at the inlet side of the expansion device and extending therefrom.

8. A method according to any one of the claims 1 or 3-7, or an expansion device according to any one of the claims 2 or 4-7, wherein said one or more scrapers, or a surface layer of said one or more scrapers, are/is made of a fluoroplastic material.

9. A method according to any one of the claims 1 or 3-8, or an expansion device according to any one of the claims 2 or 4-8, wherein the hollow body is provided with one or more heaters (7).

10. A method according to any one of the claims 1 or 3-9, or an expansion device according to any one of the claims 2 or 4-9, wherein the feeding means is provided with one or more heaters (7).

11. A method according to any one of the claims 1 or 3-10, wherein the
5 thermally expandable microspheres are pre-mixed, before entering the expansion device (6), with a filler preventing agglomeration of the microspheres.

12. A method according to claim 11, wherein the filler is silicon dioxide.


13. A method according to any one of the claims 11-12, wherein the weight ratio added filler to microspheres is from about 1:100 to about 1:3.

10 14. A method according to any one of the claims 1 or 3-13, wherein the thermally expandable microspheres have a dry solids content of more than about 97 weight %.

15 15. A method according to any one of the claims 1 or 3-14, or an expansion device according to any one of the claims 2 or 4-10, wherein the feeding means is in the form of a screw (8).

16. A method according to any one of the claims 1 or 3-14, or an expansion device according to any one of the claims 2 or 4-10, wherein the feeding means is in the form of one or more paddles (14) protruding from a central core (15).




1/2

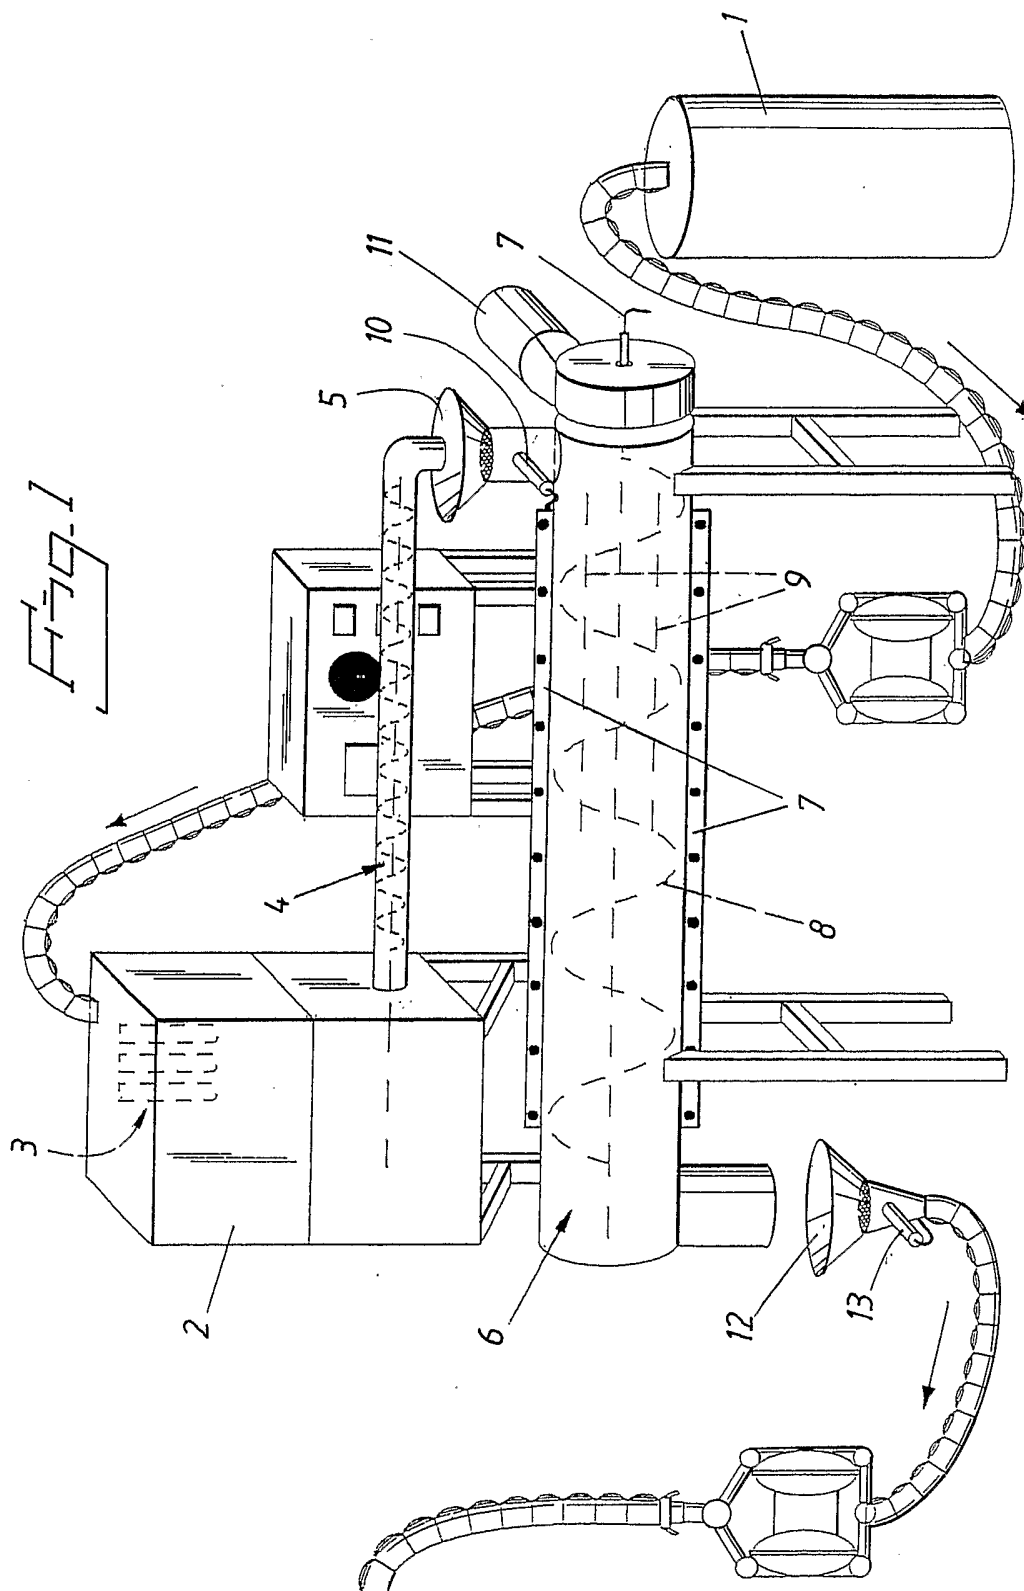

SUBSTITUTE SHEET (RULE 26)

2/2

Fig. 2

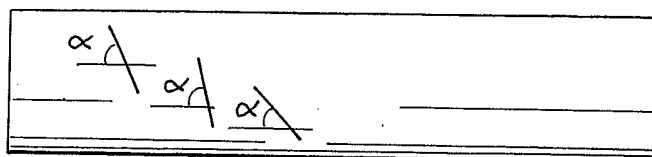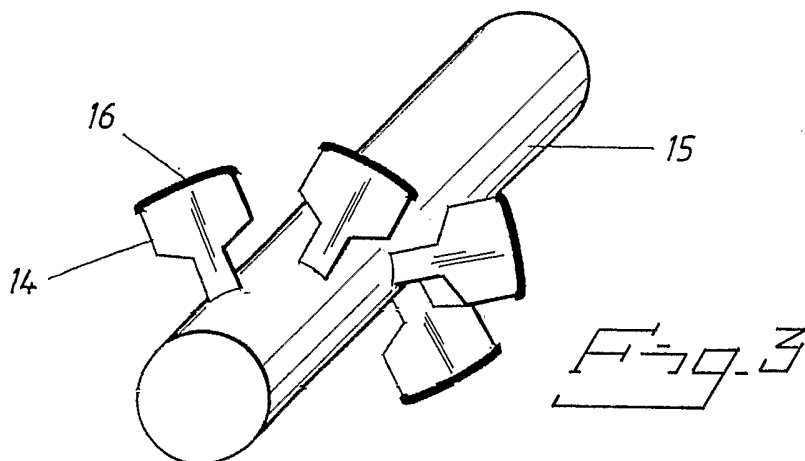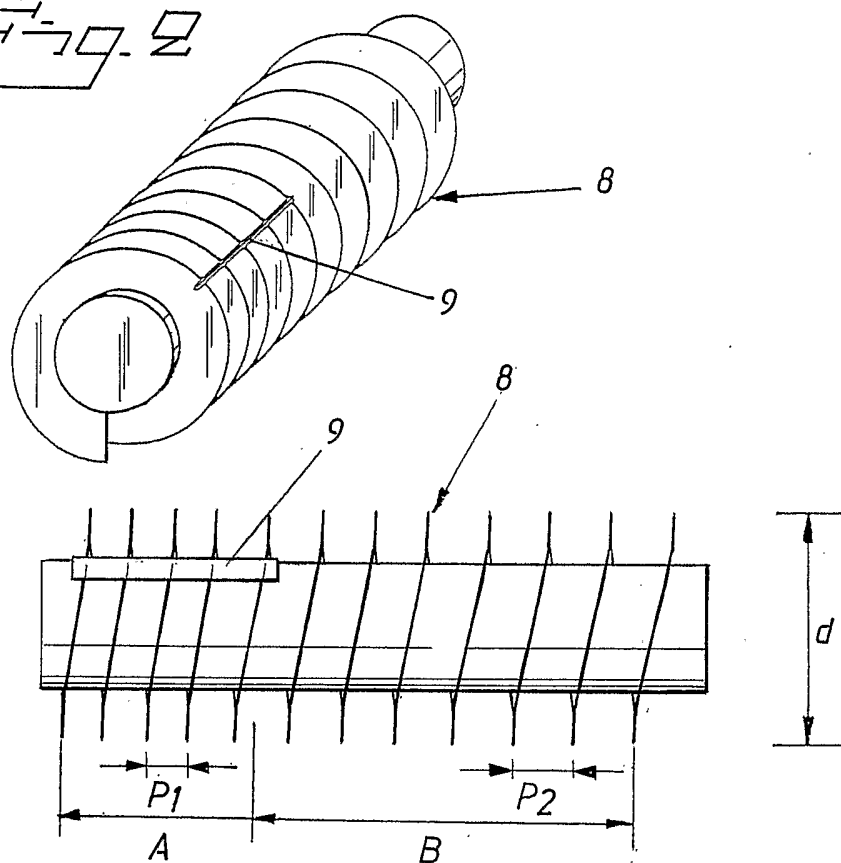

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 03/02043

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B29C44/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92/20465 A (PIERCE & STEVENS CORP) 26 November 1992 (1992-11-26) page 20 - page 21	1,3,11, 16
X	US 4 379 106 A (BUSSEY JR HARRY) 5 April 1983 (1983-04-05) column 4 - column 5; figures	2,4,5,7
A	US 3 804 378 A (JONES P ET AL) 16 April 1974 (1974-04-16) figure 3	9,10,15
	----- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 March 2004

Date of mailing of the international search report

29/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pipping, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 03/02043

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE WPI Section Ch, Week 198932 Derwent Publications Ltd., London, GB; Class A32, AN 1989-232728 XP002239101 & SE 8 703 979 A (CASCO NOBEL AB) 14 April 1989 (1989-04-14) abstract	1,11,13
A	PATENT ABSTRACTS OF JAPAN vol. 005, no. 006 (M-050), 16 January 1981 (1981-01-16) & JP 55 137928 A (KANEGAFUCHI CHEM IND CO LTD), 28 October 1980 (1980-10-28) abstract	1,2
A	US 5 228 775 A (HORN DARRELL C ET AL) 20 July 1993 (1993-07-20) column 8, line 24 - line 30; figures 8,9	2-8
A	US 3 808 701 A (BACHMANN R) 7 May 1974 (1974-05-07) figures	2-7
A	FR 2 699 089 A (FLURIAL SA) 17 June 1994 (1994-06-17) page 4, paragraph 2; figures	2-7

INTERNATIONAL SEARCH REPORT

Initial Application No
PCT/SE 03/02043

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9220465	A	26-11-1992	AU 658430 B2 AU 2142192 A CA 2109728 A1 EP 0586541 A1 JP 6509125 T JP 3140463 B2 KR 216886 B1 WO 9220465 A1 US 5580656 A	13-04-1995 30-12-1992 26-11-1992 16-03-1994 13-10-1994 05-03-2001 01-09-1999 26-11-1992 03-12-1996
US 4379106	A	05-04-1983	NONE	
US 3804378	A	16-04-1974	NONE	
SE 8703979	A	14-04-1989	NONE	
JP 55137928	A	28-10-1980	NONE	
US 5228775	A	20-07-1993	US 4941132 A DE 69013500 D1 DE 69013500 T2 DK 471035 T3 EP 0471035 A1 ES 2065533 T3 JP 4506624 T NO 914296 A WO 9013358 A1	10-07-1990 24-11-1994 23-02-1995 03-04-1995 19-02-1992 16-02-1995 19-11-1992 06-01-1992 15-11-1990
US 3808701	A	07-05-1974	CH 535413 A AT 335362 B AT 509472 A AU 475024 B2 AU 4398472 A BE 785439 A1 DD 97743 A5 DE 2228682 A1 FR 2144282 A5 GB 1401195 A IT 959902 B JP 55029352 B NL 7209039 A ,B, PL 84860 B1 SE 392962 B	31-03-1973 10-03-1977 15-06-1976 12-08-1976 03-01-1974 16-10-1972 12-05-1973 18-01-1973 09-02-1973 16-07-1975 10-11-1973 02-08-1980 03-01-1973 30-04-1976 25-04-1977
FR 2699089	A	17-06-1994	FR 2699089 A1 WO 9413383 A1	17-06-1994 23-06-1994