



US00D554282S

(12) **United States Design Patent**
Flaherty et al.

(10) **Patent No.:** **US D554,282 S**

(45) **Date of Patent:** **** Oct. 30, 2007**

(54) **LIGHTED POST**

(75) Inventors: **Richard A Flaherty**, Grapeview, WA (US); **Christopher R Martinez**, Mukilteo, WA (US); **Matthew A Gray**, Bremerton, WA (US)

(73) Assignee: **Leader Manufacturing, Inc.**, Port Orchard, WA (US)

(**) Term: **14 Years**

(21) Appl. No.: **29/221,965**

(22) Filed: **Jan. 24, 2005**

(51) **LOC (8) Cl.** **26-05**

(52) **U.S. Cl.** **D26/68**

(58) **Field of Classification Search** D26/67, D26/68, 70, 71, 72, 85, 87, 91, 92, 128; 362/145, 362/153, 153.1, 157, 183, 190, 191, 266, 362/362, 431, 812; D25/126
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

| | | | | |
|--------------|------|---------|-----------------|-----------|
| 3,257,496 | A * | 6/1966 | Hamilton | 174/38 |
| D235,797 | S * | 7/1975 | Friedberg | D26/68 |
| D372,320 | S * | 7/1996 | Brady | D26/68 |
| D373,000 | S * | 8/1996 | Brady | D26/68 |
| D425,646 | S * | 5/2000 | Giese et al. | D26/68 |
| D453,583 | S * | 2/2002 | Shimada | D26/67 |
| 2005/0231938 | A1 * | 10/2005 | Venegas, Jr. | 362/153.1 |
| 2006/0109667 | A1 * | 5/2006 | Flaherty et al. | 362/431 |
| 2007/0008717 | A1 * | 1/2007 | Flaherty | 362/153 |

OTHER PUBLICATIONS

All "Unlit Bollard Styles" at webpage link to unlit bollard styles at Kingluminaire.com.*

All "Bollards" webpage link to landscape bollards at sitespecifier.com. Found online at sitespecifier.com on May 18, 2007.*

* cited by examiner

Primary Examiner—Clare E Heflin

(74) *Attorney, Agent, or Firm*—Van Dyke, Gardner, Linn & Burkhart, LLP

(57) **CLAIM**

The ornamental design for a lighted post, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 2 is a front elevation view of the lighted post of FIG. 1;

FIG. 3 is a top plan view of the lighted post of FIG. 2;

FIG. 4 is a bottom plan view of the lighted post of FIG. 2;

FIG. 5 is a left side elevation view of lighted post of FIG. 2;

FIG. 6 is a right side elevation view of the lighted post of FIG. 2;

FIG. 7 is a rear elevation view of the lighted post of FIG. 2;

FIG. 8 is a perspective view of the another embodiment of the lighted post of the present invention;

FIG. 9 is a front elevation view of the lighted post of FIG. 8;

FIG. 10 is a top plan view of the lighted post of FIG. 9;

FIG. 11 is bottom plan view of the lighted post of FIG. 9;

FIG. 12 is a left side elevation view of the lighted post of FIG. 9;

FIG. 13 is a right side elevation view of the lighted post of FIG. 9;

FIG. 14 is a rear elevation view of the lighted post of FIG. 9;

FIG. 15 is a perspective view of the another embodiment of the lighted post of the present invention;

FIG. 16 is a front elevation view of the lighted post of FIG. 15;

FIG. 17 is a top plan view of the lighted post of FIG. 16;

FIG. 18 is bottom plan view of the lighted post of FIG. 16;

FIG. 19 is a left side elevation view of the lighted post of FIG. 16;

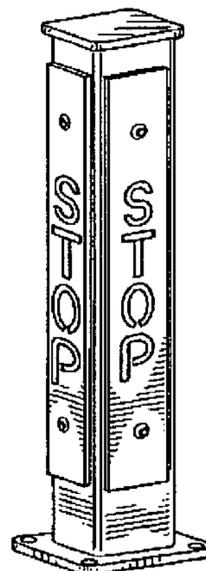
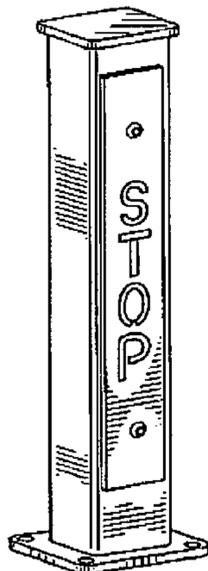


FIG. 20 is a right side elevation view of the lighted post of FIG. 16;

FIG. 21 is a rear elevation view of the lighted post of FIG. 16;

FIG. 22 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 23 is a front elevation view of the lighted post of FIG. 22;

FIG. 24 is a top plan view of the lighted post of FIG. 23;

FIG. 25 is a bottom plan view of the lighted post of FIG. 23;

FIG. 26 is a left side elevation view of the lighted post of FIG. 23;

FIG. 27 is a right side elevation view of the lighted post of FIG. 23;

FIG. 28 is a rear elevation view of the lighted post of FIG. 23;

FIG. 29 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 30 is a front elevation view of the lighted post of FIG. 29;

FIG. 31 is a top plan view of the lighted post of FIG. 30;

FIG. 32 is a bottom plan view of the lighted post of FIG. 30;

FIG. 33 is a left side elevation view of the lighted post of FIG. 30;

FIG. 34 is a right side elevation view of the lighted post of FIG. 30;

FIG. 35 is a rear elevation view of the lighted post of FIG. 30;

FIG. 36 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 37 is a front elevation view of the lighted post of FIG. 36;

FIG. 38 is a top plan view of the lighted post of FIG. 37;

FIG. 39 is a bottom plan view of the lighted post of FIG. 37;

FIG. 40 is a left side elevation view of the lighted post of FIG. 37;

FIG. 41 is a right side elevation view of the lighted post of FIG. 37;

FIG. 42 is a rear elevation view of the lighted post of FIG. 37;

FIG. 43 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 44 is a front elevation view of the lighted post of FIG. 43;

FIG. 45 is a top plan view of the lighted post of FIG. 44;

FIG. 46 is a bottom plan view of the lighted post of FIG. 44;

FIG. 47 is a left side elevation view of the lighted post of FIG. 44;

FIG. 48 is a right side elevation view of the lighted post of FIG. 44;

FIG. 49 is a rear elevation view of the lighted post of FIG. 44;

FIG. 50 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 51 is a front elevation view of the lighted post of FIG. 50;

FIG. 52 is a top plan view of the lighted post of FIG. 51;

FIG. 53 is a bottom plan view of the lighted post of FIG. 51;

FIG. 54 is a left side elevation view of the lighted post of FIG. 51;

FIG. 55 is a right side elevation view of the lighted post of FIG. 51;

FIG. 56 is a rear elevation view of the lighted post of FIG. 51;

FIG. 57 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 58 is a front elevation view of the lighted post of FIG. 57;

FIG. 59 is a top plan view of the lighted post of FIG. 58;

FIG. 60 is a bottom plan view of the lighted post of FIG. 58;

FIG. 61 is a left side elevation view of the lighted post of FIG. 58;

FIG. 62 is a right side elevation view of the lighted post of FIG. 58;

FIG. 63 is a rear elevation view of the lighted post of FIG. 58;

FIG. 64 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 65 is a front elevation view of the lighted post of FIG. 64;

FIG. 66 is a top plan view of the lighted post of FIG. 65;

FIG. 67 is a bottom plan view of the lighted post of FIG. 65;

FIG. 68 is a left side elevation view of the lighted post of FIG. 65;

FIG. 69 is a right side elevation view of the lighted post of FIG. 65;

FIG. 70 is a rear elevation view of the lighted post of FIG. 65;

FIG. 71 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 72 is a front elevation view of the lighted post of FIG. 71;

FIG. 73 is a top plan view of the lighted post of FIG. 72;

FIG. 74 is a bottom plan view of the lighted post of FIG. 72;

FIG. 75 is a left side elevation view of the lighted post of FIG. 72;

FIG. 76 is a right side elevation view of the lighted post of FIG. 72;

FIG. 77 is a rear elevation view of the lighted post of FIG. 72;

FIG. 78 is a perspective view of another embodiment of the lighted post of the present invention;

FIG. 79 is a front elevation view of the lighted post of FIG. 78;

FIG. 80 is a top plan view of the lighted post of FIG. 79;

FIG. 81 is a bottom plan view of the lighted post of FIG. 79;

FIG. 82 is a left side elevation view of the lighted post of FIG. 79;

FIG. 83 is a right side elevation view of the lighted post of FIG. 79; and,

FIG. 84 is a rear elevation view of the lighted post of FIG. 79.

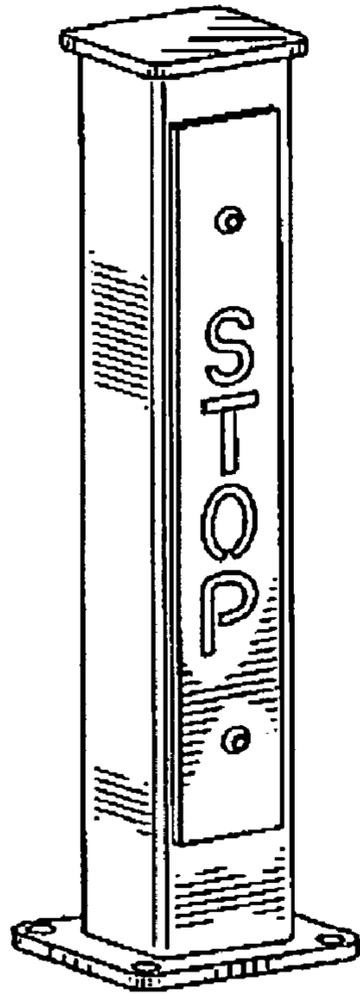


FIG. 1

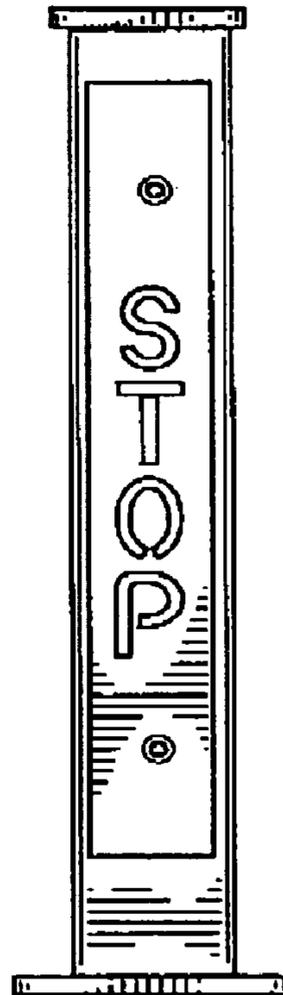


FIG. 2

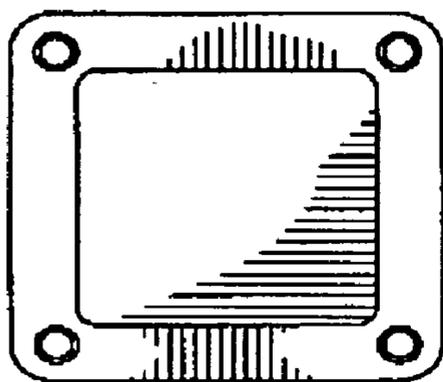


FIG. 3

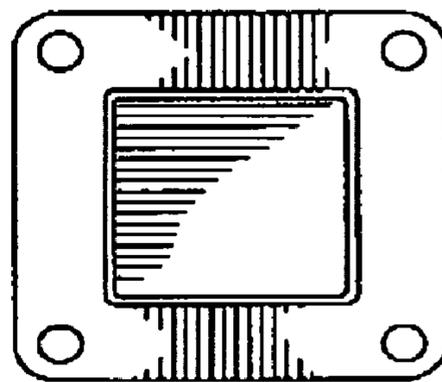


FIG. 4

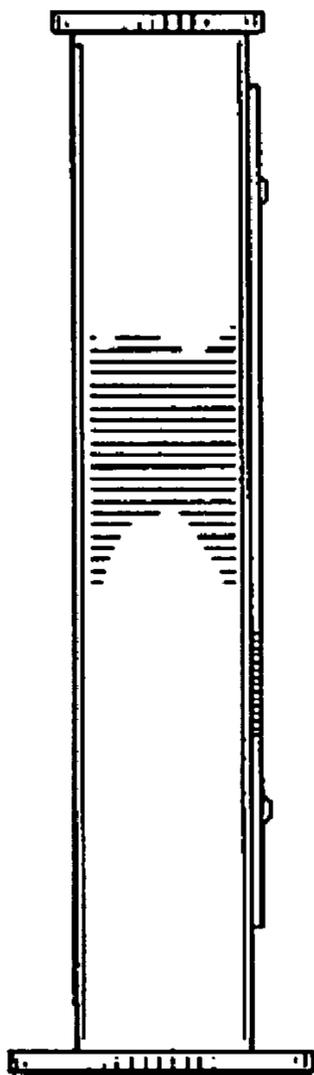


FIG. 5

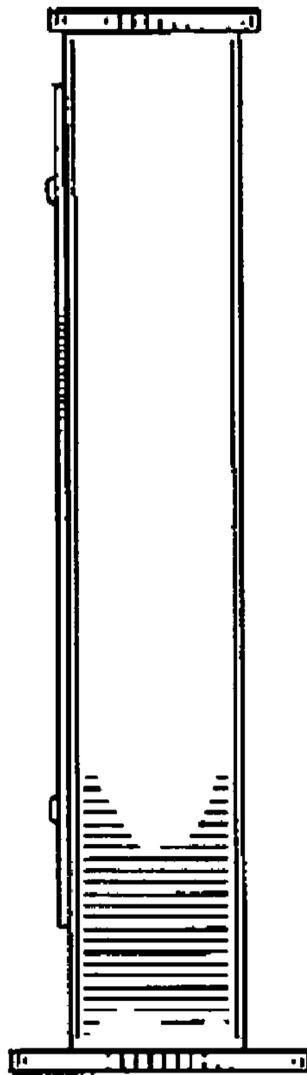


FIG. 6

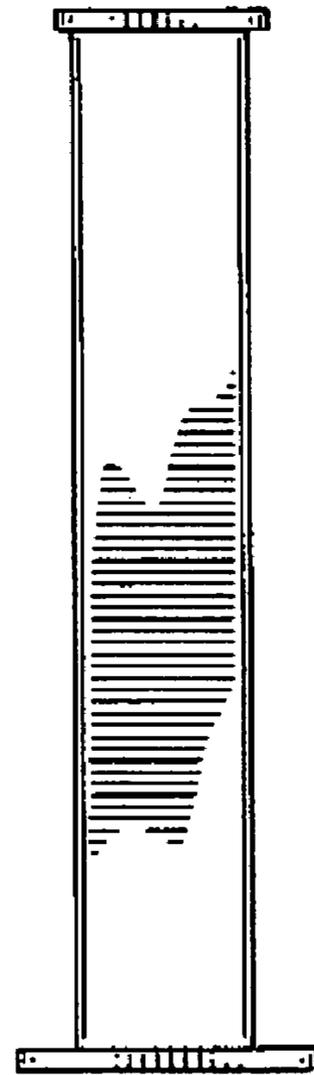


FIG. 7

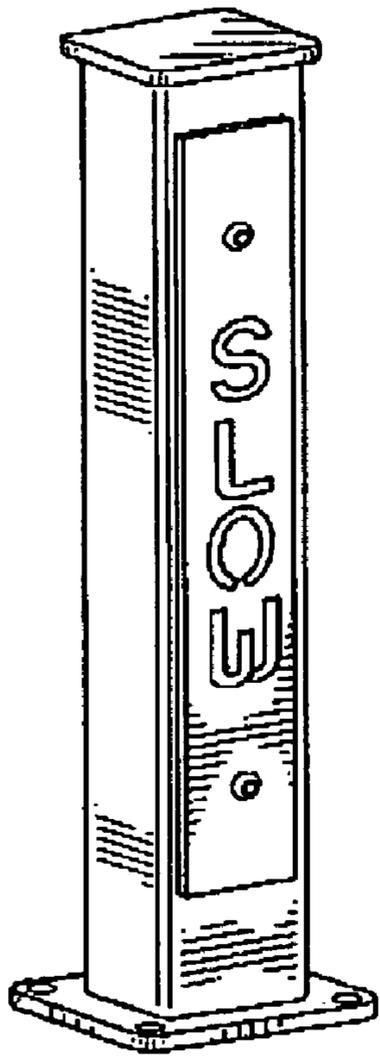


FIG. 8

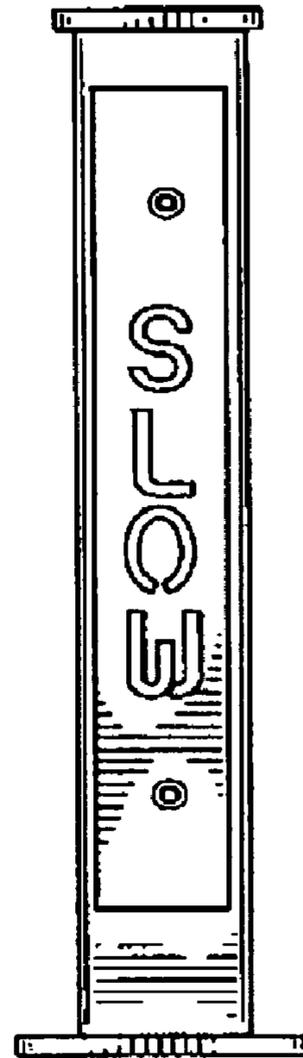


FIG. 9

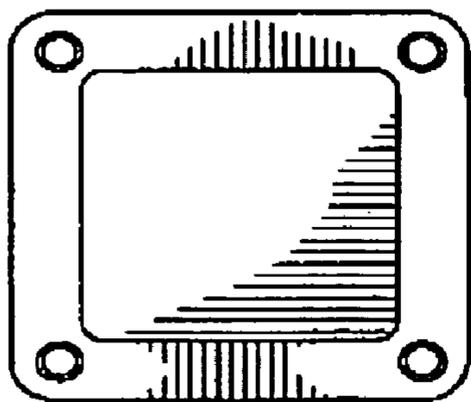


FIG. 10

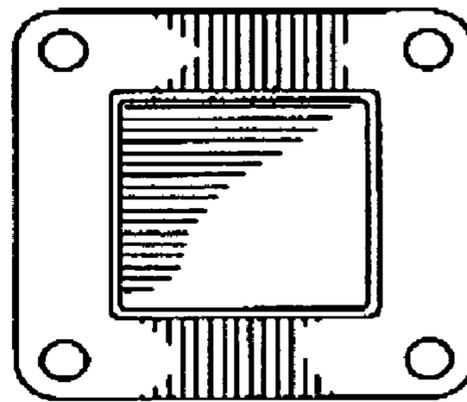


FIG. 11

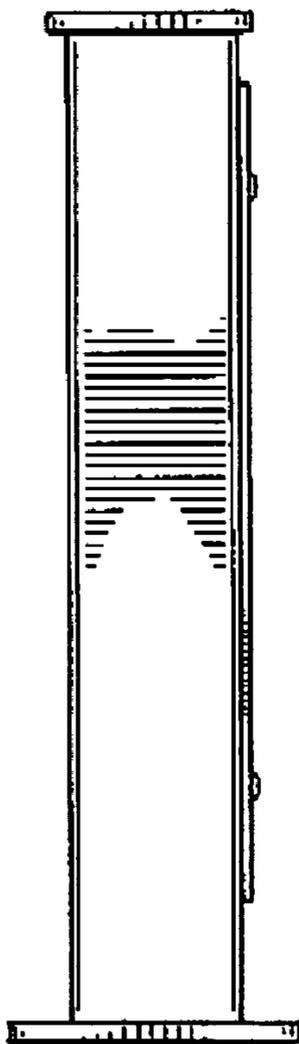


FIG. 12

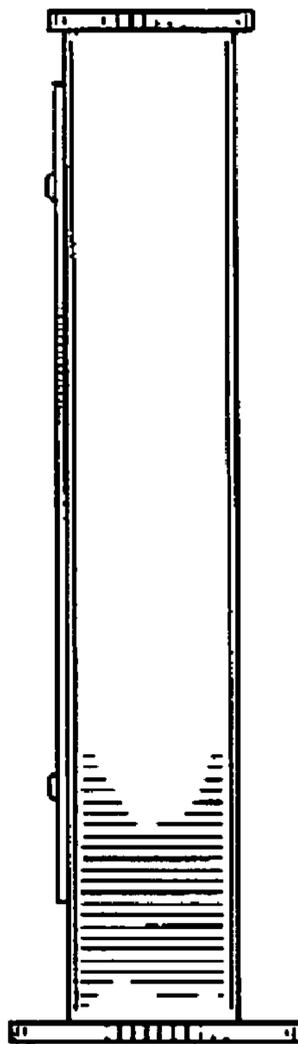


FIG. 13

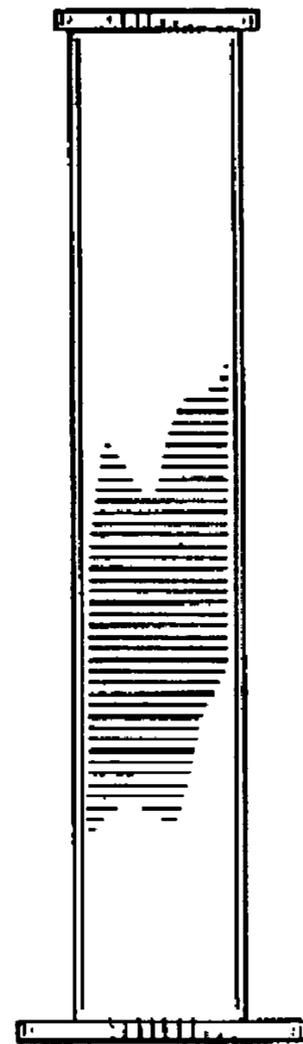


FIG. 14

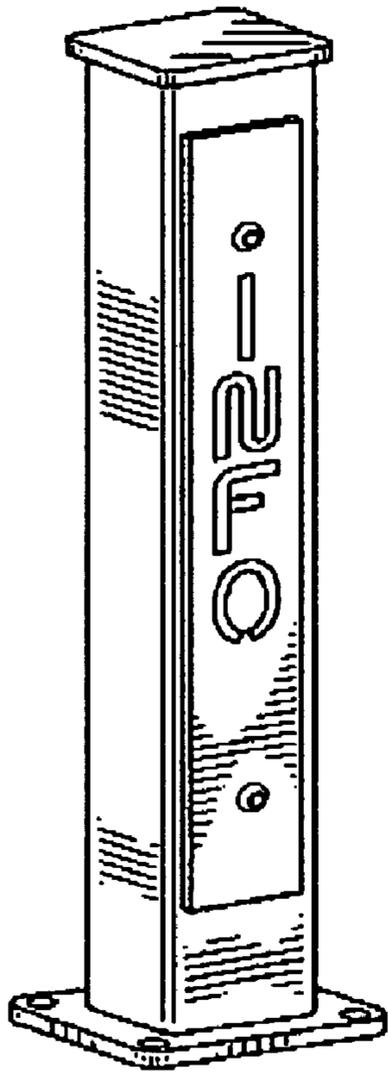


FIG. 15

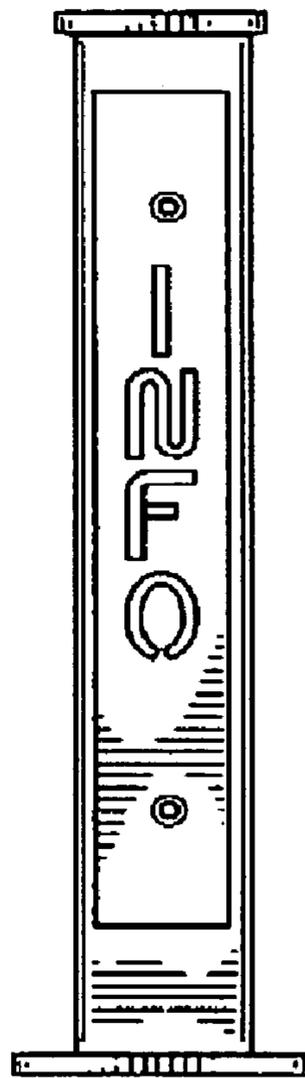


FIG. 16

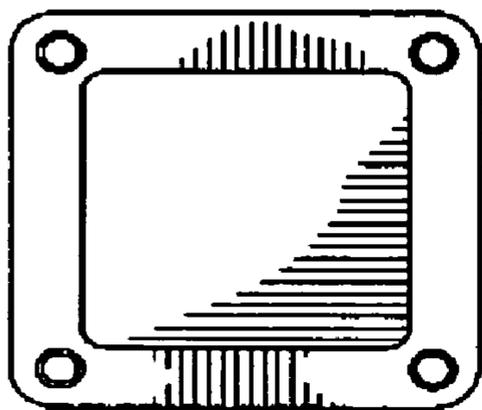


FIG. 17

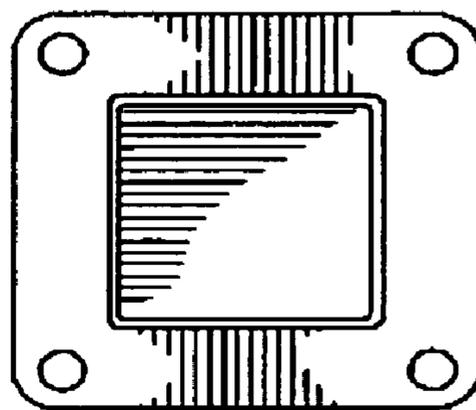


FIG. 18

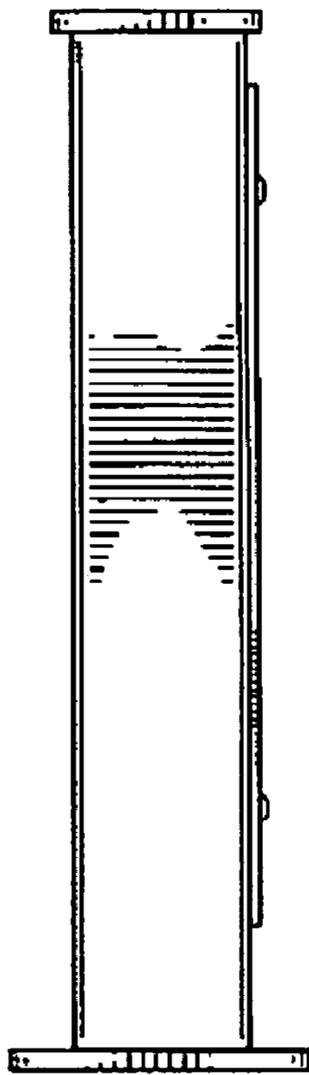


FIG. 19

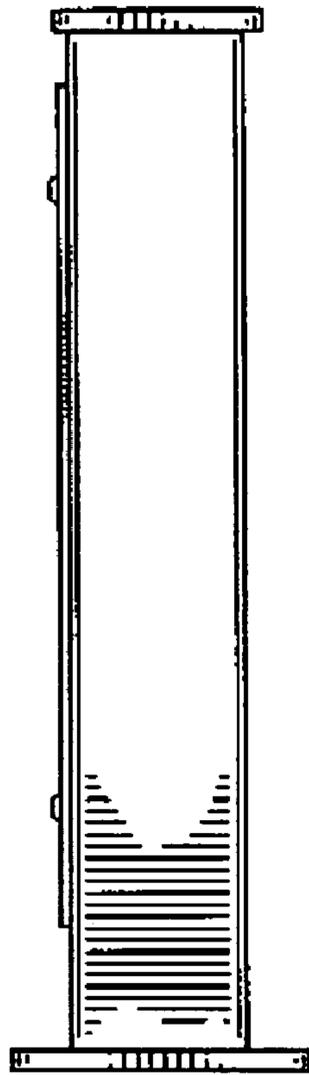


FIG. 20

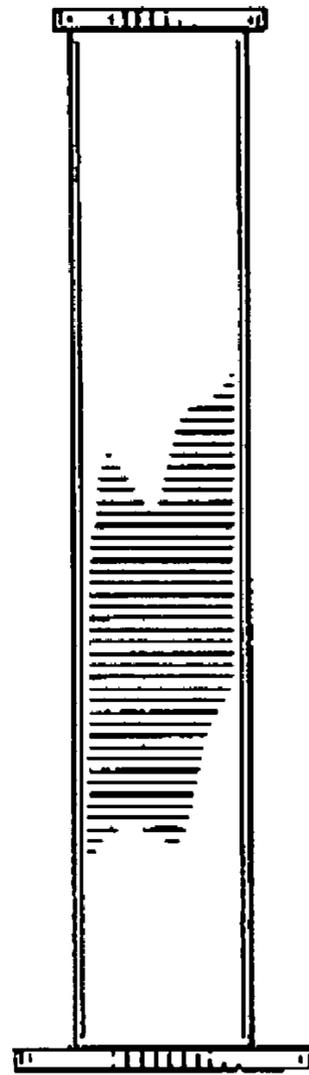


FIG. 21

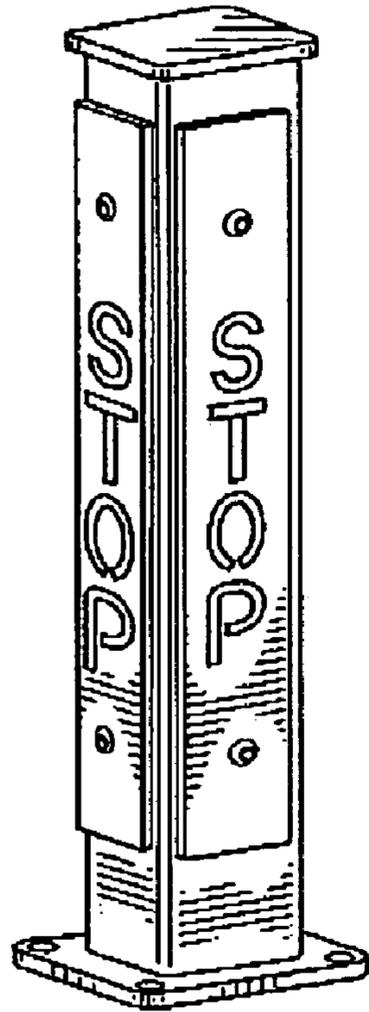


FIG. 22

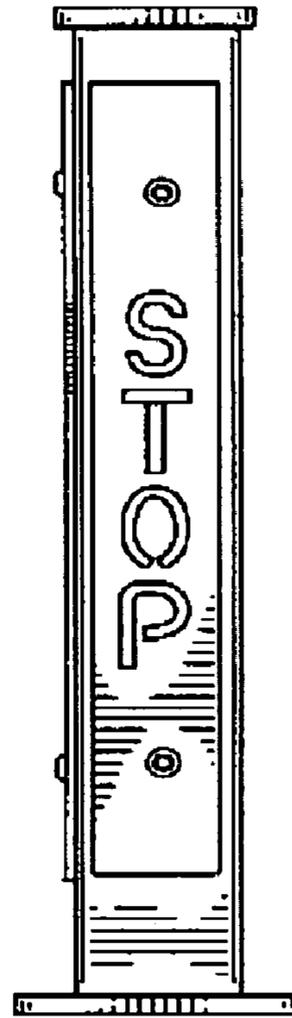


FIG. 23

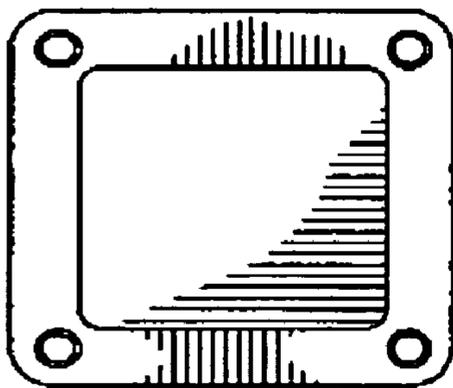


FIG. 24

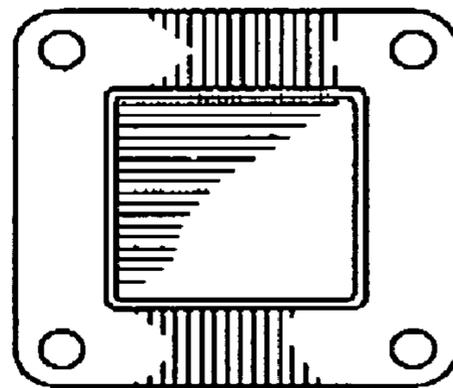


FIG. 25

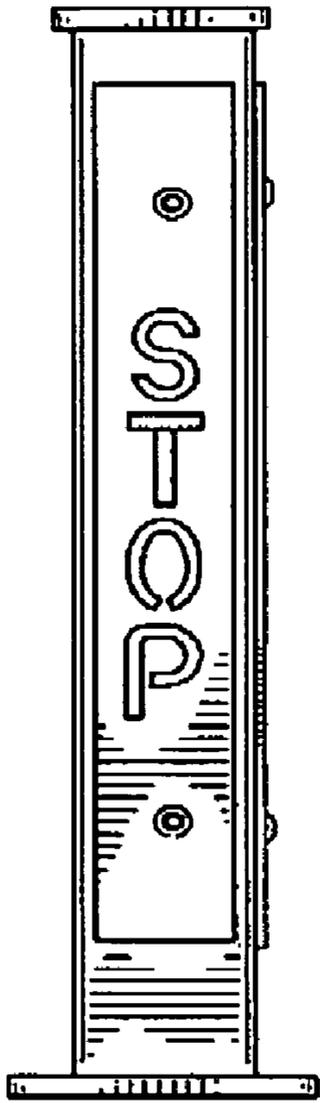


FIG. 26

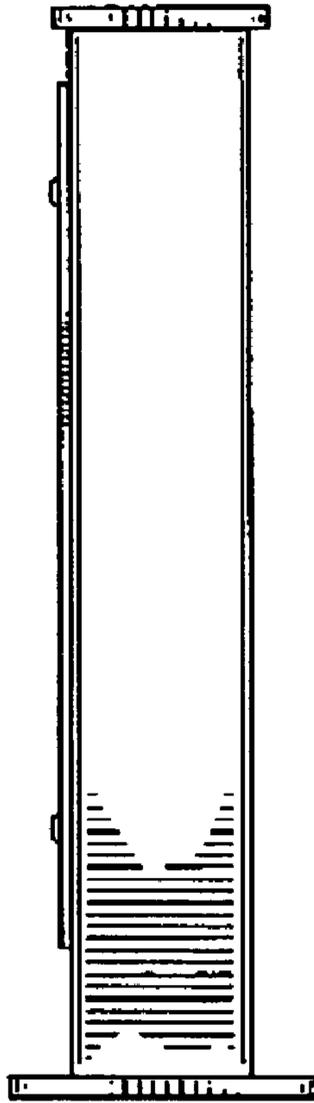


FIG. 27

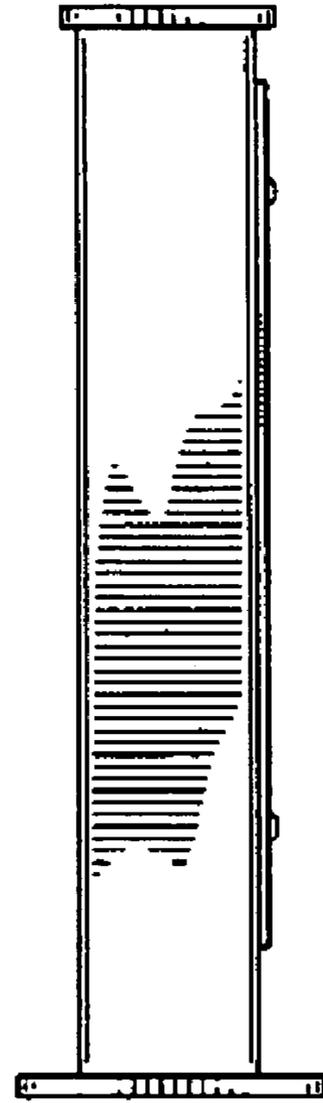


FIG. 28

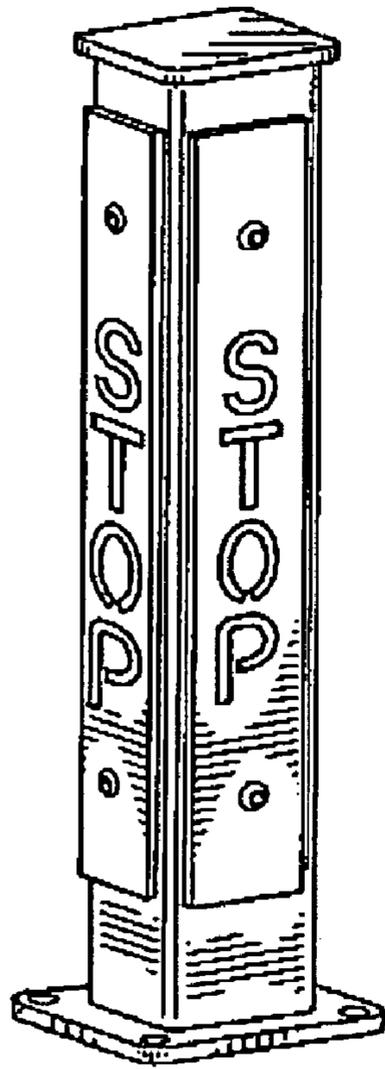


FIG. 29

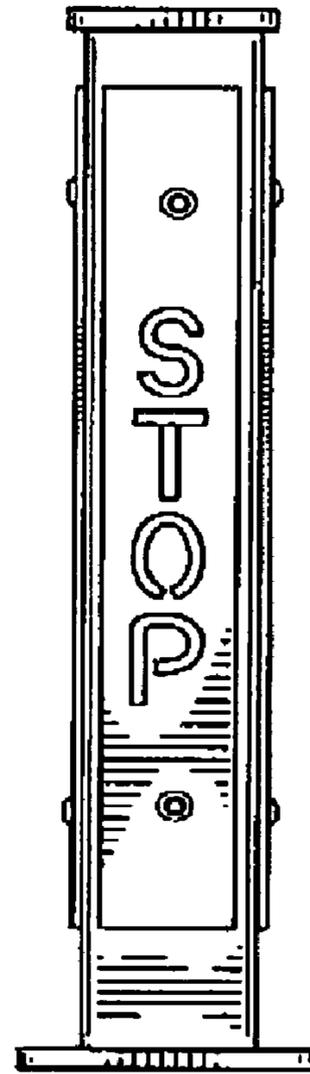


FIG. 30

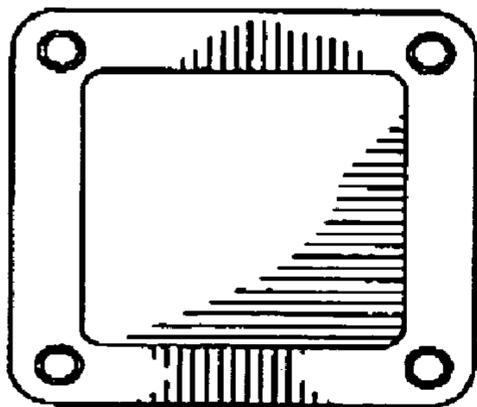


FIG. 31

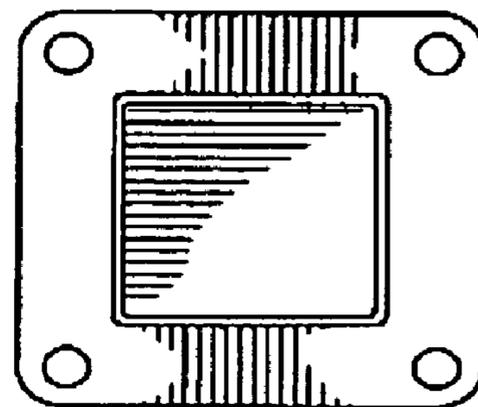


FIG. 32

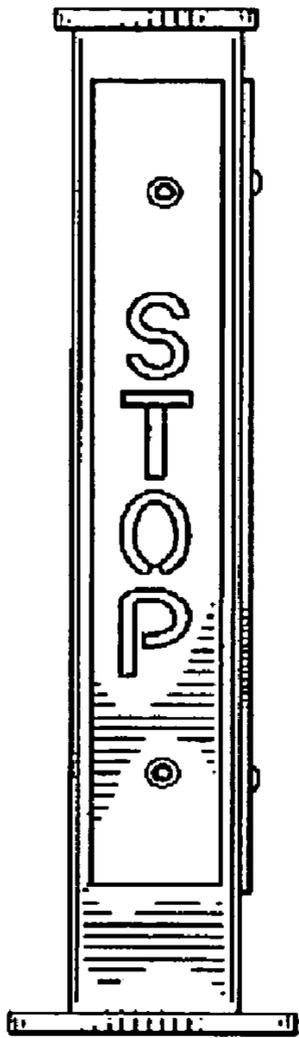


FIG. 33

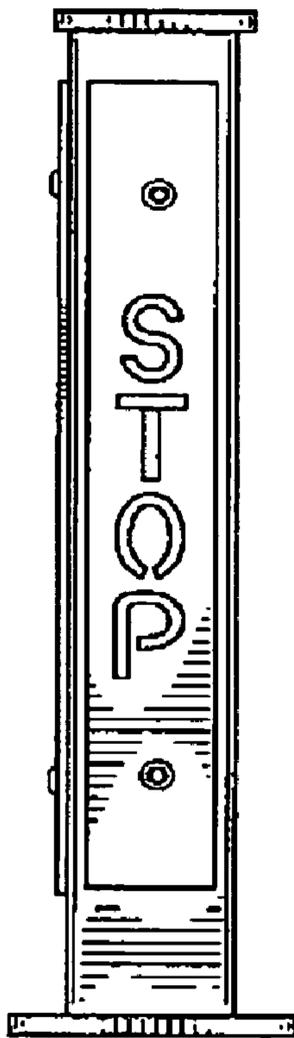


FIG. 34

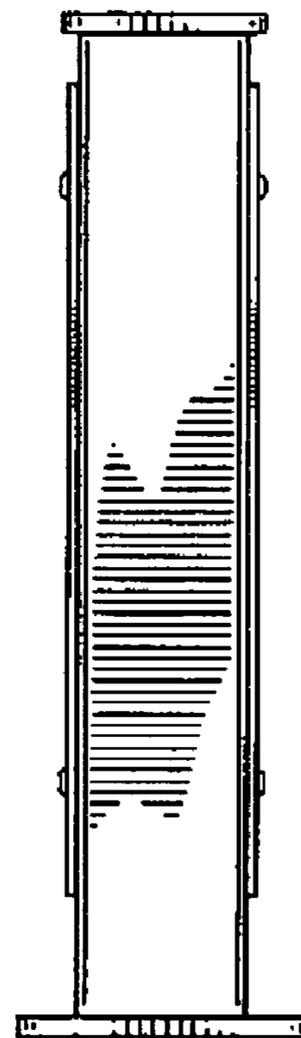


FIG. 35

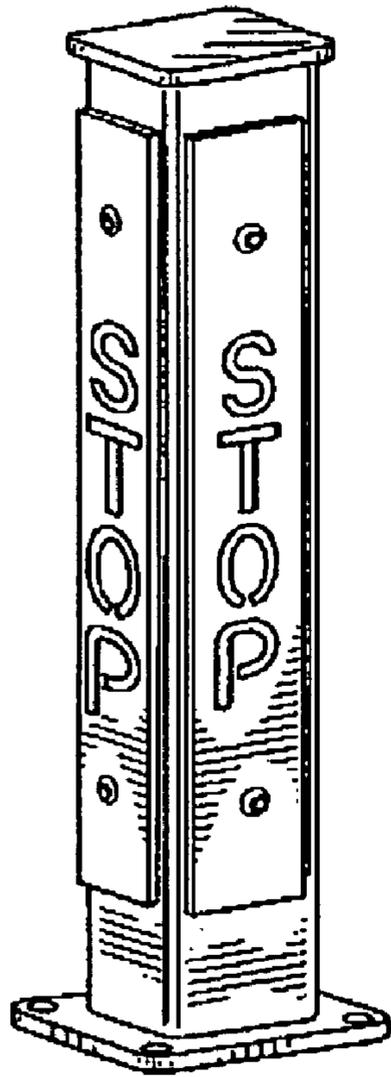


FIG. 36

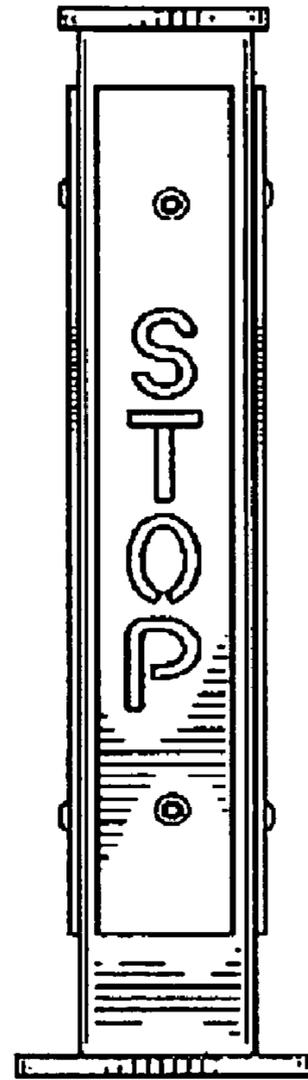


FIG. 37

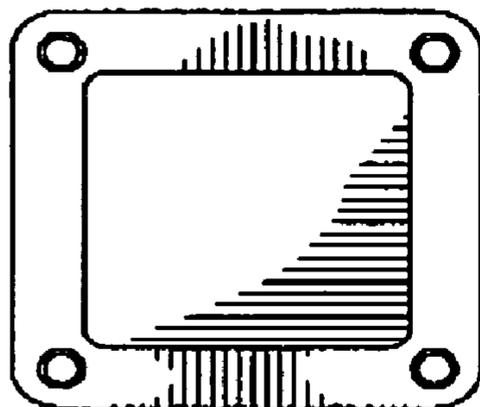


FIG. 38

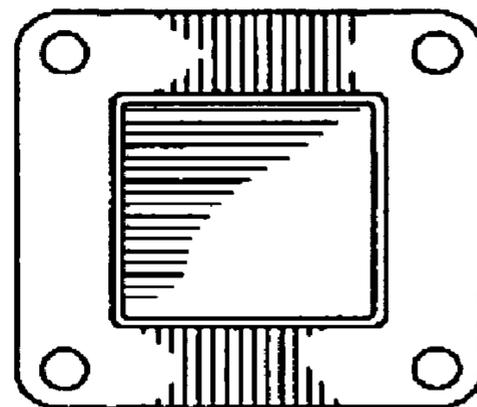


FIG. 39

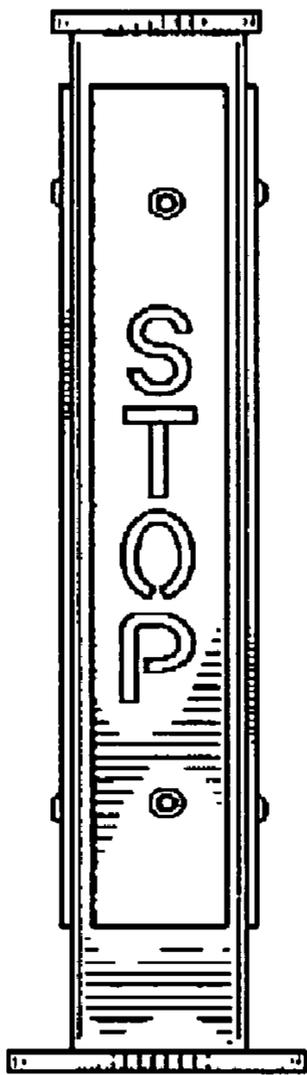


FIG. 40

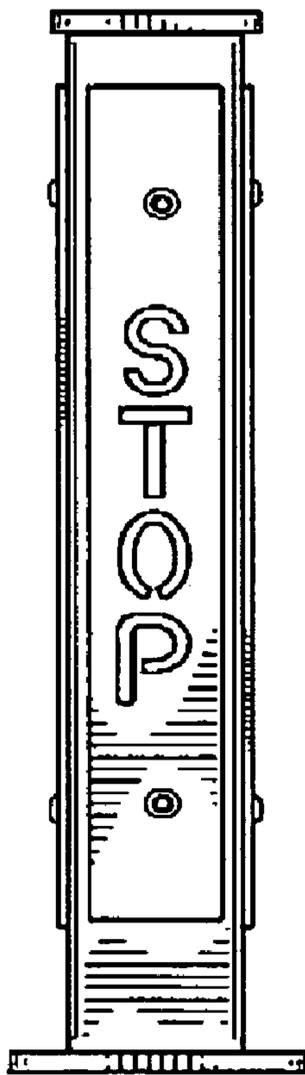


FIG. 41

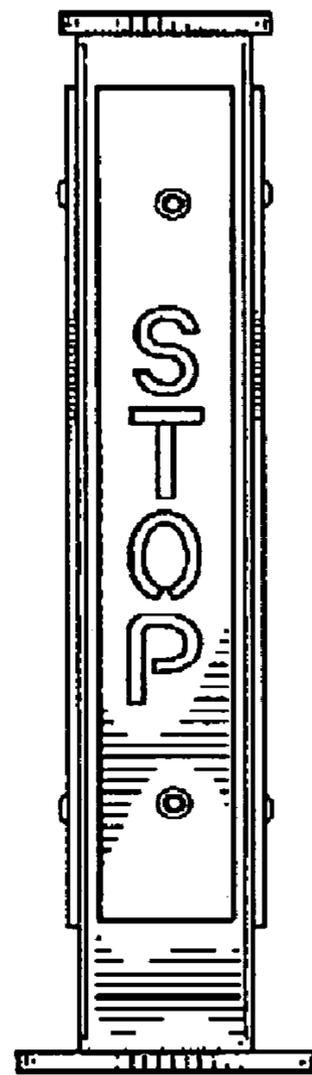


FIG. 42

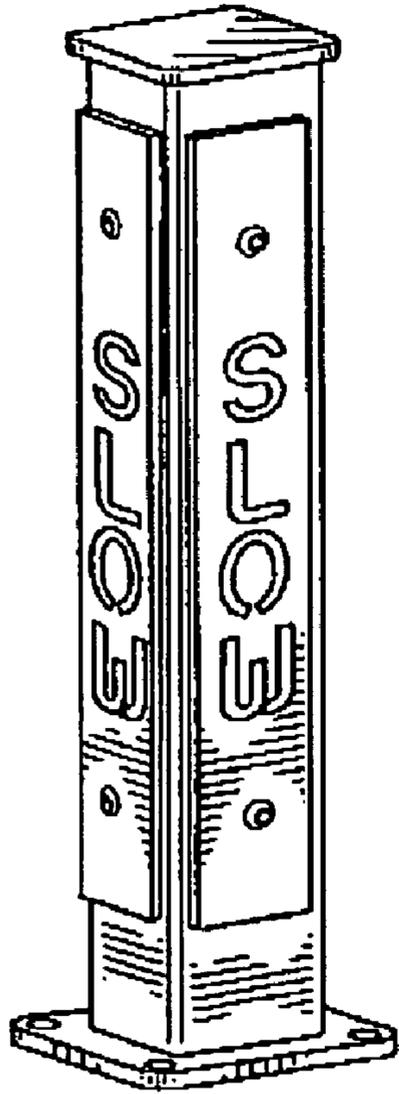


FIG. 43

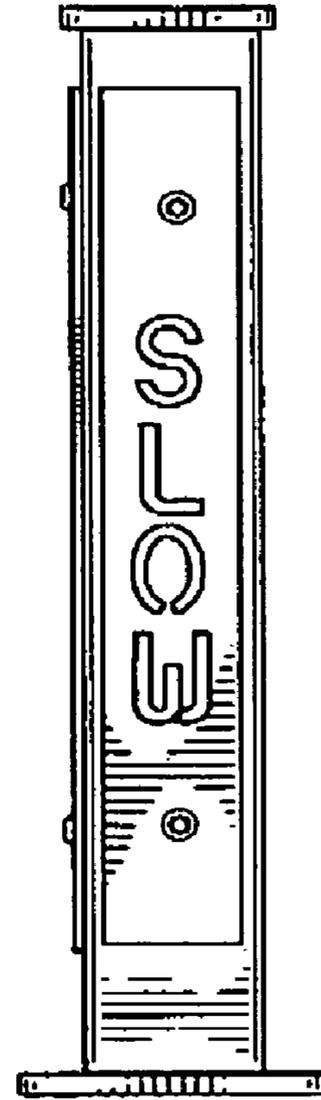


FIG. 44

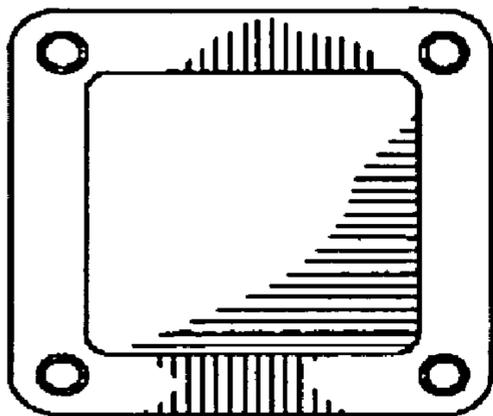


FIG. 45

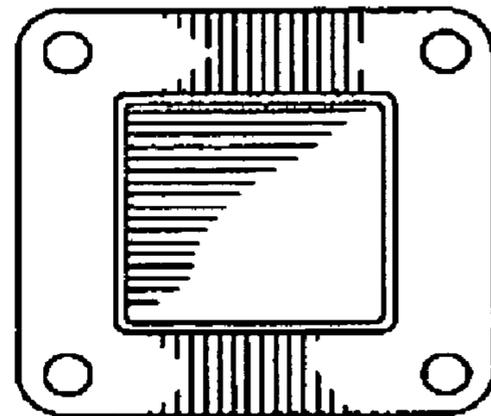


FIG. 46

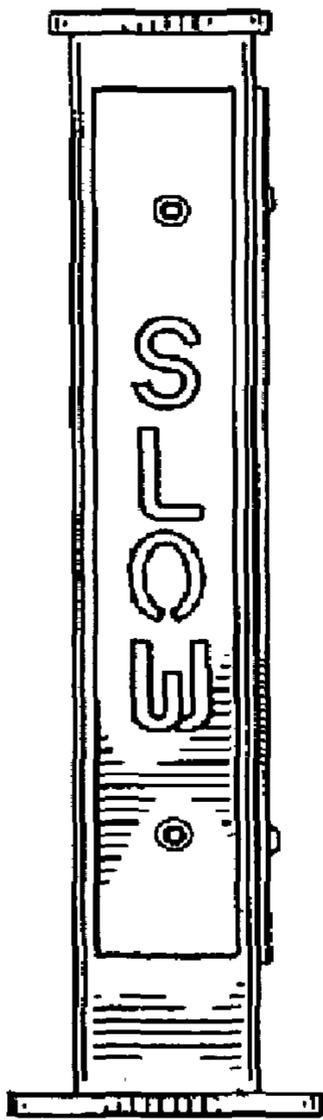


FIG. 47

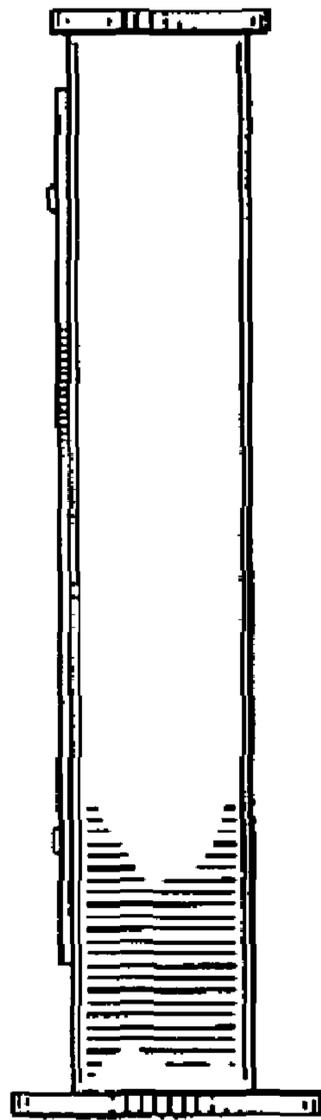


FIG. 48

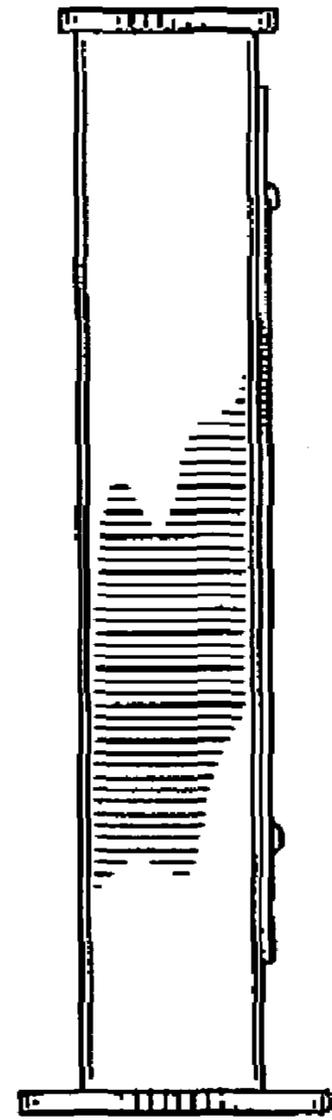


FIG. 49

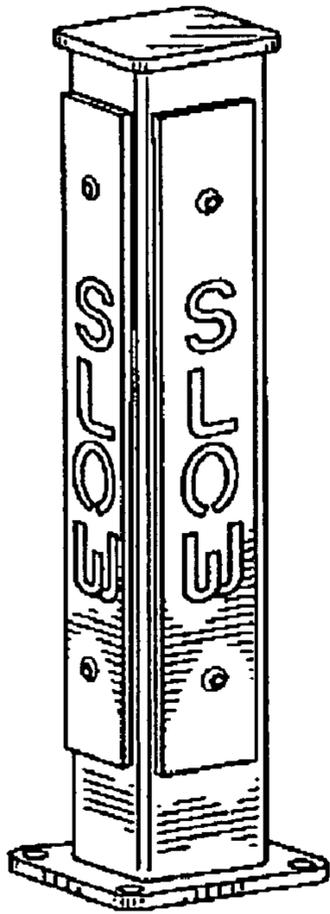


FIG. 50

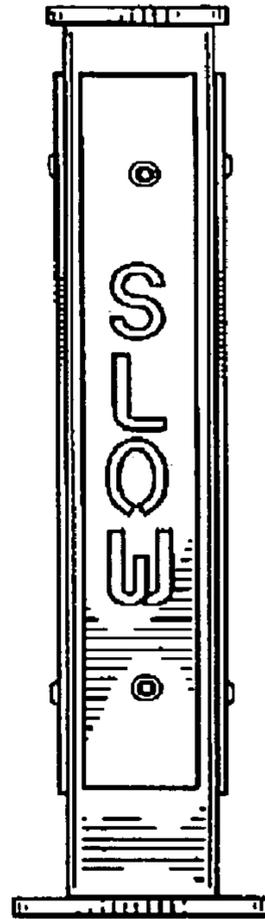


FIG. 51

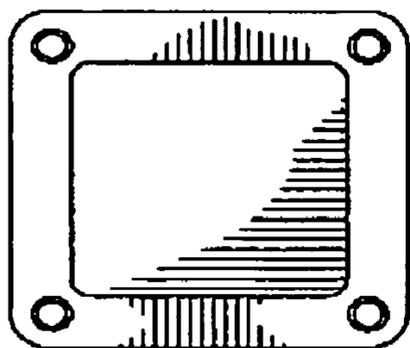


FIG. 52

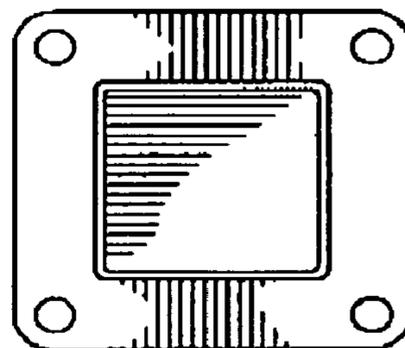


FIG. 53

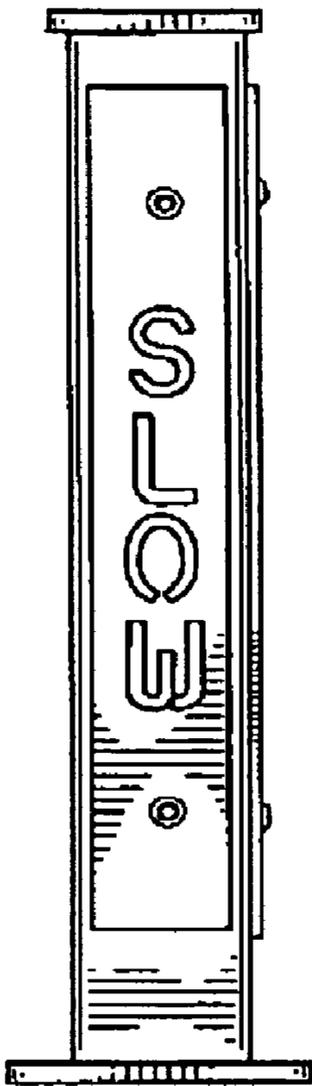


FIG. 54

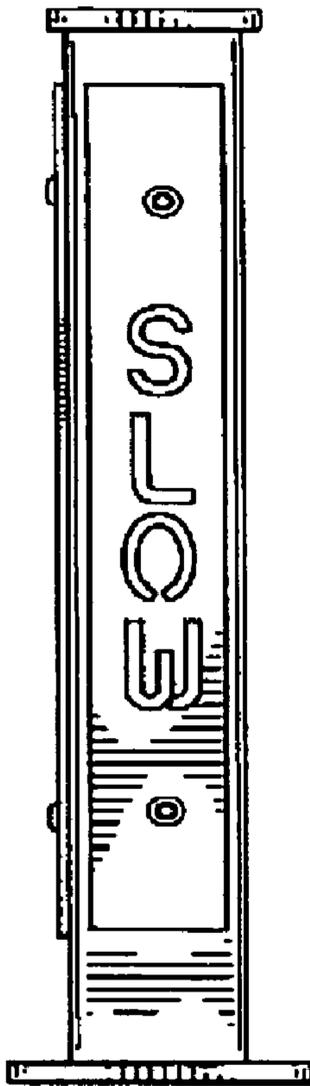


FIG. 55

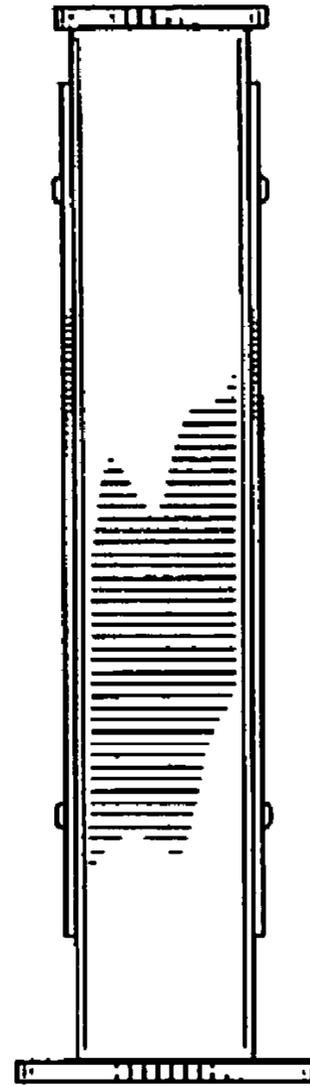


FIG. 56

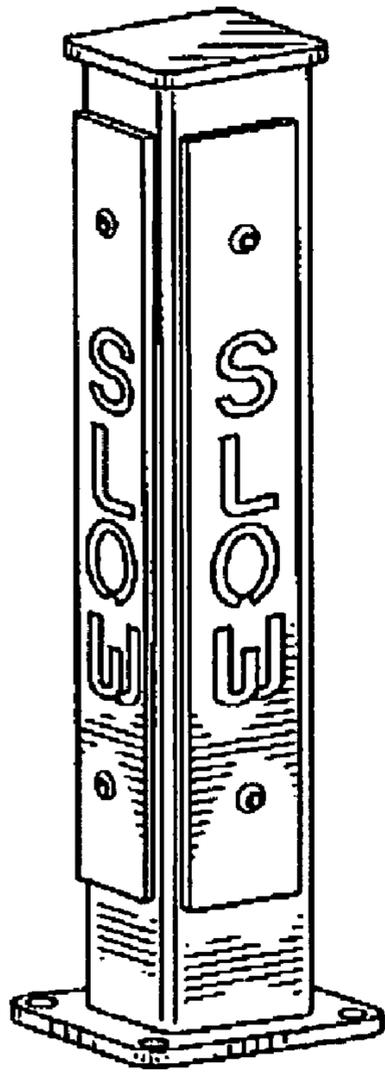


FIG. 57

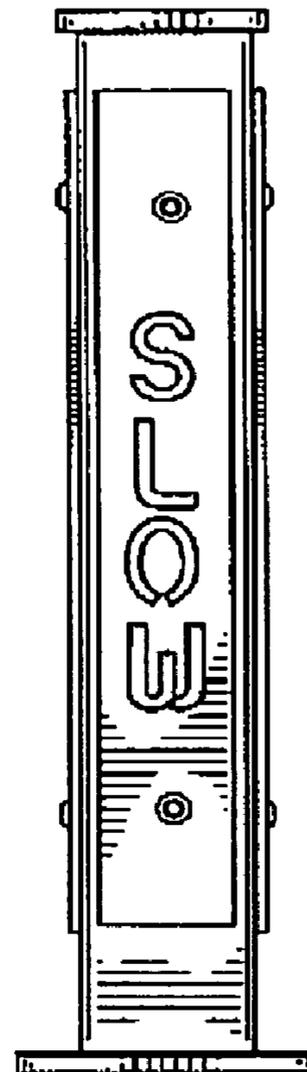


FIG. 58

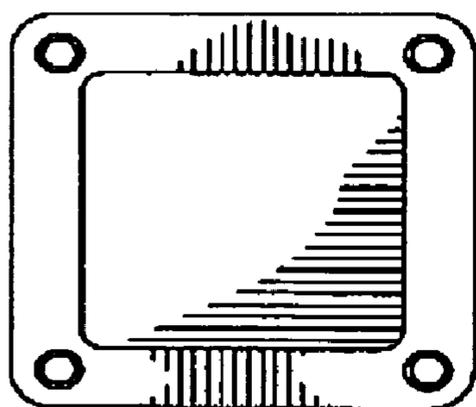


FIG. 59

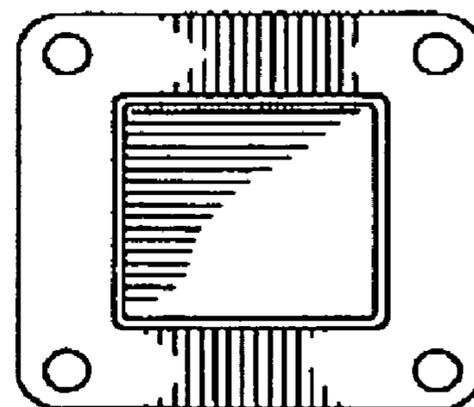


FIG. 60

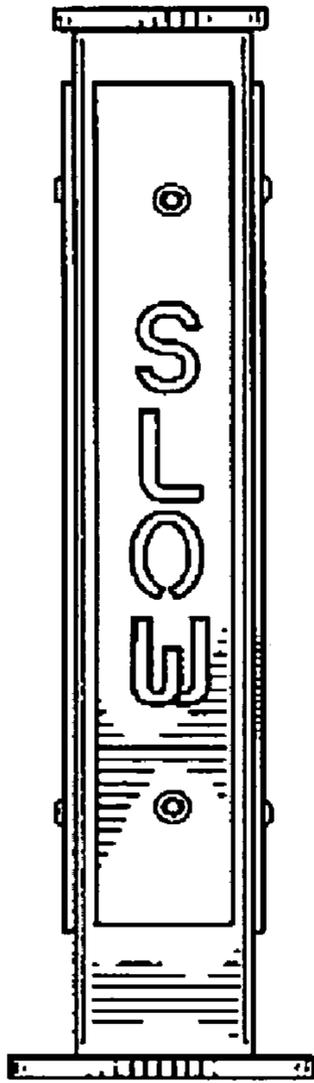


FIG. 61

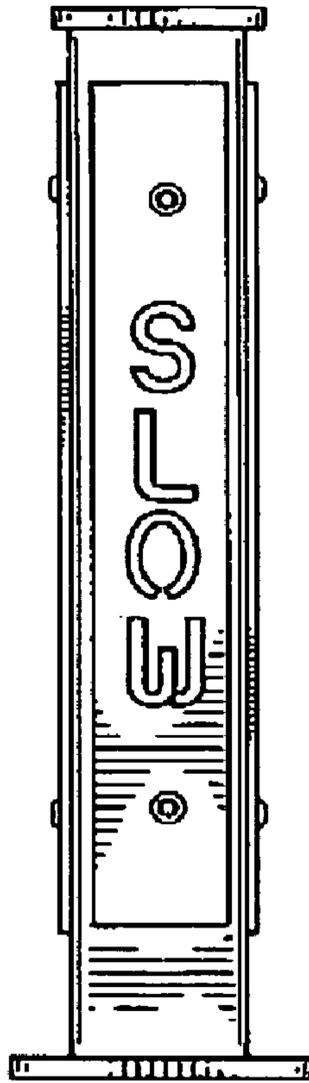


FIG. 62

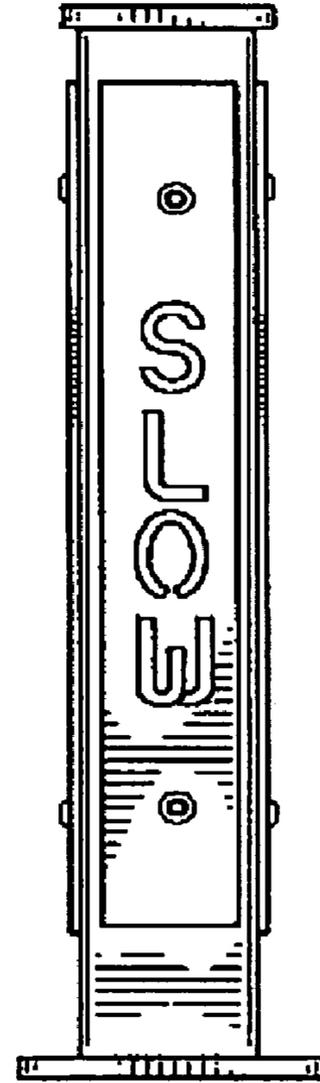


FIG. 63

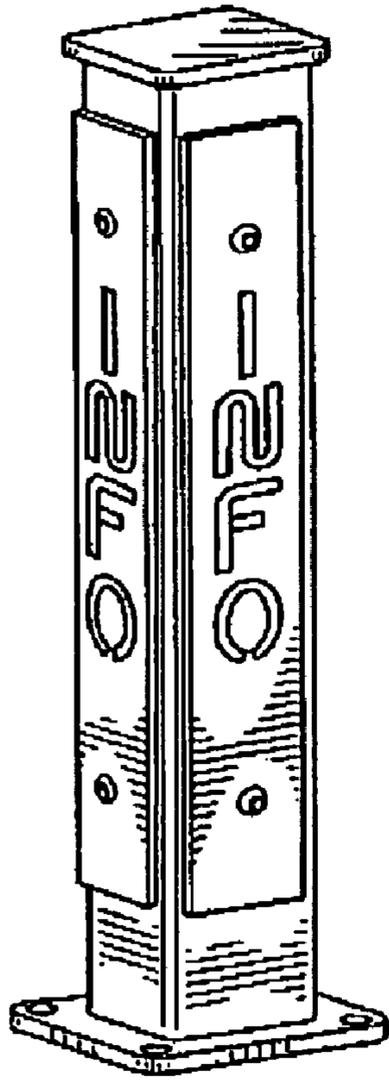


FIG. 64

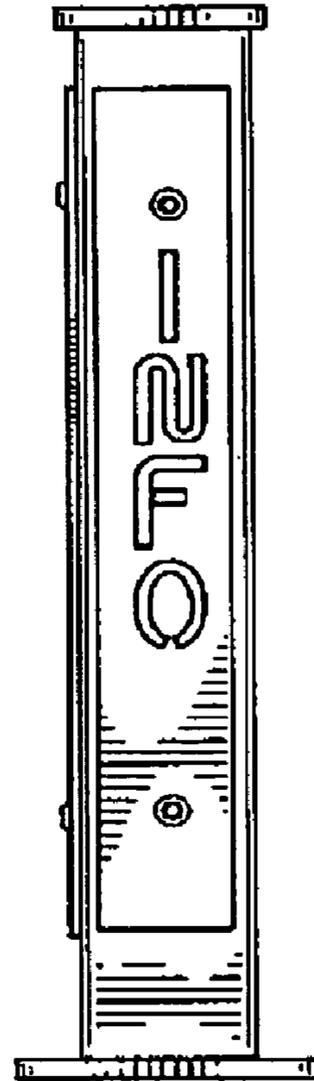


FIG. 65

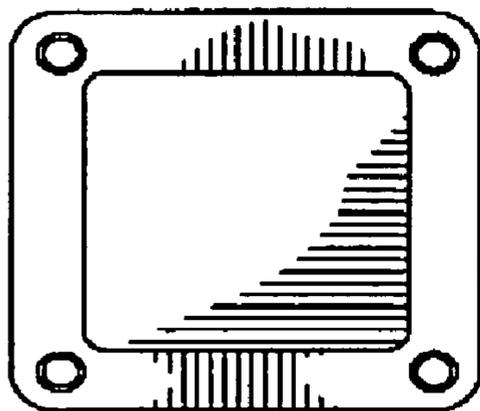


FIG. 66

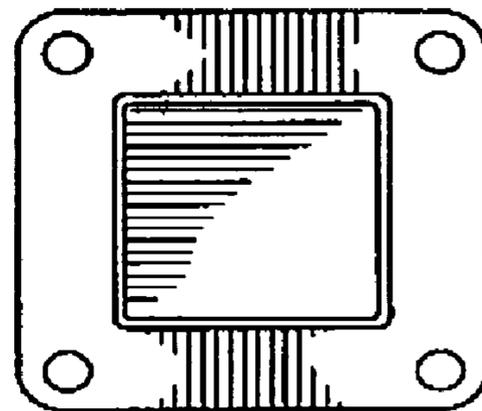


FIG. 67

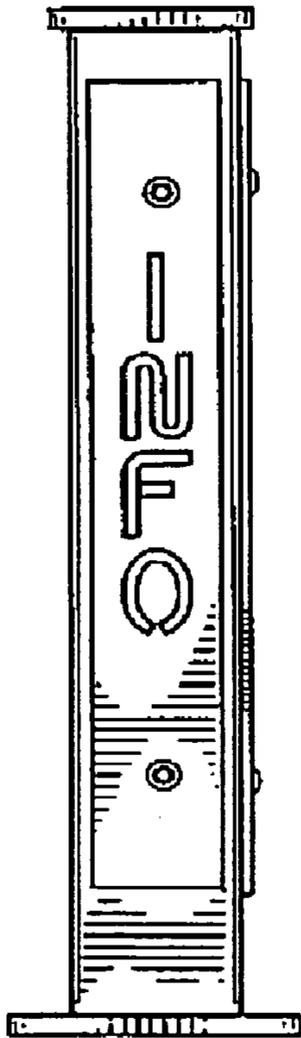


FIG. 68

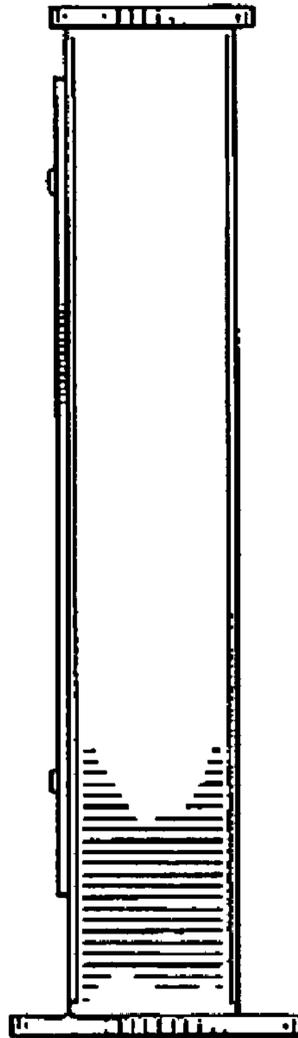


FIG. 69

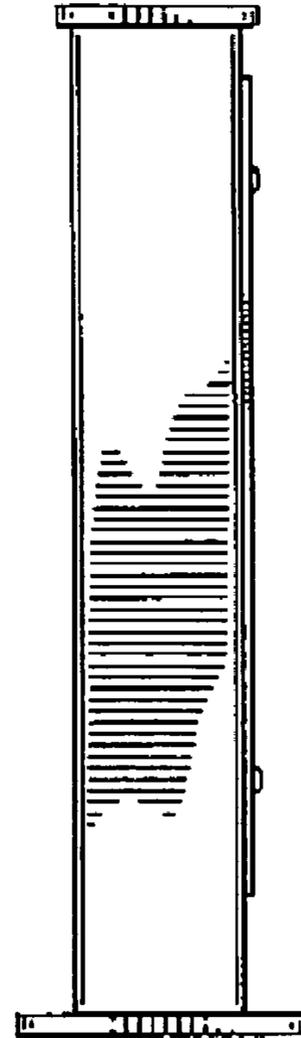


FIG. 70

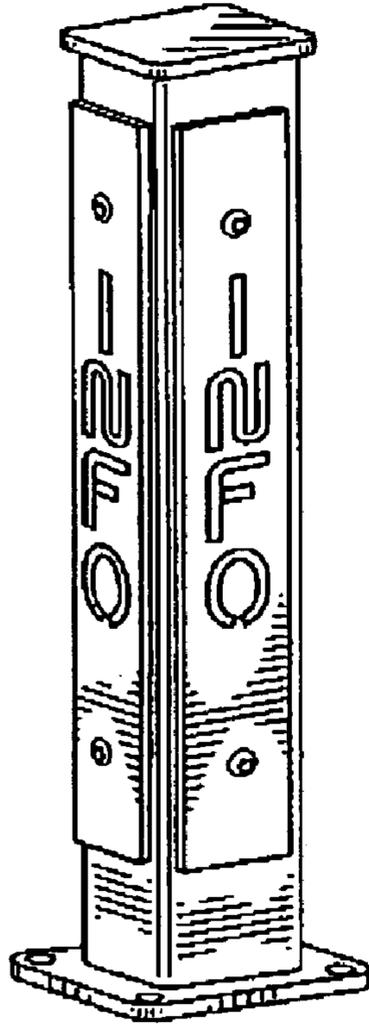


FIG. 71

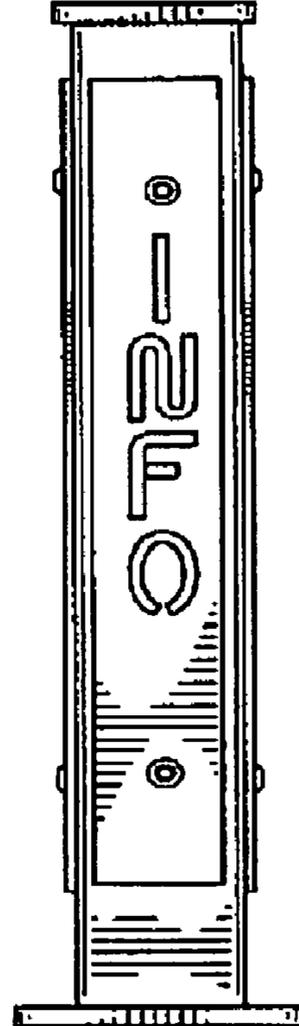


FIG. 72

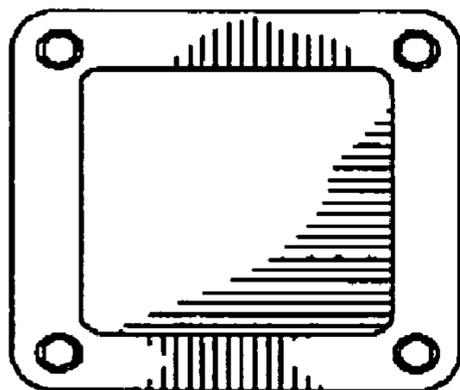


FIG. 73

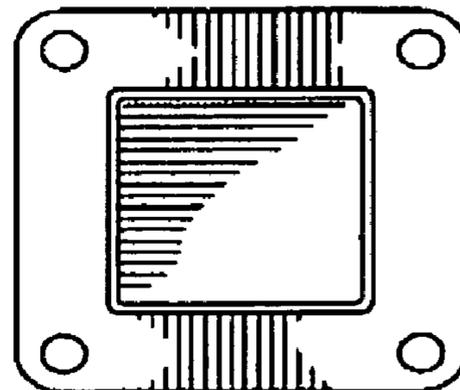


FIG. 74

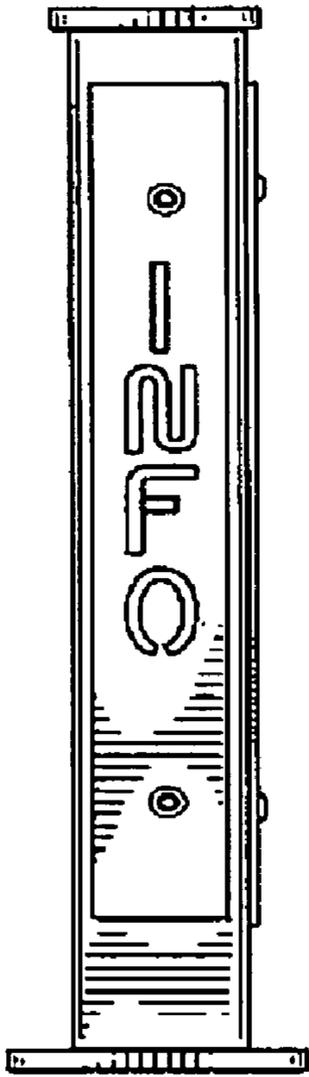


FIG. 75

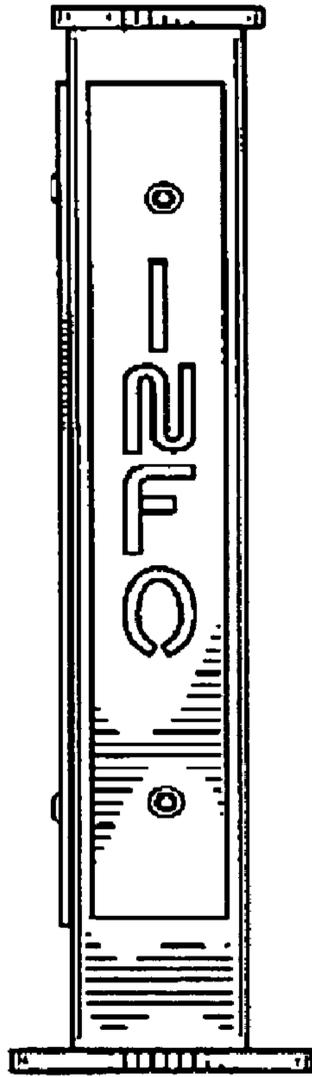


FIG. 76

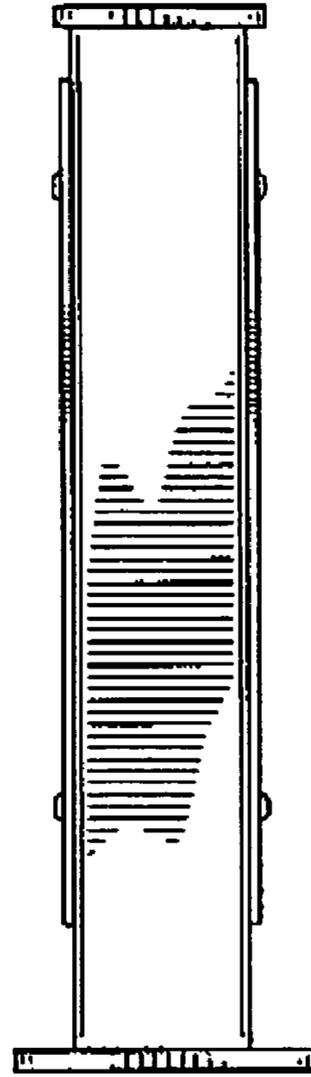


FIG. 77

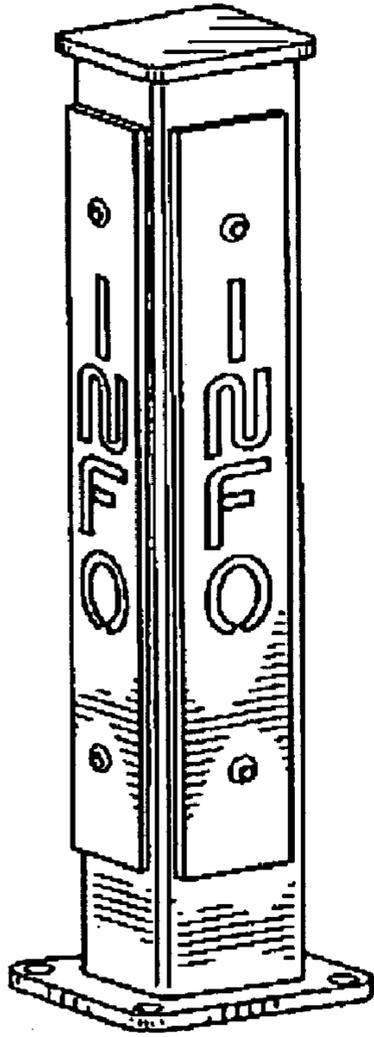


FIG. 78

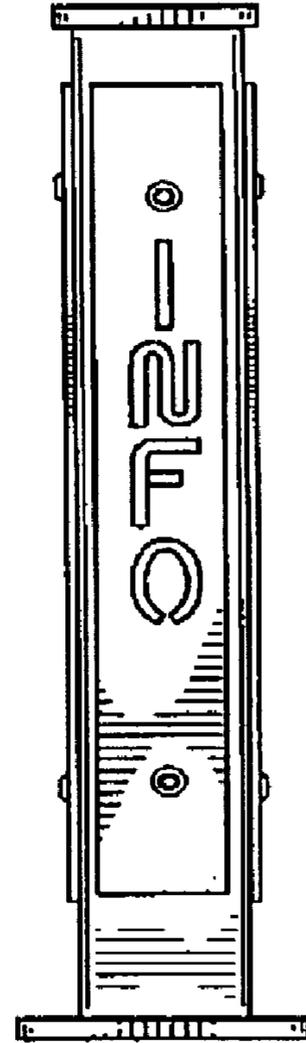


FIG. 79

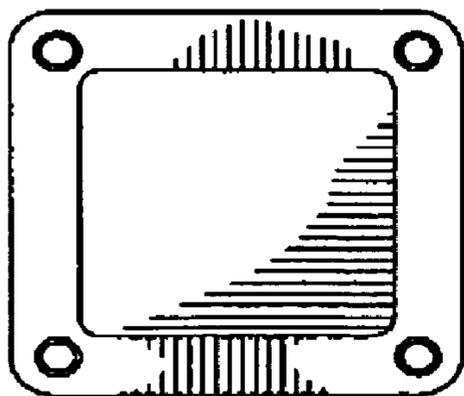


FIG. 80

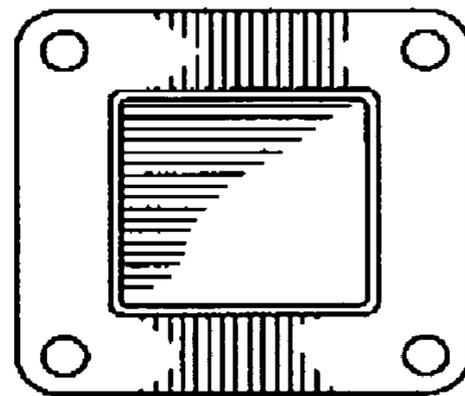


FIG. 81

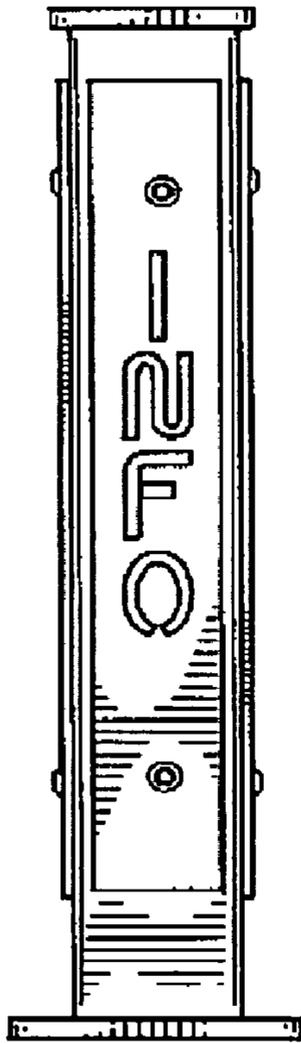


FIG. 82

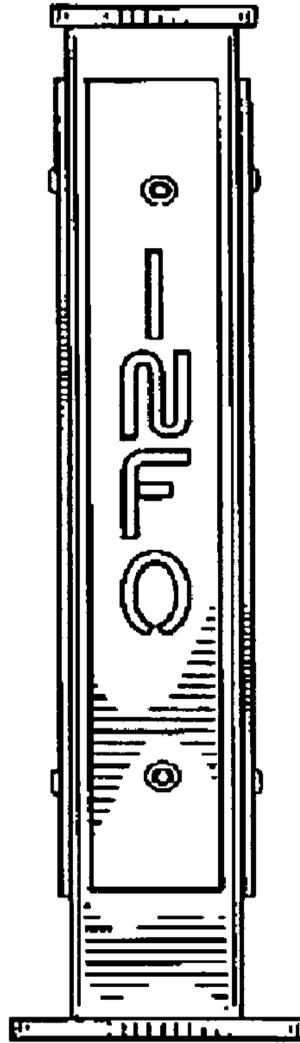


FIG. 83

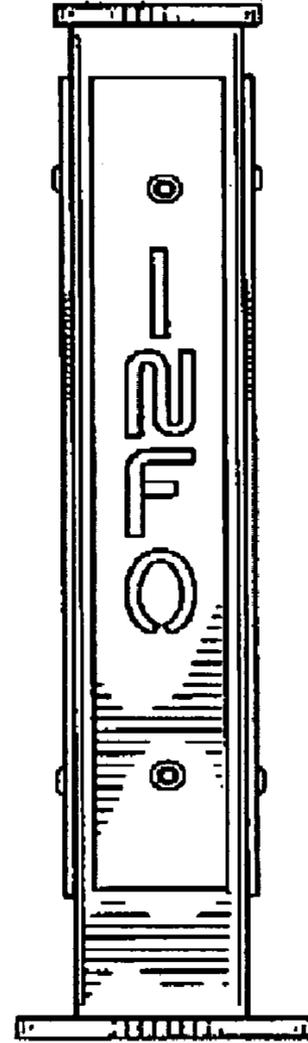


FIG. 84