



(51) International Patent Classification:

B01J 21/06 (2006.01) *B01J 37/02* (2006.01)
B01J 23/40 (2006.01) *B01J 37/08* (2006.01)
B01J 23/42 (2006.01) *B01J 37/34* (2006.01)
B01J 35/00 (2006.01) *B01D 53/86* (2006.01)
B01J 35/04 (2006.01) *F01N 3/10* (2006.01)
B01J 35/06 (2006.01)

(21) International Application Number:

PCT/US2018/035756

(22) International Filing Date:

01 June 2018 (01.06.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/515,802 06 June 2017 (06.06.2017) US

(71) Applicant: **UNIVERSITY OF CONNECTICUT**
 [US/US]; 400 Farmington Avenue, MC 6400, Farmington,
 CT 06032 (US).

(72) Inventors: **GAO, Pu-Xian**; 318 Eastview Drive, Coventry, CT 06238 (US). **LU, Xingxu**; 15 Baxter Road, Storrs, CT 06268 (US). **HOANG, Son**; 9707 Horace Harding Exp, Apt. 8H, Corona, NY 11368 (US).

(74) Agent: **SOLOMON, Mark, B.** et al.; Hamilton, Brook, Smith & Reynolds, P.C., 530 Virginia Rd., P.O. Box 9133, Concord, MA 01742-9133 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: MICROWAVE ASSISTED AND LOW-TEMPERATURE FABRICATION OF NANOWIRE ARRAYS ON SCALABLE 2D AND 3D SUBSTRATES

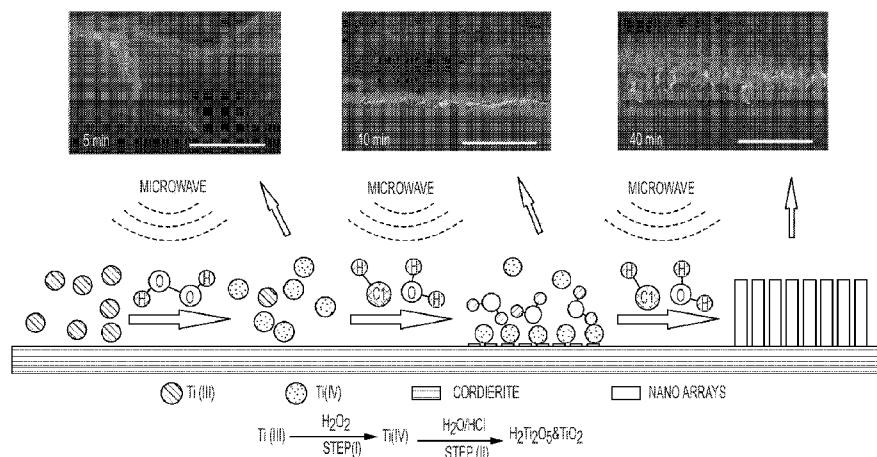


FIG. 3

(57) Abstract: A method of making a titanium dioxide nanowire array includes contacting a substrate with a solvent comprising a titanium (III) precursor, an acid, and an oxidant while microwave heating the solvent, thereby forming a hydrogen titanate $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ nanowire array. The hydrogen titanate nanowire array is annealed to form a titanium dioxide nanowire array. The substrate is seeded with titanium dioxide before starting the hydrothermal synthesis of the hydrogen titanate nanowire array. The titanium dioxide nanowire array is loaded with a platinum group metal to form an exhaust gas catalyst. The titanium dioxide nanowire array can be used to catalyze oxidation of combustion exhaust.



OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

MICROWAVE ASSISTED AND LOW-TEMPERATURE FABRICATION OF NANOWIRE ARRAYS ON SCALABLE 2D AND 3D SUBSTRATES

RELATED APPLICATION

[0001] This application claims the benefit of U.S. Provisional Application No. 62/515,802, filed on June 6, 2017. The entire teachings of the above application are incorporated herein by reference.

GOVERNMENT SUPPORT

[0002] This invention was made with government support under Grant No. CBET-1344792 from the United States National Science Foundation; and Grant No. DE-EE0006854 from the United States Department of Energy. The government has certain rights in the invention.

BACKGROUND

[0003] Combustion exhaust, particularly from diesel combustion, contributes to emission of a variety of gases, including carbon monoxide (CO), nitric oxide (NO), and hydrocarbons. Such gases are emitted from a variety of diesel engines, such as automobiles, marine engines, and generators. Catalysts are employed to catalyze oxidation of these gases, but traditional solvothermal processes can require heating to temperatures from about 150°C to about 200°C for about 5-10 hours.

[0004] Additional background information is provided U.S. Patent Publication No. 2014/0256534 and U.S. Patent 9,561,494.

SUMMARY

[0005] The disclosure contained herein is in the general field of nanostructured materials comprising metal oxides, for example, nanostructured arrays comprising titanium dioxide.

[0006] Disclosed herein is a method of making a hydrogen titanate ($\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$) nanowire array. The method can include contacting a substrate with a solvent comprising a titanium (III) precursor, an acid, and an oxidant while microwave heating the solvent, thereby forming a hydrogen titanate ($\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$) nanowire array. The substrate can be a cordierite honeycomb monolith. The solvent can be a polar solvent. The solvent can be a protic

solvent. The solvent can be water. The titanium (III) precursor can be TiCl_3 . The titanium (III) precursor can be $\text{Ti}_2(\text{SO}_4)_3$. The titanium (III) precursor can be a titanium (III) alkoxide. The acid can be hydrochloric acid (HCl). The acid can be from about 25 wt.% to about 40 wt.% HCl. The acid can be sulfuric acid (H_2SO_4). The oxidant can be hydrogen peroxide. The hydrogen peroxide can be from about 20 wt.% to about 40 wt.% in water.

[0007] The solvent can be heated by microwave heating to a temperature from about 75°C to about 95°C . The solvent can be heated by microwave heating for a duration from about 10 minutes to about 180 minutes.

[0008] The method can further include annealing the hydrogen titanate nanowire array to form a TiO_2 nanowire array. Annealing can be performed at a temperature from about 300°C to about 800°C .

[0009] The solvent can be a second solvent, and the method further include contacting the substrate with a first solvent that includes a titanium (IV) precursor and a first acid prior to contacting the substrate with the second solvent. The method can further include sonicating while contacting the substrate with the first solvent.

[0010] The titanium (IV) precursor can include one or more of titanium (IV) isopropoxide, titanium (IV) n-butoxide, and titanium (IV) chloride. The titanium (IV) precursor can include titanium (IV) isopropoxide.

[0011] The first solvent can be a polar solvent. The first solvent can be a protic solvent. The first solvent can be an alcohol. The first solvent can be ethanol. The first acid can be HNO_3 . The method can further include drying the substrate after contacting the substrate with the first solvent, and subsequently contacting the substrate with the first solvent prior to contacting the substrate with the second solvent. The method can further include annealing the substrate after contacting the substrate with the first solvent and prior to contacting the substrate with the second solvent.

[0012] Described herein is a method of loading a platinum group metal onto a titanium dioxide (TiO_2) nanowire array. The method can include contacting the TiO_2 nanowire array with a third solvent comprising a platinum group metal precursor, wherein the platinum group metal precursor comprises one or more of platinum, palladium, and rhodium; drying the TiO_2 nanowire array; calcining the TiO_2 nanowire array; and annealing the TiO_2 nanowire array in the presence of hydrogen. The platinum group metal precursor can include platinum, such as platinum (II). The platinum group metal precursor include tetraammineplatinum (II) nitrate. The method can further include sonicating while contacting the TiO_2 nanowire array

with the third solvent. The method can further include contacting the TiO₂ nanowire array with a third solvent, drying the TiO₂ nanowire array, and calcining the TiO₂ nanowire array a plurality of times prior to annealing the TiO₂ nanowire array.

[0013] Described herein is a titanium dioxide (TiO₂) nanowire array made by any of the methods described herein.

[0014] Described herein is a method of oxidizing a combustion exhaust. The method can include contacting a source of combustion exhaust with a titanium dioxide (TiO₂) nanowire made by any of the methods described herein. The combustion exhaust can include one or more of carbon monoxide (CO), nitric oxide (NO), and hydrocarbons, such as ethylene, propylene, propane, and methane. The source of combustion exhaust can be diesel combustion exhaust. The diesel combustion exhaust can be emitted from a land-based vehicle (e.g., a car or a truck), a water-based vessel (e.g., a boat or a ship), a diesel-fueled power plant, a diesel generator, or a diesel-fueled power plant.

[0015] In this work, we report a facile microwave-assisted hydrothermal method for the synthesis and manufacturing of H₂Ti₂O₅·H₂O and TiO₂ based nanostructure arrays (nano-arrays) rooted honeycomb monoliths for high performance automotive catalytic converters. A two-step sustained-release reaction strategy was designed to achieve the heterogeneous nucleation and growth of H₂Ti₂O₅·H₂O nano-arrays on cordierite honeycomb channel surfaces, which can be converted to TiO₂ nano-arrays through post annealing at a temperature range of 300-800°C. Using TiCl₃ as the titanium source, H₂O₂ as the oxidizer to promote the oxidation of Ti³⁺, and hydrochloride acid to control the hydrolysis rate in solution, a growth rate of 42 nm/min was achieved, rivaling the highest growth rate (17.5 nm/min) reported in literature. This approach provides a new pathway for the low-temperature scalable synthesis and manufacturing of TiO₂ nano-array integrated catalytic reactors with good production rates and enhanced material utilization efficiency. With 50 g/ft³ Pt loading, the TiO₂ nano-array integrated monoliths have been demonstrated with excellent low light-off temperatures for CO and HCs as low as below 150 °C under simulated exhaust conditions. After sonication in water for 4 hours and hydrothermal aging at 700 °C for 100 hours, few changes of the light-off temperatures were observed on the sonicated samples, and a small increase of ~50 °C was found on the hydrothermal aged samples in comparison with the fresh samples. This new type of robust and efficient nano-array integrated automotive catalytic converters could be a promising candidate for low temperature automotive emission control devices.

[0016] Disclosed herein are methods for microwave-assisted, low-temperature fabrication of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nanostructured films on scalable 2D and 3D substrates.

[0017] A facile, scalable, low cost hydrothermal method for microwave-assisted and low-temperature fabrication of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nano-arrays on scalable 2D and 3D substrates is disclosed herein. The resulting improved materials have a wide range of applications.

[0018] The TiO_2 nano-arrays disclosed herein can be used as support for the catalytic active materials on 3D monolithic catalysts, which are the essential parts of catalytic reactors for automotive emission control systems, such as, diesel oxidation catalysts (DOC), diesel particulate filters (DPF) and NO_x storage/reduction (NSR). TiO_2 nano-array supported 3D monolithic catalyst materials can also be used for indoor air purification and water filtration.

[0019] The $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nano-arrays supported active materials disclosed herein can be integrated onto various 2D and 3D substrates, such as silicon, glass, ceramic and polymer substrates, and thereby used as gas sensor devices for monitoring the toxic air pollutants such as SO_2 , CO, NO_2 , and volatile organic compounds originating from various sources in the environment. The $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nano-arrays integrated on 2D and 3D substrates disclosed herein can be directly used as catalytic devices in a variety of applications and products in the environmental and energy fields, including self-cleaning surfaces, air and water purification systems, sterilization, hydrogen evolution, and photoelectrochemical conversion.

[0020] In other examples of application of titanium dioxide nano-arrays made as disclosed herein, photoanodes in high-efficiency dye-sensitized solar cells (DSCs) are composed of TiO_2 anatase nanoparticles because of their large surface area for the loading of dye molecules. There are numerous grain boundaries in these TiO_2 nanoparticles, leading to faster charge recombination at the TiO_2 /electrolyte interface. To increase the electron mobility, 1D TiO_2 nano-arrays are directly grown on transparent, conductive fluorine-doped tin oxide (FTO) glass to provide direct pathways for electron transport and to suppress charge recombination.

[0021] $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nano-arrays made as disclosed herein can also be used as a photoanode for photoelectrochemical (PEC) water splitting. Currently, the solar-to-

hydrogen (STH) efficiency of TiO_2 nanoparticles is substantially limited by its large band gap energy and usually fast electron–hole recombination due to a high density of trap states. 1D TiO_2 nano-array photoanodes made as disclosed herein, however, with large surface area and short diffusion distance for photogenerated minority carriers are able to facilitate the charge separation and, thus, reduce the loss due to electron–hole recombination.

[0022] For synthesis of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ and TiO_2 nano arrays, the current state of the art method is to use solvothermal method under high temperature and high pressure with long reaction times, which is very energy and time consuming, low in production rate, and difficult to achieve industrial-scale fabrication.

[0023] For fabrication of monolithic catalysts, the current state of the art method is to create a supporting layer for the catalytically active material on channel walls of 3D cordierite honeycomb substrates through use of a wash-coating procedure. $\gamma\text{-Al}_2\text{O}_3$ is the most widely used as washcoat material, and Pt, Pd and Rh are the major catalytic active materials for auto emission control. There are a number of known problems with wash-coating methods including: (i) the less-than-ideal wash-coating process usually does not ensure uniform catalyst deposition with precisely and optimally controlled microstructures, therefore compromising materials utilization efficiency; and (ii) the compromised materials utilization efficiency then results in a heavy loading ratio of catalytic active materials, which thereby requires a greater amount of noble metal and makes catalytic converters expensive, for example, for automotive emission control.

[0024] Compared with the known solvothermal method for the synthesis of TiO_2 nano-arrays, the method disclosed herein for microwave-assisted synthesis is achieved at low temperature and low pressure with high production rate. For example, TiO_2 nano-arrays with comparable length can be obtained through a microwave-assisted hydrothermal method as disclosed herein at 80°C for 1 hour, instead of about $150\sim 200^\circ\text{C}$ for about 5~10 hours by a conventional solvothermal procedure.

[0025] Compared with conventional wash-coated monolithic catalysts, advantages of the TiO_2 nano-array based monolithic catalysts prepared as disclosed herein include:

[0026] A) The growth of TiO_2 nano arrays on monolithic substrates is an in-situ, binder free and environmentally benign process, instead of the conventional multi-step, complex wash coating process. It is an object of the methods disclosed herein to simplify the fabrication procedure and save costs.

[0027] B) The TiO₂ nano-arrays have good adherence to deposition substrates since crystal growth starts with the nucleation on the substrate, which can enhance the mechanical stability of the nano-arrays and extend the life expectancy of the materials, for example as catalysts.

[0028] C) The TiO₂ nano-arrays have well defined structure with good uniformity on the monolithic substrates, rather than the random microstructure of the wash-coated particulates. This provides the possibility to control and build precise and optimum structure-property correlations for catalysts and other nano-array materials.

[0029] D) The well-defined structure of the TiO₂ nano-arrays based monolithic catalysts can increase the diffusion path of gas molecules during reaction, thereby promoting interaction between the gas molecules and the catalysts. Also, material utilization efficiency for noble metal catalysts is enhanced.

[0030] The novel microwave-assisted hydrothermal method disclosed herein provides important advantages for synthesis of TiO₂ nanostructured films over the conventional solvothermal methods in terms of low production temperature and pressure, high production rate and environmentally benign starting materials. The low temperature and pressure process simplifies the specifications for reactors to be used in production. The high production rate makes it possible to scale up the process for industrial level manufacturing.

[0031] The novel microwave-assisted hydrothermal method disclosed herein also provides important advantages for production of monolithic catalysts. The resulting uniform TiO₂ nano-arrays on monolithic cordierite substrates provide an advantageous platform as carrier for noble metal catalysts over the conventional wash-coating particulates. The well-defined structure of the resulting TiO₂ nano-array based monolithic catalysts ensure uniform catalyst deposition with precisely and optimally controlled microstructures, therefore increasing the materials utilization efficiency. It has been proved that, compared with the reported washcoated powder catalysts with comparable performance, the materials utilization efficiency of embodiments of the disclosed nano-array monolithic catalysts is ~10–40 times higher with extremely small loadings of precious metal and metal oxide nano-arrays used.

[0032] An embodiment of the microwave-assisted hydrothermal method disclosed herein can provide increased material utilization efficiency, especially for the use of noble metals and thereby provide commercial value.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] The foregoing will be apparent from the following more particular description of example embodiments, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating embodiments.

[0034] FIG. 1A is a photograph and schematic illustration of TiO₂ nano-arrays rooted cordierite monoliths. FIG. 1B is an elemental distribution of Ti and Mg by EDX mapping, indicating the TiO₂ nano-array layers and cordierite substrate, respectively. FIGs. 1C and 1D are SEM images of TiO₂ nano-arrays rooted cordierite monoliths from (FIG. 1C) top-view and (FIG. 1D) cross-sectional view with low magnification images inserted.

[0035] FIG. 2A is an XRD pattern of fresh nanowire powders along with diffraction peaks of hydrogen titanium oxide hydrate (H₂Ti₂O₅·H₂O). FIG. 2B is a high resolution TEM (HRTEM) image of fresh nanowires. FIG. 2C is a selected area electron diffraction (SAED) patterns of fresh nanowires. FIG. 2D is a bright field (BF) TEM image of fresh nanowires. FIG. 2E is a Raman spectra of nano-arrays annealed at different temperatures. FIG. 2F is a thermogravimetric differential thermal /mass spectroscopy (TGA-DTA) / H₂O Mass spectra of the fresh nanowire powders.

[0036] FIG. 3 is a schematic illustration showing the two-step sustained release growth process of the nano-arrays with SEM images of TiO₂ NW arrays taken at different reaction stages. The synthesis was carried out at 90 °C on seeded cordierite substrates using a recipe of 3 mL TiCl₃ (20%), 15 mL H₂O₂ (30%), 3.5 mL HCl (37%) and 185 mL DIW in microwave oven. Scale bars in the inserts are 1 μm.

[0037] FIGs. 4A-C are SEM images of TiO₂ nano-arrays grown on seeded cordierite substrates with different reaction time and heating methods: FIG. 4A: hot-plate heating, 60 min; FIG. 4B: microwave-assisted heating, 30 min; FIG. 4C: microwave-assisted heating, 60 min. FIG. 4D is a chart showing a summary of the average length of nano-arrays using different heating methods. The reactions were carried out at 80 °C using the recipe of 3 mL TiCl₃ (20%), 9 mL H₂O₂ (30%), 3.5 mL hydrochloride acid (37%) in 191 mL DI water. Scale bars in the inserts are 1 μm.

[0038] FIG. 5A is a graph showing the evolution of the average length of TiO₂ nano-arrays along the reaction time at different temperatures. FIG. 5B is a Raman spectra of the nano-arrays samples synthesized at 95 °C for 60 and 30 min.

[0039] FIG. 6A-F are light-off curves for catalytic simulated gas oxidation of Pt/TiO₂ nano-array based monolithic catalysts and comparison with commercial DOC samples: FIGs. 6A-B: fresh samples; FIGs. 6C-D: hydrothermal aged samples at 700 °C for 100 hr.; FIGs. 6E-F: sonicated samples in water for 240 min. The light-off curves show the conversion rate of different gas components along the temperature; the T10, T50 and T90 in the histograms indicate the temperatures at which the conversion of each components reached 10%, 50% and 90%, respectively; the columns marked with Pt/TiO₂ means our samples, while those marked with DOC represent the commercial DOC sample from Ford F250.

[0040] FIGs. 7A-F are HAADF, HRTEM, EDX mapping and Pt particle size distribution of the Pt integrated TiO₂ nanowires: FIG. 7A: HAADF image of the fresh catalyst with HRTEM images and particle size distribution inserted; FIGs. 7B-C: HAADF and EDX mapping of the fresh catalyst indicating the detailed morphology and elemental distribution; FIGs. 7D: HAADF image of the 700 °C/100 hr. hydrothermal aged catalyst with HRTEM images and particle size distribution inserted; FIGs. 7E-F: HAADF and EDX mapping of the hydrothermal aged catalyst indicating the detailed morphology and elemental distribution.

[0041] FIG. 8 is a graph showing evolution of sample weight in percentage of the Pt on TiO₂ nano-array based monolithic catalysts and the commercial DOC samples before and after hydrothermal aging at 700 °C/100 hr. along the sonication time.

[0042] FIG. 9 is a schematic illustrating a catalytic testing system for the LTC-D simulated exhaust oxidation reactions.

[0043] FIG. 10 is XRD patterns of TiO₂ nano-array rooted cordierite monoliths annealed at different temperatures.

[0044] FIGs. 11A-D are top-view SEM images and bright field TEM images of TiO₂ nano arrays annealed at different temperatures: FIG. 11A: Fresh nanoarrays; FIG. 11B: annealed at 500°C for 2h; FIG. 11C: annealed at 800°C for 2h; FIG. 11D: annealed at 1000°C for 2h.

[0045] FIG. 12A is an XPS analysis, deconvoluted Ti 2p XPS spectra of fresh nanowire arrays. FIG. 12B is an XPS analysis, deconvoluted O 1s XPS spectra of fresh nanowire arrays. Literature information for the satellite peaks can be found in Ref. 81.

[0046] FIG. 13A is Raman spectra of nano-arrays with different treatments: nano-arrays (a) synthesized without H₂O₂, (b) synthesized with H₂O₂, (c) annealed at 1000 °C for 2 hours, and (d) annealed at 800 °C for 2 hours. FIGs. 13B is an SEM image of the nano-arrays synthesized without H₂O₂. FIG. 13C is an SEM image of the nano-arrays synthesized with

H₂O₂. The synthesis of the samples in FIGs. 13B and 13C was carried out at 90 °C on seeded cordierite substrates using 3 mL TiCl₃ (20%) and 3.5 mL HCl (37%) without and with 15 mL H₂O₂ (30%), respectively, balanced by DIW (total solution 200mL) in microwave oven.

[0047] FIG. 14A-H are SEM images of TiO₂ nano-arrays grown on seeded cordierite substrates with different concentrations of TiCl₃: FIGs. 14A and 14B: 0.20 wt.%; FIGs. 14C and 14D: 0.35 wt.%; FIGs. 14E and 14F: 0.50 wt.%; FIGs. 14G and 14H: 0.70 wt.%. FIGs. 14A, 14C, 14E, and 14G are top-view images with low-magnification images inserted. FIGs. 14B, 14D, 14F, and 14H are cross-sectional view images. The reactions were carried out at 80 °C for 60 min, and the volume of H₂O₂ (30%) was fixed to be 15 mL for all reactions. The volume of DIW and HCl (37%) were adjusted according to the amount of TiCl₃ (20%) used to keep the concentration of HCl constant at 0.2335mol/L.

[0048] FIG. 15A-H are SEM images of TiO₂ nano-arrays grown on seeded cordierite substrates with different volume of H₂O₂ (30%): FIGs. 15A and 15B: 0 mL; FIGs. 15C and 15D: 9 mL; FIGs. 15E and 15F: 15 mL; FIGs. 15G and 15H: 20 mL. FIGs. 15A, 15C, 15E, and 15G are top-view images with low-magnification images inserted. FIGs. 15B, 15D, 15F, and 15H are cross-sectional view images. The reactions were carried out at 80°C for 60 min, and the volume of TiCl₃ (20%) and HCl (37%) were fixed to be 3 and 3.5 mL, respectively. The volume of DIW was adjusted according to the amount of H₂O₂ (30%) used to keep the total volume of solution constant at 206.5 mL.

[0049] FIGs. 16A-H are SEM images of TiO₂ nano-arrays grown on seeded cordierite substrates with different volume of HCl (37%): FIGs. 16A and 16B: 0 mL; FIGs. 16C and 16D: 1.5 mL; FIGs. 16E and 16F: 3.5 mL; FIG. 16G: 7.5 mL; FIG. 16H: 10.5 mL. FIGs. 16A, 16C, 16E, 16G, and 16H are are top-view images with low-magnification images inserted. FIGs. 16B, 16D, and 16F are cross-sectional view images. The reactions were carried out at 80°C for 60 min, and the volume of TiCl₃ (20%) and H₂O₂ (30%) were fixed to be 3 and 15 mL, respectively. The volume of DIW was adjusted according to the amount of HCl (37%) used to keep the total volume of solution constant at 206.5 mL.

[0050] FIGs. 17A-D are SEM images of TiO₂ nano-arrays grown on cordierite substrates with different seeding conditions and reaction stages: FIG. 17A: Unseeded sample, 80°C for 30 min; FIG. 17B: Unseeded sample, 80°C for 60 min; FIG. 17C: Seeded sample, 80°C for 10 min; FIG. 17D: Seeded sample, 80°C for 60 min. Low-magnification top-view images are inserted into FIGs. 17B and 17D. The reactions were carried out at 80°C using the optimized

recipe of 3 mL TiCl_3 (20%), 15 mL H_2O_2 (30%), 3.5 mL hydrochloride acid (37%) in 185 mL DI water.

[0051] FIG. 18A-P are SEM images of the top view and cross-sectional view (inset) of TiO_2 nano-array series synthesized at different temperatures: FIGs. 18A-D: 75 °C; FIGs. 18E-H: 80 °C; FIGs. 18I-L: 90 °C; FIGs. 18M-P: 95 °C. The scale bars in the inserts correspond to 1 μm .

[0052] FIG. 19 is a graph showing changes of the sample weight of TiO_2 nano-array based monoliths along the reaction time under different temperatures.

[0053] FIG. 20A is a photograph of the experimental set-up used in the present work. FIG. 20B is photographs of the commercial monolithic honeycomb with dimensions of 4.66" in diameter and 2.5" in length. FIG. 20C is large-area SEM images of the TiO_2 nanowire arrays grown inside the commercial monolithic honeycomb, confirming that a uniform coverage of nanowires (~0.7 μm in length) was achieved throughout the 2.5-inch long honeycomb channels. The reactions were carried out at 80°C using the optimized recipe. Volume of solution = 8 L, reaction time: 30 min $\times$ 4 = 2 h.

[0054] FIG. 21 is XRD patterns of the Pt@TiO_2 nano-array integrated monoliths before and after hydrothermal aging, and the cordierite monolith with and without TiO_2 nanoarrays.

[0055] FIG. 22A is an SEM image of a TiO_2 nanowire array (NA). FIG. 22B is a HAADF STEM image of a TiO_2 nanowire array. The array of dark spots indicates the unique mesoporosity of the TiO_2 nanowire. FIG. 22C is a table summarizing BET surface area of TiO_2 and Pt/TiO_2 surface area; HT aged Pt/TiO_2 sample were prepared by aging Pt/TiO_2 at 650°C in a flow of 10% H_2O in air for 100 hours. FIG. 22D is a chart of light-off temperature of Pt/TiO_2 nanoarrays in CDC simulated exhaust. A commercial DOC catalyst based on $\text{Pt-Pd/Al}_2\text{O}_3\text{-ZrO}_2$ washcoat was used as a benchmark.

[0056] FIGs. 23A-F are SEM images of the TiO_2 nano-arrays integrated onto various substrate surfaces: FIG. 23A: Cordierite monolith; FIG. 23B: SiC monolith; FIG. 23C: FTO coated glass; FIG. 23D: Ti metal foil; FIG. 23E: ITO coated PET film; and FIG. 23F: carbon fibers.

[0057] FIGs. 24A-H are photographs of water contact angles on various pristine substrate surfaces and the corresponding nanoarrays rooted surfaces: FIG. 24A: pristine glass; FIG. 24B: nanoarray@glass; FIG. 24C: pristine FTO surface; FIG. 24D: nanoarray@FTO; FIG. 24E: pristine PET film; FIG. 24F: nanoarray@PET film; FIG. 24G: pristine ITO surface; FIG. 24H: nanoarray@ITO surface.

[0058] FIG. 25A is BET N₂ adsorption-desorption isotherms of bare cordierite monolith, nano-array rooted monolith and nanowire powders. FIG. 25B is pore size distribution of bare cordierite monolith, nano-array rooted monolith and nanowire powders.

DETAILED DESCRIPTION

[0059] A description of example embodiments follows.

[0060] As used herein, the term platinum group metal (PGM) refers to platinum, palladium, rhodium, osmium, iridium, and ruthenium.

[0061] One of skill in the art will appreciate that different PGMs can have different catalytic activity and can be useful for different applications.

[0062] The increasingly stringent regulations on stationary and automobile emissions and the rapid consumption of platinum-group metal (PGM) resources call for the development of highly efficient and low-cost catalysts for energy and pollutant conversion processes.¹⁻² Three-dimensional (3D) monolithic catalyst devices, by integrating catalysts, filters and reactors, represent an ideal solution to meet these demands.³⁻⁵ For example, the commercial automotive catalytic converters, by incorporating the honeycomb cordierite (2MgO·5SiO₂·2Al₂O₃) monoliths with PGM-based catalysts supported by highly porous metal oxide particulates, have been primarily used in automobile emission control systems.⁶⁻⁷ However, the merit features of monolith configurations are not fully developed due to the less-than-ideal wash-coating methods for integrating the metal oxides supported catalysts onto the monoliths. The randomly stacked wash-coating particle layers lack effective control over the structure and uniformity of the catalysts, resulting in compromised catalytic performance, low materials utilization efficiency and poor mechanical stability.⁸⁻⁹

[0063] In order to meet these challenges, a novel one-dimensional (1D) nanostructure array (nano-array) based monolithic catalyst configuration has been developed by our group in the past few years.⁸⁻¹⁸ By using low-cost and robust hydrothermal process, hierarchically arranged metal oxide nano-arrays, including ZnO, TiO₂, CeO₂, Co₃O₄, MnO₂ and perovskite in forms of nanorods (NRs), nanowires (NWs), nanotubes (NTs) or composite core-shell structures, have been *in situ* grown onto the channel surfaces of commercial honeycomb monoliths. These nano-arrays either function as ready-made catalysts to catalyze reactions or act as supports for loading catalytically active materials.^{9, 19-27} The nano-array based monolithic catalysts have been proved to be advantageous over the conventional wash-

coating catalysts in terms of enhanced materials utilization efficiency, higher thermal stability and mechanical robustness as well as tunable structures and catalytic performance.⁸⁻⁹

[0064] Among these metal oxide nano-arrays, TiO₂ is a promising candidate for inexpensive mass production of nano-array based monolithic catalysts due to its abundant, low-cost, environmentally benign and chemically stable characteristics.²⁸⁻³¹ The feasibility of using TiO₂ nano-arrays in automotive catalytic devices have been demonstrated in our previous work.^{9, 13, 25-26} Conventional synthetic methods for TiO₂ nano-arrays include chemical vapor deposition (CVD),³²⁻³³ pulsed DC magnetron sputtering,³⁴ anodic aluminium oxide (AAO) templating technique,³⁵⁻³⁷ metal–organic chemical vapor deposition (MOCVD),³⁸⁻³⁹ electrospinning,⁴⁰ and solution based methods.⁴¹⁻⁴⁵ Among them, solution based methods, including hydrothermal and solvothermal syntheses, are considered to be promising for industrial level production due to their advantages in low temperature operation, substrate compatibility and flexibility, low equipment capital investment, and continuous manufacturing viability^{29, 46-47}. However, the reported solution based methods for TiO₂ nano-array synthesis are mainly based on the hydrolysis of titanium (IV) alkoxides in acid environment with a relatively high temperature (150~200 °C), high pressure, and extended reaction time (3~48 hr.) using Teflon-lined stainless steel autoclaves.⁴¹⁻⁴⁵ Moreover, due to the vigorous hydrolysis of Ti⁴⁺ with water, a large portion of precursors precipitate homogeneously during the reaction, resulting in a low material utilization efficiency. Therefore, a facile method with high production rate and enhanced material utilization efficiency is essential to achieve the inexpensive mass production of TiO₂ nano-array integrated monolithic catalysts.

[0065] Microwave-assisted synthesis is an increasingly important method for the preparation of technologically critical nanomaterials.⁴⁸⁻⁵⁴ By applying alternating electromagnetic field onto the polar molecules, microwave irradiation can achieve rapid and uniform volumetric heating throughout the solution, which results in a better energy saving and narrower size distribution of the nanomaterials than the conventional heating methods.⁵⁵ Microwave irradiation was also used in the synthesis of TiO₂ nanomaterials,⁵⁶⁻⁶⁴ but only limited to nanoparticles, and no success on the low temperature synthesis of TiO₂ nano-arrays has been reported so far. Meanwhile, TiCl₃ was reported to be a better titanium source than titanium (IV) alkoxides for scalable synthesis of TiO₂ nanomaterials due to its higher stability in water and lower cost.^{25, 65-67} However, the weak hydrolysis of TiCl₃ and slow transition from Ti³⁺ to Ti⁴⁺ in aqueous environment result in a usually low reaction rate to form TiO₂,

and thus, proper strategies are necessary to control the hydrolysis rates and accelerate the oxidation of Ti^{3+} in order to achieve a reasonable reaction rate.

[0066] Herein, a facile microwave-assisted hydrothermal method was developed for the synthesis of TiO_2 nano-arrays on commercial honeycomb monoliths. Compared with the conventional one-step hydrolysis method, a novel one-pot and two-step sustained-release reacting strategy was designed, in which, TiCl_3 was used as titanium source, H_2O_2 as an oxidizer to promote the oxidation of Ti^{3+} , and hydrochloride acid to control the hydrolysis rate in solution. An optimized set of synthetic conditions have been obtained by adjusting the concentrations of reactants and other synthetic parameters. This approach provides a new pathway to the low temperature and scalable synthesis of TiO_2 nano-arrays with good production rate and enhanced material utilization efficiency. When loaded with 50 g/ft³ Pt, the Pt/ TiO_2 nano-array based monolith catalysts showed excellent low-temperature catalytic performance and hydrothermal stability as well as superior mechanical robustness compared with commercial diesel oxidation catalysts (DOC) samples. This new type of TiO_2 nano-array integrated automotive catalytic converter was demonstrated to be a promising candidate for low temperature automotive emission control.

[0067] In some embodiments, the method includes seeding a substrate with TiO_2 polymeric sol (0.025 mol/L) by dip-coating method. In some embodiments, the method includes submerging the seeded substrate into a mixture of deionized water, 37% hydrochloric acid, Titanium (III) chloride 20% w/w solution in 2N Hydrochloric acid, and Hydrogen peroxide 30% aqueous solution. In some embodiments, the method includes heating the submerged seeded substrate in a microwave and heating to 80° C for 1 hour. In some embodiments, the method includes calcining the resulting titanium oxide nano-array at about 500 to about 950° C for 2 hours with a ramp rate of 5° C /min.

[0068] In some embodiments, the method includes seeding a substrate with TiO_2 polymeric sol (about 0.01 to about 0.1 mol/L) by dip-coating method. In some embodiments, the method includes submerging the seeded substrate into a mixture of deionized water, about 25% to about 40% hydrochloric acid, Titanium (III) chloride, about 5 to about 40% w/w solution, in about 0.5 to about 3.5 N Hydrochloric acid, and Hydrogen peroxide about 10% to about 45% aqueous solution. In some embodiments, the method includes heating the submerged seeded substrate in a microwave, heating to about 70 to about 90° C for about 45 min to about 90 min. In some embodiments, the method includes calcining the resulting

titanium oxide nano-array at about 500 to about 950° C for 2 hours with a ramp rate of about 3-5° C /min.

[0069] In some embodiments, the method includes loading a platinum group metals onto the TiO₂ nanowire array by dip-coating and subsequently calcining in air at about 500° C for 3 hours to about 4 hours to about 5 hours with a ramp rate of about 1.5 to about 2 to about 2.5° C /min.

[0070] In some embodiments, the substrate is a 2D substrate or a 3D substrate. In some embodiments, the substrate is cordierite. In some embodiments, the substrate is a cordierite honeycomb monolith. In some embodiments, the substrate is a 2D ceramic (e.g., glass, Si, etc.). In some embodiments, the substrate a fiber surface.

[0071] In some embodiments, the Ti (III) precursor is an Ti (III) alkoxide precursor. A wide variety of alkoxide precursors are suitable, such as C1 through C10 alkoxides. In some instances, a Ti (III) alkoxide can be a mixed Ti (III) alkoxide, in that the molecule has different alkoxides groups (e.g., having differing numbers of carbons, positional isomers, stereoisomers). Some examples of alkoxides include butoxide, methoxide (Ti(CH₃O)₃), and ethoxide (Ti(OCH(CH₃)₂)₃).

[0072] In some embodiments, the Ti (IV) precursor is an Ti (IV) alkoxide precursor. A wide variety of alkoxide precursors are suitable, such as C1 through C10 alkoxides. In some instances, a Ti (IV) alkoxide can be a mixed Ti (IV) alkoxide, in that the molecule has different alkoxides groups (e.g., having differing numbers of carbons, positional isomers, stereoisomers). Some examples of alkoxides include butoxide, methoxide (Ti(CH₃O)₄), and ethoxide (Ti(OCH(CH₃)₂)₄).

EXAMPLE #1

Example Materials

Substrate example

[0073] 3D cordierite substrates seeded with TiO₂ polymeric sol (0.025 mol/L) by dip-coating method – range of seeding: about 0.01 to about 0.1 mol/L

[0074] 4.66” (diameter) × 2.5” (length)

Example of reaction materials

[0075] Deionized (DI) water

[0076] Hydrochloric acid (37%) – range: about 25 to about 40% HCl

[0077] Titanium (III) chloride 20% w/w solution in 2N Hydrochloric acid; Range of Titanium (III) chloride: about 5 to about 40% w/w; Range of HCL: about 0.5 to about 3.5 N HCl

[0078] Hydrogen peroxide 30% aqueous solution; Range of Hydrogen peroxide: about 10% to about 45% aqueous solution

Example Method

Suitable microwave oven

[0079] Model: BP-125 Laboratory Microwave from Microwave Research & Applications, Inc.; Rated current/voltage/power: 15 A/120 V/1800 kW

Example of synthesis conditions

[0080] Microwave heating, 80 °C for 60 min; Range – about 50 to about 90° C for about 30 min to about 120 min

Example of calcination conditions

[0081] 500/900/1000 °C for 2 hours

[0082] Range – about 500° C for about 2 to about 4 hours; about 800° C for about 1 to about 3 hours; about 850 to about 950° C for about 0.5 to about 2.5 hours

[0083] Ramp = about 3 to about 5 °C /min

Examples of reaction volume, reaction time, and energy consumption

[0084] Volume of solution: 2L/cycle × 4 cycle = 8 L

[0085] Reaction time: 30 min/cycle × 4 cycle = 2 h

[0086] Energy consumption: 3.6 kW-h

Catalyst formation

[0087] In another embodiment a mesoporous TiO₂ nano-array was integrated onto cordierite honeycomb monolith via a solvothermal synthetic method followed by loading with platinum. The resulting catalyst has excellent activity as a diesel oxidation catalyst.

EXEMPLIFICATION

[0088] A typical synthesis process of TiO₂ nano-arrays onto the commercial cordierite honeycombs can be divided into two steps, i.e., (i) the substrate surface seeding TiO₂ and (ii) hydrothermal TiO₂ NW arrays growth. The seeding process was conducted by a dip-coating method assisted with sonication, which helps to create a uniform pre-seeding layer on the substrate channel surfaces to promote the heterogeneous growth of TiO₂ nano-arrays. For the growth process, a two-step sustained-release strategy was designed by using TiCl₃ as Ti source, H₂O₂ as an oxidizer to accelerate the oxidation from Ti³⁺ to Ti⁴⁺, and hydrochloride acid as pH controller to adjust the hydrolysis rate in solution. Cordierite honeycomb substrates in different sizes were used for different demonstrations.

[0089] The crystal structure, morphology, composition, specific surface area and thermal stability information of the catalysts as well as the bare TiO₂ nano-arrays were obtained through X-ray Diffraction (XRD), Raman spectroscopy, scanning electron microscope (SEM), transmission electron microscopy (TEM), X-ray photoelectron spectroscopy (XPS), Brunauer-Emmett-Teller (BET) surface area analysis and a combined thermogravimetry–differential thermal (TGA-DTA) - mass spectroscopy analysis.

[0090] The Pt/TiO₂ nano-array based monolithic catalyst devices were prepared by dip-coating method with a controlled PGM loading of 50 g-Pt/ft³ (1.766 g-Pt/L). The catalytic performance of the catalysts was tested under the simulated exhaust protocol by the low temperature combustion-diesel (LTC-D) condition.⁶⁸ The tests were conducted from room temperature to 600 °C with a ramping rate of 2 °C/min and a space velocity of 60000 h⁻¹. The catalytic performance, together with mechanical robustness and hydrothermal stability, were compared with the bench mark commercial DOC. Detailed description of the experimental procedures can be found below.

1.1. Chemicals and materials

[0091] All chemicals used for the synthesis of TiO₂ NW arrays in this work were used as received without further purification, including titanium (IV) isopropoxide (TTIP, 98+%, ACROS Organics™), nitric acid (HNO₃, 70%, SIGMA-ALDRICH), ethanol (C₂H₆O, Reagent Alcohol 200 Proof, PHARMCO-AAPER™), titanium (III) chloride (TiCl₃, 20% w/w solution in 2N Hydrochloric acid, ACROS Organics™), hydrogen peroxide solution (H₂O₂, 30% w/w in H₂O, contains inhibitor, SIGMA-ALDRICH), and hydrochloric acid

(HCl, 37%, SIGMA-ALDRICH) and Tetraammineplatinum(II) nitrate ($\text{H}_{12}\text{N}_6\text{O}_6\text{Pt}$, M.W. = 387.21, 99.99% metals basis, Alfa Aesar™).

[0092] The cordierite monolithic substrates (600 cpsi) were provided by Corning Inc. (Corning, NY). The cordierite monoliths had 1 mm $\times$ 1 mm square channels and a channel wall thickness of 100 μm , and the substrates were cut into different dimensions for different demonstrations. The commercial diesel oxidation catalyst (DOC) was obtained from an as received 2010 Ford F-250 DOC.

1.2. Synthesis of TiO_2 NW arrays on cordierite monoliths

[0093] In order to achieve uniformly distributed TiO_2 NW arrays throughout the multichannel cordierite monolith, we introduced two major steps in the nanostructure growth process: (i) substrate surface seeding TiO_2 and (ii) hydrothermal TiO_2 NW arrays growth.

[0094] In the seeding process, a TiO_2 polymeric sol of 0.025 mol/L was prepared by dissolving 7.1 g TTIP (0.025 mol) and 1.8 mL 0.01M diluted HNO_3 solution into 1000 mL ethanol during magnetic stirring. Monolithic cordierite substrates of 4.66-in. diameter and 2.5-in. length were first rinsed with acetone, ethanol and deionized water in an ultrasonic bath and then dried overnight at 110 $^\circ\text{C}$. The as-cleaned cordierite substrates were first dipped into the TiO_2 polymeric sol while being sonicated for 1 min and then the liquid was removed from the channels by air gun. The dip-coated substrates were first dried in a domestic microwave oven for 2 minutes and then further dried in a muffle furnace at 200 $^\circ\text{C}$ for 10 minutes. The sonicated dip-coating process was repeated 5 times to ensure that sufficient seeding nanoparticles stuck to the substrate channel surfaces. Afterwards, the dip-coated substrates were then annealed at 500 $^\circ\text{C}$ for 2 hours to enhance the crystallinity of the TiO_2 seeds, and finally, the seeded substrates were cut into desired dimensions for further synthesis.

[0095] In the subsequent hydrothermal process, a microwave-assisted hydrothermal synthesis method was used to integrate uniform TiO_2 NW arrays onto the seeded cordierite monolithic substrate in the present work. In a typical synthesis, 0-10.5 mL concentrated hydrochloride acid (37 wt.%) was firstly mixed with 180-200 mL deionized water (DIW) in a 200 mL beaker; then 1.732-6.061 mL TiCl_3 (20 wt.% in 2N HCl acid) was added in to the mixture as titanium precursors during stirring; after stirring for another 1 min, 0-20 mL H_2O_2 (30 wt.% in H_2O) was added as oxidizer to promote the transition from Ti^{3+} to Ti^{4+} ions. Hydrochloride acid in the recipe is added to control the hydrolysis rate of the precursors by ensuring an acidic solution pH. After stirring for another 1 min, seeded cordierite substrates

were soaked into the mixture with the channels perpendicular to the bottom of the beaker to facilitate the mass transfer of the solutions during the synthesis. The synthesis was carried out in a BP-125 Laboratory Microwave from Microwave Research & Applications, Inc. equipped with a 1/16" PFA coated temperature probe (Type K) from OMEGA. The reactions were conducted at 75-95 °C for 10-180min, and the desired temperatures can be reached within 2 minutes with microwave radiation, and controlled within ± 2 °C during the reactions. After synthesis, the samples were removed from the reactant solutions and soaked into DIW immediately to stop the reactions; then the cooled samples were rinsed extensively with DI water and dried overnight at 100 °C in oven. Some samples were further annealed at different temperatures to investigate the thermal stability of the as-grown TiO₂ NW arrays. In some control experiments, hot plate was used as heating source to study the effect of heating methods on the growth of TiO₂ NW arrays. Effects of initial reactant solutions, including the concentration of TiCl₃, H₂O₂, and acidity, and the effects of experimental conditions, including temperature, pre-seeding, reaction time and multi-batches, were also studied in the present work.

1.3. Preparation of TiO₂ nano-array based monolithic catalyst devices

[0096] The Pt/TiO₂ nano-array based cordierite monolithic catalysts with a loading ratio of 50 g-Pt/ft³ (1.766g-Pt/L) were prepared by dip-coating method. Platinum aqueous solution with a nominal composition of 1 mg-Pt/mL was prepared by dissolving 0.0397g Tetraammineplatinum (II) nitrate (M.W. = 387.21, 99.99% metals basis) into 20 mL DI water and sonicated for 30 min. The solution was sonicated for another 30 min before use each time. TiO₂ NW arrays (average length of $\sim 1\mu\text{m}$) rooted cordierite substrates were used for Pt catalyst deposition to achieve the Pt/TiO₂ nano-array based cordierite monolithic catalyst. First, 3.532 mL of the prepared Pt²⁺ aqueous solution was transferred into a sample vial (20 mL), and one piece of sample with dimension of 2 cm $\times$ 1 cm $\times$ 1 cm was soaked in solution under sonication. Then the liquid was removed from the channels by air gun before the sample was transferred to a domestic microwave oven and dried under the microwave irradiation. After the sample became completely dry, it was calcined at 200 °C for 5 minutes before next dip-coating process. This deposition procedure was repeated for several cycles until all the solution in the vial was used up. Afterwards, the dip-coated catalyst samples were annealed at 500 °C for 2 h with ramping rate of 2 °C/min. The final heat treatment was

carried out in H₂/Ar (4 vol.% H₂) mixed gas atmosphere at 500 °C for 2 h with a flow rate of 50 sccm.

1.4. Characterization of the materials

[0097] The X-ray diffraction (XRD) patterns on the prepared nano-array structures was acquired using a BRUKER D2 X-ray diffractometer (Cu K α radiation, $\lambda = 1.540598 \text{ \AA}$) with an operating beam voltage of 30.0 kV, and a beam current of 10 mA. The morphology and structure of nano-array catalysts were characterized using a field-emission SEM (FEI TeneoLoVac) at an accelerating voltage of 20.0kV, and a high resolution TEM (FEI Talos F200X S/TEM, 200 kV). The XPS measurements were performed by Quantum 2000 Scanning ESCA Microprobe, using monochromatic Al K α X-ray source. The shift of binding energy due to relative surface charging was corrected using C 1s level at 284.8 eV as an internal standard. TGA-MS was conducted using a Netzsch TG 209 F1 Libra thermogravimetric analyzer coupled to a QMS 403C quadrupole mass spectrometer. The samples were heated from 27 to 900 °C under 50 ml/min in argon. Raman spectra were taken with a Renishaw 2000 Raman microscope with an Ar⁺ ion laser (514 nm) as the excitation source. The surface areas were calculated by the Brunauer–Emmett–Teller (BET) method, and the pore size distributions were obtained by the Barrett–Joyner–Halenda (BJH) method from the nitrogen adsorption–desorption isotherms measured at 77 K using a Micromeritics ASAP 2020 Automatic Chemisorption Analyzer.

1.5. Hydrothermal stability and mechanical robustness

[0098] The hydrothermal stability and mechanical robustness were characterized on both the nano-array based catalysts and the commercial DOC samples.

[0099] To evaluate the hydrothermal stability of the catalysts, the samples were hydrothermally aged in the following atmosphere at 700 °C for 100 hr.

Table 4. Hydrothermal aging parameters

Component	Concentration (vol. %)
O ₂	10
H ₂ O	5
CO ₂	5
N ₂	Balanced

To evaluate the mechanical robustness of the catalysts, each sample was sonicated in water for 4 hr., during which, the samples were taken out, dried and weighted at 30, 60, 120, 180 and 240 min. The changes in sample weight were used to characterize the mechanical stability of the catalysts, as shown in FIG. 8.

1.6. Catalytic performance evaluation

[00100] The catalytic performance of the Pt/TiO₂ nano-array based monolithic catalysts were studied and compared with commercial DOC samples under the Low Temperature Diesel Combustion (LTC-D) simulated exhausted conditions.⁶⁸ The compositions of the simulated gasses are listed in Table 5.

Table 5. LTC-D simulated exhaust gas parameters

Component	Concentration (vol. %)
O ₂	12
H ₂ O	6
CO ₂	6
H ₂	0.04
CO	0.2
NO	0.01
Ethylene (C ₂ H ₄)	0.0833
Propylene (C ₃ H ₆)	0.0333
Propane (C ₃ H ₈)	0.0111
N ₂	Balanced

[00101] The tests were conducted on an Agilent 7890 Gas chromatography (GC) system coupled with an Agilent 5977 Mass Spectroscopy Detector (MSD). The oxidation studies

were carried out in a temperature range of 60-600 °C with a heating rate of 2 °C/min. The dimensions of the tested sample are 0.5 cm×0.5 cm×1 cm, and the flow rate of the simulated gas fed is 250ccm, making the space velocity to be 60000 h⁻¹. The schematic of the experimental setups are shown in FIG. 9. The catalytic performance of the catalysts were evaluated by calculating the conversions of different species in the simulated exhaust using the following equation.

$$\text{Conversion} = \frac{C_{\text{inlet}}^i - C_{\text{outlet}}^i}{C_{\text{inlet}}^i} \times 100\% \quad (\text{Eq.01})$$

where C_{inlet}^i and C_{outlet}^i are the concentration of component i at the inlet and outlet.

Results and Discussion

Structural and compositional analysis

[00102] FIGs. 1A-D show a photograph and schematic illustrations, elemental distribution and general morphologies of the grown TiO₂ nano-arrays rooted inside the channels of commercial honeycomb monolith. The Energy-dispersive X-ray (EDX) mapping in FIG. 1B indicates that the nano-arrays are uniformly grown onto the channel surfaces, which confirms the configurations shown in the 3D schematics in FIG. 1A. FIGs 1C and 1D reveal the more detailed morphologies of the as-synthesized nano-arrays from the top view and cross-sectional view, respectively. The macropores between adjacent nanowires shown in the top-view image not only facilitate the loading and dispersion of the catalytic materials during preparation, but also better expose the active sites and promote the gas-solid interaction by a shorter diffusion length than the traditional wash-coated particulate formed monolith catalysts.⁹ The cross-sectional view in FIG. 1D demonstrates the good adherence between the grown nano-arrays and the cordierite substrate, which enhances the mechanical robustness of the final catalytic devices. Furthermore, the low magnification top-view and cross-sectional view images inserted in FIGs. 1C and 1D reveal good uniformity of the nano-array distribution on the channels.

[00103] FIGs. 2A-F display the crystal structural, compositional and thermal stability information of the prepared nano-arrays based on the results from XRD, Raman spectra, TEM and TGA-DTA/Mass spectra. The XRD pattern of the as-synthesized nanowires is shown in FIG. 2A, and the major peaks can be indexed according to the standard diffraction

peaks of hydrogen titanium oxide hydrate ($\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$, JCPDS 47-0124). The broad diffraction peaks and relatively high intensity of the background indicate the poor crystallinity of the as-synthesized nanowires. FIGs. 2B-D display the high resolution TEM (HRTEM), selected area electron diffraction (SAED) pattern, and bright field (BF) images of the as-prepared nanowires. The BF image of the nanowires in FIG. 2D confirms the morphology shown in FIGs. 1C and 1D, and the HRTEM image in FIG. 2B displays the lattice image of the $\{411\}$ planes in $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ crystals. The SAED pattern shown in FIG. 2C can be indexed according to $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ (JCPDS 47-0124), and the relatively diffusive diffraction rings confirm the low crystallinity of the as-synthesized nanowires.

[00104] The thermal stability and structural evolution of the as-synthesized nanowires were investigated by Raman spectra and XRD on the samples after different heat treatments. As revealed in FIG. 2E, typical Raman peaks for anatase and rutile phases were detected from the TiO_2 nano-array rooted monoliths annealed at 500, 800, 900 and 1000 °C.⁶⁹⁻⁷⁰ The characteristic Raman peaks at 285.22, 526.81, 682.36 and 915.98 cm^{-1} are from the fresh nanowire sample containing the $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ phase. The evolution of the Raman spectra with increasing temperature indicates that the as-synthesized nanowires maintain the $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ structure below 100°C, and change to anatase structure after being annealed at 500 °C. The Raman spectra of the 800 °C treated sample is similar to that of the 500 °C treated one, but with sharper peaks for anatase due to the enhanced crystallinity after higher temperature treatment. When the temperature increases to 900 °C, rutile TiO_2 starts to appear, and the sample turns to a mixture of anatase and rutile TiO_2 ; the sample totally transforms into rutile TiO_2 after being annealed at 1000 °C. The crystal structural evolution of the TiO_2 nano-arrays can also be revealed by the XRD patterns of the samples annealed at different temperatures, as shown in FIG. 10. The changes in microstructure morphologies of the TiO_2 nano-arrays with the annealing temperature are presented in the SEM and bright field TEM images in FIG. 11A-D. The results show that the nano-array structure retains below 500 °C, turns rounded at 800 °C, and finally lose the array-structure at 1000 °C.

[00105] The compositional and structural evolution of the as-synthesized nanowires were further analyzed by XPS and TGA-DTA/Mass spectroscopy methods. FIGs. 12A and 12B show the results of XPS analysis from the as-synthesized nano-arrays. The deconvoluted Ti 2p spectra confirms the valence state of titanium to be Ti^{4+} (Ti 2p_{3/2} at 459.25eV and 2p_{1/2} at 465eV). The deconvoluted O 1s spectra indicates the existence of three types of oxygen species, including crystal lattice oxygen (Ti-O-Ti at 529.4 eV), hydroxyl groups (OH^- at

531.7 eV) and adsorbed molecular H₂O (at 535.2 eV).⁷¹⁻⁷³ The oxygen specie in the hydroxyl groups comes from the H₂Ti₂O₅·H₂O phase identified in FIG. 2A, and the crystal lattice oxygen is supposed to be from an amorphous titanium dioxide because no diffraction patterns can be detected in the XRD or SAED images in FIGs. 2A and 2C. The presence of three types of oxygen species was also supported by the TGA-DTA/mass spectra shown in FIG. 2F. The endothermic peak at 129.5°C with mass loss of 5.56% and H₂O signal in the mass spectra is due to the desorption of physically adsorbed water; the endothermic peaks at 264 and 383.8°C with mass loss of 9.85% and H₂O signal peak are due to the desorption of crystalliferous water and the start of removal of OH⁻ groups (dehydroxylation); the final mass loss of 1.26% and the H₂O signal peaks in the temperature range of 350-500°C are due to the complete decomposition of OH⁻ groups (dehydroxylation).⁷⁴⁻⁷⁵ Meanwhile, the phase transitions observed in the Raman spectra and XRD patterns in FIG. 2E and FIG. 10 can be supported by the DTA data. The exothermal peaks at 315.2 and 434.5°C correspond to the structural transition from H₂Ti₂O₅·H₂O to anatase, and the exothermal peaks in the temperature range of 600-900°C correspond to the further crystallization of anatase and structural transition from anatase to rutile. Therefore, the experimental results above indicate that the fresh nanowires are a mixture of amorphous TiO₂ and hydrogen titanium oxide hydrate, which transforms to anatase and then rutile when heated from room temperature to 1000°C.

Mechanism of the growth process

[00106] Hydrothermal synthesis is a competition between homogeneous and heterogeneous nucleation in solution.⁷⁶⁻⁷⁷ The heterogeneous growth of nano-arrays on substrates requires a suitable reaction rate because a too vigorous reaction favors the homogeneous nucleation, making most precursors precipitate in powder form; while a too slow reaction will cancel both the homogeneous and heterogeneous nucleation. Therefore, there is a critical range between the two extremes which can favor the heterogeneous growth of nano-arrays while prohibiting the homogeneous nucleation.

[00107] In this work, instead of using the one-step hydrolysis of Ti⁴⁺ in autoclaves,⁴¹⁻⁴⁵ we used TiCl₃ as the titanium source, H₂O₂ as the oxidizer, hydrochloride acid as the acidity controller, and proposed a two-step sustained-release strategy for the synthesis of TiO₂ nano-arrays, as described in the schematics shown in FIG. 3. Initially, the titanium precursors exist in the form of Ti³⁺, which is stable in aqueous solution; and then Ti³⁺ ions are oxidized to Ti⁴⁺

with the presence of H_2O_2 and microwave irradiation; subsequently, with suitable acidity and temperature, Ti^{4+} can be gradually hydrolyzed to form hydrogen titanium oxide hydrate, and finally transforms into TiO_2 . It should be noted that H_2O_2 plays an essential role in the growth process of the nano-arrays. With the existence of H_2O_2 , uniform nano-arrays of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ can be formed on the surface of the substrates. However, without the presence of H_2O_2 , no nano-array structures but only randomly distributed precipitates can be found on the surfaces of the substrate. Furthermore, the Raman spectra of the sample synthesized without H_2O_2 indicates that the precipitate is a mixture of rutile and anatase, and no peaks of the $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ phase can be detected. The Raman spectra and SEM images of the samples prepared with and without H_2O_2 are displayed in FIG. 13A-C.

[00108] In this two-step reaction, H_2O_2 accelerates the reaction by oxidizing Ti^{3+} to Ti^{4+} , and the concentration of hydrochloride acid and temperature can be used to control the hydrolysis rate of the Ti^{4+} precursors. Therefore, by adjusting both positive and negative parameters, we can have greater flexibility to control the reaction rate and achieve heterogeneous growth of TiO_2 NW arrays at ambient temperature. This two-step sustained-release strategy may also be applicable to the heterogeneous growth of other metal oxide nano-arrays involving the oxidation and hydrolysis processes.

Effects of the synthetic conditions on the growth process

Table 1. Summary of the effects of initial reactant concentrations on the growth process of TiO_2 nano-arrays on cordierite honeycomb substrates.

Sample ^a	Volume of reactants (mL) ^b				A.L. (μm) ^c	Crack
	TiCl_3	H_2O_2	HCl	H_2O		
RT-1	1.732	15	3.694	186.074	0.68	No
RT-2	3	15	3.5	185	0.98	No
RT-3	4.329	15	3.296	183.874	1.18	Yes
RT-4	6.061	15	3.031	182.408	1.16	Yes
RO-1	3	0	3.5	200	No arrays	--
RO-2	3	9	3.5	191	0.90	No
RO-3	3	15	3.5	185	0.98	No
RO-4	3	20	3.5	180	0.46	No
RH-1	3	15	0	185.5	0.21	Yes
RH-2	3	15	1.5	187	0.65	Yes
RH-3	3	15	3.5	185	0.98	No
RH-4	3	15	7.5	181	No arrays	--
RH-5	3	15	10.5	178	No arrays	--

^a: The starting materials are seeded cordierite substrates (1 cm × 2 cm × 3 cm), and the reactions were carried out at 80 °C for 60 min under microwave irradiation.

^b: All chemicals listed were used as received without further purification.

^c: A.L. = average length of the nanowire arrays

[00109] The effect of initial reactant concentration on the growth of TiO₂ nano-arrays is summarized in Table 1. Three comparison groups, RT-X, RO-X and RH-X (T = TiCl₃, O = H₂O₂, H = HCl, X = 1~5), were designed by setting the initial concentrations of TiCl₃, H₂O₂ and HCl as variables while keeping other parameters constant, respectively. The average length of the nano-arrays and the presence of cracks in the nano-array layers are used to qualify the growth. The top-view and cross-sectional view of the TiO₂ nano-arrays from the three comparison groups are displayed in FIGs. 14A-H, 15A-H, and 16A-H, respectively. Generally, the increasing concentration of all three components, TiCl₃, H₂O₂ and HCl, can promote the growth of the nano-arrays at low concentrations, but prohibit or totally cancel the heterogeneous growth at higher concentrations. More specifically, the RT-X group indicated that the nano-arrays ceased to grow longer with TiCl₃ concentration higher than 0.50 wt.%, and higher density nano-arrays formed with smaller interspace between adjacent arrays. Cracks started to appear in such nano-array layers, which could be due to the internal stress caused by the increased hydrolysis rate. H₂O₂ plays an essential role in the growth of the nano-array, but higher concentration of H₂O₂ can also prohibit the growth of the nano-arrays, as indicated by Sample RO-4. Possible reasons can be that too much H₂O₂ accelerated the hydrolysis process, and promoted the homogenous rather than heterogeneous nucleation. Hydrochloride acid is used to control the reaction rate by creating a suitable acid environment. Low concentration of HCl resulted in more closely packed and shorter nano-arrays with cracks, as indicated by the samples of RH-1 and RH-2, while too much HCl can totally cancel the heterogeneous growth of nano-arrays. That is because the Ti⁴⁺ ions hydrolyze much faster in less acid solutions, and more Ti⁴⁺ precursors nucleate homogeneously rather than heterogeneously in the solution. This assumption is supported by the fact that more homogeneously precipitated particles were found in the reacted solutions for Sample RH-1 and RH-2. Therefore, the observations from the three comparison groups elucidate how the initial concentrations of TiCl₃, H₂O₂ and HCl effect the growth of TiO₂ NW arrays, which successfully supports the reaction mechanism proposed in the Mechanism

of the Growth Process section. The optimized initial concentrations of the reactants are 3 mL TiCl_3 (20%), 15 mL H_2O_2 (30%), 3.5 mL hydrochloride acid (37%) in 185 mL DI water.

[00110] Besides the initial reactant concentration effect, we also studied the effects of the external parameters, including the heating methods, pre-seeding layers, and reaction temperatures. The SEM images in FIGs. 4A-C characterize the morphologies of TiO_2 nano-arrays synthesized using hot plate and microwave as heating sources. FIGs. 4A and 4C indicate that the average length of the nano-arrays prepared by hot plate (0.43 μm) is much shorter than that prepared by microwave oven (0.90 μm), and even shorter than the nano-arrays prepared by microwave using half reaction time (0.66 μm) in FIG. 4B. The higher growth rate of the nano-arrays by microwave is due to the rapid and uniform volumetric heating of microwave irradiation, as compared with the conventional conduction heating by hot plate.⁵⁵ When heated by microwave, the temperature increases uniformly in the solution and reached the desired temperature quickly. While for the solution heated by hot plate, the temperature increases gradually through conduction, which not only is of low efficiency, but also results in a temperature gradient in the solution. The difference in the temperature of the solutions further causes the different reaction rates within the reacting volume, because the outer layer solution with higher temperatures reacts more vigorously than the inner layer solution. As such, homogeneous nucleation would be favored in the outer solution, which is evidenced by the more homogeneously precipitated particles formed in the solutions heated by hot plate. Therefore, microwave irradiation is more efficient than the conventional thermal conduction heating method for industrial level fabrication with higher production rate and material utilization efficiency.

[00111] Pre-seeding is another crucial ‘parameter’ for controlling the hydrothermal synthesis quality of nano-arrays. Generally, heterogeneous growth on existing seeds tends to be energetically more favorable than nucleation in homogeneous solution because the existing seeds bypass the activation energy barrier for nucleation.⁷⁶ In this work, the promotion effect of pre-seeding on the growth of nano-arrays is also significant even for growing the nanomaterials with poor crystallinity. The morphologies of samples with and without pre-seeding layers are compared in FIGs. 17A-D. For the unseeded samples, bare cordierite surfaces can still be found even after 60 min reaction. While for the sample with pre-seeding layers, a uniform nano-array layer was quickly formed on the surface of cordierite substrates in the first 10 minutes, and more ordered and uniform nano-array layers were formed after 60 min.

[00112] Temperature is an important parameter for any chemical reactions, and usually has a dominant influence on the reaction rate. In this work, we studied the growth rates of the TiO₂ nano-arrays at the temperature of 75, 80, 90 and 95 °C. FIGs. 5A and 18A-P display the evolutions of the average length and the morphology of the TiO₂ nano-arrays with the reaction time at different temperatures, respectively. The corresponding changes in sample weight are also presented in FIG. 19. From FIG. 5A, we can see that the nano-arrays in all four temperatures eventually tend to reach a maximum length, and the higher temperature results in higher initial growth rates and shorter time for the nano-arrays to cease the growth. For the samples synthesized at 75 and 80 °C, no nano-arrays were formed in the first 10 min, indicating an incubation time for the formation of the first layers of nano-arrays at low temperatures. Meanwhile, there is weight loss in the samples synthesized at 75 and 80 °C in the first 10 minutes. That is because the cordierite substrates were corroded by the acid solution, and there was not enough TiO₂ precipitated onto the substrates at the beginning of growth process. For the samples synthesized at 90 and 95 °C, no obvious incubation time was detected, and the average lengths of the nano-arrays increased to 0.18 and 0.21 μm in the first 10 and 5 min, respectively. The growth rates of TiO₂ nano-arrays in the present work were summarized and compared with the data from the literature using conventional autoclave based methods in Table 2, and the growth rate of 42 nm/min in our work is the highest among these data.

[00113] It is worthwhile looking into the 90 and 95 °C growth processes, as they led to the longest final length and the highest initial growth rate, respectively. As shown in FIG. 5B, the 90 and 95 °C growths reached the maximum length of ~0.75 μm and ~0.53 μm after 50 and 30 min, respectively. The reason for the higher initial growth rate but shorter final length in the 95 °C process might be that higher temperature promotes the process of heterogeneous growth of TiO₂ nano-arrays, decomposition of H₂O₂, and evaporation of HCl simultaneously. At the beginning, sufficient amount H₂O₂ and HCl sustains the two-step sustained-release growth process. As the reaction proceeds when H₂O₂ and HCl are consumed, homogeneous precipitation of nanoparticles becomes favored over the heterogeneous growth of nano-arrays. That is why clean and ordered nano-arrays formed at 95 °C with 30 min growth duration (FIG. 18N), while homogeneously precipitated nanoparticles were observed in the samples grown for 40 (FIG. 18O) and 60 min (FIG. 18P). Moreover, the crystal structures of the precipitates before and after the nano-arrays reaching the maximum length formed are also different. FIG. 5B displays the Raman spectra of the samples synthesized at 95 °C for 30

and 60 min, which correspond to the SEM images of the samples in FIGs. 18N and 18P, respectively. The Raman spectra and SEM images indicate that, before the nano-arrays reach the maximum length at 30 min, the nano-arrays are mainly composed of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$; after the nano-arrays reach the maximum length, homogeneous precipitated particles begin to form, and the sample becomes a mixture of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$, anatase and rutile. The change in phase composition of the precipitates agrees well with the reaction mechanism proposed in the Mechanism of the Growth Process section. Obviously, with the presence of H_2O_2 , ordered $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$ nano-arrays were formed through the two-step sustained release growth process, and when H_2O_2 is consumed, anatase and rutile phases precipitate instead of $\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$. Therefore, even though we did not obtain the longest final length from the 95 °C growth process, the initial growth rate of 42nm/min is still promising. As we keep refreshing the solutions through continuous flow process using dedicated reactors, the concentration of reactants may be maintained, and the growth of TiO_2 nano-arrays can be sustained.

Table 2. Summary of synthetic methods and growth rate of TiO_2 nano-arrays.

Ref.	Recipe ^a	Conditions	Substrates ^b	A.L. (μm) ^c	G.R. (nm/min) ^d
This work	$\text{TiCl}_3 + \text{H}_2\text{O}_2 + \text{HCl} + \text{DIW}$	90 °C/10 min 95 °C/5 min	Cordierite monolith	0.18 0.21	18 42
¹³	Ti(IV) butoxide + TiCl_4 + HCl + Toluene	150 °C/10 h	Cordierite monolith	2	3.33
²⁵	$\text{TiCl}_3 + \text{NaCl} + \text{DIW}$	180 °C/4 h	Cordierite monolith	0.25	0.83
⁴²	Ti(IV) butoxide + HCl + DIW	150 °C/20 h	FTO glass	2	1.67
⁴¹	Ti(IV) butoxide + TiCl_4 + HCl + Toluene	180 °C/2 h 180 °C/4 h 180 °C/8 h 180 °C/22 h	FTO glass	2.1 3.2 3.8 4	17.5 13.33 6.33 3.00
⁷⁸	TBOT + HCl + Toluene	180 °C/3 h 180 °C/20 h	FTO glass	2 6	11.17 5
⁷⁹	TTIP + ACAC + Na_2EDTA + DIW	200 °C/7 h 200 °C/11 h 200 °C/20 h	FTO glass	0.7 1.1 1.4	1.67 1.67 1.17
⁶⁷	$\text{TiCl}_3 + \text{DIW}$	150 °C/12 h	FTO glass	9.6	13.33

^a: TBOT = $\text{Ti}(\text{OC}_4\text{H}_9)_4$ tetrabutyl titanate; TTIP = Titanium (IV) isopropoxide; ACAC = Acetylacetone; DIW = Deionized water;

^b: FTO = fluorine doped Tin oxide

^c: A.L. = average length of the nano-arrays

^d: G.R. = growth rate of the nano-arrays

Scalable fabrication on commercial monolithic honeycomb substrates

[00114] The feasibility of hydrothermal synthesis of 1D nano-arrays onto the channeled monoliths has been demonstrated on small-sized samples in our previous reports.⁸⁻¹¹

However, challenges remain when scaling up the samples to industrially relevant sized substrates due to the difficulty of efficient mass transfer of precursors onto the space confined channel-surfaces. Especially when the reaction temperature is low, the reactant solution is relatively stagnant during the synthesis, resulting in less uniformly distributed nano-arrays across the channels.^{8, 10, 22}

[00115] In the present study, using the robust experimental set-up shown in FIGs. 20A-B, uniform TiO₂ nano-arrays with an average length of ~0.7 μm were successfully integrated onto a full-size commercial honeycomb, as shown in the top views and cross-sectional views in FIG. 20C. The good uniformity of the nano-arrays can be attributed to the large amount of oxygen bubbles produced during the reaction. Microwave radiation heats the solution by alternating electromagnetic fields, in which H₂O₂ preferably decomposes on the substrate surfaces to release oxygen. Therefore, large amount of tiny O₂ bubbles keep coming out through the channels during the reaction, which greatly enhances the mass transfer through the channels, and thus fresh precursors will be continuously transferred to the surfaces and participate in the reactions. Considering the easy process as well as the low temperature and pressure requirements, this robust one-pot hydrothermal synthesis method can be very promising if integrated with industrially relevant equipment for mass production.

Application as catalytic converters

[00116] The catalytic performance for LTC-D simulated exhaust oxidation over the Pt supported TiO₂ nano-array based monolithic catalysts and the wash-coated commercial DOC samples are summarized in FIGs. 6A-F and Table 3. With a PGM loading of 50 g/ft³, the fresh Pt supported TiO₂ nano-array based catalyst exhibits light-off temperatures as low as ~150 °C for the oxidation of CO and HCs species (FIGs. 6A and 6B), which is comparable to the performance of the commercial DOC samples with a 120~200 g/ft³ PGM loading amount.⁸⁰ After being hydrothermally aged at 700 °C for 100 hr., the Pt supported TiO₂ nano-array based catalyst shows a slight increase of ~50 °C in the light-off temperatures of

hydrocarbon species (FIGs. 6C and 6D), which reveals the excellent hydrothermal stability of the nano-array based samples. The High Angle Annular Dark Field (HAADF) and EDX mapping images displayed in FIGs. 7A-C exhibit the uniformly dispersed Pt NPs on the TiO₂ NW surfaces with a size distribution of 0.5~2.5 nm. The HRTEM images inserted in FIG. 7A confirm the presence of metallic Pt (JCPDS 04-0802) and anatase TiO₂ (JCPDS 21-1272) in the fresh catalysts. The XRD patterns displayed in FIG. 21 indicate a phase transition from anatase (JCPDS 21-1272) to rutile (JCPDS 21-1276) in the support materials during the extended hydrothermal aging process at 700 °C. Although the presence of XRD peaks for metallic Pt indicates the existence of larger Pt particles in hydrothermally aged samples, the well-maintained catalytic activity and the highly dispersed Pt NPs demonstrate the excellent hydrothermal stability with enhanced sintering resistance for TiO₂ nano-arrays.

Table 3. Summary of light-off temperatures of different components^{a, b}.

Nano-array based catalysts									
Component	Fresh catalysts			HT aged catalysts ^c			Sonicated catalysts		
	T10	T50	T90	T10	T50	T90	T10	T50	T90
CO	95	135	159	110	176	228	80	123	176
THC	153	171	230	210	231	245	163	172	280
C ₂ H ₄	160	170	182	220	231	240	163	172	179
C ₃ H ₆	140	169	180	200	227	240	163	172	179
C ₃ H ₈	192	312	410	230	320	418	175	352	430
Commercial DOC samples									
Component	Fresh catalysts			HT aged catalysts ^c			Sonicated catalysts		
	T10	T50	T90	T10	T50	T90	T10	T50	T90
CO	100	131	155	107	149	160	202	216	280
THC	141	155	253	151	190	275	220	295	465
C ₂ H ₄	145	155	162	169	200	222	245	300	490
C ₃ H ₆	131	151	161	147	161	181	215	268	340
C ₃ H ₈	230	290	325	280	320	346	372	430	466

^a: Light-off temperatures in Celsius (°C)

^b: T10 = temperature of 10% conversion; T50 = temperature of 50% conversion; T90 = temperature of 90% conversion;

^c: HT = hydrothermally aged at 700 °C for 100 hr.

[00117] The catalytic performance of the sonicated samples are compared in FIGs. 6E and 6F, in which, no significant changes in the light-off temperatures can be observed over the nano-array based catalysts, while the commercial DOC samples showed degraded catalytic activity due to the loss of materials. The evolution of sample weights of the nano-array based monoliths and the commercial DOC samples are displayed in FIG. 8. As can be seen, there was an 8% and 11% weight loss for the fresh and hydrothermally aged commercial DOC samples, respectively. However, for the nano-array based catalysts, negligible weight loss can be observed during sonication. The excellent mechanical stability of the Pt supported TiO₂ nano-array based monolithic catalysts results from the good adherence between the grown nano-arrays and the cordierite substrate. Automotive catalytic converters work in the environment with continuous vibrations, so the mechanical stability is of great importance for the life cycles of the devices. The in-situ grown nano-arrays have a stronger interface with the substrates than the wash-coated layers integrated by binders, therefore, exhibit enhanced mechanical stability and extended service life compared with the wash-coated counterparts.

Conclusions

[00118] Uniform TiO₂ nano-arrays were successfully integrated onto the commercial monolithic substrates through a facile microwave-assisted hydrothermal method. Instead of using the conventional one-step hydrolysis hydrothermal method, a two-step sustained-release reaction strategy was designed to achieve the heterogeneous nucleation and growth of H₂Ti₂O₅·H₂O nano-arrays at low temperature (< 100 °C) and pressure with controllable reaction rate, which were readily converted into TiO₂ nano-arrays through post thermal annealing. By adjusting the initial concentrations of TiCl₃, H₂O₂ and hydrochloride acid as well as other synthetic parameters, a growth rate of 42 nm/min was achieved. When loaded with 50 g-Pt/ft³, the TiO₂ nano-array rooted monolithic catalysts showed excellent low light-off temperatures for CO and HCs species (< 150 °C) under LTC-D simulated exhaust conditions. Compared with commercial wash-coated DOC samples, prominent hydrothermal stability and improved mechanical robustness were demonstrated on the samples after hydrothermal aging at 700 °C for 100 hours and sonicated in water for 4 hours and, respectively. This approach provides a new pathway for low-temperature scalable synthesis

and manufacturing of TiO₂ nano-array integrated catalytic reactors with good production rates and enhanced material utilization efficiency.

References

- (1) Kim, C. H.; Qi, G.; Dahlberg, K.; Li, W. *Science* 2010, 327, 1624-1627.
- (2) Whitesides, G. M.; Crabtree, G. W. *Science* 2007, 315, 796-798.
- (3) Tomašić, V.; Jović, F. *Appl. Catal., A* 2006, 311, 112-121.
- (4) Avila, P.; Montes, M.; Miro, E. E. *Chem. Eng. J.* 2005, 109, 11-36.
- (5) Williams, J. L. *Catal. Today* 2001, 69, 3-9.
- (6) Heck, R. M.; Gulati, S.; Farrauto, R. J. *Chem. Eng. J.* 2001, 82, 149-156.
- (7) Zamaro, J. M.; Ulla, M. A.; Miró, E. E. *Chem. Eng. J.* 2005, 106, 25-33.
- (8) Ren, Z.; Guo, Y.; Gao, P.-X. *Catal. Today* 2015, 258, 441-453.
- (9) Guo, Y.; Ren, Z.; Xiao, W.; Liu, C.; Sharma, H.; Gao, H.; Mhadeshwar, A.; Gao, P.-X. *Nano Energy* 2013, 2, 873-881.
- (10) Wang, S.; Ren, Z.; Guo, Y.; Gao, P.-X. *CrystEngComm* 2016, 18, 2980-2993.
- (11) Gao, P.-X.; Shimpi, P.; Gao, H.; Liu, C.; Guo, Y.; Cai, W.; Liao, K.-T.; Wrobel, G.; Zhang, Z.; Ren, Z. *Int. J. Mol. Sci.* 2012, 13, 7393-7423.
- (12) Du, S.; Tang, W.; Guo, Y.; Binder, A.; Kyriakidou, E. A.; Toops, T. J.; Wang, S.; Ren, Z.; Hoang, S.; Gao, P.-X. *Emiss. Control Sci. Technol.* 2017, 3, 18-36.
- (13) Hoang, S.; Lu, X.; Tang, W.; Wang, S.; Du, S.; Nam, C.-Y.; Ding, Y.; Vinluan III, R. D.; Zheng, J.; Gao, P.-X. *Catal. Today* 2017.
- (14) Tang, W.; Wang, S.; Xiao, W.; Du, S.; Lu, X.; Hoang, S.; Ding, J.; Gao, P.-X. *Catal. Today* 2017.
- (15) Wang, S.; Wu, Y.; Miao, R.; Zhang, M.; Lu, X.; Zhang, B.; Kinstler, A.; Ren, Z.; Guo, Y.; Lu, T. *CrystEngComm* 2017, 19, 5128-5136.
- (16) Weng, J.; Lu, X.; Gao, P.-X. *Catalysts* 2017, 7, 253.
- (17) Tang, W.; Ren, Z.; Lu, X.; Wang, S.; Guo, Y.; Hoang, S.; Du, S.; Gao, P.-X. *ChemCatChem* 2017.
- (18) Du, S.; Tang, W.; Lu, X.; Wang, S.; Guo, Y.; Gao, P. X. *Adv. Mater. Interfaces* 2017.
- (19) Ren, Z.; Wu, Z.; Song, W.; Xiao, W.; Guo, Y.; Ding, J.; Suib, S. L.; Gao, P.-X. *Appl. Catal., B* 2016, 180, 150-160.

- (20) Chen, S.-Y.; Song, W.; Lin, H.-J.; Wang, S.; Biswas, S.; Mollahosseini, M.; Kuo, C.-H.; Gao, P.-X.; Suib, S. L. *ACS Appl. Mater. Interfaces* 2016, 8, 7834-7842.
- (21) Wang, S.; Ren, Z.; Song, W.; Guo, Y.; Zhang, M.; Suib, S. L.; Gao, P.-X. *Catal. Today* 2015, 258, Part 2, 549-555.
- (22) Ren, Z.; Botu, V.; Wang, S.; Meng, Y.; Song, W.; Guo, Y.; Ramprasad, R.; Suib, S. L.; Gao, P.-X. *Angew. Chem., Int. Ed.* 2014, 53, 7223-7227.
- (23) Xiao, W.; Guo, Y.; Ren, Z.; Wrobel, G.; Ren, Z.; Lu, T.; Gao, P.-X. *Cryst. Growth Des.* 2013, 13, 3657-3664.
- (24) Ren, Z.; Guo, Y.; Zhang, Z.; Liu, C.; Gao, P.-X. *J. Mater. Chem. A* 2013, 1, 9897-9906.
- (25) Guo, Y.; Liu, G.; Ren, Z.; Piyadasa, A.; Gao, P.-X. *CrystEngComm* 2013, 15, 8345-8352.
- (26) Guo, Y.; Zhang, Z.; Ren, Z.; Gao, H.; Gao, P.-X. *Catal. Today* 2012, 184, 178-183.
- (27) Jian, D.; Gao, P.-X.; Cai, W.; Allimi, B. S.; Pamir Alpay, S.; Ding, Y.; Wang, Z. L.; Brooks, C. J. *J. Mater. Chem.* 2009, 19, 970-975.
- (28) Roy, P.; Berger, S.; Schmuki, P. *Angew. Chem., Int. Ed.* 2011, 50, 2904-2939.
- (29) Chen, X.; Mao, S. S. *Chem. Rev.* 2007, 107, 2891-2959.
- (30) Mor, G. K.; Varghese, O. K.; Paulose, M.; Shankar, K.; Grimes, C. A. *Sol. Energy Mater. Sol. Cells* 2006, 90, 2011-2075.
- (31) Linsebigler, A. L.; Lu, G.; Yates Jr, J. T. *Chem. Rev.* 1995, 95, 735-758.
- (32) Lee, J.-C.; Kim, T. G.; Lee, W.; Han, S.-H.; Sung, Y.-M. *Cryst. Growth Des.* 2009, 9, 4519-4523.
- (33) Borrás, A.; Sanchez-Valencia, J. R.; Widmer, R.; Rico, V. J.; Justo, A.; Gonzalez-Elipe, A. R. *Cryst. Growth Des.* 2009, 9, 2868-2876.
- (34) In, S.-I.; Almqvist, K. P.; Lee, H.-S.; Andersen, I. H.; Qin, D.; Bao, N.; Grimes, C. *Bull. Korean Chem. Soc.* 2012, 33, 1989-1992.
- (35) Shin, Y.; Lee, S. *Nano Lett.* 2008, 8, 3171-3173.
- (36) Mi, Y.; Wen, L.; Xu, R.; Wang, Z.; Cao, D.; Fang, Y.; Lei, Y. *Adv. Energy Mater.* 2016, 6.
- (37) Xu, Y.; Zhou, M.; Wen, L.; Wang, C.; Zhao, H.; Mi, Y.; Liang, L.; Fu, Q.; Wu, M.; Lei, Y. *Chem. Mater.* 2015, 27, 4274-4280.
- (38) Chen, C.; Chen, Y.; Korotcov, A.; Huang, Y.; Tsai, D.; Tiong, K. *Nanotechnology* 2008, 19, 075611.

- (39) Wu, J.-J.; Yu, C.-C. *J. Phys. Chem. B* 2004, 108, 3377-3379.
- (40) Krishnamoorthy, T.; Thavasi, V.; Ramakrishna, S. *Energy Environ. Sci.* 2011, 4, 2807-2812.
- (41) Feng, X.; Shankar, K.; Varghese, O. K.; Paulose, M.; Latempa, T. J.; Grimes, C. A. *Nano Lett.* 2008, 8, 3781-3786.
- (42) Liu, B.; Aydil, E. S. *J. Am. Chem. Soc.* 2009, 131, 3985-3990.
- (43) Kandiel, T. A.; Dillert, R.; Feldhoff, A.; Bahnemann, D. W. *J. Phys. Chem. C* 2010, 114, 4909-4915.
- (44) Buonsanti, R.; Carlino, E.; Giannini, C.; Altamura, D.; De Marco, L.; Giannuzzi, R.; Manca, M.; Gigli, G.; Cozzoli, P. D. *J. Am. Chem. Soc.* 2011, 133, 19216-19239.
- (45) Cho, I. S.; Chen, Z.; Forman, A. J.; Kim, D. R.; Rao, P. M.; Jaramillo, T. F.; Zheng, X. *Nano Lett.* 2011, 11, 4978-4984.
- (46) Gupta, S.; Tripathi, M. *Open Chem.* 2012, 10, 279-294.
- (47) Malekshahi Byranvand, M.; Nemati Kharat, A.; Fatholahi, L.; Malekshahi Beiranvand, Z. *J. Nanostruct.* 2013, 3, 1-9.
- (48) Yan, J.; Wei, T.; Qiao, W.; Shao, B.; Zhao, Q.; Zhang, L.; Fan, Z. *Electrochim. Acta* 2010, 55, 6973-6978.
- (49) Baghbanzadeh, M.; Carbone, L.; Cozzoli, P. D.; Kappe, C. O. *Angew. Chem., Int. Ed.* 2011, 50, 11312-11359.
- (50) Tsuji, M.; Hashimoto, M.; Nishizawa, Y.; Kubokawa, M.; Tsuji, T. *Chem. Eur. J.* 2005, 11, 440-452.
- (51) Zhu, Y. J.; Wang, W. W.; Qi, R. J.; Hu, X. L. *Angew. Chem.* 2004, 116, 1434-1438.
- (52) Sundaresan, S. G.; Davydov, A. V.; Vaudin, M. D.; Levin, I.; Maslar, J. E.; Tian, Y.-L.; Rao, M. V. *Chem. Mater.* 2007, 19, 5531-5537.
- (53) Mao, X.; Yang, X.; Wu, J.; Tian, W.; Rutledge, G. C.; Hatton, T. A. *Chem. Mater.* 2015, 27, 4574-4585.
- (54) Toulemon, D.; Pichon, B. P.; Leuvrey, C. d.; Zafeiratos, S.; Papaefthimiou, V.; Cattoën, X.; Bégin-Colin, S. *Chem. Mater.* 2013, 25, 2849-2854.
- (55) Horikoshi, S.; Serpone, N., *Microwaves in nanoparticle synthesis: fundamentals and applications*. John Wiley & Sons: 2013.
- (56) Wang, H.-E.; Zheng, L.-X.; Liu, C.-P.; Liu, Y.-K.; Luan, C.-Y.; Cheng, H.; Li, Y. Y.; Martinu, L.; Zapien, J. A.; Bello, I. *J. Phys. Chem. C* 2011, 115, 10419-10425.
- (57) Parmar, K.; Ramasamy, E.; Lee, J.; Lee, J. S. *Chem Commun* 2011, 47, 8572-8574.

- (58) Huang, C.-H.; Yang, Y.-T.; Doong, R.-A. *Microporous Mesoporous Mater.* 2011, 142, 473-480.
- (59) Zhang, P.; Yin, S.; Sato, T. *Appl. Catal., B* 2009, 89, 118-122.
- (60) Ribbens, S.; Meynen, V.; Van Tendeloo, G.; Ke, X.; Mertens, M.; Maes, B.; Cool, P.; Vansant, E. *Microporous Mesoporous Mater.* 2008, 114, 401-409.
- (61) Ding, K.; Miao, Z.; Liu, Z.; Zhang, Z.; Han, B.; An, G.; Miao, S.; Xie, Y. *J. Am. Chem. Soc.* 2007, 129, 6362-6363.
- (62) Wilson, G. J.; Matijasevich, A. S.; Mitchell, D. R.; Schulz, J. C.; Will, G. D. *Langmuir* 2006, 22, 2016-2027.
- (63) Hart, J.; Cervini, R.; Cheng, Y.-B.; Simon, G.; Spiccia, L. *Sol. Energy Mater. Sol. Cells* 2004, 84, 135-143.
- (64) Shen, P.-S.; Tseng, C.-M.; Kuo, T.-C.; Shih, C.-K.; Li, M.-H.; Chen, P. *Solar Energy* 2015, 120, 345-356.
- (65) He, Z.; Liu, J.; Miao, J.; Liu, B.; Tan, T. T. Y. *J. Mater. Chem. C* 2014, 2, 1381-1385.
- (66) Xue, B.; Sun, T.; Mao, F.; Sun, L.-C.; Yang, W.; Xu, Z.-D.; Zhang, X. *Mater. Res. Bull.* 2011, 46, 1524-1529.
- (67) Wang, X.; Liu, Y.; Zhou, X.; Li, B.; Wang, H.; Zhao, W.; Huang, H.; Liang, C.; Yu, X.; Liu, Z. *J. Mater. Chem.* 2012, 22, 17531-17538.
- (68) Aftertreatment Protocols for Catalyst Characterization and Performance Evaluation: Low Temperature Oxidation Catalyst Test Protocol. <http://cleers.org/ltat-protocols>.
- (69) Lei, Y.; Zhang, L.; Fan, J. *Phys. Chem. Lett.* 2001, 338, 231-236.
- (70) Porto, S.; Fleury, P.; Damen, T. *Phys. Rev.* 1967, 154, 522.
- (71) Benkoula, S.; Sublemontier, O.; Patanen, M.; Nicolas, C.; Sirotti, F.; Naitabdi, A.; Gaie-Levrel, F.; Antonsson, E.; Aureau, D.; Ouf, F.-X. *Sci. Rep.* 2015, 5, 15088.
- (72) Umrao, S.; Abraham, S.; Theil, F.; Pandey, S.; Ciobota, V.; Shukla, P.; Rupp, C. J.; Chakraborty, S.; Ahuja, R.; Popp, J. *RSC Adv.* 2014, 4, 59890-59901.
- (73) Molina, C.; Dahmouche, K.; Hammer, P.; Bermudez, V. d. Z.; Carlos, L. D.; Ferrari, M.; Montagna, M.; Gonçalves, R. R.; Oliveira, L.; Edwards, H. J. *Braz. Chem. Soc.* 2006, 17, 443-452.
- (74) Paunović, P.; Grozdanov, A.; Češnovar, A.; Makreski, P.; Gentile, G.; Ranguelov, B.; Fidančevska, E. *J. Eng. Mater. Technol.* 2015, 137, 021003.
- (75) Tang, A.; Deng, Y.; Jin, J.; Yang, H. *Sci. World J.* 2012, 2012.
- (76) Xu, S.; Wang, Z. L. *Nano Res.* 2011, 4, 1013-1098.

- (77) Vayssieres, L.; Keis, K.; Lindquist, S.-E.; Hagfeldt, A. *J. Phys. Chem. B* 2001, 105, 3350-3352.
- (78) Liao, Y.; Que, W.; Jia, Q.; He, Y.; Zhang, J.; Zhong, P. *J. Mater. Chem.* 2012, 22, 7937-7944.
- (79) Zhong, D.; Cai, B.; Wang, X.; Yang, Z.; Xing, Y.; Miao, S.; Zhang, W.-H.; Li, C. *Nano Energy* 2015, 11, 409-418.
- (80) Majewski, W.; Khair, M., Commercial DOC Technologies. Revision: 2011.
- (81) Oku, M.; Matsuta, H.; Wagatsuma, K.; Waseda, Y.; Kohiki, S., *J. Electron Spectrosc. Relat. Phenom.* 1999, 105 (2), 211-218.

EXAMPLE #2

Materials and Methods

[00119] The mesoporous TiO₂ nano-array was integrated onto cordierite honeycomb monolith via a solvothermal synthesis using titanium (IV) butoxide as Ti precursor and butanone as nonpolar solvent. Pt was loaded on to the TiO₂ nano-array/cordierite using Na-promoted wet incipient impregnation. The Pt/TiO₂ nanoarrays were calcined at 500°C for 4 hours with a ramping rate of 2°C min⁻¹. The DOC activity of the Pt/TiO₂ nanoarray/cordierite honeycomb monolith was evaluated using the protocol developed by the ACEC tech team for conventional diesel combustion at a space velocity of 60,000 h⁻¹. The composition of the simulated exhaust is 500 ppm CO, 389 ppm C₂H₄, 156 ppm C₃H₆, 52 ppm C₃H₈, 200 ppm NO, 100 ppm H₂, 6% CO₂, 6% H₂O, 12% O₂, and balance N₂. The BET surface area of the catalysts was measured on Micromeritics ASAP P2020 Automatic Chemisorption Analyzer.

Results and Discussion

[00120] TiO₂ nanowires with diameters of ~ 50-150 nm were uniformly grown on the monolith wall with a thickness of ~ 3-4 μm (FIG. 22A). Each nanowire is composed of several smaller nanowires, forming a unique mesoporous structure. The high angular dark field (HAADF) scanning transmission electron microscopy (STEM) image of the nanowire reveal an array of voids with diameters ranging from 3-30 nm on the nanowire (FIG. 22B). This unique mesoporous structure might explain the exceptionally high surface area of the TiO₂ nanoarray/cordierite substrate. The BET surface area of the fresh TiO₂/cordierite sample can reach 92.3 m² g⁻¹. However, after the Pt impregnation process, the surface area reduced significantly, to 7.7 m² g⁻¹. The Pt/TiO₂ nanoarray has high thermal

stability. Significant morphological changes in the Pt/TiO₂ sample were not observed after the hydrothermal aging process at 650°C for 100 hours, although the BET surface area was decreased slightly to 6.1 m² g⁻¹. The light-off temperatures for the Pt/TiO₂ nanoarray sample with a Pt loading of 0.71 g L⁻¹ for CO and hydrocarbons in CDC simulated exhaust conditions, indicating an exceptional DOC activity. The temperature T₉₀ for both CO and HCs approaches the 170°C in the CDC simulated exhaust test, significantly lower than that of a commercial DOC catalyst while using much fewer catalyst materials. The enhanced reactivity of the Pt/TiO₂ nanoarray might be explained by the unique mesoporous nano-array structure that enhancing gas-solid interaction, metal-support electronic interaction.

Significance

[00121] The Pt supported TiO₂ nanoarray catalyst has excellent low-temperature activity for CO and hydrocarbon combustion.

EXAMPLE #3

[00122] With the optimized recipe and experimental conditions, TiO₂ nano-arrays were also successfully integrated onto various solid surfaces of different materials, including 3D SiC monoliths, 2D FTO glass, ITO coated PET film and Ti metal foil as well as 1D carbon fibers (FIGs 23A-F).

[00123] The versatility of this facile hydrothermal method was demonstrated in two aspects. On the one hand, growing nano-arrays onto 3D monolithic substrates is more challenging than onto the 2D planar substrates due to the difficulty in mass transfer of the precursors through the space confined channels. In this work, the mass transfer was enhanced by the large amount of O₂ bubbles created during the reaction, indicating the feasibility of applying this method on different substrates with complex geometric structures.

[00124] On the other hand, this method has been applied on a wide range of substrate materials from hard ceramic surfaces to flexible polymer films, metal foils and carbon fibers. Practically, this versatile synthetic method shall to be suitable for the fast integration of TiO₂ nano-arrays on solid materials that can withstand the oxidizing and acidic conditions. Therefore, this facile microwave-assisted hydrothermal method shows potential applications on various substrate surfaces for different applications.

[00125] Integrating uniform nanostructure array coatings on solid substrate can significantly change the surface properties of the substrates. This facile hydrothermal method

can provide an easy way to alternate the surface properties of different solid substrates with low temperature and high production rate.

[00126] One of the important surface properties of solid substrate materials is the wettability. The wettability of various pristine substrate surfaces and the corresponding nanoarrays rooted surfaces. As shown in FIGs. 24A-H, compared with the water contact angles of the pristine surfaces, the nanoarray rooted surfaces show much smaller contact angles. That is because of the hydrophilic nature of the nanoarrays. Such features are highly favorable for the applications in aqueous or humid environment.

[00127] Another important surface property is the specific surface area. FIGs. 25A and 25B show the BET N₂ adsorption-desorption isotherms (FIG. 25A) and pore size distribution of bare cordierite monolith, nano-array rooted monolith and nanowire powders (FIG. 25B). As can be seen, the as-synthesized nano-wire powders exhibit very high specific surface area of 194m²/g (red line in FIG. 25A). When integrated on cordierite monolith, the specific surface area of the monolith increases from 0.4m²/g (black line in FIG. 25A) to 27.8m²/g (black line in FIG. 25A). FIG. 25B shows similar pore size distribution between the nanowire powders and the nano-array rooted monolith, indicating that the high surface area mainly comes from the nano-array coating layers. The high surface area is important for the catalyst supporting materials such as cordierite to promote the catalytic reactions in gaseous environment.

INCORPORATION BY REFERENCE; EQUIVALENTS

[00128] The teachings of all patents, published applications and references cited herein are incorporated by reference in their entirety.

[00129] While the invention has been described with reference to example embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for the elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt the teaching of the invention to particular use, application, manufacturing conditions, use conditions, composition, medium, size, and/or materials without departing from the essential scope and spirit of the invention. Therefore, it is intended that the invention not be limited to the particular embodiments and best mode contemplated for carrying out this invention as described herein.

[00130] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting of the true scope of the invention disclosed herein. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting. Since many modifications, variations, and changes in detail can be made to the described examples, it is intended that all matters in the preceding description and shown in the accompanying figures be interpreted as illustrative and not in a limiting sense.

[00131] Chemical compounds are described using standard nomenclature. For example, any position not substituted by any indicated group is understood to have its valency filled by a bond as indicated, or a by hydrogen atom.

[00132] All ranges disclosed herein are inclusive of the endpoints, and the endpoints are independently combinable with each other. Each range disclosed herein constitutes a disclosure of any point or sub-range lying within the disclosed range.

[00133] The use of the terms “a” and “an” and “the” and words of a similar nature in the context of describing the improvements disclosed herein (especially in the context of the following claims) are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. Further, it should further be noted that the terms “first,” “second,” and the like herein do not denote any order, quantity, or relative importance, but rather are used to distinguish one element from another. The modifier “about” used in connection with a quantity is inclusive of the stated value and has the meaning dictated by the context (e.g., it includes, at a minimum the degree of error associated with measurement of the particular quantity).

[00134] All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., “such as”), is intended merely to better illustrate the invention and does not pose a limitation on the scope of the invention or any embodiments unless otherwise claimed.

CLAIMS

What is claimed is:

1. A method of making a hydrogen titanate ($\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$) nanowire array, the method comprising:
contacting a substrate with a solvent comprising a titanium (III) precursor, an acid, and an oxidant while microwave heating the solvent, thereby forming a hydrogen titanate ($\text{H}_2\text{Ti}_2\text{O}_5 \cdot \text{H}_2\text{O}$) nanowire array.
2. The method of Claim 1, wherein the substrate comprises a cordierite honeycomb monolith.
3. The method of Claim 1, wherein the solvent is a polar solvent.
4. The method of Claim 1, wherein the solvent is a protic solvent.
5. The method of Claim 1, wherein the solvent is water.
6. The method of Claim 1, wherein the titanium (III) precursor is TiCl_3 .
7. The method of Claim 1, wherein the titanium (III) precursor is $\text{Ti}_2(\text{SO}_4)_3$.
8. The method of Claim 1, wherein the titanium (III) precursor is a titanium (III) alkoxide.
9. The method of Claim 1, wherein the acid is hydrochloric acid (HCl).
10. The method of Claim 9, wherein the acid is from about 25 wt.% to about 40 wt.% HCl .
11. The method of Claim 1, wherein the acid is sulfuric acid (H_2SO_4).
12. The method of Claim 1, wherein the oxidant is hydrogen peroxide.
13. The method of Claim 12, wherein the hydrogen peroxide is from about 20 wt.% to about 40 wt.% in water.
14. The method of Claim 1, wherein the solvent is heated by microwave heating to a temperature from about 75°C to about 95°C .

15. The method of Claim 1, wherein the solvent is heated by microwave heating for a duration from about 10 minutes to about 180 minutes.
16. The method of Claim 1, further comprising annealing the hydrogen titanate nanowire array to form a TiO₂ nanowire array.
17. The method of Claim 16, wherein annealing is performed at a temperature from about 300°C to about 800°C.
18. The method of Claim 1, wherein the solvent is a second solvent, the method further comprising contacting the substrate with a first solvent comprising a titanium (IV) precursor and a first acid prior to contacting the substrate with the second solvent.
19. The method of Claim 18, further comprising sonicating while contacting the substrate with the first solvent.
20. The method of Claim 18, wherein the titanium (IV) precursor comprises one or more of titanium (IV) isopropoxide, titanium (IV) n-butoxide, and titanium (IV) chloride.
21. The method of Claim 20, wherein the titanium (IV) precursor comprises titanium (IV) isopropoxide.
22. The method of Claim 18, wherein the first solvent is a polar solvent.
23. The method of Claim 18, wherein the first solvent is a protic solvent.
24. The method of Claim 18, wherein the first solvent is an alcohol.
25. The method of Claim 18, wherein the first solvent is ethanol.
26. The method of Claim 18, wherein the first acid is HNO₃.
27. The method of Claim 18, further comprising drying the substrate after contacting the substrate with the first solvent, and subsequently contacting the substrate with the first solvent prior to contacting the substrate with the second solvent.

28. The method of Claim 18, further comprising annealing the substrate after contacting the substrate with the first solvent and prior to contacting the substrate with the second solvent.
29. The method of any of Claims 1-28, further comprising loading a platinum group metal onto the titanium dioxide (TiO₂) nanowire array, the method further comprising:
 - contacting the TiO₂ nanowire array with a third solvent comprising a platinum group metal precursor, wherein the platinum group metal precursor comprises one or more of platinum, palladium, and rhodium;
 - drying the TiO₂ nanowire array;
 - calcining the TiO₂ nanowire array; and
 - annealing the TiO₂ nanowire array in the presence of hydrogen.
30. The method of Claim 29, wherein the platinum group metal precursor comprises platinum.
31. The method of Claim 30, where the platinum is platinum (II).
32. The method of Claim 29, wherein the platinum group metal precursor comprises tetraammineplatinum (II) nitrate.
33. The method of Claim 29, further comprising sonicating while contacting the TiO₂ nanowire array with the third solvent.
34. The method of Claim 29, further comprising contacting the TiO₂ nanowire array with a third solvent, drying the TiO₂ nanowire array, and calcining the TiO₂ nanowire array a plurality of times prior to annealing the TiO₂ nanowire array.
35. A titanium dioxide (TiO₂) nanowire array made by the method of any of Claims 1 through 34.
36. A method of oxidizing a combustion exhaust, the method comprising contacting a source of combustion exhaust with a titanium dioxide (TiO₂) nanowire made according to any of Claims 1 to 34.
37. The method of Claim 36, wherein the combustion exhaust comprises one or more of carbon monoxide (CO), nitric oxide (NO), and hydrocarbons.

38. The method of Claim 37, wherein the hydrocarbons comprise one or more of ethylene, propylene, propane, and methane.
39. The method of Claim 36, wherein the source of combustion exhaust is diesel combustion exhaust.
40. The method of Claim 39, wherein the diesel combustion exhaust is emitted from a land-based vehicle, a water-based vessel, a diesel-fueled power plant, a diesel generator, or a diesel-fueled power plant.
41. The method of Claim 40, wherein the diesel-exhaust is emitted from a land-based vehicle, and wherein the land-based vehicle is a car or a truck.
42. The method of Claim 40, wherein the diesel-exhaust is emitted from a water-based vessel, and wherein the water-based vessel is a boat or a ship.

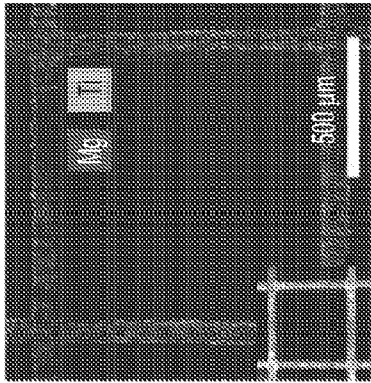


FIG. 1B

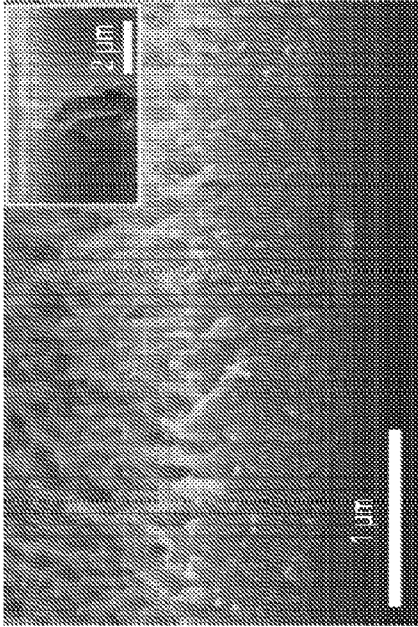


FIG. 1D

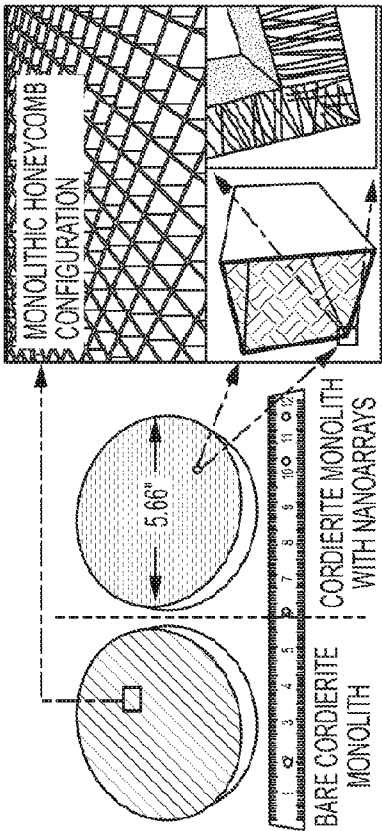


FIG. 1A

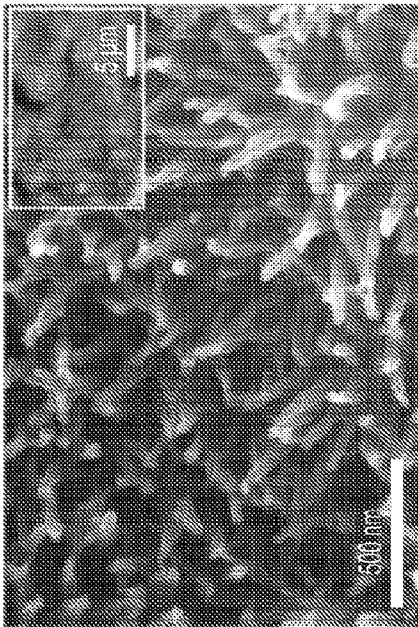


FIG. 1C

2/34

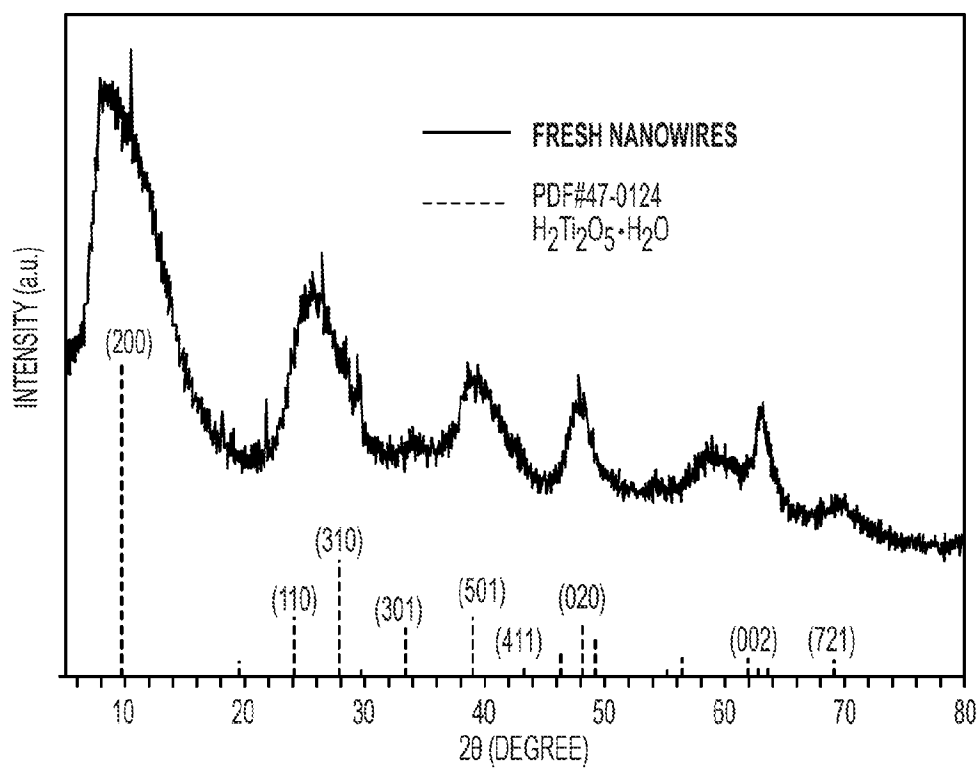


FIG. 2A

3/34

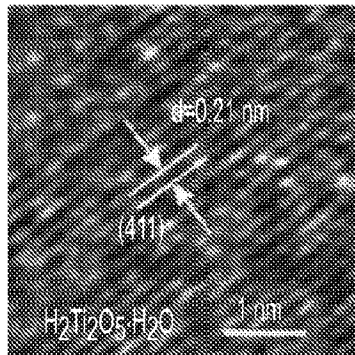


FIG. 2B

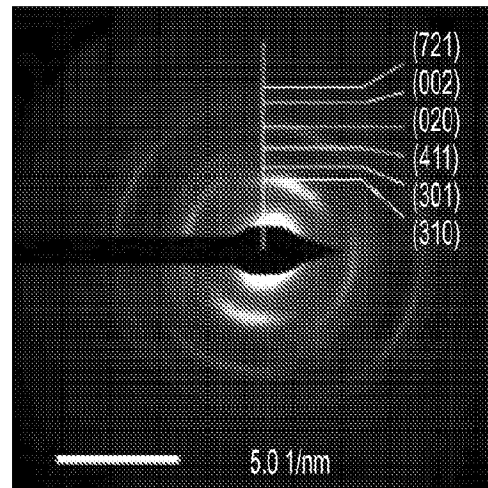


FIG. 2C

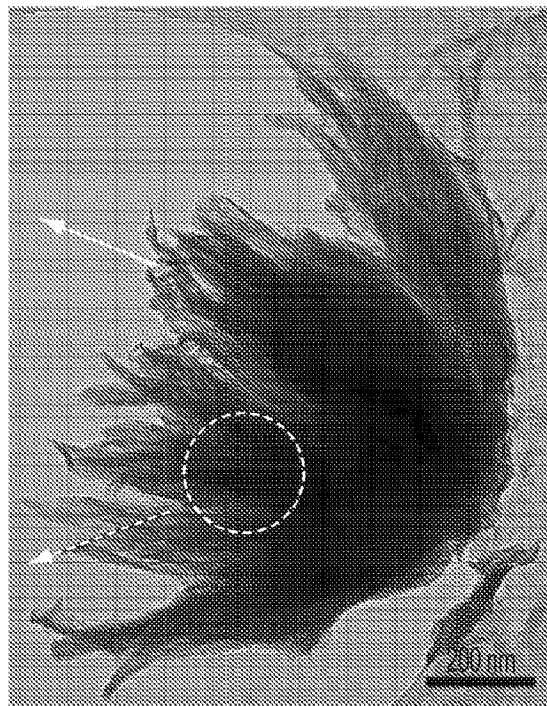


FIG. 2D

4/34

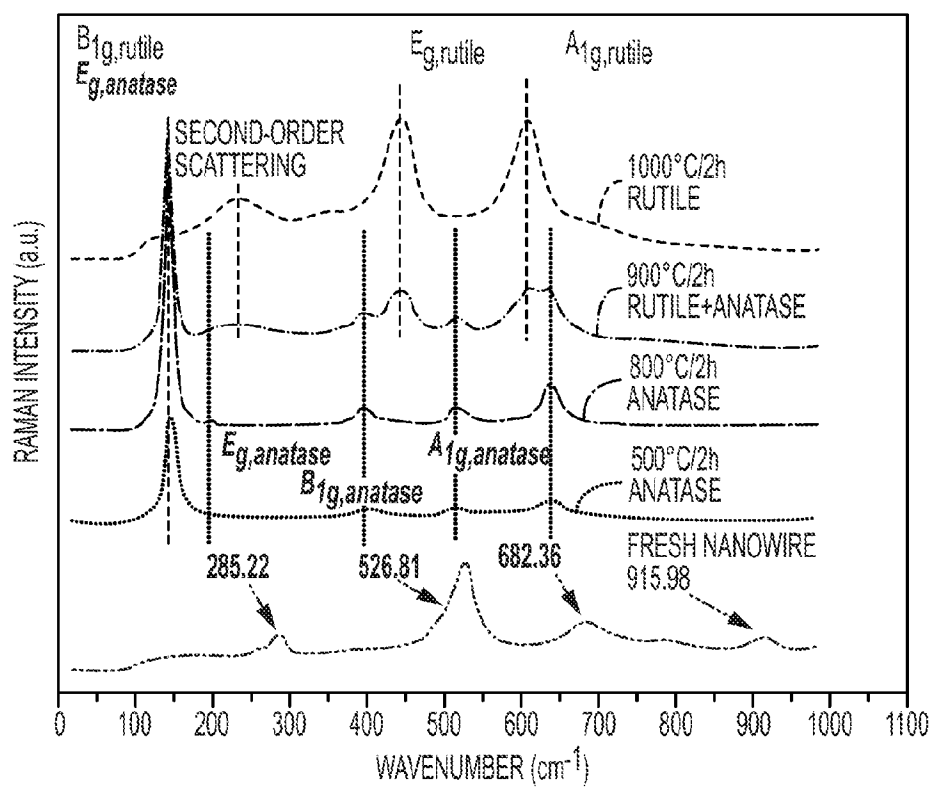


FIG. 2E

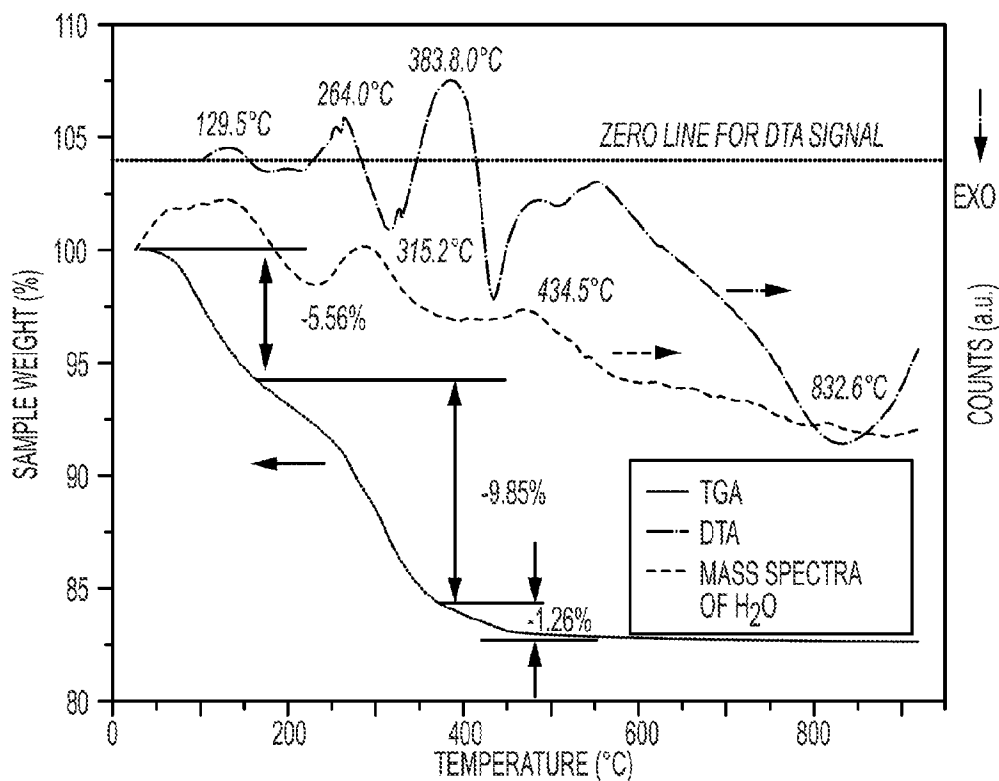
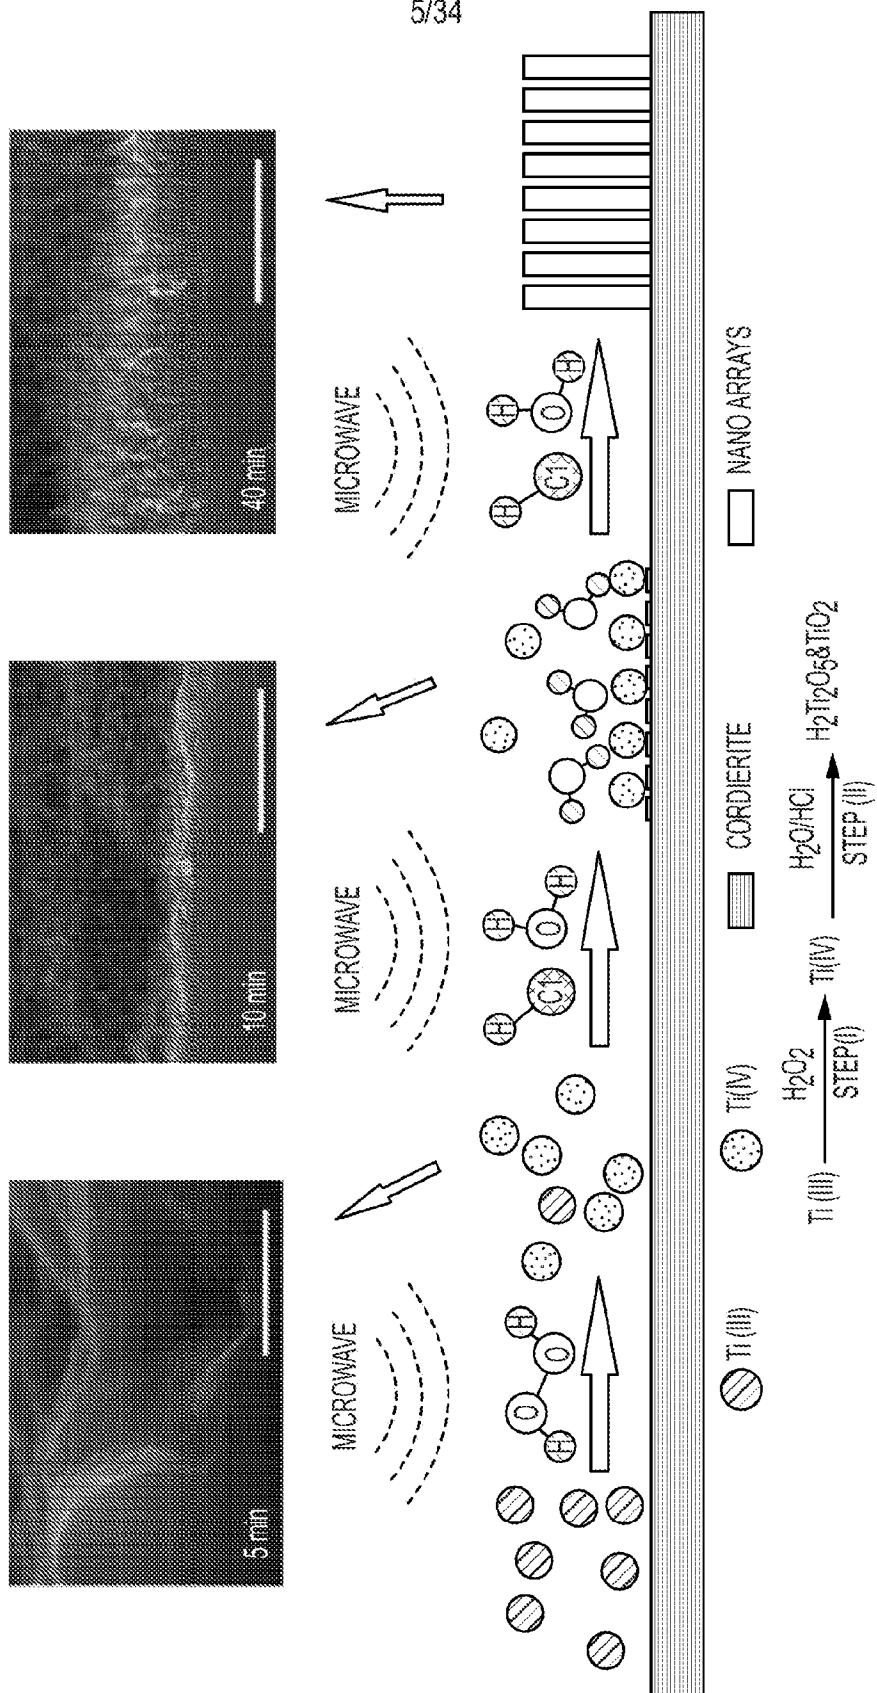


FIG. 2F



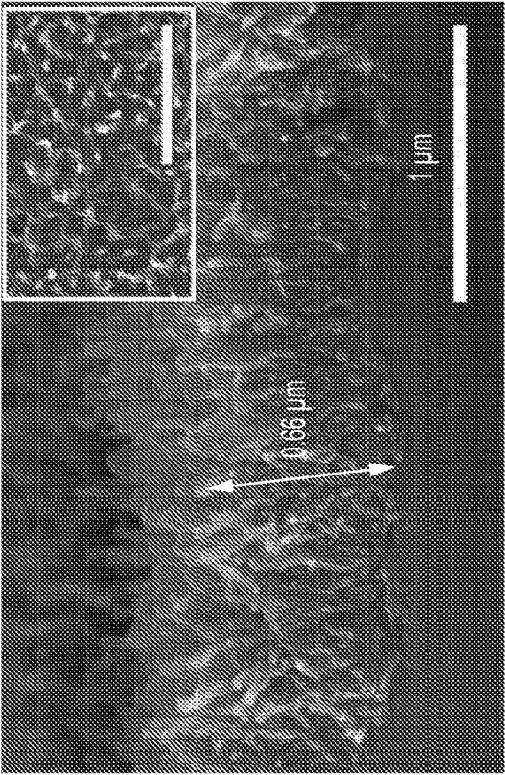


FIG. 4B

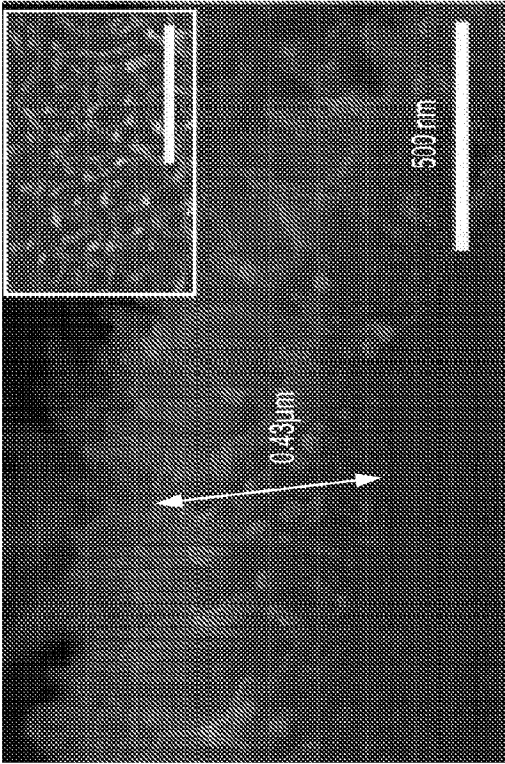


FIG. 4A

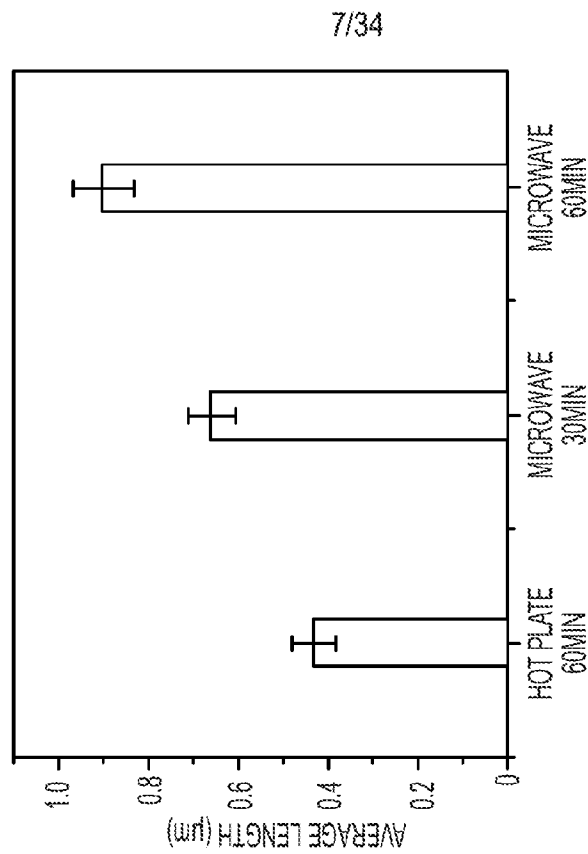


FIG. 4D

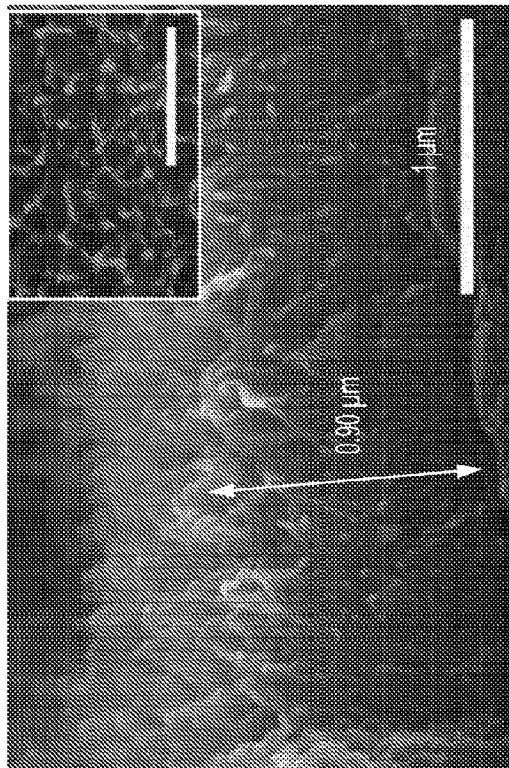


FIG. 4C

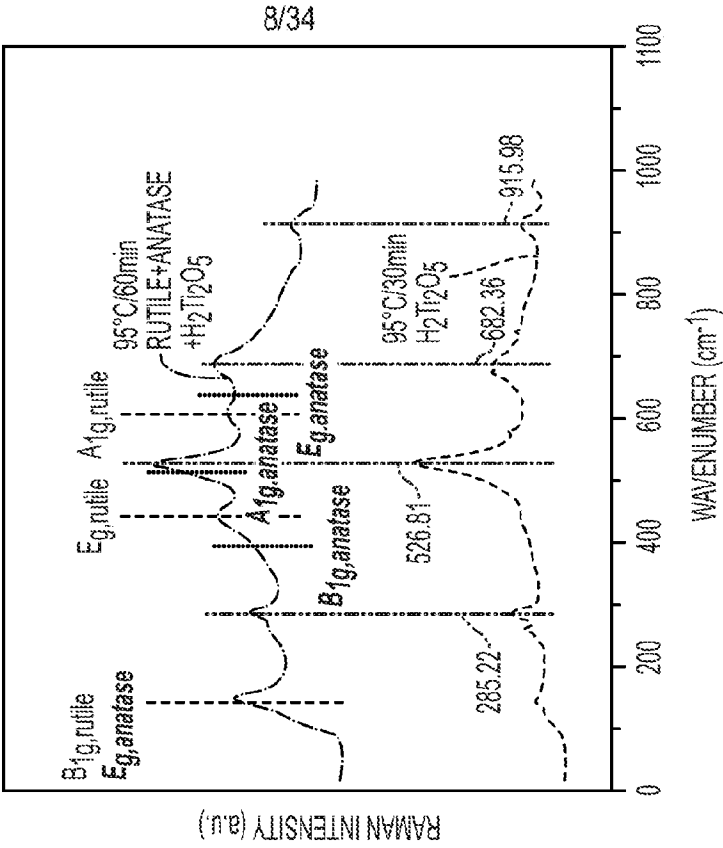


FIG. 5B

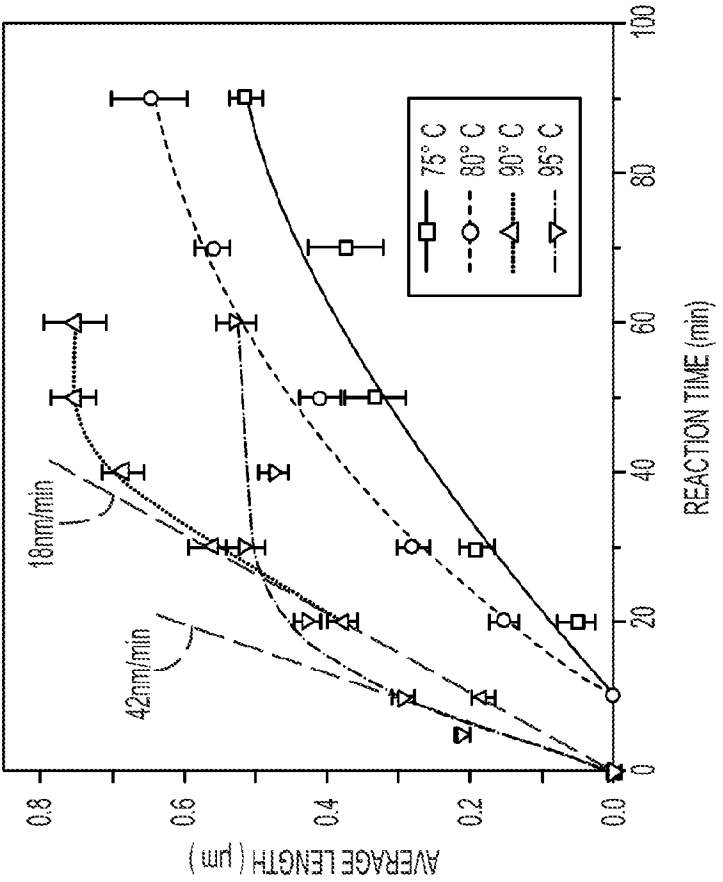


FIG. 5A

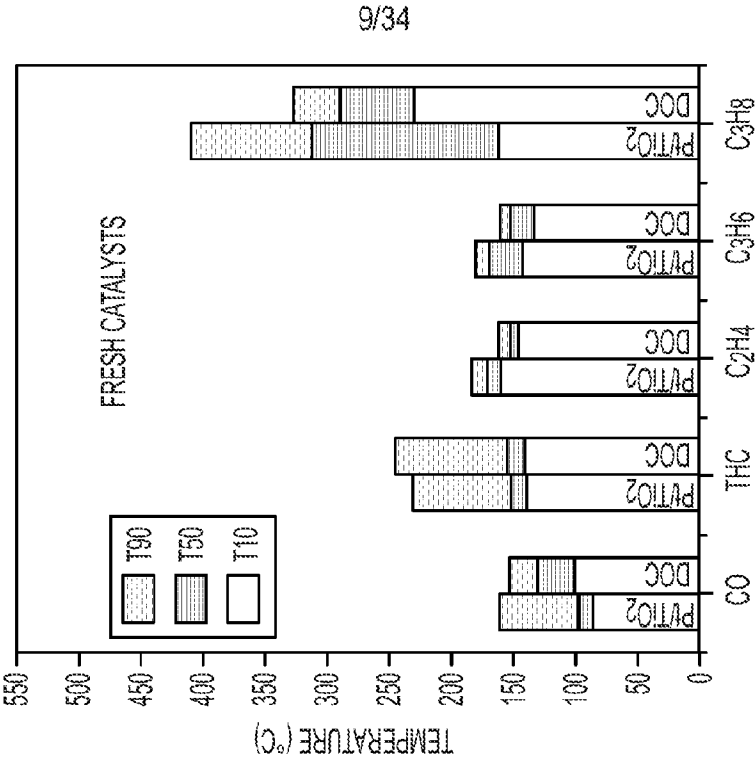


FIG. 6B

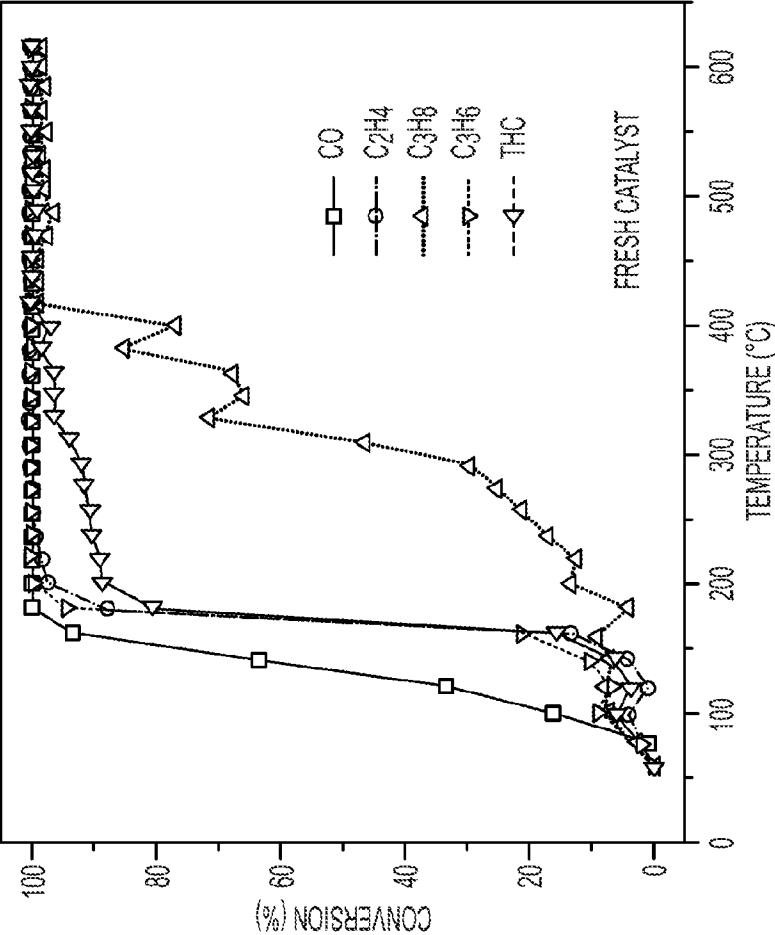


FIG. 6A

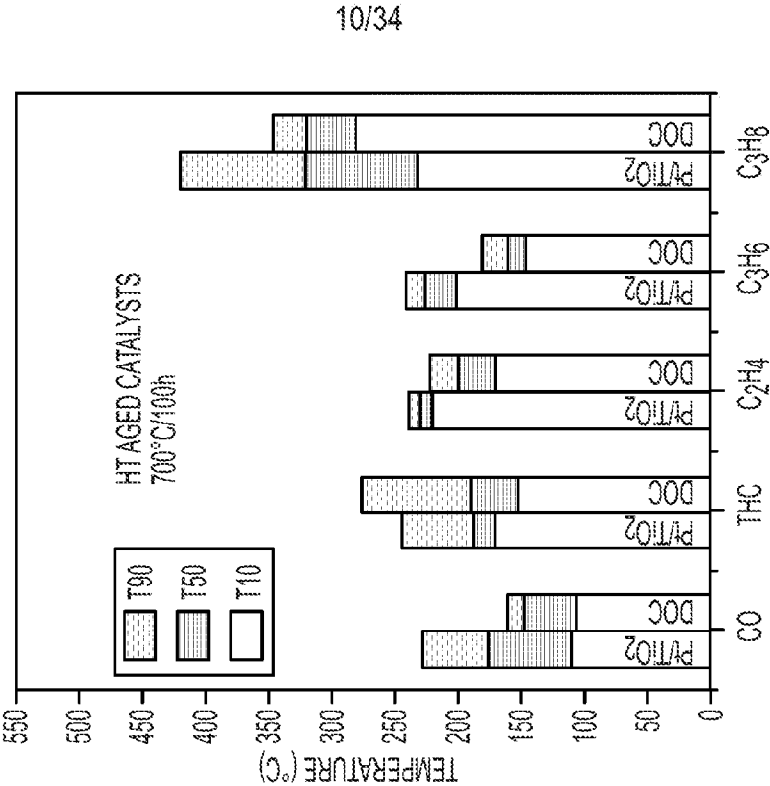


FIG. 6D

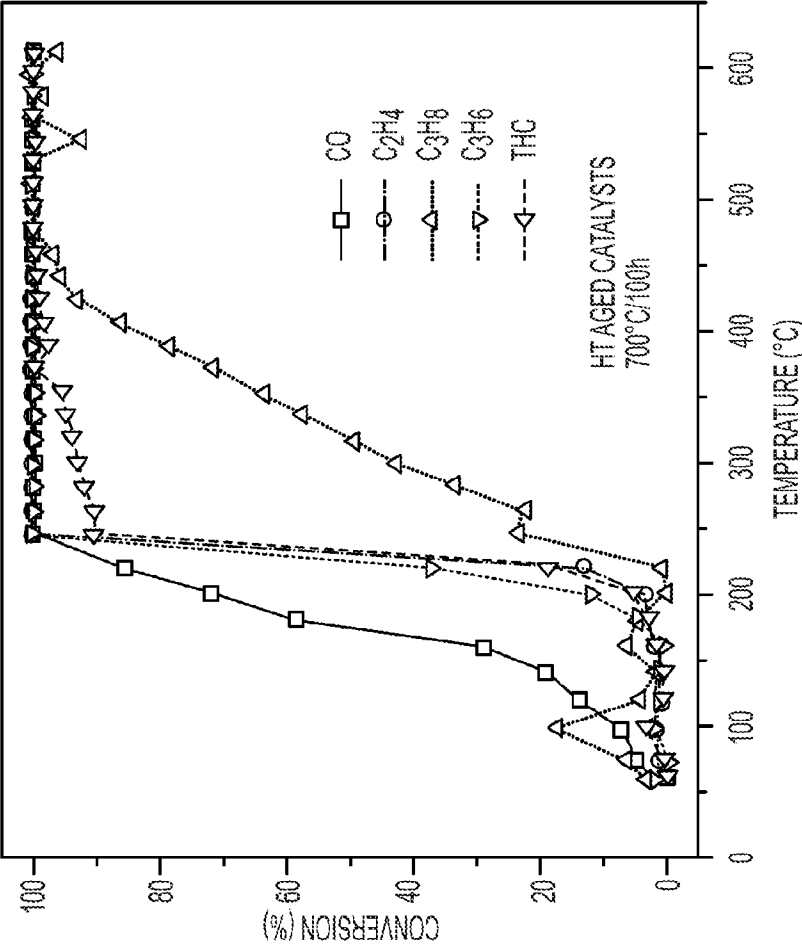


FIG. 6C

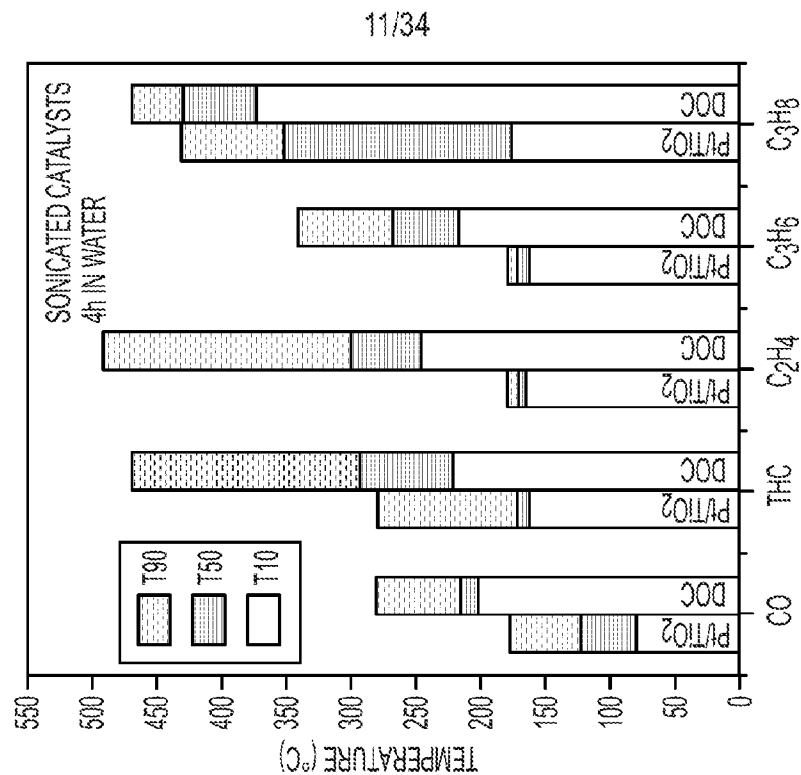


FIG. 6F

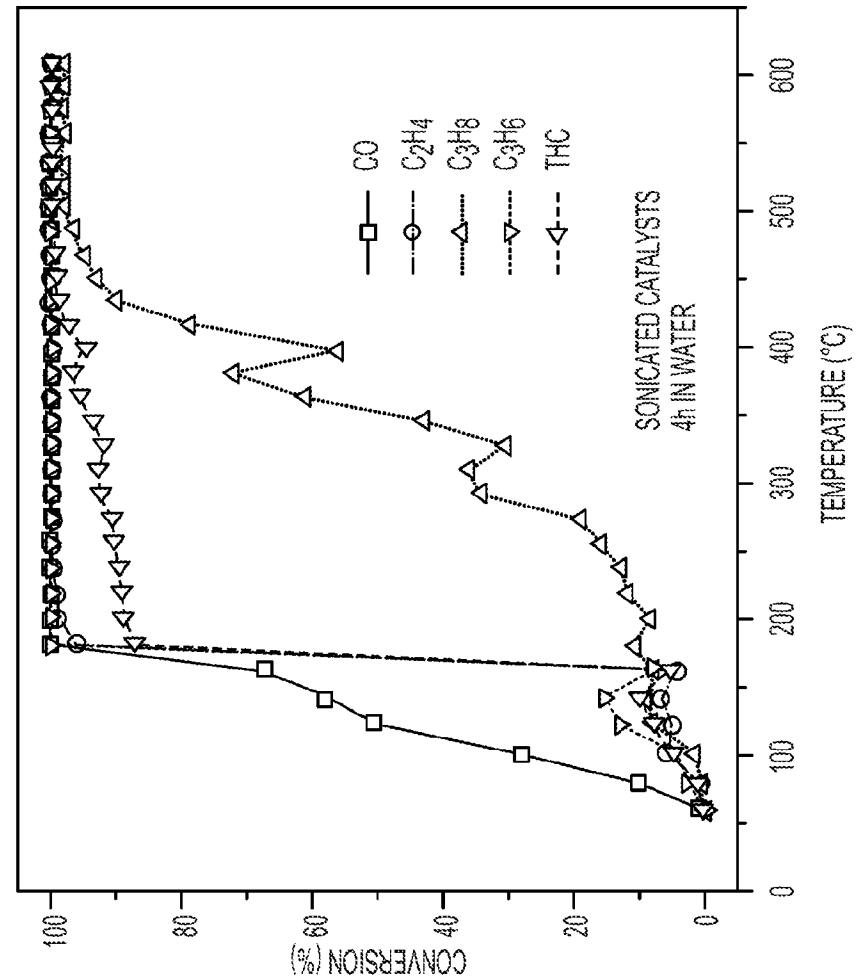


FIG. 6E

12/34

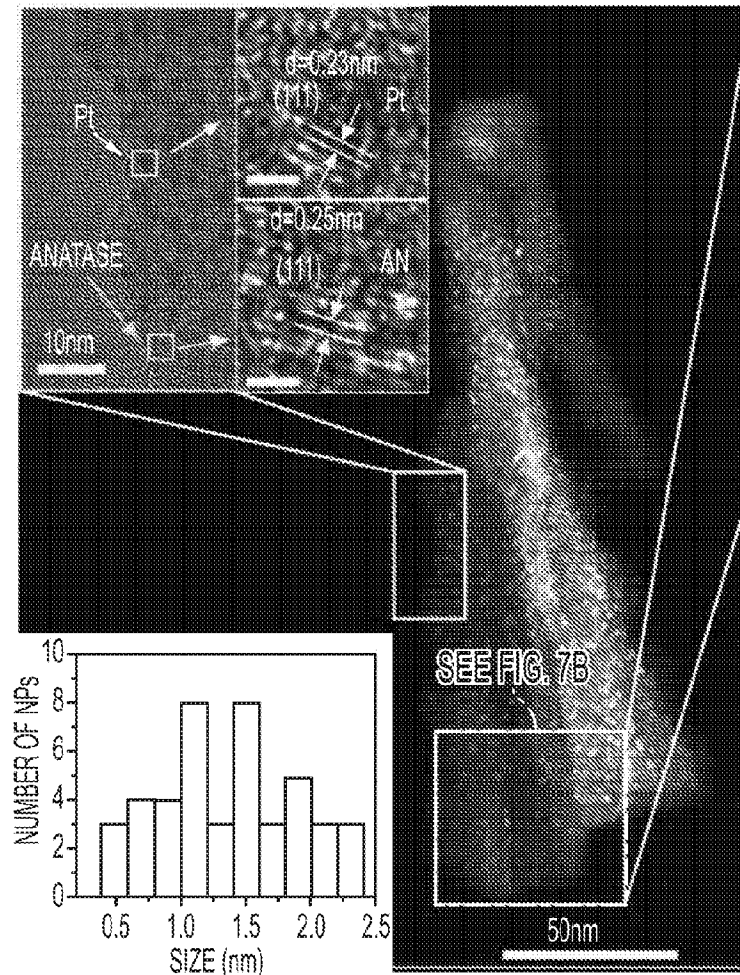


FIG. 7A

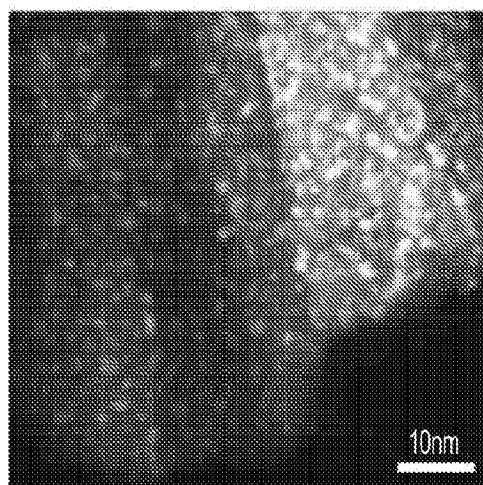


FIG. 7B

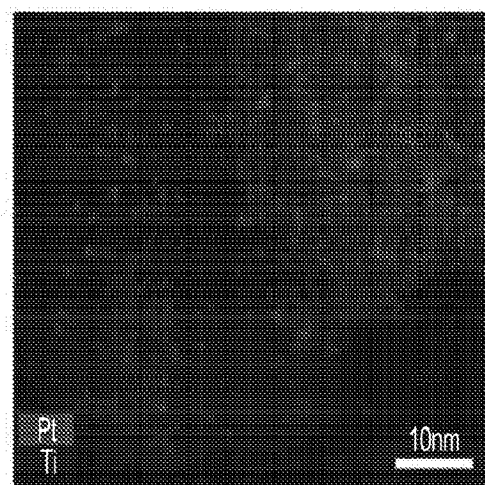


FIG. 7C

13/34

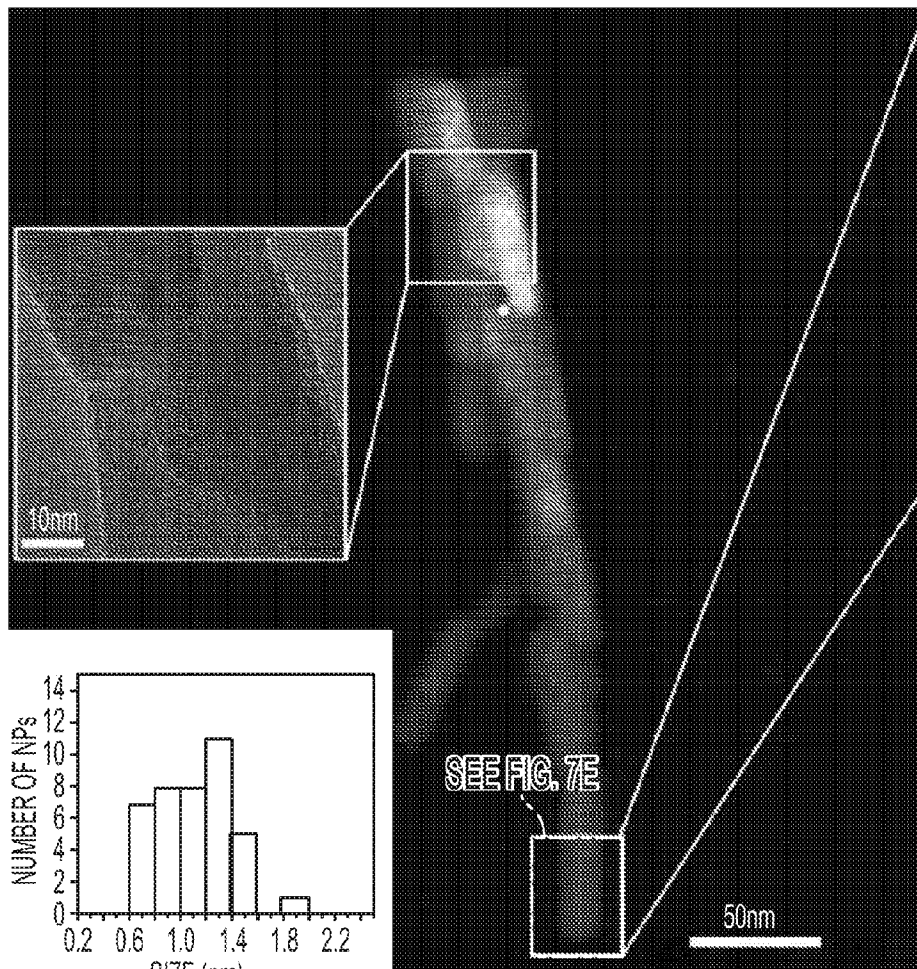


FIG. 7D

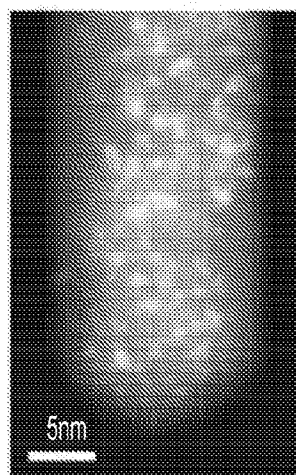


FIG. 7E


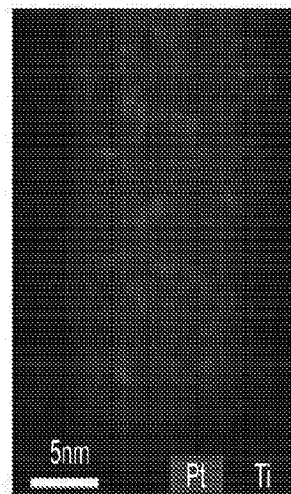


FIG. 7F

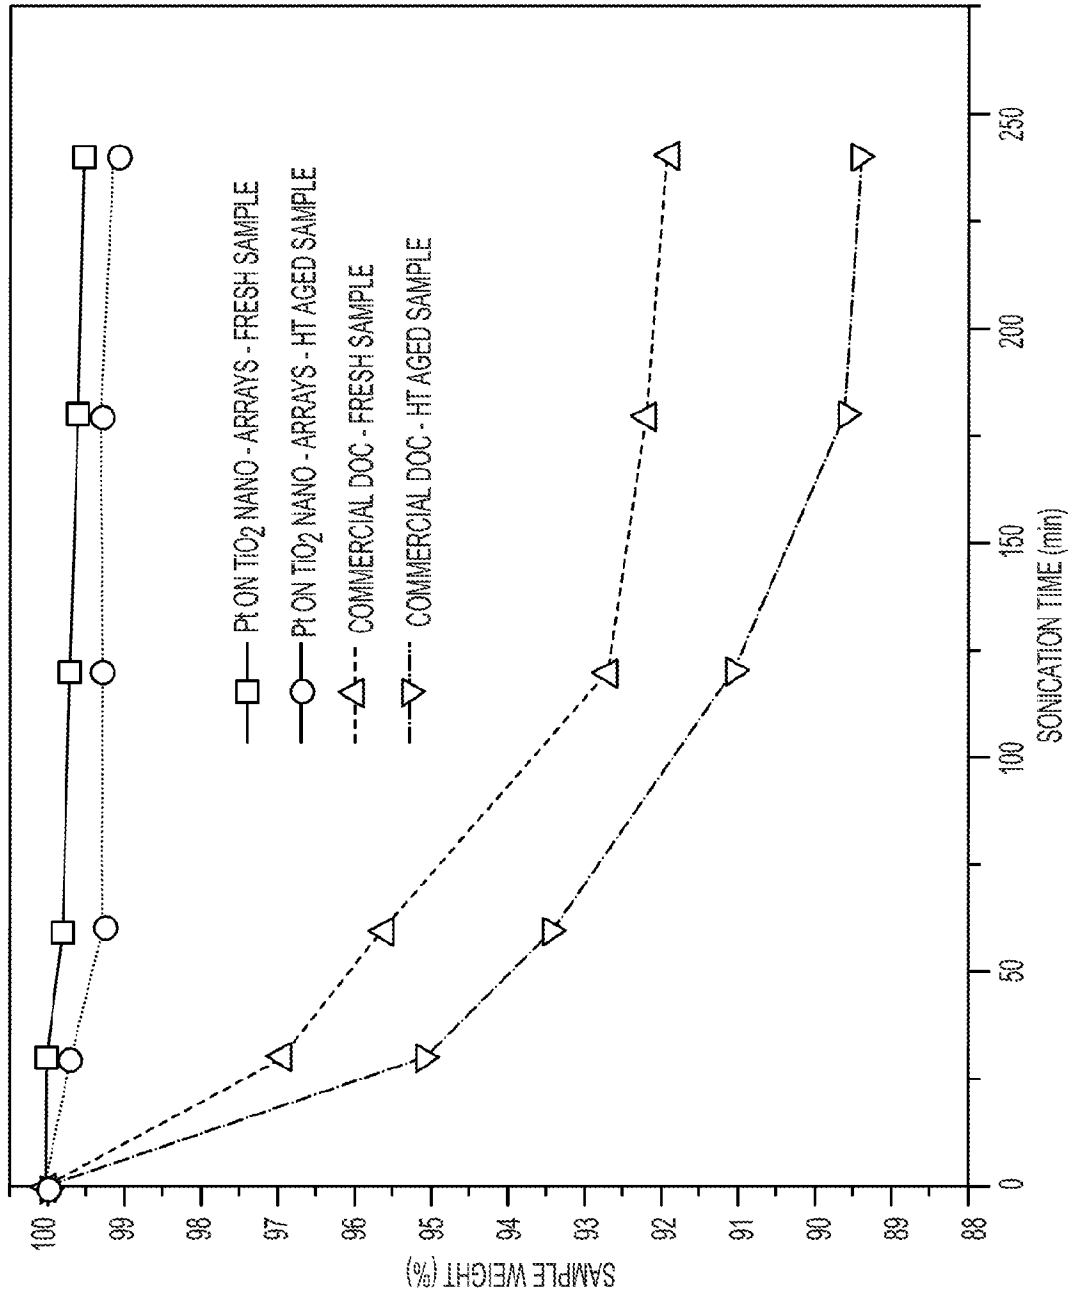

15/34

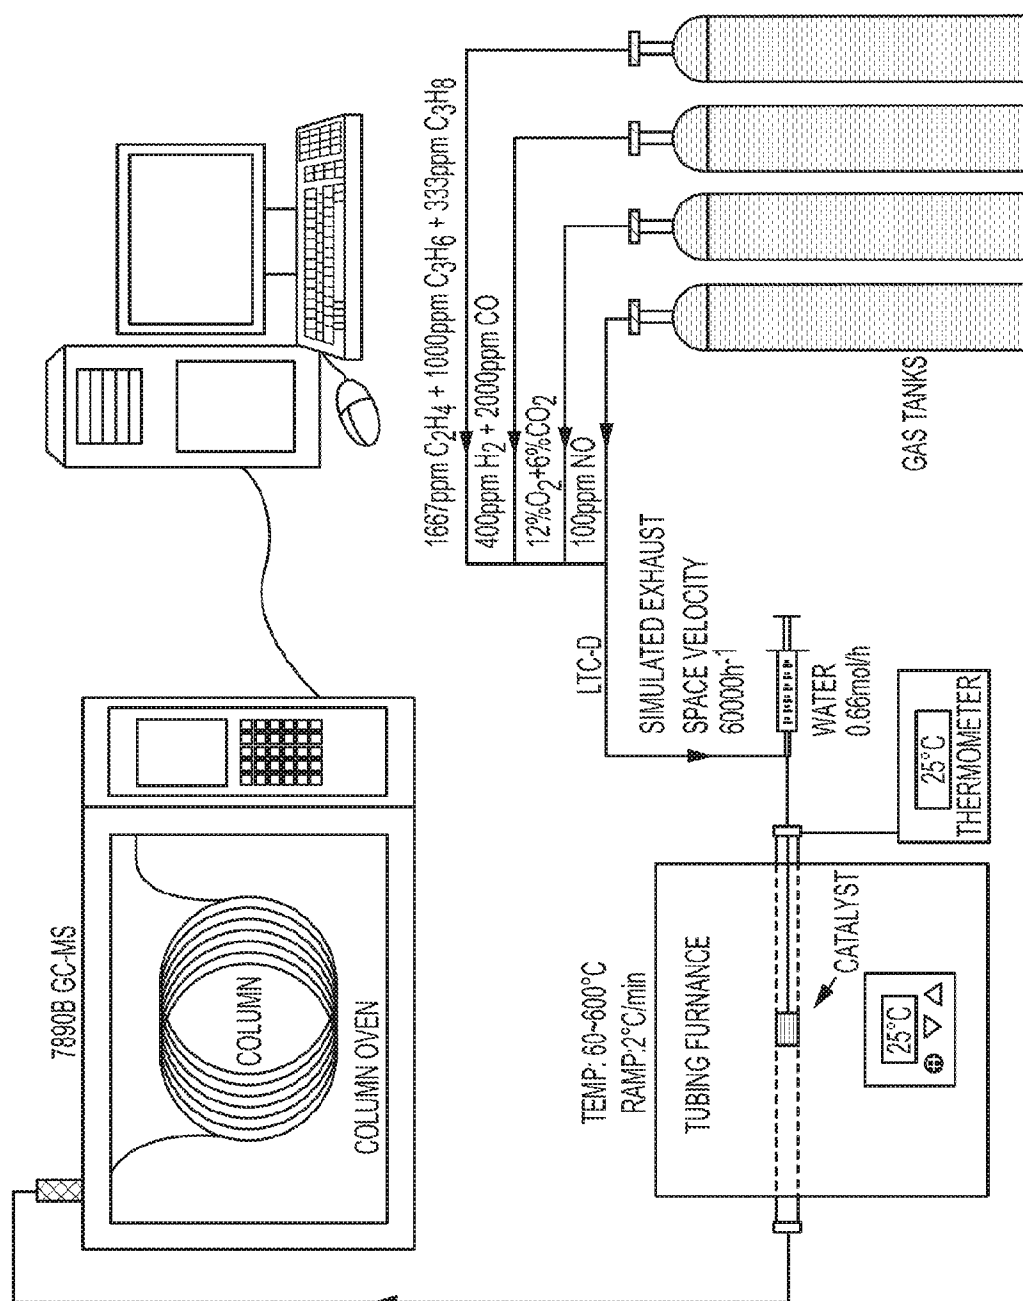


FIG. 9

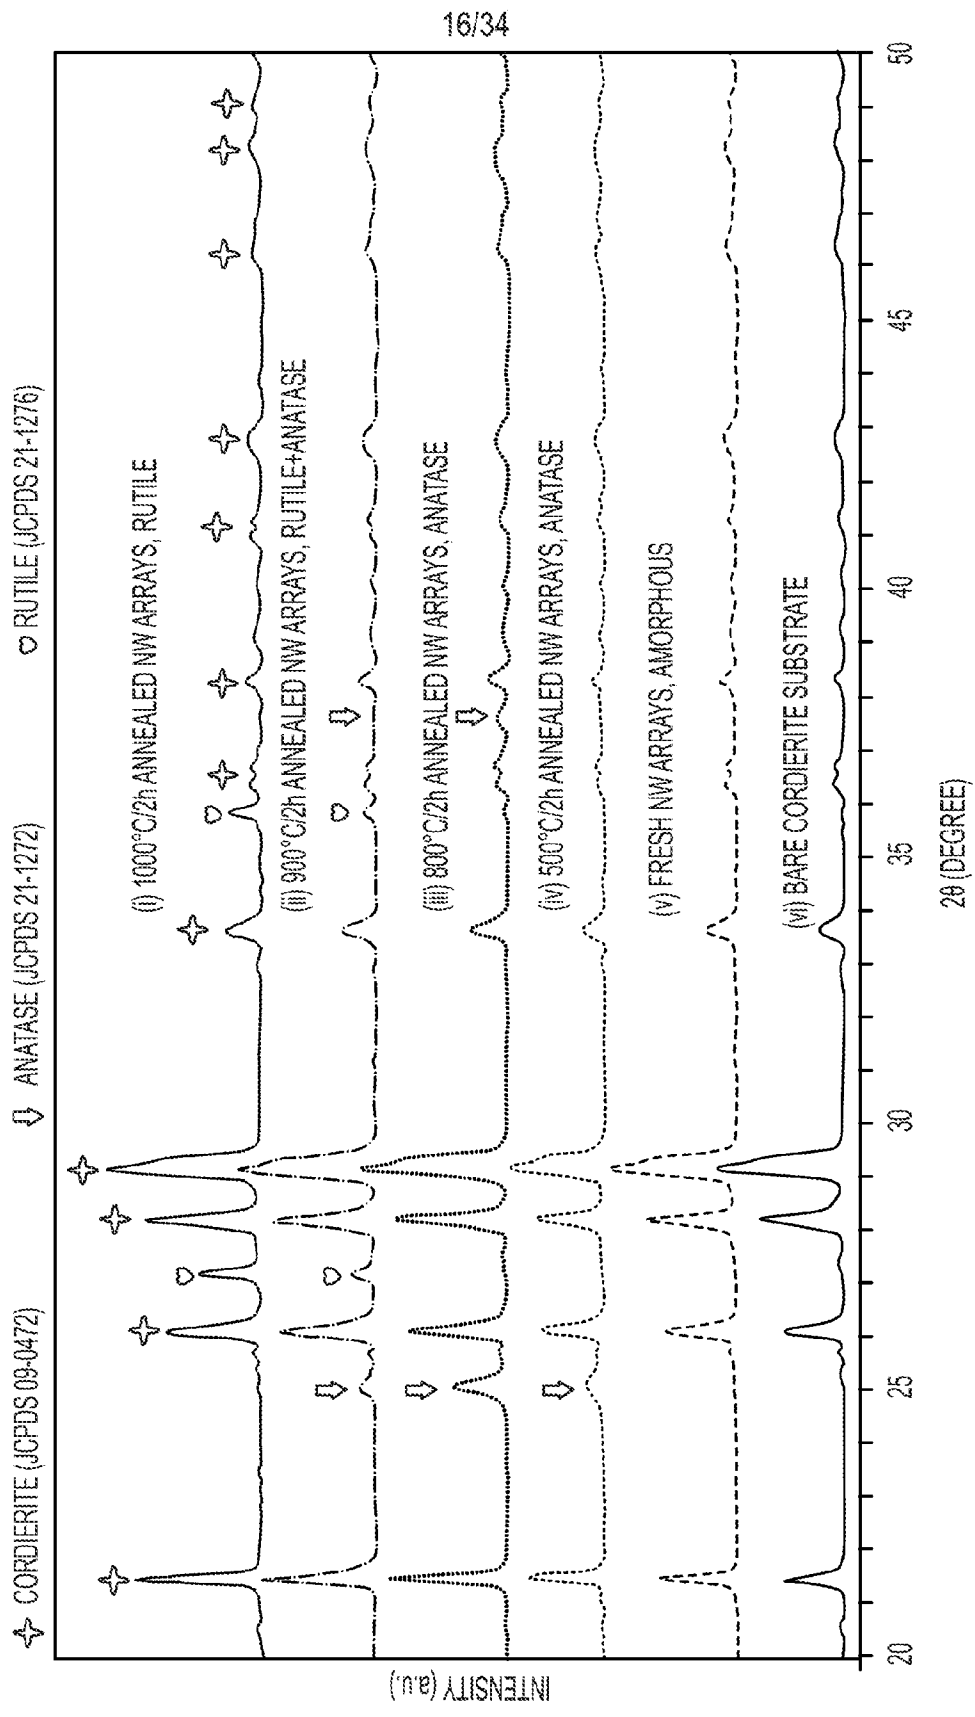
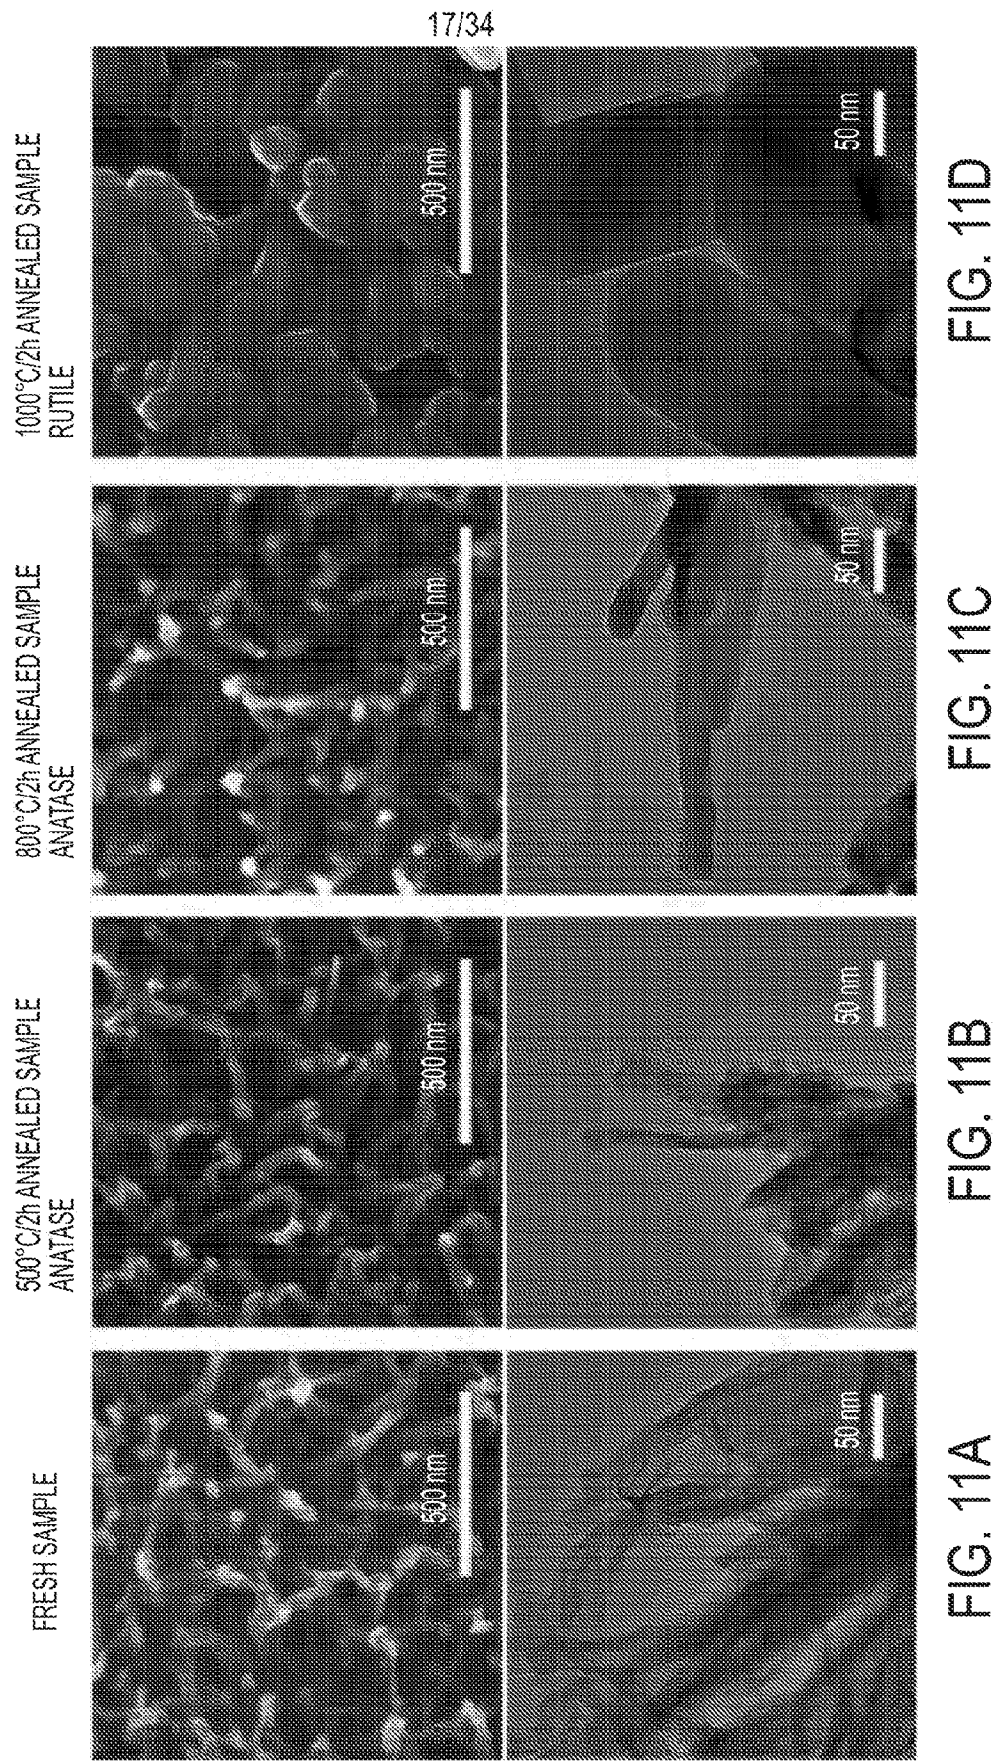


FIG. 10



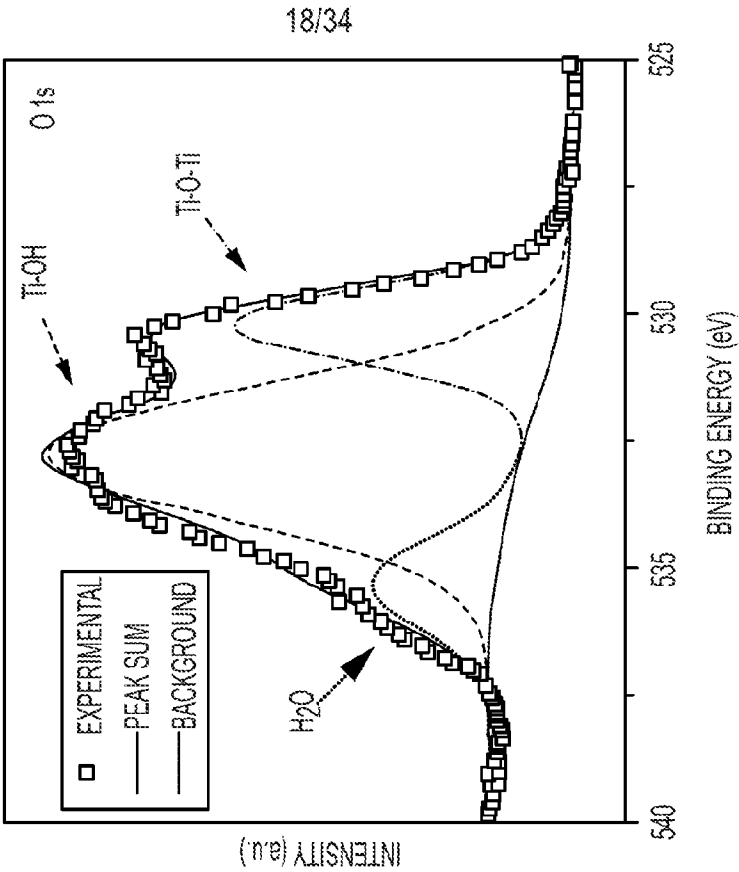


FIG. 12B

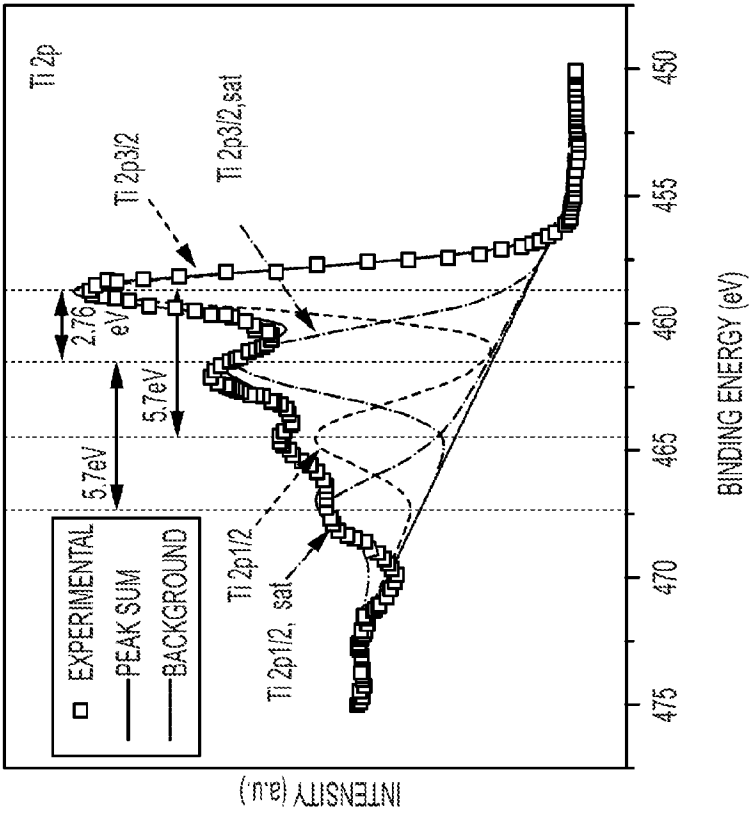


FIG. 12A

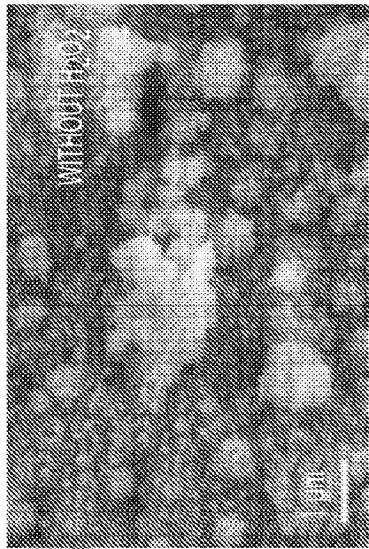


FIG. 13B

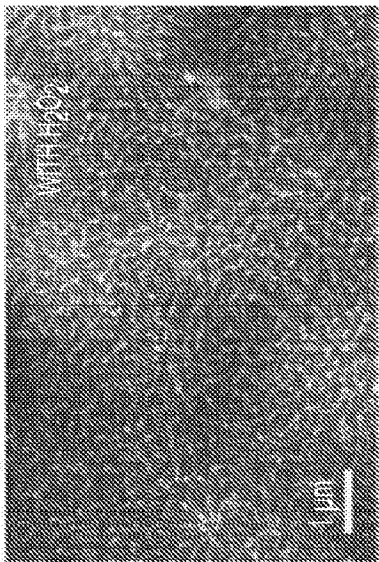


FIG. 13C

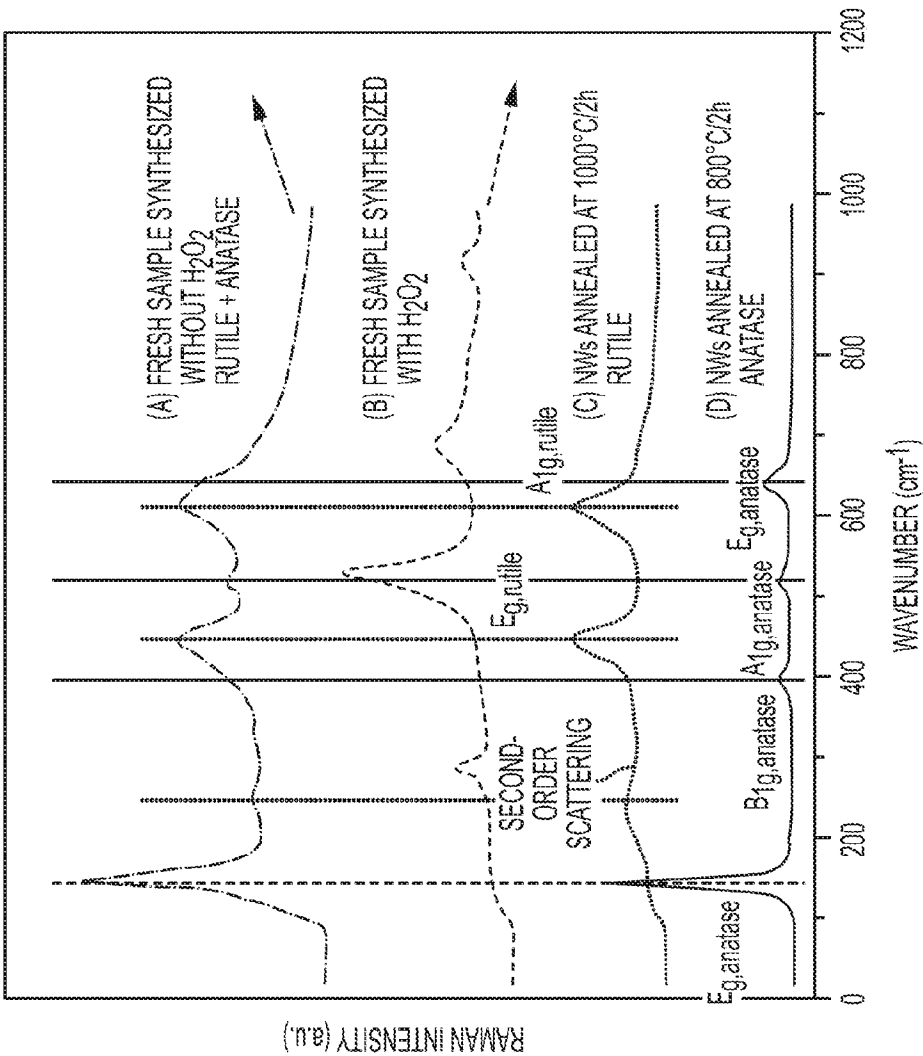


FIG. 13A

20/34

TOP VIEW

CROSS-SECTIONAL VIEW

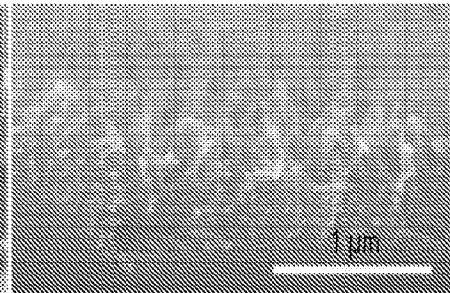
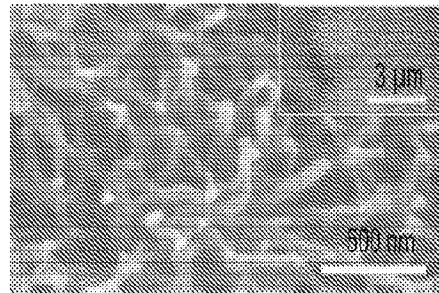
RT-1
0.20 wt.% TiCl_3 

FIG. 14A

FIG. 14B

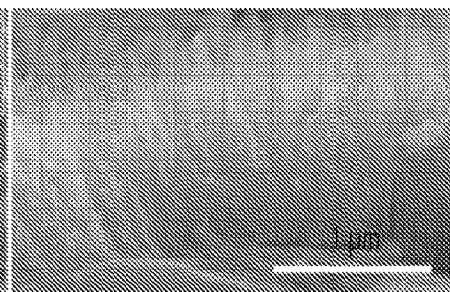
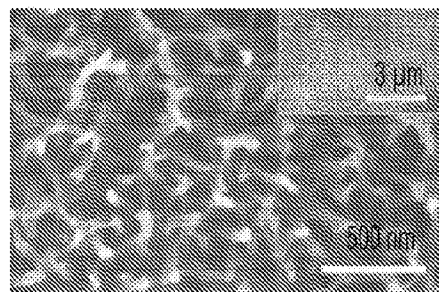
RT-2
0.35 wt.% TiCl_3 

FIG. 14C

FIG. 14D

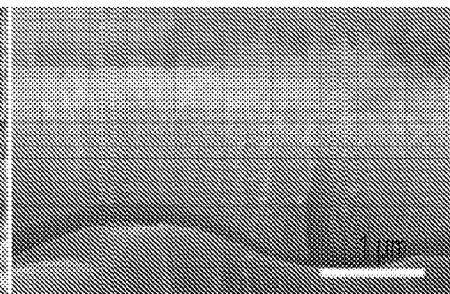
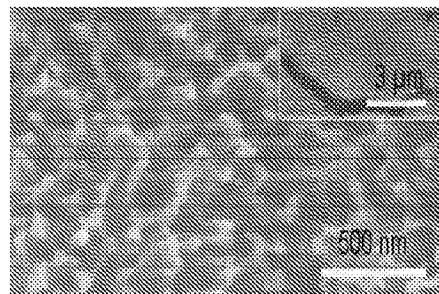
RT-3
0.50 wt.% TiCl_3 

FIG. 14E

FIG. 14F

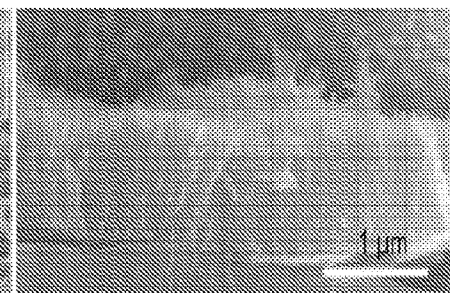
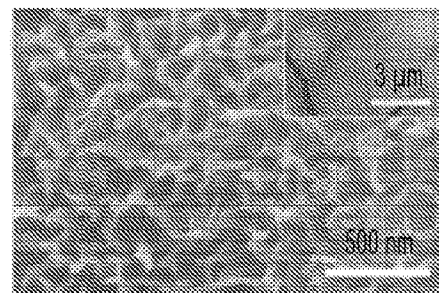
RT-4
0.70 wt.% TiCl_3 

FIG. 14G

FIG. 14H

21/34

TOP VIEW

CROSS-SECTIONAL VIEW

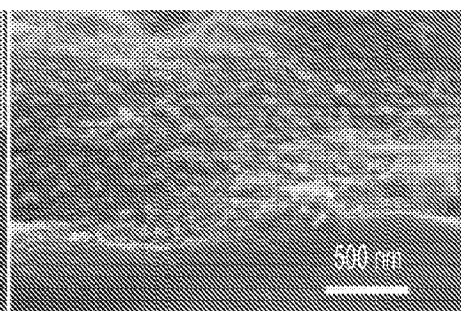
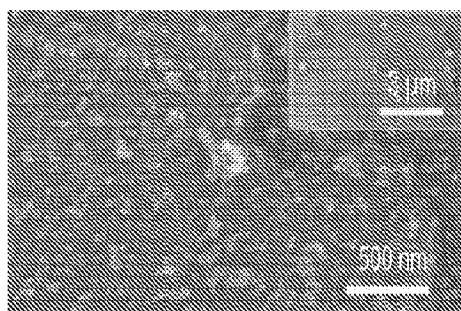
RO-1
0 mL H₂O₂

FIG. 15A

FIG. 15B

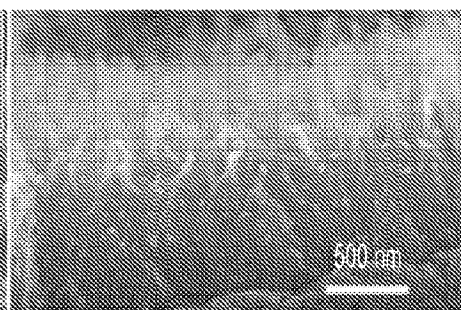
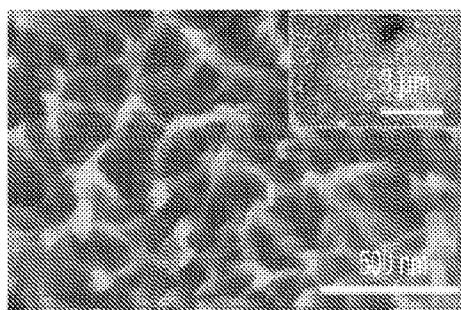
RO-2
9 mL H₂O₂

FIG. 15C

FIG. 15D

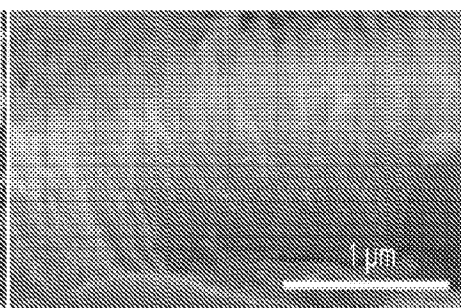
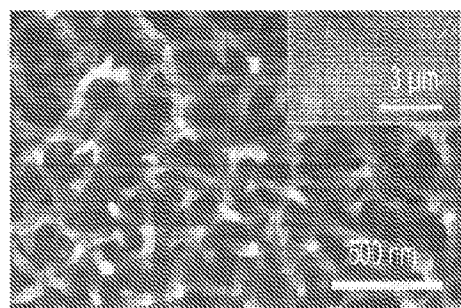
RO-3
15 mL H₂O₂

FIG. 15E

FIG. 15F

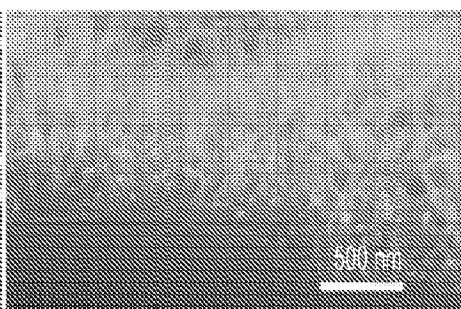
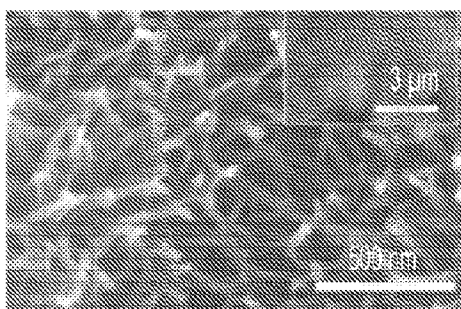
RO-4
20 mL H₂O₂

FIG. 15G

FIG. 15H

22/34

TOP VIEW

CROSS-SECTIONAL VIEW

RH-1
0 mL HCl

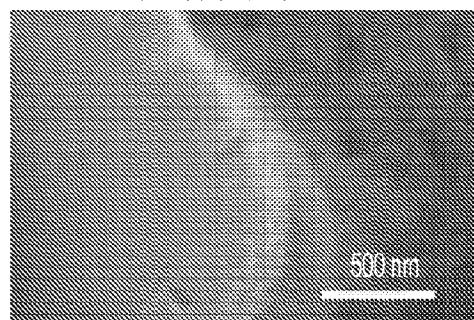
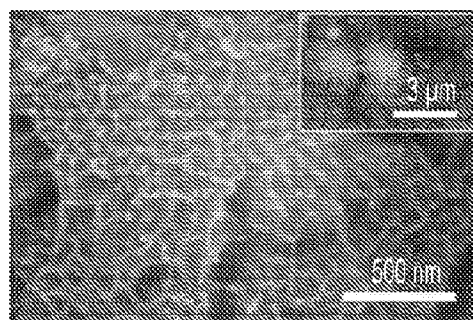


FIG. 16A

FIG. 16B

RH-2
1.5 mL HCl

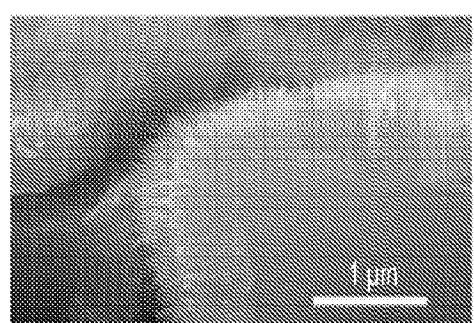
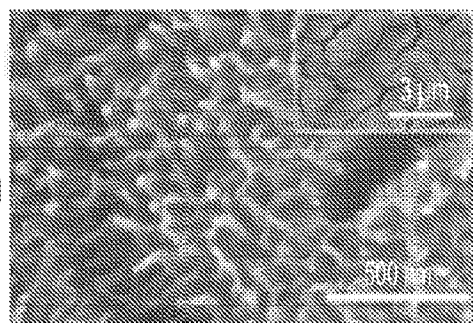


FIG. 16C

FIG. 16D

RH-3
3.5 mL HCl

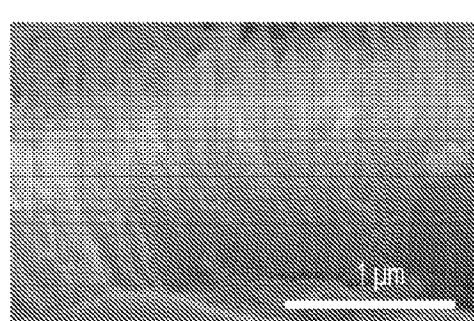
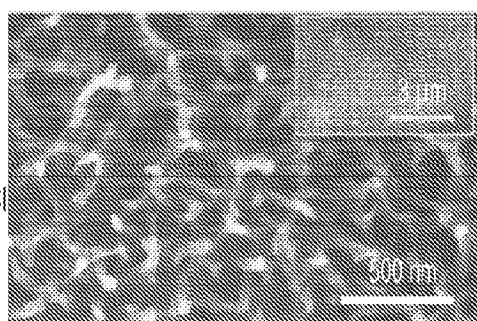


FIG. 16E

FIG. 16F

RH-4 & 5
7.5 mL HCl
10.5 mL HCl

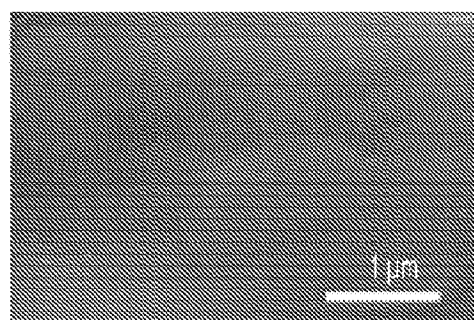
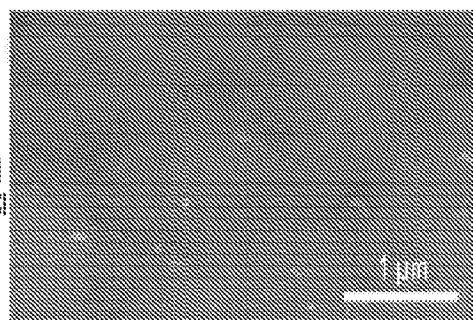


FIG. 16G

FIG. 16H

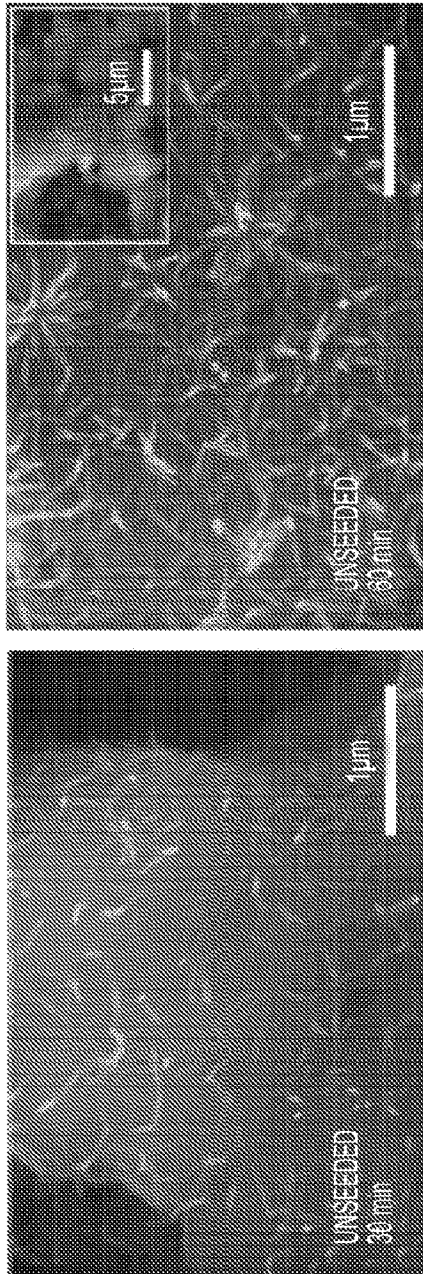


FIG. 17B

FIG. 17A

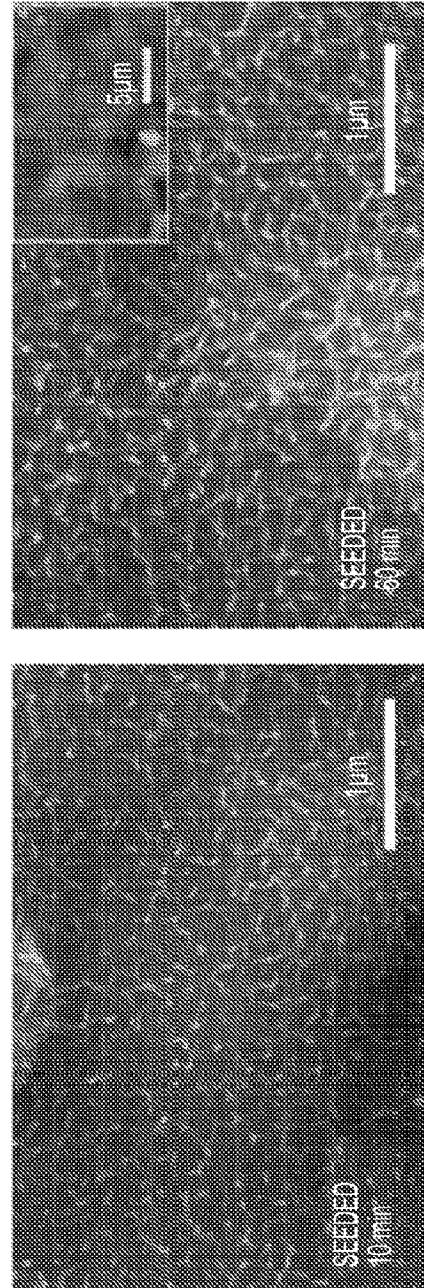


FIG. 17D

FIG. 17C

24/34

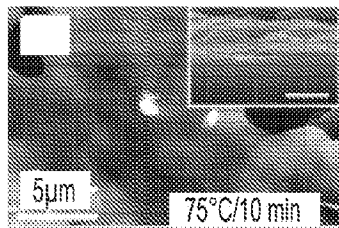


FIG. 18A

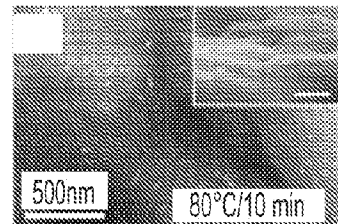


FIG. 18E

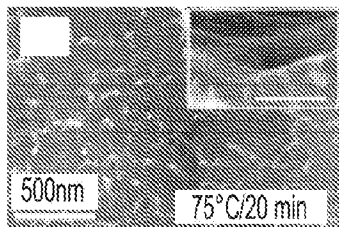


FIG. 18B

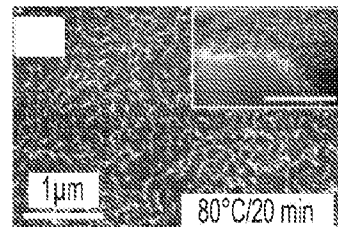


FIG. 18F

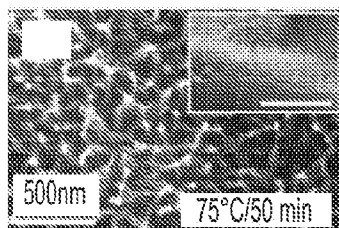


FIG. 18C

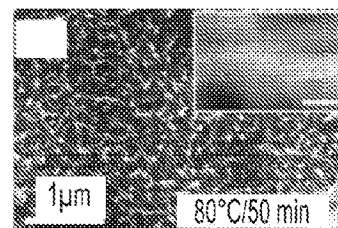


FIG. 18G

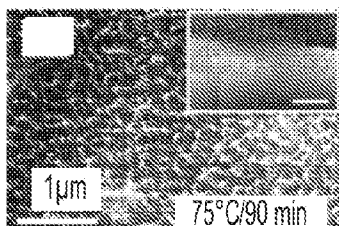


FIG. 18D

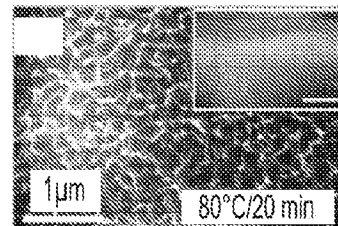


FIG. 18H

25/34

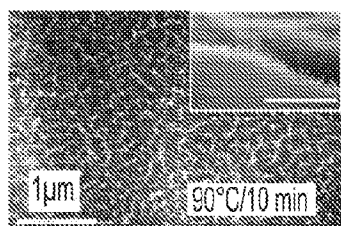


FIG. 18I

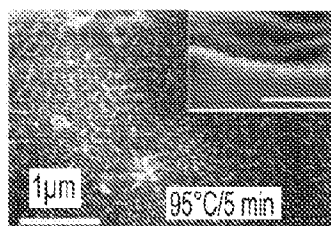


FIG. 18M

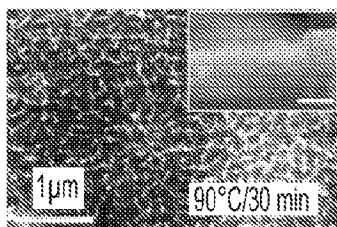


FIG. 18J

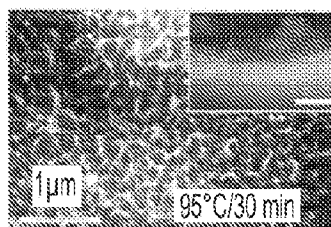


FIG. 18N

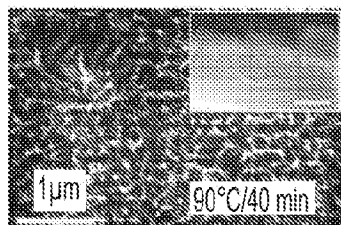


FIG. 18K

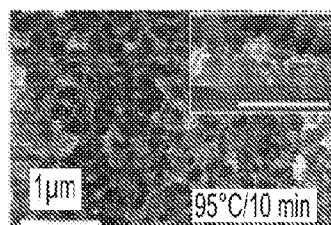


FIG. 18O

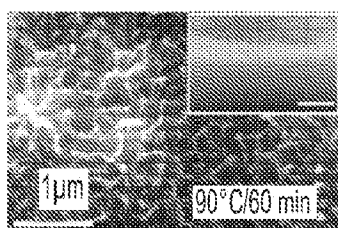


FIG. 18L

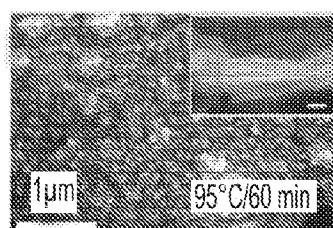


FIG. 18P

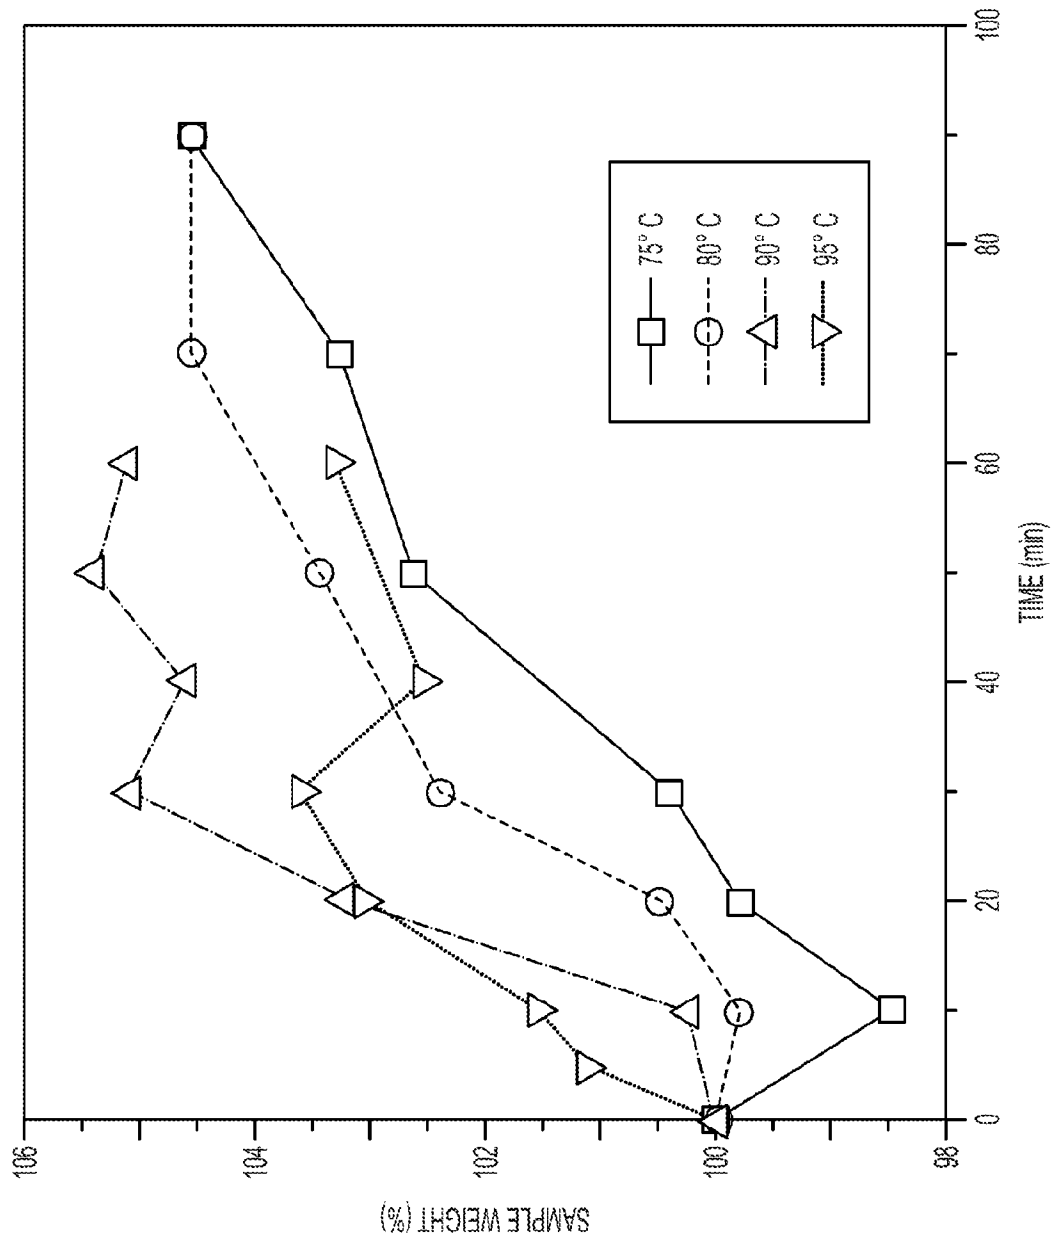


FIG. 19

27/34

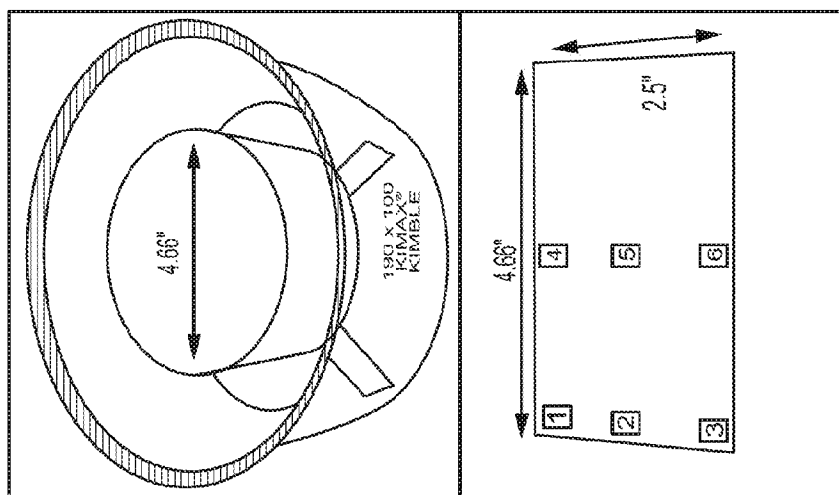


FIG. 20B

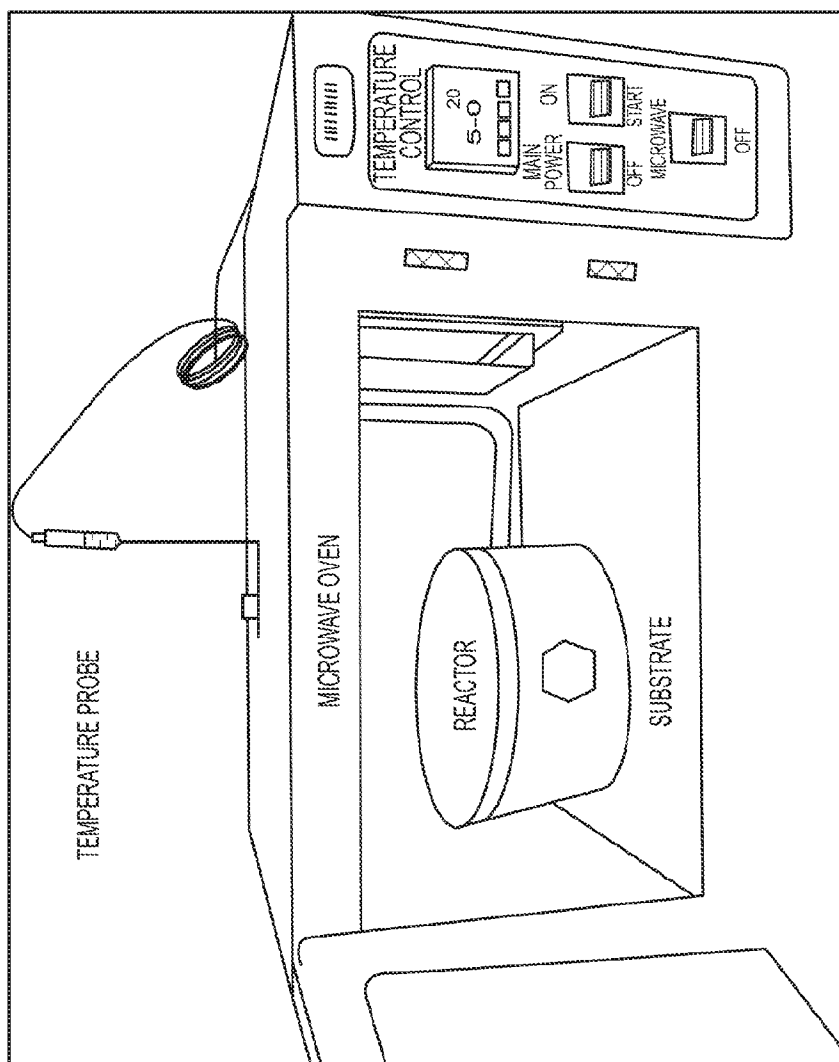


FIG. 20A

28/34

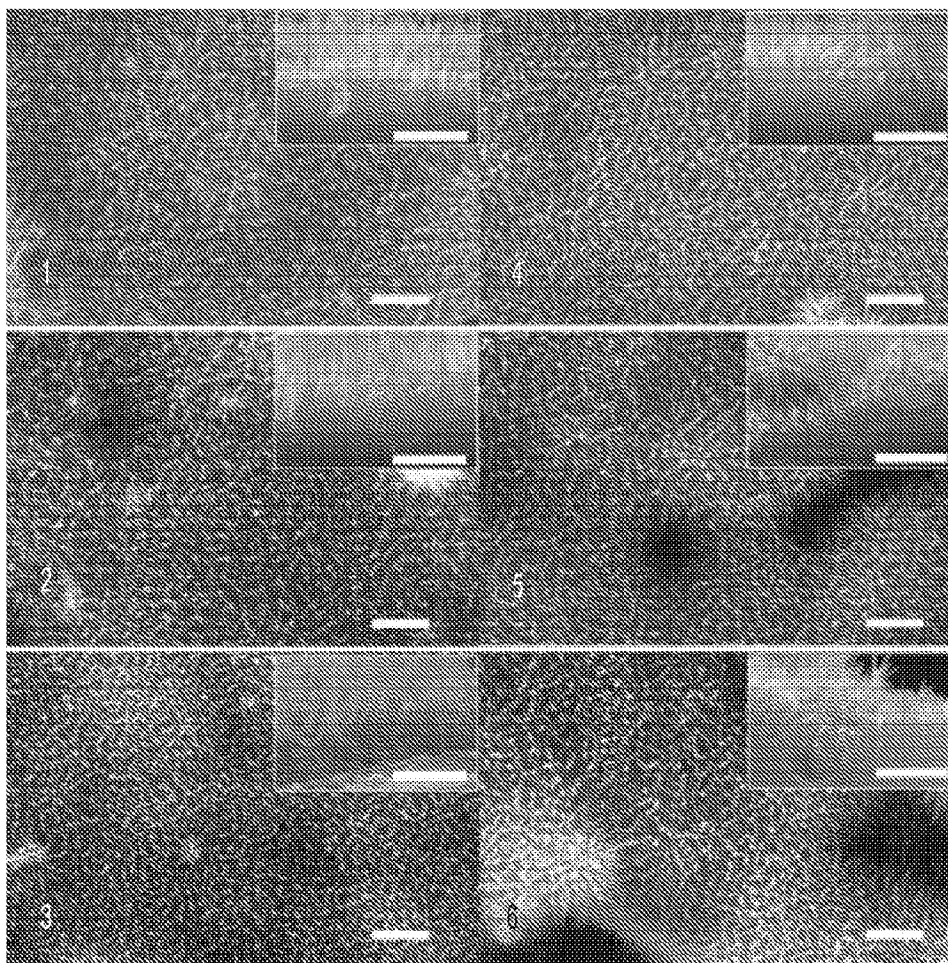


FIG. 20C

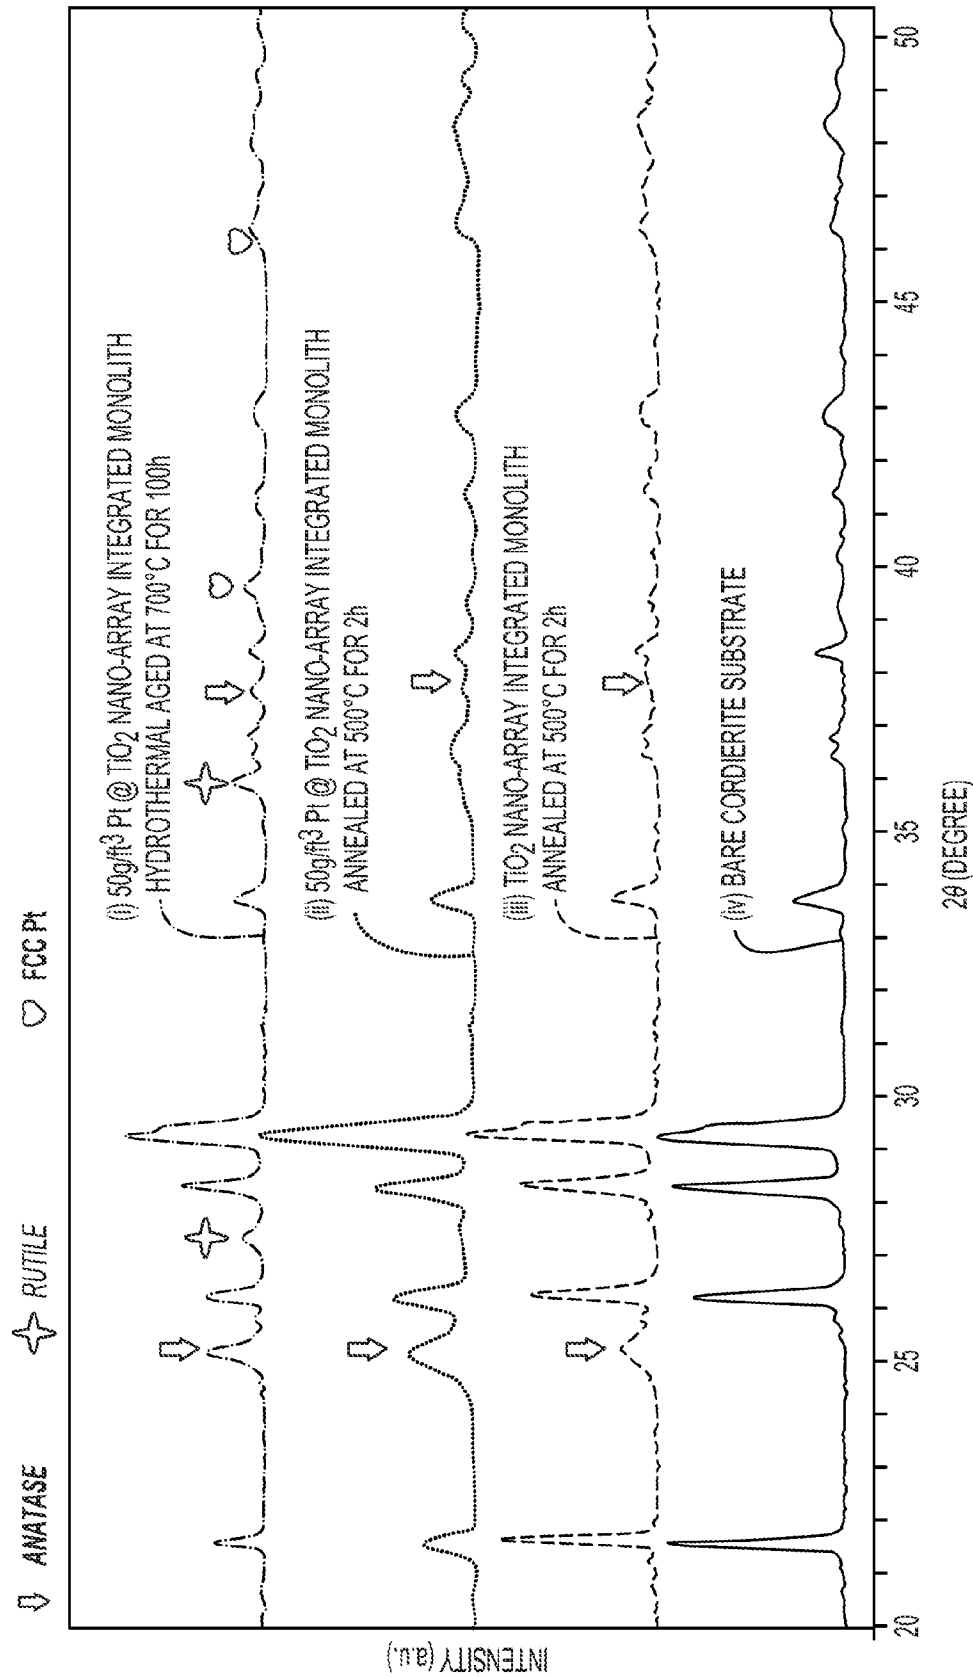


FIG. 21

30/34

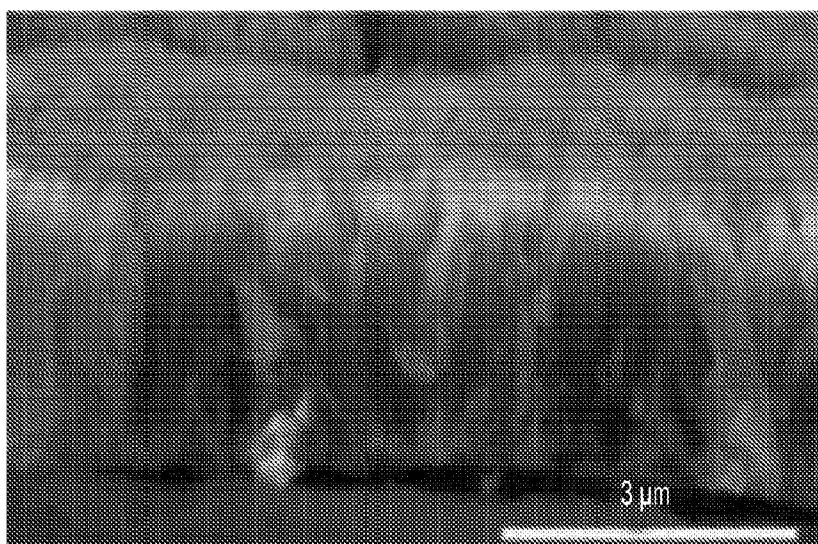


FIG. 22A

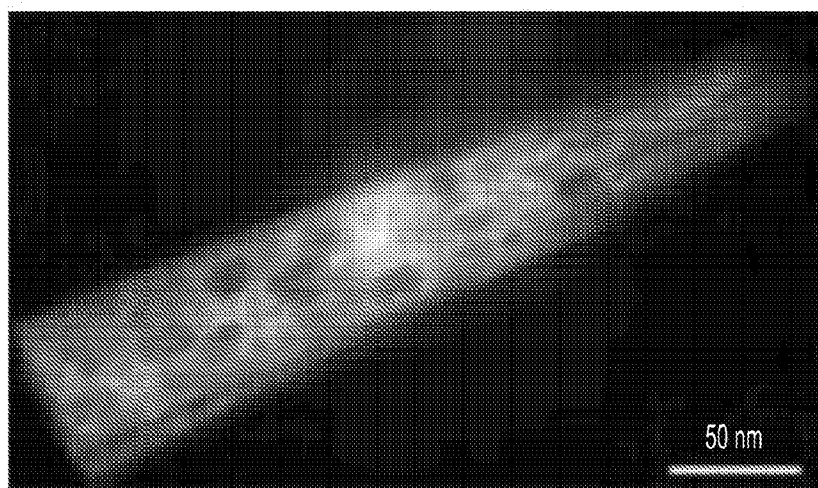


FIG. 22B

31/34

SAMPLE	BET SURFACE AREA (m ² g ⁻¹)
TiO ₂ NA	92.3
PtTiO ₂ NA	7.7
HT AGED PtTiO ₂ NA	6.1

FIG. 22C

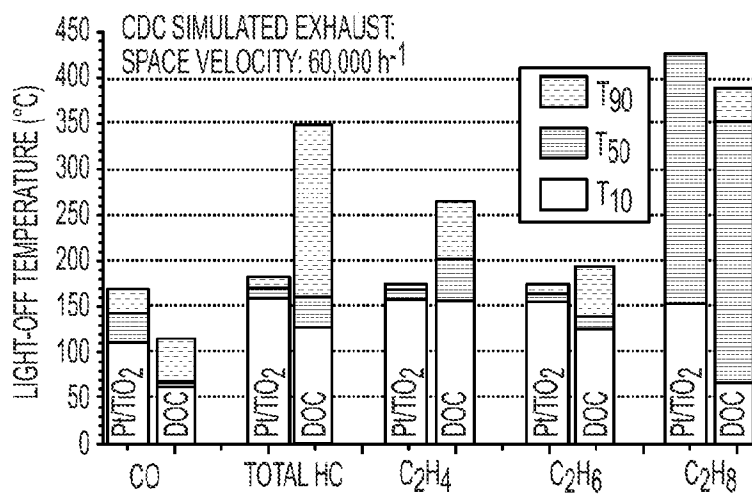


FIG. 22D

32/34

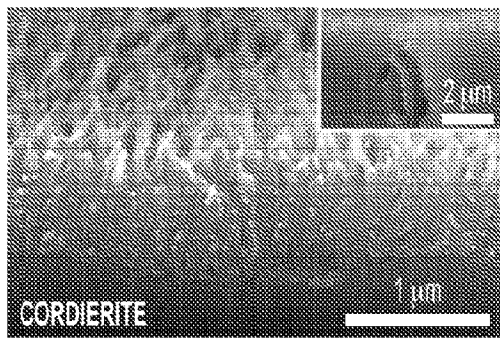


FIG. 23A

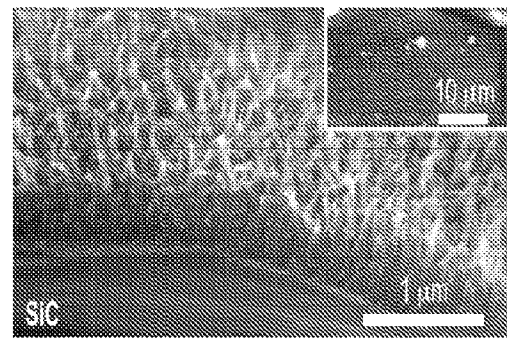


FIG. 23B

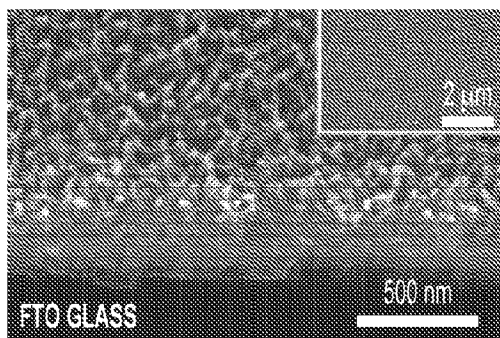


FIG. 23C

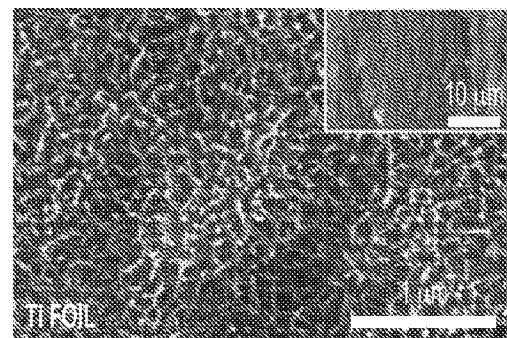


FIG. 23D

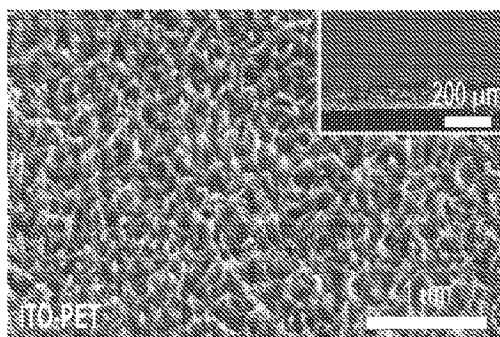


FIG. 23E

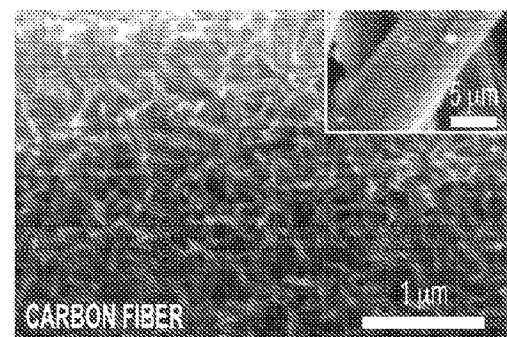


FIG. 23F

33/34

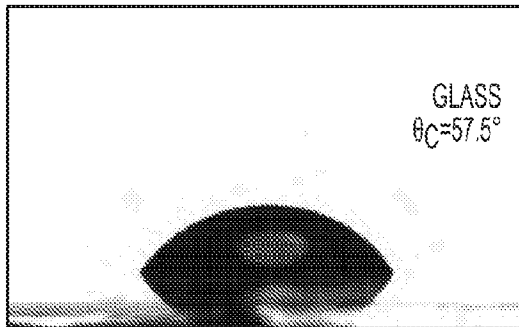


FIG. 24A

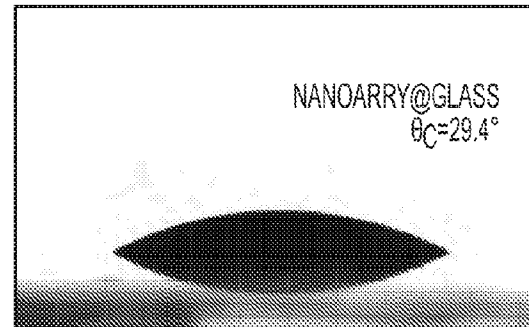


FIG. 24B

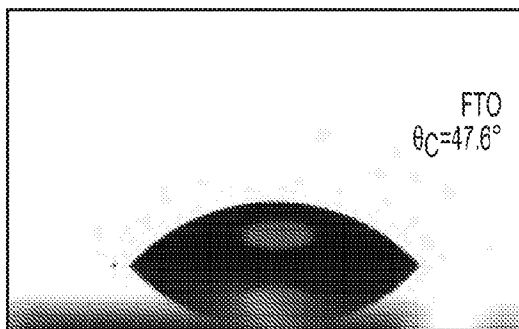


FIG. 24C

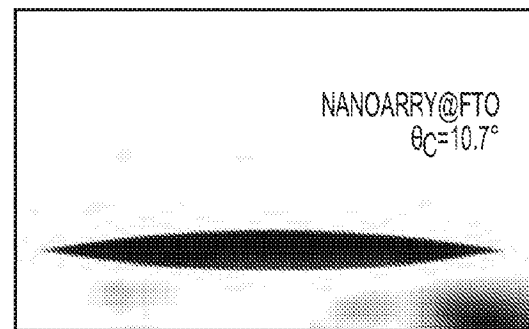


FIG. 24D

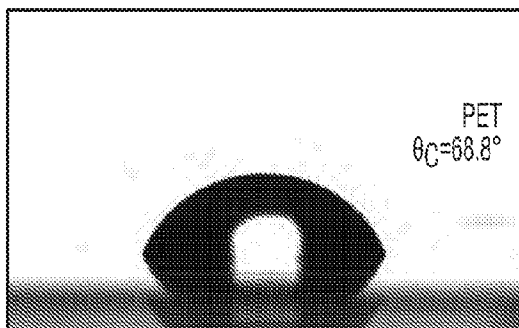


FIG. 24E

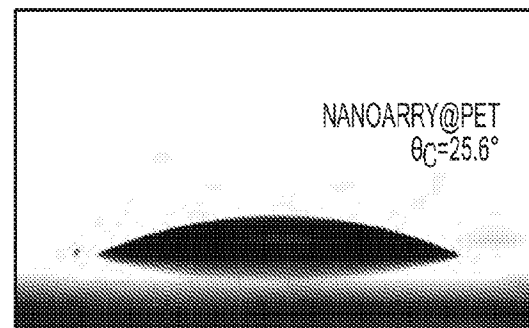


FIG. 24F

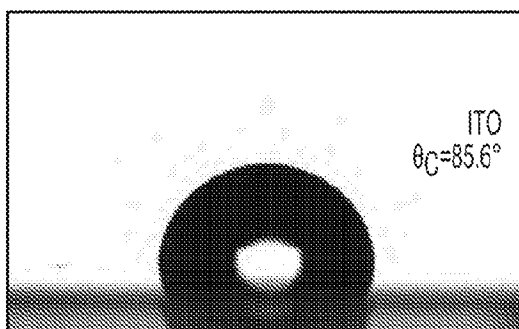


FIG. 24G

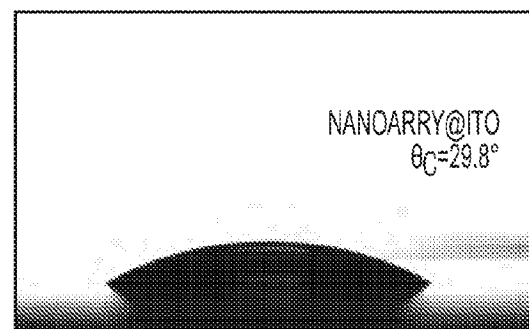


FIG. 24H

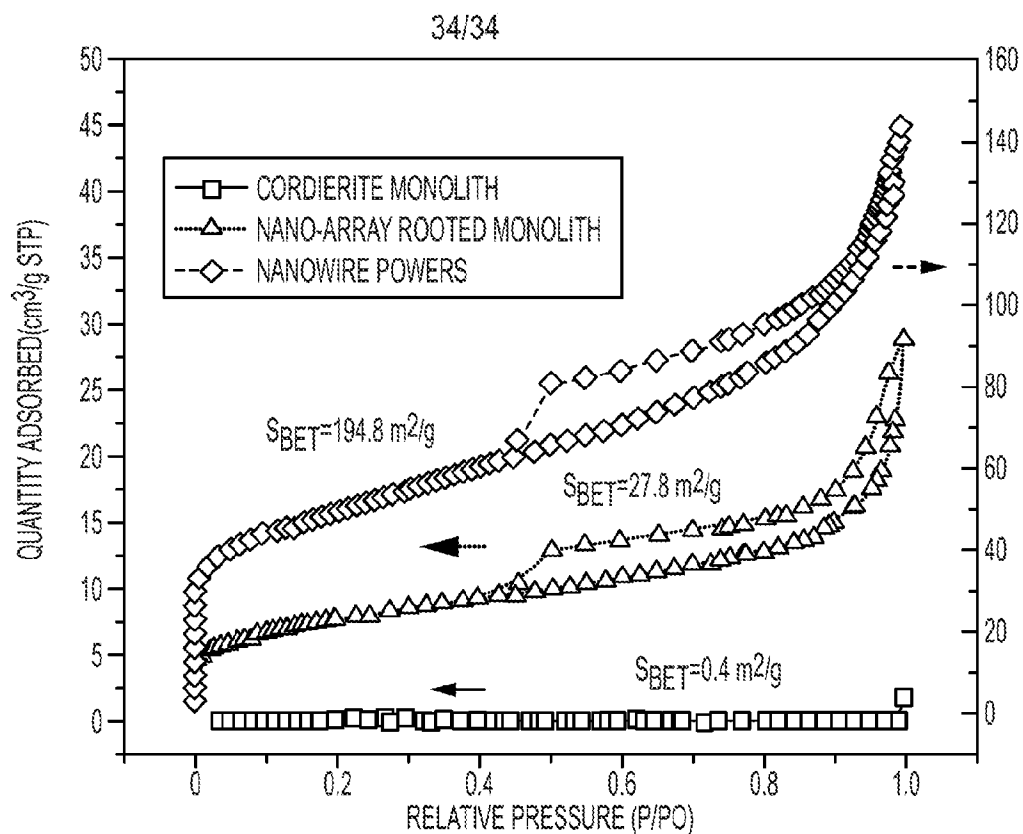


FIG. 25A

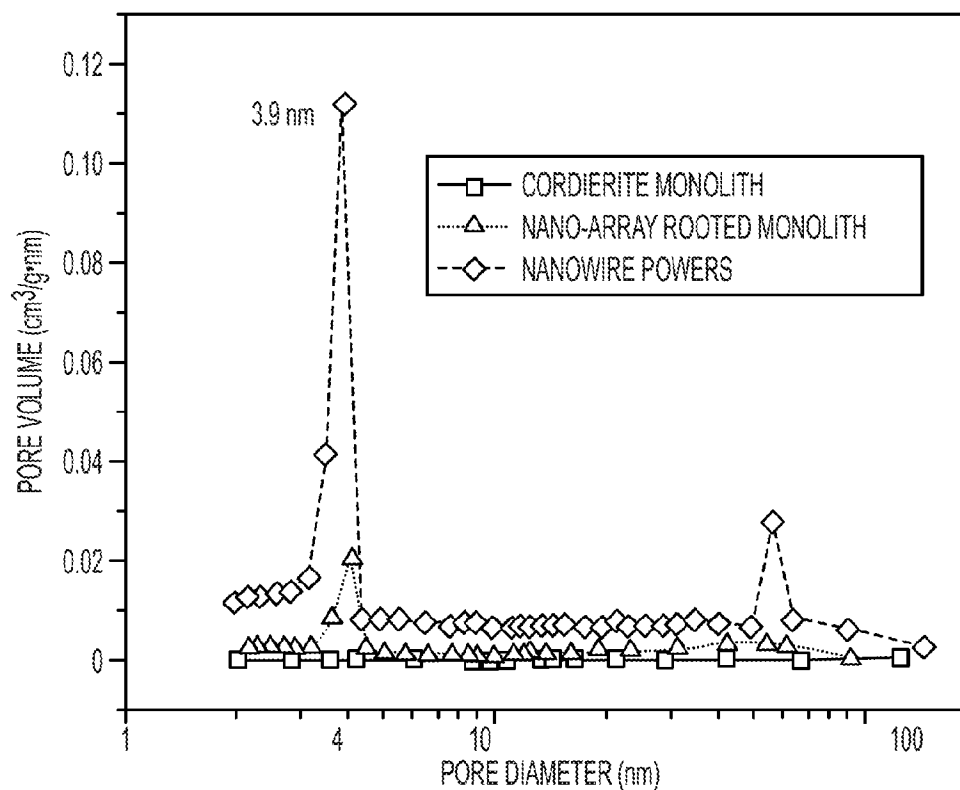


FIG. 25B

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/035756

A. CLASSIFICATION OF SUBJECT MATTER		
INV.	B01J21/06 B01J35/06 F01N3/10	B01J23/40 B01J37/02
	B01J23/42 B01J37/08	B01J35/00 B01J37/34
		B01J35/04 B01D53/86
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) B82B B01J B01D B82Y C04B F01N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YANBING GUO ET AL: "Robust 3-D configured metal oxide nano-array based monolithic catalysts with ultrahigh materials usage efficiency and catalytic performance tunability", NANO ENERGY, vol. 2, no. 5, 1 September 2013 (2013-09-01), pages 873-881, XP055498426, ISSN: 2211-2855, DOI: 10.1016/j.nanoen.2013.03.004	35-42
A	the whole document abstract "I. Introduction", last paragraph "Experimental: Growth of nano-array based monolithic catalysts" "Results and discussion": second paragraph pages 1a,1b,1g ----- -/--	1-34
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 14 August 2018		Date of mailing of the international search report 28/08/2018
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Gosselin, Daniel

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/035756

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	XINJIAN FENG ET AL: "Vertically Aligned Single Crystal TiO ₂ Nanowire Arrays Grown Directly on Transparent Conducting Oxide Coated Glass: Synthesis Details and Applications", NANO LETTERS, vol. 8, no. 11, 12 November 2008 (2008-11-12), pages 3781-3786, XP055498183, US ISSN: 1530-6984, DOI: 10.1021/nl802096a	35
A	the whole document abstract Page 3782, left hand column, first and second paragraphs figures 1,2	1-34, 36-42
X	----- US 2014/256534 A1 (GAO PU-XIAN [US] ET AL) 11 September 2014 (2014-09-11)	35-42
A	the whole document abstract paragraphs [0062], [0066], [0072], [0079], [0088] - [0090], [0094], [0100], [0101], [0110], [0115], [0117], [0134], [0135], [0001] tables 2,3,5 figure 17b	1-34
A	----- CHIU-HSUN LIN ET AL: "Effect of Calcination Temperature on the Structure of a Pt/TiO ₂ (B) Nanofiber and Its Photocatalytic Activity in Generating H ₂ ", LANGMUIR, vol. 24, no. 17, 2 September 2008 (2008-09-02), pages 9907-9915, XP055084672, ISSN: 0743-7463, DOI: 10.1021/la800572g abstract "2.1. Photocatalyst Preparations." "3.1. Characterization of Morphology and Microstructure.": first paragraph figures 6,9a,9b	1-42
A	----- WO 2012/052624 A1 (OULUN YLIOPISTO [FI]; UNIV SZEGED [HU]; WU MING-CHUNG [FI]; SAPI ANDRA) 26 April 2012 (2012-04-26) the whole document abstract page 13, lines 14-33 page 16, lines 14-23 ----- -/--	1-42

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/035756

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2013/034472 A1 (CANTRELL TIMOTHY C [US] ET AL) 7 February 2013 (2013-02-07) the whole document abstract paragraphs [0003], [0007], [0008], [0065]; claims 1-7,21 -----	1-42
T	SON HOANG ET AL: "High performance diesel oxidation catalysts using ultra-low Pt loading on titania nanowire array integrated cordierite honeycombs", CATALYSIS TODAY, 1 November 2017 (2017-11-01), XP055498470, AMSTERDAM, NL ISSN: 0920-5861, DOI: 10.1016/j.cattod.2017.11.019 the whole document -----	
X	LIU B ET AL: "Oriented single crystalline titanium dioxide nanowires", NANOTECHNOLOGY, IOP, BRISTOL, GB, vol. 19, no. 50, 17 December 2008 (2008-12-17), page 505604, XP020144975, ISSN: 0957-4484, DOI: 10.1088/0957-4484/19/50/505604	35-42
A	the whole document abstract "2. Experimental details" "3. Results and discussion" -----	1-34

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/035756

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014256534 A1	11-09-2014	CN 104080728 A	01-10-2014
		EP 2760782 A2	06-08-2014
		US 2014256534 A1	11-09-2014
		WO 2013049606 A2	04-04-2013

WO 2012052624 A1	26-04-2012	EP 2630086 A1	28-08-2013
		WO 2012052624 A1	26-04-2012

US 2013034472 A1	07-02-2013	US 2013034472 A1	07-02-2013
		WO 2011127095 A2	13-10-2011
