




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B32B 27/12, D04H 13/00</b>		A1	(11) International Publication Number: <b>WO 96/34741</b>
		(43) International Publication Date: 7 November 1996 (07.11.96)	
(21) International Application Number: PCT/US96/05648 (22) International Filing Date: 19 April 1996 (19.04.96) (30) Priority Data: 08/432,889          2 May 1995 (02.05.95)          US (71) Applicant: KIMBERLY-CLARK CORPORATION [US/US]; 401 North Lake Street, Neenah, WI 54956 (US). (72) Inventor: STOPPER, Steven, Ray; 1832 Mount Hope Court, Duluth, GA 30136 (US). (74) Agents: ROBINSON, James, B. et al.; Kimberly-Clark Corpo- ration, 401 North Lake Street, Neenah, WI 54956 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: NONWOVEN-FILM LAMINATES

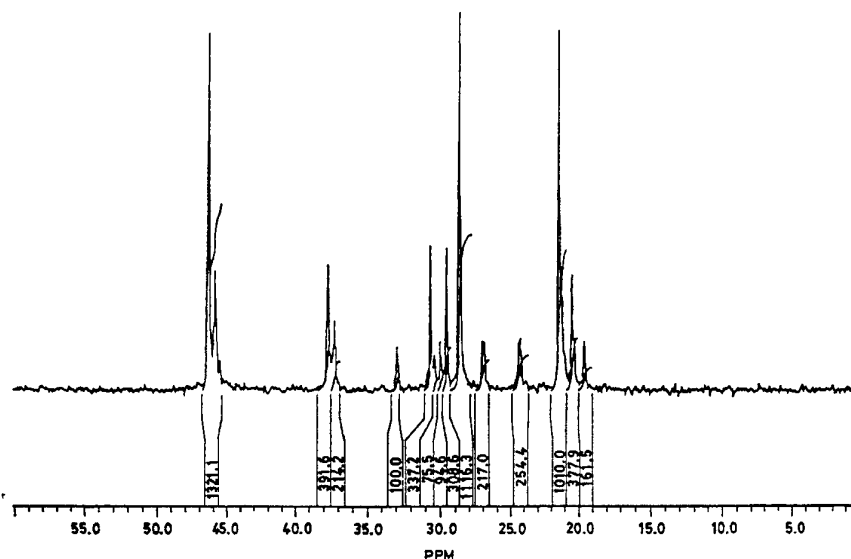

## (57) Abstract

There is provided herein a multilayer laminate comprised of a layer of a film and a layer of a nonwoven fabric. The film is made from polymers and has as one surface a semi-crystalline/amorphous or "heterophasic" polymer, an optional inner, less expensive, filler type polymer, and as the other surface, a polymer with a lower coefficient of friction. The nonwoven fabric may be a spunbond or meltblown fabric, preferably spunbond and preferably also including a heterophasic polymer. The film and nonwoven components are bonded together using thermal point bonding preferably while the film is stretched at least 5 percent. Such a laminate may be made into a personal care product like a diaper, training pant, absorbent underpants, adult incontinence product, and feminine hygiene product.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

NONWOVEN-FILM LAMINATESBACKGROUND OF THE INVENTION

5

Thermoplastic resins have been extruded to form fibers, films and webs for a number of years. The most common thermoplastics for these applications are polyolefins, particularly polypropylene and polyethylene, though each  
10 material has its characteristic advantages and disadvantages vis a vis the properties desired in the final products.

Nonwoven fabrics are one type of product which can be made from such polymers and are useful for a wide variety of applications such as personal care products like diapers, feminine hygiene products and incontinence products, infection  
15 control products, garments and many others. The nonwoven fabrics used in these applications are often in the form of laminates having various numbers of layers of meltblown fabric, spunbond fabric and/or films like spunbond/meltblown/spunbond  
20 (SMS) laminates, SMMS laminates, spunbond/film (SF) and SFS laminates and even laminates having 6 or more layers.

One disadvantage to, in particular, SF laminates, is that they can delaminate under certain conditions. Such delamination is, of course, undesirable, as it can result in  
25 product failure. There remains a need for a spunbond/film laminate which is lightweight and thin yet also provides adequate adhesion between the layers such that delamination does not occur.

It is an object of this invention to provide laminates  
30 having at least one layer of a nonwoven fabric with at least one layer of a film where the laminate exhibits greater

delamination or peel strength than heretofore known similar laminates.

#### SUMMARY OF THE INVENTION

5

There is provided herein a multilayer laminate comprised of a layer of a film and a layer of a nonwoven fabric. The film is made from polymers and has as one surface a semi-crystalline/amorphous or "heterophasic" polymer, an optional  
10 inner, less expensive, filler type polymer, and as the other surface, a polymer with a lower coefficient of friction. The nonwoven fabric may be a spunbond or meltblown fabric, preferably spunbond and preferably also including a heterophasic polymer. The film and nonwoven components are  
15 bonded together using thermal point bonding preferably while the film is stretched at least 5 percent. Such a laminate may be made into a personal care product like a diaper, training pant, absorbent underpants, adult incontinence product, and feminine hygiene product.

20

#### DEFINITIONS

As used herein the term "nonwoven fabric or web" means a web having a structure of individual fibers or threads which  
25 are interlaid, but not in an identifiable manner as in a knitted fabric. Nonwoven fabrics or webs have been formed from many processes such as for example, meltblowing processes, spunbonding processes, and bonded carded web processes. The basis weight of nonwoven fabrics is usually expressed in ounces  
30 of material per square yard (osy) or grams per square meter (gsm) and the fiber diameters useful are usually expressed in microns. (Note that to convert from osy to gsm, multiply osy by 33.91).

As used herein the term "microfibers" means small diameter  
35 fibers having an average diameter not greater than about 75 microns, for example, having an average diameter of from about 0.5 microns to about 50 microns, or more particularly,

microfibers may have an average diameter of from about 2 microns to about 40 microns. Another frequently used expression of fiber diameter is denier, which is defined as grams per 9000 meters of a fiber. For example, the diameter of a polypropylene fiber given in microns may be converted to denier by squaring, and multiplying the result by 0.00629, thus, a 15 micron polypropylene fiber has a denier of about 1.42 ( $15^2 \times 0.00629 = 1.415$ ).

As used herein the term "spunbonded fibers" refers to small diameter fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinnerette with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Patent no. 4,340,563 to Appel et al., and U.S. Patent no. 3,692,618 to Dorschner et al., U.S. Patent no. 3,802,817 to Matsuki et al., U.S. Patent nos. 3,338,992 and 3,341,394 to Kinney, U.S. Patent no. 3,502,763 to Hartman, U.S. Patent 3,502,538 to Levy, and U.S. Patent no. 3,542,615 to Dobo et al. Spunbond fibers are generally not tacky when they are deposited onto a collecting surface. Spunbond fibers are generally continuous and have diameters larger than 7 microns, more particularly, between about 10 and 20 microns.

As used herein the term "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity gas (e.g. air) streams which attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly disbursed meltblown fibers. Such a process is disclosed, for example, in U.S. Patent no. 3,849,241 to Butin. Meltblown fibers are microfibers which may be continuous or discontinuous, are generally smaller than 10 microns in diameter, and are generally tacky when deposited onto a collecting surface.

As used herein the term "polymer" generally includes but is not limited to, homopolymers, copolymers, such as for example, block, graft, random and alternating copolymers, terpolymers, etc. and blends and modifications thereof. Furthermore, unless  
5 otherwise specifically limited, the term "polymer" shall include all possible geometrical configuration of the material. These configurations include, but are not limited to isotactic, syndiotactic and random symmetries.

As used herein the term "heterophasic" in reference to a  
10 polymer means a thermoplastic polymer which has both elastic and plastic properties. Such polymers are sometimes referred to as "plasto-elastic" or "elastoplastic" polymers and may be semi-crystalline/amorphous in character. These polymers possess a compromise of elastic properties and mechanical  
15 resistance and can easily be transformed into manufactured articles by using the apparatus and processes normally used for thermoplastic materials.

As used herein the term "monocomponent" fiber refers to a fiber formed from one or more extruders using only one polymer.  
20 This is not meant to exclude fibers formed from one polymer to which small amounts of additives have been added for coloration, anti-static properties, lubrication, hydrophilicity, etc. These additives, e.g. titanium dioxide for coloration, are generally present in an amount less than 5  
25 weight percent and more typically about 2 weight percent.

As used herein the term "conjugate fibers" refers to fibers which have been formed from at least two polymers extruded from separate extruders but spun together to form one fiber. Conjugate fibers are also sometimes referred to as  
30 multicomponent or bicomponent fibers. The polymers are usually different from each other though conjugate fibers may be monocomponent fibers. The polymers are arranged in substantially constantly positioned distinct zones across the cross-section of the conjugate fibers and extend continuously  
35 along the length of the conjugate fibers. The configuration of such a conjugate fiber may be, for example, a sheath/core arrangement wherein one polymer is surrounded by another or may

be a side by side arrangement or an "islands-in-the-sea" arrangement. Conjugate fibers are taught in U.S. Patent 5,108,820 to Kaneko et al., U.S. Patent 5,336,552 to Strack et al., and U.S. Patent 5,382,400 to Pike et al. For two  
5 component fibers, the polymers may be present in ratios of 75/25, 50/50, 25/75 or any other desired ratios.

As used herein the term "biconstituent fibers" refers to fibers which have been formed from at least two polymers extruded from the same extruder as a blend. The term "blend"  
10 is defined below. Biconstituent fibers do not have the various polymer components arranged in relatively constantly positioned distinct zones across the cross-sectional area of the fiber and the various polymers are usually not continuous along the entire length of the fiber, instead usually forming fibrils or  
15 protofibrils which start and end at random. Biconstituent fibers are sometimes also referred to as multiconstituent fibers. Fibers of this general type are discussed in, for example, U.S. Patent 5,108,827 to Gessner. Conjugate and biconstituent fibers are also discussed in the textbook Polymer  
20 Blends and Composites by John A. Manson and Leslie H. Sperling, copyright 1976 by Plenum Press, a division of Plenum Publishing Corporation of New York, ISBN 0-306-30831-2, at pages 273 through 277.

As used herein the term "blend" means a mixture of two or  
25 more polymers while the term "alloy" means a sub-class of blends wherein the components are immiscible but have been compatibilized. "Miscibility" and "immiscibility" are defined as blends having negative and positive values, respectively, for the free energy of mixing. Further, "compatibilization" is  
30 defined as the process of modifying the interfacial properties of an immiscible polymer blend in order to make an alloy.

As used herein, the term "stitchbonded" means, for example, the stitching of a material in accordance with U.S. Patent 4,891,957 to Strack et al. or U.S. Patent 4,631,933 to Carey,  
35 Jr.

As used herein, "ultrasonic bonding" means a process performed, for example, by passing the fabric between a sonic

horn and anvil roll as illustrated in U.S. Patent 4,374,888 to Bornslaeger.

As used herein, "hydroentanglement" means a bonding process performed, for example, by subjecting a web to high pressure water jets which entangle fibers together and thereby increase web integrity.

As used herein "thermal point bonding" involves passing a fabric or web of fibers to be bonded between a heated calender roll and an anvil roll. The calender roll is usually, though not always, patterned in some way so that the entire fabric is not bonded across its entire surface. As a result, various patterns for calender rolls have been developed for functional as well as aesthetic reasons. One example of a pattern has points and is the Hansen Pennings or "H&P" pattern with about a 30% bond area with about 200 bonds/square inch as taught in U.S. Patent 3,855,046 to Hansen and Pennings. The H&P pattern has square point or pin bonding areas wherein each pin has a side dimension of 0.038 inches (0.965 mm), a spacing of 0.070 inches (1.778 mm) between pins, and a depth of bonding of 0.023 inches (0.584 mm). The resulting pattern has a bonded area of about 29.5%. Another typical point bonding pattern is the expanded Hansen and Pennings or "EHP" bond pattern which produces a 15% bond area with a square pin having a side dimension of 0.037 inches (0.94 mm), a pin spacing of 0.097 inches (2.464 mm) and a depth of 0.039 inches (0.991 mm). Another typical point bonding pattern designated "714" has square pin bonding areas wherein each pin has a side dimension of 0.023 inches, a spacing of 0.062 inches (1.575 mm) between pins, and a depth of bonding of 0.033 inches (0.838 mm). The resulting pattern has a bonded area of about 15%. Yet another common pattern is the C-Star pattern which has a bond area of about 16.9%. The C-Star pattern has cross-directional bar design interrupted by shooting stars. Other common patterns include a diamond pattern with repeating and slightly offset diamonds and a wire weave pattern looking as the name suggests, e.g. like a window screen. Typically, the percent bonding area varies from around 10% to around 30% of the area of the fabric



laminate web. As is well known in the art, the spot bonding holds the laminate layers together as well as imparts integrity to each individual layer by bonding filaments and/or fibers within each layer.

5 As used herein, the term "bonding window" means the range of temperature of the calender rolls used to bond the nonwoven fabric together, over which such bonding is successful. For polypropylene spunbond, this bonding window is typically from about 270°F to about 310°F (132°C to 154°C). Below about 270°F  
10 the polypropylene is not hot enough to melt and bond and above about 310°F the polypropylene will melt excessively and can stick to the calender rolls. Polyethylene has an even narrower bonding window.

As used herein, the term "machine direction" or MD means  
15 the length of a fabric in the direction in which it is produced. The term "cross machine direction" or CD means the width of fabric, i.e. a direction generally perpendicular to the MD.

As used herein, the terms "necking" or "neck stretching"  
20 interchangeably refer to a method of elongating a nonwoven fabric, generally in the machine direction, to reduce its width in a controlled manner to a desired amount. The controlled stretching may take place under cool, room temperature or greater temperatures and is limited to an increase in overall  
25 dimension in the direction being stretched up to the elongation required to break the fabric, which in most cases is about 1.2 to 1.4 times. When relaxed, the web retracts toward its original dimensions. Such a process is disclosed, for example, in U.S. Patent no. 4,443,513 to Meitner and Notheis, and U.S.  
30 Patents no. 4,965,122, 4,981,747 and 5,114,781 to Morman.

As used herein the term "recover" refers to a contraction of a stretched material upon termination of a biasing force following stretching of the material by application of the biasing force. For example, if a material having a relaxed,  
35 unbiased length of one (1) inch was elongated 50 percent by stretching to a length of one and one half (1.5) inches the material would have a stretched length that is 150 percent of

its relaxed length. If this exemplary stretched material contracted, that is recovered to a length of one and one tenth (1.1) inches after release of the biasing and stretching force, the material would have recovered 80 percent (0.4 inch) of its elongation.

As used herein, the terms "elastic" and "elastomeric" when referring to a fiber, film or fabric mean a material which upon application of a biasing force, is stretchable to a stretched, biased length which is at least about 150 percent, or one and a half times, its relaxed, unstretched length, and which will recover at least 50 percent of its elongation upon release of the stretching, biasing force.

As used herein, the term "garment" means any type of non-medically oriented apparel which may be worn. This includes industrial work wear and coveralls, undergarments, pants, shirts, jackets, gloves, socks, and the like.

As used herein, the term "infection control product" means medically oriented items such as surgical gowns and drapes, face masks, head coverings like bouffant caps, surgical caps and hoods, footwear like shoe coverings, boot covers and slippers, wound dressings, bandages, sterilization wraps, wipers, garments like lab coats, coveralls, aprons and jackets, patient bedding, stretcher and bassinet sheets, and the like.

As used herein, the term "personal care product" means diapers, training pants, absorbent underpants, adult incontinence products, and feminine hygiene products. Such products generally have an outercover which is liquid penetration resistant and which also provides a visual barrier and is aesthetically pleasing. An outercover for a personal care product, e.g. a diaper, may also serve as a "landing area" or point of attachment for tape closure means and may also provide an attachment means for hook and loop closure systems wherein the outercover material may be the hook or the loop means.

As used herein, the term "protective cover" means a cover for vehicles such as cars, trucks, boats, airplanes, motorcycles, bicycles, golf carts, etc., covers for equipment

often left outdoors like grills, yard and garden equipment (mowers, roto-tillers, etc.) and lawn furniture, as well as floor coverings, table cloths and picnic area covers.

5

#### TEST METHODS

Melt Flow Rate: The melt flow rate (MFR) is a measure of the viscosity of a polymers. The MFR is expressed as the weight of material which flows from a capillary of known dimensions under a specified load or shear rate for a measured period of time and is measured in grams/10 minutes at 230°C according to, for example, ASTM test 1238, condition E.

Peel test: In peel or delamination testing a laminate is tested for the amount of tensile force which will pull the layers of the laminate apart. Values for peel strength are obtained using a specified width of fabric, usually 4 inches (102 mm), clamp width and a constant rate of extension. The film side of the specimen is covered with masking tape or some other suitable material in order to prevent the film from ripping apart during the test. The masking tape is on only one side of the laminate and does not contribute to the peel strength of the sample. The sample is delaminated by hand a sufficient amount to allow it to be clamped into position. The specimen is clamped in, for example, an Instron Model TM, available from the Instron Corporation, 2500 Washington St., Canton, MA 02021, or a Thwing-Albert Model INTELLECT II available from the Thwing-Albert Instrument Co., 10960 Dutton Rd., Phila., PA 19154, which have 3 inch (76 mm) long parallel clamps. The sample specimen is then pulled apart at 180° of separation and the tensile strength recorded in grams.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph of the carbon 13 Nuclear Magnetic Resonance (NMR) spectrum of Himont KS-050 with ppm from 0 to 60 as the horizontal axis and using tertiarymethylsilane as the

carrier and performed in a manner known in the art on a Bruker AC-250 NMR spectrometer.

Figure 2 is a graph of the infrared (IR) scan or curve of Himont KS-050 random block copolymer having wavenumber from 400 to 2000 as the horizontal axis and percent transmittance from 35 to 101 as the vertical axis.

#### DETAILED DESCRIPTION

10 Thermoplastic polymers are useful in the production of films, fibers and webs for use in a variety of products such as personal care items, infection control products, garments and protective covers. One example of such a material is a film/nonwoven fabric laminate which functions as a liquid  
15 impervious retainer.

A film/nonwoven laminate may be used, for example, as a diaper outercover material. A diaper outercover material must perform the function of retaining bodily fluids and must also be aesthetically pleasing to the eye of the consumer, i.e., the  
20 material must look attractive to the eye and must also mask the view of the fluids and materials which the diaper is retaining. An outercover for a personal care product, e.g. a diaper, may also serve as a "landing area" or point of attachment for tape closure means and may also provide an attachment means for hook  
25 and loop closure systems wherein the outercover material may be the hook or the loop means. Such functionality requires that the laminate remain together without failure, an attribute which has been a problem for prior film/nonwoven laminates.

The inventor has discovered a way of achieving the result  
30 of a film/nonwoven laminate which will remain together as a laminate better than prior such materials. The instant invention uses a nonwoven fabric, preferably spunbond, component thermally bonded to a particular film. The film component is comprised of one surface layer which is made from  
35 a semi-crystalline/amorphous or "heterophasic" polymer and another surface layer which is preferably made from a lower coefficient of friction polymer. The film component also

preferably has an inner layer of a less expensive polymer, like a polyolefin, to reduce overall cost. Pigments are also preferentially present in the inner layer.

The film component layers are extruded together using any method known in the art to be effective. The film component is produced in a thickness of from about 0.3 mils to about 0.8 mils. If three layers are present in the film component, i.e., the film component is an A/B/C coextruded film, it is preferred that the surface layers each be from about 3 to about 40 weight percent of the total component and that the inner layer contribute the balance. In one particular embodiment, the film component is extruded using an "A" layer which is a semi-crystalline/amorphous or heterophasic polymer in an amount of about 10 weight percent, a low coefficient of friction layer on the other outer surface or "C" layer in an amount of about 10 weight percent, and a polypropylene polymer in the "B" layer being the balance.

The "A" layer is made from polymers which are heterophasic in character. Suitable polymers are disclosed in European Patent Application EP 0444671 A3 (based on Application number 91103014.6), European Patent Application EP 0472946 A2 (based on Application number 91112955.9), European Patent Application EP 0400333 A2 (based on Application number 90108051.5), U.S. Patent number 5,302,454 and U.S. Patent number 5,368,927. Other suitable heterophasic polymers include EnBA, ethylene/vinyl acetate copolymers, ethylene/methyl acetate copolymers, EAA and other copolymers, and terpolymers of polypropylene, polyethylene and polybutylene as well as elastomers such as SEBS, SEPS, SBS, and urethanes which meet the definition of being heterophasic.

European Patent Application EP 0444671 A3 teaches a composition comprising first, 10-60 weight percent of a homopolymer polypropylene having an isotactic index greater than 90 or a crystalline copolymer of propylene with ethylene and/or other alpha-olefins containing more than 85 weight percent of propylene and having an isotactic index greater than 85; second, 10-40 weight percent of a copolymer containing

prevailingly ethylene, which is insoluble in xylene at room temperature; and third, 30-60 weight percent of an amorphous ethylene-propylene copolymer, which is soluble in xylene at room temperature and contains 40-70 weight percent of ethylene, wherein the propylene polymer composition has a ratio between the intrinsic viscosities, in tetrahydronaphthalene at 135°C, of the portion soluble in xylene and of the portion insoluble in xylene at room temperature of from 0.8 to 1.2.

European Patent Application EP 0472946 A2 teaches a composition comprising first, 10-50 weight percent of a homopolymer polypropylene having an isotactic index greater than 80 or a crystalline copolymer of propylene with ethylene, a  $\text{CH}_2=\text{CHR}$  alpha-olefin where R is a 2-8 carbon alkyl radical or combinations thereof, which copolymer contains more than 85 weight percent of propylene; second, 5-20 weight percent of a copolymer containing ethylene, which is insoluble in xylene at room temperature; and third, 40-80 weight percent of a copolymer fraction of ethylene and propylene or another  $\text{CH}_2=\text{CHR}$  alpha-olefin, where R is a 2-8 carbon alkyl radical, or combinations thereof, and, optionally, minor portions of a diene, the fraction containing less than 40 weight percent of ethylene and being soluble in xylene at ambient temperature and having an intrinsic viscosity from 1.5 to 4 dl/g; where the percent by weight of the sum of the second and third fractions with respect to the total polyolefin composition is from 50 to 90 percent and the second to third fraction weight ratio being lower than 0.4.

European Patent Application EP 0400333 A2 teaches a composition comprising first, 10-60 weight percent of a homopolymer polypropylene having an isotactic index greater than 90 or a crystalline propylene copolymer with ethylene and/or a  $\text{CH}_2=\text{CHR}$  olefin where R is a 2-8 carbon alkyl radical containing more than 85 weight percent of propylene and having an isotactic index greater than 85; second, 10-40 weight percent of a crystalline polymer fraction containing ethylene, which is insoluble in xylene at room temperature; and third, 30-60 weight percent of an amorphous ethylene-propylene

copolymer containing optionally small proportions of a diene, which is soluble in xylene at room temperature and contains 40-70 weight percent of ethylene; where the composition has a flex modulus smaller than 700 MPa, tension set at 75 percent, less than 60 percent, tensile stress greater than 6 MPa and notched IZOD resilience at -20° and -40° C greater than 600 J/m.

U.S. Patent 5,302,454 teaches a composition comprising first, 10-60 weight percent of a homopolymer polypropylene having an isotactic index greater than 90 or of a crystalline propylene copolymer with ethylene with  $\text{CH}_2=\text{CHR}$  olefin where R is a 2-6 carbon alkyl radical, or combinations thereof, containing more than 85 weight percent of propylene and having an isotactic index greater than 85; second, 10-40 weight percent of a crystalline polymer fraction containing ethylene and propylene, having an ethylene content of from 52.4 percent to about 74.6 percent and which is insoluble in xylene at room temperature; and third, 30-60 weight percent of an amorphous ethylene-propylene copolymer containing optionally small proportions of a diene, soluble in xylene at room temperature and contains 40-70 weight percent of ethylene; where the composition has a flex modulus smaller than 700 MPa, tension set at 75 percent, less than 60 percent, tensile stress greater than 6 MPa and notched IZOD resilience at -20° and -40° C greater than 600 J/m.

U.S. Patent 5,368,927 teaches a composition comprising first, 10-60 weight percent of a homopolymer polypropylene having an isotactic index greater than 80 or of a crystalline propylene copolymer with ethylene and/or an alpha-olefin having 4-10 carbon atoms, containing more than 85 weight percent of propylene and having an isotactic index greater than 80; second, 3-25 weight percent of an ethylene-propylene copolymer insoluble in xylene at room temperature; and third, 15-87 weight percent of a copolymer of ethylene with propylene and/or an alpha-olefin having 4-10 carbon atoms, and optionally a diene, containing 20-60 percent of ethylene, and completely soluble in xylene at ambient temperature.

Other polymers which may be used for the "A" layer include block copolymers such as polyurethanes, copolyether esters, polyamide polyether block copolymers, ethylene/vinyl acetates (EVA), block copolymers having the general formula A-B-A' or A-B like copoly(styrene/ethylene-butylene), styrene-poly(ethylene-propylene)-styrene, styrene-poly(ethylene-butylene)-styrene, (polystyrene/poly(ethylene-butylene))/polystyrene, poly(styrene/ethylene-butylene/styrene) and the like.

Useful resins include block copolymers having the general formula A-B-A' or A-B, where A and A' are each a thermoplastic polymer endblock which contains a styrenic moiety such as a poly (vinyl arene) and where B is an elastomeric polymer midblock such as a conjugated diene or a lower alkene polymer. Block copolymers of the A-B-A' type can have different or the same thermoplastic block polymers for the A and A' blocks, and the present block copolymers are intended to embrace linear, branched and radial block copolymers. In this regard, the radial block copolymers may be designated  $(A-B)_m-X$ , wherein X is a polyfunctional atom or molecule and in which each  $(A-B)_m$  radiates from X in a way that A is an endblock. In the radial block copolymer, X may be an organic or inorganic polyfunctional atom or molecule and m is an integer having the same value as the functional group originally present in X. It is usually at least 3, and is frequently 4 or 5, but not limited thereto. Thus, in the present invention, the expression "block copolymer", and particularly "A-B-A'" and "A-B" block copolymer, is intended to embrace all block copolymers having such rubbery blocks and thermoplastic blocks as discussed above, which can be extruded, and without limitation as to the number of blocks. The film may be formed from, for example, (polystyrene/poly(ethylene-butylene)/ polystyrene) block copolymers. Commercial examples of such copolymers are, for example, those known as KRATON® materials which are available from Shell Chemical Company of Houston, Texas. KRATON® block copolymers are available in several different



formulations, a number of which are identified in U.S. Patents 4,663,220 and 5,304,599, hereby incorporated by reference.

Polymers composed of an A-B-A-B tetrablock copolymer may also be used in the practice of this invention. Such polymers are discussed in U.S. Patent 5,332,613 to Taylor et al. In such polymers, A is a thermoplastic polymer block and B is an isoprene monomer unit hydrogenated to substantially a poly(ethylene-propylene) monomer unit. An example of such a tetrablock copolymer is a styrene-poly(ethylene-propylene)-styrene-poly(ethylene-propylene) or SEPSEP block copolymer available from the Shell Chemical Company of Houston, Texas under the trade designation KRATON® G-1657.

Other exemplary materials which may be used include polyurethane materials such as, for example, those available under the trademark ESTANE® from B. F. Goodrich & Co. or MORTHANE® from Morton Thiokol Corp., polyamide polyether block copolymer such as, for example, that known as PEBAX® available from Atochem Inc. Polymers Division (RILSAN®), of Glen Rock, New Jersey and polyester materials such as, for example, those available under the trade designation HYTREL® from E. I. DuPont De Nemours & Company.

Suitable polymers also include copolymers of ethylene and at least one vinyl monomer such as, for example, vinyl acetates, unsaturated aliphatic monocarboxylic acids, and esters of such monocarboxylic acids. These copolymers are disclosed in, for example, U.S. Patent No. 4,803,117.

Particularly suitable polymers for the "A" layer are available commercially under the trade designation "Catalloy" from the Himont Chemical Company of Wilmington, Delaware. Specific commercial examples are Catalloy® KS-084P and Catalloy® KS-057P. Himont's KS-057P has a melt flow rate of 30 and a density of 0.9 gm/cc, according to page 673 of Plastic Technology's Manufacturers Handbook & Buyer's Guide, 1994/95 from Bill Publications, 355 Park Ave. South, N.Y., N.Y., 10010.

Polymers can be characterized in a number of ways, two of which being the nuclear magnetic resonance scan (NMR) and the infrared scan (IR). Figures 1 and 2 show these scans of a

heterophasic polymer preferred in the practice of this invention, Himont's KS-050, prior to peroxide cracking to produce KS-057P. Peroxide cracking is a process for raising the melt flow rate of a polymer and an example of such a procedure is taught in U.S. Patent 5,271,883 to Timmons.

The NMR spectrum and IR curve of the polymer show that KS-057P has about 3 percent random ethylene molecules and about 9-10 percent block ethylene molecules.

The "B" layer may be a polypropylene polymer or copolymer. Since this layer is relatively thick, the majority of opacity may be added to this layer. Opacity may be added through the use of, for example,  $\text{TiO}_2$  or  $\text{CaCO}_3$ . Commercially available opacity increasers are, for example, Techmer's PM 18074 E  $\text{TiO}_2$  concentrate and Standridge Chemical Company's SCC 13602  $\text{TiO}_2$  concentrate. These concentrates are approximately 70 percent of Dupont's  $\text{TiO}_2$  in a carrier of 30 percent LDPE.

The "C" layer provides the other surface to the film. It is important that the C layer have a lower coefficient of friction than the A layer for ease of winding, unwinding and film handling through the production steps for converting the film/nonwoven laminate into a final product like a diaper. This may be accomplished by including a large proportion of polypropylene in this layer. Typical polypropylenes which may be used are Exxon Chemical Company's Escorene® 3445 or Shell Chemical Company's E5D47.

The various film layers may also have small amounts of additives present to improve processibility such as low density polyethylene (LDPE) like those available from Quantum Chemical Company under the designation NA 334 or those available from Rexene under the designation 1058 LDPE. Many similar LDPE polymers are commercially available.

The nonwoven fabric component of this invention is preferably spunbond material and preferably between about 0.3 and 1 osy (11 gsm to 34 gsm). The polymers which may be used to produce the spunbond component are thermoplastic polymer such as polyolefins, polyamides, and polyesters, preferably polyolefins and still more preferably a blend including a

heterophasic polymer in an amount up to about 50 weight percent. More particularly, the nonwoven fabric may be comprised of a blend of polypropylene like Exxon Chemical Company's Escorene® 3445 or Shell Chemical Company's E5D47, and  
5 about 40 weight percent of a heterophasic polymer like Catalloy® KS-057P. Still more particularly, the nonwoven fabric may be comprised of a blend of high crystalline polypropylene and about 20 weight percent Catalloy® KS-057P.

The nonwoven component and the film component are bonded  
10 together using thermal point bonding preferably after the film is stretched approximately 60 to 65 percent in the machine direction. This stretching and joining is may be performed according to U.S. Patent application 07/997,800 and European Patent Application EP 0604731 A1 (based on Application number  
15 93117426.2) and commonly assigned the assignee of record, Kimberly-Clark Corporation. Briefly, this procedure involves extending a first extensible layer from an original length to an expanded length with the expanded length being at least 5 percent greater than the original length. Depending upon the  
20 degree of stretching, the first extensible layer may be permanently deformed. Next, a second layer of material is placed in juxtaposition with the first layer while the first layer is still in the expanded length and the two layers are then attached to one another at a plurality of spaced-apart  
25 bond sites to form the laminate which includes a plurality of bonded and unbonded areas. Once the laminate has been formed, the first layer is allowed to relax to a third length which is usually longer than the first length of the first layer. As a result of the attachment of the second layer to the first layer  
30 while the first layer is in an expanded state, once the laminate contracts, the first layer gathers and puckers, thereby forming a much bulkier material as compared to a simple non-stretched laminate of the same two materials. Generally, stretching is performed by winding the film around a number of  
35 rollers, with later rollers running at a higher speed than that of earlier rollers, resulting in a stretching and thinning of the film. Such stretching may reduce the film thickness by

about a third or more. For example, a film according to this invention may be produced which has a thickness of 0.6 mil prior to stretching and 0.4 mil after stretching.

In addition, a compatible tackifying resin may be added to the extrudable compositions described above to provide tackified materials that autogenously bond. Any tackifier resin can be used which is compatible with the polymers and can withstand the high processing (e.g., extrusion) temperatures. If the polymer is blended with processing aids such as, for example, polyolefins or extending oils, the tackifier resin should also be compatible with those processing aids. Generally, hydrogenated hydrocarbon resins are preferred tackifying resins, because of their better temperature stability. REGALREZ™ and ARKON™ P series tackifiers are examples of hydrogenated hydrocarbon resins. ZONATAC™501 lite is an example of a terpene hydrocarbon. REGALREZ™ hydrocarbon resins are available from Hercules Incorporated. ARKON™ P series resins are available from Arakawa Chemical (U.S.A.) Incorporated. The tackifying resins such as disclosed in U.S. patent No. 4,787,699, hereby incorporated by reference, are suitable. Other tackifying resins which are compatible with the other components of the composition and can withstand the high processing temperatures, can also be used.

The nonwoven component of the laminates of this invention may be produced by the meltblowing or spunbonding processes which are well known in the art. These processes generally use an extruder to supply melted thermoplastic polymer to a spinnerette where the polymer is fiberized to yield fibers which may be staple length or longer. The fibers are then drawn, usually pneumatically, and deposited on a moving foraminous mat or belt to form the nonwoven fabric. The fibers produced in the spunbond and meltblown processes are microfibers as defined above.

In order to illustrate the advantages of laminates according to this invention, the following Examples and Controls were developed. All laminates were thermally bonded

using a 240°F (116°C) pattern roll and a 200°F (93°C) anvil roll.

#### CONTROL

5 An A/B/A type film was stretch thinned from 0.6 to 0.4 mil and thermally laminated with a C-Star bond pattern to a 0.5 osy (17 gsm) polypropylene spunbond layer made from Escorene® 3445. The film layers had a ratio of 30/40/30. The "A" layer was made of 65 percent of Himont's Catalloy® 71-1, 25 percent of  
10 Exxon's 3445, 5 percent of low density polyethylene (Quantum Chemical's NA 334) and 5 percent of TiO<sub>2</sub> concentrate (Ampacet 110210, 50/50 blend in polypropylene). The "B" layer was made of 25 percent of Himont's Catalloy® 71-1, 30 percent of Exxon's 3445, 5 percent of low density polyethylene (Quantum Chemical's  
15 NA 334) and 40 percent of TiO<sub>2</sub> concentrate.

#### EXAMPLE 1

An A/B/C type film was stretch thinned from 0.6 to 0.4 mil and thermally laminated with a C-Star bond pattern to a 0.5 osy  
20 (17 gsm) polypropylene spunbond layer made from Escorene® 3445. The film layers had a ratio of 10/80/10. The "A" layer was made of 85 percent of Himont's Catalloy® KS-084P, 10 percent of Exxon's 3445, and 5 percent of Quantum Chemical's NA 334 LDPE. The "B" layer was made of 40 percent of Himont's Catalloy® KS-  
25 084P, 43 percent of Exxon's 3445, and 17 percent of TiO<sub>2</sub> concentrate available from the Standridge Chemical Company of Social Circle, Georgia under the trade designation SCC 13602. The "C" layer was made of 35 percent of Himont's Catalloy® KS-084P, 60 percent of Exxon's 3445, and 5 percent of Quantum  
30 Chemical's NA 334 LDPE.

#### EXAMPLE 2

An A/B/C type film was stretch thinned from 0.6 to 0.4 mil and thermally laminated with a C-Star bond pattern to a 0.5 osy  
35 (17 gsm) polypropylene spunbond layer made from Escorene® 3445. The film layers had a ratio of 10/80/10. The "A" layer was made of 93 percent of Himont's Catalloy® KS-084P and 5 percent

of Rexene Chemical's 1058 LDPE. The "B" layer was made of 40 percent of Himont's Catalloy® KS-084P, 43 percent of Exxon's 3445, and 17 percent of TiO<sub>2</sub> concentrate available from the Techmer Company under the trade designation PM 18074E. The "C" layer was made of 40 percent of Himont's Catalloy® KS-084P, 55 percent of Exxon's 3445, and 5 percent of Rexene's 1058 LDPE.

The Control and Examples were tested for delamination according to the peel test described above and the results are given in Table 1.

TABLE 1

	<u>Sample</u>	<u>180° Peel Strength</u>
	Control	60-70 grams
15	Example 1	120-130 grams
	Example 2	126-142 grams

The Table shows that the unique combination of film layers of this invention improves peel strength significantly, to more than 120 grams. This is an important advance in the technology of personal care products and will produce more durable and aesthetically pleasing products for the consumer.

What is claimed is:

1. A film/nonwoven laminate comprising;

5 a first component which is a film comprising on one surface a heterophasic layer and on a second surface a layer of a polymer having a lower coefficient of friction, and;

a second component which is a nonwoven fabric having at least one layer.

10

2. The laminate of claim 1 wherein said film and nonwoven components are thermally bonded together to form said laminate.

3. The laminate of claim 2 wherein said film is stretched at least 5 percent prior to said thermal bonding.

5 4. The laminate of claim 1 wherein said heterophasic film layer is comprised of a polymer having the NMR spectrum of Figure 1.

10 5. The laminate of claim 1 wherein said film component further comprises an interior layer comprised of a polyolefin.

15 6. The laminate of claim 5 wherein said film component surface layers together comprise from 10 to 80 weight percent of said film component and said interior layer comprises from 20 to 90 weight percent of said film component.

20 7. The laminate of claim 1 having a peel strength greater than 120 grams as measured by the method set forth in the specification.

8. The laminate of claim 1 wherein said nonwoven component comprises a spunbond thermoplastic polymer web.

- 22 -

9. The laminate of claim 8 wherein said polymer comprises a heterophasic polymer.

5 10. A personal care product selected from the group consisting of diapers, training pants, absorbent underpants, adult incontinence products, and feminine hygiene products including an outercover comprised of the laminate of claim 1.

10 11. The personal care product of claim 10 which is a diaper.

15 12. The personal care product of claim 10 which is an absorbent underpant.

13. The personal care product of claim 10 which is an adult incontinence product.

20 14. The personal care product of claim 10 which is a feminine hygiene product.

25 15. A film/nonwoven laminate consisting essentially of:  
a first component which is a film comprising on one surface a heterophasic polymer layer in an amount of from about 5 to about 40 weight percent of said first component, a second surface layer of a polymer having a lower coefficient of friction in an amount of from about 5 to about 40 weight percent of said first component, and an interior layer in an amount of from about 20 to about 90 weight percent of said first component, and;

30 a second component which is a spunbond nonwoven fabric comprising a heterophasic polymer and having at least one layer,

35 wherein said components are thermally bonded together to form a laminate where said heterophasic film layer is located next to said second component.



- 23 -

16. The laminate of claim 15 wherein said laminate has a peel strength of at least 120 grams.

5 17. A method of producing a film/nonwoven laminate having good peel strength comprising;

stretching by at least 5 percent a first component which is a film comprising on one surface a heterophasic polymer layer in an amount of from about 5 to about 40 weight percent of said first component, a second surface a layer of a polymer having a lower coefficient of friction in an amount of from about 5 to about 40 weight percent of said first component, and an interior layer in an amount of from about 20 to about 90 weight percent of said first component, and;

15 bringing said stretched first component into contact with a second component which is a spunbond nonwoven fabric comprising a heterophasic polymer and having at least one layer, and;

20 thermally bonding together said components to form a laminate where said heterophasic film layer is located next to said second component and wherein said laminate has a peel strength of at least 120 grams.

25

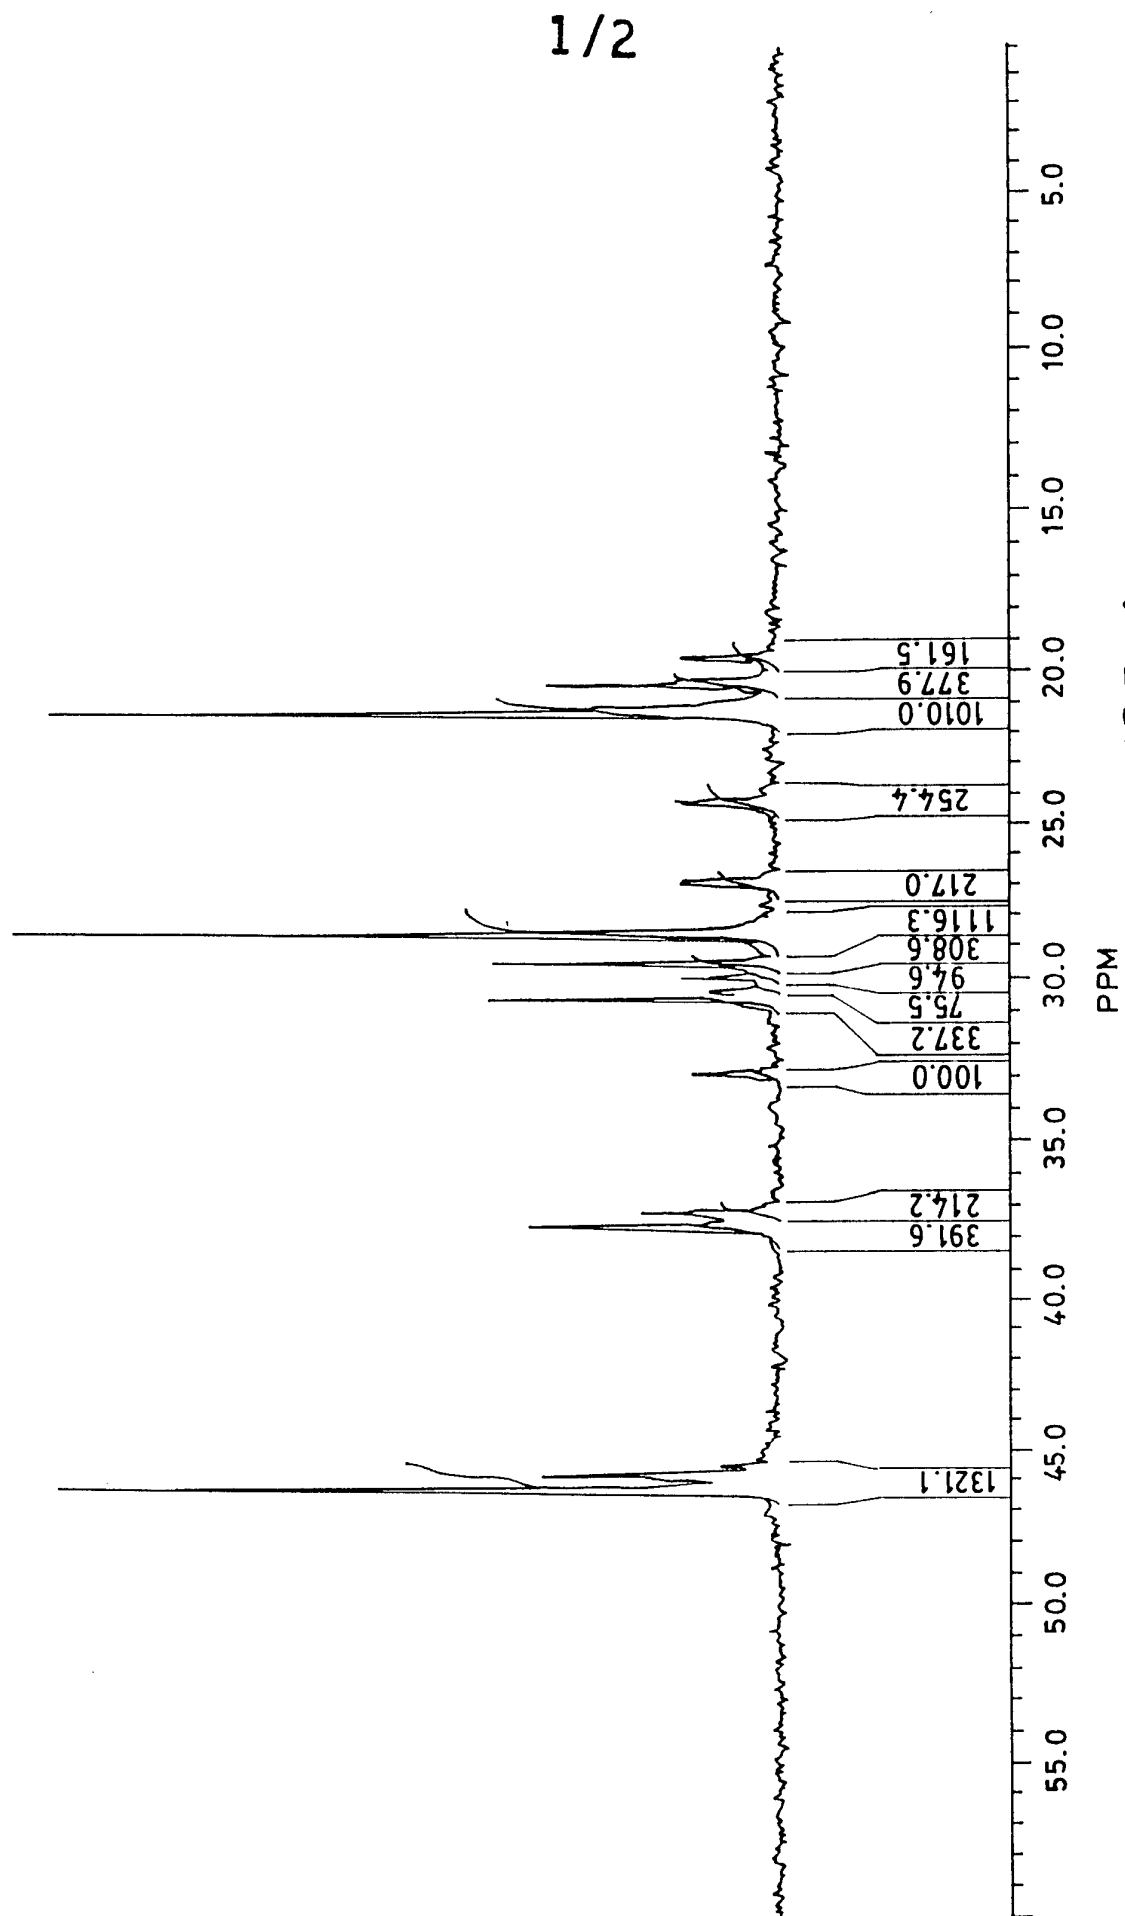


FIG. 1

2/2

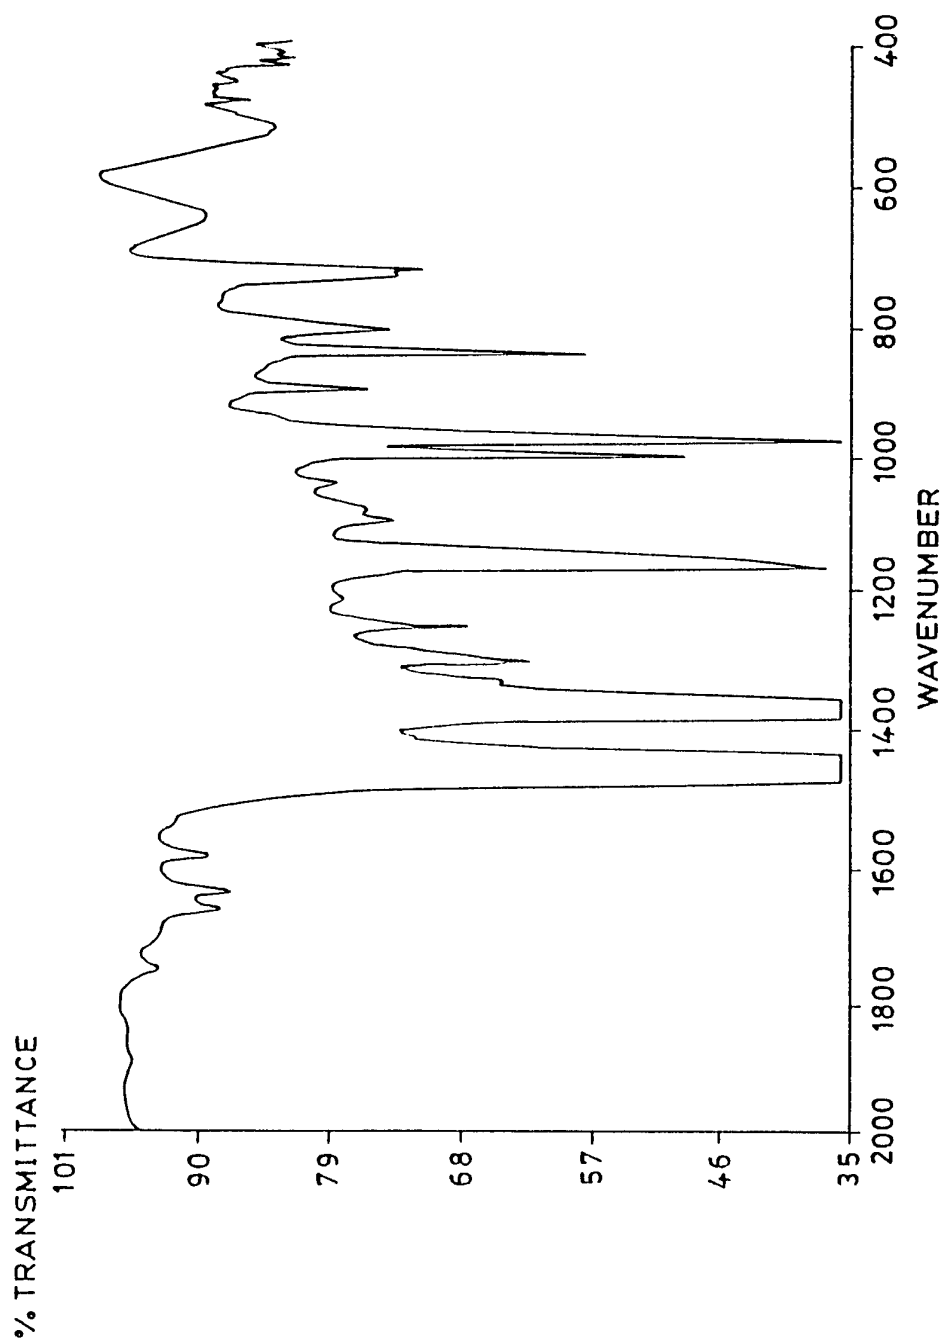


FIG. 2

# INTERNATIONAL SEARCH REPORT

Internat. Application No.  
PCT/US 96/05648

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B32B27/12 D04H13/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B32B D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 554 896 (HIMONT INC ;MOPLEFAN SPA (IT)) 11 August 1993 cited in the application see page 2, line 3 - line 44; example 1 ---	1-17
A	EP,A,0 444 671 (HIMONT INC) 4 September 1991 cited in the application see page 2, line 1 - line 36 see page 3, line 40 - line 41 ---	1,15
A	EP,A,0 604 731 (KIMBERLY CLARK CO) 6 July 1994 cited in the application see page 4, line 23 - line 52; claims -----	17

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

2 September 1996

Date of mailing of the international search report

11.09.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De Jonge, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/05648

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0554896	11-08-93	IT-B- 1254202 CA-A- 2088708 US-A- 5368927	14-09-95 07-08-93 29-11-94
EP-A-0444671	04-09-91	IT-B- 1240417 AT-T- 121759 AU-B- 637869 AU-B- 7131591 CA-A- 2037264 CN-A- 1054428 DE-D- 69109156 DE-T- 69109156 ES-T- 2071851 JP-A- 6025439 US-A- 5286552	15-12-93 15-05-95 10-06-93 29-08-91 29-08-91 11-09-91 01-06-95 26-10-95 01-07-95 01-02-94 15-02-94
EP-A-0604731	06-07-94	AU-B- 5037493 CA-A- 2097630 JP-A- 6255006 ZA-A- 9308005	14-07-94 30-06-94 13-09-94 09-06-94