



HU000031671T2

(19) **HU**(11) Lajstromszám: **E 031 671**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 03 793030**(51) Int. Cl.: **B01D 3/06** (2006.01)(22) A bejelentés napja: **2003. 08. 07.****C08F 6/00** (2006.01)

(96) Az európai bejelentés bejelentési száma:

(86) A nemzetközi (PCT) bejelentési szám:

EP 20030793030**PCT/US 03/024954**

(97) Az európai bejelentés közzétételi adatai:

(87) A nemzetközi közzétételi szám:

EP 1542777 A2 **2004. 03. 04.****WO 04018522**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 1542777 B1 **2016. 11. 02.**

(30) Elsőbbségi adatok:

226413 **2002. 08. 23.** **US**

(73) Jogosult(ak):

FINA TECHNOLOGY, INC., Houston, Texas
77267-4412 (US)

(72) Feltaláló(k):

BERTI, Douglas, A., Nassau Bay, TX 77058 (US)**SOSA, Jose, Deer Park, TX 77536 (US)****GRIFFITH, Aron, T., Humble, TX 77338 (US)**

(74) Képviselő:

PINTZ ÉS TÁRSAI Szabadalmi, Védjegy és
Jogi Iroda Kft., Budapest

(54)

Eljárás illékony anyagok eltávolítására tömegesen feldolgozható polimerből

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmat az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 1 542 777 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
02.11.2016 Bulletin 2016/44

(51) Int Cl.:
B01D 3/06 (2006.01) C08F 6/00 (2006.01)

(21) Application number: **03793030.2**

(86) International application number:
PCT/US2003/024954

(22) Date of filing: **07.08.2003**

(87) International publication number:
WO 2004/018522 (04.03.2004 Gazette 2004/10)

(54) METHOD FOR REMOVAL OF VOLATILES FROM A MASS PROCESSABLE POLYMER

VERFAHREN ZUR ENTFERNUNG VON FLÜCHTIGEN BESTANDTEILEN AUS EINEM IN DER MASSE VERARBEITBAREN POLYMER

PROCEDE D'ELIMINATION DE MATIERES VOLATILES PRESENTES DANS UN POLYMER EN MASSE DE TRANSFORMATION

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

• **GRIFFITH, Aron, T.**
Humble, TX 77338 (US)

(30) Priority: **23.08.2002 US 226413**

(74) Representative: **Raboin, Jean-Christophe et al**
Total Research & Technology Feluy
Zone Industrielle C
7181 Seneffe (BE)

(43) Date of publication of application:
22.06.2005 Bulletin 2005/25

(73) Proprietor: **FINA TECHNOLOGY, INC.**
Houston,
Texas 77267-4412 (US)

(56) References cited:
EP-A2- 0 729 772 GB-A- 834 162
US-A- 2 941 985 US-A- 3 694 535
US-A- 4 158 092 US-A- 4 439 601
US-A- 4 776 989 US-A- 4 934 433
US-A- 5 024 728 US-A- 5 540 813
US-B1- 6 211 331 US-B1- 6 338 774

(72) Inventors:
• **BERTI, Douglas, A.**
Nassau Bay, TX 77058 (US)
• **SOSA, Jose**
Deer Park, TX 77536 (US)

EP 1 542 777 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD OF THE INVENTION**

5 [0001] The present invention is directed, in general, to the removal of undesirable components from a polymer materials and, more specifically, to a method for removing volatile materials at the end stages of a polymerization process.

BACKGROUND OF THE INVENTION

10 [0002] In the preparation of polymeric materials, particularly mass processable polymers, considerable amounts of unreacted monomer and low molecular weight polymers remain entrained in the polymer product after the polymerization process. Additionally, it is common practice to employ various inert solvents and other volatile agents in the polymerization reaction mixture in order to achieve desirable operating conditions and characteristics of the polymer product. However, the presence of these low molecular weight contaminants in the final polymer product may have adverse effects on the polymer properties. Additionally, these volatile components are subject to leaching, thereby precluding use of the polymer product as packaging containers. Accordingly, removal of these undesirable volatile components is highly desirable.

15 [0003] US 4 158 092 A discloses a vertical vessel comprising an upper, a middle and a lower chamber, said middle chamber having a first nozzle located over said middle chamber, said middle chamber being fluidly coupled to a second nozzle located over said lower chamber, a discharge conduit coupling said upper chamber to said middle and lower chamber and a pump coupled to said discharge conduit. The middle chamber comprises a first volume above said middle chamber and the lower chamber comprises a second volume above said lower chamber. The middle and bottom chamber are completely separated by a partition wall. US 4 158 092 A discloses a method for removing unreacted monomers from a polymer using said vertical vessel comprising 1) passing the polymer dispersion through the upper chamber, 2) passing said polymer dispersion from said upper chamber to the middle and bottom chamber, comprising 2a) passing said polymer dispersion through a first distribution nozzle and into said middle chamber and 2b) passing said polymer dispersion from said middle chamber to a second nozzle and into said bottom chamber.

20 [0004] In order to produce the highest quality product, it is desirable to reduce the residual concentration of volatiles in the finished polymer as much as possible. For many commercial applications, such as food packaging, federal regulations impose exacting standards on acceptable levels of volatiles in the polymer product. Thus, much effort has been expended in designing and developing devolatilization apparatus and procedures for use in polymerization processes. However, most current processes still leave undesirably high concentrations of volatiles in the polymer product.

25 [0005] Thus what is needed in the art is an apparatus and method for improved removal of volatiles from a mass processable polymer stream.

SUMMARY OF THE INVENTION

30 [0006] To address the deficiencies of the prior art, the present invention provides a multi-chambered devolatilizer, for use with a devolatilization system, for removing volatiles from a mass processable polymer, that includes a devolatilizer including a first and second collector contained therein. The devolatilizer has a first distribution nozzle located over the first collector, the first collector being fluidly coupled to a second distribution nozzle located over the second collector within the chamber. The first and second devolatilization chambers are partially separated by an interior wall, common to both said first and second devolatilization chambers and including a baffle. The first and second distribution nozzles each have a number of distribution openings formed therein for distributing a flow of a mass processable polymer therethrough. The system comprises a first devolatilizer, a second devolatilizer configured as described above, delivery conduits coupling the devolatilizers, and pumps to move the polymer through the system.

35 [0007] The object of the present invention is to provide a method for removing volatiles from a mass processable polymer that includes passing a mass processable polymer through a first devolatilizer. The method further includes passing the mass processable polymer from the first devolatilizer to a second devolatilizer configured as described above. The second devolatilizer has first and second collectors and first and second distribution nozzles contained therein. The mass processable polymer passes through the first distribution nozzle and into the first collector. The polymer passes from the first collector to the second distribution nozzle and into the second collector. The first and second distribution nozzles each have a number of distribution openings formed therein, for distributing a flow of a mass processable polymer therethrough.

40 [0008] The foregoing has outlined, preferred and alternative features of the present invention so that those skilled in the art may better understand the detailed description of the invention that follows. Additional features of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they can readily use the disclosed conception and specific embodiment as a basis for designing or modifying other structures for carrying out the same purposes of the present invention..

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] For a more complete understanding of the invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawing, in which:

FIGURE 1 illustrates a schematic representation of one embodiment of a polymerization system designed according to the present invention;

FIGURE 2 illustrates a schematic representation of an embodiment of the devolatilizer of the present invention;

FIGURE 3 illustrates a schematic representation of an alternative embodiment of the multi-chambered devolatilizer of the present invention; and

FIGURE 4 illustrates a representative embodiment of a method of devolatilizing a mass processable polymer according to the present invention.

DETAILED DESCRIPTION

[0010] Referring now to Figure 1, there is illustrated a system 100 for reducing volatiles in a mass processable polymer stream. The system 100 includes a reactor 110, which is normally the last reactor in a series of such reactors for manufacturing a polymer. Certain embodiments of the present invention may additionally include a heat exchanger 115 that serves as an additional polymer reactor. Reactor 110 and heat exchanger 115 are connected by delivery conduit 120. Heat exchanger 115 may be of any configuration including up-flow and down-flow types. The polymer stream exits the heat exchanger 115 via delivery conduit 121. In some embodiments, the polymer may be advanced by an advancing mechanism 125, such as a pump, to a first devolatilizer 130. In other embodiments, advancing mechanism 125 may not be necessary. The first devolatilizer 130 may be operated at a reduced pressure, defined as less than 101325 Pa (760 Torr), for example, by creating a vacuum from 2666 Pa (20 Torr) to 26664 Pa (200 Torr).

[0011] In those embodiments including the first devolatilizer 130, the first devolatilizer 130 may include a heat exchanger 135 that may be identified as a devolatilization preheater, such as, but not limited to, a shell and tube heat exchange structure. The heat exchanger 135 may be operated to provide heat to the polymer stream to facilitate the devolatilization of the stream as it enters the devolatilization tank 140. Thus, the heat exchanger 135 may be operated at any temperature suitable for removing volatiles; however, the heat exchanger 135 is preferably maintained at a temperature ranging from 177 °C (350°F) to 271 °C (520°F). The first devolatilizer 130 will also preferably include at least one vapor removal line 145. Alternatively, the first devolatilizer 130 may be configured as a hoop-falling strand devolatilizer. As the heated polymer stream exits the heat exchanger 135 and enters the devolatilization tank 140, volatiles are removed through the vapor removal line 145. The partially devolatilized polymer stream then enters delivery conduit 150 and may be advanced by pump 155 to the multi-chambered devolatilizer 160.

[0012] The multi-chambered devolatilizer 160 serves to further reduce the concentration of volatiles in the polymer stream. However, in certain embodiments, the polymer stream may exit the reactor portion of system 100 directly into the multi-chambered devolatilizer 160. In one embodiment, the multi-chambered devolatilizer 160 may be operated at a reduced pressure, which as defined above, is less than 101325 Pa (760 Torr). In particular, the pressure may be less than 133 Pa (1 Torr) to 26664 Pa (200 Torr), with a preferred operating range of 133 Pa (1 Torr) to 666 Pa (5 Torr). As with the first devolatilizer 130, the multi-chambered devolatilizer, 160, may be operated at any temperature suitable for removing volatiles. The multi-chambered devolatilizer, however, is preferably operated at 193 °C (380°F) to 260 °C (500°F). After passing through the multi-chambered devolatilizer, the devolatilized polymer stream exits through delivery conduit 165 and may be transmitted by pump 170 to a finishing operation 175. In certain embodiments, the finishing operation 175 may include a pelletizer.

[0013] Turning to Figure 2, there is illustrated an embodiment of a multi-chambered devolatilizer 200 according to the present invention. The flow of the devolatilizing polymer stream 205 through the devolatilizer 200 is depicted by arrows. The multi-chambered devolatilizer 200 comprises a devolatilizer chamber 207 including a first collector 220 and a second collector 225 contained therein. The devolatilizer chamber has a first distribution nozzle 240 located over the first collector 220, the first collector 220 being fluidly coupled to a second distribution nozzle 270 located over said second collector 225 within the devolatilizer chamber 207. The first and second distribution nozzles 240, 270 each have a number of distribution openings 250, 275 formed therein for distributing a flow of a mass processable polymer therethrough.

[0014] Collector regions 220 and 225 may be any structure sufficient to segregate the polymer stream 205 as it is devolatilized as described below. For example, collectors 220 and 225 may be separated by some distance D. Alternatively, collectors 220 and 225 may have a conical shape, such as that depicted in FIGURE 2. An interior wall 235 is situated between collectors 220 and 225 to separate a first devolatilization chamber 210 and a second devolatilization chamber 215, to facilitate segregation of the polymer stream 205 being devolatilized into chambers 210, 215. For the purposes of the present invention, chambers 210 and 215 are defined as the volumes above collector regions 220 and 225, respectively, and enclosed by an outer wall 230. The devolatilization chambers 210, 215 share the interior wall 235. The

interior wall 235 partially separates the first and second devolatilization chambers 210 and 215 the interior common wall 235 includes a baffle located between the first devolatilization chamber 210 and the second devolatilization chamber 215. In other disclosures, the interior common wall 235 may completely separate the chambers 210 and 215. Thus, the second devolatilization chamber 215 may be operated at a reduced pressure different from the first devolatilization chamber 210. In one disclosures, for example, the second devolatilization chamber 215 operates at a lower pressure than the first devolatilization chamber 210.

[0015] The first devolatilization chamber 210 includes several components, including a first distribution nozzle 240. The first distribution nozzle 240 is designed to have a number of holes 250, preferably arrayed along its bottom surface. In other embodiments, the holes may be formed over the entire surface of the distribution nozzle 240. In particular embodiments, the distribution nozzle 240 may have from about a few hundred to about two thousand of such holes 250. In plant scale embodiments, the number of holes could be in excess of 1 million. In other embodiments, the holes 250 have a diameter from 0.40 mm (1/64) to 4.00 mm (5/32 inches) in diameter. In a plant scale embodiment, for example, the holes may preferably have a diameter from 9.52 mm (6/16) to 11.11 mm (7/16 inches). In certain embodiments, the holes 250 will have a diameter of 1.19 mm (3/64 inches). Additionally, the first distribution nozzle 240 may be operated at an elevated temperature to facilitate the removal of greater amounts of volatiles from the polymer stream. In particular embodiments, the temperature of the first distribution nozzle may be from 238 °C (460°F) to 282 °C (540°F). Preferably, the temperature of the first distribution nozzle ranges from 238 °C (460°F) to 249 °C (480°F).

[0016] The polymer stream 205 is fed into the first devolatilization chamber 210 after passing through the holes 250 of the first distribution nozzle 240. As the polymer stream 205 passes into the first devolatilization chamber 210 and falls into the first collector 220, volatiles are removed through one or more vapor removal lines 260. The polymer stream 205 exits the first collector 220 below the first devolatilization chamber 210 through delivery conduit 265 and may be pumped to the second devolatilization chamber 215.

[0017] The second devolatilization chamber 215 includes a second distribution nozzle 270. The second distribution nozzle 270 also may be configured to have an array of holes 275 over at least a portion of its surface. In certain embodiments, the number of holes 275 may be equal to the number of holes 250 in the first distribution nozzle 240. For example, in the pilot plant experiments described below, the number of holes 250, 275 range from about 700 to about 2000. One skilled in the art, however, could adjust these numbers up to appropriate values for a full scale plant. In other embodiments, the number of holes 275 may be greater than the number of holes 250 in the first distribution nozzle 240. The holes 275 may have a diameter ranging from 0.40 mm (1/64 inches) to 4.00 mm (5/32 inches). In particular embodiments, the holes 275 will have a diameter of 1.19 mm (3/64 inches). Additionally, the second distribution nozzle 270 may be operated at an elevated temperature, for example, the same ranges as described above for the first distribution nozzle, to facilitate the removal of greater amounts of volatiles from the polymer stream. In particular embodiments, the temperature of the second distribution nozzle 270 may be operated at a temperature higher than the temperature of the first distribution nozzle 240.

[0018] The polymer stream 205, as noted above, enters the second devolatilization chamber 215 through the holes 275 of the second distribution nozzle 240. As the polymer stream 205 passes into the second devolatilization chamber 215 and falls into the second collector 220, volatiles are removed through one or more vapor removal lines 280. The devolatilized polymer stream 205 exits the second devolatilization chamber 215 of the multi-chambered devolatilizer 200 through delivery conduit 290. Delivery conduit 290 couples the second devolatilization chamber 215 to desired finishing operations.

Now turning to Figure 3 with continued reference to Figure 2, there is illustrated an exemplary alternative embodiment of the multi-chambered devolatilizer 300 of the present invention. In such embodiments, the multi-chambered devolatilizer 300 may be configured so that only a portion of the polymer stream 305 is passed through the first distribution nozzle 240. In such embodiments, the first distribution nozzle 240 is connected at one end 310 to the second distribution nozzle 270. In some embodiments, the end 310 of the first distribution nozzle 240 that is connected to the second distribution nozzle 270 may be tapered to allow improved mating of the nozzles 240, 270. In these embodiments, the configuration of holes 250 and 275 may be adjusted to control a fraction of the polymer stream 305 that passes directly from the first distribution nozzle 240 to the second distribution nozzle 270. The fraction will be a function of the relative number and diameter of the holes 250, 275. In one embodiment, the number of holes 275 is about 2.5 times the number of holes 250.

[0019] In another aspect the present invention provides a method of removing volatiles from a mass processable polymer stream. Figure 4 illustrates a flow diagram for an embodiment of an exemplary method of devolatilizing a polymer stream according to the present invention. The method 400 begins by a first devolatilization step 410 by passing a mass processable polymer from a reactor system through a first devolatilizer. The first devolatilizer may be comprised of any conventional devolatilizer, or any of the embodiments of the multi-chambered devolatilizer described herein. The mass processable polymer may then be passed from the first devolatilizer to a second devolatilizer at second devolatilization step 420. The second devolatilizer may be constructed as described above, for example. The second devolatilization step 420 includes passing the polymer stream through a first distribution nozzle and into a first collector. The step 420 also includes passing the polymer from the first collector to the second distribution nozzle and into a second collector.

The steps 410 and 420 also include passing the polymer stream through holes in the delivery nozzles to aid in devolatilization and may be performed at the temperatures and pressures discussed above. In certain embodiments, the method 400 may include a finishing step 430, such as pelletization. The process ends at stop step 440. Alternatively, step 420 of method 400 may include continuously passing a first portion of the polymer stream from an end of the first distribution nozzle directly to the second distribution nozzle. In certain embodiments, the end may be tapered, such as that depicted in FIGURE 3, for example. In such embodiments, the first portion by-passes the first collector and exits the second distribution nozzle through the openings therein. The remaining or second portion of the polymer stream passes from the first distribution nozzle to the first collector. This remaining portion of the polymer stream may be advanced to the second distribution nozzle and the process continued as described above.

[0020] Other embodiments of the method 400 may additionally include step 425 that includes passing the polymer stream from the second multi-chambered devolatilizer to a subsequent devolatilizer before finishing step 430. The subsequent devolatilizer, for example, may be a falling strand type devolatilizer or another multichambered devolatilizer.

[0021] The method and apparatus described above is clearly superior to currently available devolatilizers and devolatilization methods. Polymers devolatilized with the present invention may be prepared having less than 100 ppm residual volatiles. Certain embodiments can reduce the concentration of volatiles to about 50 ppm.

Having described the present invention it is believed that the same will become even more apparent by reference to the following examples. It will be appreciated that the examples are presented solely for the purpose of illustration and should not be construed as limiting the invention. For example, although the experiments described below were carried out on a pilot plant, one skilled in the art could adjust specific numbers, dimensions and quantifies up to appropriate values for a full scale plant.

EXAMPLES

[0022] For comparative purposes, four different types of polystyrene samples of the polymer reaction stream were devolatilized with a conventional process. The samples were all high impact polystyrenes (HIPS). This was accomplished by configuring the devolatilization system in the following manner. The first devolatilizer was configured to include a heat exchanger. The multi-chambered devolatilizer, was configured as a single-chambered second devolatilizer by eliminating the holes in the first distribution nozzle. Having no holes in the first distribution nozzle forces the entire polymer feed stream to the second distribution nozzle. Polymer samples passed through this system consistently had much higher residual volatile concentrations than using the devolatilization system and method disclosed in the present invention. Volatile concentrations in this conventional configuration averaged about 250 ppm and ranged from 160 ppm up to 380 ppm. These results are tabulated in the second column of Table I.

[0023] The same four types of polystyrene samples were devolatilized with the devolatilizer and methods of the present invention. In one set of experiments, the polystyrene stream was passed from the first devolatilizer, configured as described above, into the multi-chambered devolatilizer of the present invention. In this experiment, both distribution nozzles had closed ends, thereby forcing the polymer entering the devolatilizer to fall to the first collector region of the first chamber. The multi-chambered devolatilizer was configured to allow a common vapor area, with the interior wall of the chamber preventing mixture of the polymers. The first distribution nozzle was configured to have about 1200 holes formed in the bottom surface of the nozzle. Each hole had a diameter of 1.19 mm (3/64 inches). The temperature of the first distribution nozzle was maintained at 249 °C (480 °F) with a conventional oil bath. The pressure in the chamber ranged from 133 Pa (1 Torr) to 699 Pa (5 Torr). The polymer stream was then transmitted through conventional piping to the second distribution nozzle of the multi-chambered devolatilizer. The second distribution nozzle was configured to have holes of equal number and diameter as the first distribution nozzle and maintained at 249 °C (480 °F). The polymer stream was then forced through the holes in the second distribution nozzle into the second devolatilization chamber, which was maintained at a reduced pressure, for example, from 133 Pa (1 Torr) to 666 Pa (5 Torr).

[0024] The concentration of volatiles in these samples was consistently below 100 ppm, with an average value of about 65 ppm. For some samples, volatile concentrations were as low as 40 ppm. These results are tabulated in the fourth column of Table I.

[0025] In a second set of experiments, the same four HIPS, and an additional fifth General Purpose Polystyrene (GPPS) sample (sample 585), were passed through the multi-chambered devolatilizer configured to allow partial recycling of the polymer stream. Similar to that described above, polymer stream was first passed through a first devolatilizer, configured as described above, into the multi-chambered devolatilizer. The first distribution nozzle was tapered at one end and joined to the second distribution nozzle. The first distribution nozzle was configured to have about 770 holes, each hole having a diameter of 1.99 mm (3/64 inches). The second distribution nozzle was configured to have about 1930 holes, each hole having a diameter of 1.99 mm (3/64 inches). Both first and second distribution nozzle temperatures were maintained at 249 °C (480 °F). Such a configuration causes approximately 40 percent of the polymer stream to be passed through the holes in the first distribution nozzle and into the first devolatilization chamber. This portion was then collected and transmitted through conventional piping to the second distribution nozzle. The other 60 percent of

the polymer stream passed directly from the first distribution nozzle to the second distribution nozzle. The combined streams then passed through the holes in the distribution nozzle into the second devolatilization chamber.

[0026] The configuration used in the second set of experiments, allowing partial recycling, produced samples with slightly higher residual volatile concentrations compared to the configuration in the first set of experiments, allowing no recycling. For instance, the concentration of volatiles in the former experiments ranged from about 90 ppm to about 250 ppm. The average concentration of volatiles was about 165 ppm. These results are tabulated in the third column of Table I.

Table I

Polystyrene Sample	Conventional Devolatilization	Present Invention with Partial Recycle	Present Invention with Full Recycle
	min, max, ave (ppm)	min, max, ave (ppm)	min, max, ave (ppm)
945	210, 370, 280	160,240,203	50,70,67
CX7216	160,230,205	110, 250, 173	60,60,60
CX7200	190, 190, 190	110, 200, 148	40,70,57
825EX	200,380,304	90,240,139	50,80,64
585	100,290,197	80,310,146	70,90,83

[0027] Thus, the present invention provides a method and apparatus for significantly reducing the concentration of residual volatile components in polymer products.

[0028] Although the present invention has been described in detail, those skilled in the art should, understand that any polymer composition may be devolatilized with the method and apparatus of the present invention. For instance, one may be able to apply the present invention to any homopolymer or copolymer fabrication process.

Claims

1. A method for removing volatiles from a mass processable polymer, comprising: passing a mass processable polymer through a first devolatilizer; passing said mass processable polymer from said first devolatilizer to a second devolatilizer having a first collector, a first distribution nozzle, a second collector and a second distribution nozzle contained therein, including: passing said mass processable polymer through said first distribution nozzle and into said first collector; passing said mass processable polymer from said first collector to said second distribution nozzle and into said second collector, said first and second distribution nozzles each having a number of distribution openings formed therein for distributing a flow of a mass processable polymer therethrough, wherein a first devolatilization chamber comprises a first volume above said first collector, and a second devolatilization chamber comprises a second volume above said second collector, and said first and said second devolatilization chambers have one or more vapor removal lines formed therein for allowing removal of volatiles; wherein said first and said second devolatilization chambers are partially separated by an interior wall; and wherein said interior wall is common to both said first and said second devolatilization chambers and said wall includes a baffle.
2. The method as recited in Claim 1 wherein said number of distribution openings in said second distribution nozzle is equal to said number of distribution openings in said first distribution nozzle.
3. The method as recited in Claim 1 wherein said number of distribution openings in said second distribution nozzle is greater than said number of distribution openings in said first distribution nozzle.
4. The method as recited in Claim 1 wherein said second devolatilizer is fluidly coupled to a subsequent third devolatilizer.
5. The method as recited in Claim 1 wherein said first distribution nozzle is connected at an end thereof to said second distribution nozzle to allow said mass processable polymer to flow from said first distribution nozzle to said second distribution nozzle.
6. The method as recited in Claim 5 wherein said end is tapered sufficiently to allow connection between said first

distribution nozzle and said second distribution nozzle.

7. The method as recited in Claim 5 wherein said number of distribution openings in said second distribution nozzle is 2.5 times said number of distribution openings in said first distribution nozzle.

8. The method as recited in Claim 1 wherein said first distribution nozzle is operated at a temperature between (460°F) 237°C and (520°F) 271°C.

9. The method as recited in Claim 1 wherein said first distribution nozzle is operated at a temperature of (460°F) 237°C to (480°F) 248°C.

10. The method as recited in Claim 1 wherein said second distribution nozzle is maintained at a temperature equal to the temperature of said first distribution nozzle.

11. The method as recited in Claim 1 wherein said second distribution nozzle is operated at a temperature higher than said temperature of said first distribution nozzle.

12. The method as recited in Claim 1 wherein said second devolatilization chamber is operated at a temperature of (460°F) 237°C to (520°F) 271°C.

13. The method as recited in Claim 1 wherein said second distribution nozzle is operated at a temperature of (460°F) 237°C to (480°F) 248°C.

Patentansprüche

1. Verfahren zum Entfernen von flüchtigen Bestandteilen aus einem massenverarbeitbarem Polymer, das umfasst: Leiten eines massenverarbeitbaren Polymers durch einen ersten Entgaser; Leiten des massenverarbeitbaren Polymers aus dem ersten Entgaser zu einem zweiten Entgaser mit einem ersten Sammler, einer ersten Verteilungsdüse, einem zweiten Sammler und einer zweiten Verteilungsdüse, die darin enthalten sind, einschließlich: Leiten des massenverarbeitbaren Polymers durch die erste Verteilungsdüse und in den ersten Sammler; Leiten des massenverarbeitbaren Polymers aus dem ersten Sammler zur zweiten Verteilungsdüse und in den zweiten Sammler, wobei die erste und die zweite Verteilungsdüse jeweils eine Anzahl von darin gebildeten Verteilungsöffnungen zum Verteilen eines Stroms eines massenverarbeitbaren Polymers durch diese aufweisen, wobei eine erste Entgasungskammer ein erstes Volumen über dem ersten Sammler umfasst und eine zweite Entgasungskammer ein zweites Volumen über dem zweiten Sammler umfasst, und wobei die erste und die zweite Entgasungskammer eine oder mehrere darin gebildete Dampfableitungen aufweisen, um das Entfernen von flüchtigen Bestandteilen zu ermöglichen; wobei die erste und die zweite Entgasungskammer teilweise durch eine Innenwand getrennt sind; und wobei die Innenwand sowohl der ersten als auch der zweiten Entgasungskammer gemein ist und die Wand ein Umlenkblech beinhaltet.

2. Verfahren nach Anspruch 1, wobei die Anzahl von Verteilungsöffnungen in der zweiten Verteilungsdüse der Anzahl von Verteilungsöffnungen in der ersten Verteilungsdüse gleicht.

3. Verfahren nach Anspruch 1, wobei die Anzahl von Verteilungsöffnungen in der zweiten Verteilungsdüse größer als die Anzahl der Verteilungsöffnungen in der ersten Verteilungsdüse ist.

4. Verfahren nach Anspruch 1, wobei der zweite Entgaser mit einem darauf folgenden dritten Entgaser in Fluidverbindung steht.

5. Verfahren nach Anspruch 1, wobei die erste Verteilungsdüse an einem Ende davon mit der zweiten Verteilungsdüse verbunden ist, um zu ermöglichen, dass das massenverarbeitbare Polymer von der ersten Verteilungsdüse zur zweiten Verteilungsdüse fließt.

6. Verfahren nach Anspruch 5, wobei das Ende ausreichend verjüngt ist, um eine Verbindung zwischen der ersten Verteilungsdüse und der zweiten Verteilungsdüse zu ermöglichen.

EP 1 542 777 B1

7. Verfahren nach Anspruch 5, wobei die Anzahl von Verteilungsöffnungen in der zweiten Verteilungskammer das 2,5-Fache der Anzahl von Verteilungsöffnungen in der ersten Verteilungsdüse ist.
- 5 8. Verfahren nach Anspruch 1, wobei die erste Verteilungsdüse mit einer Temperatur zwischen 237 °C (460 °F) und 271 °C (520 °F) betrieben wird.
9. Verfahren nach Anspruch 1, wobei die erste Verteilungsdüse mit einer Temperatur zwischen 237 °C (460 °F) und 248 °C (480 °F) betrieben wird.
- 10 10. Verfahren nach Anspruch 1, wobei die zweite Verteilungsdüse auf einer Temperatur gehalten wird, die der Temperatur der ersten Verteilungsdüse gleicht.
11. Verfahren nach Anspruch 1, wobei die zweite Verteilungsdüse mit einer Temperatur betrieben wird, die höher als die Temperatur der ersten Verteilungsdüse ist.
- 15 12. Verfahren nach Anspruch 1, wobei die zweite Entgasungskammer mit einer Temperatur zwischen 237 °C (460 °F) und 271 °C (520 °F) betrieben wird.
- 20 13. Verfahren nach Anspruch 1, wobei die zweite Verteilungsdüse mit einer Temperatur zwischen 237 °C (460 °F) und 248 °C (480 °F) betrieben wird.

Revendications

- 25 1. Procédé d'élimination de matières volatiles présentes dans un polymère en masse de transformation, comprenant :
le passage d'un polymère en masse de transformation à travers un premier dispositif d'extraction des matières
volatiles ; le passage dudit polymère en masse de transformation dudit premier dispositif d'extraction des matières
volatiles vers un second dispositif d'extraction des matières volatiles contenant un premier collecteur, un premier
bec de distribution, un second collecteur et un second bec de distribution, incluant : le passage dudit polymère en
30 masse de transformation à travers ledit premier bec de distribution et dans ledit premier collecteur ; le passage dudit
polymère en masse de transformation dudit premier collecteur vers ledit second bec de distribution et dans ledit
second collecteur, lesdits premier et second bec de distribution comportant chacun un certain nombre d'orifices de
distribution y étant formés en vue de la distribution d'un flux d'un polymère en masse de transformation à travers
ceux-ci, dans lequel une première chambre d'extraction des matières volatiles comprend un premier volume au-
35 dessus dudit premier collecteur, et une seconde chambre d'extraction des matières volatiles comprend un second
volume au-dessus dudit second collecteur, et ladite première et ladite seconde chambre d'extraction des matières
volatiles comportent une ou plusieurs conduites d'élimination de la vapeur y étant formées pour permettre l'élimination
des matières volatiles ;
dans lequel ladite première et ladite seconde chambre d'extraction des matières volatiles sont partiellement séparées
40 par une paroi intérieure ; et
dans lequel ladite paroi intérieure est commune à la fois à ladite première et à ladite seconde chambre d'extraction
des matières volatiles et ladite paroi inclut un écran.
- 45 2. Procédé selon la revendication 1 dans lequel ledit nombre d'orifices de distribution dans ledit second bec de distribution est égal audit nombre d'orifices de distribution dans ledit premier bec de distribution.
3. Procédé selon la revendication 1 dans lequel ledit nombre d'orifices de distribution dans ledit second bec de distribution est supérieur audit nombre d'orifices de distribution dans ledit premier bec de distribution.
- 50 4. Procédé selon la revendication 1 dans lequel ledit second dispositif d'extraction des matières volatiles est en couplage fluide avec un troisième dispositif d'extraction des matières volatiles suivant.
5. Procédé selon la revendication 1 dans lequel ledit premier bec de distribution est raccordé à une extrémité de celui-ci audit second bec de distribution pour permettre audit polymère en masse de transformation de couler dudit premier bec de distribution vers ledit second bec de distribution.
- 55 6. Procédé selon la revendication 5 dans lequel ladite extrémité est suffisamment biseautée pour permettre le raccord entre ledit premier bec de distribution et ledit second bec de distribution.

EP 1 542 777 B1

7. Procédé selon la revendication 5 dans lequel ledit nombre d'orifices de distribution dans ledit second bec de distribution est 2,5 fois ledit nombre d'orifices de distribution dans ledit premier bec de distribution.
- 5 8. Procédé selon la revendication 1 dans lequel ledit premier bec de distribution est utilisé à une température située entre (460 °F) 237 °C et (520 °F) 271 °C.
9. Procédé selon la revendication 1 dans lequel ledit premier bec de distribution est utilisé à une température de (460 °F) 237 °C à (480 °F) 248 °C.
- 10 10. Procédé selon la revendication 1 dans lequel ledit second bec de distribution est maintenu à une température égale à la température dudit premier bec de distribution.
11. Procédé selon la revendication 1 dans lequel ledit second bec de distribution est utilisé à une température supérieure à ladite température dudit premier bec de distribution.
- 15 12. Procédé selon la revendication 1 dans lequel ladite seconde chambre d'extraction des matières volatiles est utilisée à une température de (460 °F) 237 °C à (520 °F) 271 °C.
- 20 13. Procédé selon la revendication 1 dans lequel ledit second bec de distribution est utilisé à une température de (460 °F) 237 °C à (480 °F) 248 °C.
- 25
- 30
- 35
- 40
- 45
- 50
- 55

FIG. 1


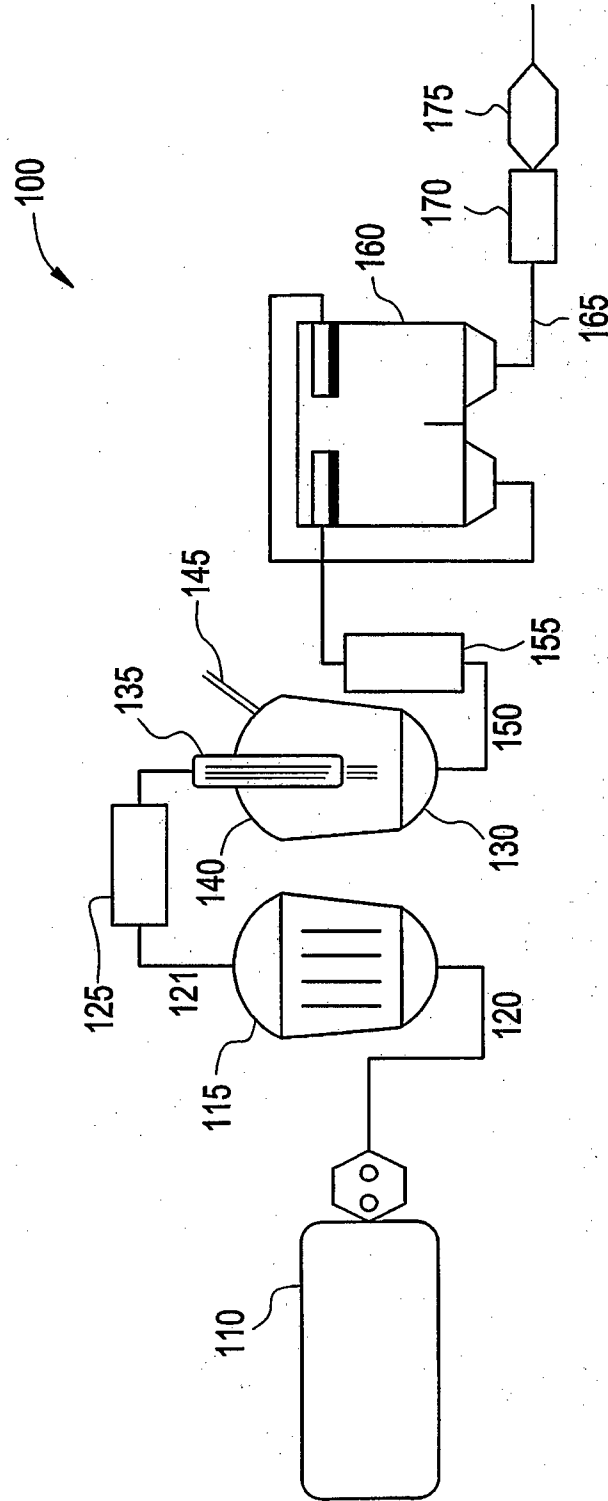


FIG. 4

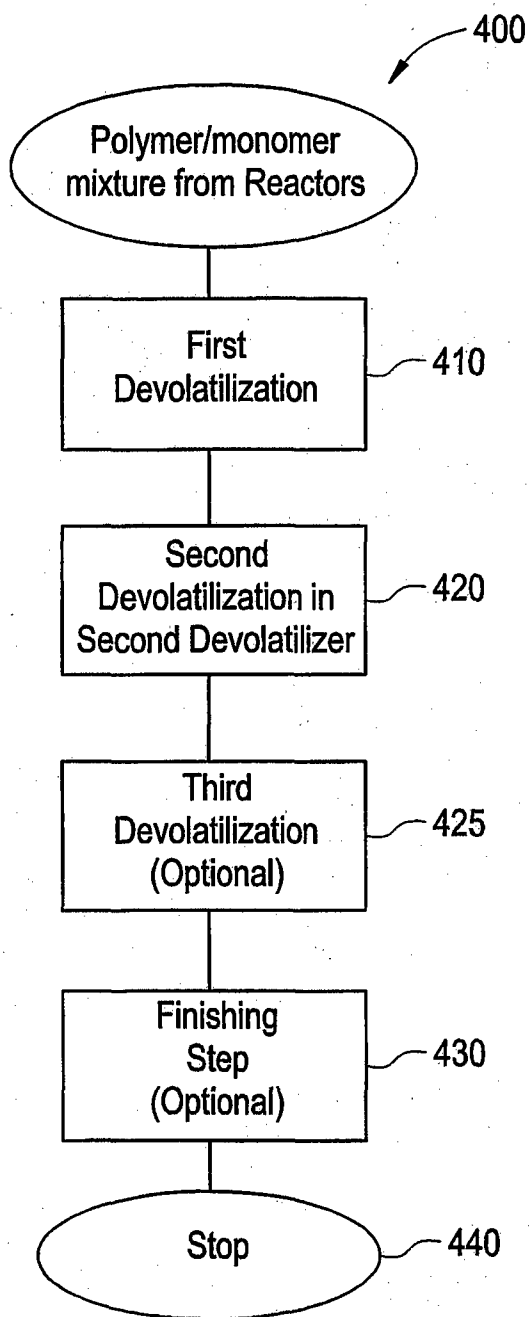

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4158092 A [0003]



SZTNH-100013883

EP1542777

ELJÁRÁS ILLÉKONY ANYAGOK ELTÁVOLÍTÁSÁRA TÖMEGESEN FELDOLGOZHATÓ POLIMERBŐL SZABADALMI IGÉNYPONTOK

1. Eljárás illékony anyagok (volatile) eltávolítására tömegeesen feldolgozható polimerből, ahol az eljárás tartalmazza a következőket: egy tömegeesen feldolgozható (mass processable) polimer átjuttatása (passing) egy első illékony anyag mentesítőn (devolatilizer) keresztül, az említett tömegeesen feldolgozható polimer átjuttatása az első illékony anyag mentesítőből egy olyan második illékony anyag mentesítőbe, amelynek van egy első gyűjtőtartálya (collector), egy első elosztó fúvókája (distribution nozzle), egy második gyűjtőtartálya, és egy második elosztó fúvókája, amely ebben tartózkodik, ide értve a következőket: az említett tömegeesen feldolgozható polimer átjuttatása az említett első elosztó fúvókán keresztül és az említett első gyűjtőtartályba; az említett tömegeesen feldolgozható polimer átjuttatása az említett első gyűjtőtartályból az említett második elosztó fúvókába és az említett második gyűjtőtartályba, ahol az említett első és második elosztó fúvóka mindegyikének van egy adott számú elosztó nyílása (distribution opening), amely benne van kialakítva egy tömegeesen feldolgozható polimer áramlásának (flow) elosztására rajta keresztül, ahol egy első illékony anyag mentesítő kamra (devolatilization chamber) tartalmaz egy első lérfogatot az említett első gyűjtőtartály fölött, és egy második illékony anyag mentesítő kamra tartalmaz egy második lérfogatot az említett második gyűjtőtartály fölött, és az említett első és második illékony anyag mentesítő kamrának egy vagy több gőz eltávolító vonala (vapour removal line) van benne kialakítva, hogy lehetővé váljék az illékony anyag eltávolítása;

ahol az említett első és második illékony anyag mentesítő kamra részlegesen el van különítve egy belső fal révén; és ahol az említett belső fal közös mind az említett első, mind az említett második illékony anyag mentesítő kamrában; és az említett fal magában foglal egy tereőlapátot (baffle).

2. Az 1. igénypont szerinti eljárás, ahol az elosztó nyílások említett száma az említett második elosztó fúvókában azonos az elosztó nyílások számával az említett első elosztó fúvókában.

3. Az 1. igénypont szerinti eljárás, ahol az elosztó nyílások említett száma az említett második elosztó fúvókában nagyobb, mint az elosztó nyílások száma az említett első elosztó fúvókában.

4. Az 1. igénypont szerinti eljárás, ahol az említett második illékony anyag mentesítő folyadékszerűen (fluidly) hozzá van kapcsolva egy ezt követő harmadik illékony anyag mentesítőhöz.

5. Az 1. igénypont szerinti eljárás, ahol az említett első elosztó fúvóka a végénél hozzá van kapcsolva az említett második elosztó fúvókához, hogy lehetővé váljék az említett tömegeesen feldolgozható polimer számára, hogy átfolyjék az említett első elosztó fúvókából az említett második elosztó fúvókába.

6. Az 5. igénypont szerinti eljárás, ahol az említett vég megfelelően kúposítva van (tapered), hogy lehetővé váljék a kapcsolat az említett első elosztó fúvóka és az említett második elosztó fúvóka között.

7. Az 5. igénypont szerinti eljárás, ahol az elosztó nyílások említett száma az említett második elosztó fúvókában 2,5-szöröse az említett első fúvókában levő elosztó nyílások említett számának.

8. Az 1. igénypont szerinti eljárás, ahol az említett első elosztó fűvóka olyan hőmérséklet-tartományban működik, amely 237°C (460°F) és 271°C (520°F) között van.

9. Az 1. igénypont szerinti eljárás, ahol az említett első elosztó fűvóka olyan hőmérséklet-tartományban működik, amely 237°C (460°F) és 248°C (480°F) között van.

10. Az 1. igénypont szerinti eljárás, ahol az említett második elosztó fűvóka olyan hőmérsékleten van tartva, amely egyenlő az említett első elosztó fűvóka hőmérsékletével.

11. Az 1. igénypont szerinti eljárás, ahol az említett második elosztó fűvóka olyan hőmérsékleten működik, amely magasabb, mint az említett első elosztó fűvóka említett hőmérséklete.

13. Az 1. igénypont szerinti eljárás, ahol az említett második elosztó fűvóka olyan hőmérséklet-tartományban működik, amely 237°C (460°F) és 248°C (480°F) között van.