

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 November 2010 (11.11.2010)

PCT

(10) International Publication Number
WO 2010/128126 A1


- (51) **International Patent Classification:**
F24J 2/10 (2006.01) *F24J 2/46* (2006.01)
- (21) **International Application Number:**
PCT/EP2010/056222
- (22) **International Filing Date:**
7 May 2010 (07.05.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
09382066.0 8 May 2009 (08.05.2009) EP
- (71) **Applicant (for all designated States except US):** RIO-GLASS SOLAR, S.A. [ES/ES]; Polígono Industrial de Sovilla, 4, E-33612 Santa Cruz de Mieres - Asturias (ES).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** GARCÍA-CONDE NORIEGA, Ignacio [ES/ES]; Rioglass Solar, S.A., Polígono Industrial de Sovilla, 4, E-33612 Santa Cruz de Mieres - Asturias (ES). UBACH CARTATEGUI, Josep [ES/ES]; Rioglass Solar, S.A., Polígono Industrial de Sovilla, 4, E-33612 Santa Cruz de Mieres - Asturias (ES).
- (74) **Agent:** PRIETO MORÁN, Fernando; ABG Patentes, S.L., Avenida de Burgos, 16D, Edificio Euromor, E-28036 Madrid (ES).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** DEVICE AND METHOD FOR PROTECTING SOLAR REFLECTORS

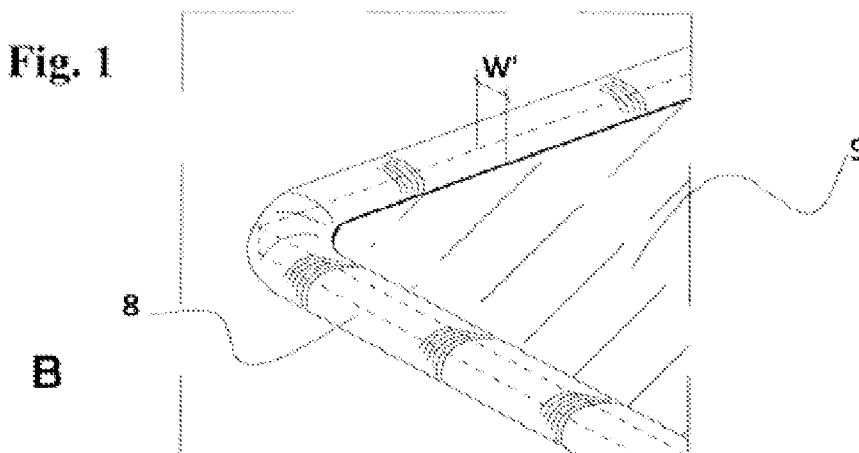

(57) **Abstract:** The present invention relates to a protection for reflective mirrors of solar energy concentrators. The protection comprises a peripheral cord (8) which extends along the edge of the reflector (9) covering the peripheral area of the reflective layer on the edge of the reflector (9). Preferably, the peripheral cord (8) is made substantially of an elastomer (silicone) polymer and adheres to at least the edge of the reflective mirror to protect it from corrosion and blows. It additionally defines a method to protect a reflector (9) against corrosion and blows by means of the extrusion of a peripheral cord (8) on the edge of the reflective mirror.



WO 2010/128126 A1

DEVICE AND METHOD FOR PROTECTING SOLAR REFLECTORS**DESCRIPTION****TECHNICAL FIELD OF THE INVENTION**

5 The present invention relates to a protection against corrosion and impacts for reflective mirrors of solar energy concentrators. The protection is particularly applied on the edge area of the reflective mirrors.

BACKGROUND OF THE INVENTION

10 The electricity generation systems by concentrating solar thermal energy use reflective mirrors of different geometries as one of their basic elements, such as those which have a flat, cylindrical parabolic or spherical parabolic surface, according to the technology to which they
15 are applied, amongst these being the concentration tower, tube concentration or concentration by using Sterling motor technology.

 The reflective surface is achieved by means of a metal layer placed on one of the faces of a rigid substrate. This
20 rigid substrate tends to be of metal or glass. Furthermore, both in direct reflectors, wherein the radiation falls directly on the reflective surface, and in those of the mirror type, wherein the radiation passes through a substrate support before falling on the reflective surface,
25 a plurality of protective layers are placed on these reflective surfaces to protect these reflective surfaces.

 The aforementioned protective layers which are deposited during the manufacturing process of the mirrors and used as solar reflectors are essentially made
30 considering the following sequential steps; application of at least one silver reflective layer, followed by the application on the silver of a copper layer which protects the previous one and the application of a plurality of protective layers of paint with a thickness of micrometres
35 on the copper layer.

 Once the manufacturing process thereof has been completed, a common aspect of these reflectors is that the

metal reflective layers borders, which determine a peripheral area on the edge of the reflective mirror, are permanently exposed to the environment or external atmosphere. In the peripheral area exposed to the environment an oxidation process is begun towards the interior of the reflector which has fatal consequences for the reflective layer, as the corrosion which is initiated on the edge of the reflector spreads towards the inside of the reflector, diminishing the reflective properties of the reflective layer and reducing the operative reflective surface.

These reflectors are mounted on metal structures installed in the open air in places with a large amount of sunshine. Bearing in mind that they are normally installed in desert areas with high temperature gradients over the course of a day, the environmental conditions favour the appearance of water due to condensation of the atmospheric humidity. Therefore, the probability is considerably high that corrosive processes begin on the edge of the metal layers in the mid-long term, which in time, spread towards the interior of the reflectors and produce corrosive phenomena such as those previously described, with the consequent reduction of the useful reflective surface.

This phenomenon is completely independent from the size and geometry of the reflector, as the capacity of peripheral corrosion of its reflecting layer and its subsequent penetration towards the interior of the surface of the collector basically depend on the intrinsic oxidation capacity of the material of the reflective layers, on the atmospheric conditions of the location of the reflectors and on the quality of the application process and the protection of the reflective layers on the substrate support.

The protection against oxidation of the metal layers which is performed on the solar reflectors with deposition of metal layers is generally based on the application of the described protective coating on the reflective layer, whether it is on the solar radiation incidence face or on

the opposite face. In a mirror type reflector with the metal layer applied on the face of the substrate opposite the solar radiation, the protective coating is normally made up of a copper layer and at least one additional layer of paint. The peripheral area defined by the metal layer border on the edge of the reflector exposed to the open air and under risk of initiation and spreading of corrosion is maintained with this type of protection based on successive depositions of layers.

10 Attempts have been made to reduce the risk of oxidation of the silver layer with chemical treatments, U.S. Pat. No. 5.296.297, but with the same philosophy of protection based on surface deposition of layers and without any type of protection against the peripheral area.

15 Protections have also been proposed by means of the application of layers of paint on the edge of the reflective mirror. These layers of paint are exposed to various problems during their handling and transport which could lead to damage on the reflector, and also, to the damages that could be caused on the protective layer itself. This damage helps the oxidizing agents access the reflective layers and can accelerate the diminishing of the performance of the reflector.

25 Furthermore, the application of a layer of paint generally requires a level of finish of the edge of the reflector capable of providing clean surfaces which result in a correct adhesion of the protective layer. These processes on the edges of a reflector imply the use of machinery which permits the achievement of the previous requirements in reflectors with curved shapes such as paraboloids and such like which results in a substantial increase of costs.

SUMMARY OF THE INVENTION

35 The object of the present invention is to resolve the protection of the reflective layer of a solar reflector and particularly to prevent the initiation and penetration of corrosive processes of the reflective layer which begin on

the edges of a solar reflective mirror and the protection of the edges of these reflective mirrors against blows and impacts which they could suffer in the manufacturing, packaging, transport and assembly processes.

5 These and other drawbacks are resolved in the present invention by means of a protection for solar reflectors according to the independent claim 1, a solar reflector according to the independent claim 6, and a method of protection for a solar reflector according to the
10 independent claim 14. Additionally, other aspects of the inventions and particularly advantageous embodiments thereof are defined in the dependent claims.

 In a first inventive aspect the invention features a protection against corrosion and impacts for concentrators
15 of solar energy reflectors which comprises a peripheral cord which covers at least the peripheral area of the reflective layer on the edge of the reflector, the cord being of a thickness such that it substantially protrudes from the edge of the reflector, and is adhered to the peripheral cord at
20 least at part of the adhesive area of the reflector.

 In the context of the present invention, adhesive area of the reflector is understood as any part of the edge of the reflector and/or any area or areas of the surfaces next to the edge, which permit the peripheral cord to be able to
25 cover the peripheral area of the reflective layer on the edge of the reflector guaranteeing the sealing against penetration of the external corrosive agents. Consequently, the peripheral cord can be adhered to any area of the edge, to any area or areas of the incidence face, to any area or
30 areas of the face opposite that of the incidence face, or to any combination of the previous elements.

 The protection of the invention protects the edges of the reflectors around their perimeter by means of an elastic product with a great capacity of adhesion and stability
35 against the atmospheric agents (solar radiation, humidity, dust, variations in temperature) which also permits the absorption of impacts, thus protecting the mirror against

accidental breakages in the processes of with a lot of handling, such as the packaging, transport and assembly in the support structures, especially in the case of sea transport of the reflectors.

5 The cord covers at least the peripheral area defined by the border of the metal layer on the edge of the reflector, exposed to the exterior atmosphere, where the corrosive processes begin. The size of the section or thickness of the peripheral cord is such that it protrudes from the edge of
10 the reflector so that it provides a contact surface against impacts and/or corrosive agents which could affect at least the peripheral area providing protection against these aggressions. Advantageously, the cord can protrude only on the surface of the edge, on the surface of the edge and part
15 of the incidence face, on the surface of the edge and part of the face opposite that of incidence or on the three aforementioned surfaces.

 In a preferred embodiment the covered surface is substantially greater than that which occupies the
20 peripheral area defined by the border of the metal layer on the edge of the reflector optimizing the adhesion of the peripheral cord to the substrate.

 The material wherefrom the cord is manufactured is substantially an elastomer, making this cord a shock
25 absorber element for the blows and impacts which the edge of the reflector might suffer during the handling thereof. Nevertheless, with the object of preserving the reflective surface as much as possible, the peripheral cord invades a region whose maximum width w is of 5 mm on the surface of
30 the radiation incidence face, measured from the unedged area.

 In one example of embodiment, the elastomer used is substantially a silicone polymer. These synthetic polymers derived from silicon require an amount of energy which is
35 much greater than that necessary to destroy the links of the organic polymers featuring the following advantages with respect to other elastomers:

- Stability in a wide range of temperatures from approximately -50°C to 200°C;
- Stability against chemical attacks such as acid rain and/or contaminating substances in the atmosphere;
- 5 - Substantially constant mechanical properties in a wide range of temperatures, such as those which are reached in desert environments;
- Resistance to shearing and grating;
- Durability against solar radiation, especially
10 resistant to the UV region of the spectrum;
- High adhesion to the substrate;
- Low flammability;
- High degree of buffering and flexibility;
furthermore being compatible with an extrusion
15 manufacturing process.

As the silicones are elastomers polymers which are susceptible to extrusion and feature excellent characteristics of adhesion to the substrate, the surfaces of the edges of the reflector do not need the specific care
20 relating to the typical polish and/or preparation when an adhesive of any class is applied on a surface, while they permit the production of a smooth and even surface. This solution results in a substantial decrease in the costs as it does not require the edges of the reflector to undergo a
25 specific polishing procedure. On the other hand, application by means of extrusion of the cord can be carried out by means of high productivity and low cost processes, additionally permitting storage in excellent conditions, which is especially critical in the transportation
30 processes.

The previously mentioned characteristics lend a great durability to the applications with silicone maintaining optimal service conditions, of greater than 20 years, which makes them an ideal material for long-term protection to
35 corrosion of the metal layers of the solar reflectors even in extreme environments.

The tests performed in a saline chamber with samples of

mirror protected by peripheral cord remain completely unaltered to this corrosive phenomenon in tests which last more than 600 hours, against those samples characterized by the application of four protective layers (one of copper and
5 three of paint) without peripheral cord, where the corrosive process has just started and spreads towards the interior of a mirror type reflector.

Although the invention functions for any type of reflector, i.e., any substrate equipped with metal layers
10 which allow for reflection, it is especially intended for those reflectors used in the technology of electrical energy generation by solar concentration, whatever the geometry thereof may be: flat, cylindrical, parabolic, cylindrical parabolic, spherical or spherical parabolic. Examples of
15 such a substrate are monolithic glass, laminated glass, aluminium, plastic, etc...

In a second inventive aspect a reflector is presented for solar energy concentrators which comprises a rigid substrate, a reflective layer, a plurality of protective
20 layers applied on the reflective layer, and a protection against corrosion and impacts according to the first inventive aspect.

In a third inventive aspect a method is presented to protect a reflector for solar energy concentrators against
25 corrosion and impacts which comprises the following steps:

- having a reflector which comprises a reflective surface; and
- applying a protection according to the first inventive aspect around the peripheral area of the reflective
30 layer on the edge of the reflector.

BRIEF DESCRIPTION OF THE FIGURES

For a better understanding of the invention, the objects and advantages thereof, the following figures are attached to the specification wherein the following is
35 represented:

fig. 1 shows a perspective view of a reflector provided with a protection according to a preferred

embodiment of the invention;
fig. 2 shows a cut of the cross-section of a reflector provided with a protection according to a preferred embodiment of the invention; and
5 fig. 3 shows cross-sectional views of different examples of embodiment of the protection of the invention;

EMBODIMENTS OF THE INVENTION

Below, variants of embodiment of the peripheral cord to apply to a reflective mirror such as those used in solar
10 energy plants are detailed.

Figure 1 shows a reflective unit which comprises a reflective mirror 9 equipped with a peripheral cord 8. In this example of embodiment, the peripheral cord 8 extends around the edge of the reflector. As can be observed in the
15 close-up, in this example of embodiment the peripheral cord 8 covers the entire edge extending to a distance w on the incidence face of the reflector.

In one example of embodiment, the peripheral cord 8 features a cross sectional thickness of between
20 approximately 1 and 1.5 mm and a developed cross-sectional length of between 11-12 mm for a glass of 4 mm of thickness, which is an approximate cross section of around 10 mm².

The structure of the layers of the reflective mirrors 9 of a preferred embodiment of the invention is shown in
25 figure 2. The reflection is produced thanks to the metal layer 2 placed on one of the two faces of a rigid substrate 1, preferably generally of glass, with the geometric shape of the reflector. These mirrors comprise at least one reflective layer 2, preferably of silver, whereon is found a
30 plurality of protective layers 10. Preferably, in one example of embodiment the silver layer of metal reflective 2 features a thickness such that the minimum surface density is approximately 0.7 g/m².

On the face of the reflective layer 2 opposite the
35 solar radiation incidence face is placed a plurality of protective layers 10, as shown in figure 2.

Preferably, in one example of embodiment the plurality

of protective layers 10 comprises one copper layer 3 and three layers of paint 4, 5, 6.

Preferably, in one example of embodiment the copper layer 3 features a thickness such that the minimum surface
5 density is approximately 0.3 g/m^2 .

Preferably, in one example of embodiment the first of the three layers of paint or "base coating" paint 4 applied by means of a curtain coater followed by the corresponding infrared curing furnace and an air cooling tunnel to reduce
10 the temperature of the glass before the following step. In one example of embodiment the thickness of the dry film for the base coating is approximately of between 20 and 45 micrometres.

Preferably, the second layer of paint or "intermediate
15 coating" paint 5 is also applied in a curtain coater followed by the corresponding infrared curing furnace and an air cooling tunnel. In one example of embodiment the thickness of the dry film for the intermediate coating is approximately of between 25 and 55 micrometres.

Preferably, the third layer of paint or "outer coating"
20 paint 6 is applied in a curtain coater followed by the corresponding infrared curing furnace and an air cooling tunnel. In one example of embodiment the thickness of the dry film for the outer coating is approximately of between
25 25 and 55 micrometres.

In figure 3 various examples of embodiment of this peripheral cord 8 can be observed for a C-shaped edge (A) a semi C-shaped edge (B) and a flat edge (C). In the various examples of embodiment it can be observed that the thickness
30 of the peripheral cord 8 allows for the protection of the area of the edge in any of its embodiments, being substantially thicker than a layer of paint in order to provide protection against the aforementioned impacts. In the examples of embodiment A1, B1 and C1, the peripheral
35 cord 8 substantially covers the peripheral area defined by the edge of the metal layer 2 on the edge of the reflector 9.

In the examples of embodiment A2, B2 and C2 of figure 3, the peripheral cord 8 features a curved cross-section extending on the incidence face a width w and on the painted face a width w' .

5 In the examples of embodiment A3, B3 and C3 of figure 3, the peripheral cord 8 features a straight cross-section.

In the examples of embodiment A4, B4 and C4 of figure 3, the peripheral cord 8 features a pseudo-pentagonal cross-section.

10 In the examples of embodiment A5, B5 and C5 of figure 3, the peripheral cord 8 features an H-shaped cross-section.

Lastly, in the examples of embodiment A6, B6 and C6 of figure 3, the peripheral cord 8 features a curved cross-section and covers the edge slightly expanding on the
15 painted face.

In a second aspect a method for protecting a reflective mirror 9 is defined whereto a peripheral cord 8 is provided.

In a preferred embodiment, the peripheral cord 8 is made by extrusion of a silicone polymer on the edge of the
20 reflective mirror 9. The extrusion of this cord covers at least the part of the edge where the border of the reflective layer 2 is found, resulting in a unit which comprises a reflective mirror and a peripheral cord.

In one example of embodiment, said extrusion is carried
25 out once all of the layers which make up the reflector 9 have been placed, after a final washing with demineralised water, to eliminate any contamination caused during the process on the radiation incidence face, and a drying by air to eliminate the humidity of the previous washing step.

30 *Tests*

In order to illustrate the problem of oxidation and corrosion of the metal layers, accelerated corrosion tests have been performed in saline chambers with standard and other specific procedures on samples of mirrored glass.

35 These tests show peripheral corrosion of an intensity level, which while the temperature and saline solution concentration remain constant and homogenous inside the

chamber, they basically depend on the exposition time of the samples in the salt fog chamber.

Test 1. Resistance to corrosion in acidic saline chamber according to ISO regulation 9227:2006 CASS (*Copper Acid Salt Spray*). The test was carried out in a Dycometal SSC-400 chamber.

The presence of incipient corrosion was detected during this test for the samples without peripheral cord when the exposition time exceeds 120 hours. Specific corrosion is observed on edges of the sample without peripheral cord CP4b.10 after 386 hours which progressively increases. At 818 h corrosion is observed along the edge of the sample without peripheral cord CP4b.10 with specific areas of penetration up to 1.1 mm.

On the other hand, there are no effects of corrosion or initiation thereof shown on the reflectors protected by means of a peripheral cord according to the preferred embodiment of the invention once 818 h of Test 1 have passed.

Test 2. Accelerated CASS corrosion test (532 hours) on the sample with peripheral cord CP4b.4, and on the sample without peripheral cord CP4b.9 and CP4b.10. This specific accelerated corrosion test designed by the inventors is carried out by total immersion of the samples in a solution of pH 1 prepared from 1 litre of solution used in CASS and 10 ml of concentrated chlorhydric acid.

The sample with peripheral cord CP4b.5 does not present signs of corrosion on edges or close to them at the end of 532 h or Test 2. The samples CP4b.9 and CP4b.10 without peripheral cord present clear signs of homogeneous corrosion (of between 0.2-0.3 mm of penetration) after 96 hours of testing have passed and up to 1mm of penetration at the end of 532 hours of testing.

Id.	Peripheral Cord	Test 1		Test 2	
		Signs of corrosion	Duration (hours)	Signs of corrosion	Duration (hours)
CP4b.1	Yes	No	818	-	-
CP4b.2	Yes	No	818	-	-
CP4b.3	Yes	No	818	-	-
CP4b.4	Yes	No	818	-	-
CP4b.5	Yes	No	818	No	532
CP4b.6	Yes	No	818	-	-
CP4b.7	Yes	No	818	-	-
CP4b.8	No	Yes	818	-	-
CP4b.9	No	Yes	818	Yes	532
CP4b.10	No	Yes	818	Yes	532

CLAIMS

1. Protection against corrosion and impacts for reflectors (9) of solar energy concentrators which comprises a peripheral cord (8) which covers at least the peripheral area of the reflective layer on the edge of the reflector, the peripheral cord (8) being of a thickness such that it substantially protrudes from the edge of the reflector, and the peripheral cord (8) being adhered, at least, to a part of the adhesive area of the reflector (9).
2. Protection according to claim 1 wherein the peripheral cord (8) is made substantially from an elastomer polymer.
3. Protection according to claim 2 wherein the peripheral cord (8) is made substantially from a silicone polymer.
4. Protection according to any of the previous claims wherein the peripheral cord (8) covers at least all of the edge of the reflector (9).
5. Protection according to any of the previous claims wherein the peripheral cord (8) extends over the reflective surface to an approximate distance of less than or equal to 5 mm.
6. Reflector for solar energy concentrators which comprises:
- A rigid substrate (1);
 - A reflective layer (2);
 - A plurality of protective layers (10), and
 - A protection against corrosion and impacts according to any of the previous claims 1 to 5.
7. Reflector according to claim 6 wherein the reflective layer (2) is made of silver of a thickness such that the minimum surface density is approximately 0.7 g/m².

8. Reflector according to claims 6 or 7 wherein the plurality of protective layers (10) comprises a copper layer (3).

5

9. Reflector according to claim 8 wherein the thickness of the copper layer (3) is such that the minimum surface density is 0.3 g/m^2 .

10 10. Reflector according to any of claims 6 to 8 wherein the plurality of protective layers (10) comprises a first layer of paint (4).

11. Reflector according to any of claims 6 to 10 wherein
15 the plurality of protective layers (10) comprises a second layer of paint (4).

12. Reflector according to any of claims 6 to 11 wherein
20 the plurality of protective layers (10) comprises a third layer of paint (4).

13. Reflector according to any of claims 10 to 12 wherein
the thickness of any of the layers of paint (4, 5, 6) is of
approximately between 20 and 45 micrometres.

25

14. Method to protect a reflector for solar energy concentrators against corrosion and impacts which comprises the following steps:

30

- disposition of a reflector (9) which comprises a reflective surface (2);

and

- application of a protection against any of the claims 1 to 5 around the peripheral area of the reflective layer on the edge of the reflector (9).

35

15. Method according to claim 14 wherein the application of the protection comprises the extrusion of a peripheral

cord (8) on the edge of a reflecting mirror.

Fig. 1

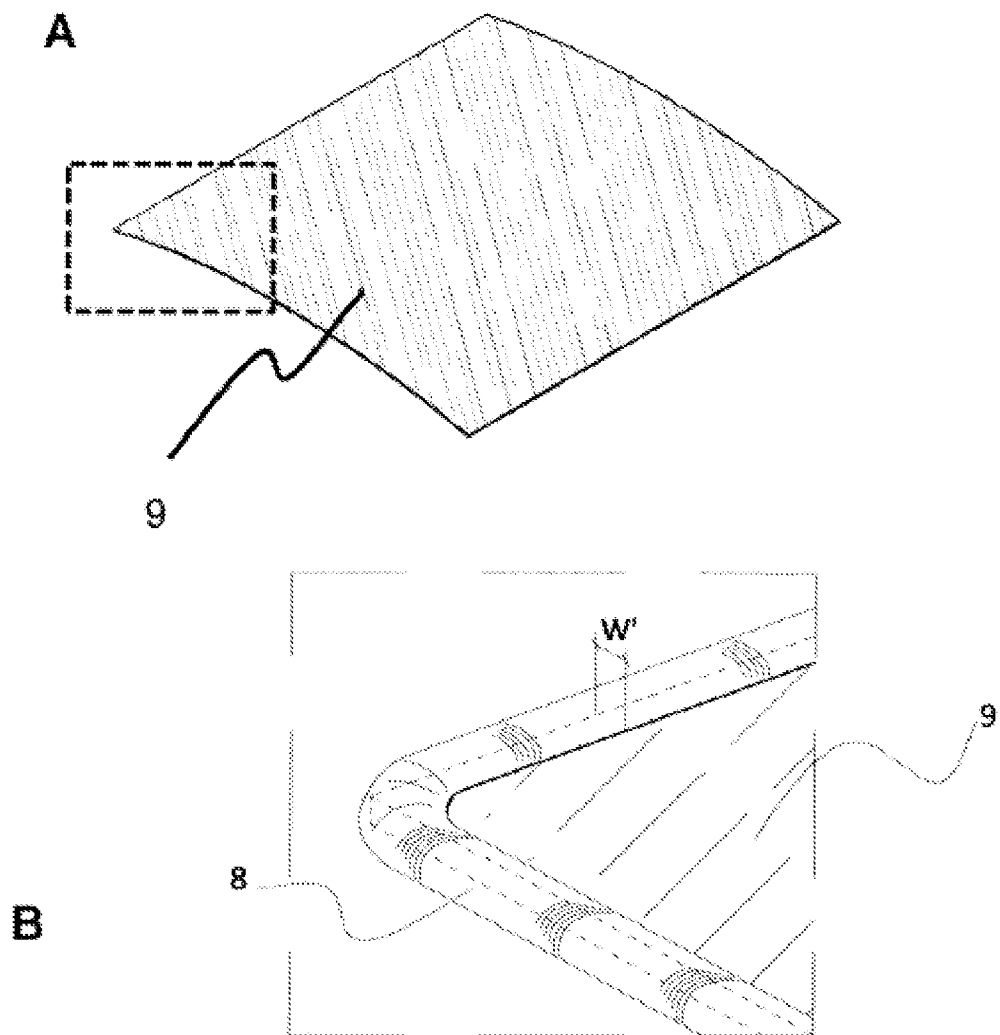


Fig. 2.



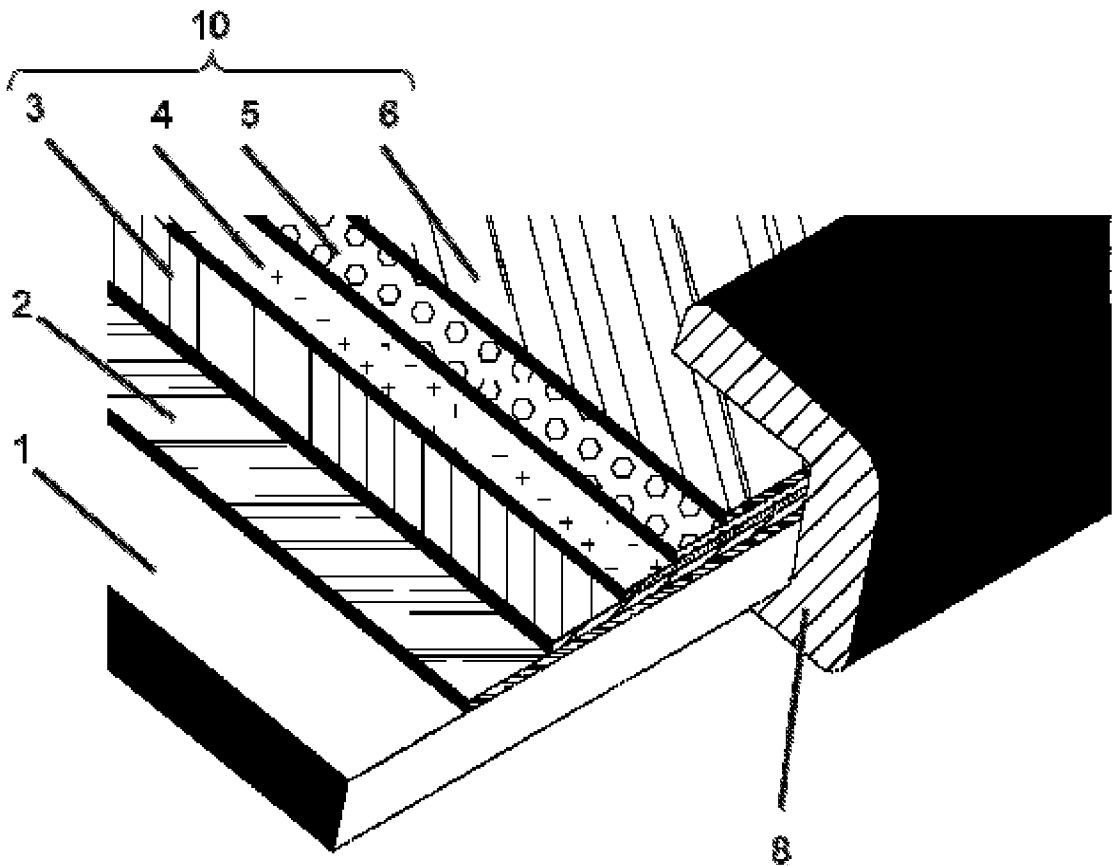


Fig. 3


A

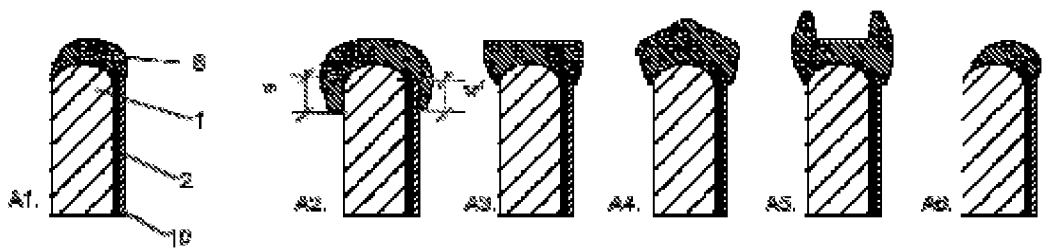

B

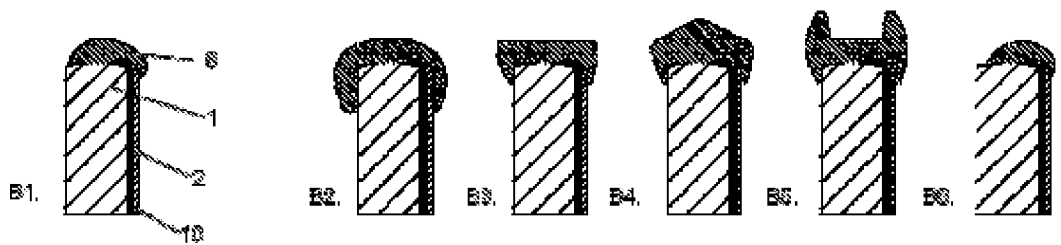

C

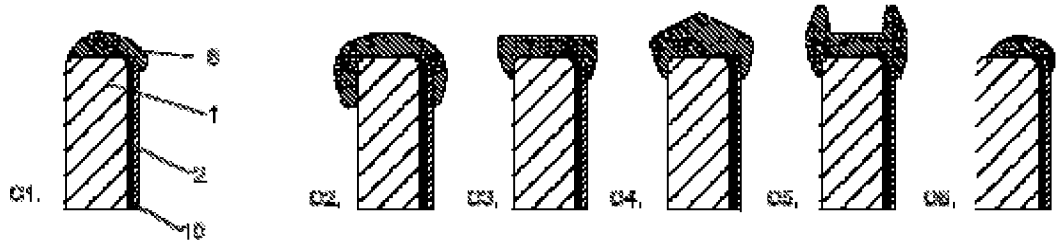

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/056222

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F24J2/10 F24J2/46
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 F24J B60J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 678 292 A (MIYATANI KAZUO [JP] ET AL) 7 July 1987 (1987-07-07)	1,2,4-8, 10,14
Y	column 6, line 21 - line 49 column 9, line 23 - line 32; figure 4	15
X	EP 1 927 495 A (BARAT TRANSP [FR]) 4 June 2008 (2008-06-04)	1-5
Y	paragraphs [0017], [0018]; figures	15
X	US 4 038 971 A (BEZBORODKO JOSEPH A I B) 2 August 1977 (1977-08-02)	1,2,4,5
	column 4, line 15 - line 24; figure 2 column 5, line 7 - line 25; figures 3,4	
X	GB 1 590 091 A (ADVANCED SOLAR POWER CO) 28 May 1981 (1981-05-28)	1,4,6,14
	page 11, line 98 - line 116; figures 11-14	
	-/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>
--	--

Date of the actual completion of the international search	Date of mailing of the international search report
28 June 2010	06/07/2010

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Mootz, Frank
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/056222

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 199 27 056 A1 (KAUFMANN KLAUS [DE]) 17 August 2000 (2000-08-17) column 7, line 62 - column 8, line 8; figure 8 -----	1,2,4,6, 14
X	US 4 261 330 A (REINISCH RONALD F) 14 April 1981 (1981-04-14) column 8, line 49 - line 60; figures 4,9 -----	1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2010/056222

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 4678292	A	07-07-1987	NONE	
EP 1927495	A	04-06-2008	FR 2909042 A1	30-05-2008
US 4038971	A	02-08-1977	NONE	
GB 1590091	A	28-05-1981	BE 869754 A1 CA 1113812 A1 DE 2749286 A1 EP 0016175 A1 FR 2407439 A1 NL 7807477 A WO 8000489 A1	18-12-1978 08-12-1981 10-05-1979 01-10-1980 25-05-1979 15-01-1980 20-03-1980
DE 19927056	A1	17-08-2000	NONE	
US 4261330	A	14-04-1981	NONE	