



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2674947 C 2017/09/12

(11)(21) **2 674 947**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(22) Date de dépôt/Filing Date: 2009/08/06

(41) Mise à la disp. pub./Open to Public Insp.: 2010/02/12

(45) Date de délivrance/Issue Date: 2017/09/12

(30) Priorité/Priority: 2008/08/12 (US12/190,195)

(51) Cl.Int./Int.Cl. *A41D 19/00* (2006.01),
A41D 19/02 (2006.01)


(72) Inventeurs/Inventors:
GREEN, DANIEL ALLAN, CA;
MORIARTY, CARL, CA

(73) Propriétaire/Owner:
ARCTERYX EQUIPMENT INC., CA

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : GANT IMPERMEABLE COMPRENANT UNE STRUCTURE SIMPLIFIEE

(54) Title: WATERPROOF GLOVE HAVING A SIMPLIFIED STRUCTURE

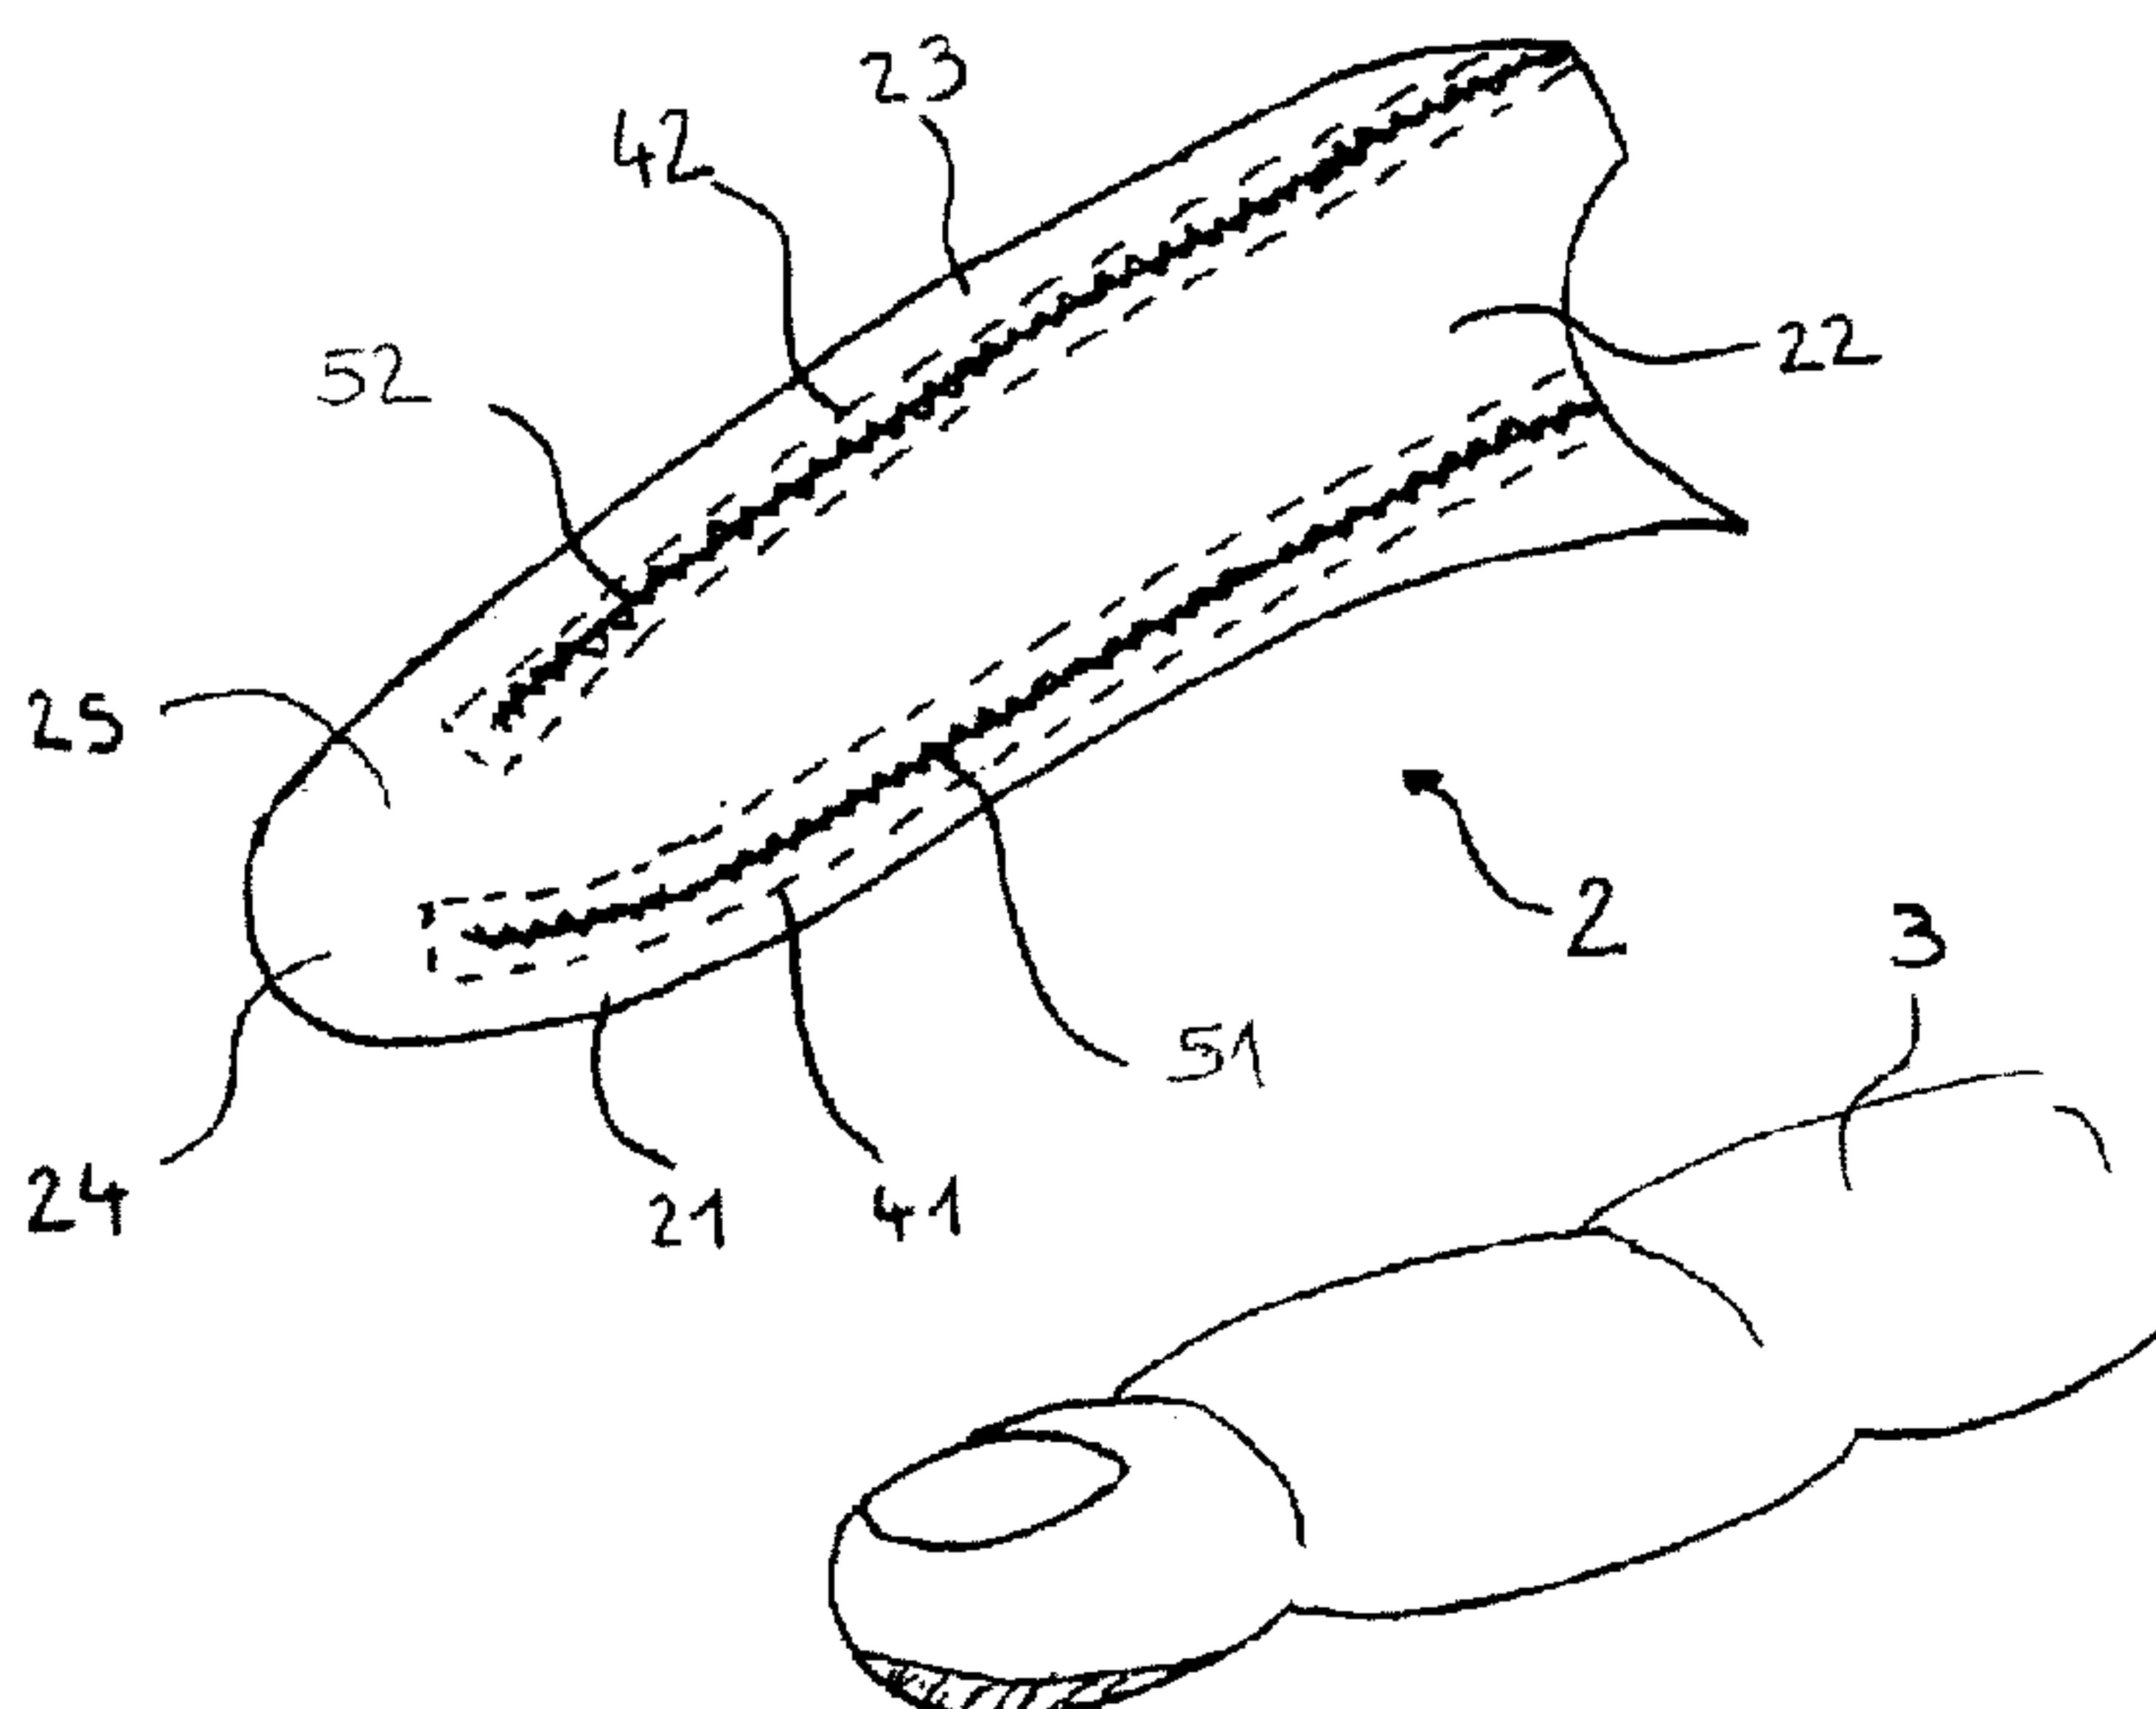

(57) Abrégé/Abstract:

The invention proposes a waterproof glove (1) comprising an outer shell comprising several finger shells (2). At least one finger shell comprises first (21), second (22) and third (23) tongues, the first tongue forming the palm portion of the finger shell (2), the second and third tongues forming the back and side portions of the finger shell. The tongues (21-23) are joined together by their adjacent edges. The glove (1) further comprises waterproof stripes (41, 42) overlapping the adjacent edges and fastened to these edges.

ABSTRACT

The invention proposes a waterproof glove (1) comprising an outer shell comprising several finger shells (2). At least one finger shell comprises first (21), second (22) and third (23) tongues, the first tongue forming the palm portion of the finger shell (2), the second and third tongues forming the back and side portions of the finger shell. The tongues (21-23) are joined together by their adjacent edges. The glove (1) further comprises waterproof stripes (41, 42) overlapping the adjacent edges and fastened to these edges.

10

Fig. 2

WATERPROOF GLOVE HAVING A SIMPLIFIED STRUCTURE

The present invention relates to waterproof gloves, especially to the manufacturing process of such gloves.

5 Waterproof or waterproof breathable gloves are required especially for mountain activities. Such gloves usually comprise an outer shell composed of several portions of leather or fabric sewn together by their edges. Several edges intersect at the level of the distal end of each finger. Since sewn edges inherently form entry points for water inside the outer shell, such gloves usually
10 10 comprise an inner waterproof sheath. The sheath is designed such as to enclose the user's hand. The finger tips of the sheath provide protruding portions sewn to the shell. The sheath walls stick to the outer shell to delimit an inner volume. Wadding is then bonded inside the sheath. The wadding provides an improved comfort for the user and provides a thermal isolation.
15 15 Such a glove suffers from several drawbacks. Since water is entering through the edges of the leather portions, the thermal isolation provided by the glove is weakened. Moreover, the cost of the waterproof or waterproof breathable sheath is relatively high. If the sheath is pierced during a sewing phase, the glove is not waterproof anymore. (Due to its waterproofing process
20 20 including a PTFE coating step, the sheath needs to be made out of two flat fabric layers joined together by bonding). The sheath is basically made out of two flat layers having the general contour of the hand that are joined together at their respective edges, leaving an opening for the hand insertion. Because of the flat structure of the two layers, said layers are easy to assemble, for example by
25 25 welding, thereby insuring a waterproof assembly of the two layers. The sheath then adopts a tridimensional shape inside the outer shell. In order to delimit a suitable inner volume, a very large flat sheath is initially required. In its tridimensional shape, the sheath then presents several pleats at the level of the finger tips. The finger tips then suffer from a loss of tactile sense, making it hard
30 30 to pick up small objects such as coins. The finger flexibility is thereby also reduced. Seams located at the distal end of the finger shell also lead to a loss of tactile sense and to a poor aspect. Due to its loss of tactile sense and to its limited finger flexibility, such a glove is not appropriate for sports such as climbing, skiing, etc... Moreover, in order to adapt to the hand morphology, a 3D
35 35 shape is required for the outer shell, which induces complicated seam contours. Such seam contours induce a complicated manufacturing process.

In the garment manufacturing field, it is known to seal, and waterproof, an assembly line between two panels by overlapping said assembly line with a

waterproof stripe, the assembly line can be a stitched line, a bonded line or a welded line. Using this technology, flat assembly is much easy to waterproof than 3-dimensions assembly. In the manufacturing of garment of bigger size than gloves, the waterproofing of 3-dimensions assembly remains possible

5 because the size of the various panels that are to be assembled always make it possible to "flatten" the assembly line for a certain area, or for a certain length. The manufacturing of tight fit gloves requires the assembly of various small panels. Furthermore, when assembled together, these panels will often define acute angle between each other. This is especially the case at the finger distal

10 end and at the finger crotch (part of the hand that corresponds to the junction of two fingers with the rest of the hand).

There is thus a need for a glove overcoming these drawbacks.

More particularly, it is an object of the present invention to provide a waterproof glove, that needs not to include a flat waterproof sheath in its

15 construction.

It is further an object of the invention to provide a waterproof glove that increases finger tactility.

It is further an object of the invention to provide a waterproof glove that allow smooth surface at the tip of the finger.

20 It is further an object of the invention to provide a waterproof glove that has a closer fit to conform the hand of the user, and more particularly a tight fit.

It is further an object of the invention to provide a waterproof glove with enhanced aesthetic qualities.

The aims of the invention is reached by providing a waterproof or a

25 waterproof breathable glove comprising an outer shell comprising several finger shells, at least one finger shell comprising first, second and third tongues, the first tongue forming the palm portion of the finger shell, the second and third tongues forming the back and side portions of the finger shell, the tongues being joined together by their adjacent edges, the glove further comprising waterproof

30 stripes overlapping the adjacent edges and fastened to these edges.

Preferably, the first and second tongues are joined together by their adjacent edges located on a first side portion of the finger shell, the first and third tongues are joined together by their adjacent edges located on a second side portion of the finger shell, the second and third tongues are joined together

35 by their adjacent edges located on the back portion of the finger shell.

According to an embodiment, the three tongues are formed unitary out of a common material.

According to another embodiment, the first, second and third tongues are independent elements joined together. The first tongue can be made out of leather and the second and third tongues can be made out of fabric.

Preferably, the three tongues are made out of a waterproof or a 5 waterproof breathable material.

The glove may comprise wadding delimiting an inner volume for receiving a user's hand, the wadding being fastened to the outer shell and being enclosed inside the outer shell.

According to an embodiment, the waterproof stripes are made out of 10 fabric covered by an adhesive material.

According to another embodiment, the waterproof stripes are made out of a hot-melt adhesive material.

Preferably, the glove further comprises a junction portion formed unitary with the first tongue and forming the back portion of the tip of the finger shell, the 15 junction portion being folded over the first tongue, and the first tongue and the junction portion being joined together by their adjacent edges.

Preferably, said adjacent tongue edges are sewn together, the seams being covered by said waterproof stripes.

In further embodiments said adjacent tongue edges are bonded or 20 welded together.

The folding line of the junction portion may be located at the distal end of the finger shell, this distal end being thereby deprived of any seam.

The tongue edges preferably extend lengthwise of the finger shell.

The aims of the invention is also reached by providing a waterproof glove 25 comprising an outer shell comprising several finger shells, wherein two adjacent finger shells are joined together at a finger crotch by respective C-shaped edges, the glove further comprising a sealing component overlapping the adjacent edges and fastened to these edges, the sealing component being made out of a hot-melt adhesive material.

30 The C-shaped edges may extend from the palm portion below the finger crotch into the back portion of the outer shell below the finger crotch.

The C-shaped edges may be located in a plane longitudinal to the hand and perpendicular to the plane of the hand.

The invention also proposes a method for manufacturing a waterproof 35 glove comprising several finger shells, comprising the following steps:

- forming a finger shell based on a pattern comprising first, second and third tongues, by joining together these three tongues by their adjacent edges,

the first tongue then forming a palm portion of the finger shell, the second and third tongues thus forming the back and side portions of the finger shell;

- fastening waterproof stripes overlapping the adjacent edges;
- fastening the finger shell to palm and back portions of the glove.

5 The advantage of the present invention will become apparent from the following description of several embodiments with reference to the accompanying drawings, in which:

- Figure 1 is a top view of a glove finger pattern according to a first embodiment of the invention;
- 10 - Figure 2 is a perspective view of the assembled glove finger of figure 1;
- Figure 3 is a perspective view of the finger of figure 2 turned inside-out;
- Figures 4 and 5 are respectively bottom and top views of a glove including several fingers according to figures 2 and 3;
- Figure 6 is a top view of a glove finger pattern according to a second 15 embodiment of the invention;
- Figure 7 is a perspective view of the assembled glove finger of figure 6;
- Figure 8 is a perspective view of the finger of figure 7 turned inside-out;
- Figure 9 is a bottom view of a glove portion at the junction between two fingers and the palm;
- 20 - Figure 10 is a side view of the glove portion of figure 9;
- Figure 11 is a cross-section of the glove portion of figure 9.

The invention proposes a breathable waterproof glove comprising an outer shell including several finger shells. A finger shell comprises first, second and third tongues. The first tongue forms the palm portion of the finger shell, the 25 second and third tongues form the back and side portions of the finger shell. The tongues are joined together by their adjacent edges. Waterproof stripes overlap the adjacent edges and are fastened to these edges.

Such a finger shell structure provides several advantages. A tridimensional finger shell is obtained through the use of the three tongues. The 30 finger shell is thus well adapted to the hand morphology. Moreover, the three tongues limit the number and the complexity of the seams of the finger shell. Thus, the fastening of the waterproof stripes is easy since the finger shell can be easily flattened. The finger shell can be typically flattened at the level of the seam on a length greater than 20 millimeters, preferably greater than 30 35 millimeters.

A waterproof sheath thus becomes unnecessary. Thus, the glove cost is reduced and the finger flexibility is improved. Moreover, no seam is present in

the palm portion of the finger shell. Thus, the sense of feel and the flexion capacity of the finger are improved.

Figure 1 illustrates a pattern of a single piece of material used to form a finger shell 2. The pattern includes a first tongue 21, a second tongue 22 and a 5 third tongue 23. The tongues 21 to 23 extend from a junction portion 25. By joining the adjacent edges of the tongues 21 to 23 together, the tridimensional shape of the finger shell 2 illustrated at figure 2 is obtained. A finger 3 is illustrated beside the finger shell to highlight its orientation.

An edge of the tongue 21 overlaps an edge of the tongue 22. An edge of 10 the tongue 21 overlaps an edge of the tongue 23. An edge of the tongue 22 overlaps an edge of the tongue 23. These overlapping edges are sewn together. Each pair of adjacent edges thus presents a seam extending lengthwise of the finger shell 2. A seam 51 notably joins tongue 21 and tongue 22 on one side of the finger shell 2. A seam 52 joins tongue 22 and tongue 23 on the back portion 15 of the finger shell 2. Such a location of the seam 52 allows easy creation of variable cross sections of the finger shells, by just increasing the widths of tongues 22 and 23 for larger sizes. A seam (not illustrated) joins tongue 21 and tongue 23 on another side of the finger shell 2. The seams are preferably located inside the glove in order to improve its aspect.

20 Figure 3 illustrates the finger shell 2 when turned inside out. In order to seal the finger shell against water, the adjacent edges are overlapped by waterproof stripes. The waterproof stripe 41 overlaps and is fastened to the adjacent edges of tongues 21 and 22. The waterproof stripe 42 overlaps and is fastened to the adjacent edges of tongues 22 and 23. A waterproof stripe (not 25 illustrated) overlaps and is fastened to the adjacent edges of tongues 21 and 23. The waterproof stripes are typically made out of fabric covered by an adhesive layer, for instance a hot-melt adhesive. The waterproof stripes can also be made out of a waterproof material fused in contact with the adjacent edges. Preferably, the integrality of the contact surface of the waterproof stripes will adhere to the 30 edges and to the seams.

In this embodiment, the tongues 21-23 are formed unitary out of a common material, which reduces the number of seams and increases the finger shell durability. This material can be leather or an appropriate waterproof synthetic material, or even a stack of several different layers.

35 The junction portion 25 is advantageously formed unitary with the first tongue 21. The junction portion 25 is folded over the first tongue 21. Thus, the junction portion 25 forms the back portion of the tip of the finger shell 2. Adjacent edges of the junction portion 25 and of the fist tongue 21 overlap. These edges

are joined together by the same seams that join together tongues 22 and 23 to tongue 21. These edges are also overlapped by the previously mentioned waterproof stripes. The folding line of the junction portion 25 relative to the first tongue 21 is located at the distal end of the finger shell. Thus, the distal end of 5 the finger shell 2 is smooth and rounded and has no seam. This increases the sense of feel for the user, as well as the glove aspect. The folding line of the junction portion is practically the extension of the seam 51. Such a junction also allows flattening the finger tip, which is usually a portion where seams are difficult to form. The fastening of the waterproof stripes at the finger tip is thereby 10 made easier. The lateral seams can be stopped approximately at the level of the base of the finger nail, illustrated by a cross at figure 2. The lateral seams will preferably stop at least 10 millimeters before the distal end of the finger shell.

As can be seen, none of the seams forms an acute angle. The seams are almost linear. Thus, linear waterproof stripes can be used and can easily be 15 fastened on the finger shells.

The finger shell 2 illustrated at figures 1 to 3 is designed for the index of the left hand. An arcuate cutout 211 is made in tongue 21. Similarly, an arcuate cutout 221 is made in tongue 22. When tongues 21 and 22 are joined together, cutouts 211 and 221 form a C-shaped edge at the level of the finger crotch. This 20 C-shaped edge can be fastened to a corresponding adjacent edge of a finger shell designed for a middle finger.

Figure 4 and 5 are respectively bottom and top views of a glove 1. Adjacent finger shells 2 are joined together. The finger shells 2 are fastened to a palm portion 6 and to a back portion 7 through respective seams 56 and 57. 25 Waterproof stripes (not illustrated) are located inside the glove and cover the seams 56 and 57.

The glove 1 may include wadding (not illustrated) inside the outer shell in order to improve the thermal protection. The wadding delimits an inner volume for receiving the user's hand. The wadding is fastened to the outer shell, for 30 instance by bonding.

Figures 6 to 8 illustrate another embodiment of the finger shell structure. Thanks to the pattern illustrated at figure 6, the material yield is significantly improved since the tongues 21 to 23 are almost linear and can be obtained by cutouts. Tongue 21 is made out of leather whereas tongues 22 and 23 are made 35 out of a waterproof fabric. The junction portion 25 is advantageously formed unitary with the first tongue. Thus, the tip 24 of the finger shell 2 is free of joining seam, which increases the sense of feel for the user. Tongues 22 and 23 are

fastened to the junction portion 25 by a seam 54. As illustrated at figure 8, the seam 54 is covered by a waterproof stripe 44 located inside the glove 1.

Figures 9 to 11 illustrate the fastening of adjacent finger shells together at the finger crotch. Finger shells 2a and 2b are fastened to a glove back portion 7.

5 Finger shells 2a and 2b have overlapping edges sewn together at the finger crotch through the seam 55. These edges are both C-shaped in order to fit to the finger crotch morphology. Looking at the hand placed in a vertical plan, these edges extend from the palm portion, below the finger crotch, into the back portion of the outer shell, below the finger crotch. These edges preferably start
10 at least 5 millimeters beyond the finger crotch, preferably at least 10 millimeters, and most preferably at least 15 millimeters. As illustrated, a sealing component 8 is located inside the glove and encloses the seam 55 and the C-shaped edges. The sealing component 8 is made out of a waterproof material. Since waterproof tape might be inappropriate to conform to the C-shaped edges, the
15 sealing component 8 is preferably made out of two C-shaped stripes 81 and 82 made out of a hot-melt adhesive. The stripes 81 and 82 preferably have the same shape. The C-shaped stripes 81 and 82 can notably be made out of urethane. Each stripe 81 or 82 has a portion covering a C-shaped edge and the seam 55, and a portion covering a portion of the other C-shaped stripe. During
20 the assembly process, the stripes 81 and 82 are pressed and heated until they are joined together and joined to their respective C-shaped edges. Once the stripes 81 and 82 are joined, the protruding portion is folded back over one of the edges and heat pressed again, in order to avoid the user's finger crotch to be hurt. The stripes 81 and 82 are fastened to the finger shells 2a and 2b after
25 the tongues defining the C-shaped edges have been joined together.

Due to the sealing component 8 made out of two C-shaped stripes 81 and 82, the fastening of the finger shells at the finger crotch is made much easier. To further facilitate the fastening of the stripes 81 and 82, the C-shaped edges are located in a plane perpendicular to the plane of the hand. This plane is
30 preferably longitudinal to the hand.

An appropriate pressing and heating tool will preferably have a shape that will limit the width of the portions of the stripes 81 and 82 overlapping each other. The sealing component 8 will thus have a shape and a contact surface unlikely to hurt the user's finger crotch.

35 The finger shells 2a and 2b advantageously comprise two overlapping layers. The outer layer can be made out of leather to provide grip and abrasion resistance. The inner layer can be a waterproof vapor-permeable fabric, thus providing weather resistance and perspiration evacuation. Tongue 23a

comprises an inner fabric layer 232a and an outer leather layer 233a. Tongue 21a comprises an inner fabric layer 212a and an outer leather layer 213a. Tongues 21a and 23a are joined together by the seam 53a. Tongue 21b comprises an inner fabric layer 212b and an outer leather layer 213b. Tongue 5 21b and tongue 22b are joined together by the seam 51b.

The stitching of the various panels that constitute the glove can be replaced by any other method of bonding, e.g. welding, gluing.

CLAIMS

1. A glove comprising an outer shell comprising a palm side, a back side, and a plurality of finger shells;
 - 5 at least one of said finger shells comprising first, second, and third tongues; the first tongue forming a portion of the finger shell on the palm side of the glove; the second and third tongues forming side portions of the finger shell and respective portions of the finger shell on the back side of the glove; adjacent pairs of edges of the first, second, and third tongues having been joined at respective seams, the glove further comprising waterproof strips overlap respective ones of said pairs of edges and are fastened to said adjacent edges; 10 a junction portion formed unitary with the first tongue, that is, the junction portion is not attached to the first tongue by means of a seam; the junction portion forming a tip of the back portion of the finger shell, the junction portion being folded over the first tongue along a folding line; and 15 the first tongue and the junction portion being joined together at adjacent edges.
2. A glove according to claim 1, wherein:
 - 20 said seams extend longitudinally of the finger shell and are substantially straight; none of said substantially straight seams are visible in a plan view of the palm side of the glove.
3. A glove according to claim 1 or 2, wherein:
 - 25 the seams extend along a length of the finger shell in a direction from a base toward a distal end of the finger shell; and the seams have respective ends at approximately an area of the finger shell adapted to correspond to a base of a wearer's fingernail.
4. A glove according to any one of claims 1 to 3, wherein:
 - 30 the first and second tongues are joined together at adjacent edges located on a first side portion of the finger shell; the first and third tongues are joined together at adjacent edges located on a second side portion of the finger shell;

the second and third tongues are joined together at adjacent edges located on the back portion of the finger shell.

5. A glove according to any one of claims 1 to 4, wherein the first, second, and third tongues are independent elements joined together.
6. A glove according to any one of claims 1 to 5, wherein the first tongue is made of leather and the second and third tongues are made of fabric.
- 10 7. A glove according to any one of claims 1 to 6, wherein the first, second, and third tongues are formed unitary from a single material.
8. A glove according to claim 7, wherein the first, second, and third tongues are formed unitary with the junction portion.
- 15 9. A glove according to claim 7 or 8, wherein the first, second, and third tongues are in the shape of a "Y".
10. A glove according to any one of claims 1 to 9, wherein the first, second, and third tongues are made of a waterproof material.
- 20 11. A glove according to any one of claims 1 to 10, wherein at least one of the first, second, and third tongues comprises a laminate of two or more layers.
- 25 12. A glove according to any one of claims 1 to 11, wherein at least one of the first, second, and third tongues comprises a foundation layer and at least one partial overlying layer.
13. A glove according to claim 12, wherein said one partial overlying layer includes an outer exposed edge, said edge not co-extensive with any of said seam portions joining together the first, second, and third tongues.
- 30 14. A glove according to claim 13, wherein said edge is secured to said foundation layer with a stitched seam.
- 35 15. A glove according to claim 14, wherein said stitched seam is sealed with a waterproof strip fastened on an interior surface of said foundation layer.

16. A glove according to any one of claims 1 to 15, further comprising a padding delimiting an inner volume for receiving a user's hand, the padding being fastened to the outer shell and being enclosed inside the outer shell.
- 5 17. A glove according to any one of claims 1 to 16, wherein the waterproof strips are made of fabric covered by an adhesive material.
18. A glove according to any one of claims 1 to 15, wherein the waterproof strips are made of a hot-melt adhesive material.
- 10 19. A glove according to any one of claims 1 to 18, wherein said adjacent tongue edges are joined together by means of stitching, said stitching being covered by said waterproof strips.
- 15 20. A glove according to any one of claims 1 to 19, wherein the folding line of the junction portion is located at a distal end of the finger shell, said distal end thereby having no seam.
21. A glove according to any one of claims 1 to 20, wherein said edges of said 20 tongues extend lengthwise of the finger shell.
22. A glove according to any one of claims 1 to 21, wherein two adjacent finger shells are joined together at a finger crotch by respective C-shaped edges, the glove further comprising a sealing component overlapping adjacent ones of said 25 C-shaped edges and fastened to said C-shaped edges, the sealing component comprising a hot-melt adhesive material.
23. A glove according to claim 22, wherein the C-shaped edges extend from the palm portion below the finger crotch into the back portion of the outer shell above the 30 finger crotch.
24. A glove according to claim 22, wherein the C-shaped edges are located in a plane longitudinal to the hand and perpendicular to the plane of the hand.
- 35 25. A method for manufacturing a glove according to claim 1, said method comprising:

forming the one of said finger shells by joining together said first, second, and third tongues at pairs of said respective edges, the first tongue thus forming the palm portion of the one of the finger shells, the second and third tongues thus forming said back and side portions of the one of the finger shells;

5 fastening the one of the finger shells to palm and back portions of the glove.

26. A method according to claim 25, further comprising fastening waterproof strips overlapping said adjacent edges.

10 27. A glove according to claim 1, wherein:

the respective adjacent edges of the first and second tongues are joined at a first longitudinally extending lateral seam;

the respective adjacent edges of the first and third tongues are joined at a second longitudinally extending lateral seam;

15 each of the first and second lateral seams includes a respective free distal end;

each of the first and second lateral seams extends in a direction toward the distal end of the finger shell and terminates at a respective free distal end of the first and second lateral seams.

20 28. A glove according to claim 27, wherein the free distal end of each of the first and second lateral seams is spaced at least 10 millimeters from the distal end of the finger shell when the glove is worn.

25 29. A glove according to claim 27, wherein each of the first and second lateral seams is a stitched seam.

30 30. A glove according to claim 1, wherein each of the respective seams of the adjacent pairs of edges of the first, second, and third tongues comprises stitching.

31. A glove according to claim 1, wherein:

the seams extend longitudinally of the finger shell in a direction from a base toward a distal end of the finger shell; and

the seams are adapted not to extend over an area of the finger shell adapted to correspond to a wearer's fingernail from a base of the fingernail to a free end of the fingernail.

5 32. A glove according to claim 1, wherein:

the respective seams consist of the following:

a single backside seam formed by a pair of adjacent edges of respective ones of the second and third tongues being joined together;

10 a first lateral seam formed by a pair of adjacent edges of respective ones of the first and second tongues being joined together;

a second lateral seam formed by a pair of adjacent edges of respective ones of the first and third tongues being joined together;

15 none of the respective seams intersects with another of the respective seams, and none of the respective seams is continuous with another of the respective seams.

33. A glove according to claim 1, wherein the respective seams consist of the following:



20 a single backside seam formed by a pair of adjacent edges of respective ones of the second and third tongues being joined together;



a first lateral seam formed by a pair of adjacent edges of respective ones of the first and second tongues being joined together;




25 a second lateral seam formed by a pair of adjacent edges of respective ones of the first and third tongues being joined together;

none of the respective seams intersects with another of the respective seams, and none of the respective seams is continuous with another of the respective seams;

30 each of the first and second lateral seams being located height-wise intermediate a top of the finger shell at the back portion and a bottom of the finger shell at the palm portion.

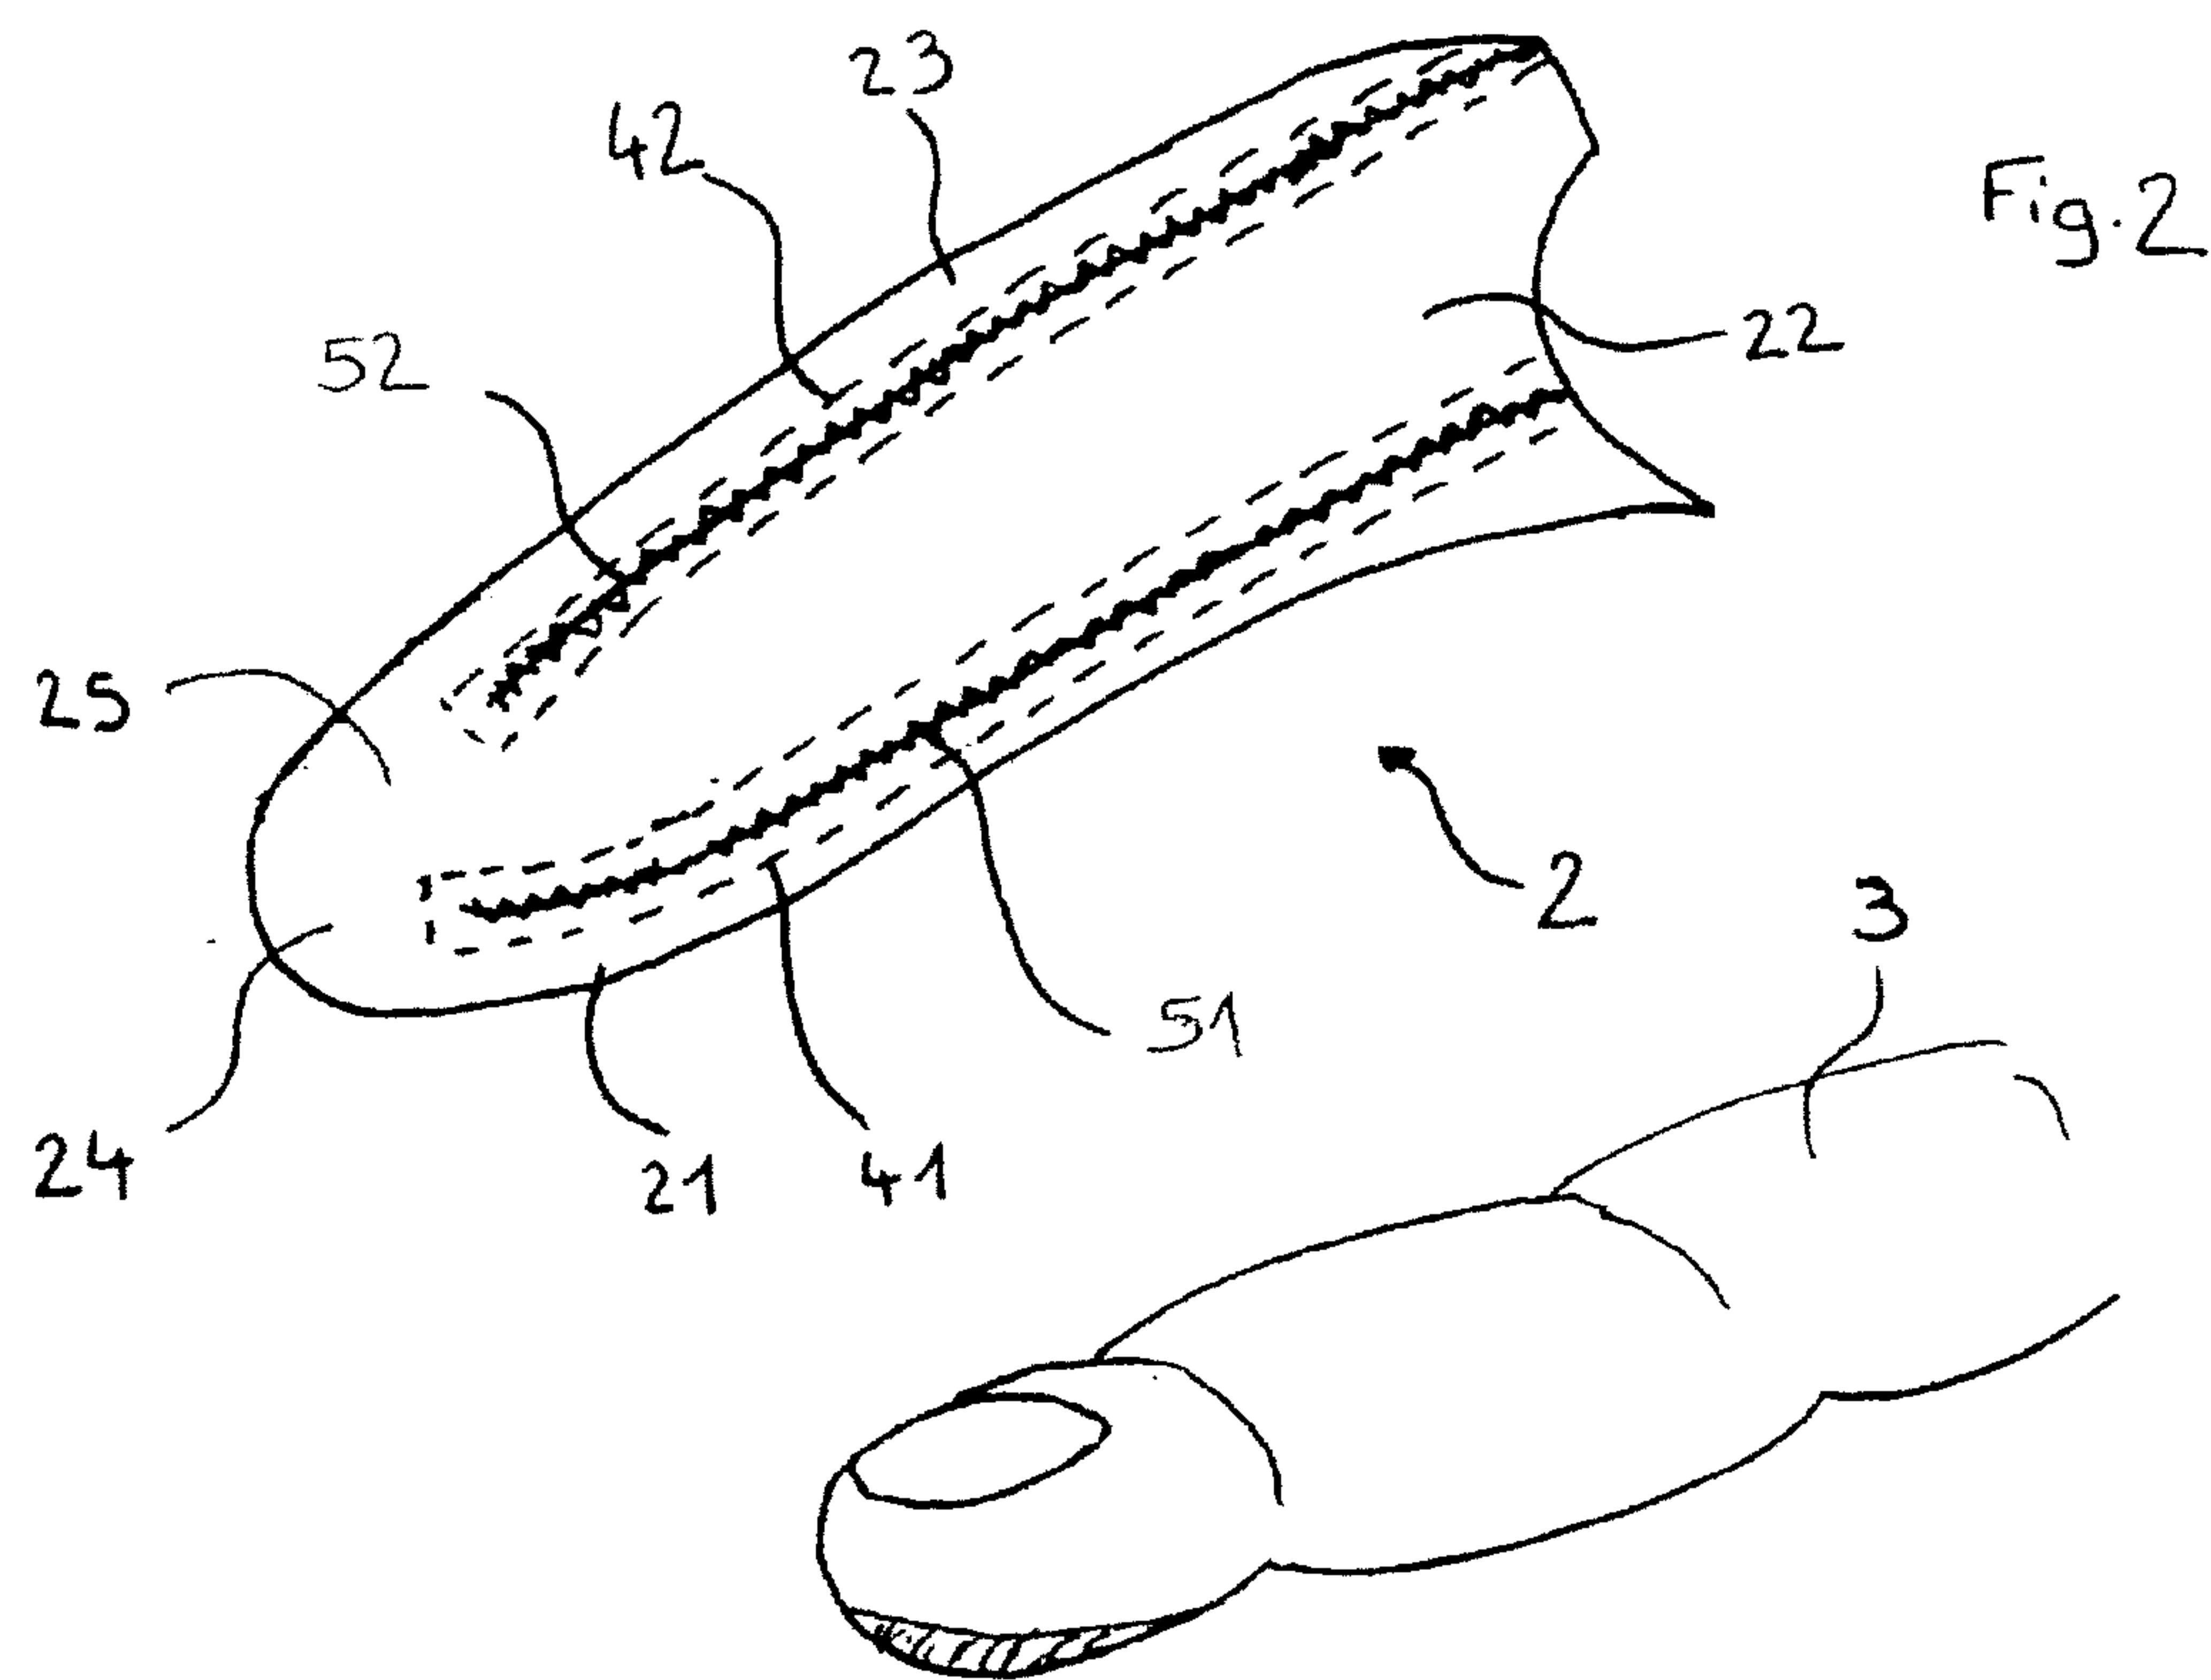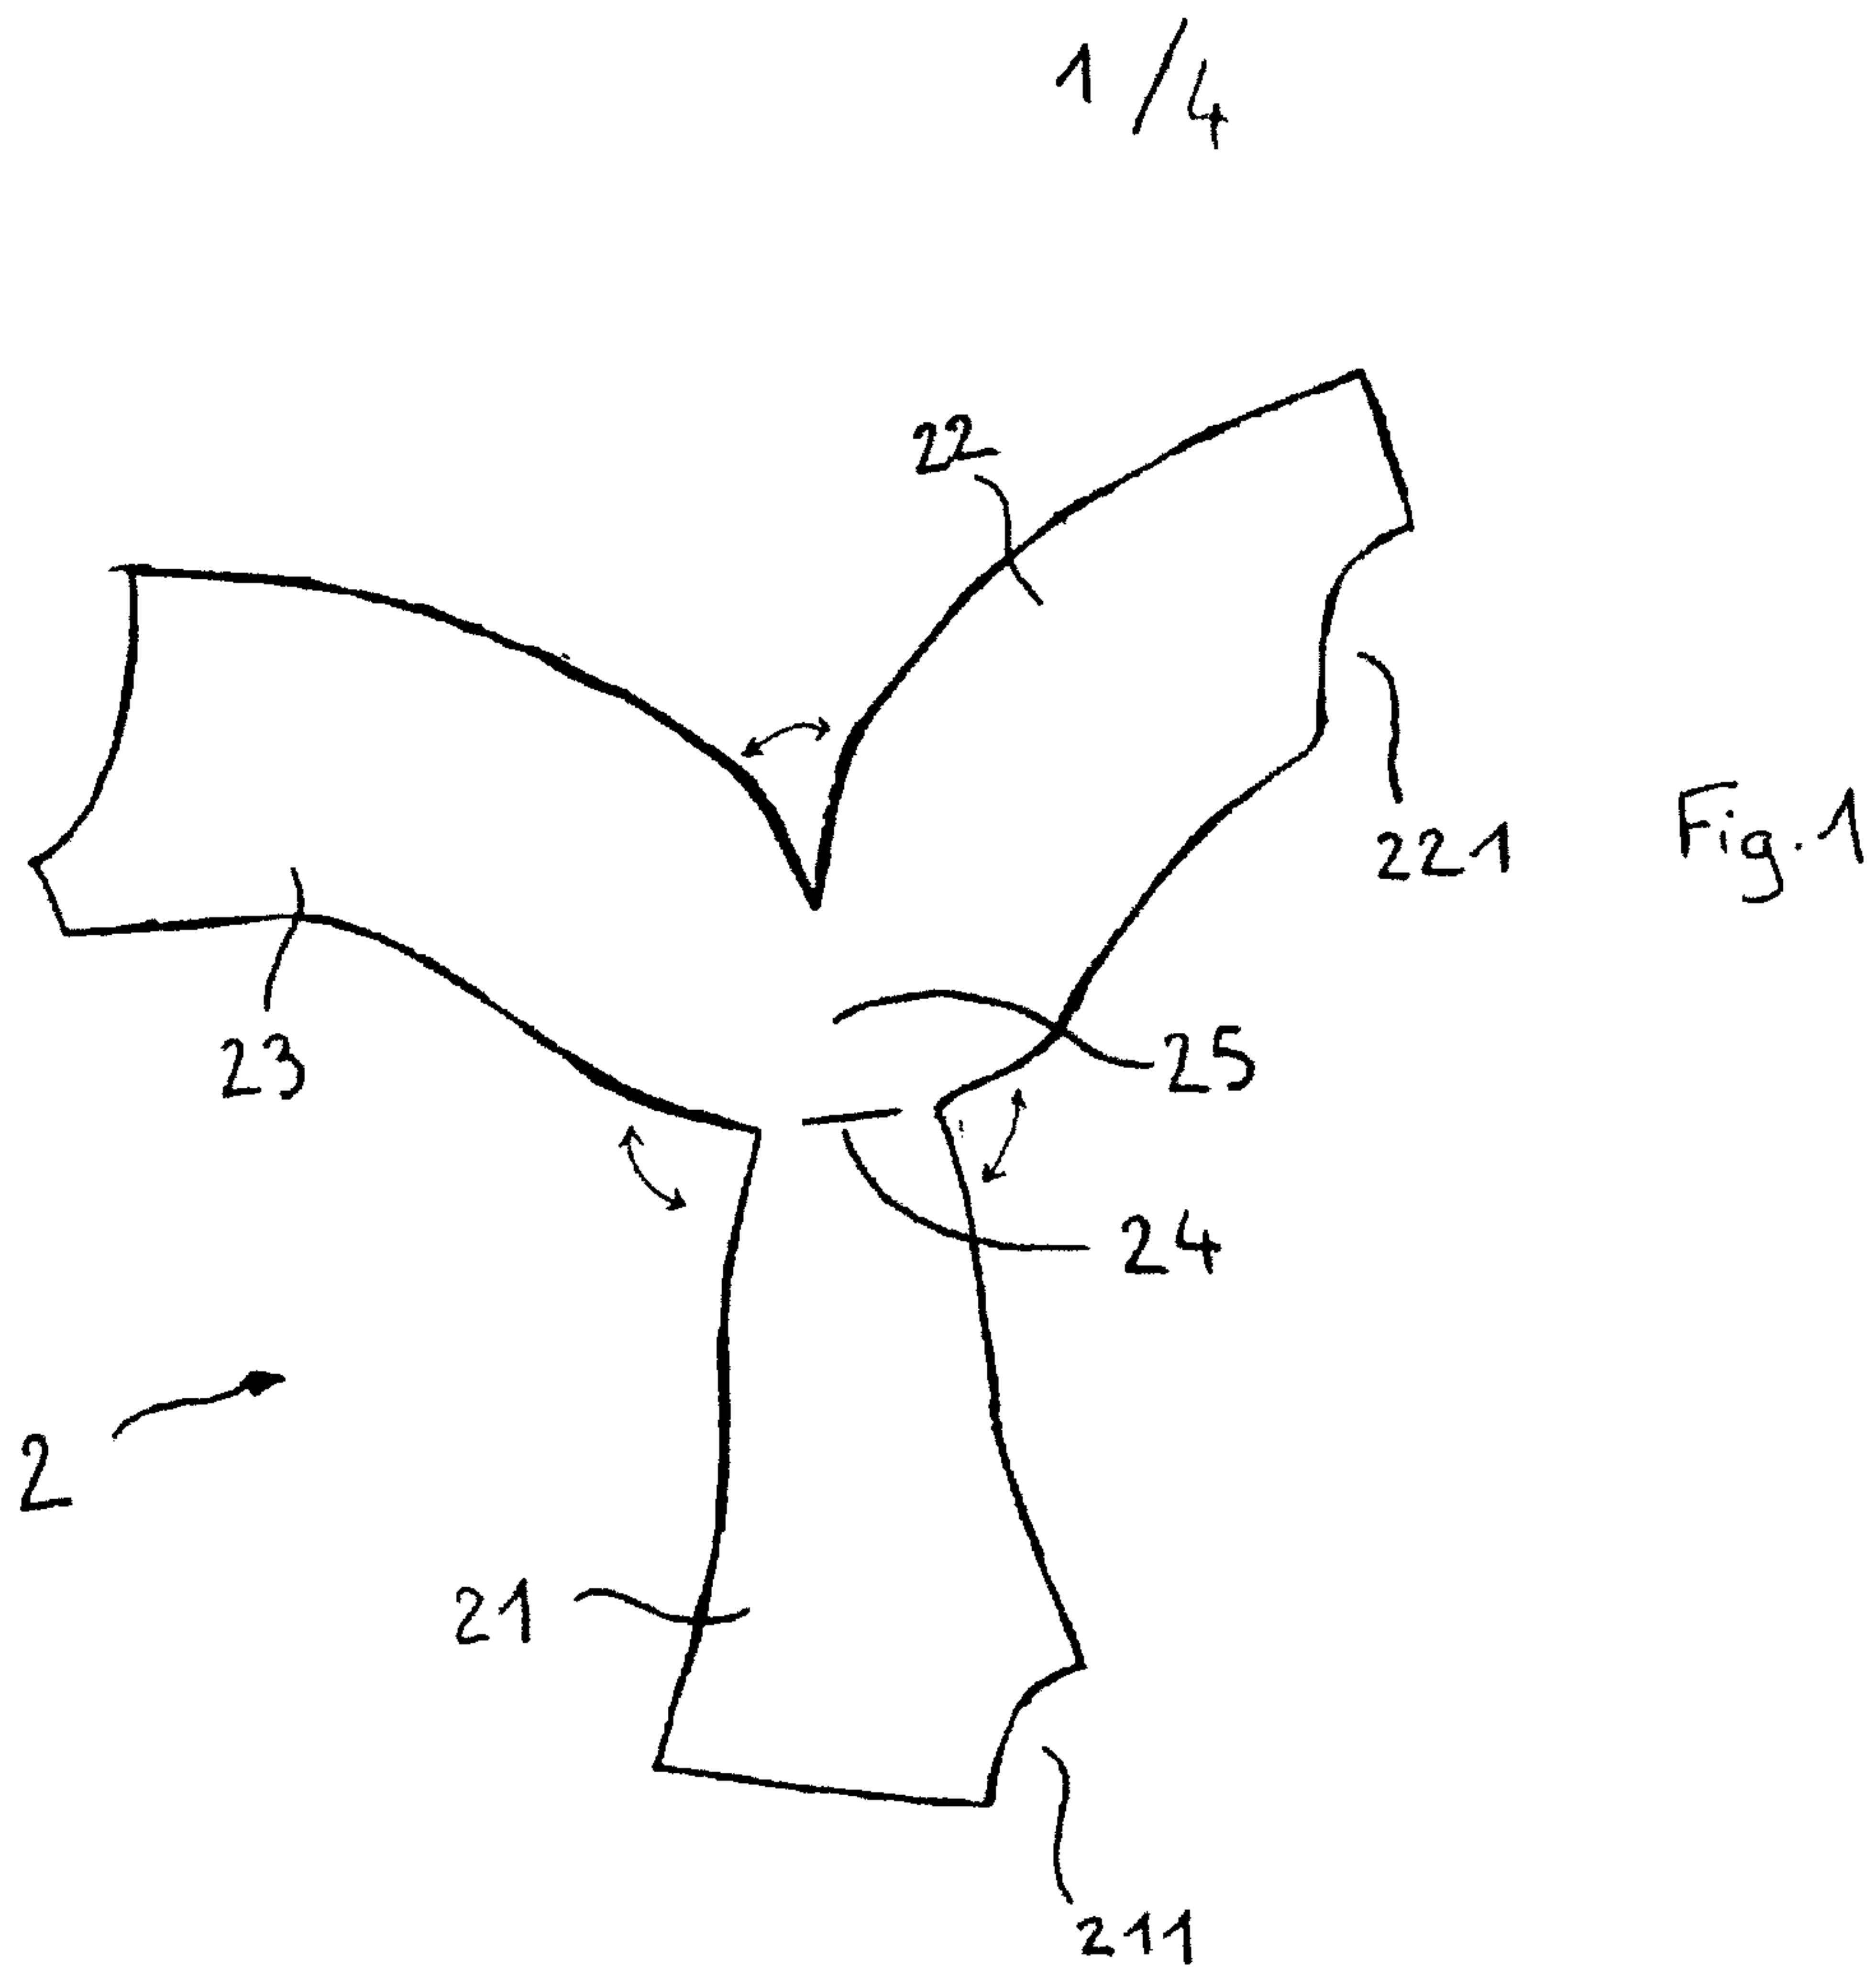

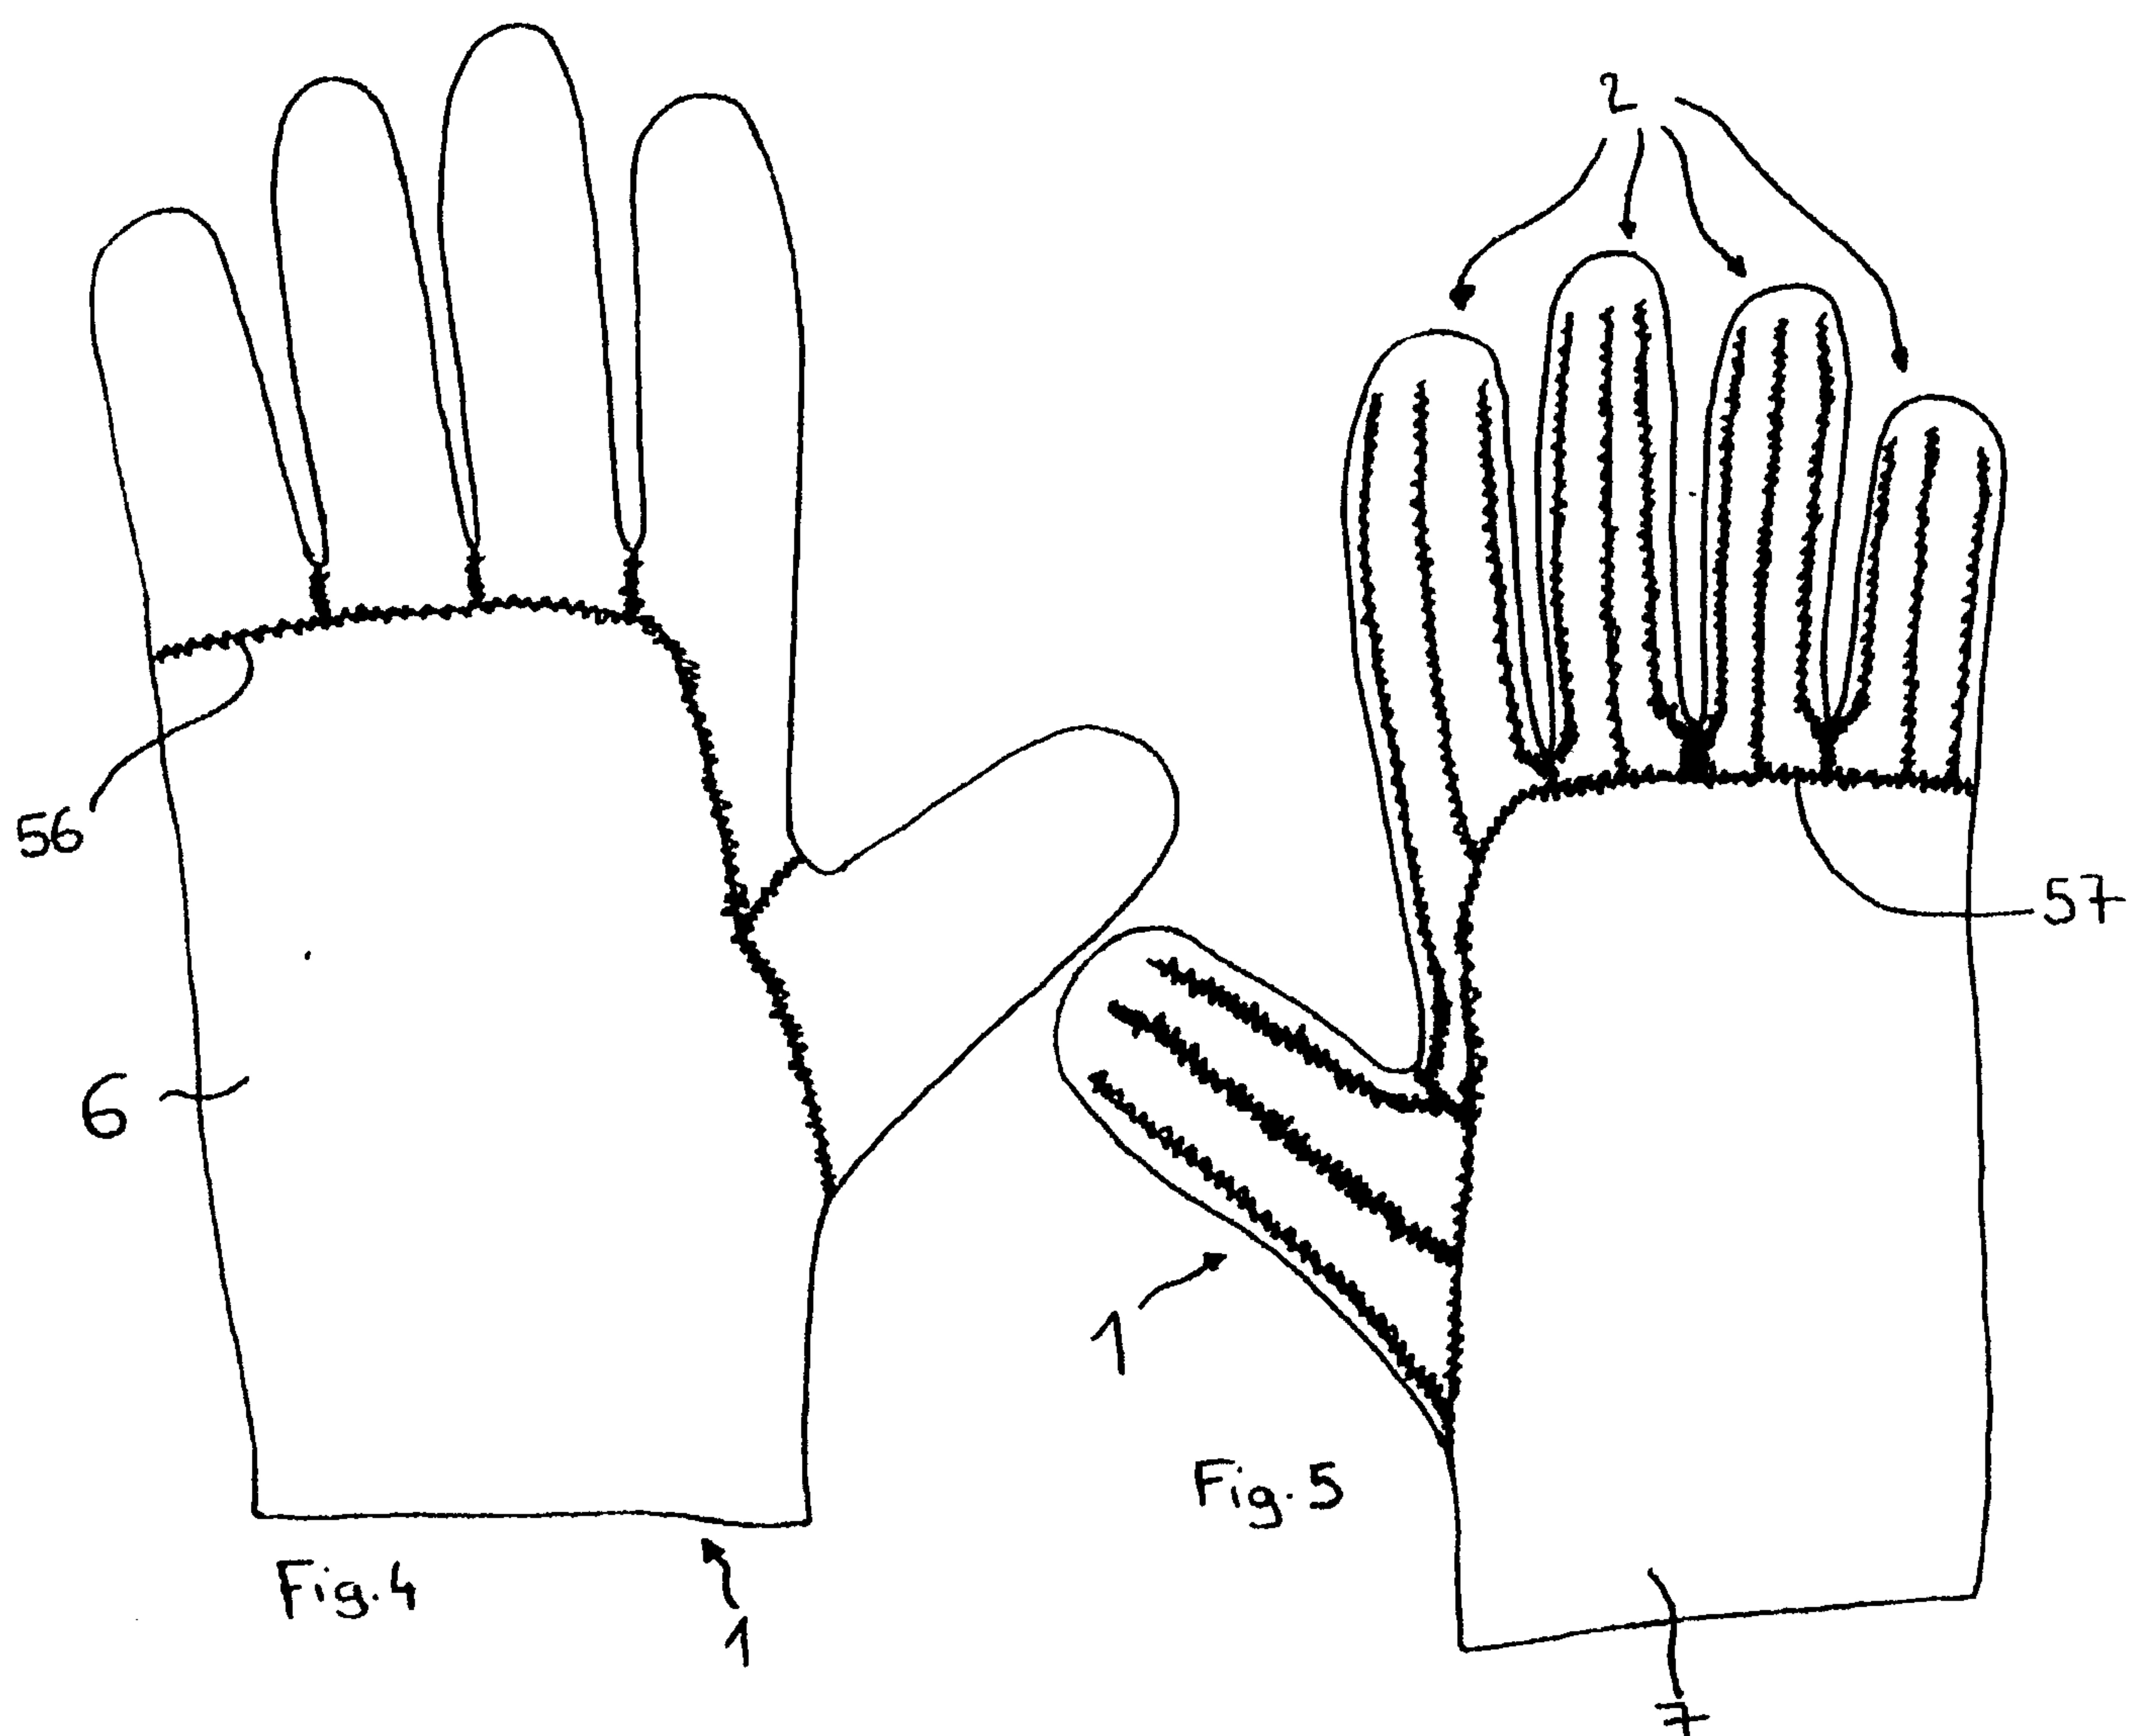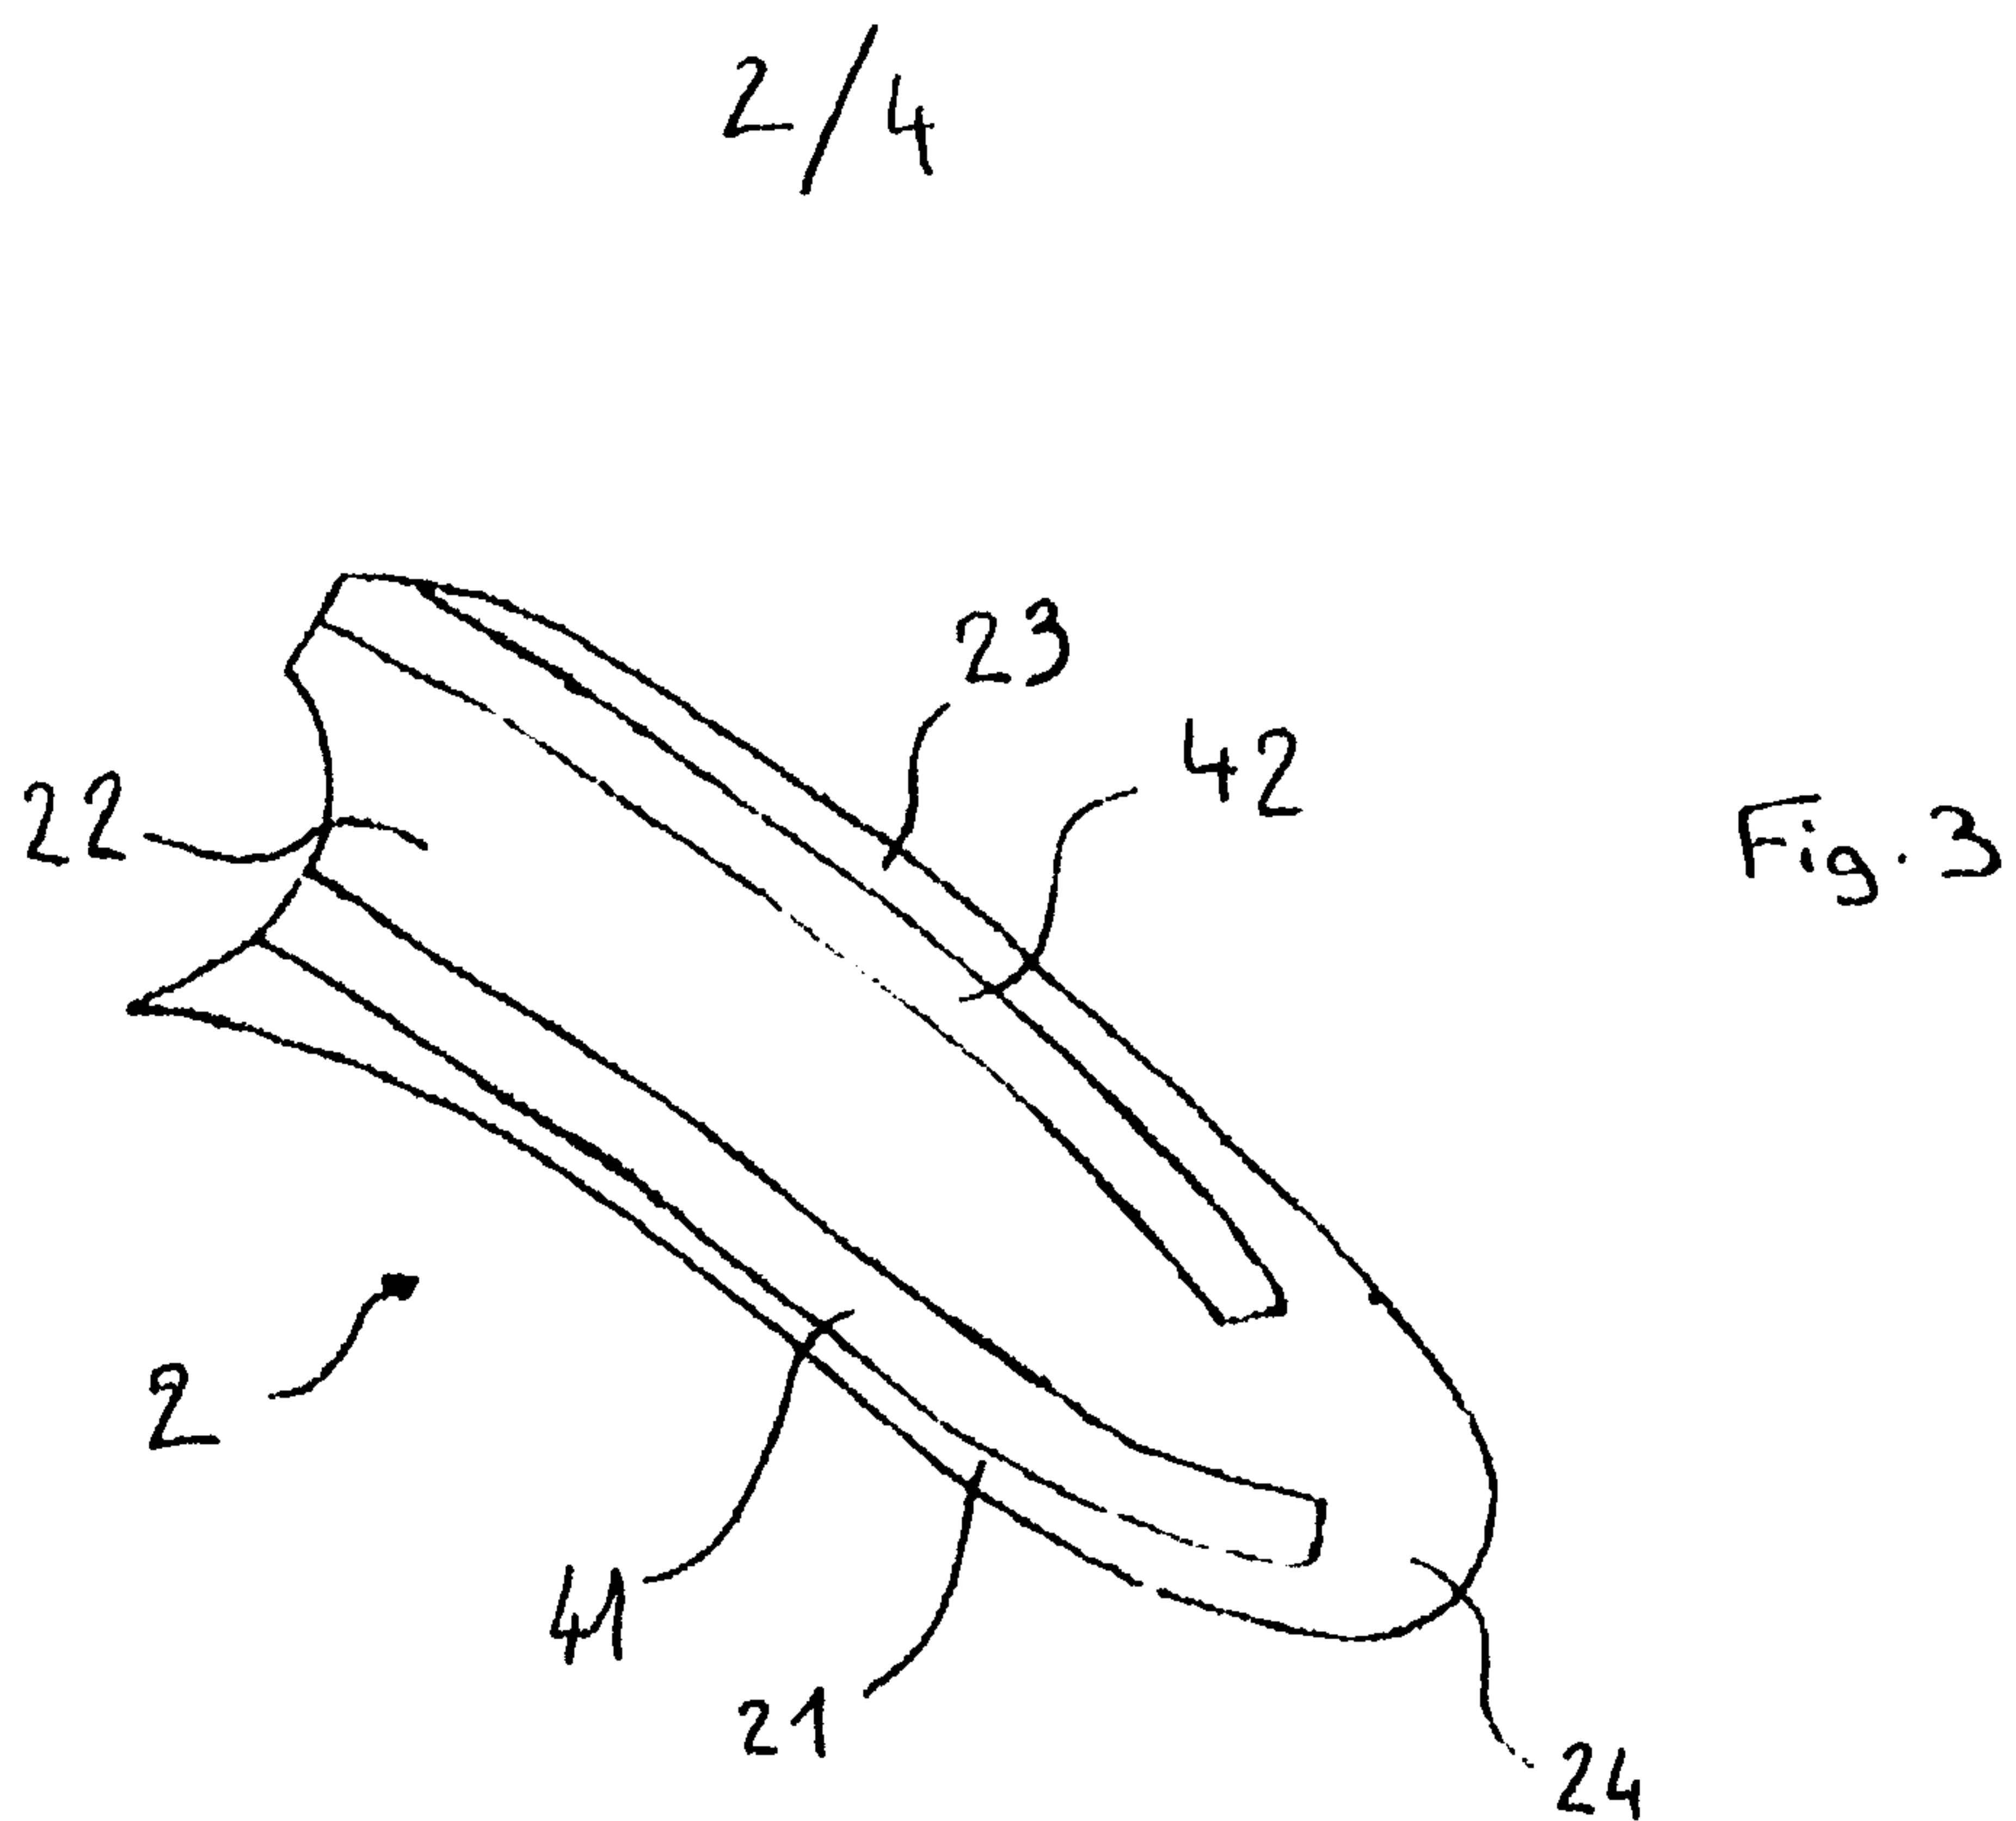

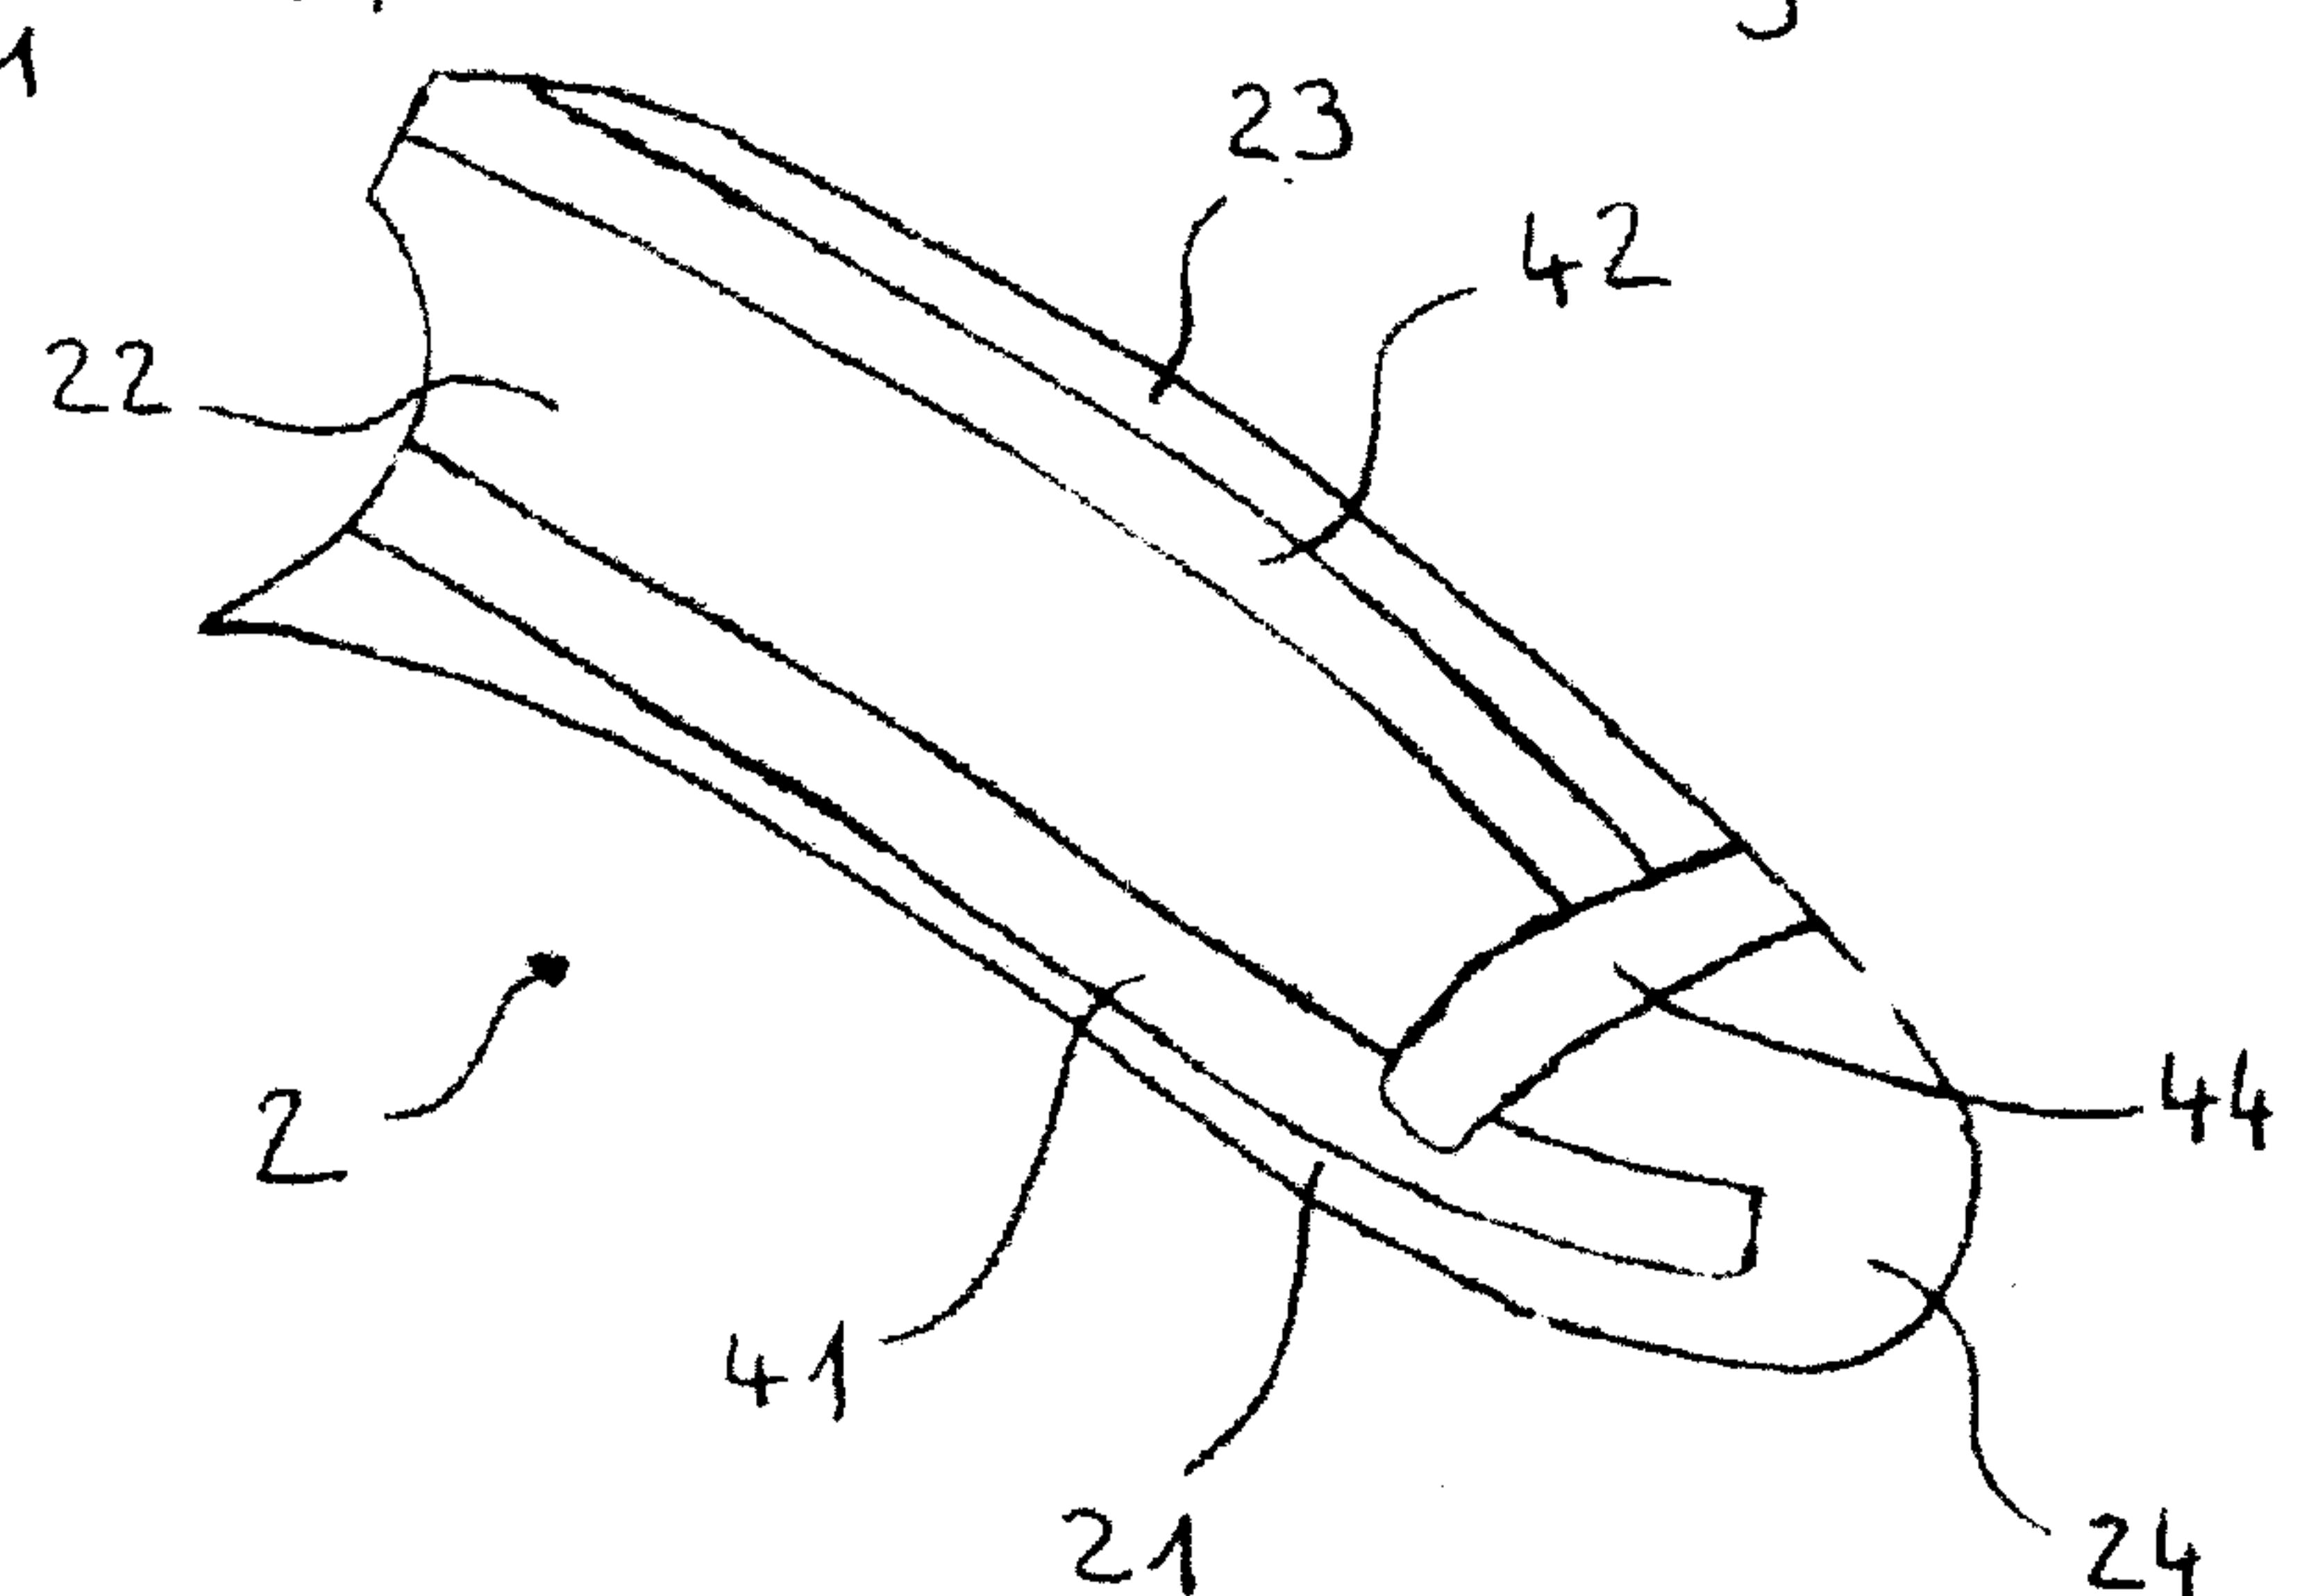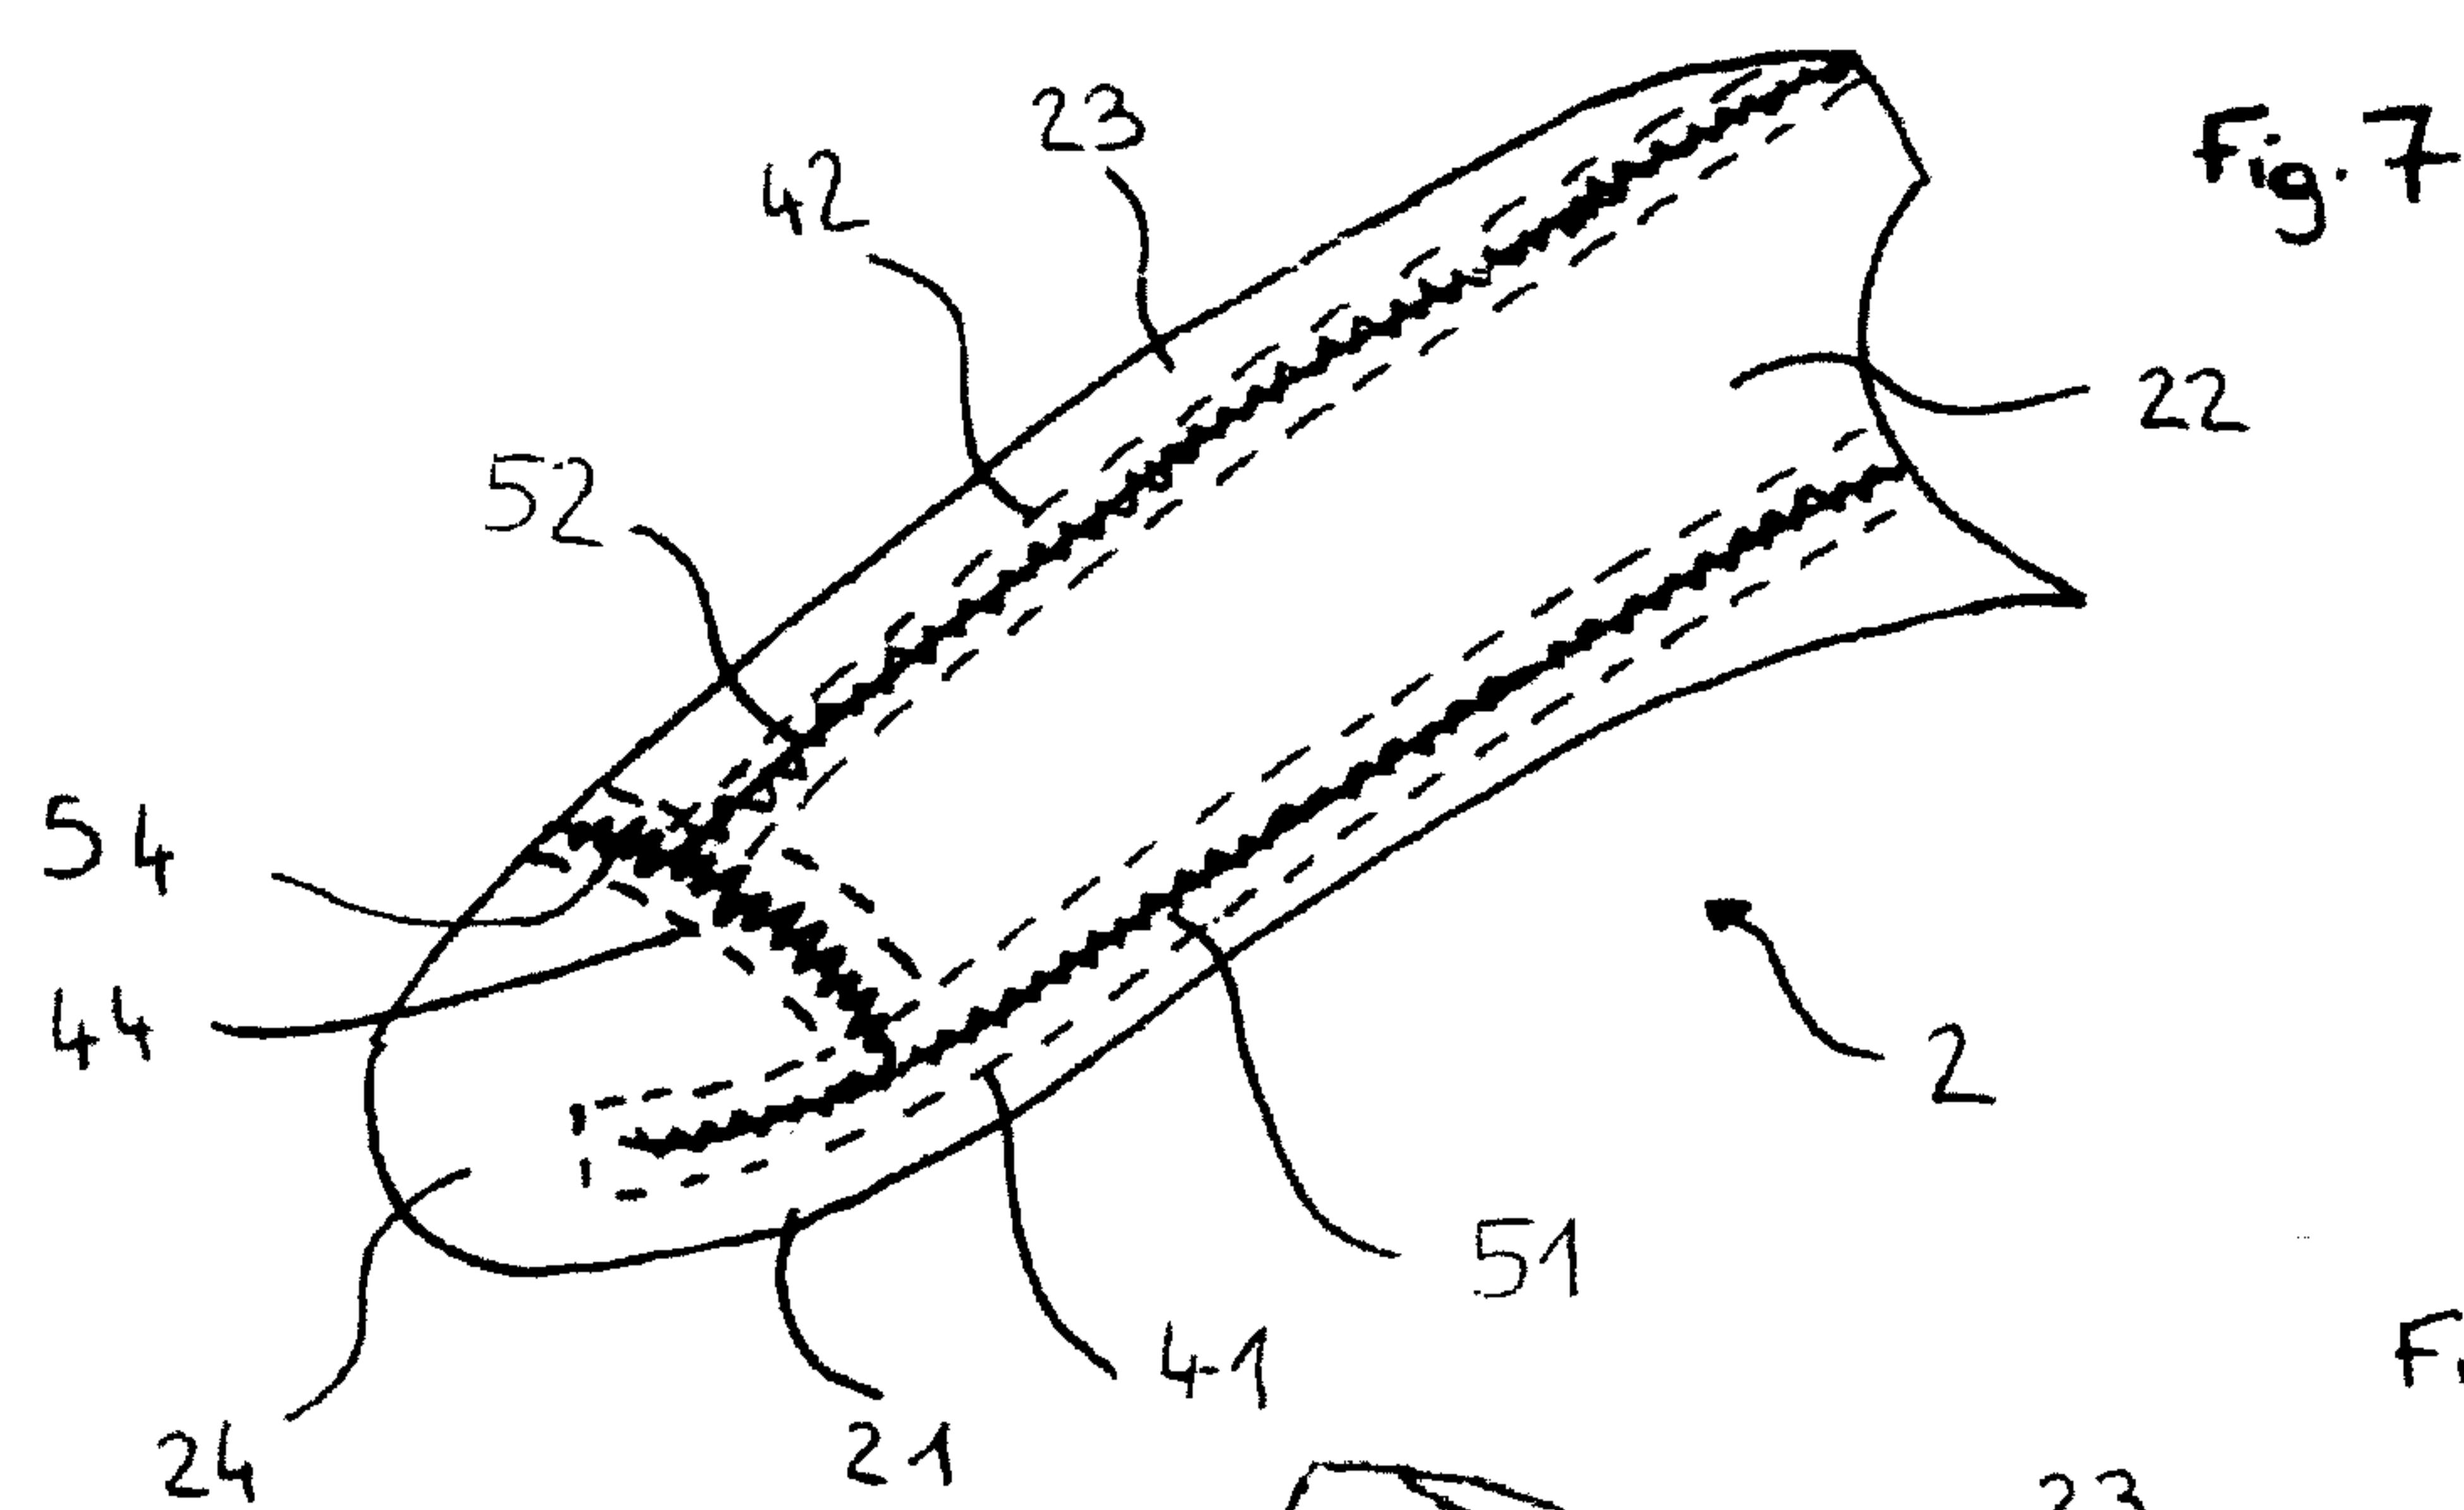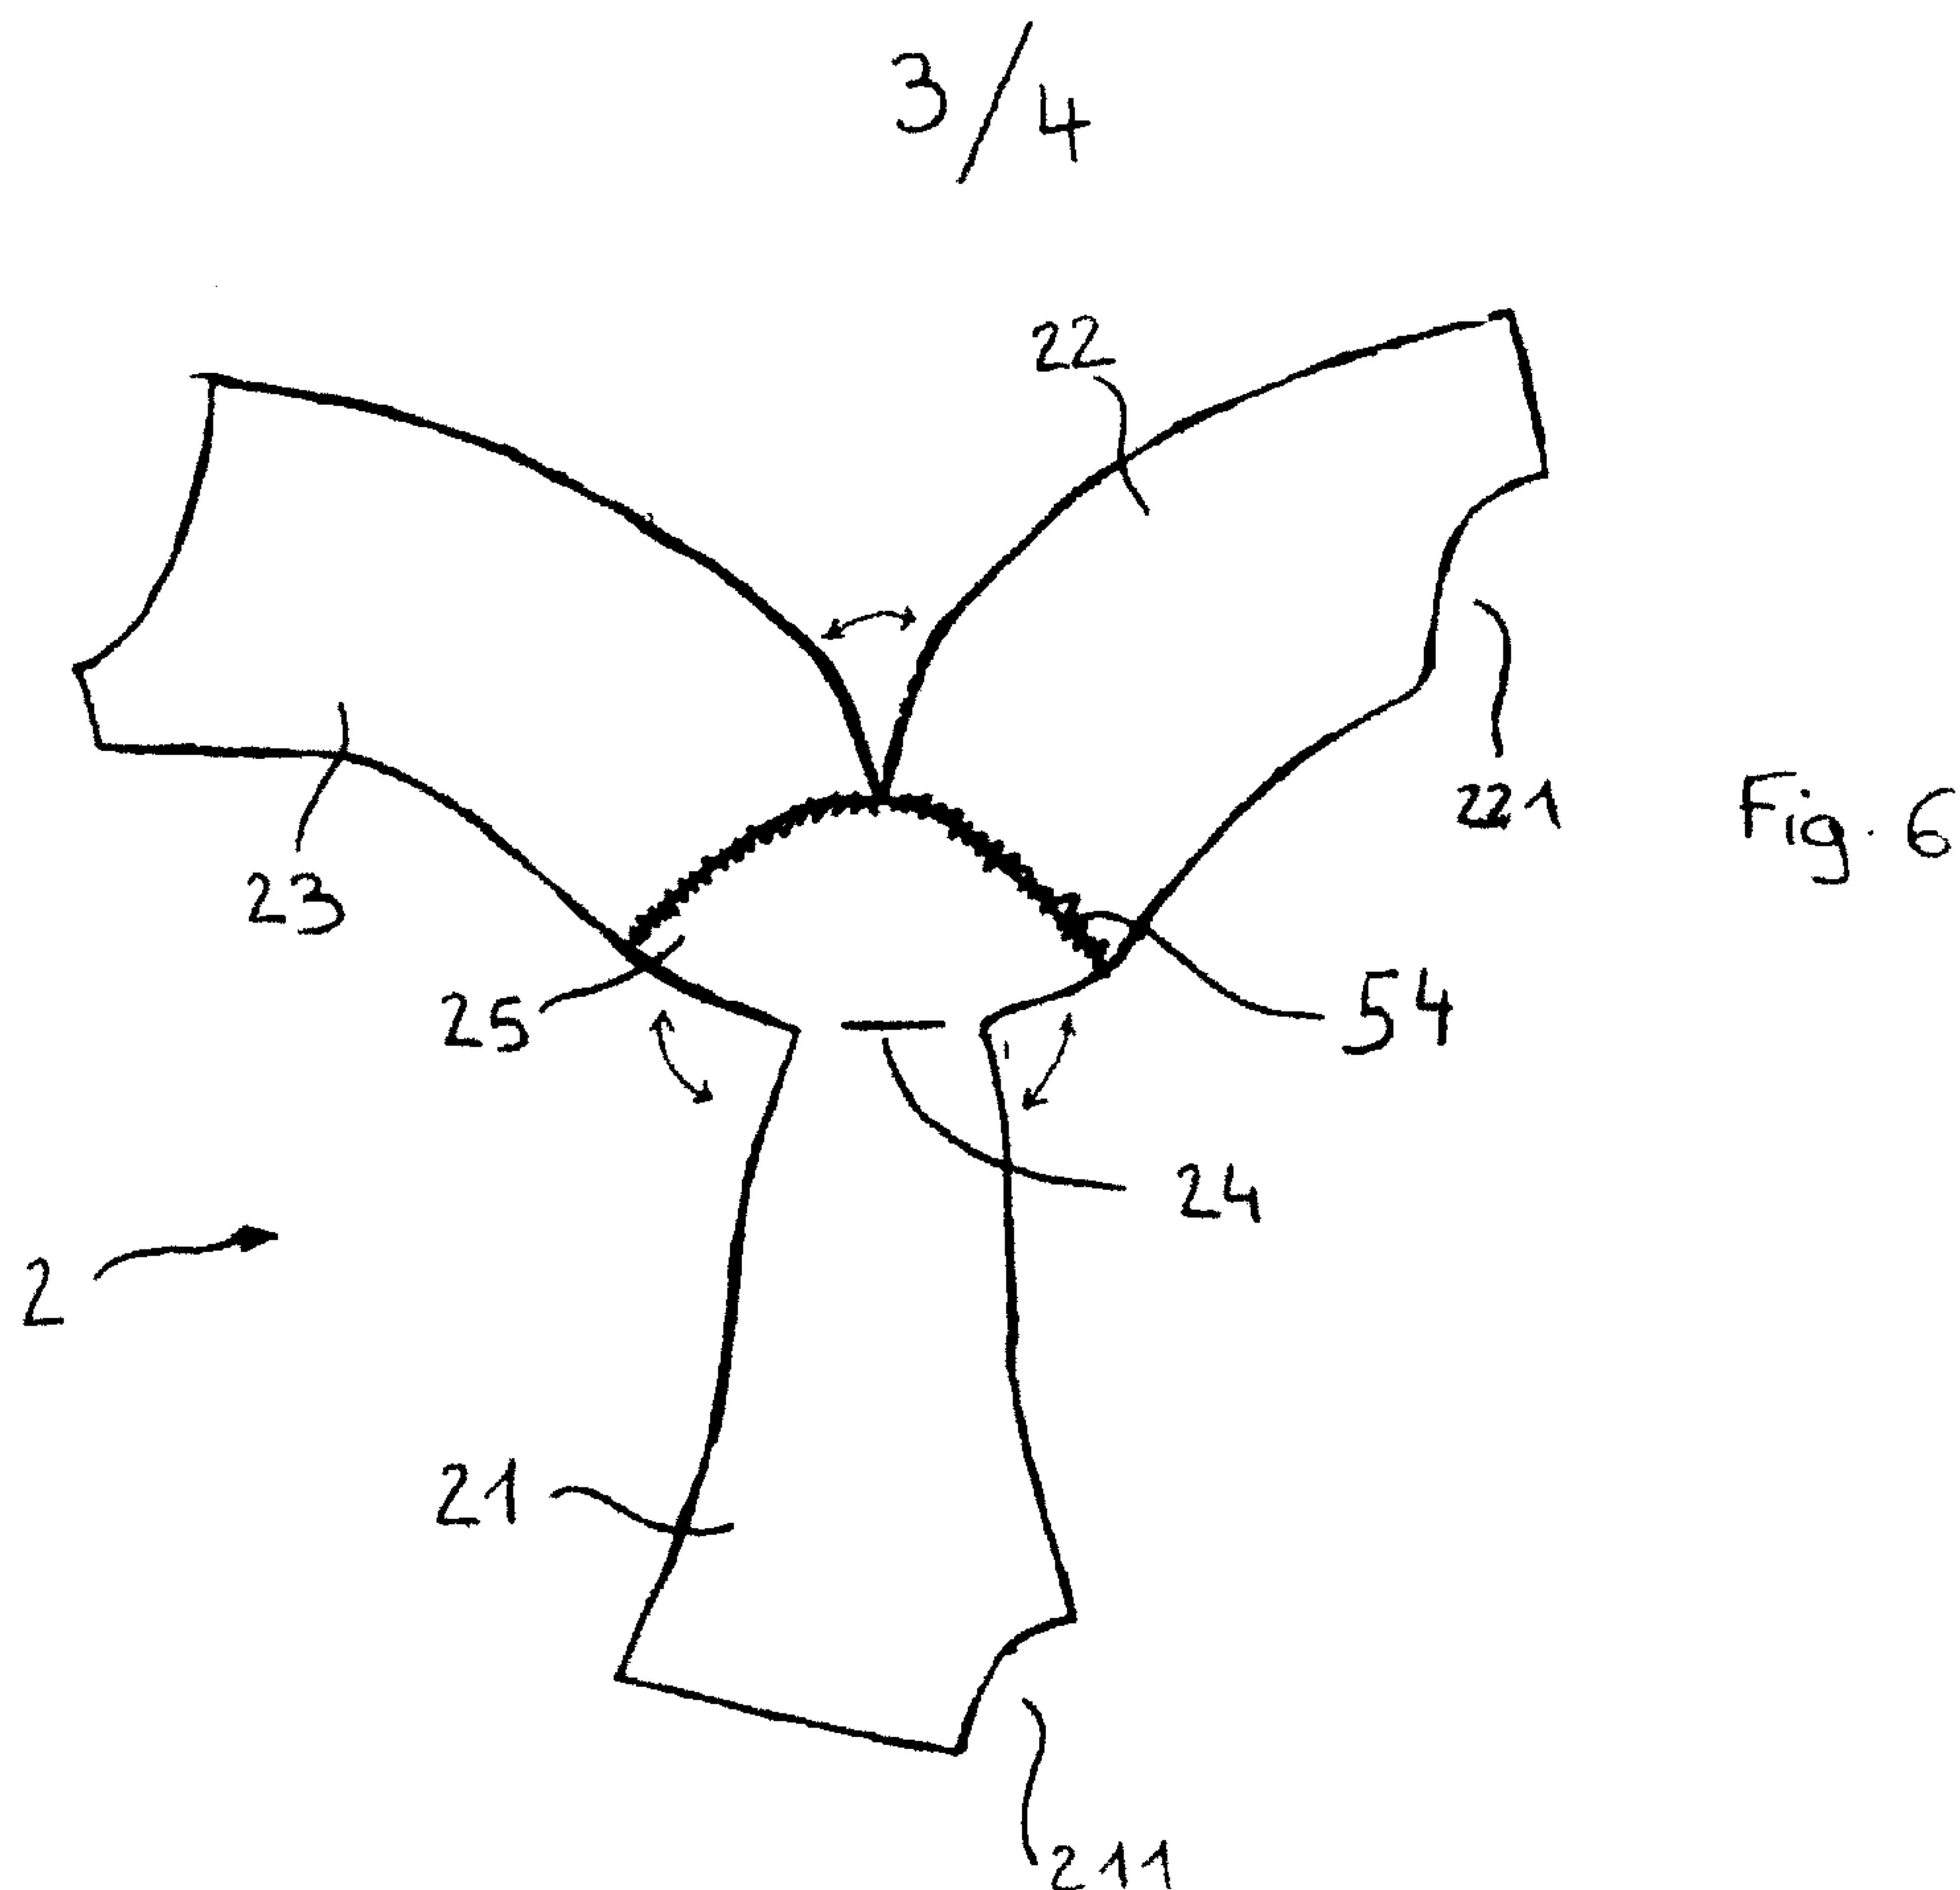

4/4

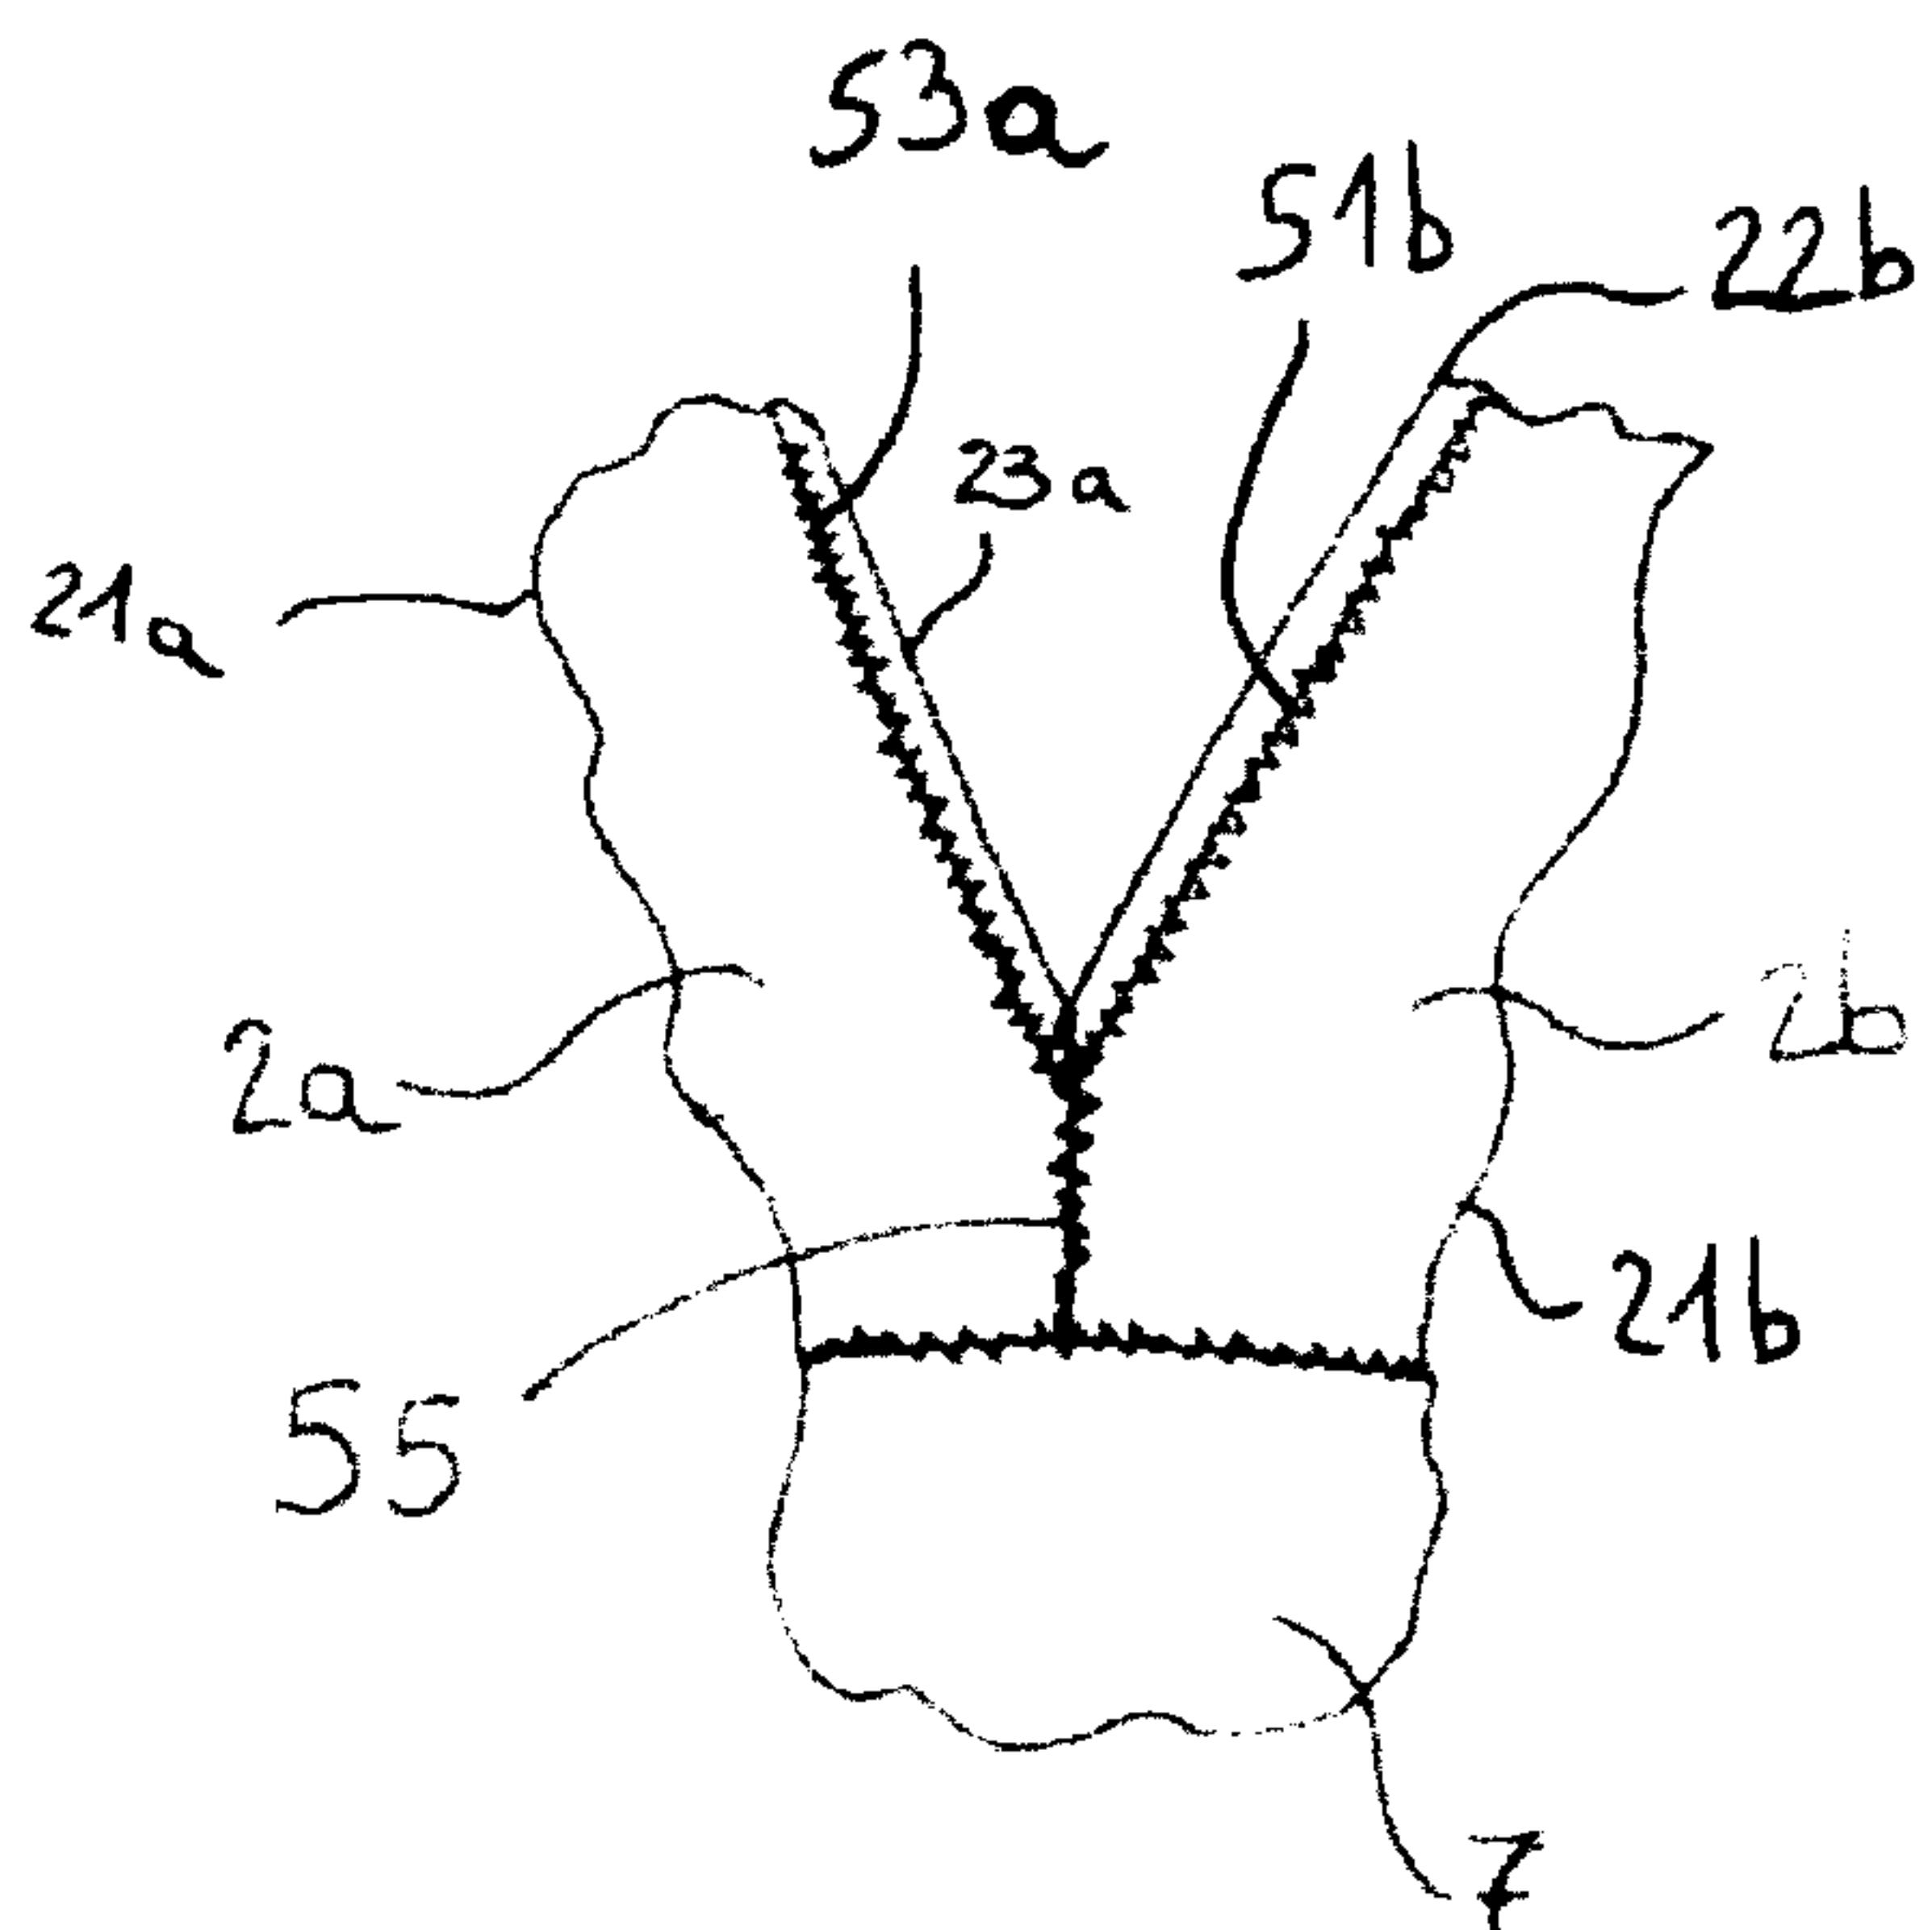


Fig. 9

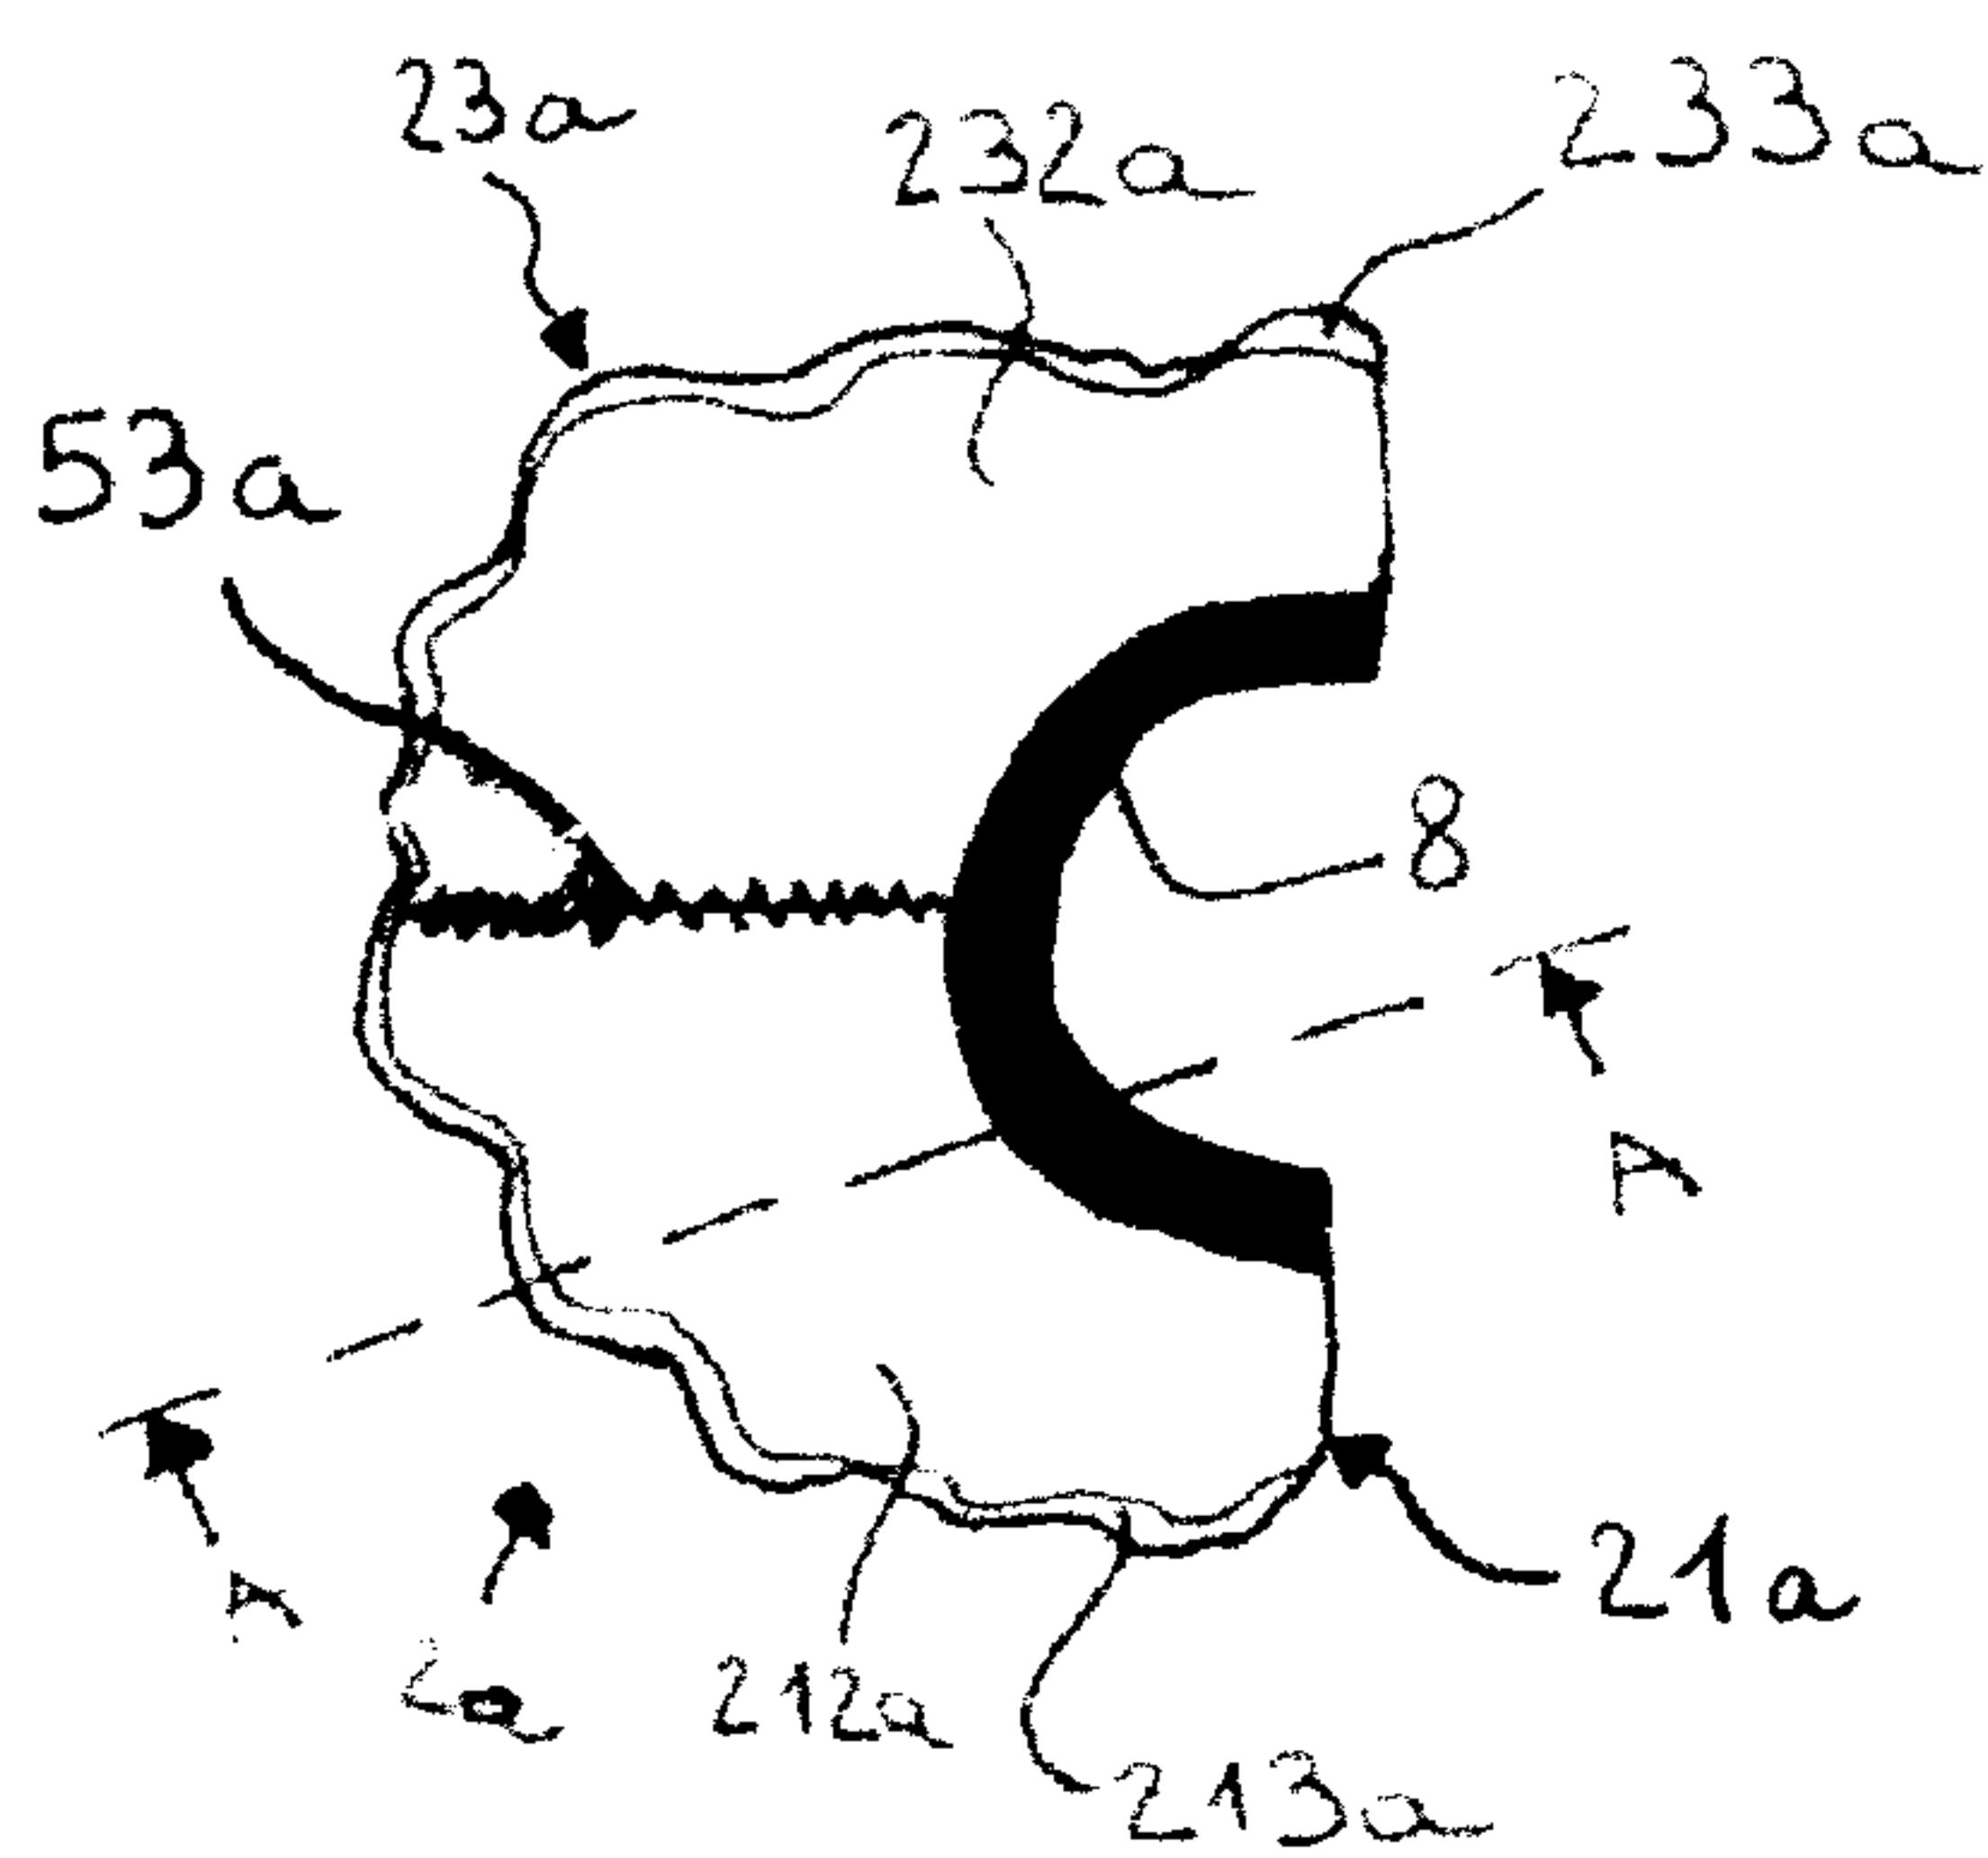


Fig. 10

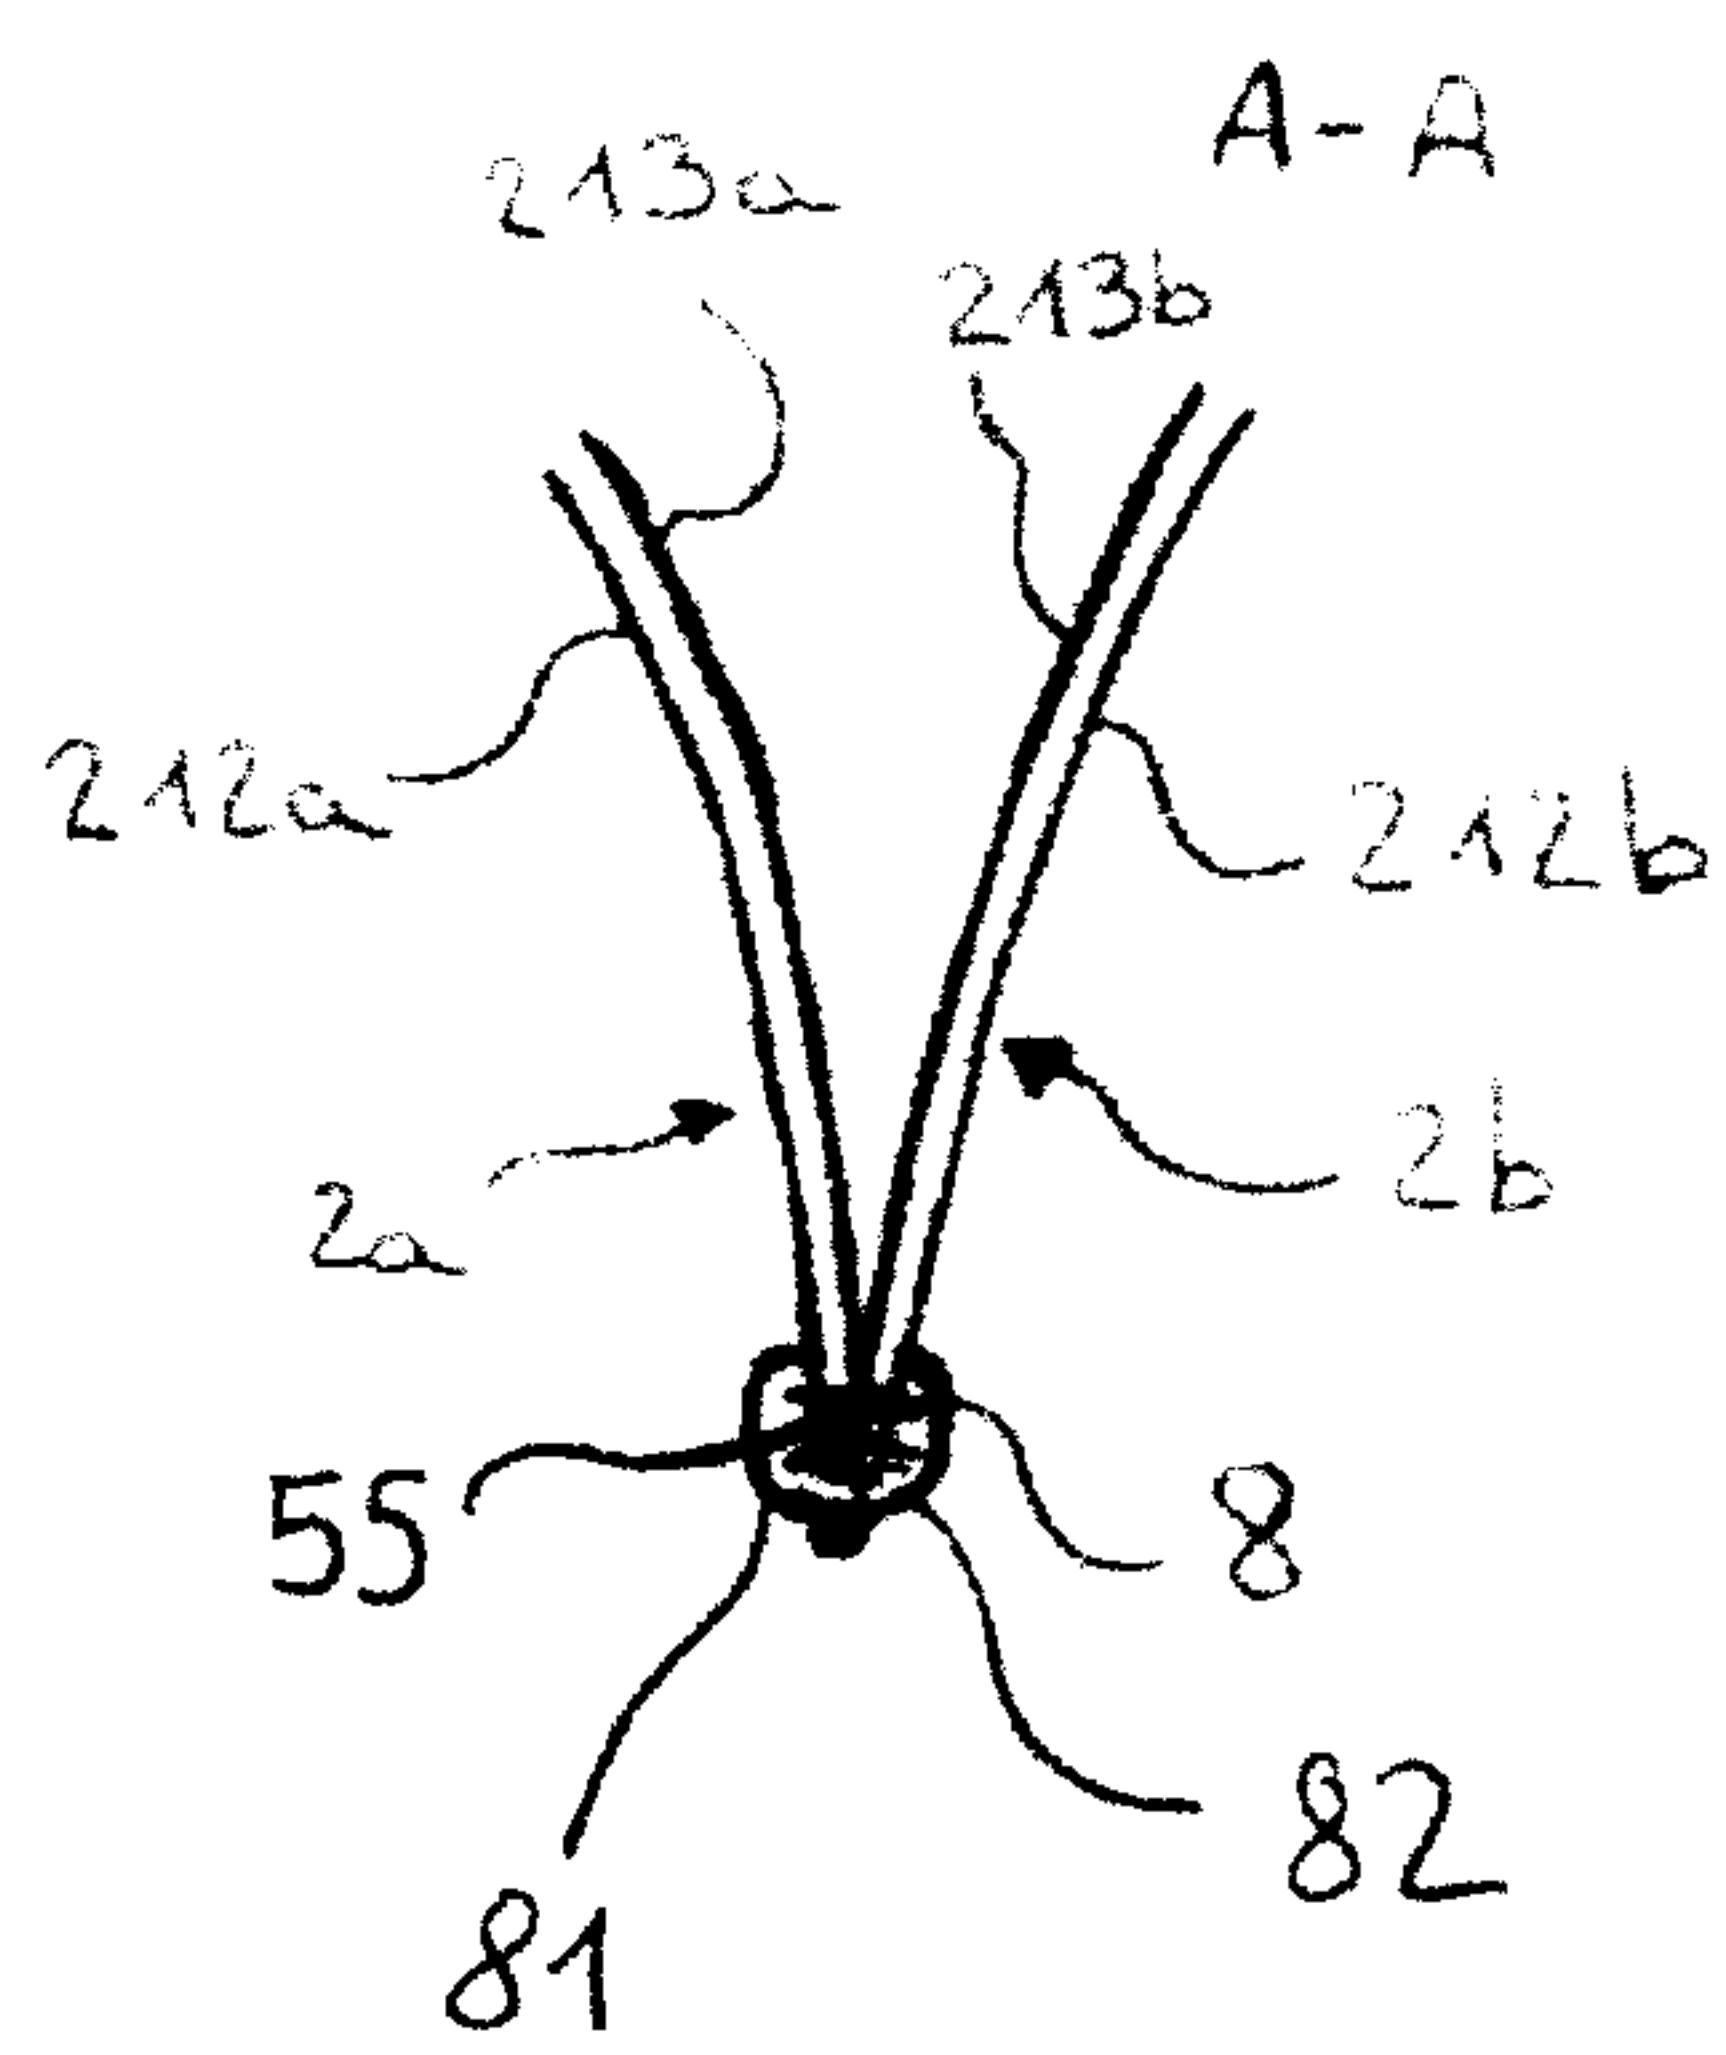


Fig. 11

