



(51) International Patent Classification:
A41D 13/11 (2006.01)

(21) International Application Number:
PCT/US2015/063605

(22) International Filing Date:
3 December 2015 (03.12.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1421615.4 4 December 2014 (04.12.2014) GB

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: HENDERSON, Christopher P.; 3M Centre, Cain Road, Bracknell Berkshire RG12 8HT (GB). ABDULQADER, Reyad A.; 3M Centre, Cain Road, Bracknell Berkshire RG12 8HT (GB). MCGLASSON, Stuart A.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). MAY, James J.; 19 Church Street, Warwick Warwickshire CV34 4AB (GB). FERNANDES, Mark A. J.; 19 Church Street, Warwick Warwickshire CV34 4AB (GB). BOYCE, David N.; 19 Church Street, Warwick Warwickshire CV34 4AB (GB).

BAXTER, Elliott J.; 19 Church Street, Warwick Warwickshire CV34 4AB (GB).


(74) Agents: GOVER, Melanie G. et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RESPIRATOR NOSEPIECE

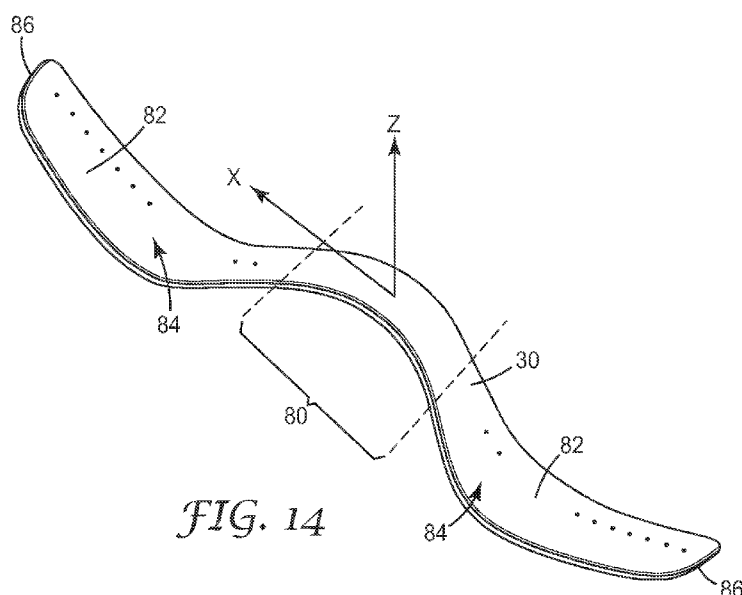

(57) Abstract: A personal respiratory protection device comprising an upper panel (18), a central panel (16), and a lower panel (20), the central panel (16) being separated from each of the upper and lower panels (18) by a first and second fold (36), seam, weld (76) or bond, respectively, such that device is capable of being folded flat for storage along the first and second fold (36), seam, weld (76) or bond and opened to form a cup-shaped air chamber over the nose and mouth of the wearer when in use, wherein the upper panel (18) has a nose conforming element for conforming at least part of the upper panel (18) to the nose of a wearer when in use, the nose conforming element having a resiliently flexible central portion (80) and first and second rigid outer portions (82) extending outwardly from the central portion (80), the central portion (80) deforming upon donning of the respirator (10) so that the central and outer portions (80, 82) conform to the profile of the nose.





Published:

— *with international search report (Art. 21(3))*

RESPIRATOR NOSEPIECE**Field**

The present invention relates to personal respiratory protection devices, known as respirators or face masks, which are capable of being folded flat during storage and forming a cup-shaped air chamber over the mouth and nose of a wearer during use.

Background

Filtration respirators or face masks are used in a wide variety of applications when it is desired to protect a human's respiratory system from particles suspended in the air or from unpleasant or noxious gases. Generally such respirators or face masks may come in a number of forms, but the two most common are a molded cup-shaped form or a flat-folded form. The flat-folded form has advantages in that it can be carried in a wearer's pocket until needed and re-folded flat to keep the inside clean between wearings.

Such respiratory devices include, for example, respirators, surgical masks, clean room masks, face shields, dust masks, breath warming masks, and a variety of other face coverings.

Flat-fold respirators are typically formed from a sheet filter media which removes the suspended particles from the air prior to inhalation by the user. Performance of the respirator is therefore reliant on minimizing the flow of air that bypasses the filter medium prior to inhalation. It is recognized that the primary route for bypass air is between the respirator and the face of the user. It is therefore imperative to provide a close fit between the respirator and the face in order to minimize the bypass airflow. This is particularly challenging in the region of the nose of the user given the protrusion of the nose from the face and the ergonomic variations in the size and shape of the nose of different users.

It is known to provide a respirator with a nose clip, commonly in the form of a deformable metal strip, which is deformed by the user during donning of the respirator. The purpose of the clip is to improve the fit of the respirator by more closely matching the nose portion of the respirator to the profile of the face. The integrity of the seal between the respirator and the nose is therefore reliant on the user correctly deforming the clip to the shape of the nose.

The nose clip may need to be adjusted in the event that the respirator moves from its original position or during refitting. Furthermore the respirator function may be impaired or the nose clip may become uncomfortable if incorrectly deformed upon donning or in the event that the respirator moves position during use. Dependent on the nature of the nose clip

material, it may work harden during repeated fitting causing further issues with the forming process.

It is an object of the present invention to at least mitigate the above problems by providing a respirator having improved sealing engagement with the wearer's face and/or improved comfort for the wearer.

Summary

Accordingly, the invention provides a personal respiratory protection device comprising: an upper panel, a central panel, and a lower panel,

the central panel being separated from each of the upper and lower panels by a first and second fold, seam, weld or bond, respectively, such that device is capable of being folded flat for storage along the first and second fold, seam, weld or bond and opened to form a cup-shaped air chamber over the nose and mouth of the wearer when in use,

wherein the upper panel has a nose conforming element for conforming at least part of the upper panel to the nose of a wearer when in use,

the nose conforming element having a flexible central portion and first and second rigid outer portions extending outwardly from the central portion,

the central portion deforming upon donning of the respirator so that the central and outer portions conform to the profile of the nose.

Advantageously, the provision of a nose conforming element having a flexible central portion and first and second rigid outer portions means that the element automatically conforms to the nose during donning. The requirement for the user of the respirator to shape the nose clip of the prior art is eliminated. The flexibility of central portion allows the element to automatically conform to the bridge (dorsal nasal segment) of the nose during donning, that is to say going from a flat form to a cup-like structure. Meanwhile the rigid outer portions automatically conform to the sides (lateral nasal-wall segments) of the nose. This construction provides an improvement over the prior art in that no adjustment of the element is required independently of the donning process. A further advantage is that the degree of compliancy of the element provided by the flexible central portion delivers improved comfort to the user whilst still providing sufficient resilience to ensure a good fit to the face. Also, the resilience is repeatable and not subject to the work hardening evident in the prior art respirators.

Preferably, the central portion of the nose conforming element is substantially flat when the device is folded flat.

Advantageously, this feature allows the respirator to be stored in the flat folded condition prior to the donning of the mask. Furthermore, the flat construction for allows the central portion to be flexible as the stiffness of the flat section is insufficient to prevent deformation during donning.

5 Preferably, the central portion has a width of between 55 and 25 mm, and most preferably 20 mm.

 Preferably, the outer portions of the nose conforming element are concave.

 Advantageously, this feature allows the outer portions to conform to the lateral nasal-wall segments of the nose and the conjoining of the nose and the cheek of the wearer.
10 Furthermore, the concave construction imparts rigidity to the outer portions. By providing rigidity by use of a concave construction (rather than the use of a stiff material, for example) allows the central portion and the outer portions to be formed from the same material, thereby improving the ease of manufacture of the element.

 Preferably, the outer concave portions each form a wing having an outwardly
15 extending major axis and upwardly extending minor axis.

 Preferably, the wings are curved in both the major and minor axes to form a concave elliptical bowl.

 Advantageously, the provision of the curve in the upwardly extending minor axis allows the point of contact of the element and the face to vary from user to user. This is in
20 distinction to the prior art nose clips which are formed of a flat strip of metal which can only provide a single position for the point of contact of the clip with face.

 Preferably, each elliptical bowl has a nadir positioned approximately equidistant between a centerline of the nose conforming element and an outer edge of the wings, the nadir being positioned preferably between 15 and 35 mm from the centerline of the nose
25 conforming element, most preferably 26mm.

 Advantageously, this feature optimizes the alignment of the nadir with the intersection of the lateral nasal-wall segments of the nose and the cheek of the wearer. This optimises the seal between the upper section and the face of the wearer.

 Preferably, the depth of each elliptical bowl reduces from the nadir towards the outer
30 edge of the wings.

 Advantageously, this feature provides for a degree of flexibility in the outer section of the wings which improves the ability of the element to confirm to the faces of different users.

 Preferably, the nadir has a depth of between 5 mm and 15 mm, preferably 9 mm.

Preferably, the nose conforming element has a width of between 40 mm and 70 mm, preferably 55 mm.

Preferably, the nose conforming element is positioned on an outer surface of the upper panel.

5 Preferably, the device further comprising a compressible element for contacting the wearer's nose when the device is being worn, the compressible element being arranged on an interior surface of the upper panel at a position opposing the nose conforming element.

Preferably, the nose conforming element is arranged centrally on the upper panel.

10 Preferably, the nose conforming element is arranged proximate an upper outer edge of the upper panel.

15 Preferably, the device has a multi-layered structure that comprises a first inner cover web, a filtration layer that comprises a web that contains electrically-charged microfibers, and a second outer cover web, the first and second cover webs being disposed on first and second opposing sides of the filtration layer, respectively, wherein the nose conforming element is attached to the second cover web.

Preferably, the personal respiratory protection device further comprises a headband secured to the central mouth panel.

Preferably, the personal respiratory protection device further comprises an exhalation valve disposed on the central panel.

20 Preferably, the nose conforming element comprises a unitary body.

Preferably, the nose conforming element is formed from a polymeric material, preferably polyethylene.

Preferably, the nose conforming element is resiliently flexible so that the element returns to its flat-fold condition upon the doffing of the respirator by the user.

25 Advantageously, this feature allows the respirator to automatically return to its flat-fold condition upon doffing. This is not the case in the prior art nose clips which must be deliberately deformed by the user in order to return the nose clip to its flat-fold condition.

Detailed Description

30 The invention will now be described, by way of example only, in which:

Figure 1 is a front view of a personal respiratory protection device of the current invention in its flat-fold configuration;

Figure 2 is a rear view of the personal respiratory protection device of Figure 1 in its flat-fold configuration;

Figure 3 is a cross-section of the personal respiratory protection device shown in Figure 1 taken along line III-III in Figure 2;

Figure 4 is a front view of the personal respiratory protection device of Figure 1 shown in its open configuration;

5 Figure 5 is a side view of the personal respiratory protection device of Figure 1 shown in open ready-to-use configuration;

Figure 6 is a rear view of the personal respiratory protection device of Figure 1 shown in its open configuration;

10 Figure 7 is a cross-sectional view of the personal respiratory protection device of Figure 1 shown in its intermediate configuration with the open configuration non-cross-sectioned side view shown in dotted lines;

Figure 8 is a detailed top perspective view of the stiffening panel of the respirator of Figure 1;

15 Figure 9 is a front perspective view of the personal respiratory protection device of Figure 1 shown in its open configuration on the face of a user and being held by a user;

Figure 10 is a detailed front perspective view of the valve of the personal respiratory protection device of Figure 1;

Figure 11 is a detailed front perspective view of an alternative embodiment of the valve of the personal respiratory protection device of Figure 1;

20 Figure 12 is a detailed cross-sectional view of part of the personal respiratory protection device of Figure 1 taken along line XI-XI in Figure 2 and showing attachment of the headband to the main body with the device in its flat-fold configuration.;

25 Figure 13 is a detailed cross-sectional view of part of the personal respiratory protection device of Figure 1 taken similar to Figure 12 and showing attachment of the headband to the main body with the device in its open configuration, and

Figure 14 is a detailed front perspective view of the nosepiece of the personal respiratory protection device of Figure 1.

30 Figure 1 shows a personal respiratory protection device in the form of a respirator (also commonly referred to as a mask) indicated generally at 10. The respirator 10 is a flat-fold respirator which is shown in Figures 1 to 3 in its stored (also known as flat-fold or flat-folded) configuration. In this configuration the respirator is substantially flat so that it may be readily stored in the pocket of a user.

35 The respirator 10 has a main body indicated generally at 12 and a headband 14 formed of two sections 14A, 14B. The main body 12 has a central panel 16, an upper panel 18 and a lower panel 20. In use, the upper panel 18 and lower panel 20 are opened

outwardly from the central panel 16 to form a cup-shaped chamber 22 (shown in Figure 6). Once opened, the respirator is then applied to the face (as shown in Figure 9) as will be described in further detail shortly.

The respirator 10 is formed from folded and welded portions of multi-layered filter material to form three portions or panels, as will be discussed in further detail below. The respirator 10 has a multi-layered structure that comprises a first inner cover web, a filtration layer that comprises a web that contains electrically-charged microfibers, and a second outer cover web, the first and second cover webs being disposed on first and second opposing sides of the filtration layer, respectively.

The filter material may be comprised of a number of woven and nonwoven materials, a single or a plurality of layers, with or without an inner or outer cover or scrim. Preferably, the central panel 16 is provided with stiffening means such as, for example, woven or nonwoven scrim, adhesive bars, printing or bonding. Examples of suitable filter material include microfiber webs, fibrillated film webs, woven or nonwoven webs (e.g., airlaid or carded staple fibers), solution-blown fiber webs, or combinations thereof. Fibers useful for forming such webs include, for example, polyolefins such as polypropylene, polyethylene, polybutylene, poly(4-methyl-1-pentene) and blends thereof, halogen substituted polyolefins such as those containing one or more chloroethylene units, or tetrafluoroethylene units, and which may also contain acrylonitrile units, polyesters, polycarbonates, polyurethanes, rosin-wool, glass, cellulose or combinations thereof.

Fibers of the filtering layer are selected depending upon the type of particulate to be filtered. Proper selection of fibers can also affect the comfort of the respiratory device to the wearer, e.g., by providing softness or moisture control. Webs of melt blown microfibers useful in the present invention can be prepared as described, for example, in Wentz, Van A., "Superfine Thermoplastic Fibers" in Industrial Engineering Chemistry, Vol. 48, 1342 et seq. (1956) and in Report No. 4364 of the Naval Research Laboratories, published May 25, 1954, entitled "Manufacture of Super Fine Organic Fibers" by Van A. Wentz et al. The blown microfibers in the filter media useful on the present invention preferably have an effective fiber diameter of from 3 to 30 micrometers, more preferably from about 7 to 15 micrometers, as calculated according to the method set forth in Davies, C.N., "The Separation of Airborne Dust Particles", Institution of Mechanical Engineers, London, Proceedings 1B, 1952.

Staple fibers may also, optionally, be present in the filtering layer. The presence of crimped, bulking staple fibers provides for a more lofty, less dense web than a web consisting solely of blown microfibers. Preferably, no more than 90 weight percent staple

fibers, more preferably no more than 70 weight percent are present in the media. Such webs containing staple fiber are disclosed in U.S. Pat. No. 4,118,531 (Hauser).

Bicomponent staple fibers may also be used in the filtering layer or in one or more other layers of the filter media. The bicomponent staple fibers which generally have an outer layer which has a lower melting point than the core portion can be used to form a resilient shaping layer bonded together at fiber intersection points, e.g., by heating the layer so that the outer layer of the bicomponent fibers flows into contact with adjacent fibers that are either bicomponent or other staple fibers. The shaping layer can also be prepared with binder fibers of a heat-flowable polyester included together with staple fibers and upon heating of the shaping layer the binder fibers melt and flow to a fiber intersection point where they surround the fiber intersection point. Upon cooling, bonds develop at the intersection points of the fibers and hold the fiber mass in the desired shape. Also, binder materials such as acrylic latex or powdered heat actuable adhesive resins can be applied to the webs to provide bonding of the fibers.

Electrically charged fibers such as are disclosed in U.S. Pat. No. 4,215,682 (Kubik et al.), U.S. Pat. No. 4,588,537 (Klasse et al.) or by other conventional methods of polarizing or charging electrets, e.g., by the process of U.S. Pat. No. 4,375,718 (Wadsworth et al.), or U.S. Pat. No. 4,592,815 (Nakao), are particularly useful in the present invention. Electrically charged fibrillated-film fibers as taught in U.S. Pat. No. RE. 31,285 (van Turnhout), are also useful. In general the charging process involves subjecting the material to corona discharge or pulsed high voltage.

Sorbent particulate material such as activated carbon or alumina may also be included in the filtering layer. Such particle-loaded webs are described, for example, in U.S. Pat. No. 3,971,373 (Braun), U.S. Pat. No. 4,100,324 (Anderson) and U.S. Pat. No. 4,429,001 (Kolpin et al.). Masks from particle loaded filter layers are particularly good for protection from gaseous materials.

At least one of the central panel 16, upper panel 18 and lower panel 20 of the respiratory device of the present invention must comprise filter media. Preferably at least two of the central panel 16, upper panel 18 and lower panel 20 comprise filter media and all of the central panel 16, upper panel 18 and lower panel 20 may comprise filter media. The portion(s) not formed of filter media may be formed of a variety of materials. The upper panel 18 may be formed, for example, from a material which provides a moisture barrier to prevent fogging of a wearer's glasses. The central panel 16 may be formed of a transparent material so that lip movement by the wearer can be observed.

The central panel 16 has a curvilinear upper peripheral edge 24 which is coexistent with an upper bond 23 between the central panel 16 and the upper portion 18. A curvilinear lower peripheral edge 26 is coexistent with a lower bond 25 between the central panel 16 and the lower panel 20. The bonds 23, 25 take the form of ultrasonic welds but may alternatively be folds in the filter material or alternative methods of bonding. Such alternative bonds may take the form of adhesive bonding, stapling, sewing, thermomechanical connection, pressure connection, or other suitable means and can be intermittent or continuous. Any of these welding or bonding techniques leaves the bonded area somewhat strengthened or rigidified.

The bonds 23, 25 form a substantially airtight seal between the central panel 16 and the upper and lower panels 18, 20, respectively and extend to the longitudinal edges 27 of the respirator where the central upper, lower panels 16, 18, 20 collectively form headband attachment portions in the form of lugs 31, 33. The central panel 16 carries an exhalation valve 28 which reduces the pressure drop across the filter material when the user exhales. The valve 28 has grip portions 29 which ease the opening, donning and doffing of the respirator as will be described in further detail below.

The upper portion 18 carries a nose conforming element in the form of nosepiece 30 which conforms to the face of the user to improve the seal formed between the respirator 10 and the face of the user. The nosepiece 30 is arranged centrally at the upper outer periphery 38 of the upper portion 18 and is shown in section in Figure 3 and in greater detail in Figure 14. The nosepiece operates in conjunction with a nose pad 35 which is shown in Figure 7 to be located on the opposite side of the upper panel 18 to the nosepiece 30 and serves the propose of softening the point of contact between the nose and the upper panel 18.

Turning now to Figure 3, the arrangement of the features of the respirator 10 in its stored configuration is shown in greater detail. The nosepiece 30 is shown positioned on the outer surface of the upper portion 18. The upper portion 18 is shown at the rearward side of the folded respirator 10 overlapping the lower panel 20. The lower panel 20 is folded about a lateral fold 36 (shown as a long dotted line in Figure 2). The lateral fold 36 divides the lower panel 20 into an outer section 40 and an inner section 42. Attached to the lower panel 20 is a tab 32 which assists in the opening and donning of the respirator as will be described in further detail below. The tab 32 has a base which is attached to an interior portion of the exterior surface lower panel 20 (that is to say inwardly of a lower outer periphery 50 (as shown in Figure 6) and the lower bond 25) at a position proximate the lateral fold 36 and ideally attached at the fold 36 as shown in Figure 3. The positioning of

the tab 32 may vary within 10mm either side of the lateral fold. The width of the tab 32 at its point of attachment to the lower panel 20 is 15 mm although this width may vary between 10 mm and 40 mm.

Figures 4, 5 and 6 show the respirator 10 in its open configuration. The central panel 16 is no longer flat as shown in Figures 1 to 3 but is now curved rearwardly from the valve 28 to the lugs 31, 33. The shape of this curve approximately conforms to the mouth area of the face of the user. The upper portion 18 is pivoted about the curvilinear upper peripheral edge 24 and is curved to form a peak which matches the shape of the nose of the user. Similarly, the lower panel 20 is pivoted about the curvilinear lower peripheral edge 24 to form a curve which matches the shape of the neck of the user.

The opening of the respirator 10 between the folded configuration shown in Figures 1 to 3 and the open configuration shown in Figures 4 to 6 will now be described in greater detail with reference to Figure 7.

Figure 7 shows a cross-section of the respirator 10 sectioned along the same line as Figure 3 but with the respirator shown in an intermediate configuration. Dotted lines show the respirator in the open configuration for comparison.

To open and don the respirator, the user first grips the grip portions 29 of the valve 28 (see Figure 9). With the other hand the user takes hold of the tab 32 and pulls the tab 32 in direction A as indicated in Figure 7 in order to apply an opening force to the valley side of the lateral fold 36. The tab may be textured to improve grip or may be coloured to better distinguish from the main body of the respirator. This opening force causes the fold 36 to move rearwardly and downwardly with respect to the central panel 16. This causes the lower panel 20 to pivot about the the curvilinear lower peripheral edge 24. Simultaneously, load is transferred from the base of the tab 32 to the lugs 31, 33. This pulls the lugs 31, 33 inwardly causing the central panel 16 to curve. The curvature of the central panel 16 in turn applies a load (primarily via the lugs 31, 33) to the upper portion 18. This causes the longitudinal centre of the upper portion 18 to elevate as shown in Figures 6 and 7.

As the user continues to pull the tab 32 beyond the intermediate position shown in Figure 7 the lugs 31, 33 continue to move closer to one another as the central panel 16 become increasingly curved. This in turn causes the continued upward movement of the upper portion 18 and downward movement of the lower panel 20 towards the open position (dotted lines in Figure 7). In this way the tab 32 improves the opening mechanism of the respirator by ensuring that the load applied by the user to open the respirator 10 is most effectively and efficiently deployed to open the respirator 10.

The lower panel 20 is shown to include a stiffening sheet in the form of panel 40 (shown in long dotted lines). The stiffening panel 40 forms part of the multilayered filter material and is formed from material well known in the art for its stiffening properties. The stiffening panel 40 is approximately hour-glass shaped and is shown in greater detail in Figure 8 to include a first pair of wings 42, a waist portion 44, a second pair of wings 46 and a front section 48. The front section 48 is coexistent with the lower outer periphery 50 (as shown in Figure 6) of the lower panel 20 and the waist section is coexistent with the lateral fold 36. When the respirator 10 is in its folded configuration, the stiffening panel 40 is folded along a lateral crease indicated at line B-B. As the respirator 10 opens from the folded position as described above, the stiffening panel 40 opens out about lateral crease line B-B. As the respirator approaches the open configuration (as shown in Figures 4 to 6) the fold along lateral crease line B-B flattens out and the stiffening panel curves about a longitudinal crease indicated at line C-C. The curving of the panel 40 along longitudinal crease line C-C prevents the folding about lateral crease line B-B which gives the stiffening panel 40 and thereby lower panel 20 additional rigidity. This additional rigidity is at least in part imparted by the stiffening sheet 40 folding about longitudinal crease line C-C as the respirator 10 opens from a concave external angle to a convex external angle, that is to say a mountain fold is formed when the fold goes overcentre about the longitudinal crease line C-C. This in turn helps to prevent the collapse of the lower panel 20 and thus improves the conformity of the lower panel 20 to the chin area of the face.

Once the respirator 10 is open, the user is able to position the open cup-shaped air chamber of the respirator over the face and position the headbands as shown in Figure 9 in order to don the respirator.

In order to more readily don and doff the respirator 10, the respirator is provided with a valve 28 with grip portions 29 which are shown in greater detail in Figure 10. The valve 28 is adhered to the central portion using an adhesive such as that commercially available under the trade designation 3M™ Scotch-Weld™ Hot Melt Spray Adhesive 61113M™. The valve 28 has side walls 51 which include apertures 52 to allow the exhaled air to pass through the valve 28. The side walls 51 have a curved form with an inwardly extending mid-portion and outwardly extending base 54 and upper section 56. Arranged on a top surface 58 of the valve 28 are upwardly extending ridges 60 which carry outwardly extending ribs 62.

The curved side walls 51 act as a grip region 29 since the curves match the curvature of the fingers of the user. The performance of the grip region is improved by the provision of the ridges 60 which extends the grip region. Performance is further improved

by the provision of the ribs 62 which make the grip region 29 easier to grip and hold. The curved side walls 51, ridges 60 ribs 62 individually and collectively form an indicia to the user that the grip region 29 is to be gripped in order to open and don the respirator as described above.

5 Figure 10 shows an alternative embodiment of valve 28' which differs from valve 28 in that it has taller ridges 60'. It is conceivable within the scope of the invention that other forms of grip region could act as indicia to the user, for example a textured or colored surface to the side walls 50, ridges 60 and/or ribs 62.

10 It will be appreciated that whilst such a grippable valve 28, 28' is described with reference to a three panel (central, upper and lower panel 20), flat-fold respirator 10, it will be appreciated that the valve 28, 28' could be equally applied to other respirators including cup respirators.

15 Turning now to Figures 11 and 12, the attachment of the headband 14 to the headband attachment lug 31, 33 is shown in greater detail. The headband 14 is attached to the main body 12 by a head band module indicated generally at 70. The module 70 has a headband 14 which is bonded on its upper side to an upper tab 72 and on its lower side to a lower tab 74. The tabs 72, 74 are formed of a non-woven material used to form the filter material described above. The non-woven material tabs 72, 74 are bonded to the headband 14 using a known adhesive 78 such as that commercially available under the trade designation 3M™ Scotch-Weld™ Hot Melt Spray Adhesive 6111.

20 The module 70 is then ultrasonically welded to the lug 31, 33 to form a weld 76 between the lower tab 74 and the main body 12.

25 In Figure 11 the head band module is shown with the respirator in its folded position. As the respirator 10 is opened the headband becomes stretched and pulls outwardly on the lugs 31, 33.

30 In Figure 12 the head band module is shown with the respirator in its open position. The stretching of the headband 14 causes the module 70 to curve which leads to the lower tab 74 being held in tension. This causes a high load to act at the point of intersection D of the lower tab 74 and the lug 31, 33. However, the weld 76 is relatively strong in peel mode (that is to say the extreme tension load applied to the edge of the weld at point D by the stretching of the headband). This provides an improvement over prior art attachment techniques which place an adhesive bond in peel mode rather than a weld which is far stronger in peel than an adhesive.

35 Turning now to Figure 14, the nosepiece 30 is shown in greater detail to have a resiliently flexible central portion 80 and first and second rigid outer portions 82 extending

outwardly from the central portion 80. The central portion 80 is substantially flat when the respirator is in the flat fold configuration. The central portion 80 is approximately 20mm wide and 8mm deep. Each of the outer portions 80 has a wing which defines a concave elliptical bowl having an outwardly extending major axis X and upwardly extending minor axis Z. Each elliptical bowl has a nadir indicated generally at 84 and positioned approximately equidistant between a centerline of the nosepiece 30 and an outer edge 86 of the wings, the nadir being positioned 26 mm from the centerline of the nosepiece 30. The elliptical bowl gives the outer portions 82 rigidity whilst the flat central portion 80 is able to flex under load. This allows the central portion 80 to flex over the bridge of the nose of the user whilst the rigidity of the outer portions 82 and the varying point of contact offered by the curved profile of the rigid portions offers a close fit between the respirator and the cheek of the user. These features of the nosepiece 30 therefore improve the fit and comfort of the respirator 10 over prior art respirators.

The nosepiece 30 is formed using a known vacuum casting technique using a polymeric material such as polyethylene. Such a material gives the required flexibility in the central portion 80 whilst having sufficient strength to give the outer portions 82 the required rigidity. Such a material also allows the nosepiece to return to its flat position which allows the respirator 10 to be removed and placed in the pocket of the user without the requirement to flatten the nosepiece.

It will be appreciated that certain features described herein could be used in isolation or in conjunction for the benefit of the invention. For example, it is envisaged that any one or more of the following features could be advantageously combined with the current invention:

Tab 32

Stiffening panel 40

Grippable valve 28

Headband attachment module 70

Claims

1. A personal respiratory protection device comprising:

an upper panel,

5 a central panel, and

a lower panel,

the central panel being separated from each of the upper and lower panels by a first and second fold, seam, weld or bond, respectively, such that device is capable of being folded flat for storage along the first and second fold, seam, weld or bond and opened to form a cup-shaped air chamber over the nose and mouth of the wearer when in use,

wherein the upper panel has a nose conforming element for conforming at least part of the upper panel to the nose of a wearer when in use,

the nose conforming element having a resiliently flexible central portion and first and second rigid outer portions extending outwardly from the central portion,

15 the central portion deforming upon donning of the respirator so that the central and outer portions conform to the profile of the nose.

2. The personal respiratory protection device of claim 1 wherein the central portion of the nose conforming element is substantially flat when the device is folded flat.

3. The personal respiratory protection device of claim 1 or 2 wherein the central portion has a width of between 5 and 25 mm, and preferably 20 mm.

4. The personal respiratory protection device of any one of claims 1 to 3 wherein the outer portions of the nose conforming element are concave.

5. The personal respiratory protection device of claim 4 wherein the outer concave portions each form a wing having an outwardly extending major axis and upwardly extending minor axis.

6. The personal respiratory protection device of claim 5 wherein the wings are curved in both the major and minor axes to form a concave elliptical bowl.

7. The personal respiratory protection device of claim 6 wherein each elliptical bowl has a nadir positioned approximately equidistant between a centerline of the nose

conforming element and an outer edge of the wings, the nadir being positioned preferably between 15 and 25 mm from the centerline of the nose conforming element, most preferably 26mm.

5 8. The personal respiratory protection device of claim 7 wherein the depth of the each elliptical bowl reduces from the nadir towards the outer edge of the wings.

9. The personal respiratory protection device of claim 7 or 8 wherein the nadir has a depth of between 5 mm and 15 mm, preferably 9 mm.

10

10. The personal respiratory protection device of any one of claims 7 to 9 wherein the nose conforming element has a width of between 40 mm and 70 mm, preferably 55 mm.

15

11. The personal respiratory protection device of any preceding claim wherein the nose conforming element is positioned on an outer surface of the upper panel.

20

12. The personal respiratory protection device of claim 11, the device further comprising a compressible element for contacting the wearer's nose when the device is being worn, the compressible element being arranged on an interior surface of the upper panel at a position opposing the nose conforming element.

13. The personal respiratory protection device of any preceding claim wherein the nose conforming element is arranged centrally on the upper panel.

25

14. The personal respiratory protection device of claim 13 wherein the nose conforming element is arranged proximate an upper outer edge of the upper panel.

30

15. The personal respiratory protection device of any preceding claim wherein the device has a multi-layered structure that comprises a first inner cover web, a filtration layer that comprises a web that contains electrically-charged microfibers, and a second outer cover web, the first and second cover webs being disposed on first and second opposing sides of the filtration layer, respectively, wherein the nose conforming element is attached to the second cover web.

16. The personal respiratory protection device of any preceding claim further comprising a headband secured to the central mouth panel.

5 17. The personal respiratory protection device of any preceding claim further comprising an exhalation valve disposed on the central panel.

18. The personal respiratory protection device of any preceding claim wherein the nose conforming element comprises a unitary body.

10 19. The personal respiratory protection device of any claim wherein the nose conforming element is formed from polymeric material, preferably polyethylene.

15 20. The personal respiratory protection device of any claim wherein the nose conforming element is resiliently flexible so that the element returns to its flat-fold condition upon the doffing of the respirator by the user.

1/8

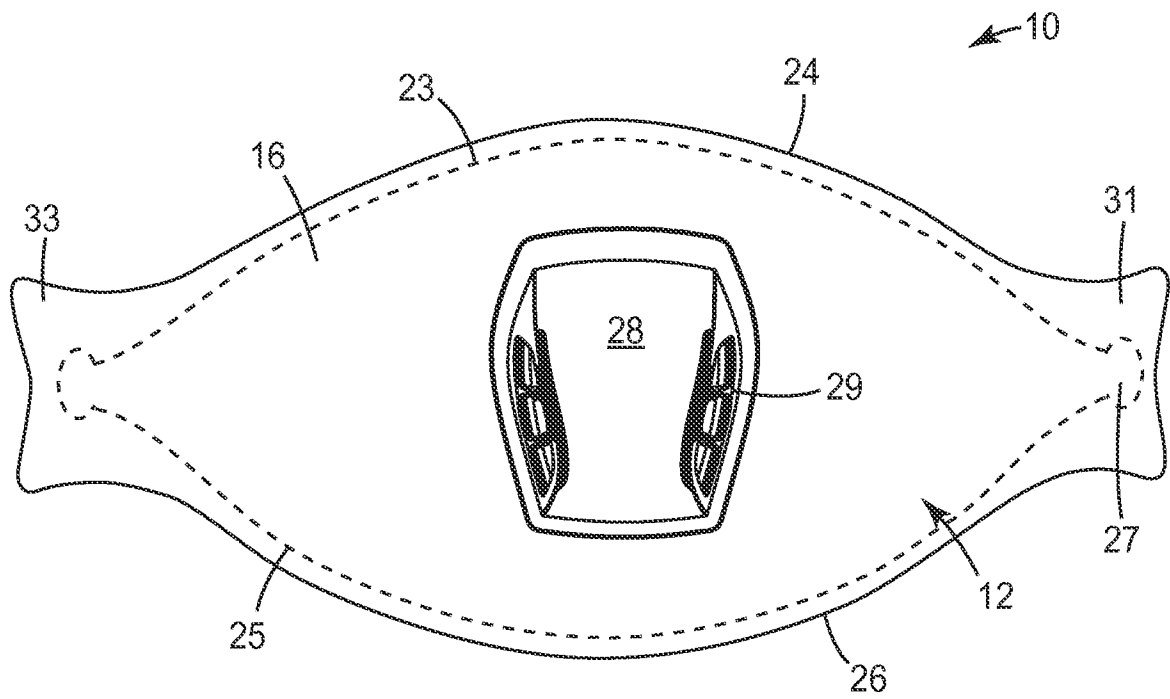


FIG. 1

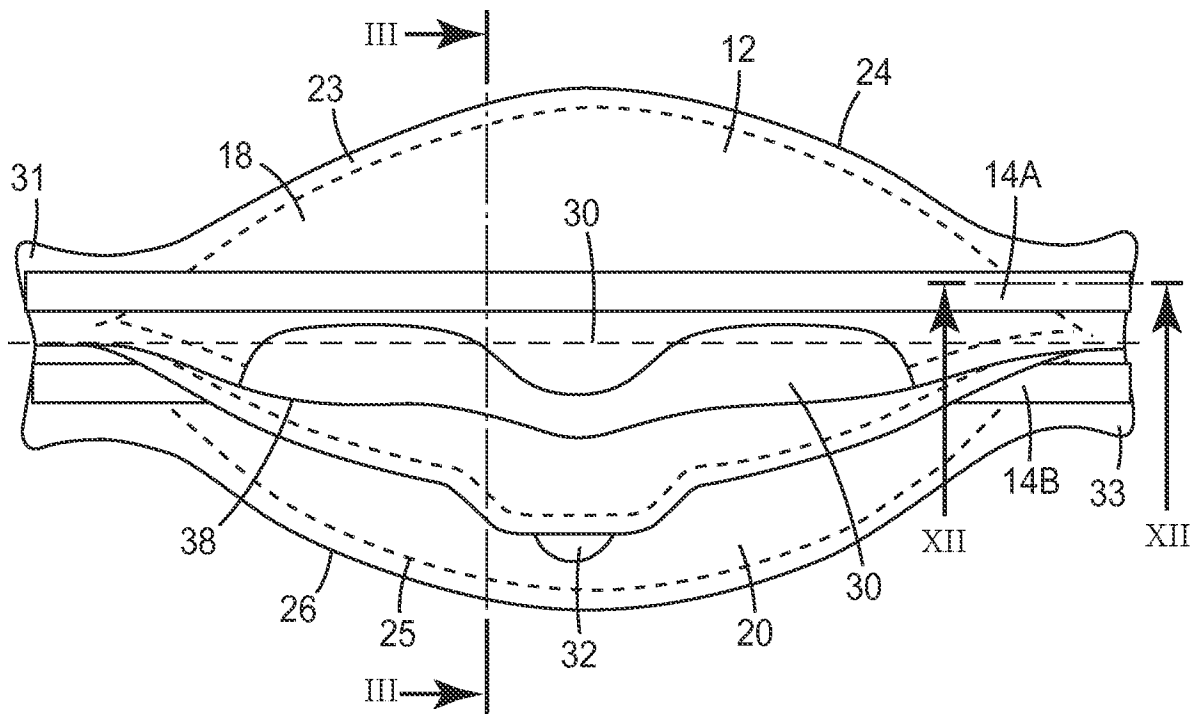


FIG. 2

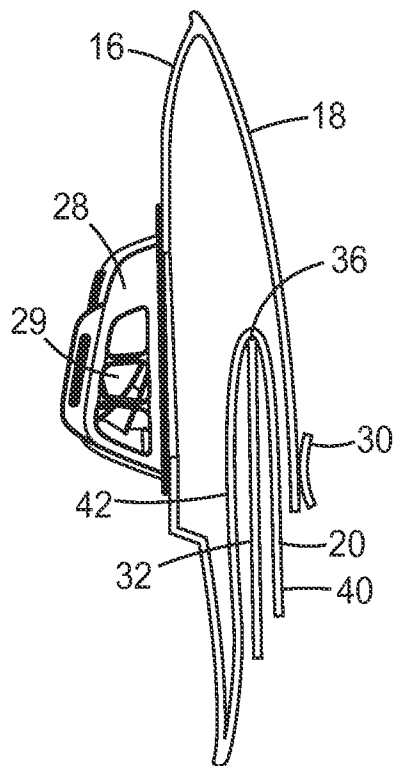


FIG. 3

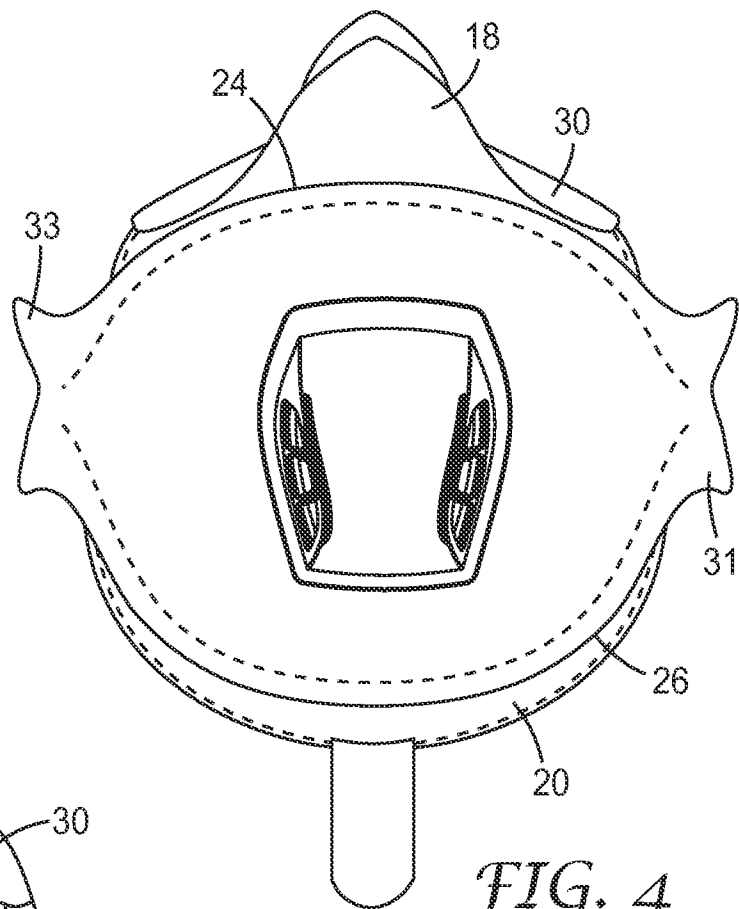


FIG. 4

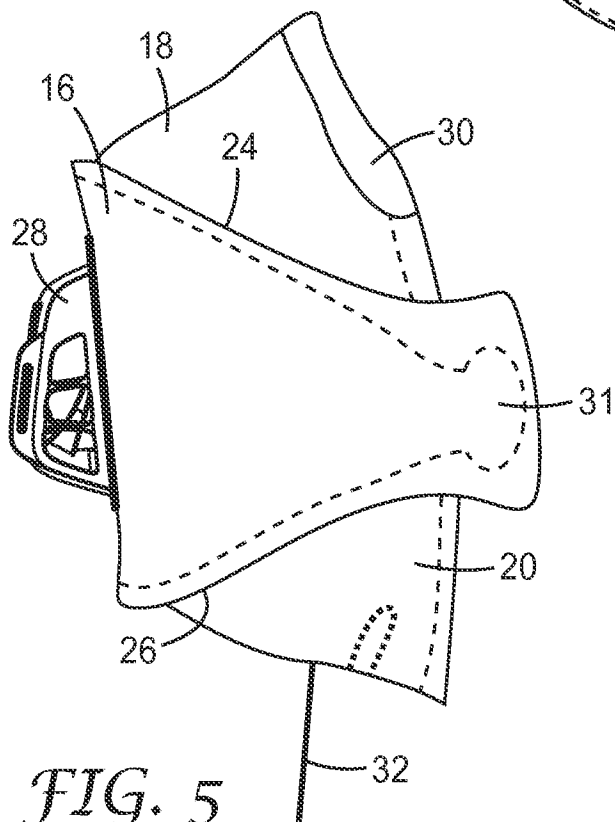
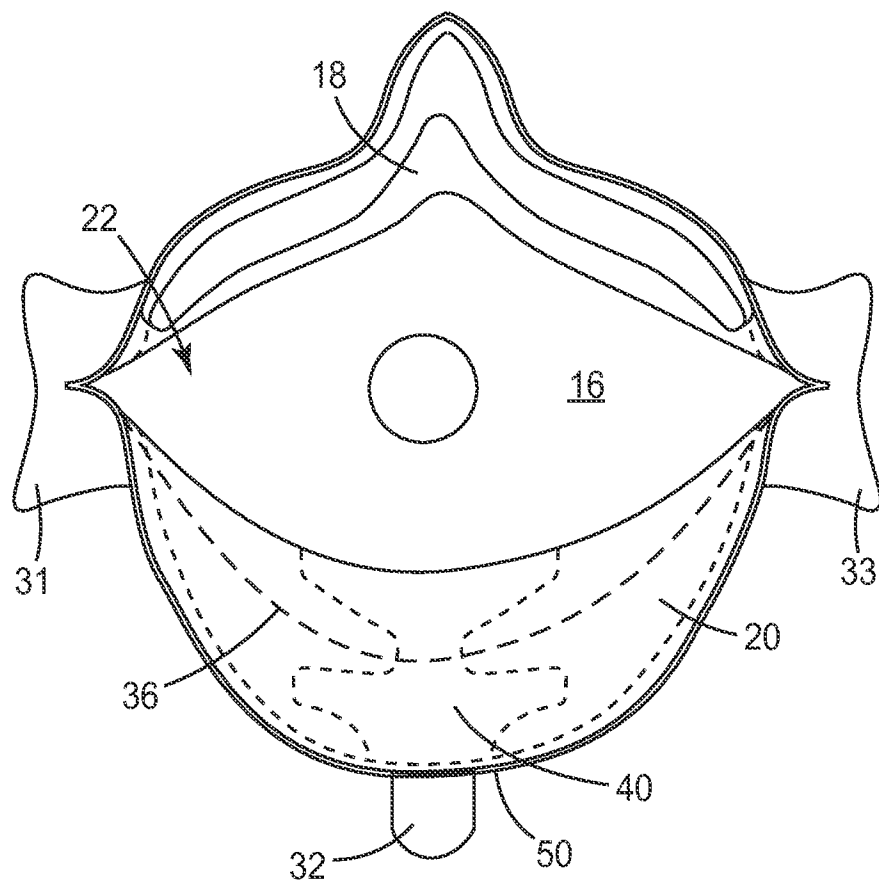


FIG. 5

*FIG. 6*

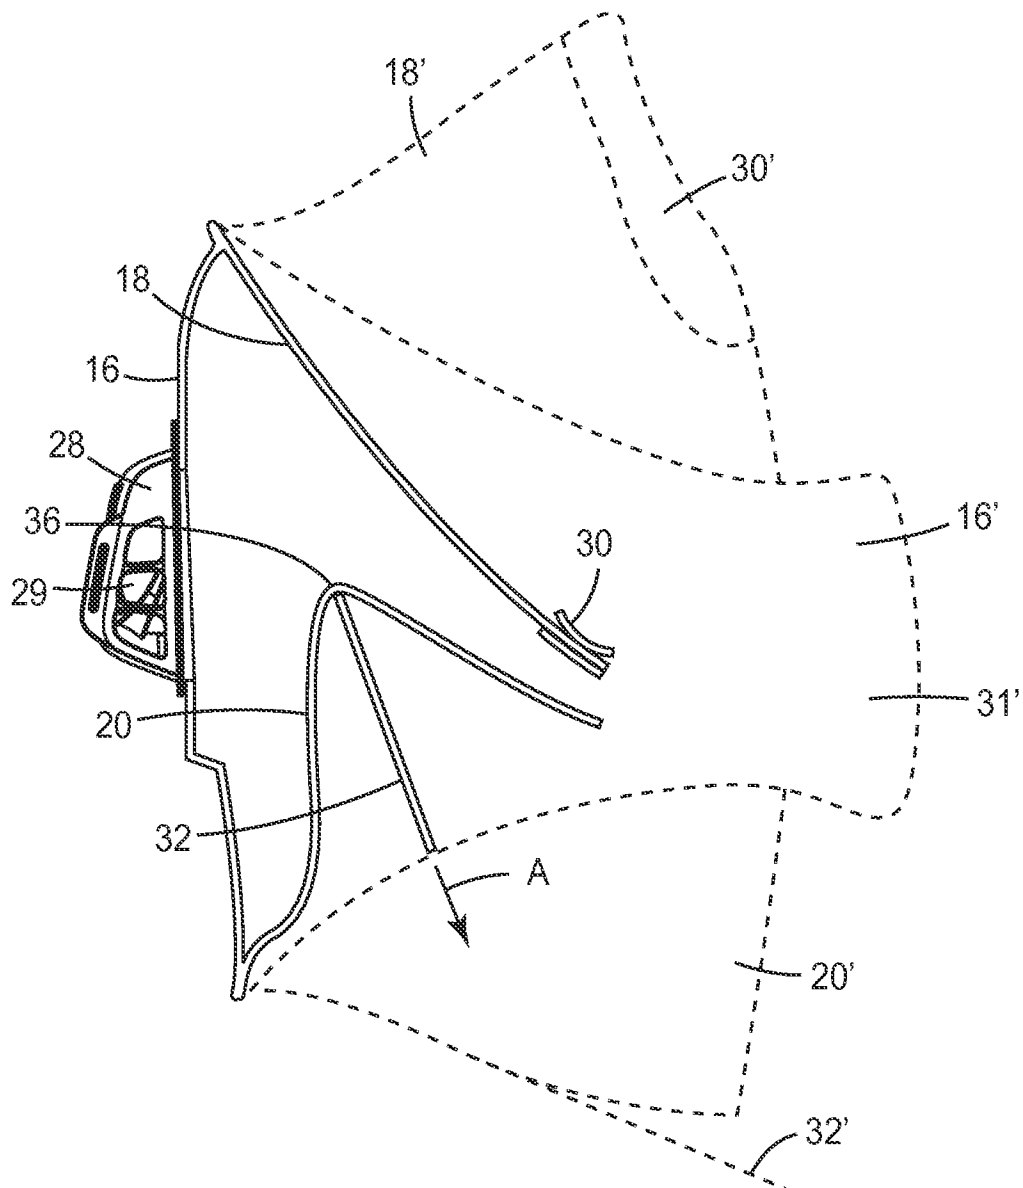
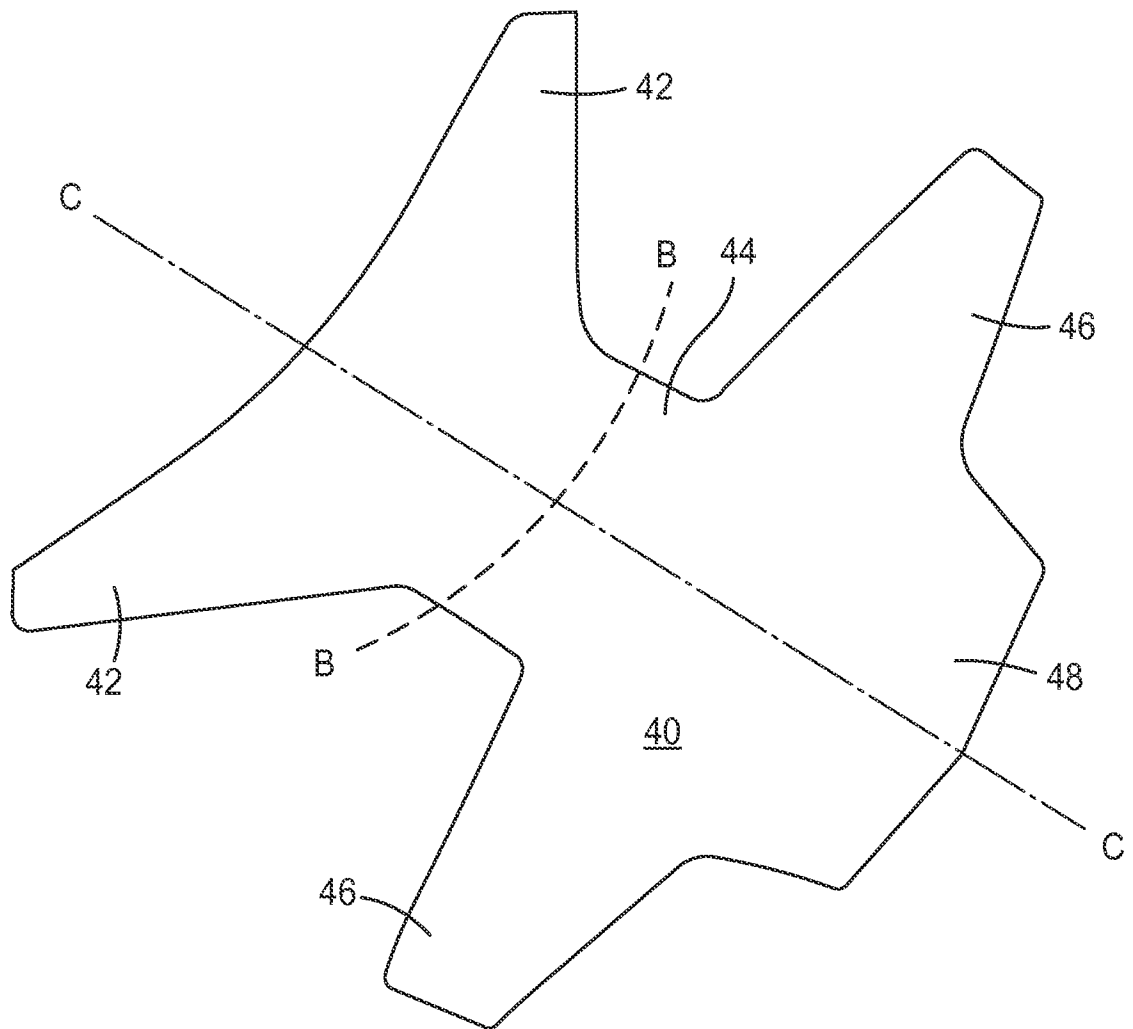
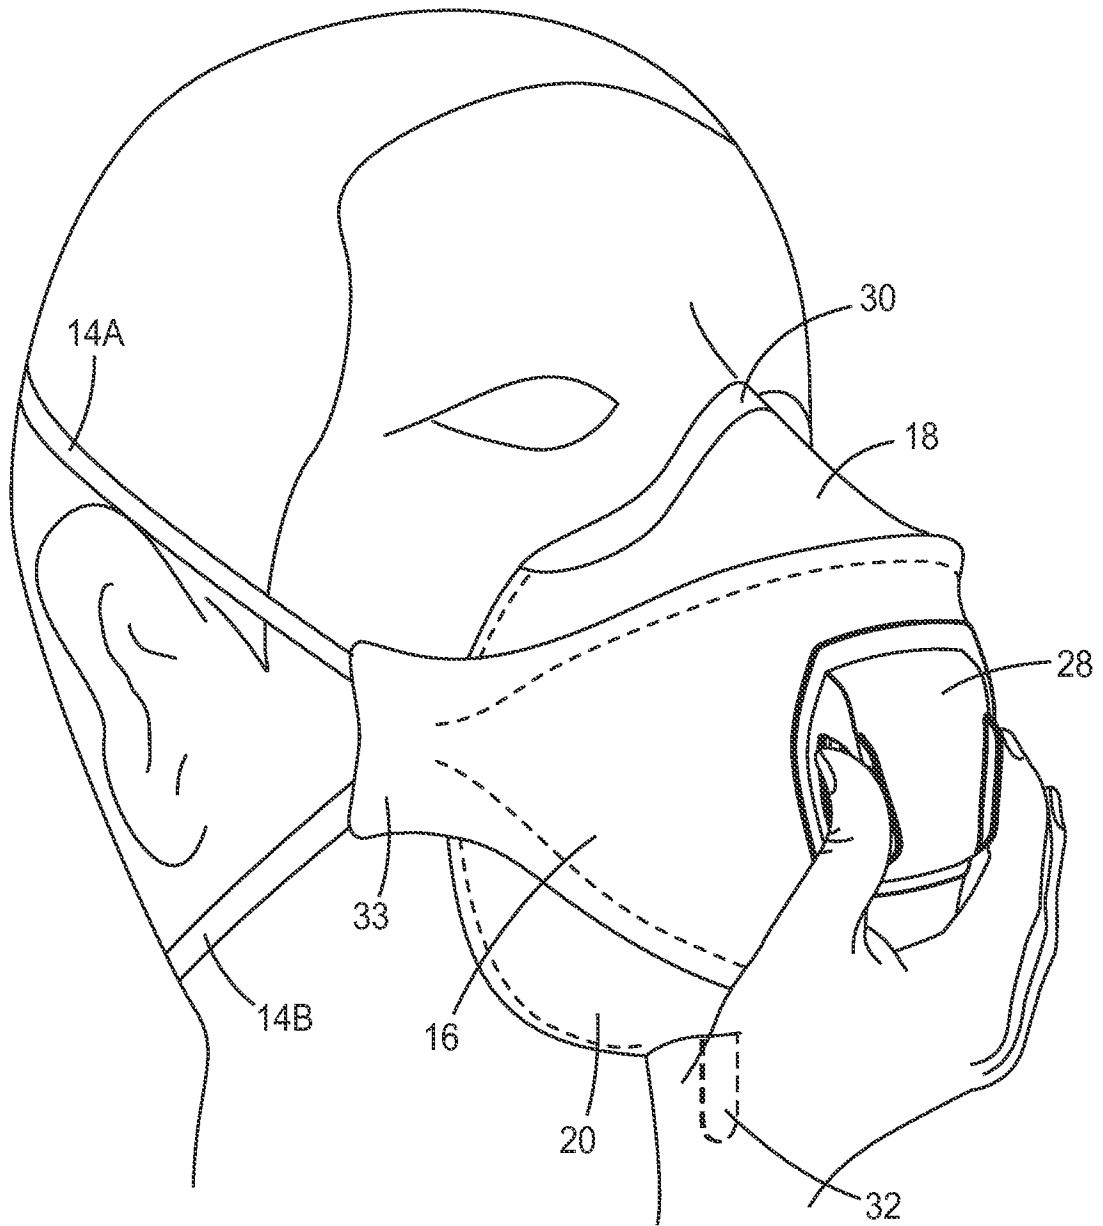


FIG. 7

5/8

*FIG. 8*

*FIG. 9*

7/8

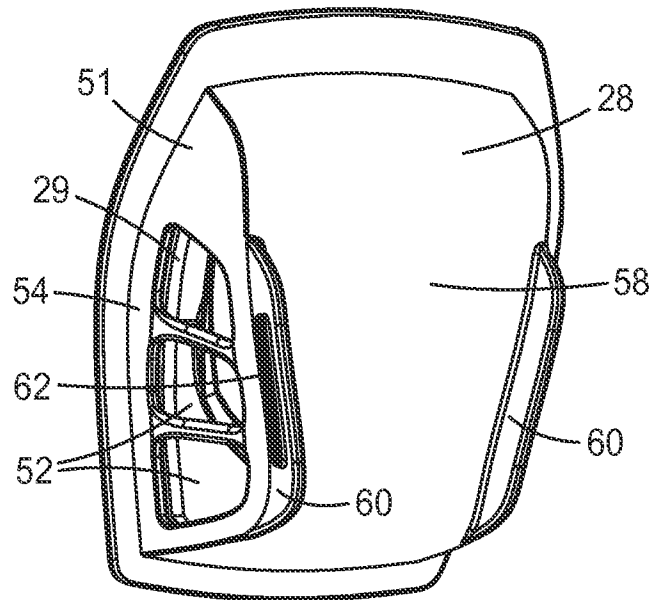


FIG. 10

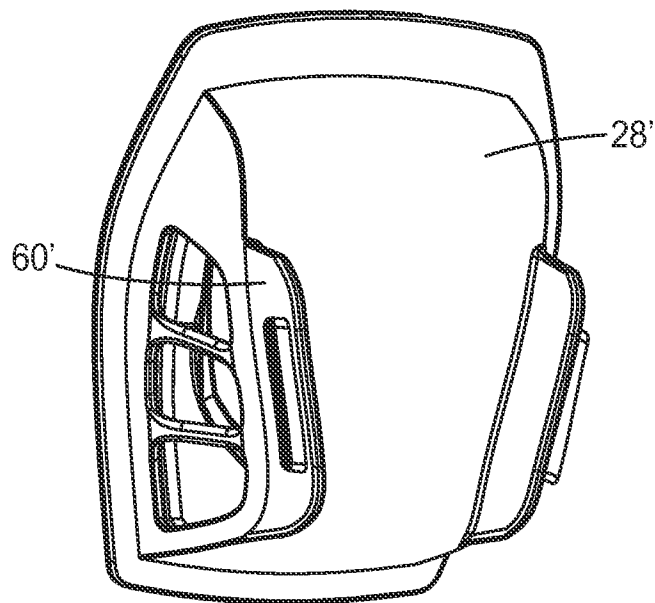


FIG. 11

8/8

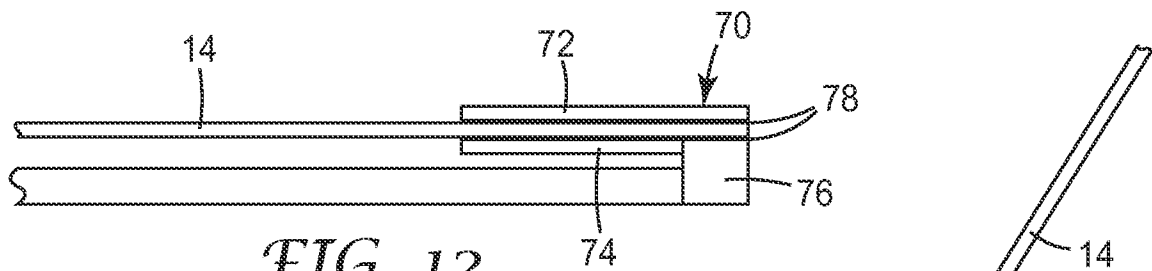


FIG. 12

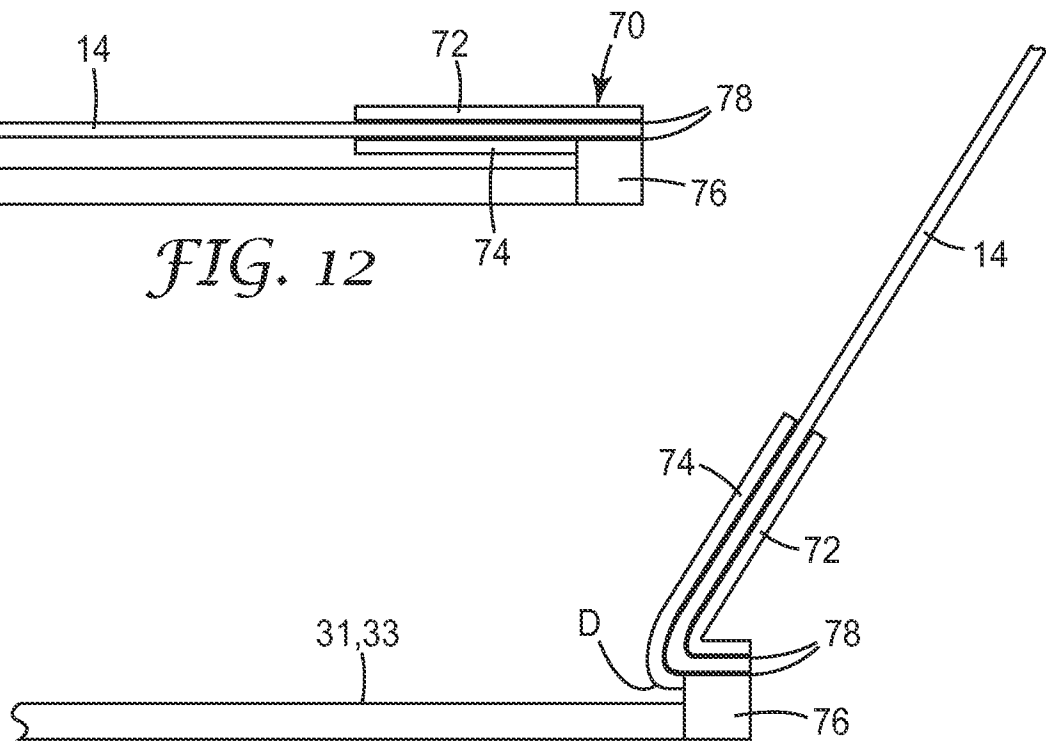


FIG. 13

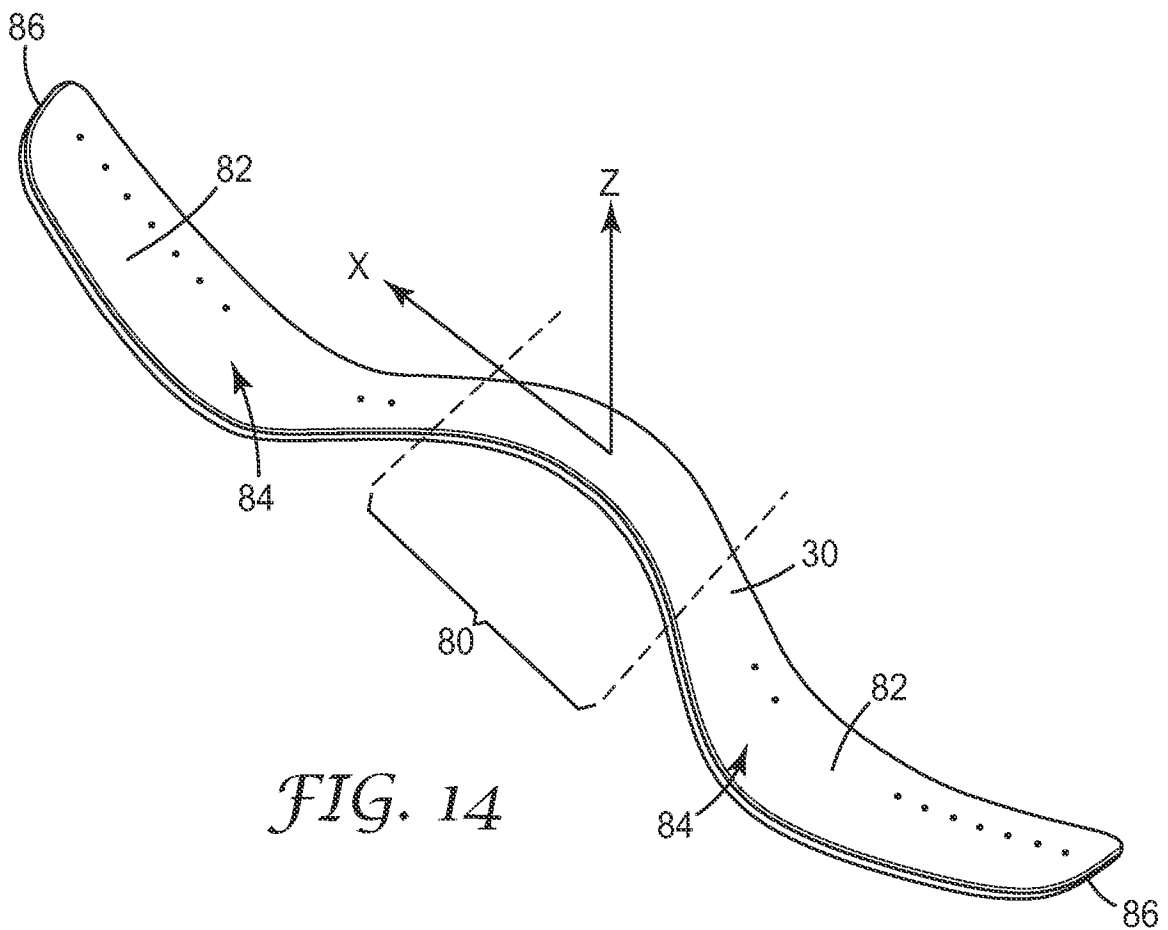


FIG. 14

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2015/063605

A. CLASSIFICATION OF SUBJECT MATTER

INV. A41D13/11

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A41D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2002 325855 A (YUNOKI NOBUO) 12 November 2002 (2002-11-12) figures 1,4	1-20
X	JP 2014 200316 A (MATSUURA TOMOHARU) 27 October 2014 (2014-10-27) figures 1,4	1-20
A	WO 2007/024865 A1 (3M INNOVATIVE PROPERTIES CO [US]) 1 March 2007 (2007-03-01) figure 3	1-20
A	US 2001/015205 A1 (BOSTOCK GRAHAM J [GB] ET AL) 23 August 2001 (2001-08-23) figure 11	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 February 2016

Date of mailing of the international search report

25/02/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

van Voorst, Frank

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/063605

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2002325855	A	12-11-2002	NONE
JP 2014200316	A	27-10-2014	NONE
WO 2007024865	A1	01-03-2007	AT 494045 T 15-01-2011
		BR PI0617048 A2 12-07-2011	
		CN 101247858 A 20-08-2008	
		EP 1924329 A1 28-05-2008	
		JP 2009505734 A 12-02-2009	
		KR 20080041215 A 09-05-2008	
		US 2007044803 A1 01-03-2007	
		WO 2007024865 A1 01-03-2007	
US 2001015205	A1	23-08-2001	US 6536434 B1 25-03-2003
			US 6568392 B1 27-05-2003
			US 2001015205 A1 23-08-2001
			US 2003015201 A1 23-01-2003
			US 2003192546 A1 16-10-2003