

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72578 A1

(51) International Patent Classification⁷: H04N 1/06, 1/04

(21) International Application Number: PCT/CA99/00421

(22) International Filing Date: 7 May 1999 (07.05.1999)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: CYMBOLIC SCIENCES, INC. [US/US];
665 West Stuart Road, Bellingham, WA 98226 (US).

(72) Inventor: MONTGOMERY, Derek, G.; 1702 - 320
Royal Avenue, New Westminster, British Columbia V3L
5C6 (CA).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— With international search report.

(74) Agent: VERMETTE & CO.; Granville Square, P.O. Box 40, 230-200 Granville Street, Vancouver, British Columbia V6C 1S4 (CA).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTERNAL DRUM SCOPHONY RASTER RECORDING DEVICE

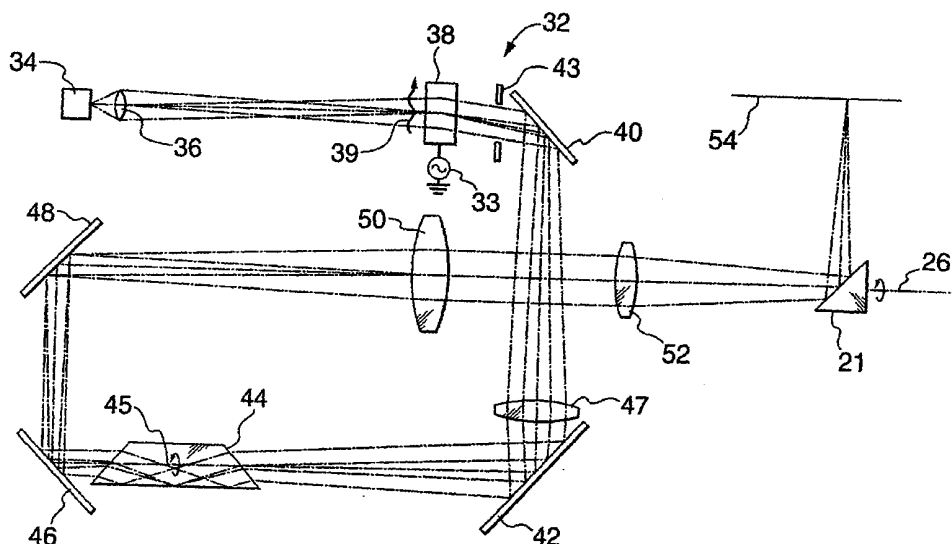

(57) Abstract: An optical recording and data processing system for exposing an image on to a flexible, light sensitive medium, which includes a medium holder having an inner cylindrical wall portion against which is held said medium, and a light source having an approximately rectangular emitting aperture, with a short aperture axis and a long aperture axis, operative to emit a beam of light having a rectangular cross section with a long axis corresponding to the long aperture axis and a short axis corresponding to the short aperture axis. An optical modulator is aligned with the light source so as to intercept light from the beam of light and produce a spatial modulation pattern across the long axis of the beam of light.

INTERNAL DRUM SCOPHONY RASTER RECORDING DEVICE**Field**

The present invention relates to an optical recording system used to impart a raster composed image on
to a flexible photo-sensitive medium. Such recording
5 devices are well known in the industry of photographic film recorders, for exposing either finished display materials or photo-tool masters. The photo-tools are used as an intermediary, to transfer images on to a secondary medium.

10

Background of the Invention

The printing industry has gone through an evolution designed to speed up the printing process and at the same time to lower costs. The film transfer to plate
15 scheme simply exposes light sensitive photographic film with light from a low power source and then uses the processed film to transfer the image to a plate. More efficient plate imaging methods led to the direct imaging of the plates themselves. Although still using relatively
20 low power light sources, such methods required complex plate composition and processing chemistry, and hence a large expense for the plates themselves. In a drive to reduce plate costs, the industry moved to high power laser light sources as a means of thermally exposing the image on
25 the plate. This class of media is composed of inexpensive coatings that require little or no processing to condition the plate surfaces for printing.

In general, raster recording devices are limited in their exposing power by the brightness of the optical source. This limitation is in contrast to a flood exposure system, used to photo-graphically transfer images from a master on to a secondary medium, in which the amount of light can be increased simply by increasing the size or number of sources. Ultimately, the exposing power of any optical system reaches a fundamental maximum, for a given source brightness, once the system aperture and field of view have been filled. Because the field of view of a raster recorder usually extends over only a very small fraction of the total image area, in many cases extending over only a single image pixel element, the maximum exposure limit can be restrictive in terms of exposing power.

In particular, the image transfer process is used in the production of lithographic printing plates. The photo-sensitive emulsions appropriate for coating conventional printing plates are based on photo-polymerization reactions, which require high levels of ultra-violet exposure. The source power required to expose a conventional plate efficiently, with a raster film recorder, is prohibitive using present day technology. A transfer medium is therefore used, composed of silver-halide based emulsions which are much more sensitive to longer wavelength light and require significantly reduced levels of exposure to sensitize. After the image has been

generated on the transfer medium, it is used as a photographic mask and copied by contacting it to the printing plate and providing exposure from a high intensity ultra-violet flood lamp.

5

Lasers are the favoured light source for many raster recording devices because of their inherent high brightness, but they are limited to known lasing materials which impose a number of design restrictions, such as the choice of available wavelengths. In particular, ultra-violet laser sources are much more difficult to manufacture, and are considerably more costly than longer wavelength lasers. Presently, semi-conductor lasers are the most commercially viable laser, in terms of cost per unit emitting power. However, they are only capable of emitting wavelengths in the near infra-red to red portion of the optical spectrum. For this reason, printing plate manufacturers have recently developed printing plates based on thermally induced material changes that are sensitive to high power, near-infra-red (NIR) exposure instead of ultra-violet.

The exposure mechanism of thermally induced media is fundamentally different than photo-polymer or silver-halide processes. The latter processes can integrate exposures without suffering significant reciprocity effects. The former utilize emulsions which react to the thermal load imparted by the exposure, and will undergo a

25

permanent state change, such as ablation, only when a certain temperature threshold has been exceeded. If the thermal load is allowed to dissipate before the threshold has been reached, no change in the reactive material will occur. It is important to consider this effect when designing a raster optical recording system, because some architectures provide varying delays between adjacent lines of raster, which could result in exposure uniformity problems.

10

Semi-conductor lasers are characterized not only by their wavelength, but also by the form of the emitting aperture. In general, state of the art high power laser diode sources emit from a stripe aperture, which generates a single transverse mode from the width of the strip in one axis, and is multi-modal over its length. NIR lasers of equivalent power (approximately 5 watts), which produce a circular spot, are much more costly than such diode lasers. An example of high power lasers which emit a circular spot is known as a YAG (yttrium aluminum garnet) laser. The brightness of the laser diode is limited by material damage thresholds so that total power can only be increased by enlarging the emitting aperture. The aspect ratio of the emitting aperture can be varied, allowing an increase in total output power to be achieved by increasing the length of the strip rather than increasing its width. The resulting rotational asymmetry imposes restrictions on the design configuration of an efficient raster optical system.

25

One method of recording high bandwidth and high resolution image data, using an optical source which is extended in one axis, was developed in the 1930's for television applications, and is referred to in the literature as "Scophony" projection. Referring to Figure 1, the "Scophony" projection system employs an extended source **11** to illuminate an acousto-optic cell **13**, with the long axis of the source being parallel to the direction of acoustic propagation. The diffracted light from the acoustic cell **13** is focused on to the recording surface **17**, and the image of the acoustic amplitude can be resolved as it traverses the beam. The diffracted light beam is then scanned by mechanical means to sweep across the raster lines of the recording surface **17**, and is aligned so that the long axis of the imaged acoustic cell lies along the direction of scanning **19** on the recording surface **17**. If the velocity of the scan motion **19** at the recording surface **17** is equal in magnitude but opposite in direction to the velocity of the imaged acoustic motion **23**, the image pattern will remain stationary.

In the historical Scophony projection system the recording surface is a planar one and the scanner is a rotating cylinder having a plurality of elongated planar facets orientated parallel to the axis of the cylinder with the axis of the cylinder perpendicular to the direction of propagation of the incident beam. The scan motion produced

by the rotating mirror facets is inherently non-linear because the angle of incidence at the recording plane varies along the scan line. Complex corrective optics can be employed to partially compensate for the distortion, but
5 they are expensive and ultimately restrict the number of resolvable pixel elements and the allowable source aperture aspect ratio.

There are many other optical system architectures
10 used to record raster images on to flexible media. One such system is the internal drum scanning system in which a flexible medium is seated against an interior cylindrical mounting surface. A rotating optical element, usually a mirror or prism, which is disposed along the axis of the
15 cylinder, redirects the modulated light beam radially with respect to the cylinder axis, scanning the beam along the cylinder circumference as it spins. The rotating scanner is translated by means of a mechanical carriage transport, which provides the slow scan axis of motion. Many machines
20 in commercial production today employ this basic architecture in one form or another.

Another architecture is the external drum
architecture in which a rotating drum carries a light
25 sensitive plate or film clamped or otherwise held against its exterior surface. A writing head moves back and forth along the length of the drum and exposes pixels on the light sensitive recording medium. A major problem with

such a system resides in the requirement of having to rotate a large drum, of considerable mass and rotational inertia, at the high speeds necessary to achieve fast recording rates (state of the art systems plot at raster rates in excess of 200 lines per second). Some external drum systems, overcome this problem by maintaining a relatively slow and manageable rotational rate, and exposing the medium with an array of modulated light sources. By recording multiple raster lines in parallel, a high pixel throughput can be maintained, but at the expense of increased system complexity and cost.

A major advantage of the internal drum configuration resides in the fact that it does not require the large mass associated with a drum to rotate. The relatively small axial scan mirror can be mounted directly on to a motor spindle and rotated at high speeds while still maintaining mechanical accuracy. In addition, the configuration does not have inherent distortion as does the planar recording projection system. The beam is directed through the central axis of the lens elements, and the distance to the recording plane is maintained constant throughout the scan motion. This results in a very simple, robust and inexpensive optical system.

25

However, a single faceted axial optical scanning element, used in an internal drum scanning system, causes the projected image at the recording plane to rotate about

the optical axis as the beam scans along the cylinder circumference. If only circular symmetric, single spots are to be projected on to the recording plane, this rotation effect is unimportant. Therefore, circular beam
5 lasers are the natural ones to use with an internal drum scanning system. For more complex systems which use non-rotationally symmetric optical sources, such as linear arrays, compensation is required. U.S. Patent No. 3,823,276 issued to Maslowski et al, discloses an optical
10 data read system that projects an image of an array of spots from an inner cylinder surface on to a stationary CCD array. In order to compensate for the image rotation induced by the axial scanning element, a rotating dove prism is interposed in the beam path, and rotated at half
15 the scan rate.

If an elongated source is introduced in an internal drum optical recorder, the rotation of the elongated image must be compensated for. This also can
20 also be accomplished by means of a rotating prism synchronized to track the scan rotation. The phase of the rotation compensation can be adjusted to align the long axis with the scan axis, which is the required orientation for Scophony imaging. If the scan rates are tuned properly,
25 the Scophony matching condition can be for a given acoustic rate and optical system magnification.

Accordingly, it is an object of the invention to provide an optical system, which can provide fast, accurate image recording with a relatively high power light source. It is a further object to provide a system which can
5 accommodate a light source of asymmetric proportions, and is capable of exposing high quality raster images on flexible media. It is also an object of this invention to increase the exposing power of an internal drum raster recording device by increasing the extent of the source
10 without degrading the image quality, by means of Scophony imaging. It is a particular object of this invention to facilitate the direct exposure of printing plates without the necessity of producing a transfer medium.

15 SUMMARY OF THE INVENTION

According to the invention there is provided an optical recording and data processing system for exposing a raster image on to a flexible, light sensitive medium, which includes a medium holder having an inner cylindrical
20 wall portion against which is held the medium, and a light source having an approximately rectangular emitting aperture, with a short aperture axis and a long aperture axis. A lens system collects the emitted light and projects a beam having a secondary beam waist which has a
25 rectangular cross section with a long axis corresponding to the long aperture axis and a short axis corresponding to the short aperture axis. An optical modulator is aligned with the light source so as to intercept light at the

secondary beam waist and produce a spatial modulation pattern across the long axis which shifts across the length of the long axis at a constant rate. A rotatable multiple beam deflector is positioned in the path of the beam and
5 rotates so as to rotate the spatial modulation pattern at a constant rate. The modulated light beam is directed and focused onto a scanning deflector interposed along the axis of the cylindrical wall portion, such that after undergoing scan deflection, the light is focused onto the inner
10 cylindrical recording surface. The focused light at the recording surface forms an image of the spatial modulation pattern. The scanning deflector scans the beam of light around the circumference of the inner cylindrical wall portion at a constant angular rate, equal to the rate of
15 rotation of the spatial modulation pattern. The relative phase angle between rotation of the spatial modulation pattern and scan means is maintained such that the direction of movement of the projected image of the shifting modulation pattern is parallel to the scan motion,
20 but opposite in direction. The velocity of scanning at the inner cylindrical recording surface is constant and maintained equal to the shifting velocity times the optical magnification between the modulator and the recording surface. A scanning deflector advancement assembly
25 advances the scanning deflector along the cylinder axis, one pixel spacing for each scan rotation, to expose successive lines of raster and provide complete coverage of the raster image.

Alternatively, the extended source may modulated directly along its long aperture axis, and imaged on to the recording plane without the need for secondary relay optics
5 and a modulator. This may be provided by an array of individual diode emitting elements that are modulated sequentially to produce a spatially shifting pattern.

The light source may be a laser diode.

10

The optical modulator may be an acousto-optic modulator.

The scanning deflector may be an optical deflector
15 rotatably disposed along the axis of the inner cylindrical wall portion so as to redirect light traveling along the axis approximately 90 degrees and normal to the light sensitive medium and to rotate the optical deflector about the axis at a constant rate and thereby provide optical
20 scan coverage around the inner circumference of the inner cylindrical wall portion. Preferably, the optical deflector has a mirror surface at 45 degrees to the direction of incidence of light traveling along the axis.

25 The means for rotating the spatial modulation pattern may be a dove prism. Alternatively, a k-prism or a Paschen prism may be used. Such prisms will produce an image rotation rate equal to double the prism rotation

rate. Therefore the prism must be rotated at the scan rotation rate to affect the image rotation compensation.

The optical recording and data processing system
5 may include a flexible light recording sheet of material mounted against an inner cylindrical mounting surface, which includes a laser diode light source having a rectangular emitting aperture with a long axis and a short axis coupled to provide a beam with a secondary rectangular
10 waist having short and long axes corresponding to the short and long axes of the aperture. An acousto-optic modulator crystal is positioned to intercept the light beam at the waist so that the long axis of the waist is parallel to the direction of acoustic propagation. The acoustic wave
15 diffracts a fraction of the incident light by an amount which depends on the amplitude of the acoustic wave. The modulation of the acoustic wave pattern shifts across the long axis of the beam waist causing the diffracted light to be spatially modulated. A prism is positioned to
20 intercept the light beam after modulation and to rotate the diffracted image from the modulator. After rotation by the prism, the light beam is directed along the axis of the cylindrical mounting surface on to a rotating-optical mirror surface oriented at 45 degrees to the beam axis, so
25 as to deflect the light beam radially, and scan it along the inner circumference of the cylinder wall. The lens elements used for imaging the acousto-optic modulator plane on to the recording surface, are chosen to provide an

optical magnification equal to the ratio between the acoustic velocity of the modulator crystal and the scan velocity.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as other features and advantages thereof, will be best understood by reference to
10 the detailed description which follows, read in conjunction with the accompanying drawings, wherein:

FIG. 1 is a schematic diagram of the original Scophony projection system for television applications.
15

FIG. 2 is a perspective frontal view of an internal drum opto-mechanical recorder showing the cylinder and micropositioner assembly and feed tray;

20 FIG. 3 is perspective rear view of the recorder showing the source optics assembly mounted on the rear of the cylinder;

FIG. 4 is elevation view of the spindle and scan
25 mirror partly in section;

FIG. 5 is a plan view of the optical source assembly in accordance with the present invention showing

the diode laser source, the acousto-optic modulator and the rotating dove prism;

FIG. 6 is a perspective rear view of the opto-
5 mechanical recording system showing the optical source assembly, the scan mirror assembly and the inner cylinder;

FIG. 7 is a schematic diagram showing the rectangular beam waist or stripe at the acousto-optic
10 modulator and at the image plane showing the direction of image shift within the stripe; and

FIG. 8 is a perspective view of an alternative light source consisting of individually addressable
15 multiple laser diodes stacked in a linear array.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 2, a general illustration of the opto-mechanical recording system 10, is comprised of a
20 half cylinder 12 and attached feed tray 14 to permit transverse loading and unloading of the recording media 16. The recording medium 16 is flexible and held in place against the inner surface of the cylinder 12 by mechanical means or by vacuum applied through perforations (not shown)
25 in the surface of cylinder 12. Referring to Figure 3 the rear of the system 10 discloses the cylinder 12 and location of a source optics assembly 32 adjacent thereto. A micropositioner assembly 30 positioned across the open

face of the cylinder **12** is a mechanical drive system which translates the scan prism assembly **20** (see Figure **4**) back and forth across the length of the cylinder **12**.

5 As shown in Figure **4**, a single faceted scan prism assembly **20** is attached to a mechanical spindle **22**, which, in turn, is mounted on a carriage **24**, such that the spindle axis **26** is coincident with the cylinder axis **28** shown in Figure 3. The carriage **24** is part of the
10 micropositioner assembly **30**, which translates the scan prism assembly **20** back and forth across the length of the cylinder **12**. The optical source assembly **32** is mounted on the back of the casting of cylinder **12**, as shown in Figure **3**. It modulates the light and generates a collimated beam
15 which is directed at the scan mirror assembly **20** by two turning mirrors **51** and **53** (see Figure **7**). A tachometer assembly **25** is coupled to spindle **22** and has an optical encoder (not shown) which measures the speed of rotation and phase of the rotating prism **21**.

20

Referring now to Figure **5**, the optical source assembly **32** has a laser diode assembly **34** which emits laser light through an elongated rectangular aperture **35** (see Figure **7**). The emitted light passes through a source
25 coupling optic lens **36** and is directed onto an acousto-optic modulator crystal **38** with the long axis of the beam waist in a direction parallel to the direction of travel of the acoustic wave as shown by serpentine arrow **39**. The

diffracted light from the modulator **38** is reflected off of folding mirror **40**, impinges on relay optic lens **47** and reflects off of folding mirror **42** after which it enters rotating dove prism **44**. Dove prism **44** rotates about axis **45**. After being reflected by folding mirrors **46** and **48** the light is collimated by collimating lens **50**.

Referring to Figure **6**, the collimated beam from the optical source assembly **32** is directed along the axis of the cylinder **12** by reflection off of folding mirrors **51** and **53**. After reflection off of mirror **53** the light passes through objective lens **52** onto rotating scan prism **21**. Scan prism **21** is fixed at 45 degrees relative to its axis of rotation **28** and to the direction of the light beam **49** incident thereon. Scan prism **21** reflects the light radially, and normal to the interior surface **61** of cylinder **12**. Objective lens **52** is positioned in front of the spindle **22** so that the focal position of the light beam **60** coincides with the surface of the recording medium **54** (see also Fig. 5) which is mounted against the interior surface **61** of cylinder **12**.

As the scan prism **21** rotates, the resulting scanned focused light beam **60** scribes a circular arc of constant velocity on the recording medium **54** when mounted against the interior surface **61** of the cylinder **12**. The carriage assembly **24** (see Figure **4**) is then translated along the cylinder axis **28** by means of a motorized

mechanical actuator (notshown), at a rate equal to a single raster pitch spacing per rotation of prism **21**, to affect complete exposure coverage of the recording medium **54**.

5 After passing through objective lens **52**, the light impinges on rotating scan prism **21** which scans the light **60** in raster bands perpendicular to the axis of rotation of scan prism **21**. Rotating dove prism **44** rotates at one-half the rate of rotation of scan prism **21** and
10 compensates for rotation of the image by the scanning process. The phase of rotation of the dove prism **44** is maintained relative to the phase of rotation of the scan prism **21** so that the long axis of the beam stripe **41** (see Fig. **7**) at the inner cylindrical surface **61** of the
15 recording medium **54** is parallel to the direction of scanning along the surface of that medium.

Referring now to Figure **7**, the operation of the optical source assembly **32** is shown schematically. The
20 acoustic wave in the acousto-optic modulator **38** is shown having a velocity v_a in the direction shown by serpentine arrow **39**. The acoustic wave diffracts a fraction of the incident light by an amount which depends upon its amplitude. The amplitude modulation of the wave as
25 produced by an RF driving signal from RF generator **33** spatially modulates the light from source **34**. The first order diffracted beam passes through a spatial filter **43** which filters out the higher diffraction orders to allow

only the first diffraction order to fill the system aperture. The result is optical modulation controlled by the amplitude of the RF drive level. At any point in time there are a number of acoustic pixel elements **29** within the
5 length of the beam stripe **41** which is revealed once the diffracted beam is separated. With the diffracted beam having passed through the dove prism **44** and focused by collimating lens **50** and objective lens **52** onto rotating prism **31**, and scanned along a recording surface **54**, the
10 pixels **29** are shifted with time within the beam stripe in the direction **37**. By scanning in the opposite direction **21** so that the speed of scanning at the recording plane **54** is equal but opposite to that of shifting, the pixels appear motionless on the recording surface **54**. This is in
15 contrast to a conventional internal drum scanning system where a single spot is modulated in intensity as it is scanned. The resultant exposure time of such a system, at any point along the scan line, will be extended by the number of image pixels that can be resolved over the length
20 of the laser stripe **41**.

The laser diode assembly **34** radiates from a slit-shaped aperture, shown to be oriented parallel to the mounting plane. The output power level is held constant
25 throughout the imaging process, to provide stable illumination of the optical system. The source coupling optics **36** collect the laser light and form an image of the laser aperture at the plane of the modulator **38**, typically

with a large magnification ratio. The coupling optics **36** may also provide other beam shaping functions such as compensation for source astigmatism.

5 The acousto-optic modulator **38** consists of an optically active crystal, such as lead molybdate, with a piezo-electric transducer bonded to one face. When the transducer is excited by an RF electrical signal from RF driver **33**, it will launch an ultra-sonic acoustic wave
10 through the bulk of the crystal. The acoustic waves modulate the optical density as they propagate through the crystal, and the resulting phase grating will diffract incident light. Coherent, monochromatic light beams are split up into discrete diffraction orders, which can be
15 spatially filtered to allow only one particular diffraction order to fill the system aperture, while all others are blocked. The result is optical modulation controlled by the amplitude of the RF drive level.

20 The length of the projected stripe of laser light, at the modulator crystal **38**, is many times broader than a single acoustic pixel spacing, working at the intended data pixel bandwidth. The spatial period of a single acoustic pixel is determined by the acoustic
25 velocity and data clock period, as follows:

$$\Delta_a = \mu_a * \tau$$

where: Δ_a is the acoustic spatial period
 μ_a is the acoustic velocity of the crystal
5 material
Tau is the data clock period

This means that at any point in time during the imaging
10 process, the length of the light stripe **41** will illuminate
a number of acoustic pixel elements. The acoustic pattern
is an analog representation of the amplitude modulation of
the RF drive form. The diffracted light is therefore
modulated spatially, as well as temporally, and forms a
15 real image which is then projected on to the recording
plane **54**.

The relay optics **47** are used to form a
subsequent beam waist at the rotating dove prism **44**, which
20 causes the image of the spatially modulated laser stripe to
rotate, at twice the rate of the prism rotation. The dove
prism **44** is rotated at half the rate of the final scan
deflector **31**, so that the orientation between the long axis
of the laser stripe **41** and surface of the scan deflector
25 **31** is maintained constant. This results in a projected
image of the laser stripe **41**, at the recording plane **54**,
that does not rotate along the scan line. The phase angle
between the long axis of the laser stripe and the
reflective surface of the scan prism **21** remains constant,

and the relative position determines the orientation of the projected stripe **41** relative to the scan direction.

The phase angles of both the scan prism **21** and
5 rotating dove prism **44** are determined electronically by means of optical encoders (not shown), attached to the respective rotors for the scan prism **21** and the rotating prism **44**. The encoders each consist of a glass disc with an opaque, fine pitched radial grating, patterned on its
10 surface. A thin beam of light is projected through the grating, which chops the light beam, and generates a tachometer clock signal at the opposing optical detector. A secondary marking and optical transceiver pair (not shown) generate a phase index clock, once per rotation.
15 The tachometer and phase index signals are processed using phase locking circuitry to generate drive waveforms which synchronize the rotations of the two rotors. The phase difference can be controlled electronically, and is aligned so that the projected laser stripe **41** at the recording
20 plane **54** is aligned parallel to the scan direction.

The Scophony velocity matching condition constrains the scan rate, depending only on the acoustic velocity of the modulator crystal **38** and the magnification
25 of the optical system. The scan rate of the present invention is controlled by electronically tuning the rotation rate of the scan prism **21**. A tachometer signal generated by a spindle encoder in tachometer **25** shown in

Figure 4 is used to phase lock the drive waveform to a precision tunable crystal oscillator (not shown). That tachometer signal is also used to synchronize the modulation of the pixel data, necessary to accurately place
5 the pixels 29 along the scan line.

Finally, the collimation lens 50 is used to contain the beam divergence, and deliver a parallel beam of light to the final focusing objective 52. A collimated
10 beam is necessary so that the final focus position remains at the recording plane 54 throughout the travel of the carriage assembly 24. The light beam 60 is directed on to the cylinder axis and scan mirror 21 by means of folding mirrors 51 and 53 so that the optical source assembly 32
15 can be mounted on the rear of the cylinder body 12.

Referring to Figure 8 an alternative light source 62 consists of a linear stacked array of electrically isolated laser diodes 55 each of which are
20 individually addressable. Light output from diodes 55 passes through an elongated generally rectangular aperture 59. Each diode is coupled by an address line 57 through a delay 56 to an input line 58 so that the light output can be modulated by varying the turn-on time of each of the
25 lasers 55. Thus, by using the light source 62 of Figure 8, one can eliminate the need for a separate modulator and instead modulate the light by simply varying the delay to each of the individual laser diodes in the array.

Obviously, a linear stacked array of laser diodes could be used in place of the laser diode assembly **34**.

5 Obviously, other types of optical devices could be used to rotate the image other than a dove prism. For example, a Paschen prism or K prism could accomplish the same effect.

10 Accordingly, while this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications of the illustrative
15 embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to this description. It is therefore contemplated that the appended claims will cover any such modifications or embodiments as fall within the true scope of the invention.

I CLAIM:

1. An optical recording and data processing system for exposing an image onto a flexible, light sensitive
5 image recording medium, comprising:
 - (a) a medium holder having an inner cylindrical wall portion against which is held the image recording medium;
 - 10 (b) a light source which emits a beam of light from an approximately rectangular emitting aperture, said rectangular emitting aperture having a short aperture axis and a long aperture axis;
 - 15 (c) a spatial modulator positioned to intercept the beam of light from said light source and operative to produce a time varying spatially modulated pattern which shifts across the length of said long aperture axis at a substantially constant rate;
 - 20 (d) a rotating beam deflector positioned in the path of said beam of light and rotated so as to produce a rotating spatially modulated pattern;
 - 25 (e) a scanning deflector rotating about an axis aligned with an axis of an interior cylindrical surface at a rate of rotation equal to a rate of rotation of said spatially modulated pattern and aligned to an axis of said

beam of light so as to deflect said beam of light substantially orthogonal to said axis to provide a scanning motion around an inner circumference of said image recording medium;

5

(f) a scanning deflector advancement assembly coupled to said scanning deflector and operative to advance said scanning deflector, after scanning a row, to an adjacent row to enable scanning of the adjacent row; and

10

(g) optical focusing components, positioned in a path of said beam of light between said spatial modulator and said interior cylindrical surface, operative to focus said beam of light and project an image of said spatially modulated pattern onto said image recording medium;

15

wherein orientation of the projected image of said spatially modulated pattern on said image recording medium is maintained parallel to a direction of said scanning motion such that a direction of movement of the projected image due to the shifting is parallel to the scanning motion, but opposite in direction; and

20

wherein said optical focusing components provide an optical magnification factor equal to a ratio of the scan velocity at image recording medium divided by a shifting velocity of said spatially modulated pattern whereby a scanning velocity at said image recording medium

25

produced by rotation of said scanning deflector is equal to but opposite in direction to the shifting velocity of said spatially modulated pattern so as to maintain said pattern stationary on said image recording medium during exposure.

5

2. A system according to claim 1, wherein said light source is a linear array of individual lasers individually addressable for spatially modulating said light beam and including a plurality of delays coupled to respective ones of said lasers wherein each delay is different from the other of said delays and including a signal generator so as to cause the light from said lasers to be spatially modulated and to shift the modulation pattern.

15 3. A system according to claim 1, wherein said spatial modulator is an optical modulator which spatially modulates light from said light source and shifts the modulation pattern.

20 4. A system according to claim 1, wherein said optical modulator is an acousto-optic modulator and wherein said optical focusing components form a rectangular beam waist having a long axis corresponding to the long axis of the emitting aperture.

25

5. A system according to claim 1, wherein said scanning deflector is a mirror surface oriented at 45

degrees to a direction of incidence of light traveling along said axis.

6. A system according to claim 1, wherein said light
5 source is a laser diode.

7. A system according to claim 1, wherein said
rotating beam deflector which rotates said spatially
modulated pattern is a dove prism rotating at half the
10 angular velocity of said scanning deflector.

8. A system according to claim 1, wherein said
scanning deflector advancement assembly advances said
scanning deflector along said axis at a rate equal to one
15 image track spacing per integer number of scan rotations.

9. An internal drum raster optical recorder having a
flexible image recording medium mounted against an inner
cylindrical mounting surface, comprising:

20

(a) a laser diode light source optically coupled to
produce a beam of light having an elongated rectangular
beam waist, said beam waist having a long axis along a long
dimension of said beam waist and a short axis along a short
25 dimension of said beam waist;

(b) an acousto-optic modulator crystal positioned so
that an acoustic propagation direction is aligned to

intercept said beam of light along the long axis thereof
and operative to modulate said beam of light in response to
a modulating signal and to produce an image of said
modulating signal which shifts in a direction of acoustic
5 travel;

(c) a rotating dove prism positioned to intercept and
rotate said image of said modulating signal;

10 (d) means for directing said beam of light along an
axis of said inner cylindrical mounting surface;

(e) an optical mirror surface oriented at 45 degrees
to the axis of said inner cylindrical mounting surface,
15 affixed to a spindle rotating on said axis, so as to
deflect said beam of light radially to provide a scanning
motion around an inner circumference of said recording
medium;

20 (f) an advancement assembly coupled to said spindle
and operative to advance said rotating spindle along said
axis at a rate equal to one image track spacing per integer
number of scan rotations; and

25 (g) an optical system positioned in a path of said
beam of light between said acousto-optic modulator and said
image recording medium, operative to project an image of
said modulating signal onto said image medium;

wherein orientation of the modulated image pattern on the recording medium is maintained parallel to a direction of scanning of said modulated image pattern such that a direction of movement of the image due to shifting is parallel to scanning motion, but opposite in direction thereto; and

wherein said optical system provides an optical magnification equal to a ratio between an acoustic velocity of the acousto-optic modulator crystal and a scanning velocity at said recording medium whereby the scanning velocity along said image recording medium produced by rotation of said optical mirror is equal in magnitude but opposite in direction to a velocity of shifting movement of pixels within said image so as to maintain said modulated image pattern stationary during exposure of said image recording medium.

1/6

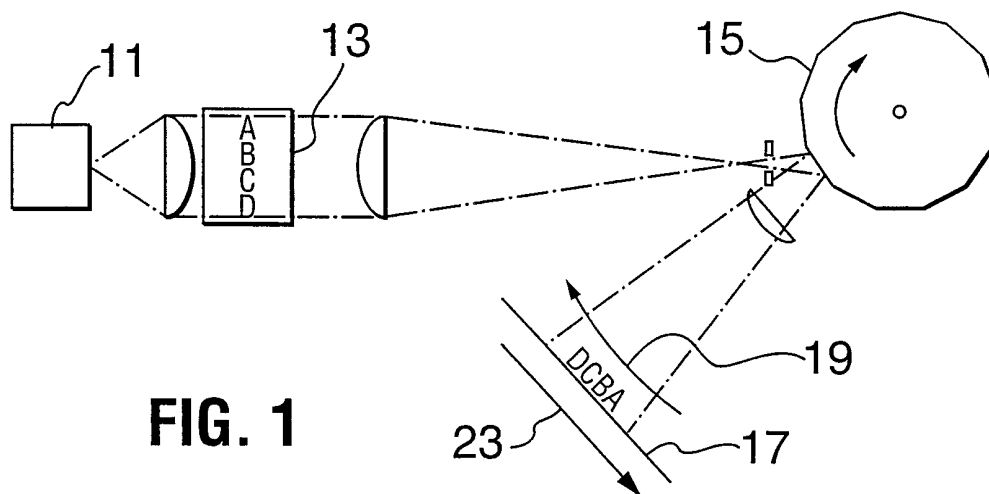


FIG. 1

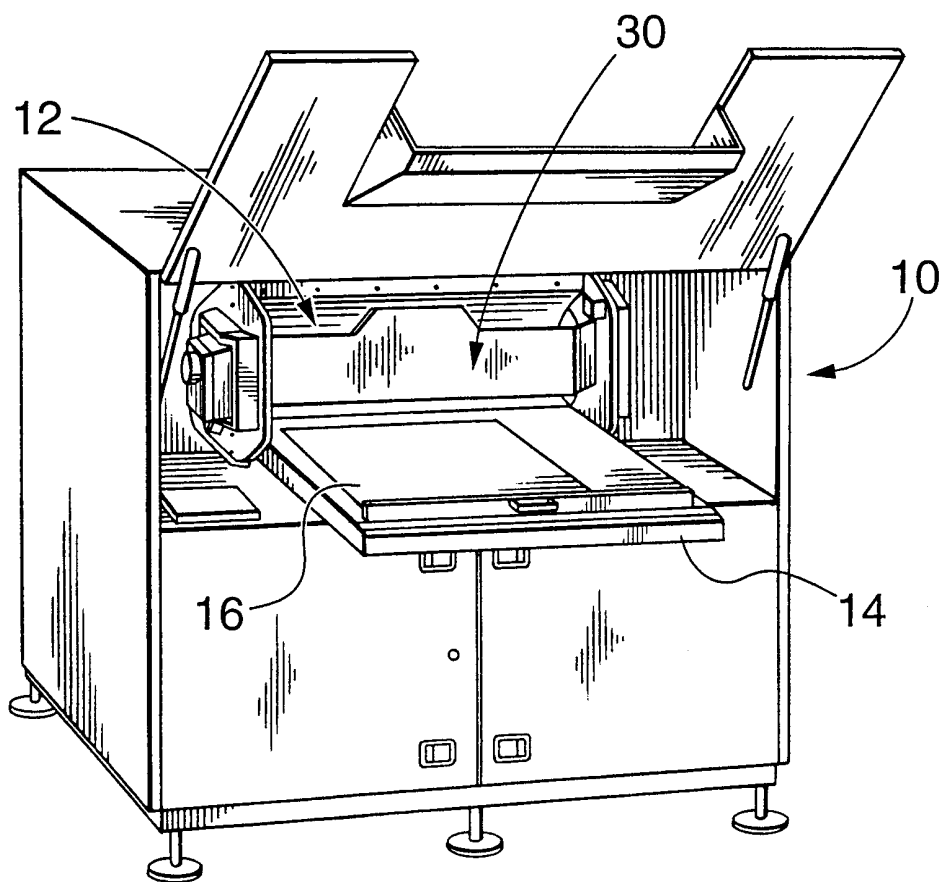


FIG. 2

2/6

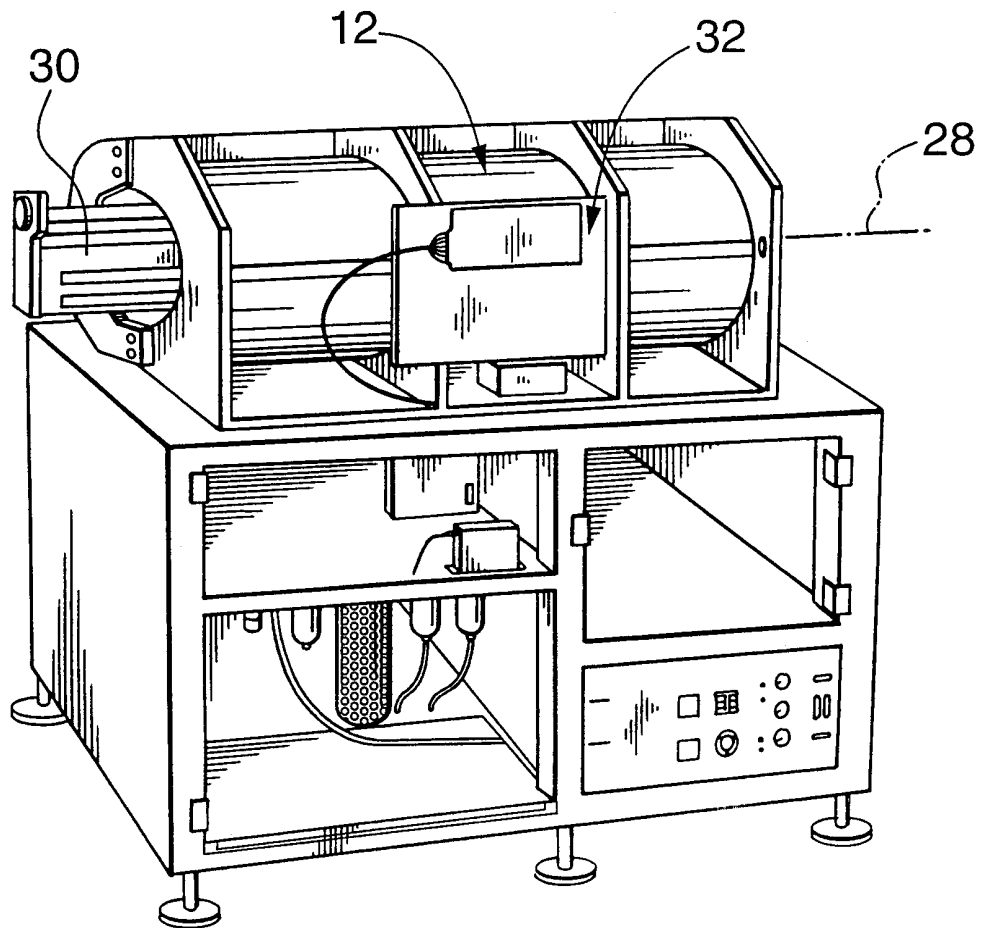


FIG. 3

3/6

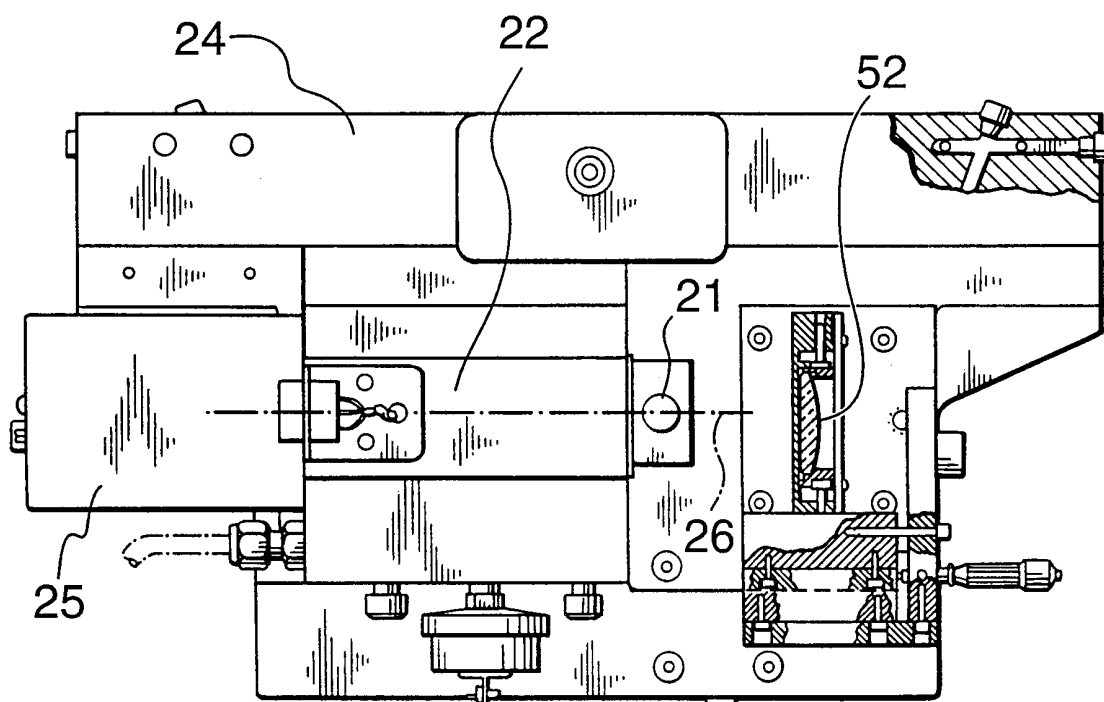


FIG. 4

4/6

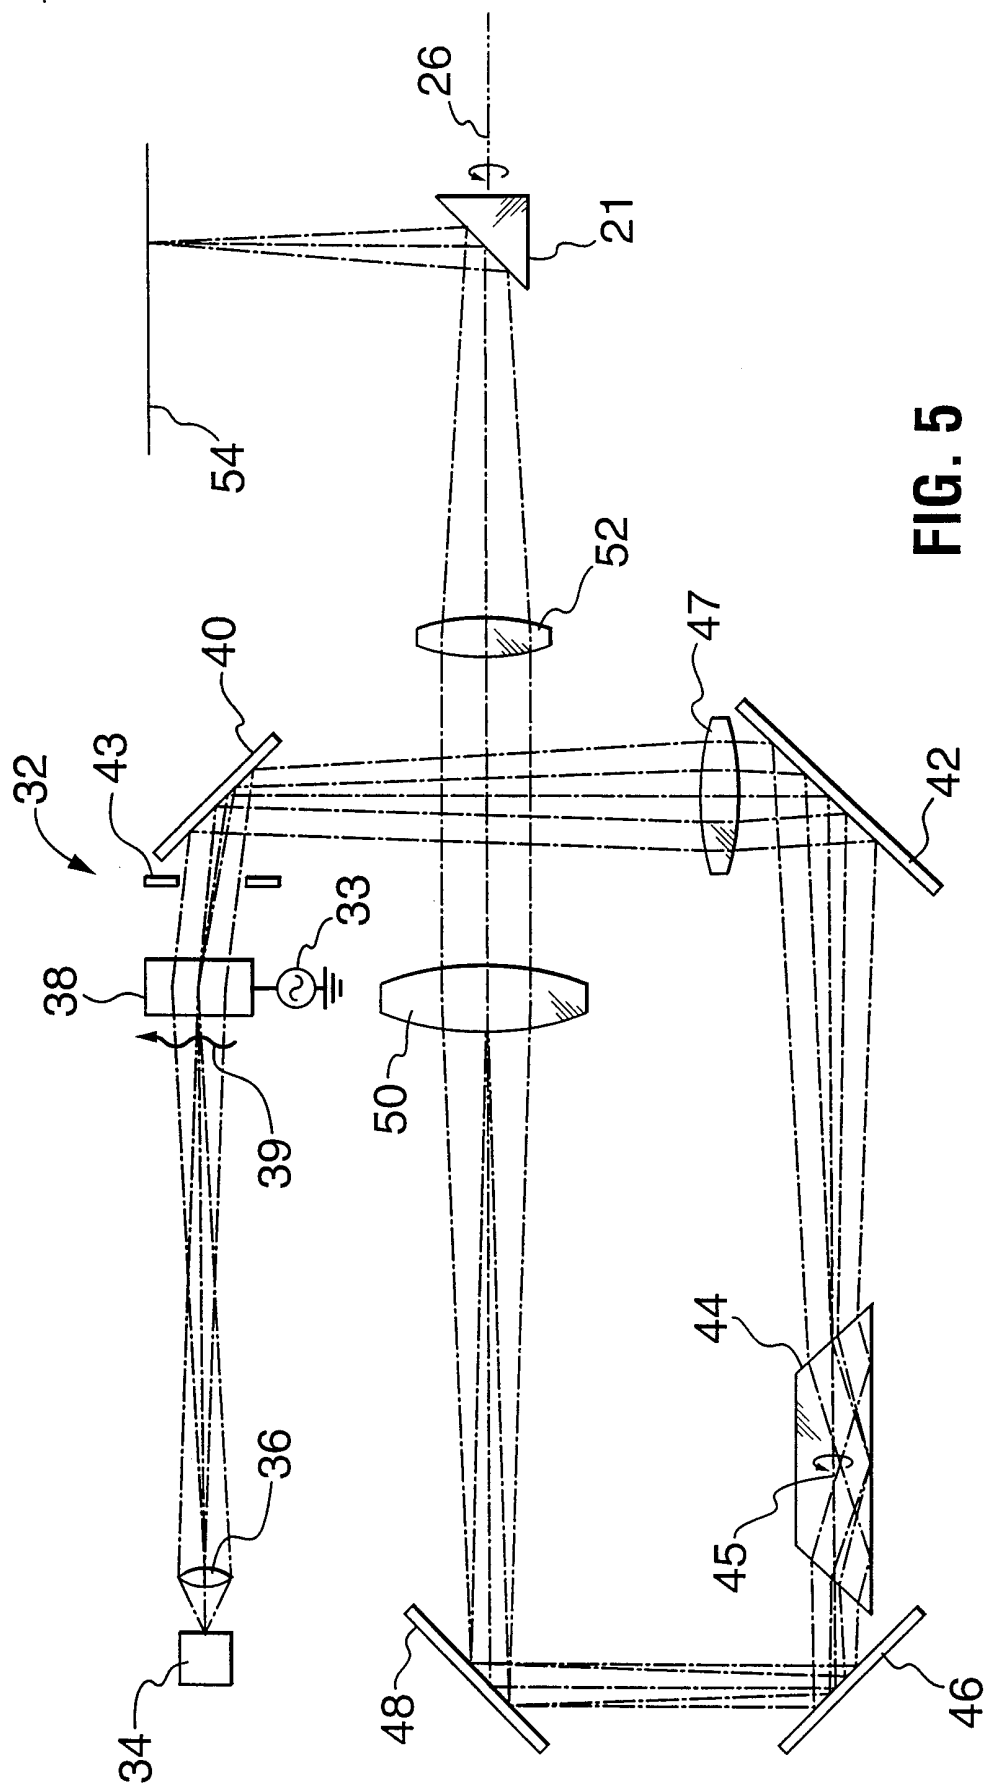


FIG. 5

5/6

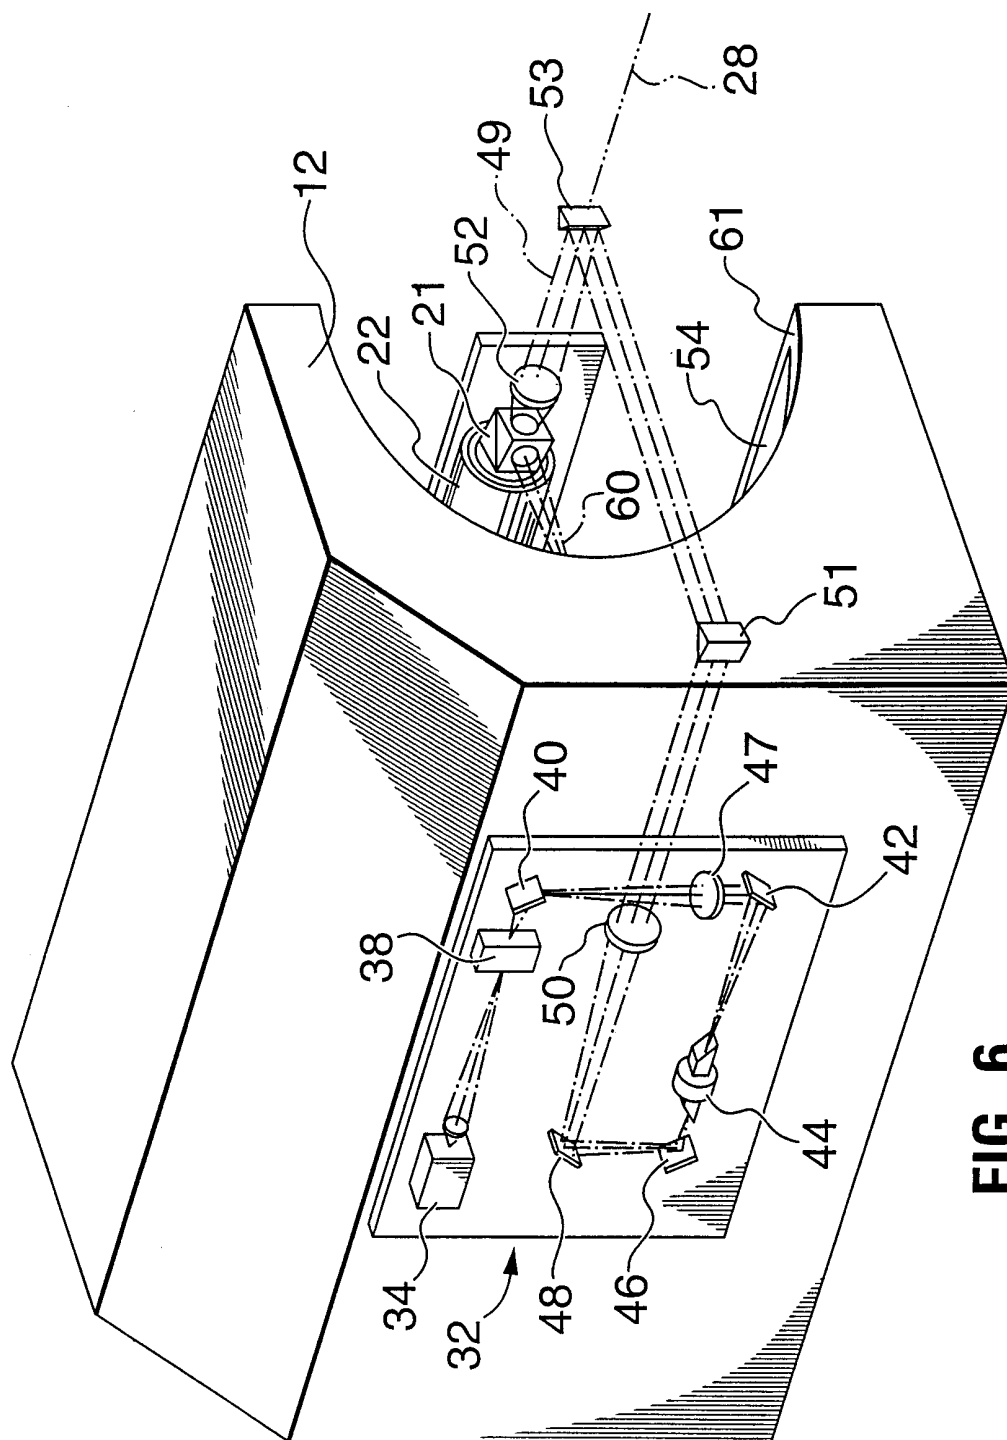


FIG. 6

6/6

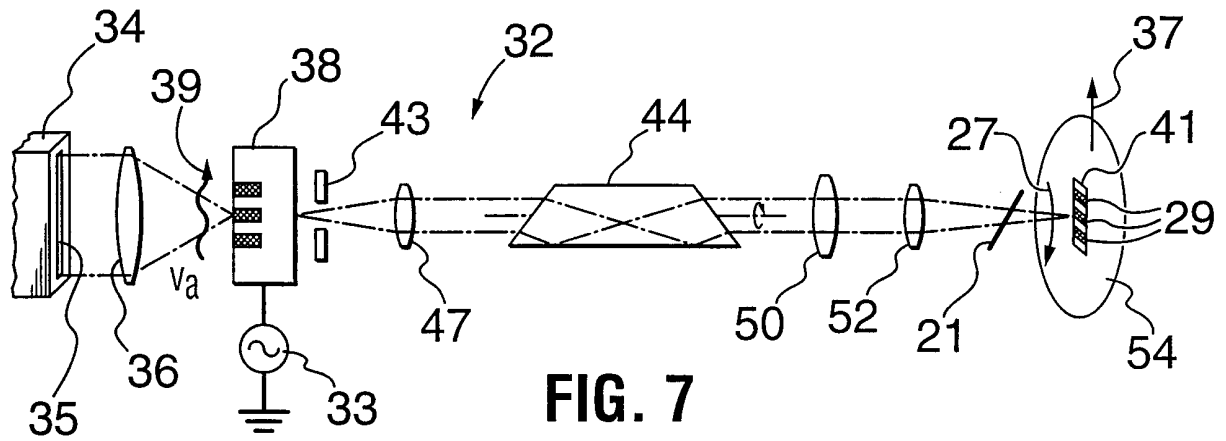


FIG. 7

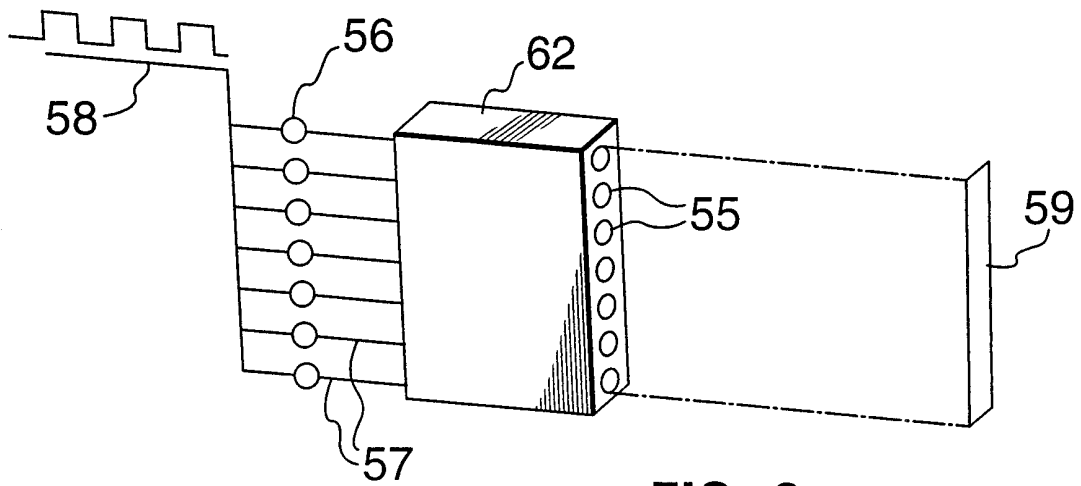


FIG. 8

INTERNATIONAL SEARCH REPORT

Int. No. Application No

PCT/CA 99/00421

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N1/06 H04N1/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	US 5 923 359 A (MONTGOMERY DEREK G) 13 July 1999 (1999-07-13) the whole document ---	1-9
Y	US 5 532 730 A (AKANABE YUICHI) 2 July 1996 (1996-07-02) column 5, line 44 -column 8, line 10; figure 1 ---	1,3-9
Y	US 5 196 949 A (SWANBERG MELVIN E) 23 March 1993 (1993-03-23) column 1, line 48 -column 2, line 9 ---	1,3-9
A	US 4 357 627 A (JOHNSON RICHARD V) 2 November 1982 (1982-11-02) abstract --- -/--	1,3,4,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 January 2000

Date of mailing of the international search report

18/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hazel, J

INTERNATIONAL SEARCH REPORT

Int. Serial Application No

PCT/CA 99/00421

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 3 590 248 A (CHATTERTON EDWARD J JR)</p> <p>29 June 1971 (1971-06-29)</p> <p>abstract</p> <p>-----</p>	2

INTERNATIONAL SEARCH REPORT

Information on patent family members

Serial Application No

PCT/CA 99/00421

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5923359	A	13-07-1999	NONE	
US 5532730	A	02-07-1996	JP 7104208 A	21-04-1995
US 5196949	A	23-03-1993	NONE	
US 4357627	A	02-11-1982	JP 1673865 C	26-06-1992
			JP 3038571 B	11-06-1991
			JP 56167120 A	22-12-1981
US 3590248	A	29-06-1971	NONE	