



US 20100046401A1


(19) **United States**(12) **Patent Application Publication**  
**Wright et al.**(10) **Pub. No.: US 2010/0046401 A1**(43) **Pub. Date: Feb. 25, 2010**(54) **SIP-BASED SESSION CONTROL****Related U.S. Application Data**(75) Inventors: **Steven A. Wright**, Roswell, GA (US); **Albert Whited**, Atlanta, GA (US); **Thomas A. Anschutz**, Conyers, GA (US); **Randy Zimler**, Gainesville, GA (US)

(63) Continuation of application No. 11/026,228, filed on Dec. 30, 2004, now Pat. No. 7,630,328.

**Publication Classification**(51) **Int. Cl.**  
**H04J 3/22** (2006.01)  
**H04L 12/16** (2006.01)(52) **U.S. Cl.** ..... **370/260; 370/467**(57) **ABSTRACT**

These exemplary embodiments utilize Sessions Initiation Protocol (SIP) for admission control. The use of the SIP allows a SIP server itself to perform the admission control function. The use of RSVP linkages is reduced. The use of SIP for admission control allows an application to communicate, or "talk," to a network and to request that resources within the network be reserved. Any communications device that uses sessions may utilize the SIP protocol for admission control. The SIP protocol may be used for unicast and multicast media sessions including video-on-demand and/or multicast video access control.

Correspondence Address:  
**AT&T Legal Department - CC**  
**Attn: Patent Docketing**  
**Room 2A-207, One AT&T Way**  
**Bedminster, NJ 07921 (US)**

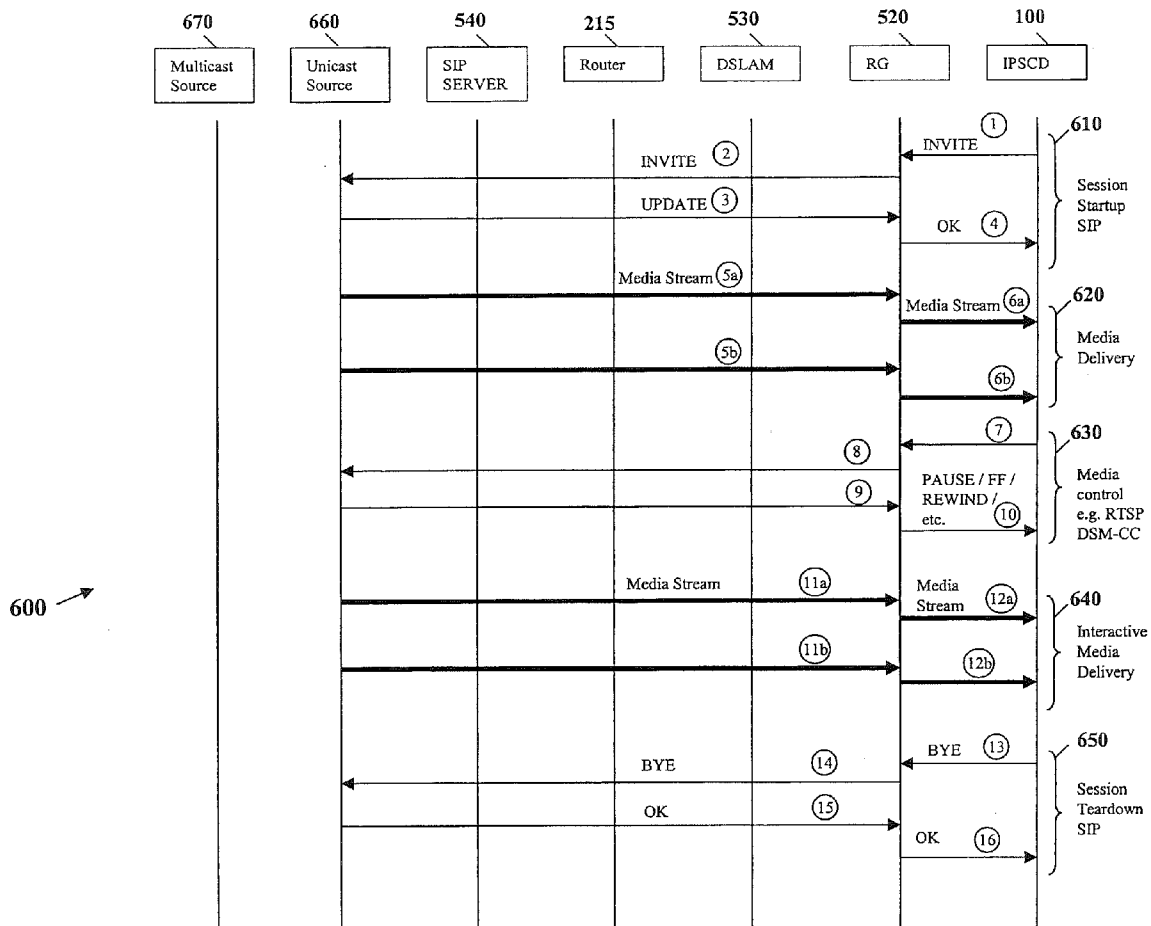(73) Assignee: **AT&T Intellectual Property I, L.P., f/k/a/ BellSouth Intellectual Property Corporation**, Wilmington, DE (US)(21) Appl. No.: **12/608,179**(22) Filed: **Oct. 29, 2009**

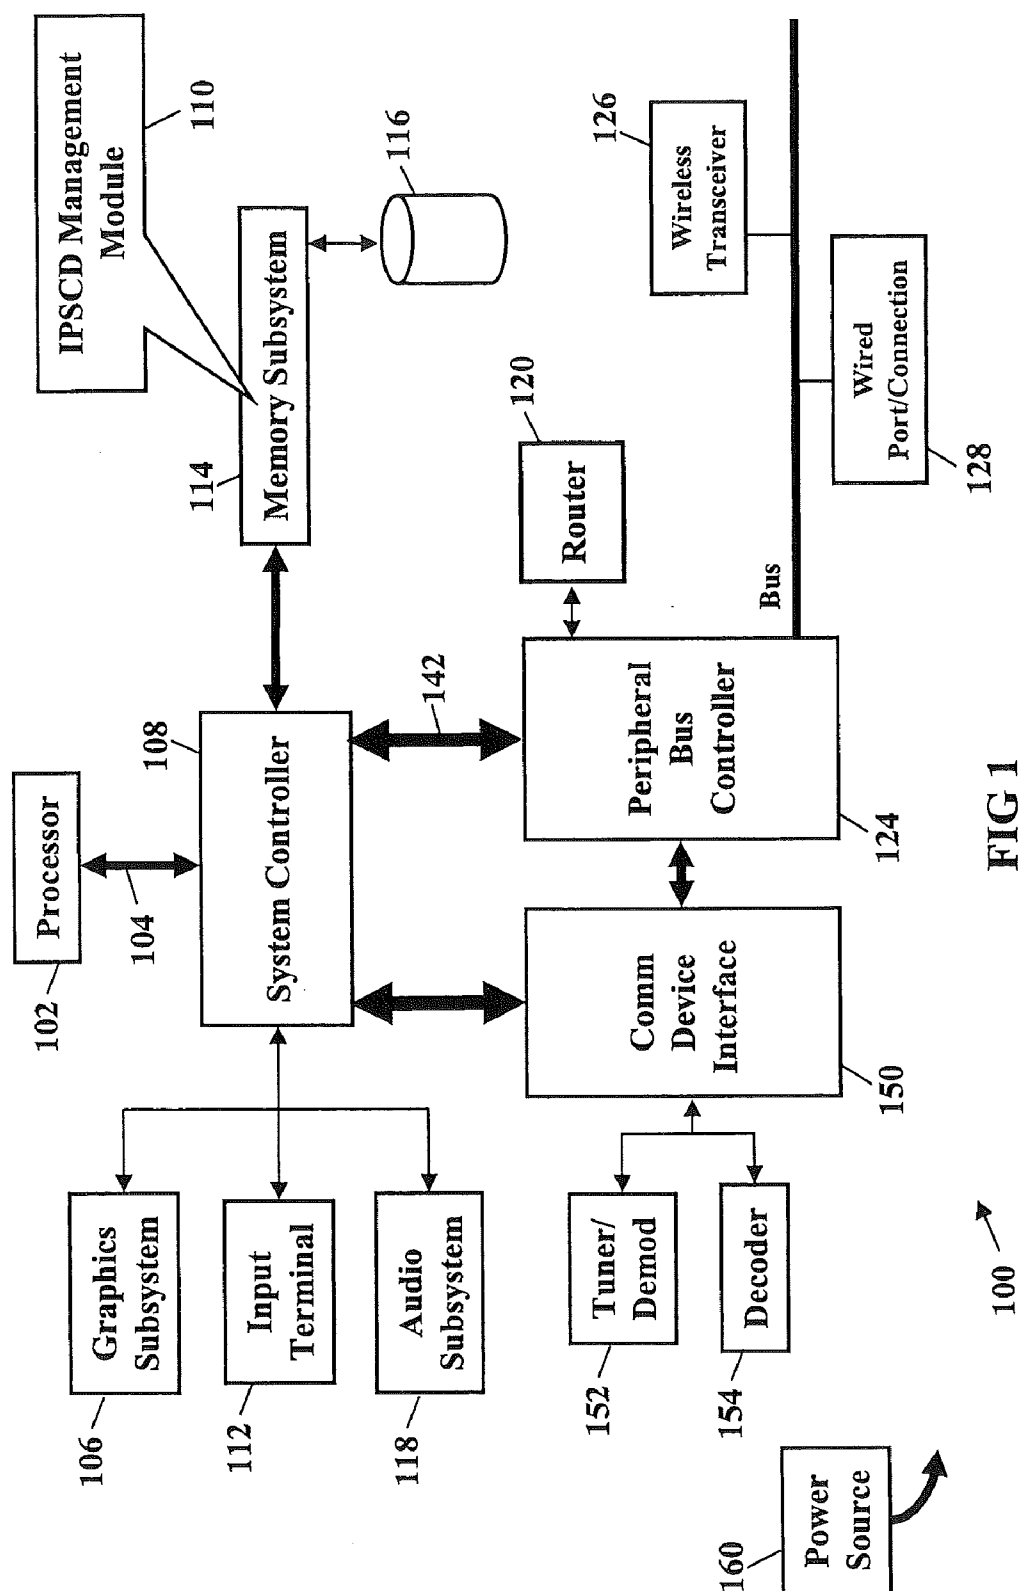


FIG 1

100

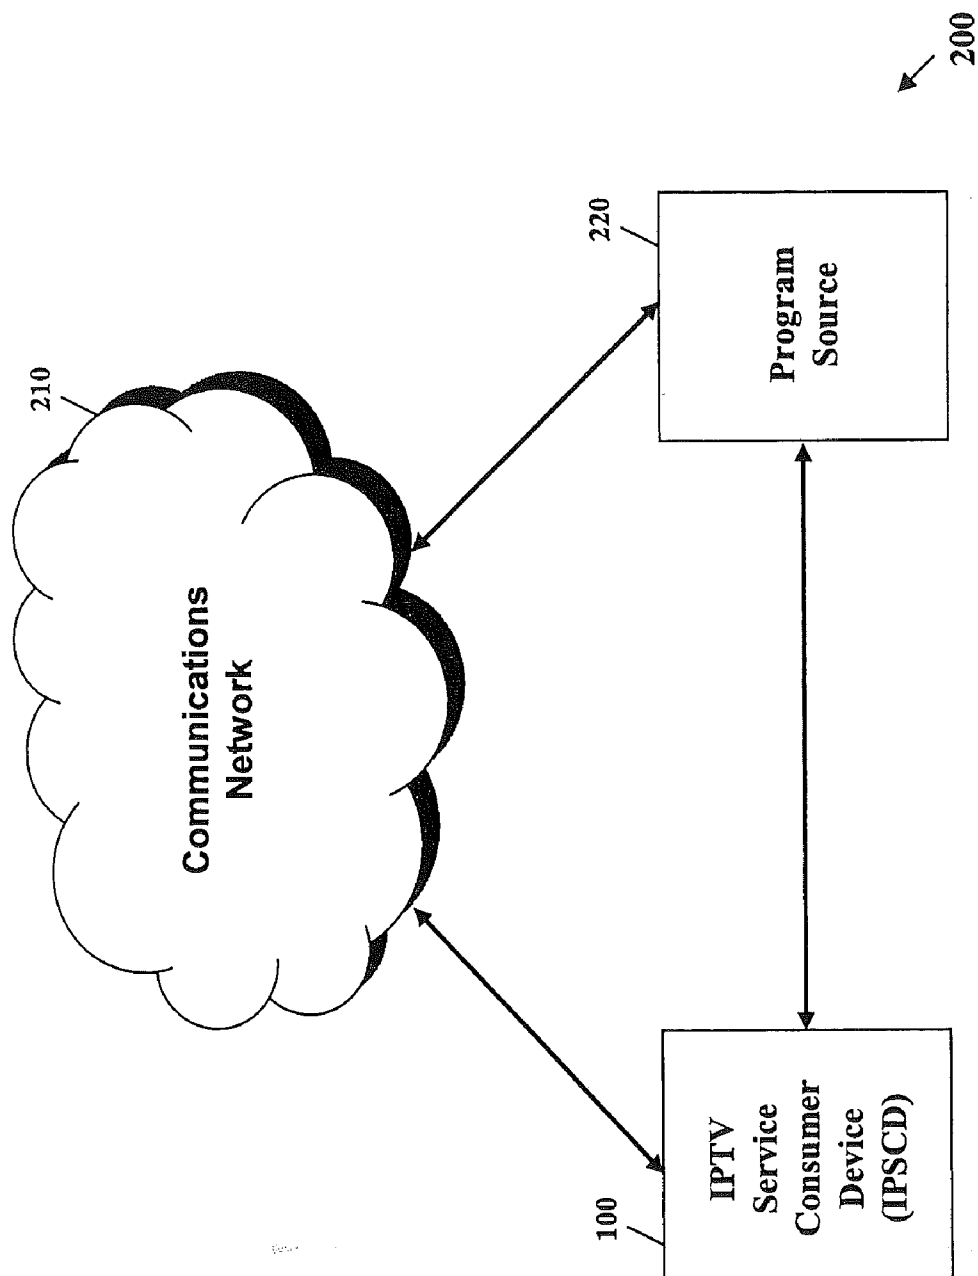
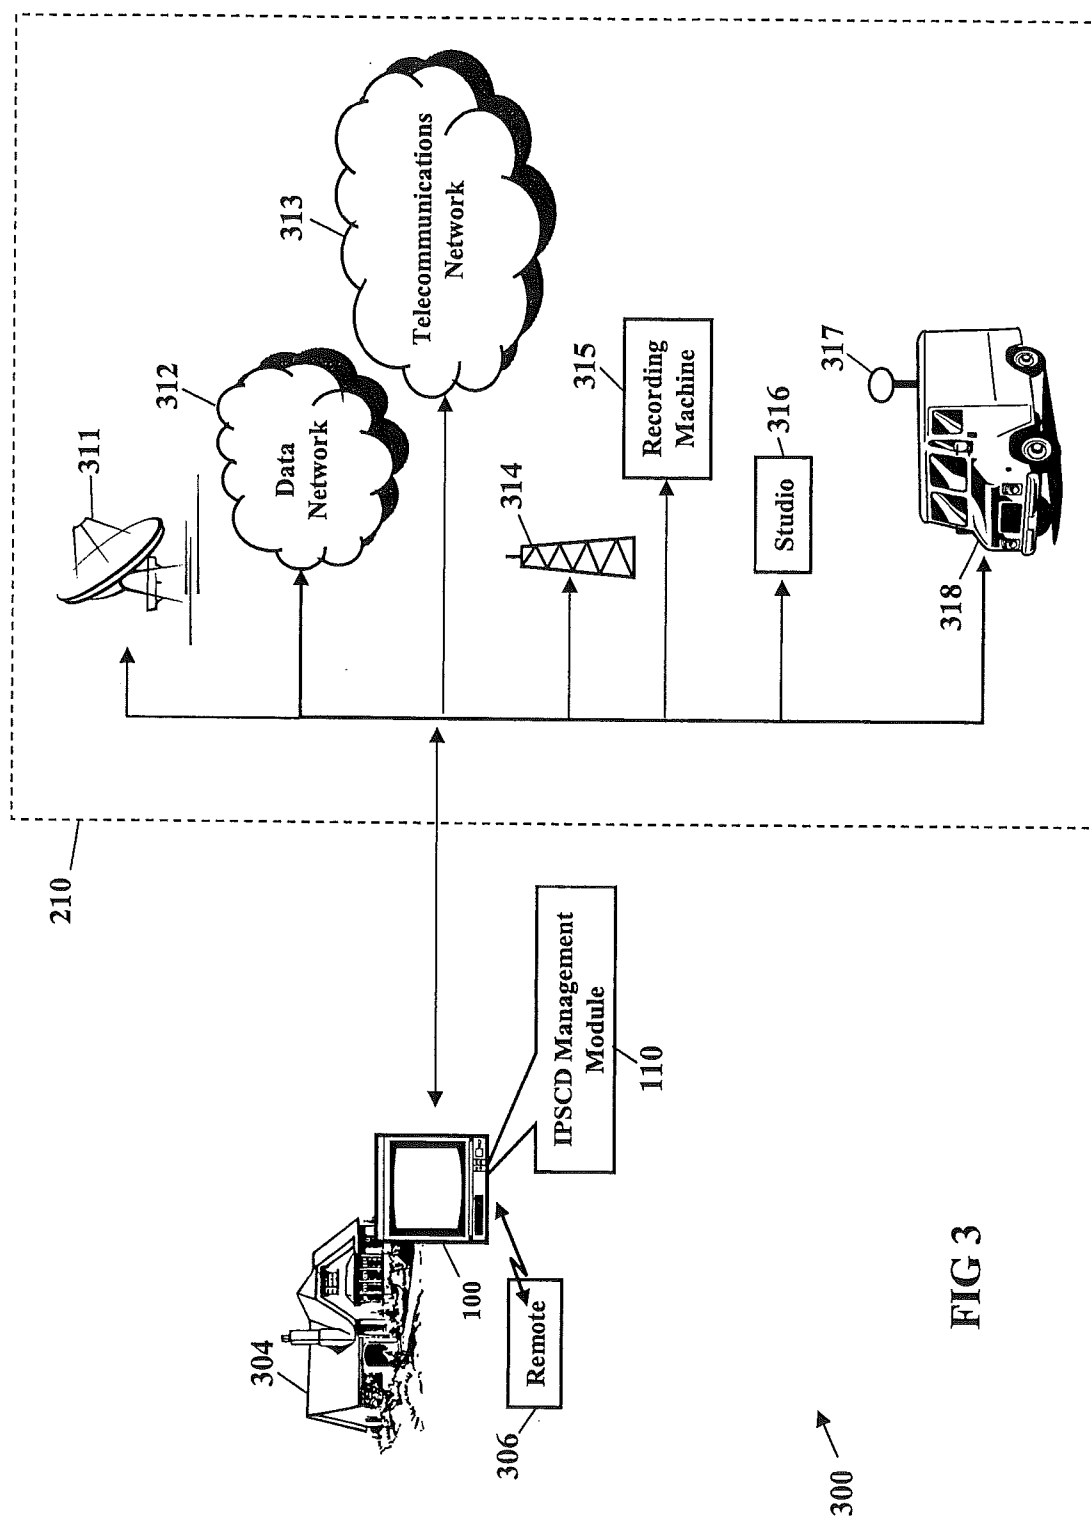
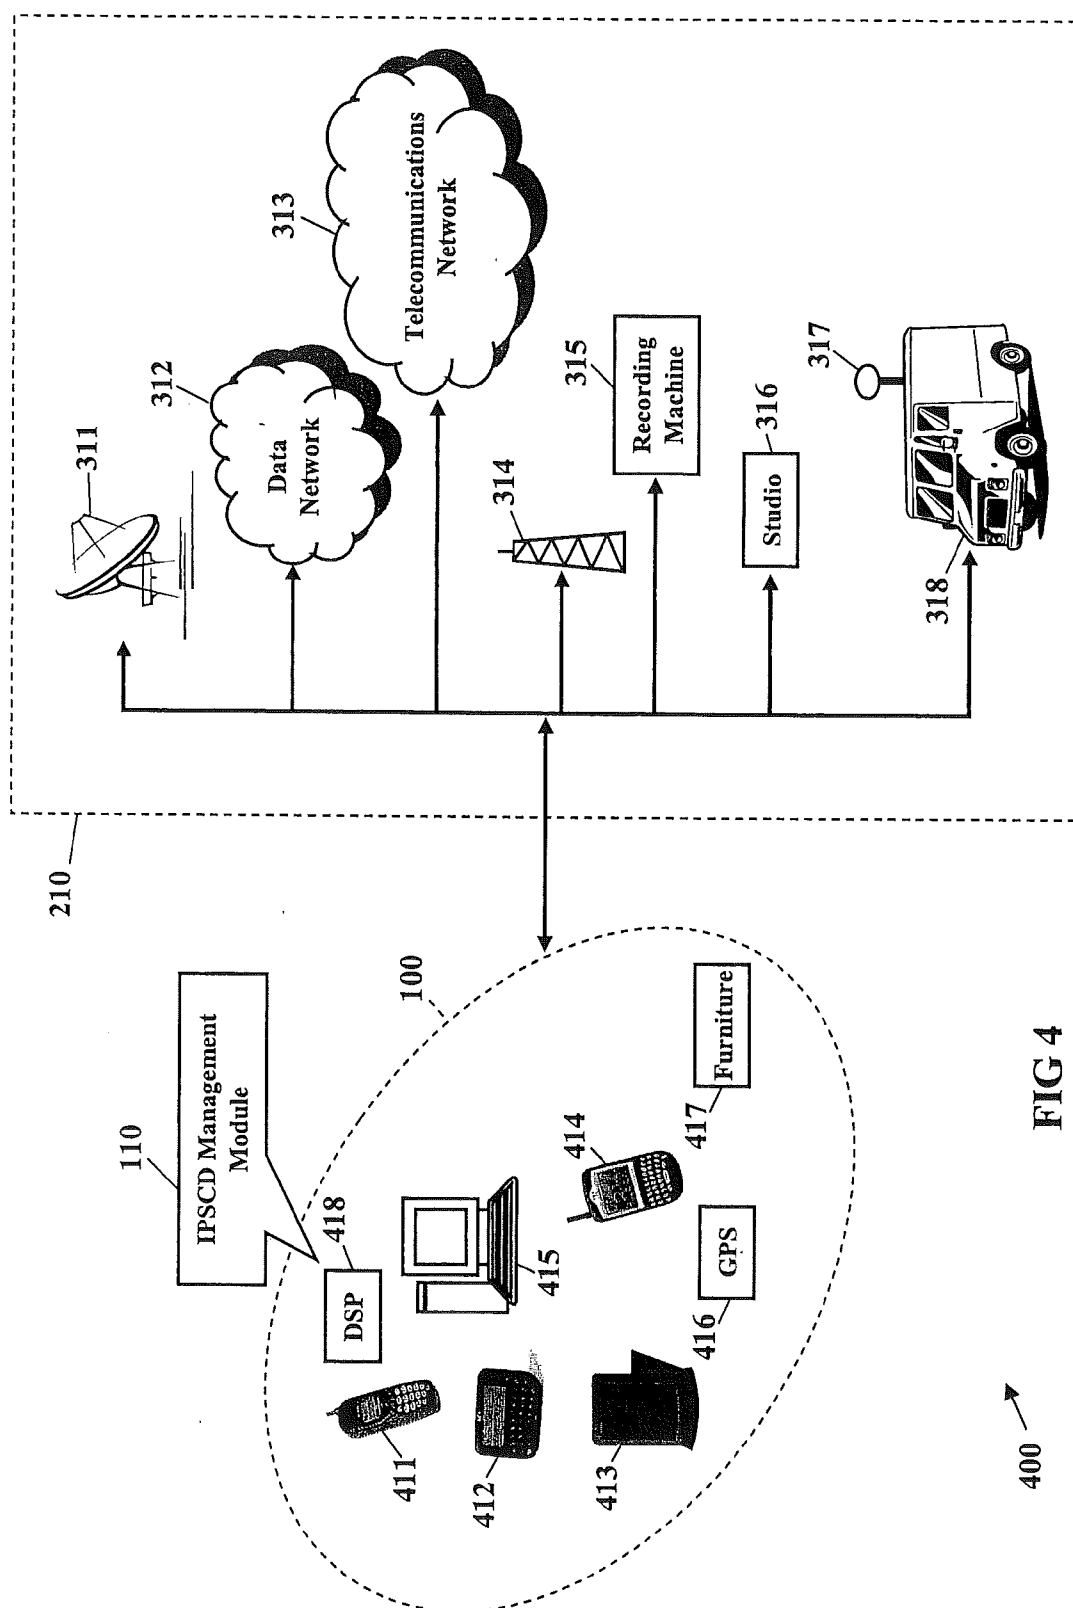


FIG 2





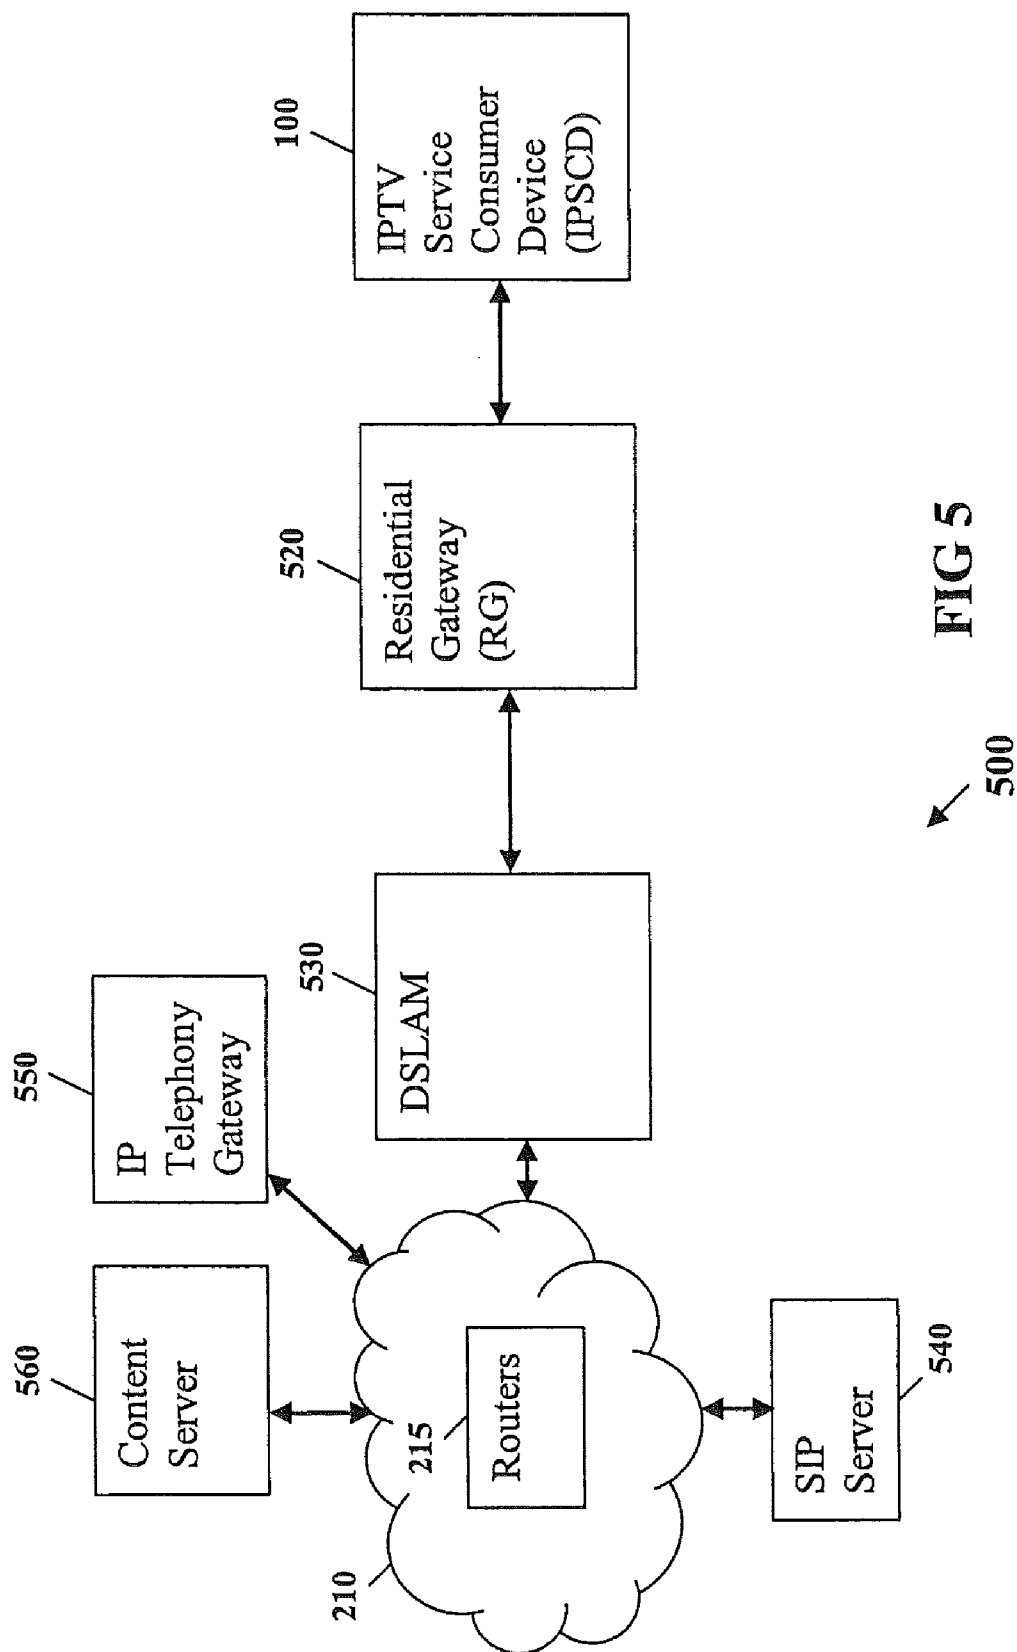


FIG 5

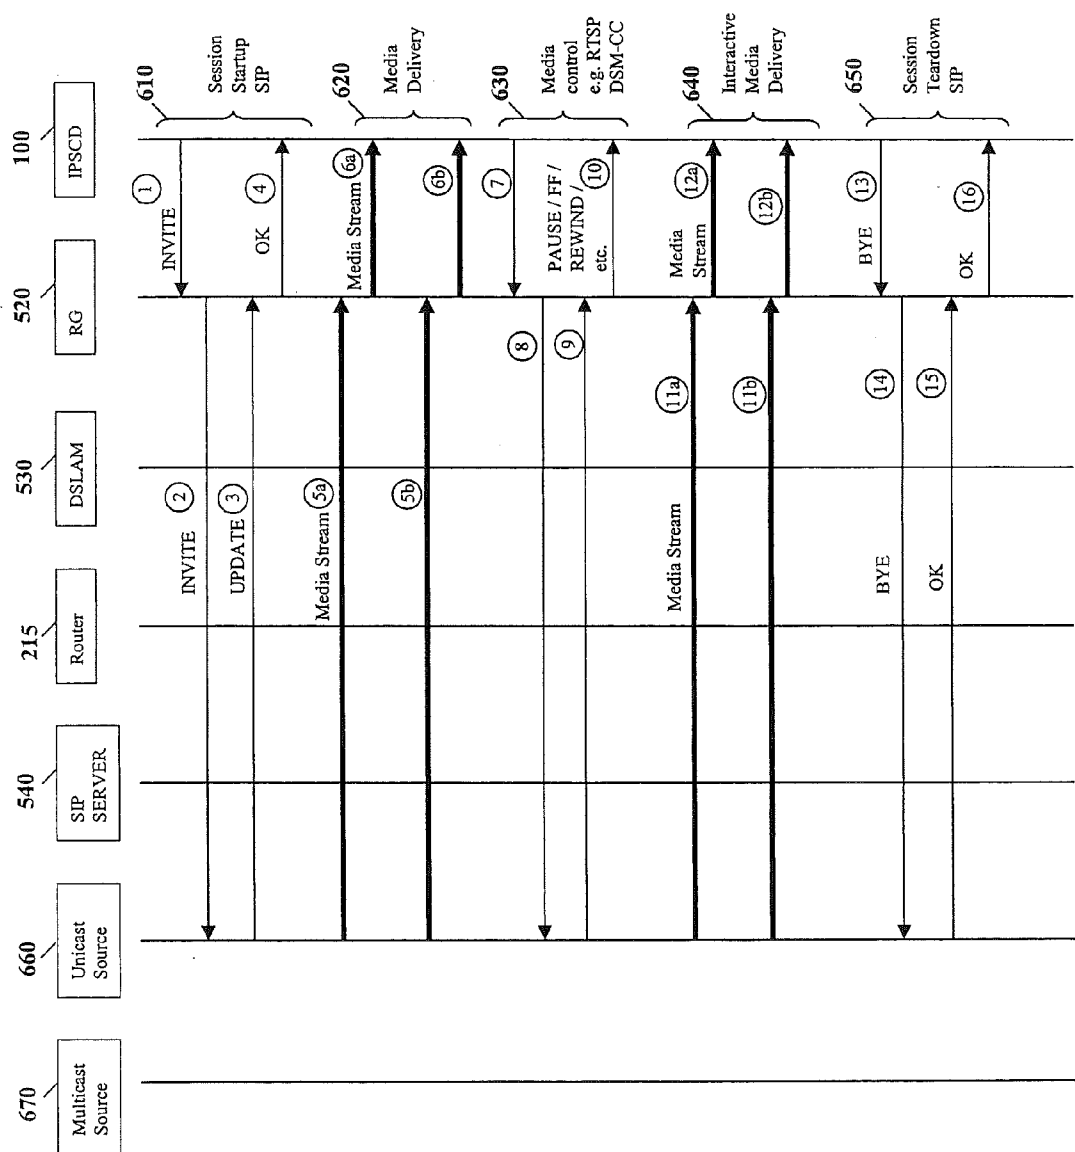


FIG 6

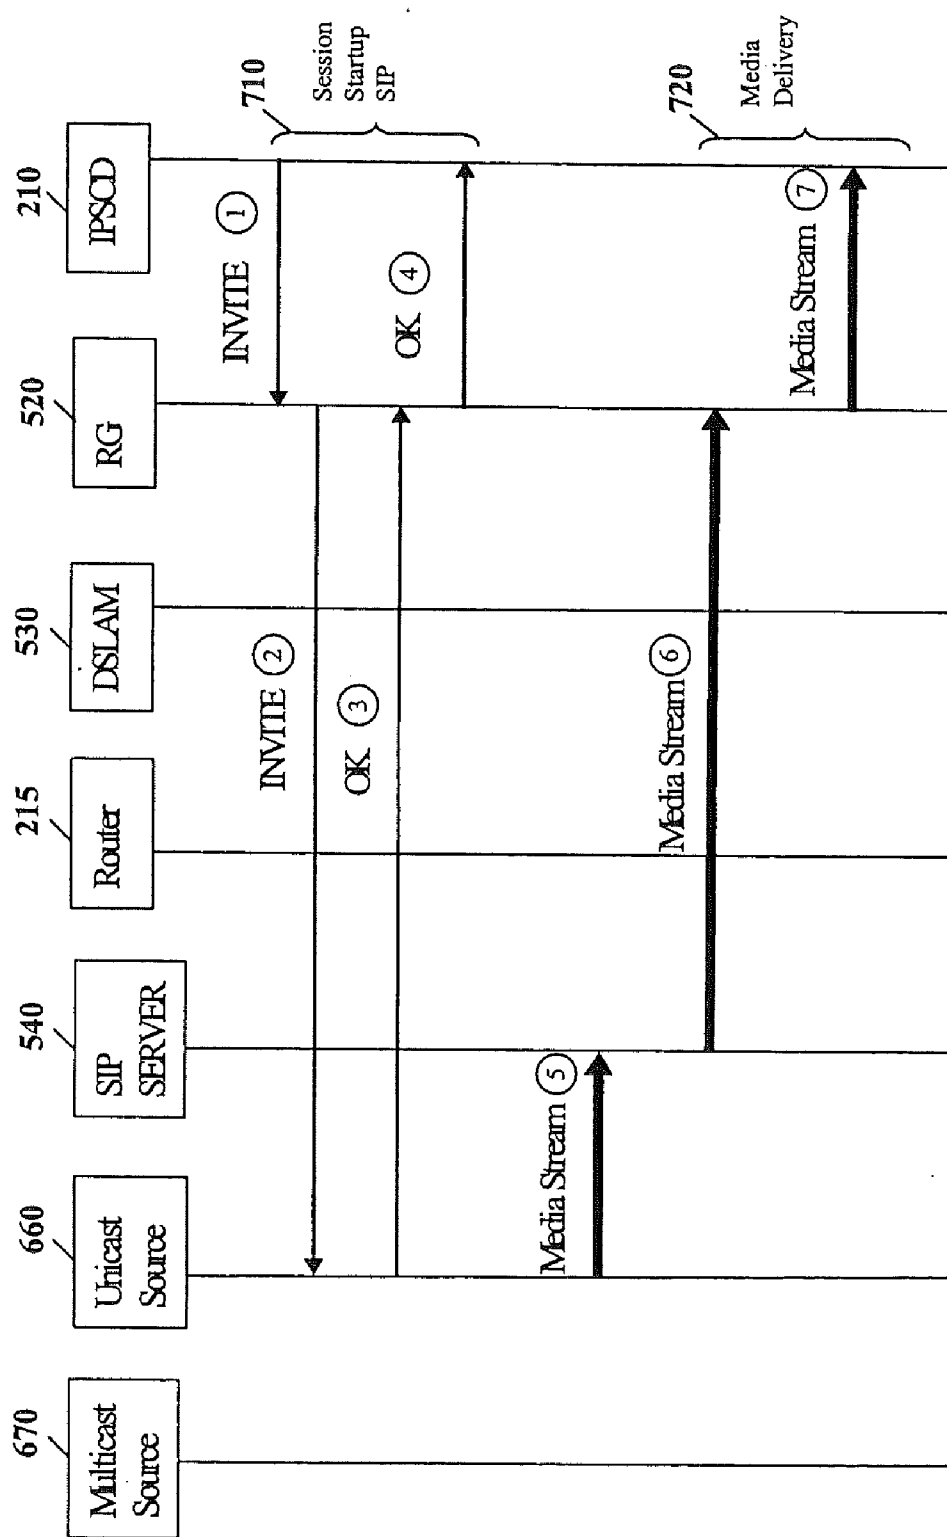


FIG 7

700



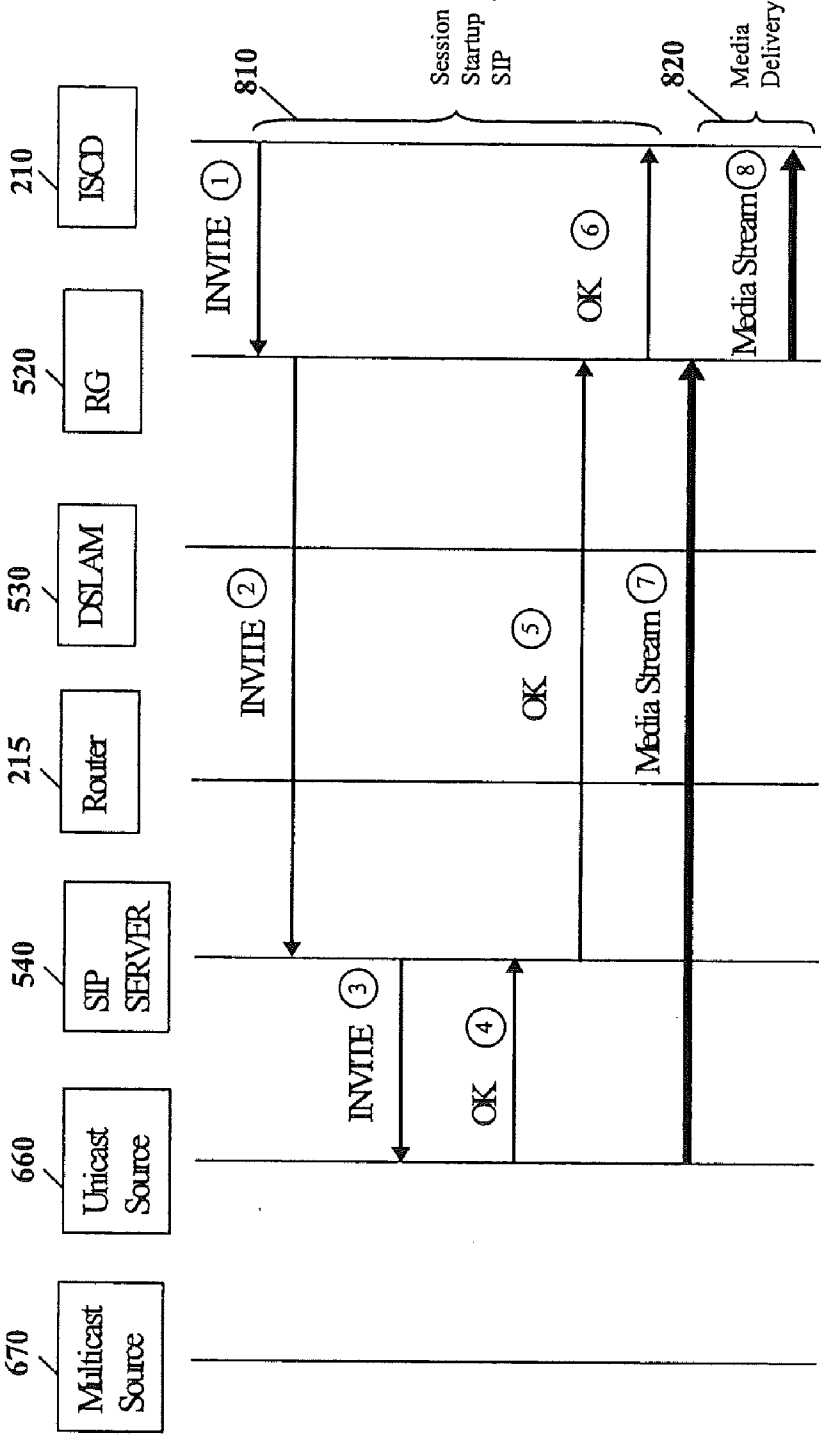


FIG 8

800

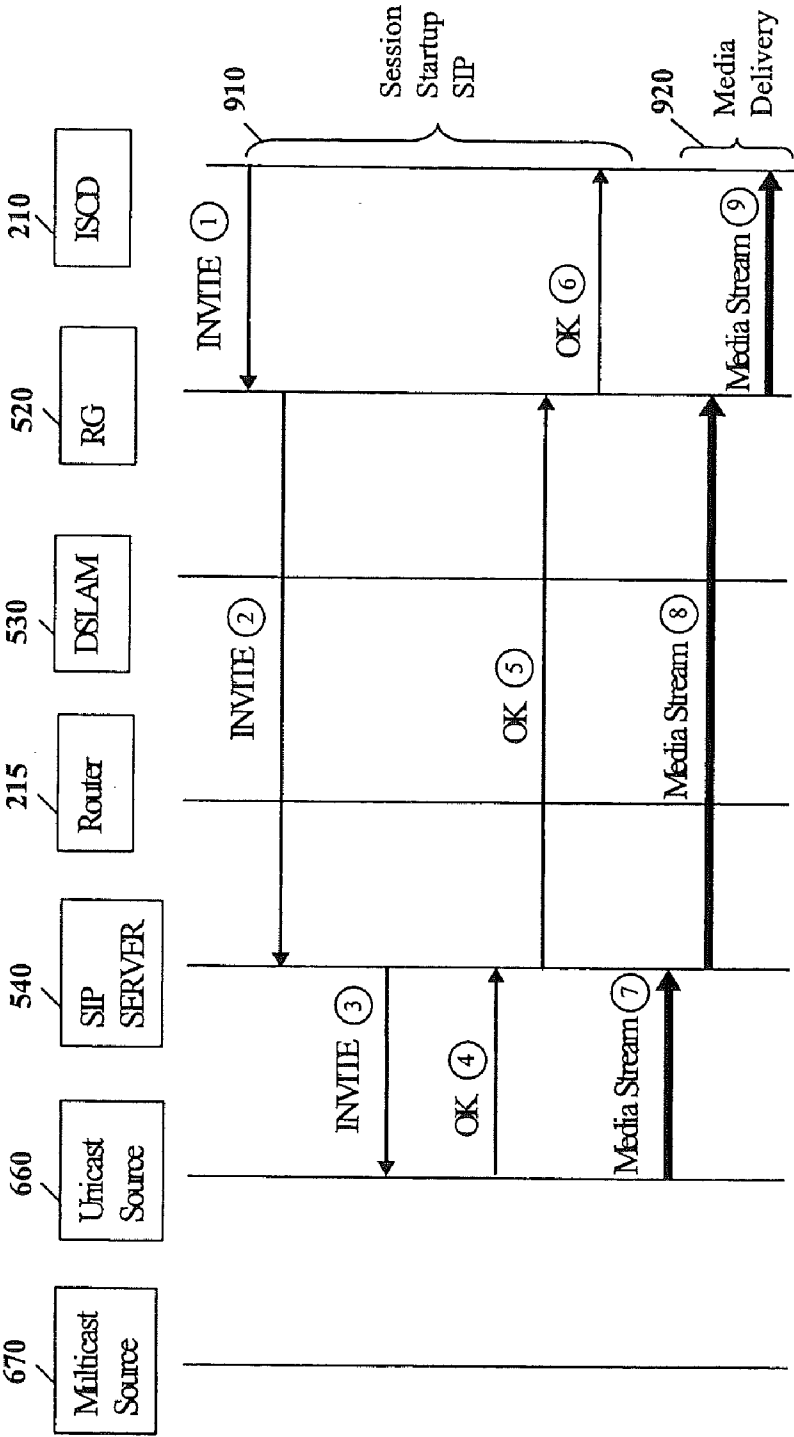


FIG 9

900

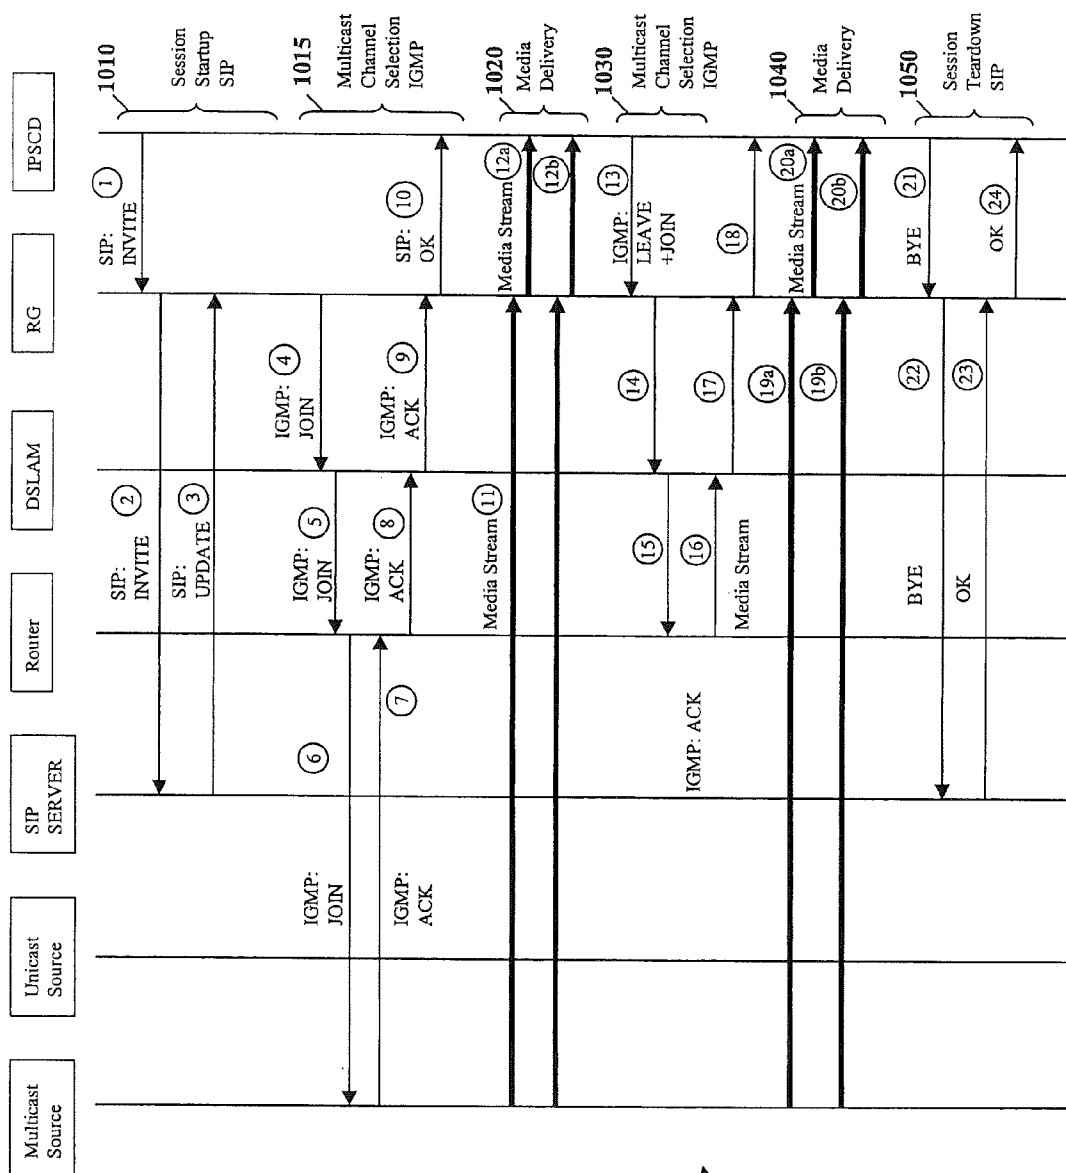


FIG 10

1000

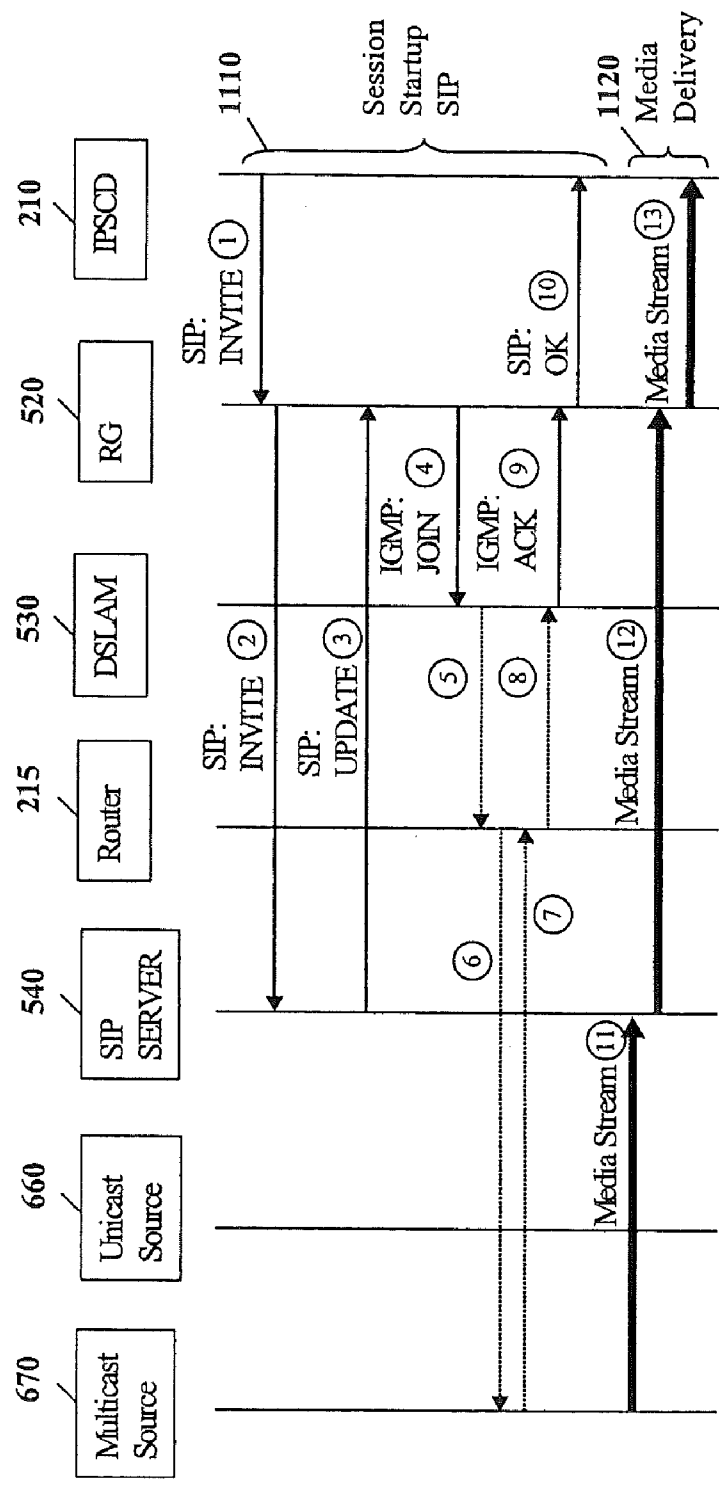


FIG 11

1100

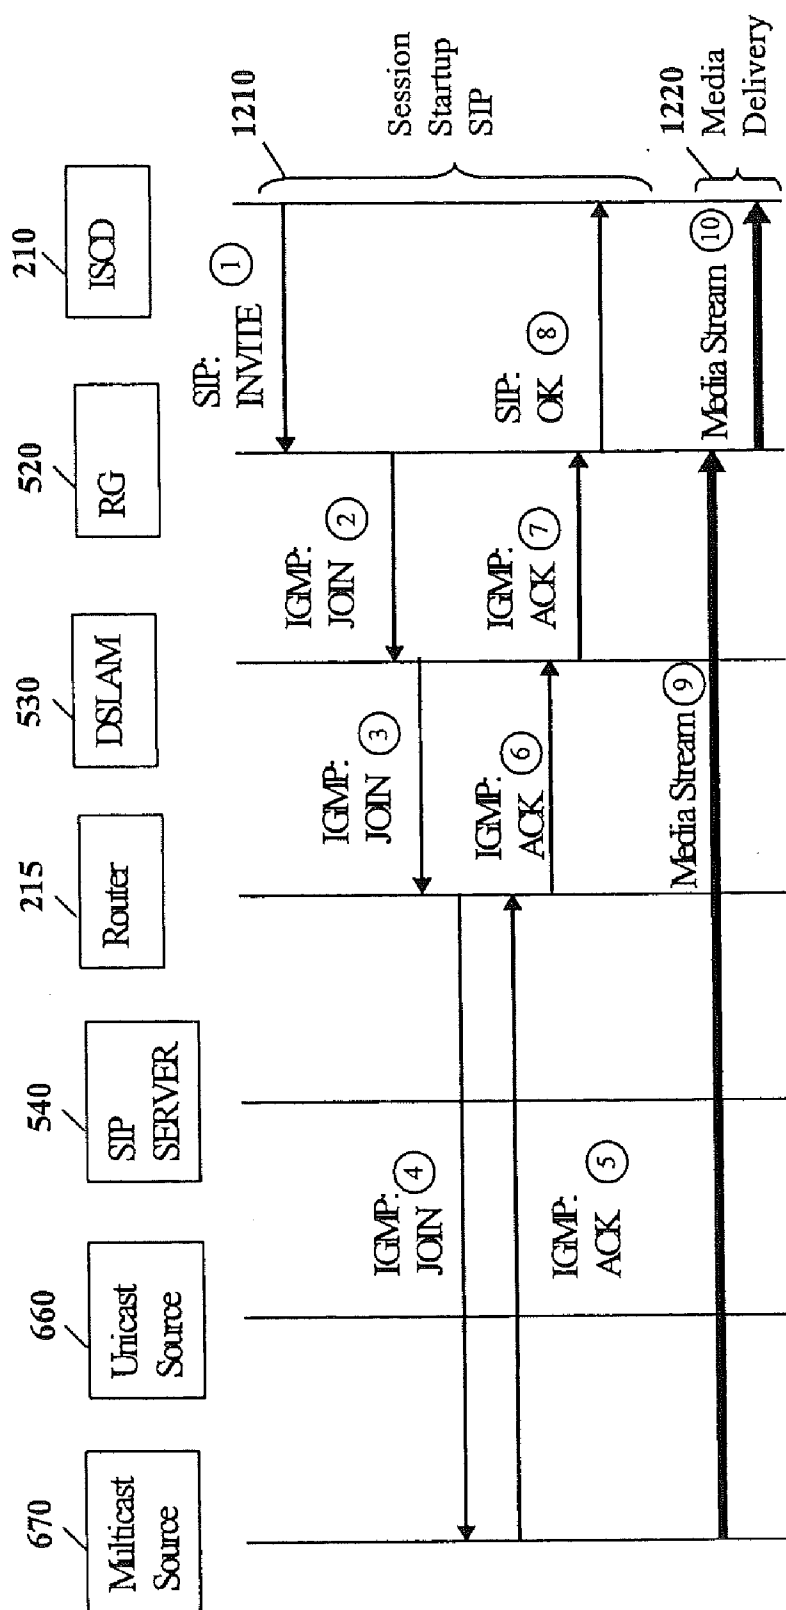


FIG 12

1200

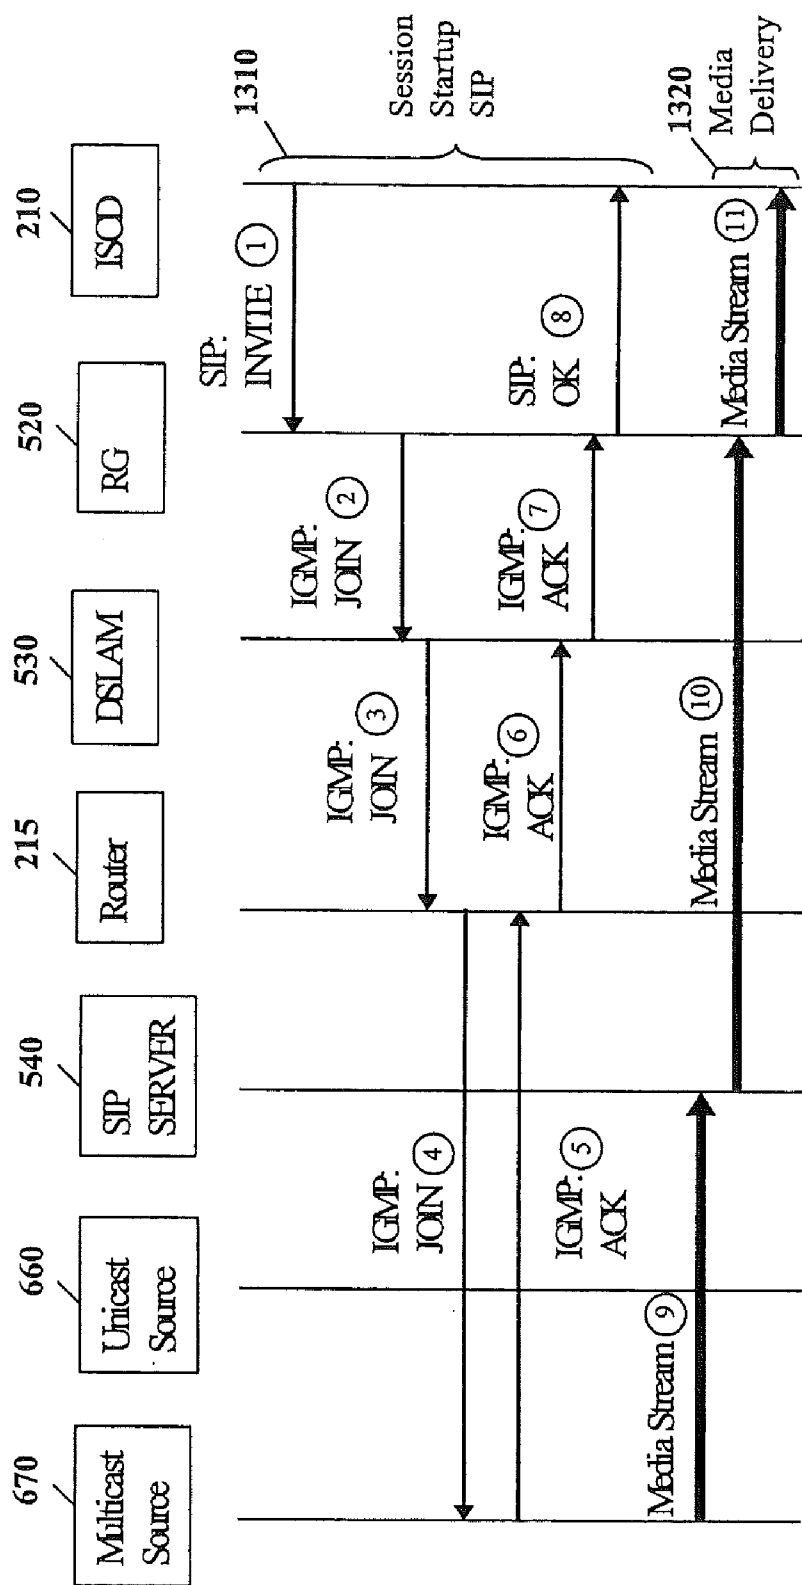


FIG 13

1300

## SIP-BASED SESSION CONTROL

### CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. patent application Ser. No. 11/026,228 filed Dec. 30, 2004, the contents of which are incorporated herein by reference in their entirety. This application also relates to U.S. patent application Ser. No. 11/026,248 filed Dec. 30, 2004, of which the “Brief Summary of the Invention: and Detailed Description of the Invention” sections are incorporated herein by reference in their entirety.

### NOTICE OF COPYRIGHT PROTECTION

[0002] A portion of the disclosure of this patent document and its figures contain material subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, but otherwise reserves all copyrights whatsoever.

### BACKGROUND

[0003] The exemplary embodiments generally relate to computers and to communications and, more particularly, to admission requests and session control in computer networking.

[0004] Network admission control is important when delivering service applications to customers. Should a customer request Internet access, video-on-demand, video teleconferencing, IP telephony, interactive gaming, or many other service applications, the service provider must know that adequate bandwidth exists within the network infrastructure. When the customer pays for such service applications, the customer reasonably expects that the available network bandwidth will support such an application. For example, when a customer clicks a pay-per-view button and pays for a movie, that customer expects a “crystal clear” experience. If, however, network bandwidth is only marginally available and the quality of the experience is poor, the customer is understandably dissatisfied. Before a customer is offered a service application, the service provider should know whether that service application can be delivered and supported at a level of quality the customer expects.

[0005] Network admission control protocols help determine whether network infrastructure can support a service application. Network admission controls represent an interchange of information between the network elements that support these applications and the elements that initiate the applications. A customer can be offered multiple applications, such as multicast videos (that resemble broadcast TV), unicast video (that resemble pay-per-view services), games, and even voice services. Whatever service the customer is offered, the network must be able to support the service. For the service application, there needs to be assurances that the long-lived session as a whole will have the results as necessary to normally operate. For example, in order to coordinate and make sure the next TV that gets turned on, or the next pay preview or the next phone call works, the signaling within the network must determine that the service can be supported. If the signaling determines that the service can be supported, the service is implemented. If, however, the signaling says “no”—the service cannot be supported—the customer’s request is deferred. That is, the customer receives some kind of “busy” signal, pop-up message, or other indication that the

customer’s request will be queued and fulfilled as soon as bandwidth becomes available to support the quality needed for the requested application and/or service.

[0006] Network admission control protocols, then, help determine whether network infrastructure can support a service application. Problems with admission control are usually solved by protocols designed specifically for Quality of Service concerns. Admission control in IP networks usually utilizes RSVP protocols. RSVP protocols are typically used between computers and routers to reach reservations of capacity in IP packet networks. A Sessions Initiation Protocol (SIP) server launches an RSVP protocol, and the RSVP protocol creates the resources in the network or the resource reservation network. The problem, however, is that the RSVP linkage is a cumbersome mapping within the SIP server. Another problem is that the RSVP linkage is inefficient when trying to construct admission control across multiple services with different bandwidth requirements and with different service characteristics (such as in the case of unicast and multicast services). What is needed, then, is an admission control protocol that can successfully support multiple service applications, such as multicast service applications and unicast service applications.

### SUMMARY

[0007] According to exemplary embodiments, the needs described above and other are met by utilizing Sessions Initiation Protocol (SIP) for admission control. Some of the exemplary embodiments described herein allow the SIP server itself to perform the admission control function. Other exemplary embodiments allow SIP-based admission control via a residential gateway, DSLAM, or multimedia content source. The use of RSVP linkages is reduced. The use of SIP for admission control allows an application and/or device to communicate, or “talk,” to a network, request that resources within the network be reserved, and receive the requested resource to communicate with a private communications address. Any communications device that uses sessions may utilize the SIP protocol for admission control.

[0008] According to an exemplary embodiment, a method for providing a media source using SIP for admission control includes receiving a session initiation protocol invitation from a multimedia device to request a media stream, communicating the session initiation protocol invitation to a multimedia content server, receiving a session initiation protocol confirmation from the multimedia content server to communicate the media stream, receiving and identifying the media stream from the multimedia content server, and communicating the media stream to a private communications address of the multimedia device. The invitation includes the private communications address for communicating with the multimedia device, and the confirmation includes a communications identifier for identifying the media stream. In further embodiments, the method includes communicating the confirmation to the multimedia device. The method may continue with presentation of the media stream to the multimedia device. And, during communication of the media stream to the multimedia device, a user may activate a media control function to control presentation and communication of the media stream. For example, the presentation function may include a fast-forward function, a rewind function, a pause function, a stop function, a bookmark function, a scene jump function, a status function, and/or an alternate presentation function.

[0009] According to another exemplary embodiment, a method for providing a media stream to a multimedia system includes ordering a media stream via a session initiation protocol invitation over a communications network to a content media source and communicating the media stream to a private communications address of a multimedia device. Still another exemplary embodiment is directed to a method for providing a media stream to a multimedia system that includes initiating an order for a media stream via a session initiation protocol invitation over a communications network, translating the session initiation protocol invitation to an internet group management protocol join, communicating the internet group management protocol join to order the media stream from a multicast multimedia content server, receiving an internet group management protocol acknowledgement, and identifying the media stream and communicating the media stream to a private communications address of a multimedia device. The multicast multimedia content server accesses, stores, and manages the media stream. And, the acknowledgement includes the communications identifier for identifying the media stream.

[0010] Another exemplary embodiment describes a multimedia gateway device that includes a processing device that uses a session initiation protocol communication with a multimedia device to order a media stream from a multimedia content server over a communications network. The processing device includes instructions for receiving the session initiation protocol invitation from the multimedia device to request a media stream, for communicating the session initiation protocol invitation to the multimedia content server via the communications network, for receiving a session initiation protocol confirmation from the multimedia content server via the communications network to communicate the media stream, for receiving and identifying the media stream from the multimedia content server via the communications network, and for communicating the media stream to a private communications address of the multimedia device. And, similar to above, the invitation includes a private communications address for communicating with the multimedia device and the confirmation includes a communications identifier for identifying the media stream.

[0011] Still another exemplary embodiment describes a system that includes a media stream source in communication with a multimedia content server, the multimedia content server for accessing the media stream, managing interactive controls of the media stream, and communicating the media stream, and a processing device that uses a session initiation protocol communication of a multimedia device to order a media stream from a multimedia content server via a communications network.

[0012] Yet other exemplary embodiments describe computer program products to perform the methods described above. For example, an embodiment describes a storage medium on which is encoded instructions for initiating an order for a media stream via a session initiation protocol invitation over a communications network, for translating the session initiation protocol invitation to an internet group management protocol join, for communicating the internet group management protocol join to order the media stream from the at least one multicast multimedia content server, for receiving an internet group management protocol acknowledgement via the communications network, and for identifying the media stream and communicating the media stream to a private communications address of a multimedia device. And,

another exemplary embodiment describes a storage medium on which is encoded instructions for ordering a media stream via a session initiation protocol invitation over a communications network to a content media source and for communicating the media stream to a private communications address of a multimedia device.

[0013] Other systems, methods, and/or computer program products according to embodiments will be or become apparent to one with skill in the art upon review of the following drawings and detailed description. It is intended that all such additional systems, methods, and/or computer program products be included within and protected by this description and be within the scope of the present invention.

## DESCRIPTION OF THE DRAWINGS

[0014] The above and other embodiments, objects, uses, advantages, and novel features are more clearly understood by reference to the following description taken in connection with the accompanying figures, wherein:

[0015] FIG. 1 illustrates a block diagram of exemplary details of a multimedia device according to some of the embodiments of this invention;

[0016] FIG. 2 illustrates an exemplary operating environment for an interactive multimedia system according to some of the embodiments of this invention;

[0017] FIG. 3 illustrates another exemplary operating environment for an interactive multimedia system according to some of the embodiments of this invention;

[0018] FIG. 4 illustrates yet another exemplary operating environment for an interactive multimedia system according to some of the embodiments of this invention;

[0019] FIG. 5 illustrates still another exemplary operating environment for an interactive multimedia system according to some of the embodiments of this invention; and

[0020] FIGS. 6-13 illustrate exemplary media sessions according to some of the embodiments of this invention.

## DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0021] The exemplary embodiments now will be described more fully hereinafter with reference to the accompanying drawings. The exemplary embodiments may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. These embodiments are provided so that this disclosure will be thorough and complete and will fully convey the scope of the invention to those of ordinary skill in the art. Moreover, all statements herein reciting embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future (i.e., any elements developed that perform the same function, regardless of structure).

[0022] Thus, for example, it will be appreciated by those of ordinary skill in the art that the diagrams, flowcharts, illustrations, and the like represent conceptual views or processes illustrating systems, methods and computer program products embodying this invention. The functions of the various elements shown in the figures may be provided through the use of dedicated hardware as well as hardware capable of executing associated software. Similarly, any switches shown in the figures are conceptual only. Their function may be



carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the entity implementing this invention. Those of ordinary skill in the art further understand that the exemplary hardware, software, processes, methods, and/or operating systems described herein are for illustrative purposes and, thus, are not intended to be limited to any particular named manufacturer.

**[0023]** According to the exemplary embodiments, Sessions Initiation Protocol (SIP) is used for admission control of a media stream from a content source to a private multimedia device. Some of the exemplary embodiments described herein allow the SIP server itself to perform the admission control function. Other exemplary embodiments allow SIP-based admission control via a residential gateway, DSLAM, or multimedia content source. The use of RSVP linkages is reduced. The use of SIP for admission control allows an application and/or device to communicate, or “talk,” to a network, request that resources within the network be reserved, and receive the requested resource to communicate with a private communications address. Any communications device that uses sessions may utilize the SIP protocol for admission control.

**[0024]** The SIP protocol may be used for video-on-demand and/or multicast video access control. One of the advantages, in fact, is that the requesting communications device does not need to know whether the media stream is delivered over a unicast or a multicast media session. User signaling at the application layer for the video service, or for these multimedia services, is performed using SIP. The application layer is using SIP, the network is aware of this, and the network accordingly adjusts. Where communications and/or computing devices proxy messages forward, the equipment in the network is aware of the SIP transactions. The network equipment then makes the necessary changes in the network in response to the SIP transactions. The SIP is used as a networking layer protocol between end points to a session (e.g., a customer’s computer or set-top box and a content server). The SIPs can accept a wide range of media types including unicast or multicast IP addresses and Uniform Resource Locators (URLs) to define the location of the media stream. The requesting end point to the media session can be used for media display services such as TVoIP as well as participating in bi-directional media services (e.g., multimedia conferencing).

**[0025]** The exemplary embodiments also utilize URLs. The use of URLs permits the use of a Domain Name Server (DNS) system to provide translation between the URL name and the network address of the media source. This permits a common name space to include multicast and unicast unidirectional media as well as bi-directional services such as multimedia conferencing. The DNS system may be localized to a network of a service provider (e.g., BellSouth), or published to the public Internet.

**[0026]** Because of this architectural approach, the SIP environment now encompasses both multicast and unicast sessions and unidirectional and bi-directional media flows. The SIP protocol identifies all of the IP traffic flows that are substantial enough to be considered as “sessions.” Having this unified list of sessions is important for admission control purposes associated with the SIP servers. Because SIP servers know the number of sessions and the types of sessions, SIP servers may implement the resource constraint admission

control decision(s), when they also know the resource(s) available and the resource requirements of the various media types. The latter are relatively static data that can be provisioned. For example, if the SIP server providing admission control provides admission control for multiple links and multiple network elements, it may be considered as acting as a type of bandwidth broker. A SIP server implementing admission control scoped within a single network element may also be bundled with that network element. Such an implementation where the SIP server and admission control function are scoped to a Digital Subscriber Line Access Multiplexer (DSLAM) may have implementation advantages in easily facilitating the sessions.

**[0027]** Referring now to the figures, FIG. 1 is a block diagram showing an Internet Protocol Service Consumer Device (IPSCD) Management Module 110 residing in a computer system shown as a multimedia device 100 (also referred to herein as an Internet Protocol Service Consumer Device (IPSCD)). As FIG. 1 shows, the IPSCD Management Module 110 operates within a system memory device. The IPSCD Management Module 110, for example, is shown residing in a memory subsystem 114. The IPSCD Management Module 110, however, could also reside in flash memory or a peripheral storage device 116. The multimedia device 100 also has one or more central processors 102 executing an operating system. As one skilled in the art would appreciate, the operating system has a set of instructions that control the internal functions of the multimedia device 100, and furthermore has the capability to communicate a communications signal among the multimedia device 100, a communications network (e.g., reference numeral 210 in FIG. 2), and/or a connected electronic device capable of communicating audio, graphical, and/or other sensory data (e.g., a TV integrated with the multimedia device 100, a wireless transceiver in an electronic device such as a remote control device, an appliance, a communications device, and/or other devices).

**[0028]** The system controller 108 provides a bridging function between the one or more central processors 102, a video/graphics subsystem 106, an input terminal 112, and an audio subsystem 118, the memory subsystem 114, a PCI (Peripheral Controller Interface) bus, and a Communications (“Comm”) Device Interface 150. The PCI bus is controlled by a Peripheral Bus Controller 124. The Peripheral Bus Controller 124 (typically called a “Southbridge”) is an integrated circuit that serves as an input/output hub for various peripheral ports and/or transceivers. The Peripheral Bus Controller 124 allows for communications with the communications network and any connected electronic device. The peripheral ports allow the multimedia device 100 to communicate with a variety of devices through networking ports (such as SCSI or Ethernet, not shown) and/or transceivers that include Wireless Communications (“Comm”) Device Transceiver 126 (for communication of any frequency signal in the electromagnetic spectrum, such as, for example, Wireless 802.11 and Infrared) and Wired Communications (“Comm”) Device Port/Connection 124 (such as modem V90+ and compact flash slots). These peripheral ports could also include other networking ports, such as, a serial port (not shown) and/or a parallel port (not shown). Further, a tuner/demodulator 152 may receive encoded digital signals (e.g., signals from a satellite receiver, a cable feed, and so on) of the media stream. The digital signals are divided into audio and video signals. The tuner/demodulator 152 tunes to the frequency of the media stream. The tuner/demodulator 152 feeds the digital

signals into a decoder **154** (either directly or via the Communications Device Interface **150**). The tuner/demodulator tunes to the frequency of a selected decoder transport stream that is then decoded and fed to the graphics and audio subsystems **106, 118**, such as A/V out jacks to a TV. Further, the multimedia device **100** may include a power source **160**, such as a power cord that plugs into an electrical socket, a rechargeable battery to provide power and allow the media deliver device **100** to be portable, and/or others. Additionally, those of ordinary skill in the art understand that the program, processes, methods, and systems described in this patent are not limited to any particular computer system or computer hardware.

**[0029]** As those of ordinary skill in the art would appreciate, the central processor **102** may be implemented with a microprocessor. Advanced Micro Devices, Inc., for example, manufactures a full line of ATHLON™ microprocessors (ATHLON™ is a trademark of Advanced Micro Devices, Inc., One AMD Place, P.O. Box 3453, Sunnyvale, Calif. 94088-3453, 408.732.2400, 800.538.8450, www.amd.com). The Intel Corporation also manufactures a family of X86 and P86 microprocessors (Intel Corporation, 2200 Mission College Blvd., Santa Clara, Calif. 95052-8119, 408.765.8080, www.intel.com). Other manufacturers also offer microprocessors. Such other manufacturers include Motorola, Inc. (1303 East Algonquin Road, P.O. Box A3309 Schaumburg, Ill. 60196, www.Motorola.com), International Business Machines Corp. (New Orchard Road, Armonk, N.Y. 10504, (914) 499-1900, www.ibm.com), and Transmeta Corp. (3940 Freedom Circle, Santa Clara, Calif. 95054, www.transmeta.com). Those skilled in the art further understand that the program, processes, methods, and systems described in this patent are not limited to any particular central processor of a manufacturer.

**[0030]** The operating system may be a UNIX® operating system (UNIX® is a registered trademark of the Open Source Group, www.opensource.org). Other UNIX-based operating systems, however, are also suitable, such as LINUX® or a RED HAT®. LINUX-based system (LINUX® is a registered trademark of Linus Torvalds, and RED HAT® is a registered trademark of Red Hat, Inc., Research Triangle Park, N.C., 1-888-733-4281, www.redhat.com). Other operating systems, however, are also suitable. Such other operating systems may include a WINDOWS-based operating system (WINDOWS® is a registered trademark of Microsoft Corporation, One Microsoft Way, Redmond Wash. 98052-6399, 425.882.8080, www.Microsoft.com) and Mac® OS (Mac® is a registered trademark of Apple Computer, Inc., 1 Infinite Loop, Cupertino, Calif. 95014, 408.996.1010, www.apple.com). Those of ordinary skill in the art again understand that the program, processes, methods, and systems described in this patent are not limited to any particular operating system.

**[0031]** As shown in an embodiment of FIG. 2, the multimedia device **100** communicates with a program source **220** (also referred to herein as a “multimedia content source,” a “unicast source,” and a “multicast source”) using session initiation protocol (SIP) communications over a communications network **210** to order and/or receive a media stream. The media stream may be any RF and/or digital content, such as data files, television/cable programming, .mpg streams, or any other multimedia content. According to an alternate exemplary embodiment, when the media stream is communicated to the multimedia device **100**, the media stream may be stored to the memory subsystem **114** and/or to a peripheral storage device **116**. According to another exemplary embodi-

ment, the user may communicate the locally stored media stream to another multimedia device or another communications device via the communications network **210**. Further, the communications network **210** may be a distributed computing network, such as, for example, a cable network operating in the radio-frequency domain and/or the Internet Protocol (IP) domain. The communications network **210**, however, may also include the Internet (sometimes alternatively known as the “World Wide Web”), an intranet, a local-area network (LAN), and/or a wide-area network (WAN). The communications network **210** may include coaxial cables, copper wires, fiber optic lines, and/or hybrid-coaxial lines. The communications network **210** may even include wireless portions utilizing any portion of the electromagnetic spectrum and any signaling standard (such as the I.E.E.E. 802 family of standards).

**[0032]** FIG. 3 depicts an exemplary embodiment of SIP-based media delivery operating environment **300** that illustrates a residence **304** with a multimedia device shown as an integrated residential gateway, set top box, and/or television **302** having the IPSCD management module **110**, a remote control device **306**, and one or more communications networks **210**. The multimedia device **100** receives graphics, audio and other forms of the media stream from one or more communications networks that include a variety of broadcasts and communication mediums. As shown in FIG. 3, these broadcast and communications systems may include a direct digital broadcast via satellite TV **311**, a communication link with a data communications network **312**, a communications link with a telecommunication network **313**, a broadcast via digital cable TV **314**, and/or a terrestrial broadcast analog and/or digital TV such as a broadcast from a recording device **315**, a studio **316**, or a mobile vehicle **318** with an antenna and receiver **317**. Further, the IPSCD management module **110** may interact with a directory-on-demand service (or an alternate source that provides the media stream) via a web browser or alternate interface to present a menu to a display device of the multimedia device **100**. During communication of the media stream, the customer may activate media control of the media stream. For example, the customer may actuate a push button of the remote **306** to activate a fast-forward function, a rewind function, a pause function, a stop function, a bookmark function, a scene jump function, a status function, and an alternate presentation function. When the media control is activated, the multimedia device **100** communicates the selected presentation command to the multimedia content source to alter delivery of the media stream to the multimedia device **100** in accordance with the selected presentation command. Similarly, the customer may activate a communications preference of the media stream. For example, the customer may activate a push button of the remote **306** to terminate transmission of the media stream, to re-direct communication of the media stream to yet another communications device (not shown), or to interrupt communication of the media stream.

**[0033]** According to an exemplary embodiment, the user initiates a request to order the media stream by interfacing with the IPSCD management module **110** and actuating a pushbutton of the remote control device **306**, by voice commands, and/or by other selection methods. According to some of the embodiments, the IPSCD management module **110** presents a graphical user interface that enables a broad range of functionality for accessing, billing, controlling presentation, controlling communications, and/or otherwise manag-

ing the media stream. For example, an infrared remote control, an input terminal, and/or an optional wireless keyboard can communicate with the multimedia device **100** to interact with the graphical user interface that is presented on an audio/visual device such as a TV screen. According to one of the exemplary embodiments, furniture (e.g., a couch, a chair, a table, and other furniture) having an integrated input terminal, control panel, and/or communications interface with the multimedia device **100** is used to select the media stream to order, view, and/or otherwise manage and to further act as an input/output with the IPSCD management module **110**. The graphical user interface may be used to access one or more media streams, associated broadcast and on-demand video and audio content, and associated multimedia applications and services.

**[0034]** FIG. 4 illustrates another exemplary embodiment of SIP-based media delivery operating environment **400** having alternate multimedia devices **100** using session initiation protocol (SIP) communications over a communications network **210** to order and/or receive a media stream. These alternate multimedia devices **100** include a cellular phone **411**, an interactive pager **412**, a personal digital assistant (PDA) **413**, a Voice over Internet Telephony (VoIP) phone **414**, a computer system **415**, a global positioning system (GPS) **416**, a control panel integrated into a piece of furniture such as a couch, chair, or table **417**, and any device having a digital signal processor (DSP) **418**. Alternate multimedia devices may further include a watch, a radio, vehicle electronics, a clock, a printer, a gateway, and/or another apparatus and system having an AV output. Because these alternate multimedia devices may have limited capabilities, the IPSCD management module **110** may access a remote database to order, access, and/or otherwise manage the media stream and/or associated information and communications with the multimedia content source provider.

**[0035]** FIG. 5 illustrates another operating environment **500** for some of the exemplary embodiments. Here, the multimedia device **100** typically resides in a private IP address space, such as a customer's/subscriber's residence or a business network. The multimedia device **100** may be any communications device capable of sending and receiving SIP signaling protocols. A residential gateway (RG) **520** communicates with the multimedia device **100** and provides access to the private IP address space and, thus, to the multimedia device **100**. The residential gateway **520** communicates with the communications network **210** via a DSLAM **130**. Various routers **215** communicating within the communications network **210** route requests, queries, proxies, signaling, messages, and/or data between an SIP server **540**, an IP telephony gateway **550**, and/or a content server **560**. As shown, the residential gateway **520** may be a stand alone device; however, alternate exemplary embodiments describe the residential gateway **520** integrated with the multimedia device **100**.

**[0036]** A viewer (also referred to herein as a "customer" and/or a "subscriber") may initiate a multimedia session at the multimedia device **100** (e.g., by selecting an item from a menu, by clicking on a remote control, by voice commands, and/or by other selection methods as described above). The multimedia device **100** initiates the multimedia session with a SIP request communicated towards the communications network **210**. Because a residential or a business network (having the multimedia device **100**) is a private address space, the residential gateway **520** usually performs a NAT (Network Address Translation) and/or a PAT (Port Address Translation)

function. A SIP Application Layer Gateway is expected to exist within the residential gateway **520** to enable the port dynamic multimedia flows to transit from and/or to the residential gateway **520**. The SIP server **540** interprets the SIP invite request and initiates the multimedia session with the appropriate elements. This may involve a variety of actions such as SIP redirection to the IP telephony specific SIP based system, proxy functions to remote the authentication and authorization aspects, establishing unidirectional media flows from the content server **560**, and/or establishing or joining multicast flows in the communications network **210**. The use of a common session initiation protocol also provides a common mechanism to identify all of the sessions that require admission control decisions based on resource constraints, regardless of the type of service involved.

**[0037]** According to exemplary embodiments, the SIP functionality may be distributed in a variety of ways. In particular, the SIP server **540** may be implemented as a hierarchy of SIP servers (not shown) such that if the first SIP server can not make the decision, the first SIP server acts as a proxy and defers the decision to a higher level SIP server. As an example, one instance of a hierarchy of SIP servers **540** may be implemented at the residential gateway **520** and a higher level SIP server **540** could reside in the communications network **210**.

**[0038]** FIG. 6 is a schematic illustrating an exemplary unicast media session **600**. Here the residential gateway **520** knows the source for the unicast media session, and the customer is authorized to access this media source. When the customer desires a session, the multimedia device **100** communicates an SIP invite. The residential gateway receives and inspects the SIP invite and communicates the SIP invite to the unicast source **660**. The residential gateway, however, only observes and forwards the SIP invite—the residential gateway does not alter/change the SIP invite. The SIP invite communicates to the communications network via the DSLAM **530**. Various routers **215** route the SIP invite to an appropriate unicast video source **660** (also referred to as a "content source"). A server of the unicast source **560** responds with an "OK" or similar message indicating the SIP invite looks like a reasonable request and that the content can be supplied. The "OK" response return communicates to the residential gateway and forwards to the multimedia device **100** [Step **610**, entitled "Session Startup SIP"]. The requested unicast media stream then communicates from the content server of the unicast source **560** to the residential gateway **520**. The residential gateway **520** forwards the media stream to the multimedia device **100** [Step **620**, entitled "Media Delivery"]. From the SIP message exchange, the residential gateway **520** has sufficient information to identify the unicast media stream and to associate it with the multimedia device **100** requesting the media. Because the residential gateway **520** has SIP abilities, the residential gateway **520** can appropriately self-configure the NAT function. From the SIP message exchange, the multimedia device **100** has sufficient information to identify the media stream and to present the media stream to the multimedia device. Further, during communication of the media stream, the customer may activate media control of the media stream via the residential gateway **520** to the unicast source **660** [Step **630**, entitled "Media Control"]. For example, the customer may actuate a push button of the remote **306** to activate a fast-forward function, a rewind function, a pause function, a stop function, a bookmark function, a scene jump function, a status function, and

an alternate presentation function. When the media control is activated, the multimedia device **100** communicates the selected presentation command to the unicast source **660** via the residential gateway **520**, and the selected presentation command is processed by the IPSCD Management Module **110** to alter delivery of the media stream from the unicast source to the multimedia device **100** via the residential gateway **520** in accordance with the selected presentation command [Step **640**, entitled “Interactive Media Deliver”]. Similarly, the customer may activate a communications preference of the media stream. For example, the customer may activate a push button of the remote **306** to terminate transmission of the media stream (see Step **650**, entitled “Session Teardown Session”), to re-direct communication of the media stream to yet another communications device (not shown), or to interrupt communication of the media stream.

[**0039**] The residential gateway **520** inspects the SIP invite and the “OK” response. Because the residential gateway **520** provides access to the customer’s private IP address space, the gateway **520** uses a private address space (also referred to herein as a “private communications address”). That is, everything to the “left” of the residential gateway **520** is in a public address space. Under these circumstances the residential gateway **520** typically performs NAT (Network Address Translation) and/or a PAT (Port Address Translation) functions. The unicast source **660** essentially sees the network address of the residential gateway **520**—not the multimedia device **100**. The residential gateway **520** uses a different port number to keep track of the transaction that belongs to the multimedia device **100** as opposed to message flow related to another communications device in the private IP address space network.

[**0040**] The exemplary embodiments, however, allow the residential gateway **520** to inspect the SIP invite and “OK” response. Because the residential gateway **520** can inspect for the SIP, the residential gateway **520** knows the port assignments and can configure itself to receive the media stream. When the media stream terminates, the residential gateway **520** needs to know what port number is assigned to the multimedia device **100**. By inspecting the SIP invite and “OK” response the residential gateway **520** can self-configure for the dynamic port assignment. So, generally that sort of function would be considered as a SIP application layer gateway associated with the NAT/PAT function. The unicast source **660** selects the port to which it sends the media stream and associates that media stream with that particular SIP invite from the multimedia device **100**. The residential gateway **520** needs to be aware of the SIP protocol in order to understand what port the media stream is coming in and that the media stream is coming in response to some request from inside the private network.

[**0041**] FIG. 7 is a schematic illustrating another exemplary unicast media session **700**. Here, again, the residential gateway **520** knows the source for the unicast media session, and the customer is authorized to access this media source. The multimedia device **100** launches the SIP invite, the residential gateway **520** inspects the SIP invite, and the residential gateway **520** forwards the SIP invite to the appropriate unicast video source. The server of the unicast source **660** responds with an “OK” or similar message indicating the content can be supplied. The “OK” response return communicates to the residential gateway **520** and forwards to the multimedia device **100** [Step **710**, entitled “Session Startup SIP”].

[**0042**] The unicast source **660** then communicates the requested media stream. As FIG. 7 shows, however, the SIP server **540** may intervene and receive the media stream. That is, the media stream communicates from the unicast source **660** to the SIP server **540**. It may be that the SIP server **540** is performing the actual admission control of the media stream so that sub-servers may also have knowledge of whether or not a next media stream would exceed the capacities of the network at some place or another. It could be that only after the sub-server checks with the source that it becomes aware of the amount of bandwidth that’s required or the location of the source. For whatever reasons, the SIP server **540** can perform an intervention function and intermediately receive the media stream. The SIP server **540** could then direct the media stream to the residential gateway **520**. The residential gateway **520** then forwards the media stream to the multimedia device **100** [Step **720**, entitled “Media Delivery”].

[**0043**] FIG. 8 is another schematic illustrating an exemplary unicast media session **800**. Here, however, the residential gateway **520** does not know the source for the unicast media session. The multimedia device **100** launches the SIP invite to request some channel of media. The SIP invite, however, is directed to a name or a communications address that cannot be resolved by the residential gateway **520**. The SIP invite, for example, may be a request to a name rather than a specific IP address. The residential gateway **520** may have no easy means to translate a domain name to an IP address. So, by default, the residential gateway **520** will not terminate the request, but, instead, pass the SIP invite to some other SIP server **540** in the communications network **210**. That is, the residential gateway **520** forwards the SIP invite to a SIP server **540** in a hierarchy with the means to resolve the name. FIG. 8, then, illustrates the residential gateway **520** forwarding the SIP invite to the SIP server **540**, and the SIP server **540** performs a DNS lookup or alternate similar function. Perhaps the SIP server **540** has access to some other database that maps the desired channel or content to an alternate unicast content server. The SIP server **540** then redirects the SIP invite to the appropriate media server (e.g., the unicast source **660**). One advantage of using domain names is that a manufacturer of the multimedia device **100** may want a more user-friendly interface that uses names that are human readable rather than IP addresses. Another advantage might be a load balancing function that the SIP server **540** may perform although the same media may be available from several video servers, the SIP server **540** may desire to utilize the geographically closest resource. Whatever the reasons, the SIP server **540** discovers the appropriate unicast source **660** and directs the SIP invite to that source **660**. The unicast source **660** responds with the “OK” response.

[**0044**] The SIP server **540** may further intervene. As FIG. 8 shows, the SIP server **540** intervenes and intercepts the “OK” response from the unicast source **660**. It may be that the SIP server **540** first checks network capacity and then, in return, communicates the “OK” response. If, however, the communications network lacked capacity, the SIP server **540** would return some kind of busy or queued indication (or alternate indication, such as that the services are unavailable). For whatever reason, the SIP server **540** intervenes to direct the “OK” response to the residential gateway **520**, and the residential gateway **520** forwards the “OK” to the multimedia device **100** [Step **810**, entitled “Session Startup SIP”]. The unicast source **660** then communicates the media stream to the residential gateway **520**, and the residential gateway **520**

forwards to the media stream to the multimedia device **100** for delivery/presentation [Step **820**, entitled “Media Delivery”].

[**0045**] FIG. **9** is another schematic illustrating still another exemplary unicast media session **900**. Here, again, the residential gateway **520** does not know the source for the unicast media session. FIG. **9**, however, shows the SIP server **540** intervening to receive the media stream. The multimedia device **100** launches the SIP invite to a name or an address that can’t be resolved by the residential gateway **520**. The residential gateway **520** passes the SIP invite to the SIP server **540**, and the SIP server **540** performs a DNS lookup. The SIP server **540** then redirects the SIP invite to the appropriate media server. The SIP server **540** intervenes and intercepts the “OK” response from the unicast source **660** and then directs the “OK” response to the residential gateway **520**. The residential gateway **520** forwards the “OK” response to the multimedia device **100** [Step **910**, entitled “Session Startup SIP”].

[**0046**] As FIG. **9** also shows the SIP server **540** may intervene in the media stream. Once the end points set-up the session (e.g., the unicast source **660** and the residential gateway **520** and/or the multimedia device **100** exchange SIP messages), the unicast source **660** delivers the requested media stream. The SIP server **540**, however, may intervene and receive the media stream from the unicast source **660**. The SIP server **540** may dynamically measure/evaluate bandwidth consumption and network conditions. The SIP server **540** may perform, or assist in, billing routines for the requested media stream. For whatever reasons, the SIP server **540** intervenes and forwards the media stream to the residential gateway **520**. The residential gateway **520** then directs the media stream to the multimedia device **100** [Step **920**, entitled “Media Delivery”].

[**0047**] FIG. **10** is a schematic illustrating a multicast media session **1000** according to some of the exemplary embodiments. Here the residential gateway **520** knows the source for the multicast media session, and the customer is authorized to access this media source. When the customer desires a session, the multimedia device **100** communicates the SIP invite. The residential gateway **520** receives and inspects the SIP invite and determines that the SIP invite is associated with an authorized multicast source **670** [Step **1010**, entitled “Session Startup SIP”]. Thereafter, the residential gateway **520** generates an Internet Group Management Protocol (IGMP) join that is communicated to the DSLAM **530**. The DSLAM **530** receives and forwards the IGMP join to one or more routers **215**. Various routers **215** within the communications network route the IGMP join to the appropriate multicast video source **670**. The IGMP may be used symmetrically or asymmetrically, such as asymmetric protocol used between multicast routers **215**. Thereafter, a content server of the multicast source **670** responds with an IGMP acknowledgement (referred to as “IGMP ACK” in the figures) or similar message indicating the IGMP join looks like a reasonable request and that the content can be supplied. The IGMP acknowledgement is communicated to the routers **215**, from the routers **215** to the DSLAM **530**, then from the DSLAM **530** to the residential gateway **520**. The residential gateway **520** converts the IGMP acknowledgment to an SIP protocol “OK” and forwards the “OK” to the multimedia device **100** [Step **1015**, entitled “Multicast Channel Selection IGMP”]. The requested multicast media stream then communicates from the appropriate multicast source **670** to the residential gateway **520**. The residential gateway **520** forwards the media stream to the multimedia device **100** [Step **1020**, entitled

“Media Delivery”]. Further, during communication of the media stream, the customer may activate media control of the media stream to control presentation and/or communication of the media stream (see Steps **1030**, **1040**, and **1050**, respectively entitled “Multicast Channel Selection IGMP,” “Media Delivery,” and “Session Teardown”).

[**0048**] The residential gateway **520** converts the SIP invite from the multimedia device **100** of the customer’s private IP address space to the IGMP join to a public address space and, similarly, converts the IGMP acknowledgement response from the public base to the SIP “OK” to the multimedia device **100** of the customer’s private IP address space. Under these circumstances the residential gateway **520** typically performs NAT (Network Address Translation) and/or a PAT (Port Address Translation) functions. The multicast source **670** sees the network address of the residential gateway **520**—not the multimedia device **100**. The residential gateway **520** uses different port numbers to keep track of the transactions that belong to the multimedia device **100** as opposed to message flow related to another communications device in the private IP address space network.

[**0049**] The exemplary embodiments, however, allow the residential gateway **520** to inspect the IGMP join and IGMP acknowledgement responses. Because the residential gateway **520** can inspect, the residential gateway **520** knows the port assignments and can configure itself to receive the media stream. When the media stream terminates, the residential gateway **520** needs to know what port number is assigned to the multimedia device **100**. By inspecting the IGMP join and IGMP acknowledgement responses the residential gateway **520** can self-configure for the dynamic port assignment. So, generally, that sort of function would be considered as a SIP application layer gateway associated with the NAT/PAT function. The multicast source **670** selects the port to which it sends the media stream and associates that media stream with that particular IGMP join converted from the SIP invite of the multimedia device **100**. The residential gateway **520** needs to be aware of the IGMP protocol in order to understand into what port the media stream is coming and that the media stream is coming in response to some request from inside the private network.

[**0050**] FIG. **11** is a schematic illustrating yet another exemplary a multicast media session **1100**. Here, again, the residential gateway **520** knows the source for the multicast media session, and the customer is authorized to access this media source. The multimedia device **100** launches the SIP invite. The residential gateway **520** inspects and uses the SIP invite to generate an IGMP join and forwards the IGMP join via the SIP Server to the DSLAM **530**. That is, the SIP server **540** acts as a border gateway between the IGMP join from the residential gateway **520** to the DSLAM **530**. Thereafter, the DSLAM **530** forwards the IGMP invite to one or more network routers **215**, and the router(s) forward(s) the IGMP join to the appropriate multicast source **670**. The content server of the multicast source **670** responds with an IGMP acknowledgement or similar message indicating the content can be supplied. The IGMP acknowledgement return communicates to routers **215**, from the routers **215** to the DSLAM **530**, and from the DSLAM **530** to the residential gateway **520**. The residential gateway **520** receives the IGMP acknowledgement providing it with sufficient information to perform its NAT function and forwards an SIP “OK” to the multimedia device **100** [Step **1110**, entitled “Session Startup SIP”].

[0051] The multicast source 670 then communicates the requested media stream. As FIG. 11 shows, however, the SIP server 540 may intervene and receive the media stream. That is, the media stream communicates from the multicast source 670 to the SIP server 540. Similar to above, it may be that the SIP server 540 is performing the actual admission control of the media stream so that sub-servers may also have knowledge of whether or not a next media stream would exceed the capacities of the network at some place or another. It could also be that only after the sub-server checks with the source that it becomes aware of the amount of bandwidth that is required or the location of the source. For whatever reasons, the SIP server 540 can perform an intervention function and intermediately receive the media stream. The SIP server 540 could then direct the media stream to the residential gateway 520. The residential gateway 520 then forwards the media stream to the multimedia device 100 [Step 1120, entitled “Media Delivery”].

[0052] FIG. 12 is another schematic illustrating a multicast media session 1200 according to further exemplary embodiments. Here, however, the residential gateway 520 does not know the source for the multicast media session. The multimedia device 100 launches the SIP invite to request some channel of media. The SIP invite, however, is directed to a name or an address that can’t be resolved by the residential gateway 520. The SIP invite, for example, may be a request to a name rather than a specific IP address. The residential gateway 520 may have no easy means to translate a domain name to an IP address. So, by default, the residential gateway 520 will not terminate the request, but, instead, the residential gateway 520 passes the SIP invite to a SIP server 540 in the communications network. That is, the residential gateway 520 forwards the SIP invite to a SIP server 540 in a hierarchy with the means to resolve the name. FIG. 10, then, illustrates the residential gateway 520 forwarding the SIP invite to the SIP server 540, and the SIP server 540 performs a DNS lookup. Similar to above, the SIP server 540 may have access to some other database that maps the desired channel or content to a particular content server. The SIP server 540 then forwards the source address (referred to as the “SIP UPDATE” the figures) to the residential gateway 520. Similar to the session flow described in the above embodiments, the residential gateway 520 uses the SIP UPDATE to generate an IGMP join to the DSLAM 530. Next the DSLAM 530 receives the IGMP join and communicates the IGMP join to one or more network routers 215, and the router(s) 215 communicates the IGMP join to the multicast source 670 (e.g., the content server). Thereafter, the multicast source 670 responds with an IGMP acknowledgement communicated to the router, from the router to the DSLAM 530, then from the DSLAM 530 to the residential gateway 520. The residential gateway 520 converts the IGMP acknowledgment to an SIP protocol “OK” and forwards the “OK” to the multimedia device 100 [Step 1210, entitled “Session Startup SIP”]. The requested multicast media stream then communicates from the appropriate multicast content server 560 to the residential gateway 520. The residential gateway 520 communicates the media stream to the multimedia device 100 [Step 1220, entitled “Media Delivery”].

[0053] FIG. 13 illustrates another exemplary multicast media session 1300 similar to the multicast session 1200 of FIG. 12. Here, however, the multicast media session 1300 shows an alternate route of the media stream from the multicast source 670. As FIG. 13 illustrates, the SIP server 540

intervenes in the media stream. Once the multicast source 670 initiates the media stream to the residential gateway 520, the SIP server 540 intervenes and receives the media stream from the multicast source 670. The SIP server 540 may dynamically measure/evaluate bandwidth consumption and network conditions. The SIP server 540 may perform, or assist in, billing routines for the requested media stream. For whatever reasons, the SIP server 540 intervenes and forwards the media stream from the multicast source 670 to the residential gateway 520 that converts the IGMP acknowledgement to an SIP “OK” to communicate with the multimedia device 100 [step 1310, entitled “SIP Session Startup”]. The residential gateway 520 then directs the media stream to the multimedia device 100 [Step 1320, entitled “Media Delivery”].

[0054] The IPSCD Management Module (shown as reference numeral 110 in FIGS. 1 and 3-4) may be physically embodied on or in a computer-readable medium. This computer-readable medium may include CD-ROM, DVD, tape, cassette, floppy disk, memory card, and large-capacity disk (such as IOMEGA®, ZIP®, JAZZ®, and other large-capacity memory products (IOMEGA®, ZIP®, and JAZZ® are registered trademarks of Iomega Corporation, 1821 W. Iomega Way, Roy, Utah 84067, 801.332.1000, www.iomega.com)). This computer-readable medium, or media, could be distributed to end-users, licensees, and assignees. These types of computer-readable media, and other types not mentioned here but considered within the scope of this invention, allow the IPSCD Management Module to be easily disseminated.

[0055] Still in further exemplary embodiments, the IPSCD Management Module may be physically embodied on or in any addressable (e.g., HTTP, I.E.E.E. 802.11, Wireless Application Protocol (WAP)) wireless device capable of engaging in a session initiation protocol communication or other similar communication. Examples could include a computer, a wireless personal digital assistant (PDA), an Internet Protocol phone, and/or a wireless pager (some of these exemplary embodiments are shown in the figures).

[0056] While several exemplary implementations of embodiments of this invention are described herein, various modifications and alternate embodiments will occur to those of ordinary skill in the art. For example, other protocol requests for a media stream, such as Hyper-Text Transfer Protocol (HTTP) and/or other protocols utilizing various formats, such as URL formats, Extensible Style Sheet (XSL) formats, Real Simple Syndication (RSS) that uses XML structures, and others may be similarly used to communicate orders from the private address of the multimedia device to a content source. Accordingly, this invention is intended to include those other variations, modifications, and alternate embodiments that adhere to the spirit and scope of this invention. TABLE-US-00001 Abbreviations & Additional Descriptions ALG Application Layer Gateway AS Autonomous System BRAS Broadband Remote Access Server CoS Class of Service DHCP Dynamic Host Configuration Protocol DNS Domain Name Server DSLAM Digital Subscriber Line Access Module DSM-CC Digital Storage Media Command and Control IGMP Internet Group Membership Protocol IP Internet Protocol IPSCD Internet Protocol Service Consumer Device (also referred to as ISCD) TVoIP IP Tele-Vision MPEG Motion Picture Experts Group NAT Network Address Translation PAT Port Address Translation QoS Quality of Service RG Residential Gateway RSVP Resource reS-erVation Protocol RTP Real-time Transport Protocol RTSP Real Time Streaming Protocol SIP Session Initiation Protocol

STB Set Top Box TCP Transmission Control Protocol TVoIP Television over Internet Protocol UDP User Datagram Protocol URL Uniform Resource Locator VoD Video on Demand

1. A method for providing media delivery services comprising:

receiving a session initiation protocol invitation from a multimedia device to request a media stream, the invitation further comprising a private communications address for communicating with the multimedia device; communicating the session initiation protocol invitation to a multimedia content server via a communications network;

receiving a session initiation protocol confirmation from the multimedia content server via the communications network to communicate the media stream, the confirmation further comprising a communications identifier for identifying the media stream;

receiving and identifying the media stream from the multimedia content server via the communications network; and

communicating the media stream to the private communications address of the multimedia device.

2. The method of claim 1, further comprising:

communicating the confirmation to the multimedia device; and

presenting the media stream to the multimedia device.

3. The method of claim 1, further comprising:

during communication of the media stream to the multimedia device, receiving a media control function from the multimedia device, the media control function for controlling at least one of presentation and communication of the media stream; and

communicating the media control function to the multimedia content server via the communications network.

4. The method of claim 3, further comprising:

if the media control function comprises a presentation control function, then:

receiving a modified media stream in accordance with the presentation control function and identifying the modified media stream from the multimedia content server via the communications network,

communicating the modified media stream to the private communications address of the multimedia device, and

presenting the modified media stream to the multimedia device.

5. The method of claim 4, wherein the presentation control function comprises a fast-forward function, a rewind function, a pause function, a stop function, a bookmark function, a scene jump function, a status function, and an alternate presentation function.

6. The method of claim 5, further comprising:

if the media control function comprises a communications control function, then:

receiving a session initiation protocol communications response in accordance with the communications control function and identifying the communications response from the multimedia content server via the communications network, and

communicating the communications response to the private communications address of the multimedia device.

7. The method of claim 6, wherein the communications control function comprises a command to discontinue communication of the media stream from the multimedia content server.

8. The method of claim 7, further comprising:

displaying a notification to the multimedia device, the notification comprising a message that communication of the media stream has been discontinued.

9. The method of claim 6, wherein the communications control function comprises a command to redirect the communication of the media stream to an alternate communications address for presentation of the redirected media stream to an alternate multimedia device.

10. The method of claim 9, further comprising:

displaying a redirected notification to the multimedia device, the redirected notification comprising a message explaining that communication of the media stream to the multimedia device has been discontinued and that communication of the remaining media stream has been redirected to the alternate multimedia device;

communicating the redirected media stream to the alternate communications address of the alternate multimedia device; and presenting of the redirected media stream to the alternate multimedia device.

11. The method of claim 1, wherein the multimedia content server is a unicast multimedia content server, and wherein the step of communicating the session initiation protocol invitation to the unicast source via the communications network comprises communicating the invitation to at least one session initiation protocol server to communicate with the unicast source, and wherein the step of receiving the session initiation protocol confirmation from the unicast source via the communications network comprises communicating the media stream to the at least one session initiation protocol server to communicate with a residential gateway, the residential gateway further communicating with multimedia device.

12. The method of claim 11, wherein the step of receiving and identifying the media stream from the unicast source via the communications network comprises receiving and identifying the media stream from the session initiation protocol server to the residential gateway.

13. The method of claim 1, wherein the multimedia content server is a multicast source, and wherein the step of communicating the session initiation protocol invitation to the multicast source via a communications network comprises translating the session initiation protocol invitation to an internet group management protocol join and communicating the internet group management protocol join to the multicast source via the communications network, and wherein the step of receiving a session initiation protocol confirmation from the multimedia source via the communications network comprises receiving an internet group management protocol acknowledgement via the communications network, the acknowledgement further comprising the communications identifier for identifying the media stream.

14. A system comprising:

a media stream source in communication with a multimedia content server, the media stream source for storing a media stream;

the multimedia content server for accessing the media stream, managing interactive controls of the media stream, and communicating the media stream; and

at least one processing device using a session initiation protocol communication of a multimedia device to order a media stream from a multimedia content server via a communications network, wherein the at least one processing device comprises instructions for receiving the session initiation protocol invitation from the multimedia device to request a media stream, for communicating the session initiation protocol invitation to the multimedia content server via the communications network, for receiving a session initiation protocol confirmation from the multimedia content server via the communications network to communicate the media stream, for receiving and identifying the media stream from the multimedia content server via the communications network, and for communicating the media stream to a private communications address of the multimedia device.

**15.** The system of claim **14**, further comprising a distribution network over which the multimedia content server communicates with the at least one processing device.

**16.** A storage medium on which is encoded instructions for performing the following:

receiving a session initiation protocol invitation from a multimedia device to request a media stream, the invitation further comprising a private communications address for communicating with the multimedia device;  
communicating the session initiation protocol invitation to a multimedia content server via a communications network;  
receiving a session initiation protocol confirmation from the multimedia content server via the communications network to communicate the media stream, the confirmation further comprising a communications identifier for identifying the media stream;  
receiving and identifying the media stream from the multimedia content server via the communications network;  
and  
communicating the media stream to the private communications address of the multimedia device.

\* \* \* \* \*