



- (51) International Patent Classification:
E21B 33/02 (2006.01) *E21B 33/04* (2006.01)
- (21) International Application Number:
PCT/US2014/040136
- (22) International Filing Date:
30 May 2014 (30.05.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/829,018 30 May 2013 (30.05.2013) US
- (71) Applicant (for CA only): **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 125 - 9 Avenue SE, Calgary, Alberta T2G 0P6 (CA).
- (71) Applicant (for FR only): **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) Applicant (for GB, JP, NL only): **SCHLUMBERGER HOLDINGS LIMITED**; P.O. Box 71, Craigmuir Cham-


bers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).

- (71) Applicant (for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, JP, LY, MA, MZ, NA, NG, NL, PH, SD, SY, US, VN): **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; Parkstraat 83-89m, NL-2514 JG The Hague (NL).
- (71) Applicant (for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only): **PRAD RESEARCH AND DEVELOPMENT LIMITED**; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Island, British, 1110 (VG).
- (71) Applicant (for US only): **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).
- (72) Inventors: **NOAKES, David**; 3 Bond Close, Sway, Lymington Hampshire, SO41 6DR (GB). **GRAHAM, Robert**; 4 Chetwynd drive, Southampton Hampshire, SO163HZ (GB). **WILSON, Colin**; 5107 Fall Forest Ln, Sugar Land, Texas 77479 (US).

[Continued on next page]

(54) Title: STRUCTURE WITH FEED THROUGH

FIG. 3

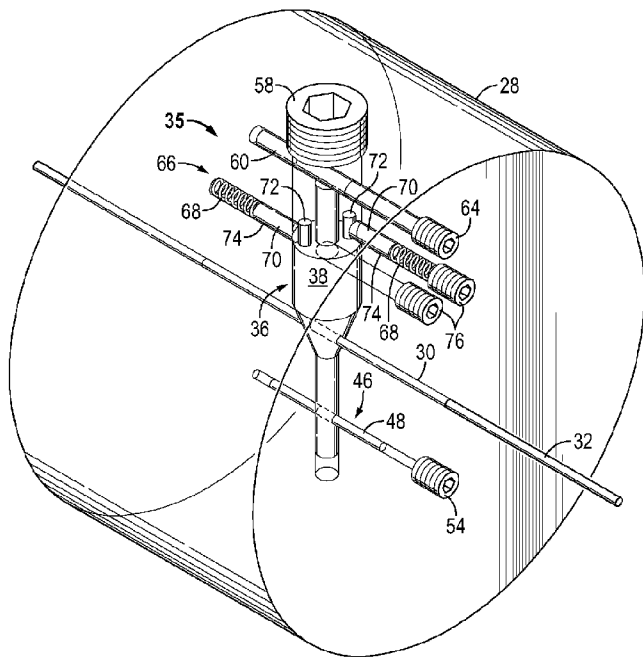

(57) Abstract: A technique provides protection against unwanted conditions in wellhead structures and other structures. According to the technique, a system provides a feed through in a wellhead structure or other type of structure. The feed through may accommodate a communication line routed therethrough. A closing device is positioned in the structure at a location to enable closing of the feed through via the closing device. Additionally, a condition-sensitive device is operatively engaged with the closing device to initiate actuation of the closing device once the condition-sensitive device is exposed to a predetermined condition. Upon exposure to the predetermined condition, the condition-sensitive device initiates closing of the feed through via the closing device.

WO 2014/194158 A1

(74) **Agents:** GROESBECK, David J. et al.; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (*Art. 21(3)*)
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (*Rule 48.2(h)*)

STRUCTURE WITH FEED THROUGH

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present document is based on and claims priority to U.S. Provisional Application Serial No.: 61/829,018, filed May 30, 2013, incorporated herein by reference.

BACKGROUND

[0002] Well control and well integrity involve the placement of barriers for reducing or eliminating passage of fluid, gases, vapors and/or condensate beyond a defined boundary. Wellhead outlets are barriers that allow for cables, fibers, cap tubing, conductors and other communication lines to enter a well, thus allowing for communication to downhole sensors and equipment. These downhole devices receive electrical, hydraulic or optical signals along communication lines to power, cycle, interrogate or actuate the device. A feed through may be used to provide a path for the communication lines extending between the downhole devices and surface equipment or subsea equipment. In many applications, the wellhead outlets are designed to satisfy safety standards dictated by governing bodies that specify wellhead outlet standards. These standards address various conditions related to pressure, temperature, explosive potential, and other conditions. Examples of such standards include fire rating standards defined in ATEX, IECEx, NEC and AEx.

SUMMARY

[0003] In general, a system and methodology are provided to meet certain industry standards and to thus protect against unwanted condition migration in wellhead structures or other types of structures. The system and methodology comprise

providing a feed through in a structure, such as a wellhead structure. Once installed, a communication line may be routed through the feed through. A closing device is positioned in the structure at a location to enable closing of the feed through via the closing device. Additionally, a condition-sensitive device, e.g. a temperature-sensitive device, is operatively engaged with the closing device to initiate actuation of the closing device once the condition-sensitive device is exposed to a predetermined condition, e.g. a high temperature caused by a fire. Upon exposure to the predetermined condition, the condition-sensitive device initiates closing of the feed through via the closing device.

[0004] However, many modifications are possible without materially departing from the teachings of this disclosure. Accordingly, such modifications are intended to be included within the scope of this disclosure as defined in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Certain embodiments of the disclosure will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements. It should be understood, however, that the accompanying figures illustrate the various implementations described herein and are not meant to limit the scope of various technologies described herein, and:

[0006] Figure 1 is a schematic illustration of an example of a well system having a wellhead structure with a closing device, according to an embodiment of the disclosure;

[0007] Figure 2 is a cross-sectional view of an example of a structure having a closing device and a condition-sensitive device which may be used in a wellhead or other type of structure, according to an embodiment of the disclosure;

[0008] Figure 3 is another view of the structure illustrated in Figure 2, according to an embodiment of the disclosure;

[0009] Figure 4 is a cross-sectional view of another example of a structure having a closing device and a condition-sensitive device, according to an embodiment of the disclosure;

[0010] Figure 5 is a cross-sectional view similar to that of Figure 4 but showing the closing device and the condition-sensitive device in a different operational position, according to an embodiment of the disclosure; and

[0011] Figure 6 is an expanded view of a portion of the structure illustrated in Figure 5, according to an embodiment of the disclosure.

DETAILED DESCRIPTION

[0012] In the following description, numerous details are set forth to provide an understanding of some embodiments of the present disclosure. However, it will be understood by those of ordinary skill in the art that the system and/or methodology may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible.

[0013] The disclosure herein generally involves a system and methodology for protecting against certain undesirable conditions. In well applications, for example, the technique enables protection of the integrity of a well system against fire as set forth in certain industry standards. The system and methodology comprise providing a feed through in a structure, such as a wellhead structure. Once installed, a communication line may be routed through the feed through. Additionally, a closing device is positioned in the structure at a location to enable closing of the feed through under a predetermined condition, e.g. a high temperature condition. A condition-sensitive device also is operatively engaged with the closing device to initiate actuation of the closing device once the condition-sensitive device is exposed to the predetermined condition, e.g. a high

temperature caused by a fire. Upon exposure to the predetermined condition, the condition-sensitive device initiates closing of the feed through via the closing device.

[0014] In certain well related embodiments, the technique described herein enables passage of a communication line, e.g. a fiber, an electrical conductor, or a hydraulic path, through a wellhead for use under normal operating conditions. The communication line can be sheared by rotation, translation, or some combination thereof within a feed through of a wellhead structure. For example, a closing device may be used to shear the communication line and to close the feed through. In some applications, the closing device may be powered by a spring once a predetermined temperature condition (or other predetermined condition) is reached. The spring may be in compression or tension, and it can be vertically or horizontally positioned within the assembly. A shear member, e.g. a shear pin, may be positioned in the wellhead structure to prevent actuation of the closing device by the spring during normal operations, thus preventing premature shearing of the communication line.

[0015] Once the predetermined condition is met, the shear member breaks and the spring causes movement of the closing device. For example, the spring may cause rotation or translation of the closing device to shear the communication line and to seal the feed through path. The closing device may have a variety of structures and forms able to rotate or translate to a position closing the leak path along the feed through. In the case of a rotational design in which the closing device is rotated, a conical section may be used to ensure positive contact with a metal-to-metal sealing face throughout the rotational movement, as described in greater detail below.

[0016] Referring generally to Figure 1, an embodiment of a well system 20 is illustrated. In this embodiment, well system 20 comprises a wellhead 22 positioned above a well 24 having at least one wellbore 26, e.g. a vertical and/or deviated wellbore. The wellhead 22 comprises a structure 28 having a feed through 30. Although the feed through 30 is illustrated as horizontal, the actual orientation may be horizontal, vertical, or at other desired orientations depending on the design of the overall well system 20. It

should be noted that structure 28 is illustrated as a wellhead structure, but the structure 28 may be employed in other types of systems, including non-well related systems.

[0017] A communication line 32 may be routed through feed through 30 of wellhead structure 28. In the example illustrated, the communication line 32 extends through feed through 30 and down into wellbore 26 for coupling with a suitable downhole device or devices 34. By way of example, the communication line 32 may comprise an optical fiber communication line, an electrical conductor communication line, a hydraulic communication line, or other suitable communication lines or combinations of communication lines.

[0018] Referring generally to Figure 2, an example of structure 28 is illustrated. The structure 28 may be used as a wellhead structure, as described above, or in other suitable applications. In this example, structure 28 comprises feed through 30 and works in cooperation with a protection system 35 which may be used to close off the feed through 30 upon the occurrence of a detrimental condition, e.g. an excessively high temperature or pressure condition. The protection system 35 comprises a closing device 36 positioned at the feed through 30. The closing device 36 may be constructed to rotate, translate, or both rotate and translate to close the feed through 30. In the example illustrated, the closing device 36 is constructed to enable movement which transitions the feed through 30 from an open position to a closed position while severing the communication line 32 (or other device) extending through feed through 30. This action results in creation of a barrier blocking and sealing the feed through path 30. As explained in greater detail below, the closing movement of closing device 36 is triggered by a specific condition, such as an elevated temperature or pressure condition.

[0019] In the specific example illustrated in Figure 2, the closing device 36 comprises a rotatable member 38 having a conical section 40 which may be rotated to serve as a conical barrier. The rotatable member 38 is rotatably received in a corresponding space 42, e.g. a generally cylindrical space, formed in structure 28. In well applications, the structure 28 may be a wellhead outer flange adapter or other

wellhead structure. As illustrated, the conical section 40 has a passage 44 which is generally aligned with feed through 30 when closing device 36 is in an open position. This allows the communication line 32 to pass through the feed through 30. The edges of passage 44 may be constructed to facilitate cutting of the communication line 32 as the closing device 36 is shifted to a closed position. In the example illustrated, closing device 36 is shifted to the closed position by rotating rotatable member 38 and conical section 40 until passage 44 is fully moved out of alignment with feed through 30, thus closing and sealing the feed through 30. In this example, the surface of conical section 40 forms a metal-to-metal seal with the corresponding wall surface defining space 42.

[0020] The protection system 35 further comprises a detrimental condition sensitive device 46, e.g. a temperature-sensitive device. In some applications, however, the device 46 may comprise a pressure-sensitive device or other type of condition-sensitive device constructed to detect a specific condition. In the illustrated example, device 46 comprises a temperature-sensitive device 46 mounted to the structure 28. In this type of application, the temperature-sensitive device 46 is automatically actuated upon exposure to a predetermined temperature, e.g. a high temperature caused by fire. The device 46 is operatively engaged with the closing device 36 so as to control actuation of the closing device 36 to a position closing and sealing the feed through 30.

[0021] The condition-sensitive device 46 may have a variety of configurations and components. In the example illustrated, device 46 comprises a shear member 48 which is readily sheared upon sufficient exposure to a predetermined temperature. The shear member 48 may be in the form of a pin or other suitable structure extending through a corresponding passage 50 in rotatable member 38 of closing device 36. The shear member/pin 48 may be inserted along a shear member passage 52 and through the aligned passage 50 in rotatable member 38 so as to secure closing device 36 in an open position in which feed through 30 remains open. The shear member passage 52 may be closed and sealed via a suitable plug 54 threadably or otherwise engaged with structure 28.

[0022] Depending on the application and the predetermined condition, the condition-sensitive device 46 may be formed with a variety of shear members 48 or other types of components which hold the closing device 36 in an open position until the predetermined condition is reached. If device 46 comprises a temperature-sensitive device, the shear member 48 may be formed from a degradable material 56. Material 56 degrades upon reaching the predetermined temperature to enable transition of the closing device 36 to a closed position, thus shearing communication line 32 and closing off feed through 30.

[0023] By way of example, degradable material 56 may comprise a material which melts at the predetermined temperature. A variety of metals, plastics, and composite materials may be used to provide the pin or other type of shear member 48 with a desired melting temperature. However, device 46 also may comprise a variety of other actuation techniques which release closing device 36 so that it may be actuated to the closed position. For example, bistable materials or materials with different coefficients of thermal expansion may be combined to temporarily hold the rotatable member 38 in an open position until a sufficiently high temperature is reached. Other materials and techniques also may be used to temporarily hold closing device 36 in the open position until occurrence of the predetermined temperature condition, pressure condition, or other condition.

[0024] In the example illustrated, protection system 35 comprises a variety of other components. For example, protection system 35 may comprise a plug 58 threadably or otherwise engaged with structure 28 to enclose the space 42 in which rotatable member 38 is rotatably received. By way of further example, protection system 35 may comprise a blowout prevention plug 60 received in a corresponding slot 62 located in structure 28. The corresponding slot 62 and blow out prevention plug 60 are positioned directly above rotatable member 38 of closing device 36. The corresponding slot 62 may be sealed by a plug 64 threadably or otherwise secured to structure 28.

[0025] Additionally, a biasing system 66 may be used to bias closing device 36 toward the closed position sealing off feed through 30. In an embodiment, biasing system 66 comprises a spring 68 which acts against rotatable member 38 in a manner which biases the rotatable member 38 to the closed position. With additional reference to Figure 3, the biasing system 66 may comprise a plurality of springs 68, e.g. compression springs, which act against corresponding pushrods 70. The pushrods 70 are oriented to act against abutments 72 located on rotatable member 38 at offset positions relative to the axis about which rotatable member 38 is rotated.

[0026] This offset application of force provides sufficient bias to rotate the rotatable member 38 through communication line 32 and to a closed position sealing off feed through 30 once the rotatable member 38 is released by condition-sensitive device 46. Thus, once the predetermined condition, e.g. predetermined temperature, occurs, the condition-sensitive device 46 is automatically actuated to release closing device 36. The biasing system 66 is then able to actuate closing device 36 for movement to the closed position. In the specific example illustrated, the corresponding pairs of springs 68 and pushrods 70 are received in passageways 74 which may be enclosed by plugs 76 threadably or otherwise engaged with structure 28.

[0027] Referring generally to Figure 4, another embodiment of protection system 35 is illustrated. In this embodiment, the protection system 35 employs closing device 36 in the form of a translatable device, e.g. a linearly translatable device, that may be translated between an open position and a closed position. In this example, the closing device 36 comprises a translatable member 78 which is biased toward a closed position by a spring member 80. By way of example, spring member 80 may comprise a compression spring, e.g. a stack of belleville washers, which bias the translatable member 78 linearly toward a closed position which closes and seals feed through 30. As with the previous embodiment, the translatable member 78 may be received in corresponding space 42 which is enclosed by the plug 58.

[0028] In this latter example, the translatable member 78 may comprise a conical section 82 having a passageway 84 through which communication line 32 extends when the translatable member 78 of closing device 36 is in the open position. The closing device 36 is held in the open position against the bias of spring member 80 by condition-sensitive device 46. By way of example, the condition-sensitive device 46 may be a temperature-sensitive device 46 comprising shear member 48. Shear member 48 may be in the form of a degradable disk positioned to hold the translatable member 78 in the open position until the predetermined temperature is reached.

[0029] Depending on the application and the predetermined condition, the condition-sensitive device 46 may again be formed with a variety of shear members 48. The condition-sensitive device 46 also may be formed with other types of components which hold the closing device 36 in an open position until the predetermined condition is reached. If device 46 comprises a temperature-sensitive device, the shear member/disk 48 may be formed from degradable material 56. Material 56 degrades upon reaching the predetermined temperature to enable transition of the closing device 36 to a closed position, thus shearing communication line 32 and closing off feed through 30.

[0030] The degradable material 56 may again comprise a material which melts at the predetermined temperature. A variety of metals, plastics, and composite materials may be used to provide the disk or other type of shear member 48 with a desired melting temperature. However, device 46 also may comprise a variety of other actuation techniques which release closing device 36 so that it may be actuated to the closed position. For example, bistable materials or materials with different coefficients of thermal expansion may be combined to temporarily hold the translatable member 78 in an open position until a sufficiently high temperature is reached. Other materials and techniques also may be used to temporarily hold closing device 36 in the open position until occurrence of the predetermined temperature condition, pressure condition, or other condition.

[0031] Once the predetermined condition is met, the condition-sensitive device 46 is actuated, e.g. disk 48 melts, and closing device 36 is released for actuation to the closed position. As illustrated in Figures 5 and 6, the degradation of shear member/disk 48 enables spring member 80 to cause translatable member 78 to shear through the shear member/disk 48 until conical section 82 sealingly seats against the corresponding surface of interior space 42 in a closed position, as illustrated by Figure 6. During translation to this closed position, the translatable member 78 is forced through the communication line 32, thus severing the communication line 32. In the example illustrated, the melted or degraded remains of shear member/disk 48 collect in a reservoir 86.

[0032] The system 20, e.g. well system, may be used in a variety of applications, including numerous well production applications, treatment applications, and non-well related tubing applications. Depending on the specifics of a given tubing string, well application, and environment, the construction of the overall system 20 and wellhead 22 may vary. Additionally, the system 20 may be designed for use in many types of wells, including vertical wells and deviated, e.g. horizontal, wells. The wells may be drilled in a variety of formations with single or multiple production zones and with many different types of downhole devices 34.

[0033] Depending on the application, the protection system 35 may be constructed in several configurations. For example, the closing device 36 and the condition-sensitive device 46 may have a variety of components and configurations. Additionally, the closing device 36 and condition-sensitive device 46 may be operatively engaged via a variety of techniques and components. If the condition-sensitive device 46 is a temperature-sensitive device, various materials able to melt or otherwise degrade at a desired temperature may be employed to at least temporarily hold the closing device in an open position. The closing device 36 also may be used in combination with individual or plural feed throughs arranged in various orientations. Similarly, many types of communication lines and combinations of communication lines (as well as other devices) may be routed through the feed through and subjected to severing if certain predetermined conditions are met.

[0034] Although a few embodiments of the disclosure have been described in detail above, those of ordinary skill in the art will readily appreciate that many modifications are possible without materially departing from the teachings of this disclosure. Accordingly, such modifications are intended to be included within the scope of this disclosure as defined in the claims.

CLAIMS

What is claimed is:

- 1 1. A system, comprising:
2 a wellhead structure having a feed through;
3 a condition-sensitive device mounted to the wellhead structure, the
4 condition-sensitive device being automatically actuated upon exposure to a
5 predetermined condition; and
6 a closing device positioned at the feed through in operative engagement
7 with the condition-sensitive device such that automatic actuation of the condition-
8 sensitive device upon reaching the predetermined condition causes the closing
9 device to close the feed through.
- 1 2. The system as recited in claim 1, wherein the condition-sensitive device
2 comprises a temperature-sensitive device mounted to the wellhead structure, the
3 temperature-sensitive device being automatically actuated upon exposure to a
4 predetermined temperature.
- 1 3. The system as recited in claim 1, further comprising a communication line
2 extending through the feed through.
- 1 4. The system as recited in claim 3, wherein the communication line comprises an
2 optical fiber.
- 1 5. The system as recited in claim 3, wherein the communication line comprises an
2 electrical conductor.
- 1 6. The system as recited in claim 3, wherein the communication line comprises a
2 hydraulic line.

- 1 7. The system as recited in claim 3, wherein the closing device severs the
2 communication line when the closing device is actuated to close the feed through.
1
- 1 8. The system as recited in claim 1, wherein the closing device is spring biased to
2 close the feed through.
- 1 9. The system as recited in claim 2, wherein the temperature-sensitive device
2 comprises a shear member.
1
- 1 10. The system as recited in claim 2, wherein the temperature-sensitive device melts
2 upon reaching the predetermined temperature.
1
- 1 11. The system as recited in claim 1, wherein the closing device is rotated to close the
2 feed through.
- 1 12. The system as recited in claim 1, wherein the closing device is translated to close
2 the feed through.
- 1 13. A method, comprising:
2 providing a feed through in a wellhead structure;
3 positioning a closing device in the wellhead structure at a location to
4 enable closing of the feed through via the closing device; and
5 using a temperature-sensitive device to hold the closing device in an open
6 position until a predetermined temperature is reached, the predetermined
7 temperature causing the temperature-sensitive device to initiate closing of the feed
8 through via the closing device.
1
- 1 14. The method as recited in claim 13, wherein positioning comprises positioning the
2 closing device for rotation between an open position and a closed position.

- 1 15. The method as recited in claim 13, wherein positioning comprises positioning the
2 closing device for translation between an open position and a closed position.
- 1 16. The method as recited in claim 13, wherein using the temperature-sensitive device
2 comprises using a degradable pin to hold the closing device in an open position
3 until the predetermined temperature is reached.
- 1 17. The method as recited in claim 13, wherein using the temperature-sensitive device
2 comprises using a degradable disk to hold the closing device in an open position
3 until the predetermined temperature is reached.
- 1 18. The method as recited in claim 13, further comprising severing a communication
2 line located in the feed through while closing the feed through.
- 1 19. A method, comprising:
2 providing a feed through in a structure;
3 routing a communication line through the feed through;
4 positioning a closing device in the structure at a location to enable closing
5 of the feed through via the closing device; and
6 using a condition-sensitive device to initiate actuation of the closing
7 device to sever the communication line and to close the feed through once the
8 condition-sensitive device is sufficiently exposed to a predetermined condition.
- 1 20. The method as recited in claim 19, wherein using comprises using a temperature-
2 sensitive device having a material which degrades at a predetermined
3 temperature.

FIG. 1

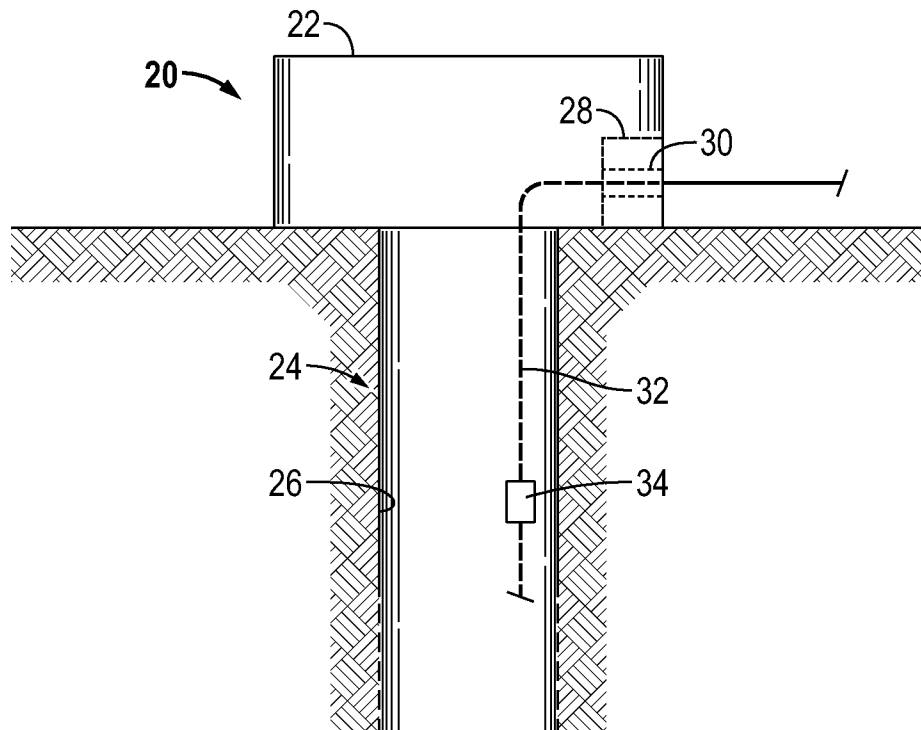


FIG. 2

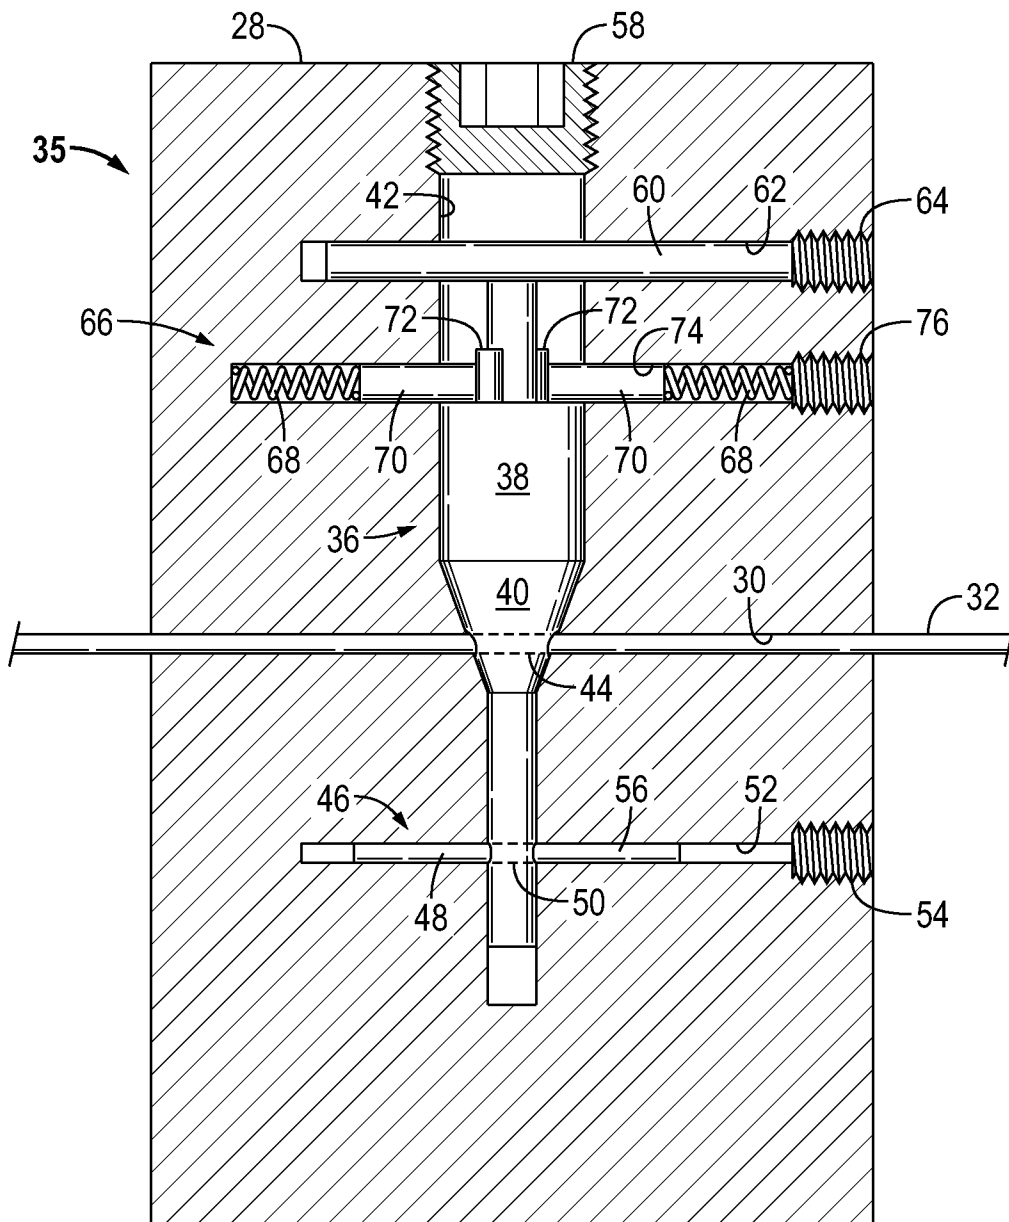


FIG. 3

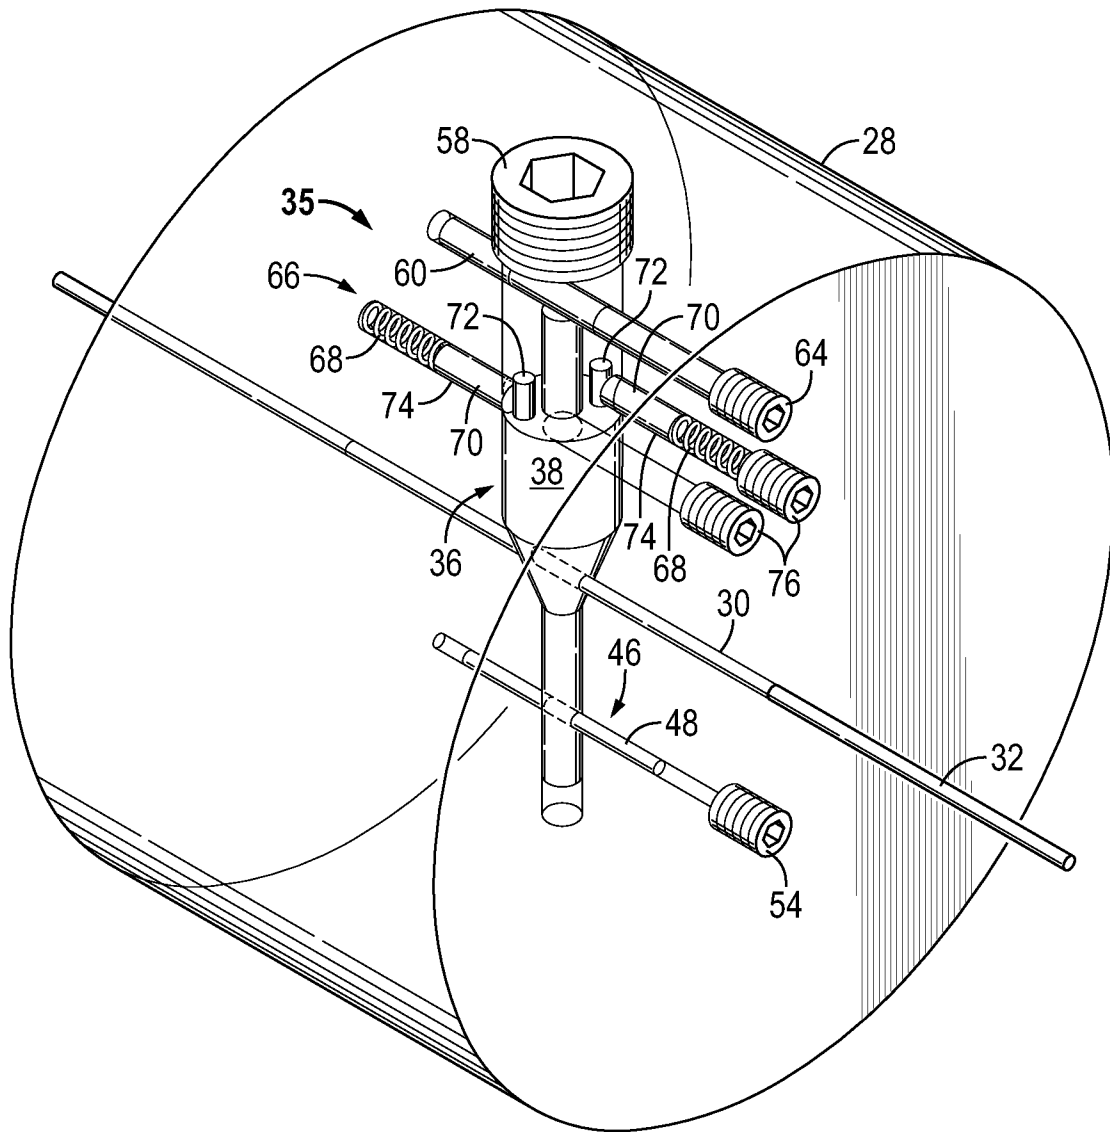


FIG. 4

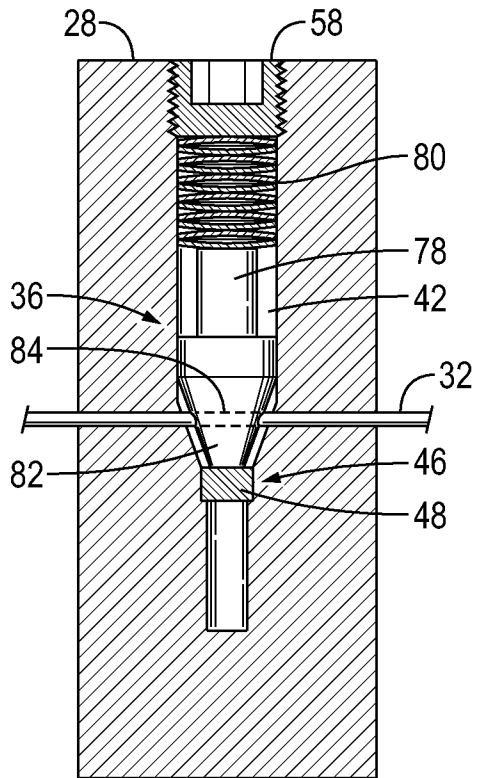


FIG. 5


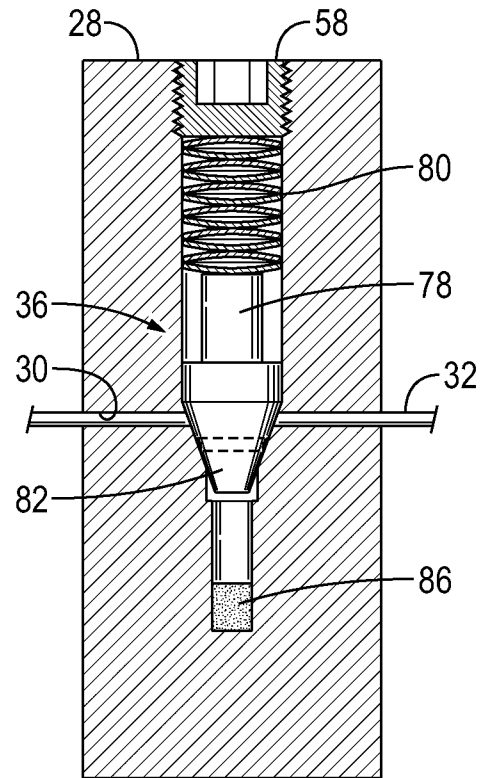


FIG. 6

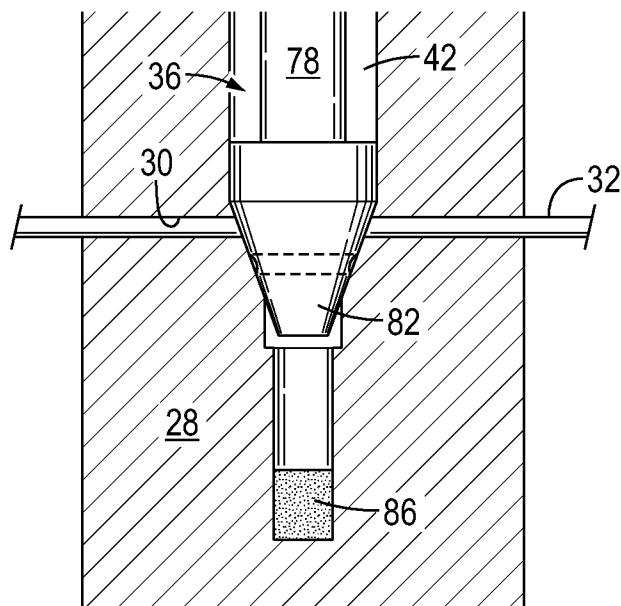

A. CLASSIFICATION OF SUBJECT MATTER**E21B 33/02(2006.01)i, E21B 33/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 33/02; E21B 34/06; E21B 43/00; G05D 7/06; E21B 33/12; F16K 31/145; F16K 51/00; G01V 11/00; E21B 33/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: wellhead, condition, sensitive, temperature, close and communication

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2012-0067567 A1 (RYTLEWSKI et al.) 22 March 2012 See paragraph [0013].	1-20
A	US 7301472 B2 (KYLE et al.) 27 November 2007 See column 4, lines 14-16 and figure 2.	1-20
A	US 2012-0227983 A1 (LYMBEROPOULOS et al.) 13 September 2012 See paragraphs [0036], [0037], [0050], [0051], [0064], [0065] and figure 6.	1-20
A	US 7380609 B2 (PAGE et al.) 03 June 2008 See column 16, lines 55-62 and figure 1.	1-20
A	US 6450477 B1 (YOUNG, TERRY G.) 17 September 2012 See column 6, lines 6-15 and figure 5.	1-20

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 September 2014 (25.09.2014)

Date of mailing of the international search report

25 September 2014 (25.09.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

JEONG, A Ram

Telephone No. +82-42-481-3388



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/040136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0067567 A1	22/03/2012	NO 20111279 A	23/03/2012
US 7301472 B2	27/11/2007	EP 1534928 A1 EP 1534928 B1 US 2004-0047235 A1 WO 2004-022915 A1	01/06/2005 25/07/2007 11/03/2004 18/03/2004
US 2012-0227983 A1	13/09/2012	WO 2013-177212 A1	28/11/2013
US 7380609 B2	03/06/2008	AP 200603518 D0 AT 471435 T AU 2003-904183 D0 AU 2004-263549 A1 AU 2004-263549 B2 AU 2009-217427 A1 AU 2009-217427 B2 BR PI0413431 A CA 2533805 A1 CN 101586462 A CN 101586462 B CN 1860282 A CN 1860282 B CN 1860282 C0 DE 602004027743 D1 EG 24233A EP 1664479 A1 EP 1664479 A4 EP 1664479 B1 EP 2287439 A1 IL 173486 D0 NO 20060622 A RU 2006106719 A RU 2362005 C2 US 2005-0028980 A1 US 2006-0237189 A1 US 7438135 B2 WO 2005-014971 A1	28/02/2006 15/07/2010 21/08/2003 17/02/2005 20/08/2009 15/10/2009 13/05/2010 10/10/2006 17/02/2005 25/11/2009 14/11/2012 08/11/2006 28/04/2010 08/11/2006 29/07/2010 11/11/2008 07/06/2006 11/02/2009 16/06/2010 23/02/2011 11/06/2006 02/05/2006 20/09/2007 20/07/2009 10/02/2005 26/10/2006 21/10/2008 17/02/2005
US 6450477 B1	17/09/2002	AU 2092095 A US 06089531 A US 2005-0017209 A1 US 2005-0067592 A1 US 2006-0091339 A1 US 6250605 B1 US 6854704 B1 US 7028986 B2 WO 95-23937 A1	18/09/1995 18/07/2000 27/01/2005 31/03/2005 04/05/2006 26/06/2001 15/02/2005 18/04/2006 08/09/1995