



US 20070256571A1

(19) **United States**

(12) **Patent Application Publication**

**Popeil et al.**

(10) **Pub. No.: US 2007/0256571 A1**

(43) **Pub. Date: Nov. 8, 2007**

(54) **COOKING DEVICE TO DEEP FAT FRY FOODS**

Said application No. 11/425,317 is a continuation-in-part of application No. 11/345,187, filed on Feb. 1, 2006.

(76) Inventors: **Ronald M. Popeil**, Beverly Hills, CA (US); **Alan L. Backus**, Los Angeles, CA (US); **Kathryn Popeil-Gantman**, Newbury Park, CA (US); **Lauren Popeil**, Los Angeles, CA (US); **Shannon Popeil-Stairs**, Calabasas, CA (US)

(60) Provisional application No. 60/706,859, filed on Aug. 8, 2005.

**Publication Classification**

(51) **Int. Cl.**  
*A47J 37/12* (2006.01)

(52) **U.S. Cl.** ..... **99/407**

(57) **ABSTRACT**

A cooking device include an outer housing and a cooking cavity disposed within and separate from the outer housing. The cooking cavity accommodates a volume of cooking liquid therein. The device includes a heater positioned adjacent the cooking cavity to heat the cooking liquid. A lid is movably attached to the device and is used to form a seal with the cooking cavity. The lid includes a transparent portion positioned along a top surface to enable viewing inside of the cooking cavity. A controller can be used to heat the cooking fluid for an amount of time designated by user input. A moving mechanism can be used to move a food article into and out of the cooking liquid. The moving mechanism can be automated. The device can include a drainage system for removing the cooking liquid.

Correspondence Address:


**TUCKER ELLIS & WEST LLP**  
**1150 HUNTINGTON BUILDING**  
**925 EUCLID AVENUE**  
**CLEVELAND, OH 44115-1414 (US)**

(21) Appl. No.: **11/539,655**

(22) Filed: **Oct. 9, 2006**

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 11/425,317, filed on Jun. 20, 2006.  
Continuation-in-part of application No. PCT/US06/30946, filed on Aug. 8, 2006.

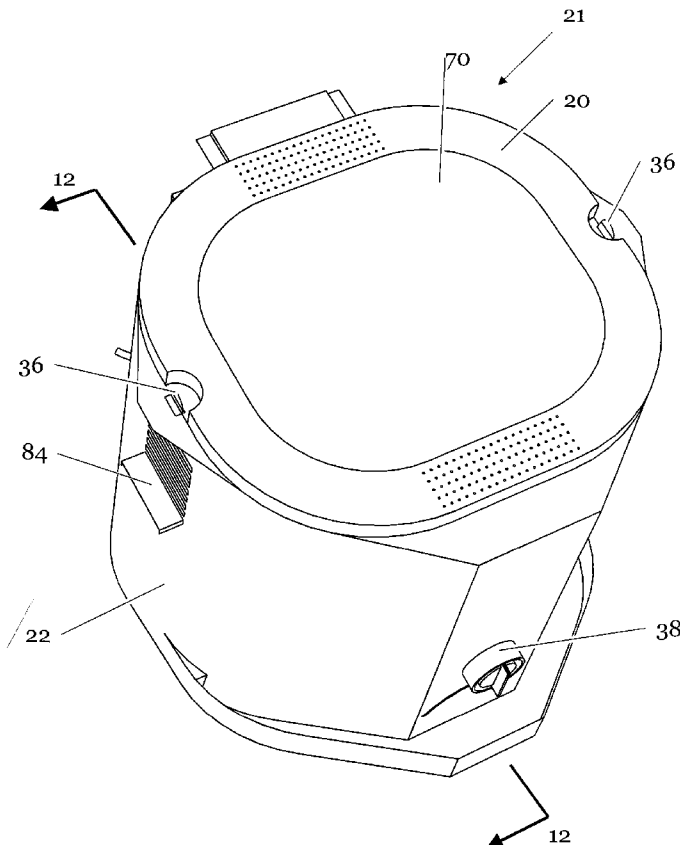

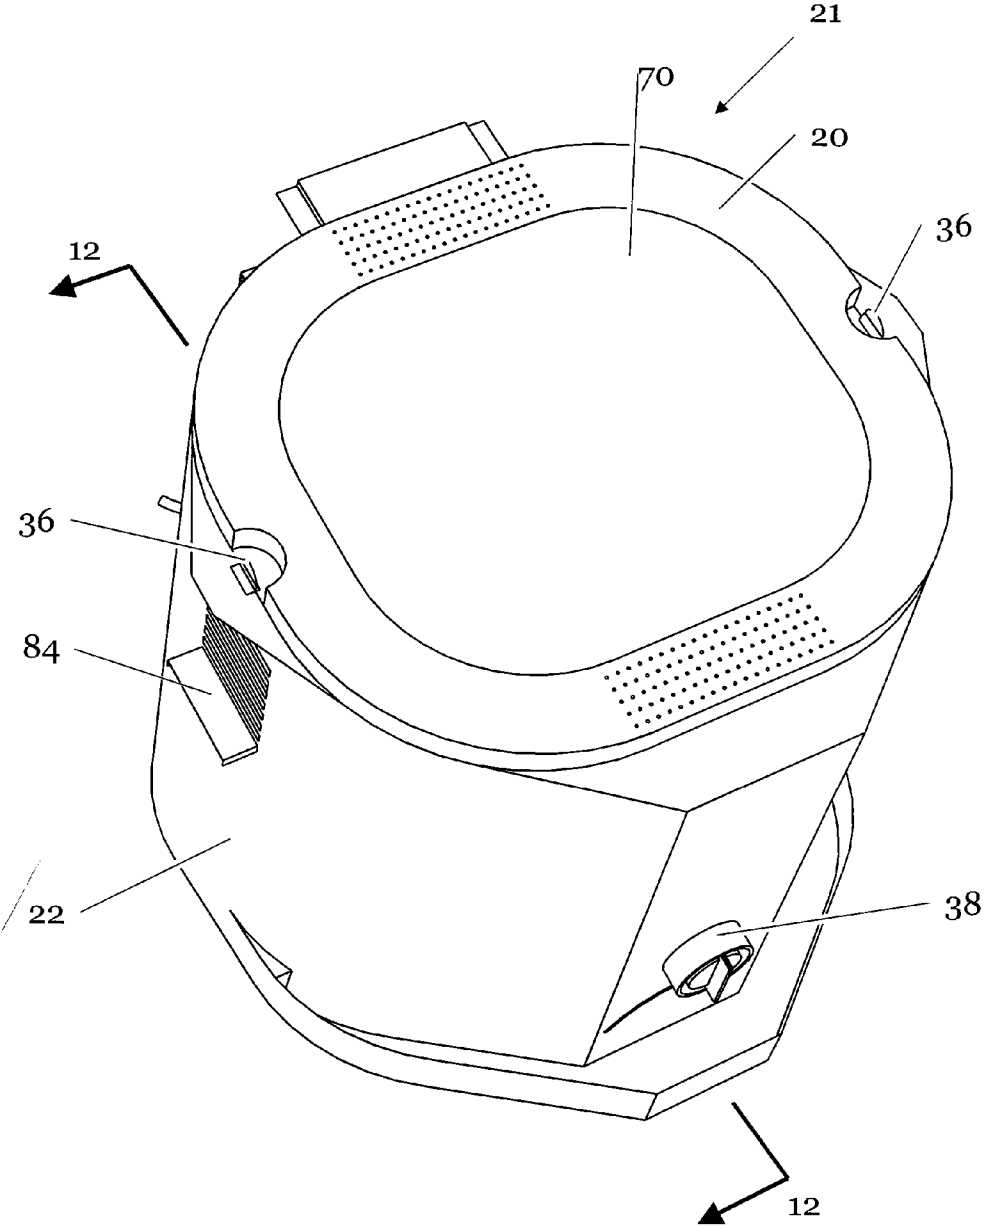


Figure 1

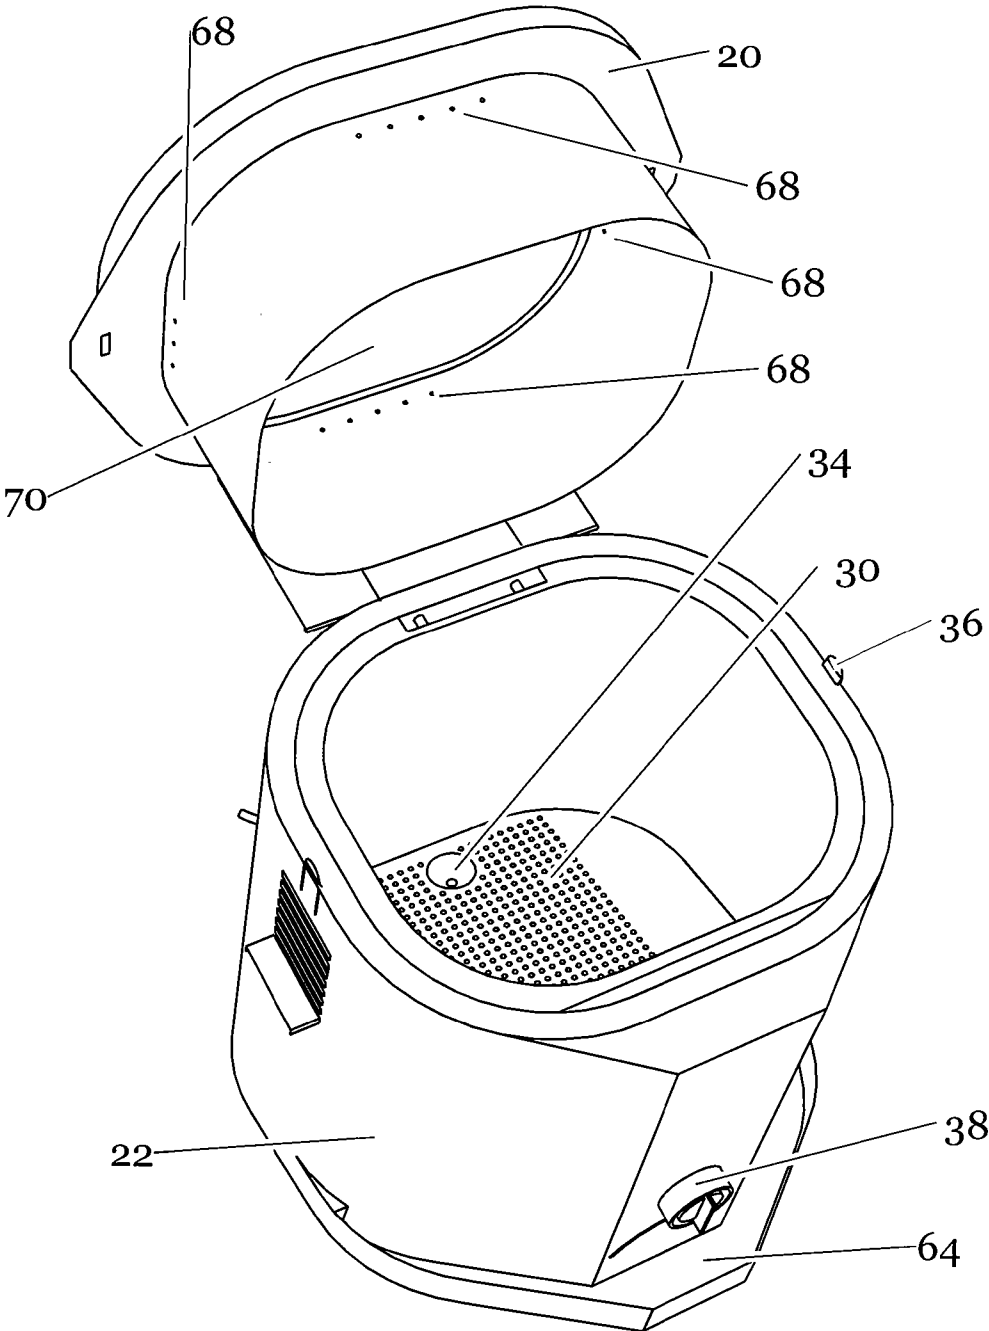


Figure 2

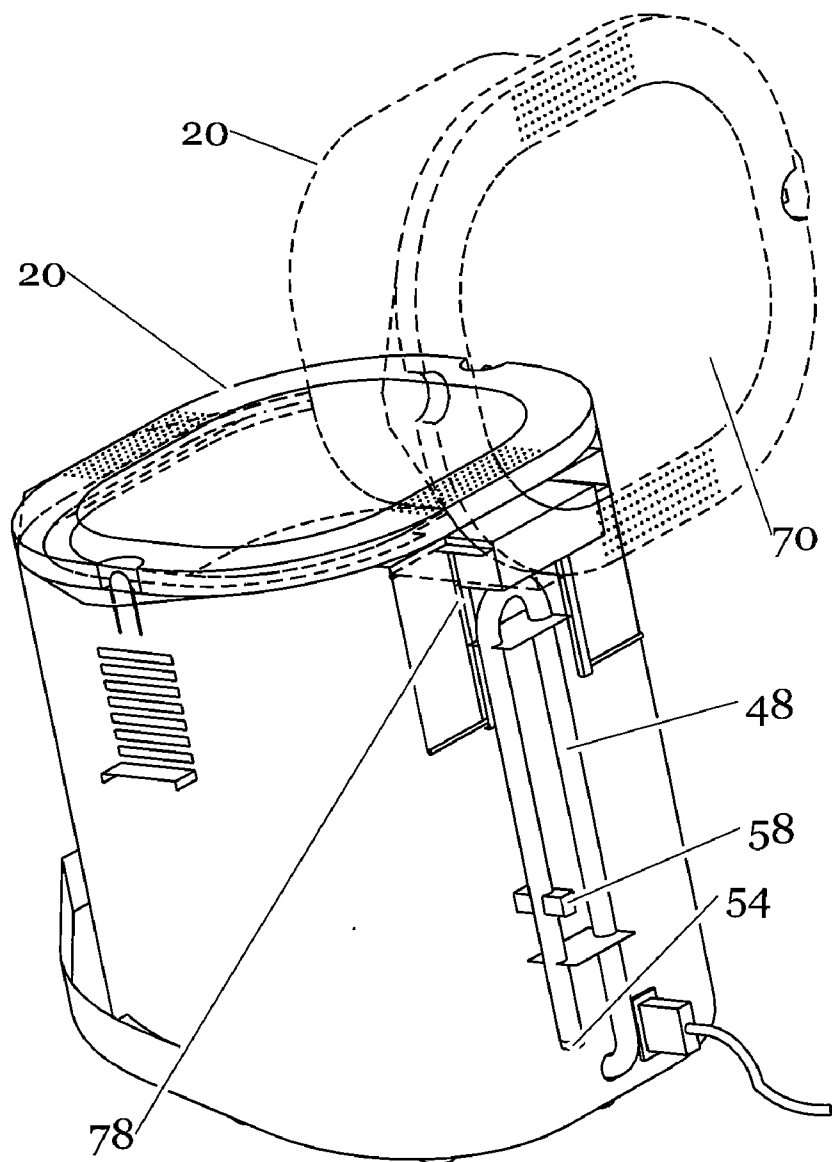


Figure 3

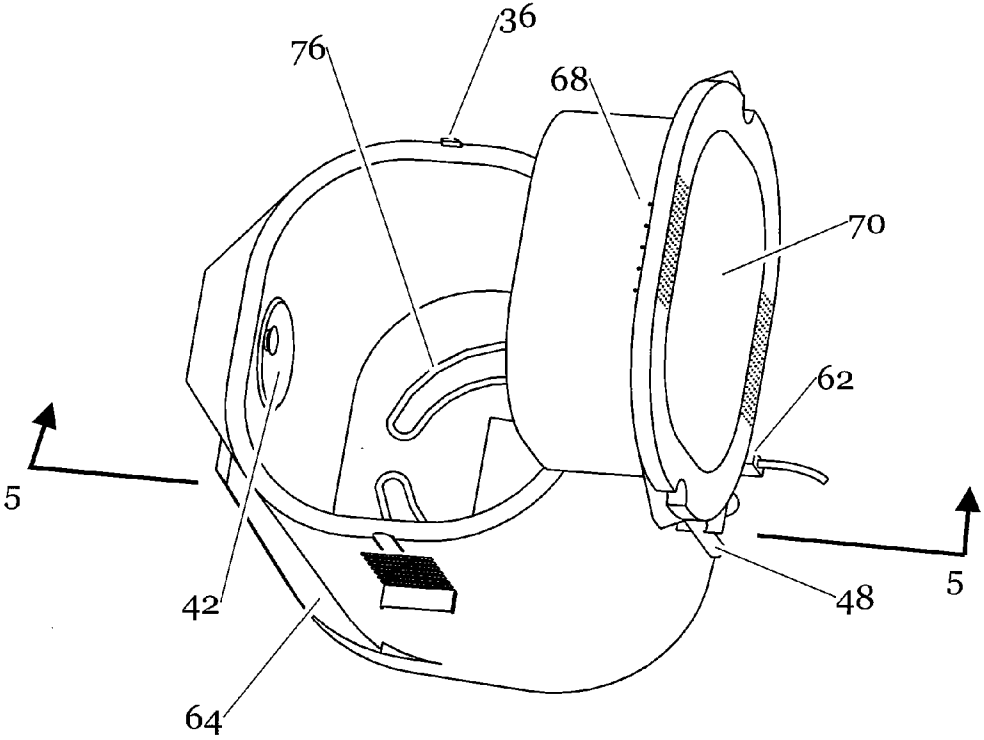


Figure 4

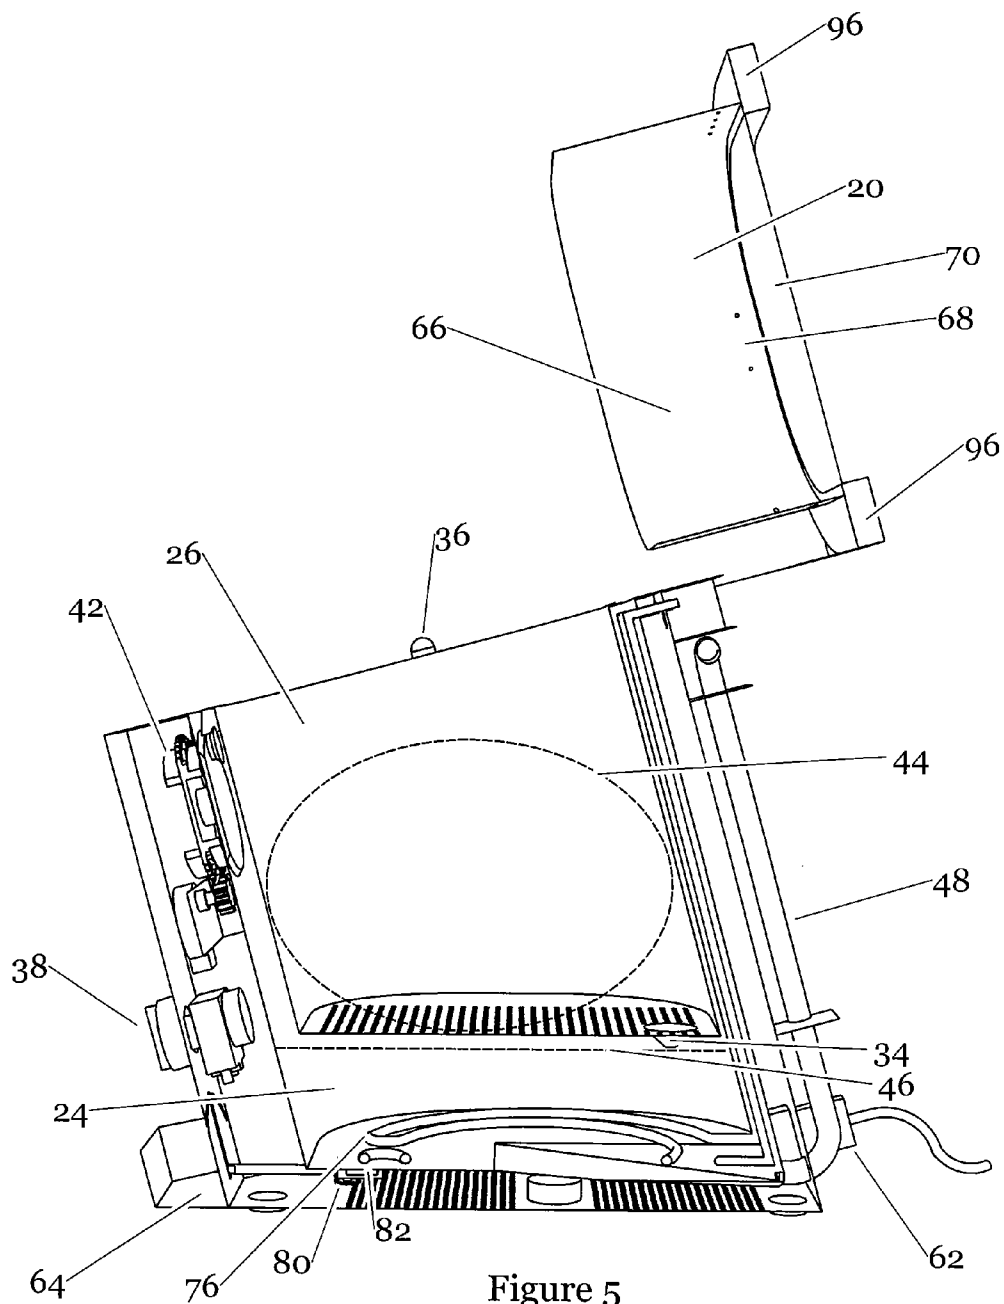


Figure 5

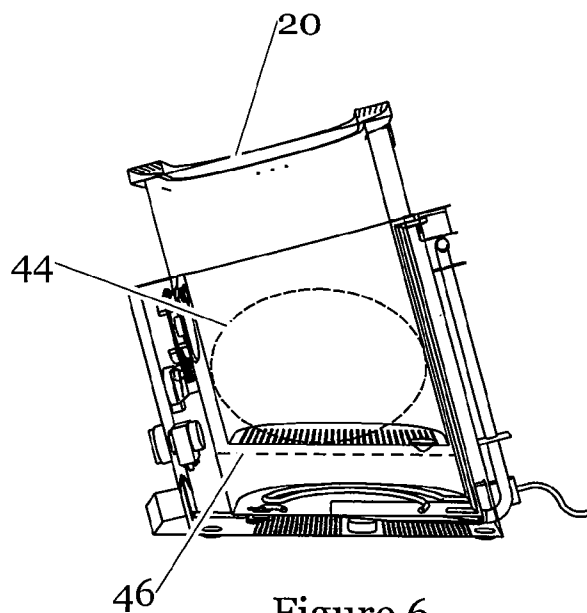


Figure 6

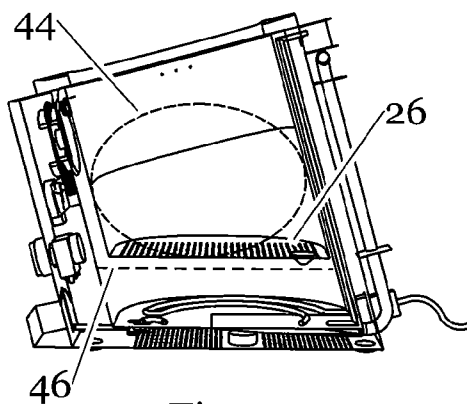


Figure 7

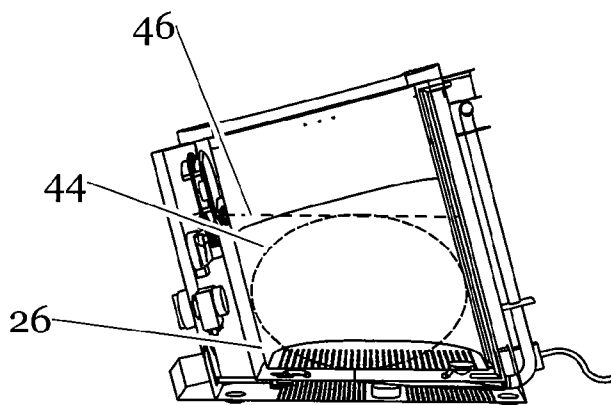


Figure 8

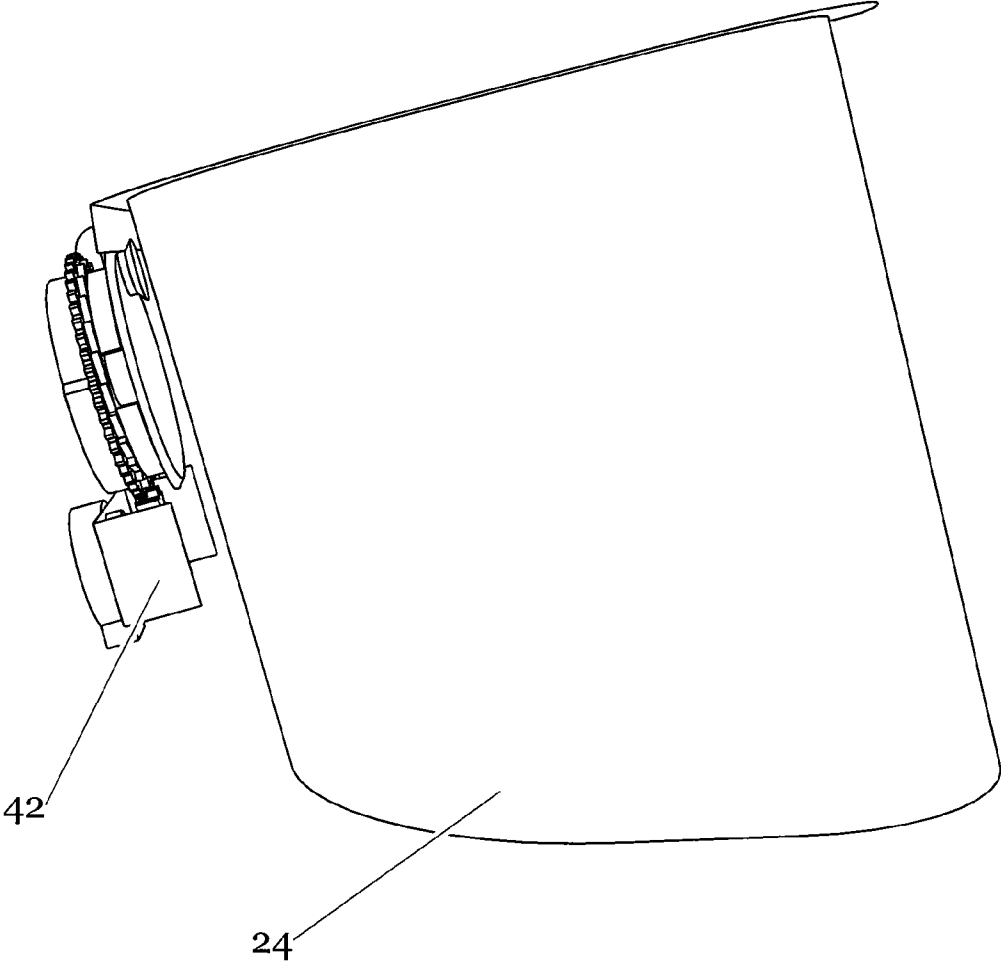


Figure 9



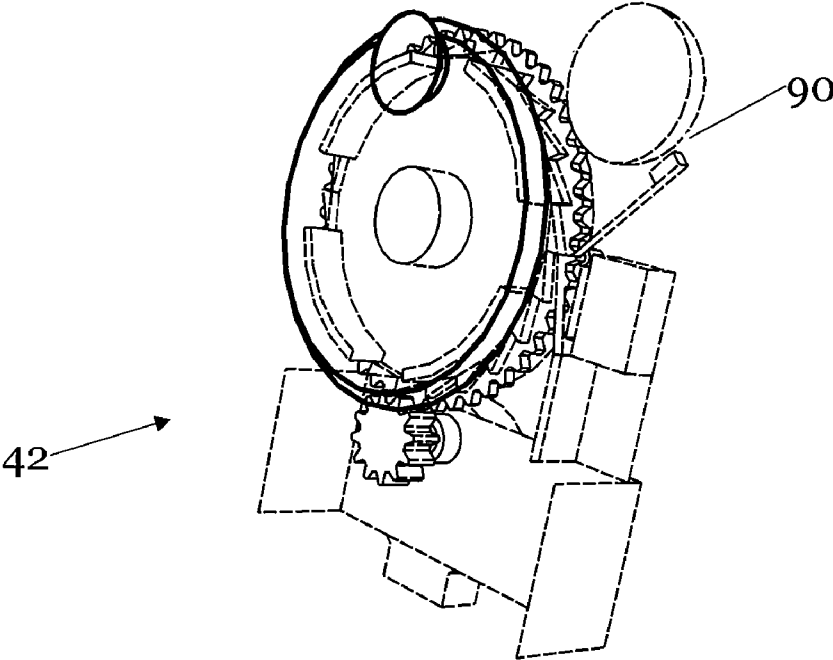


Figure 10

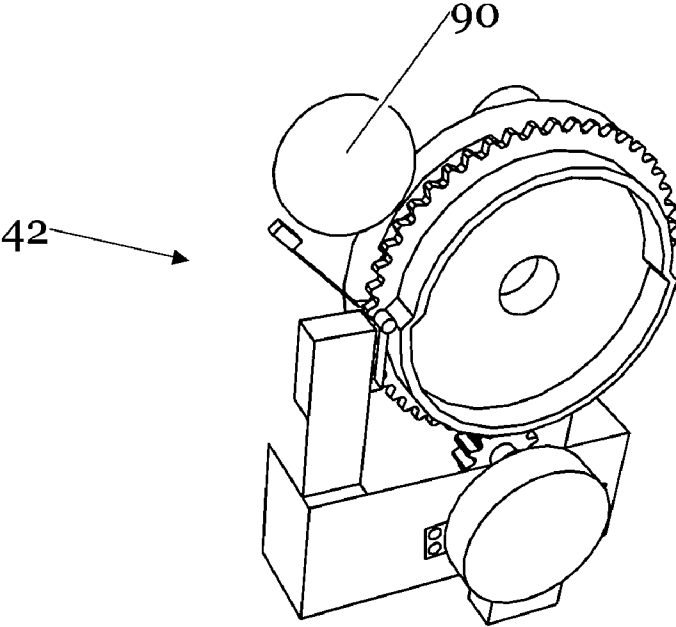


Figure 11

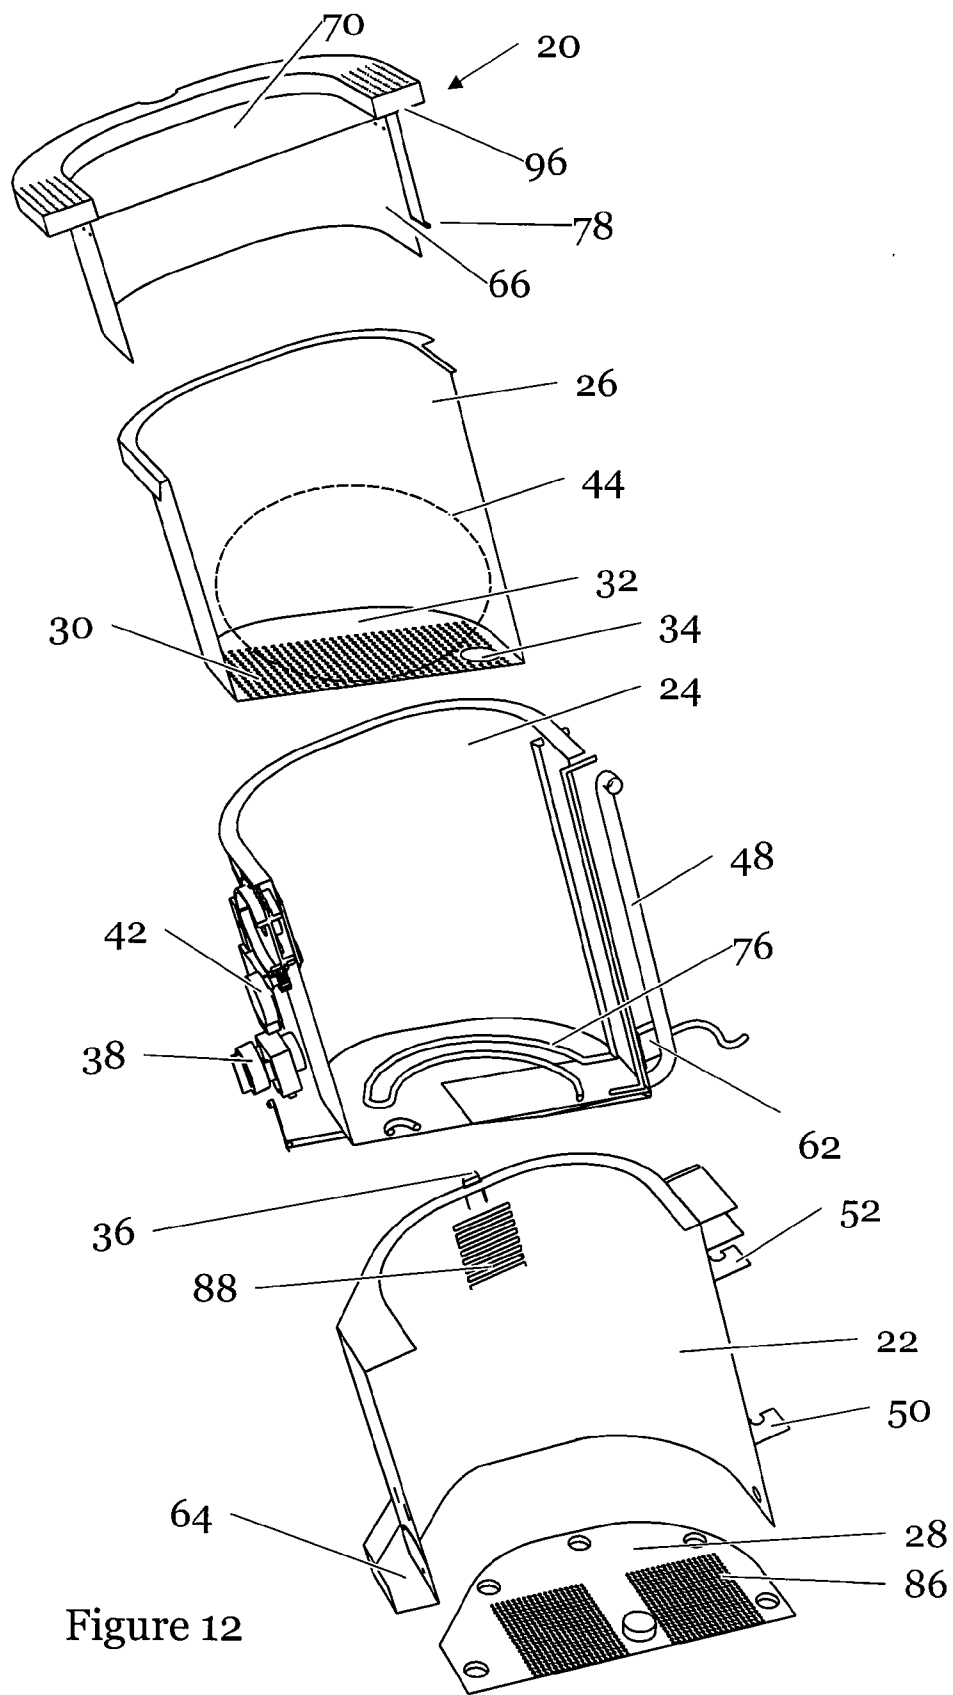


Figure 12

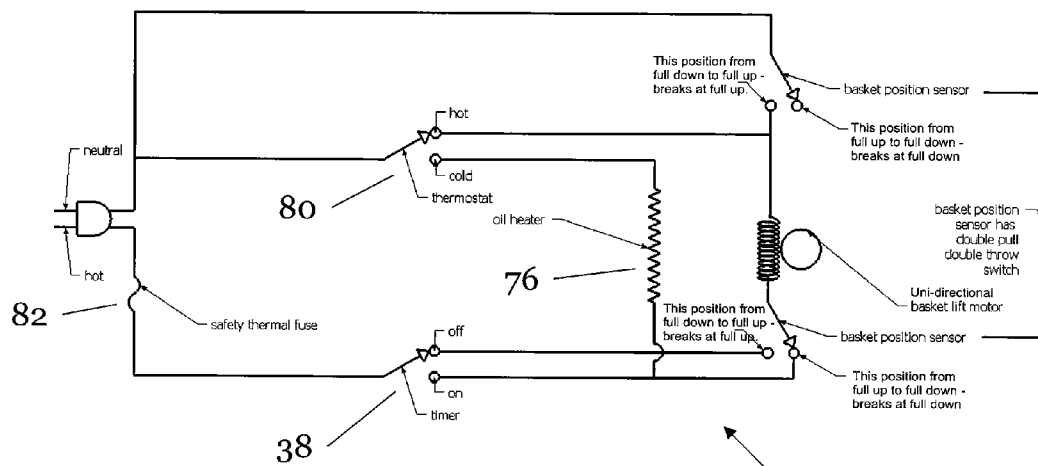


Figure 13

40

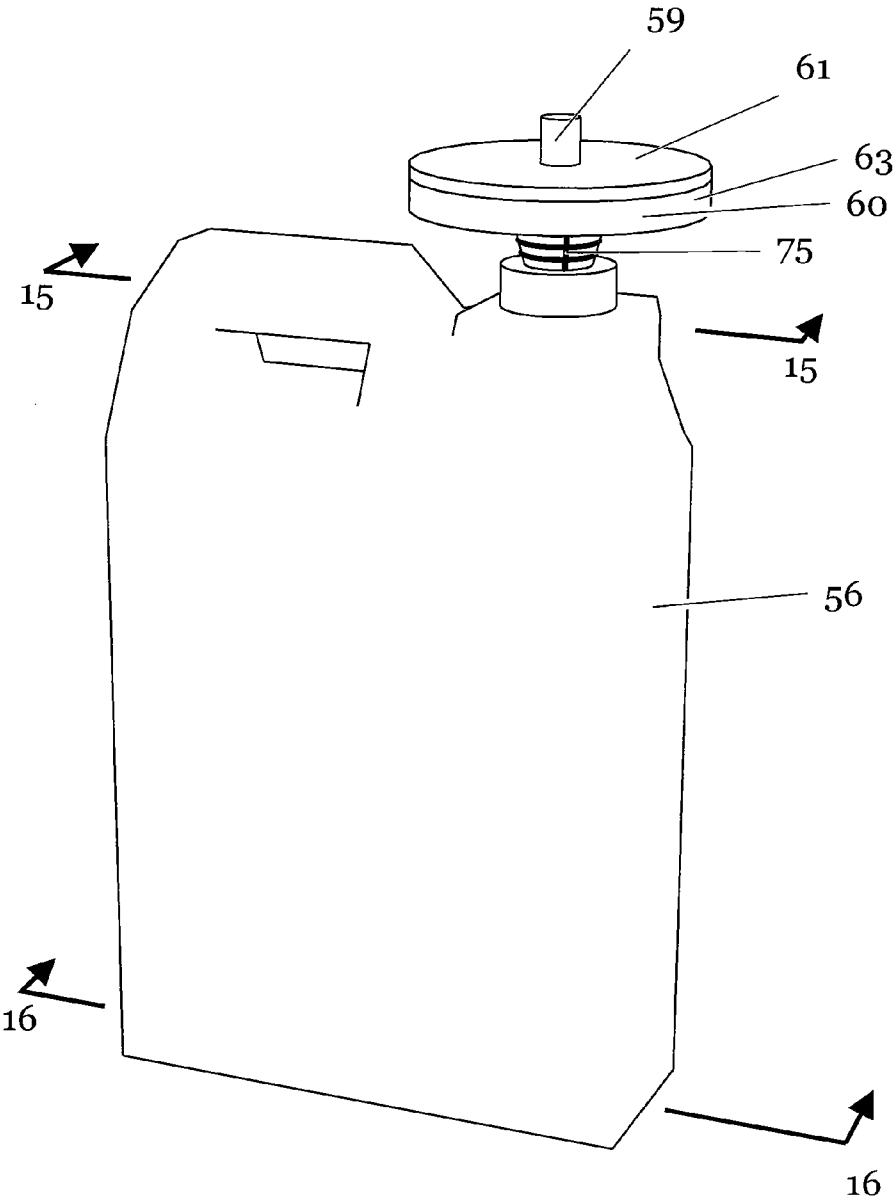


Figure 14

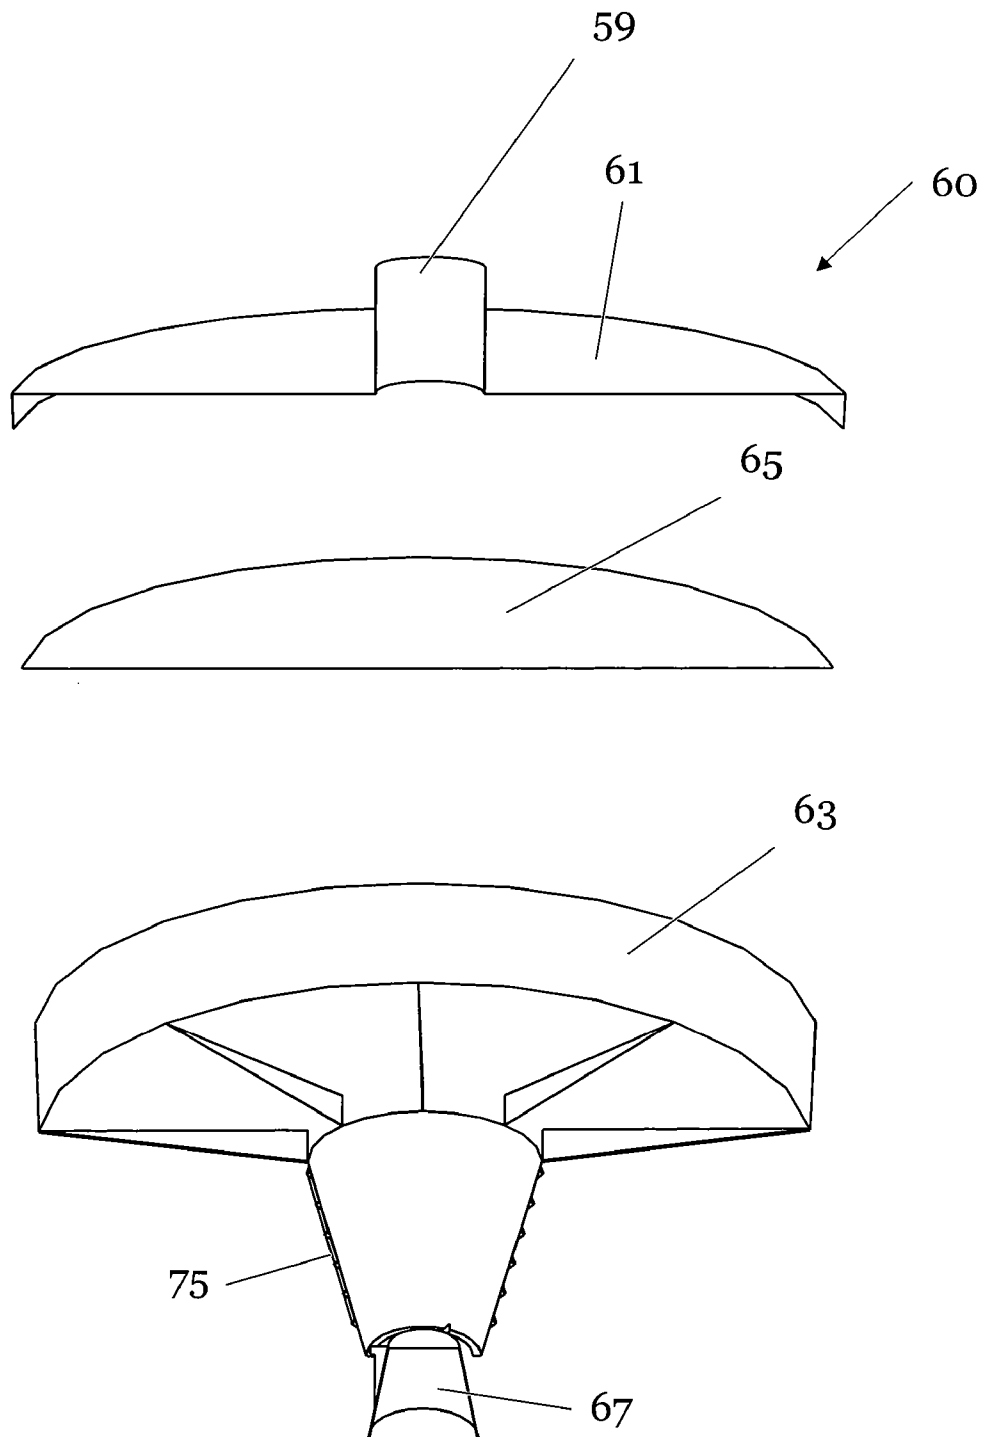


Figure 15

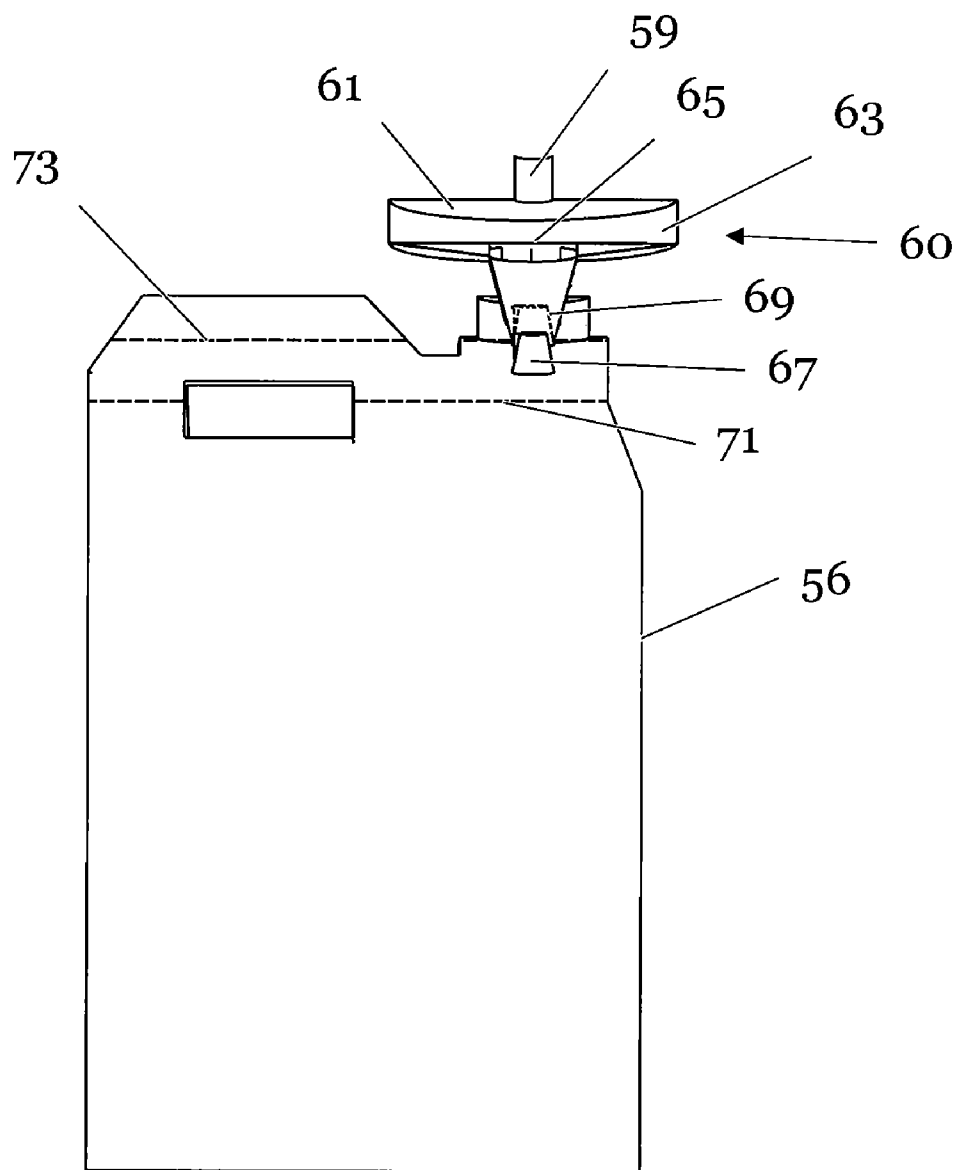


Figure 16

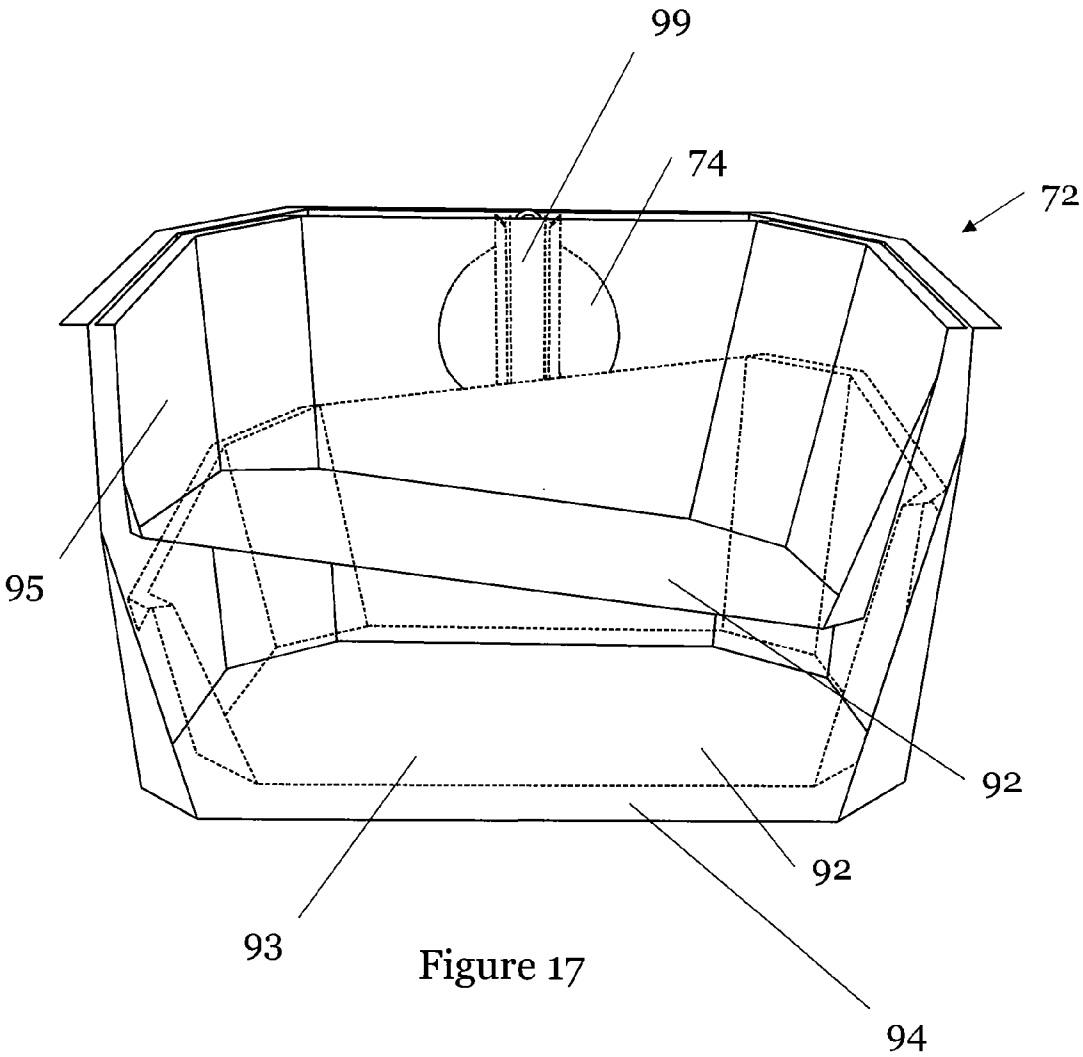


Figure 17

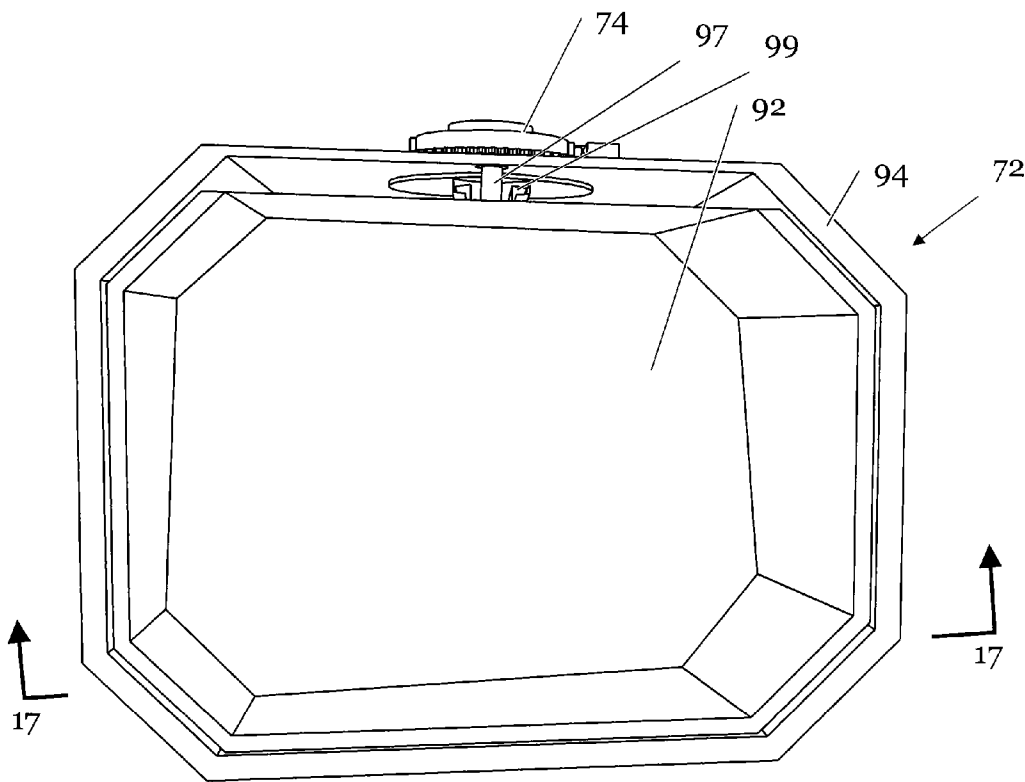


Figure 18



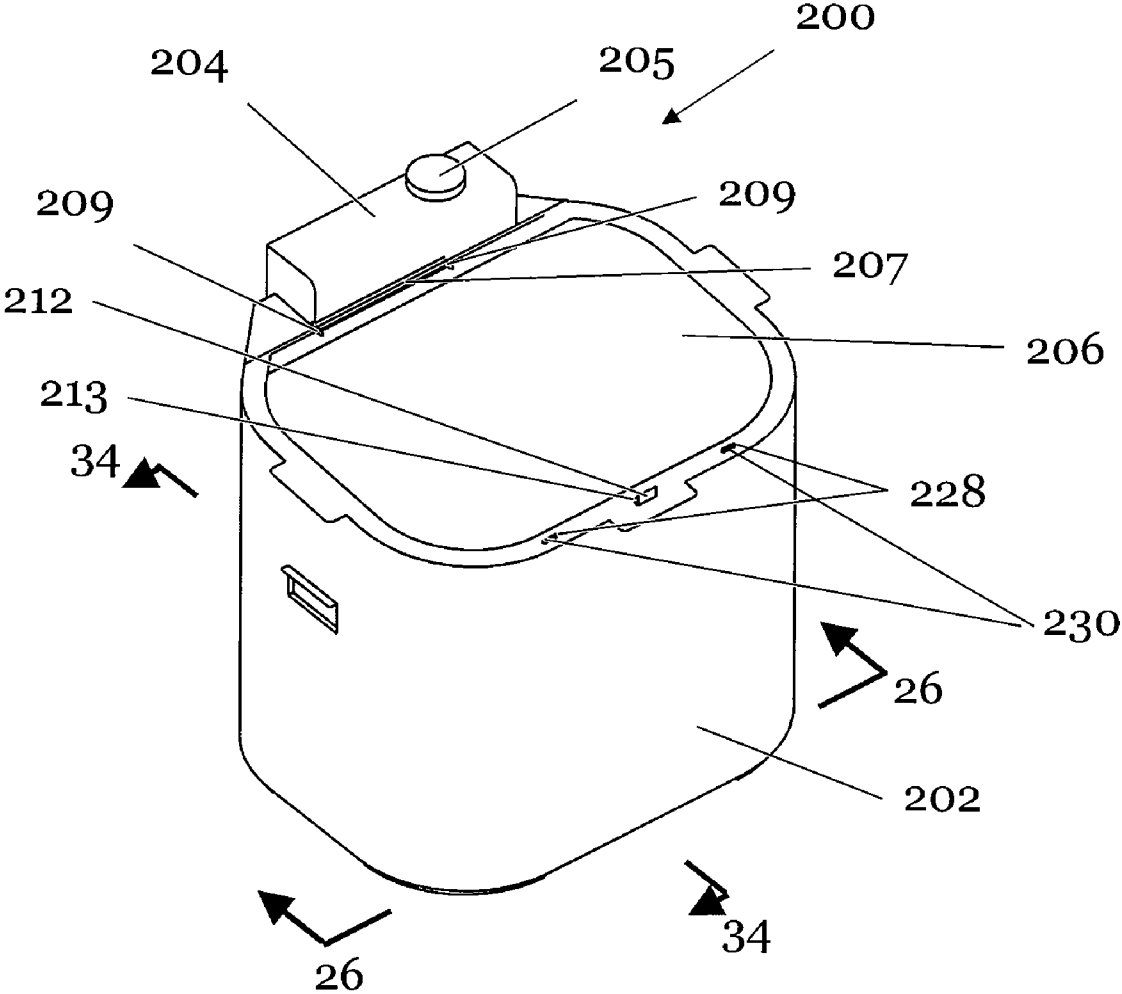


Figure 19

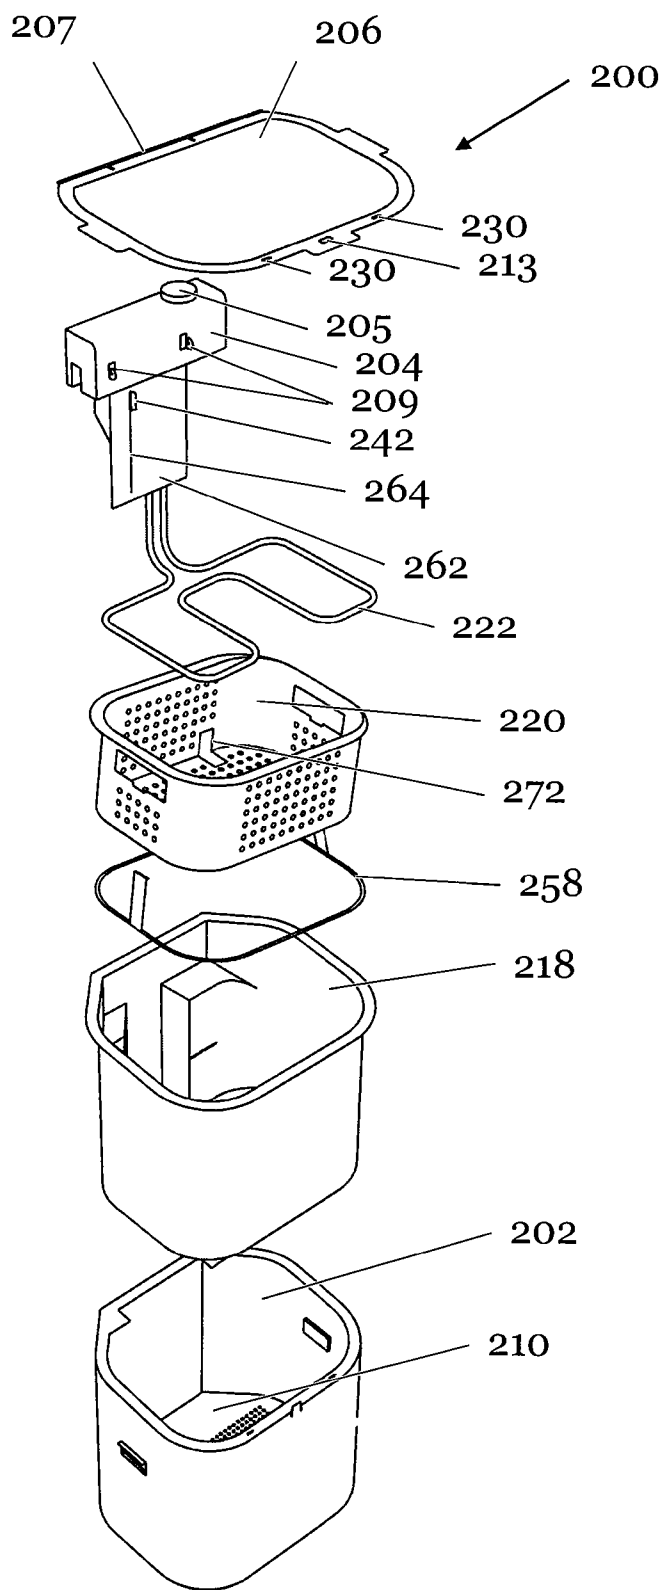
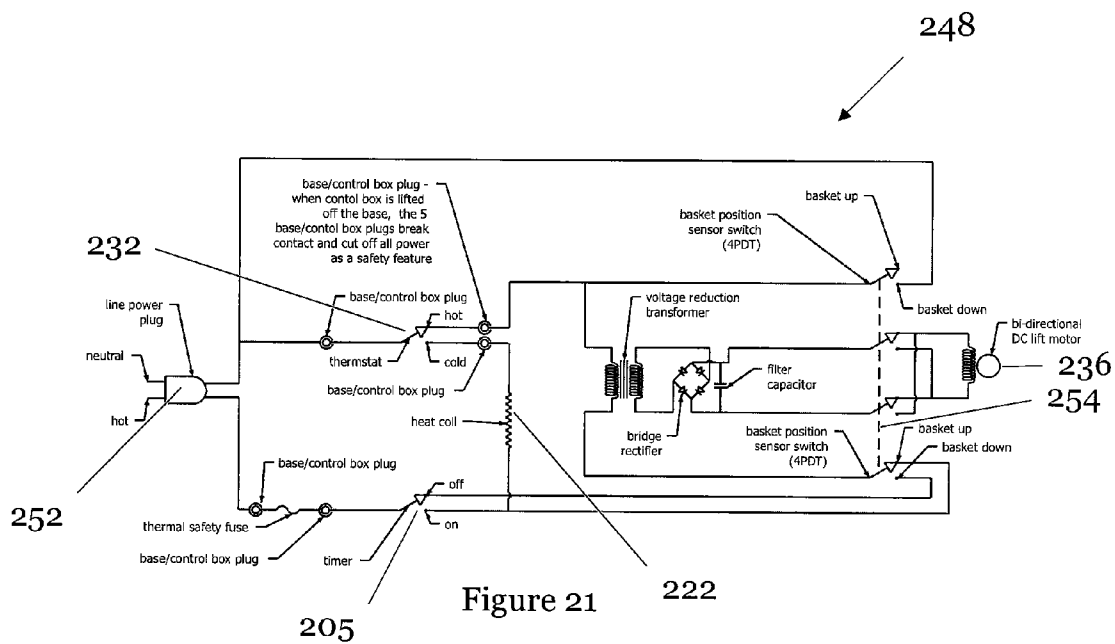


Figure 20



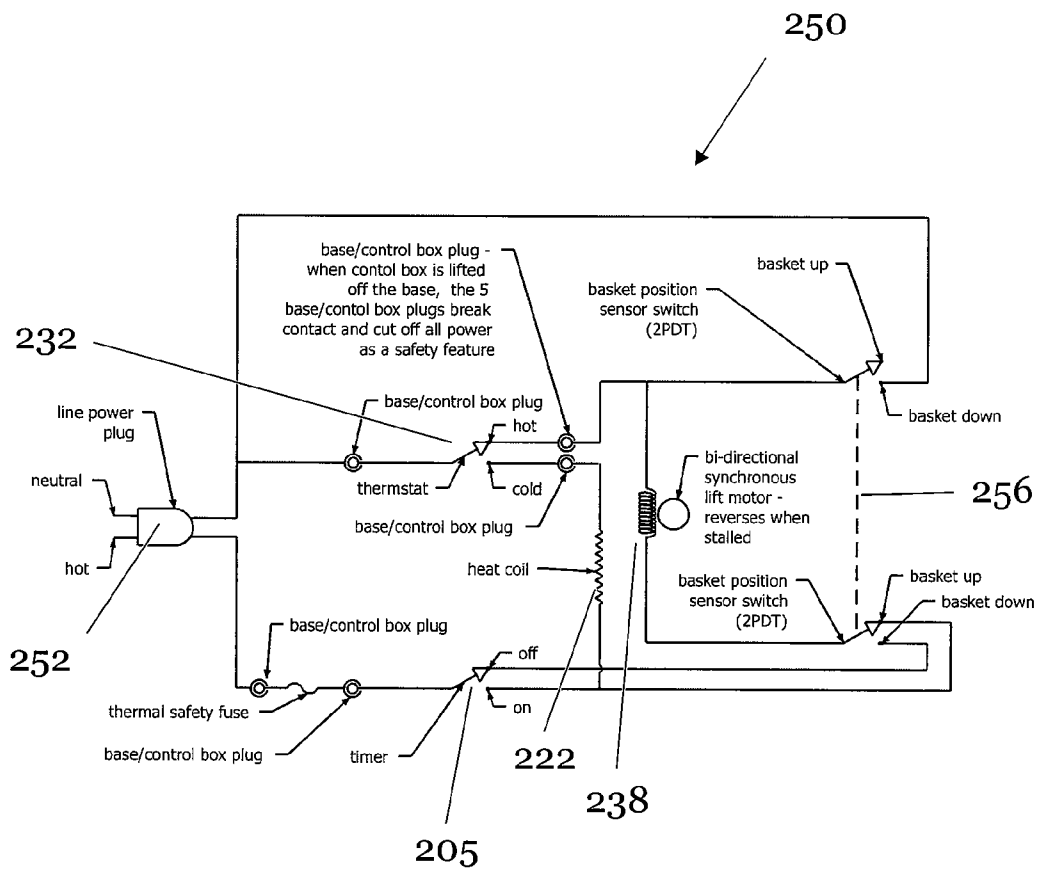


Figure 22

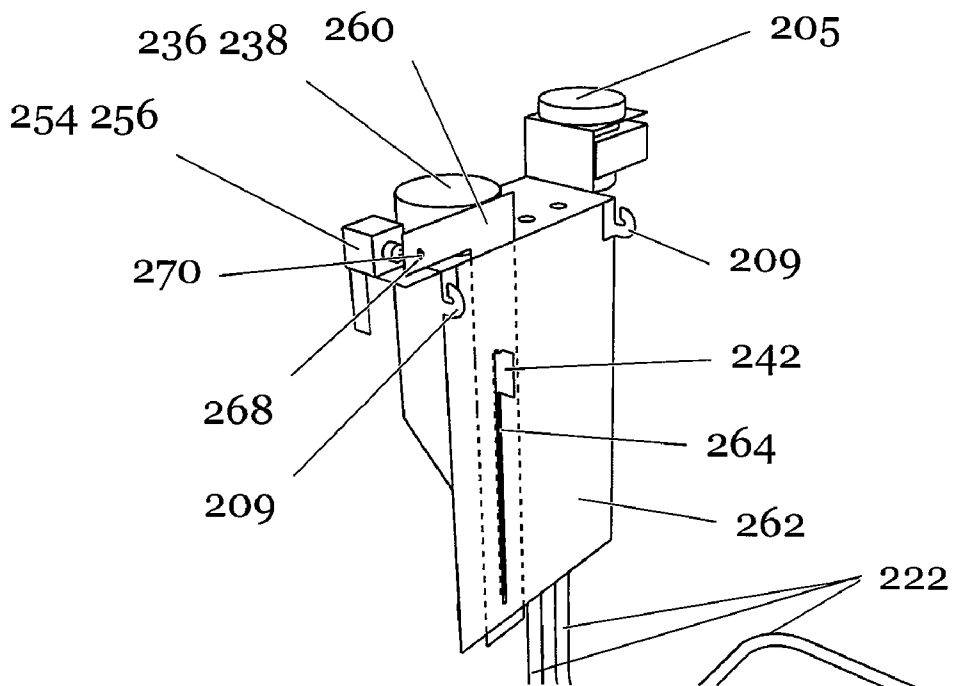


Figure 23

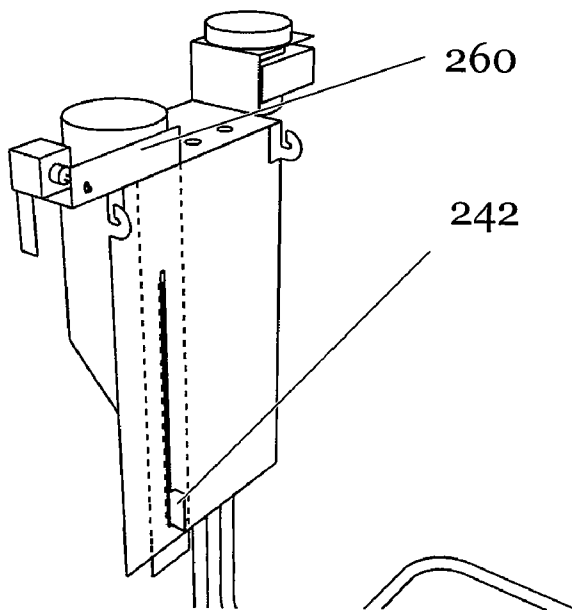


Figure 24

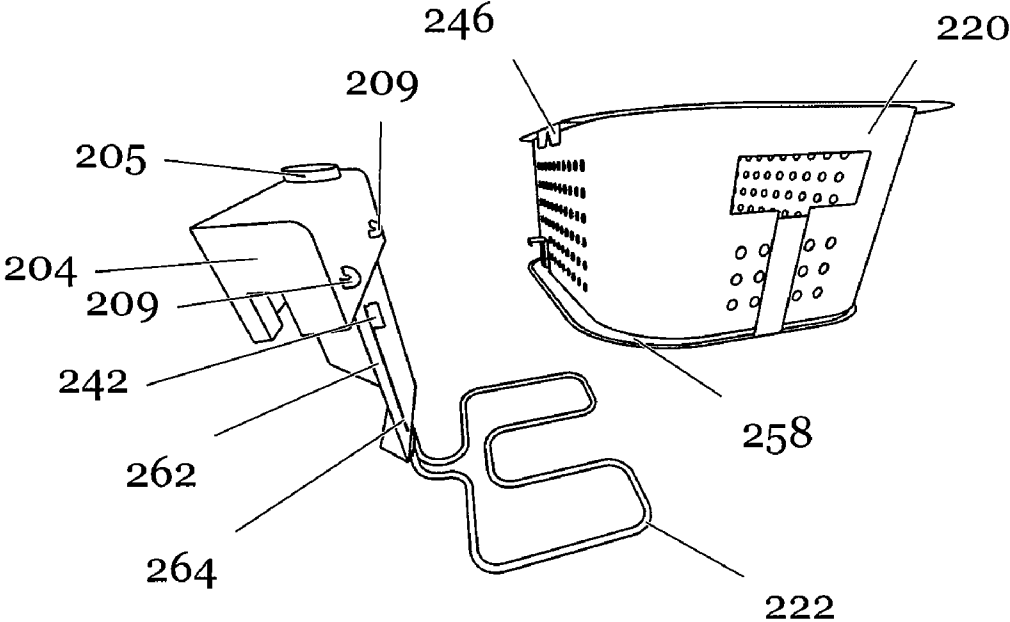


Figure 25

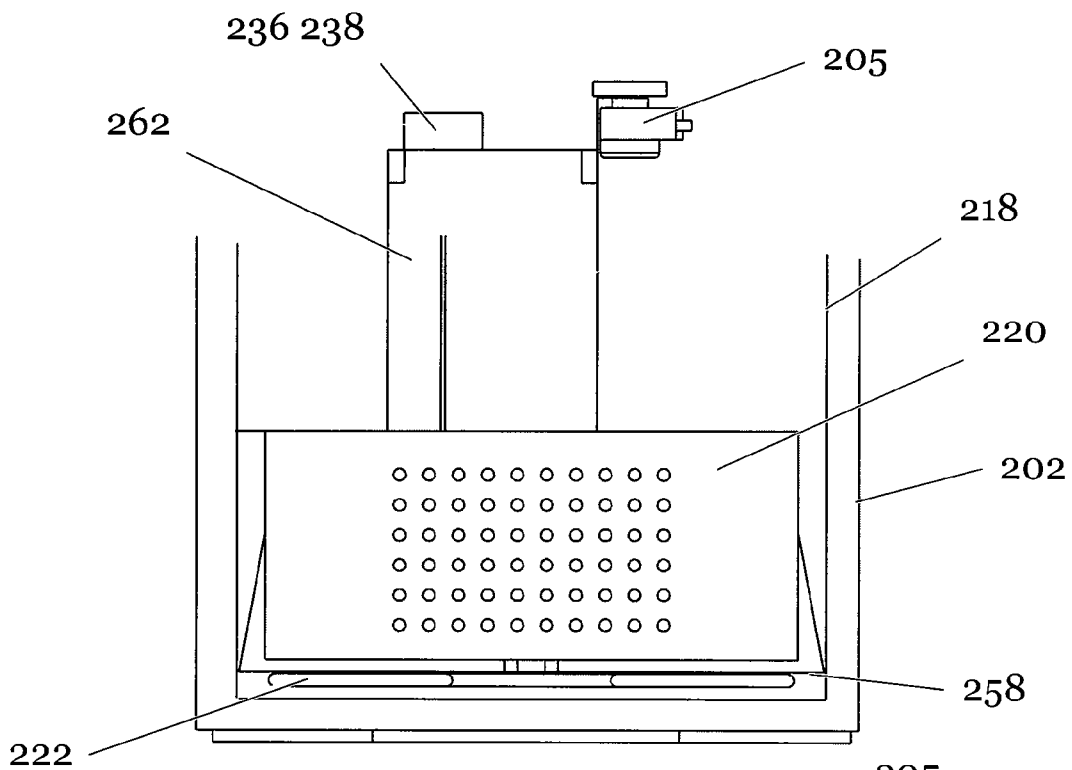


Figure 26

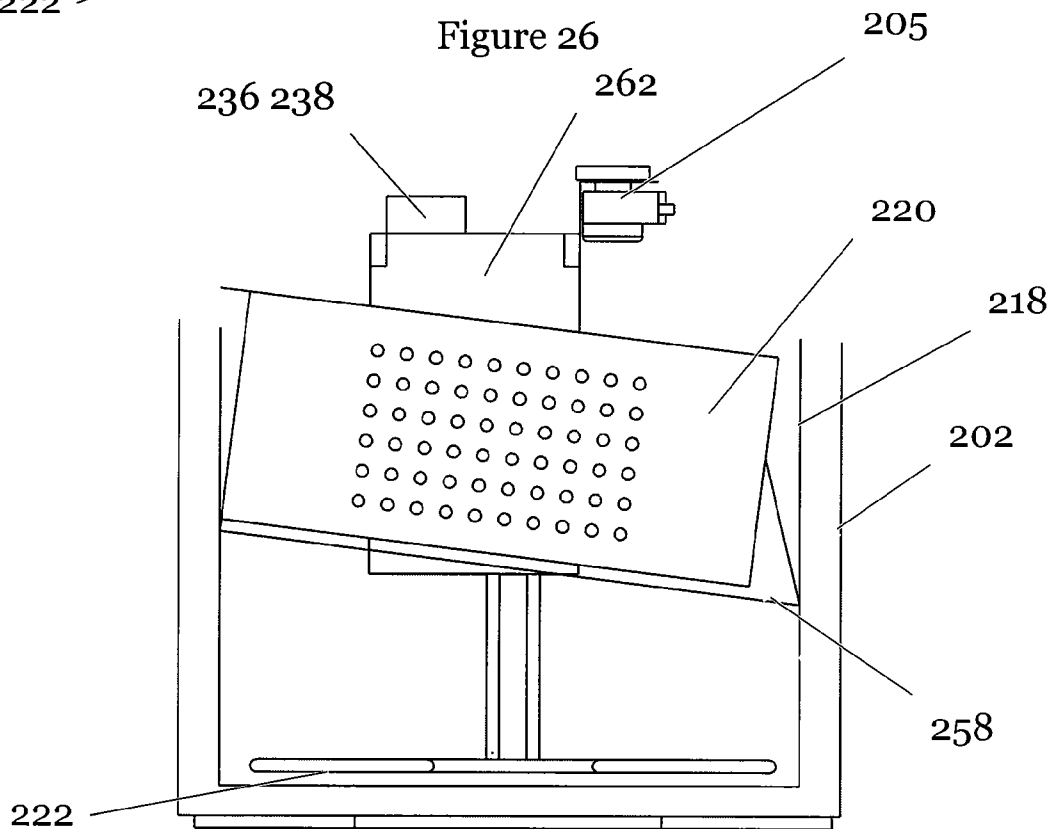


Figure 27

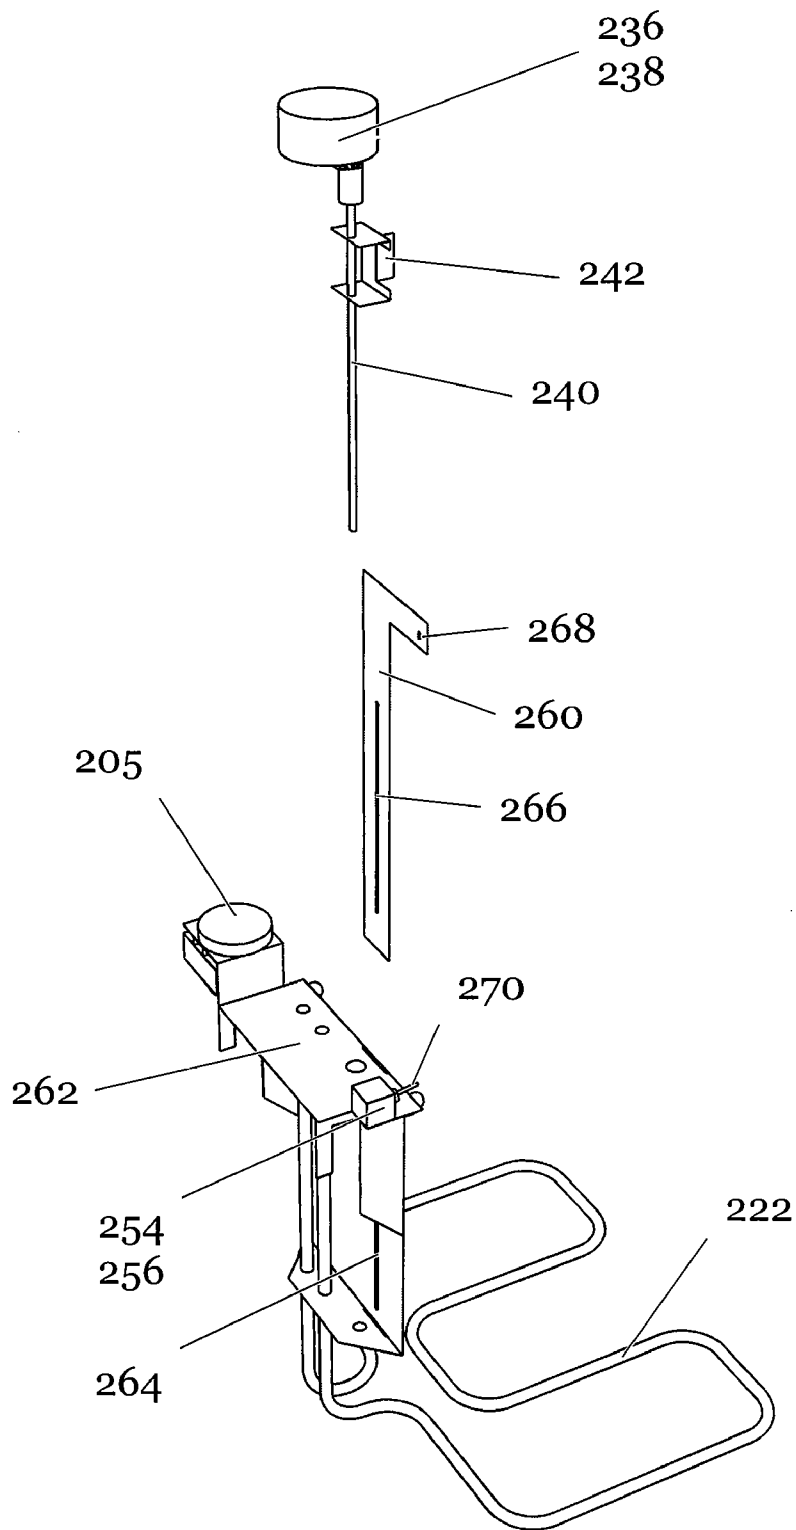


Figure 28



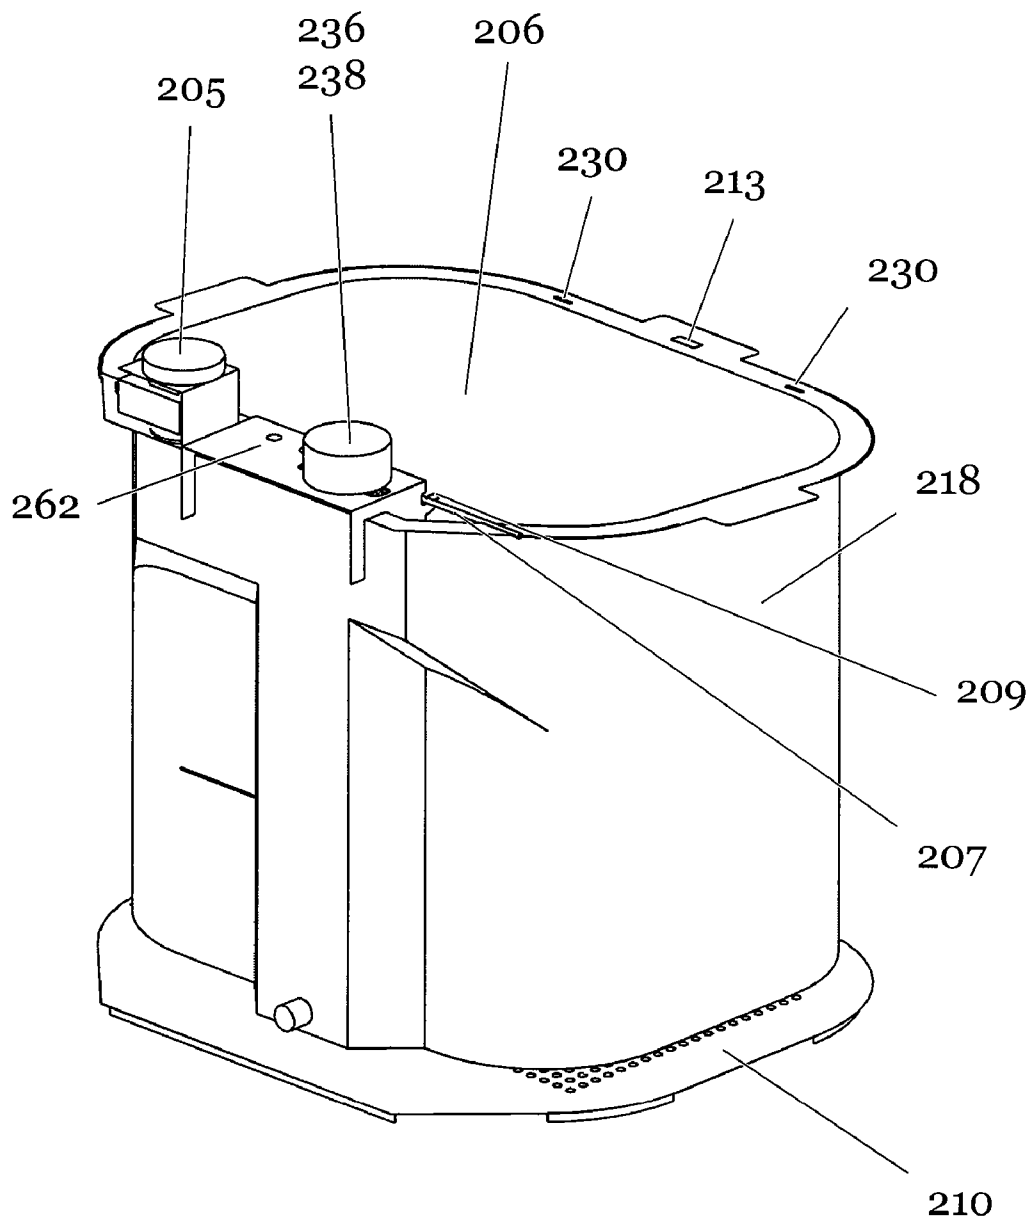


Figure 29

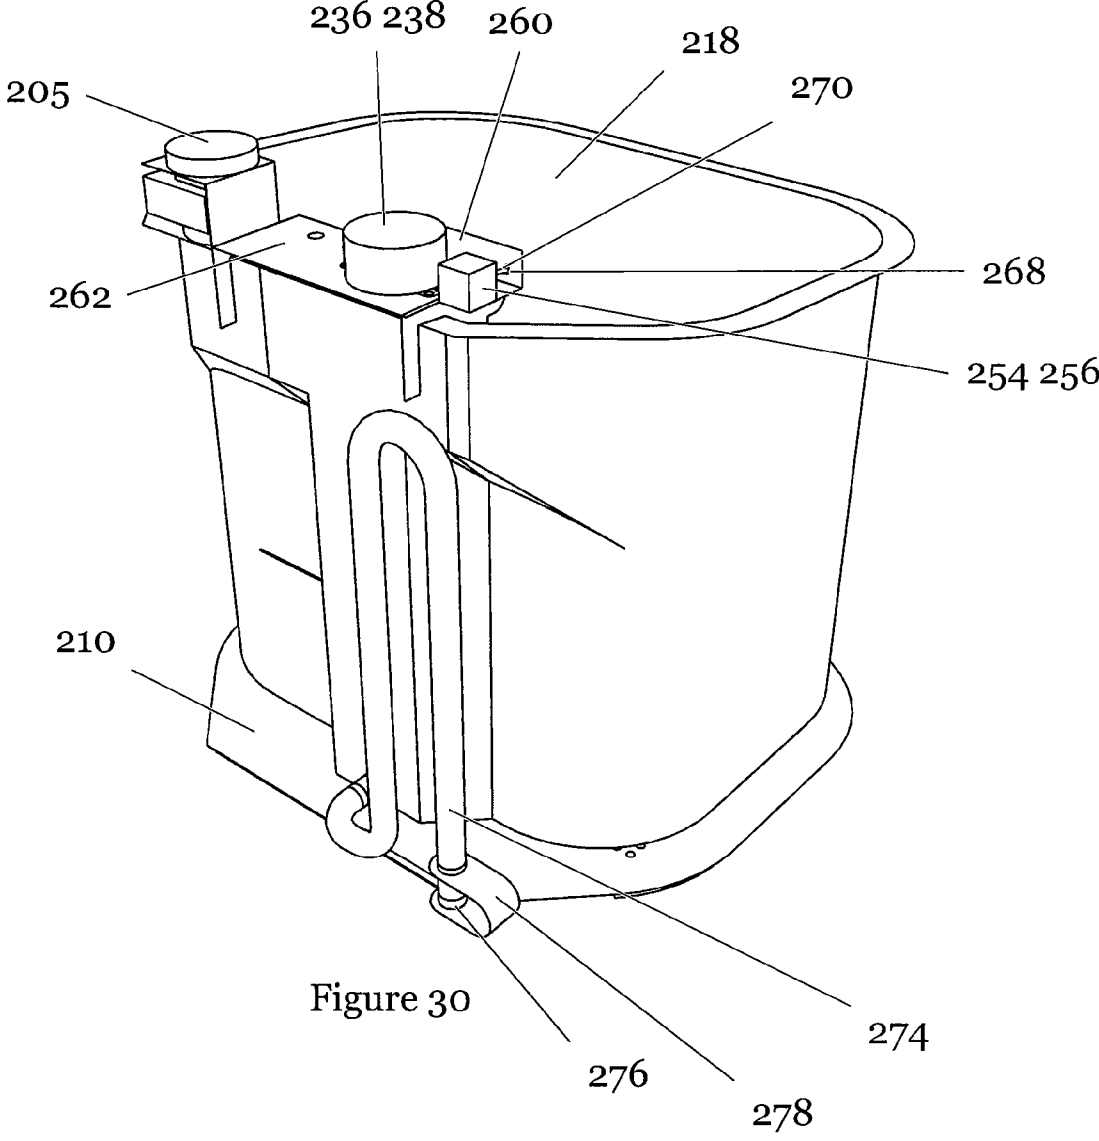


Figure 30

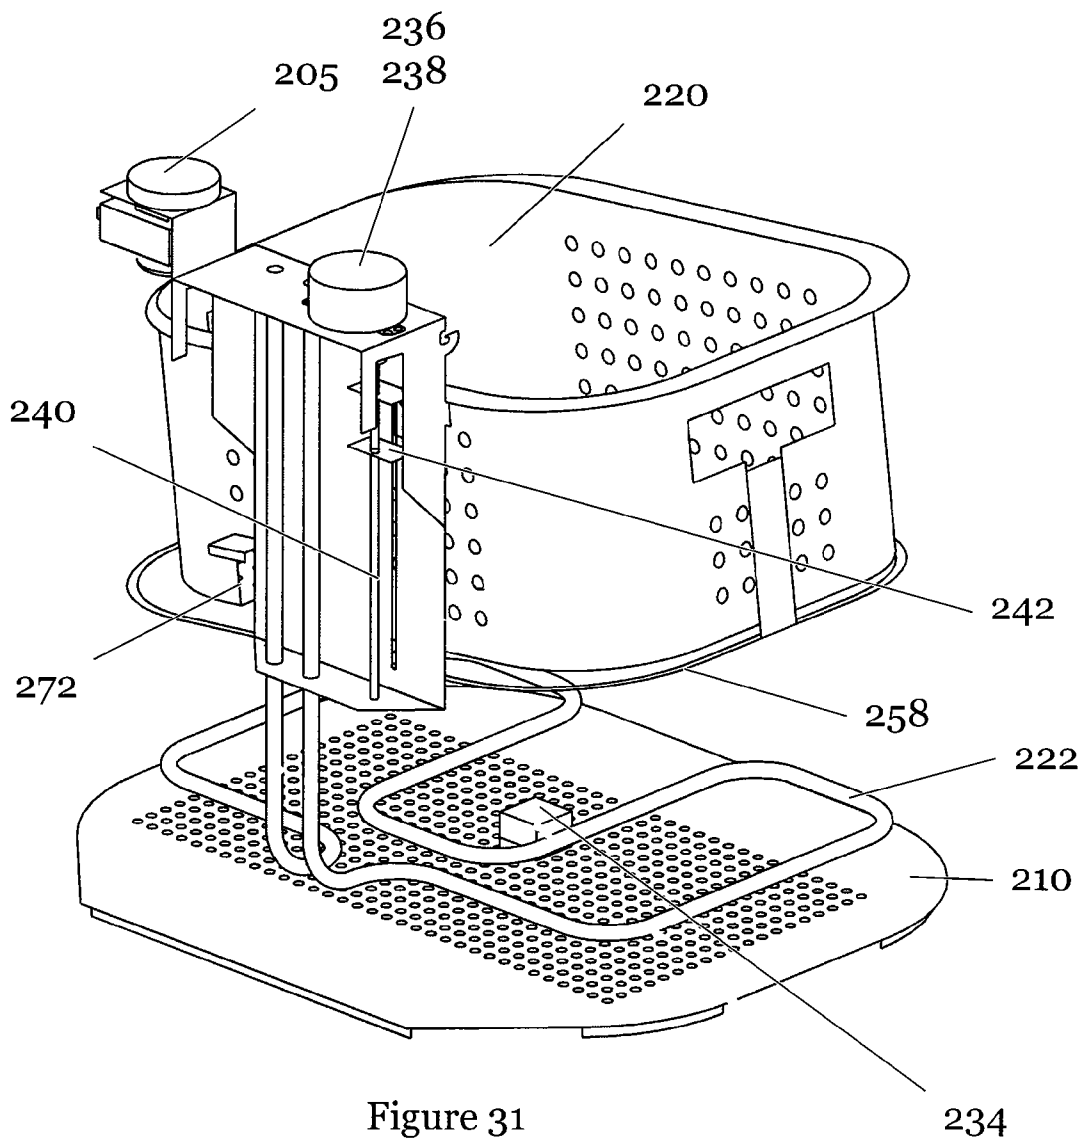


Figure 31

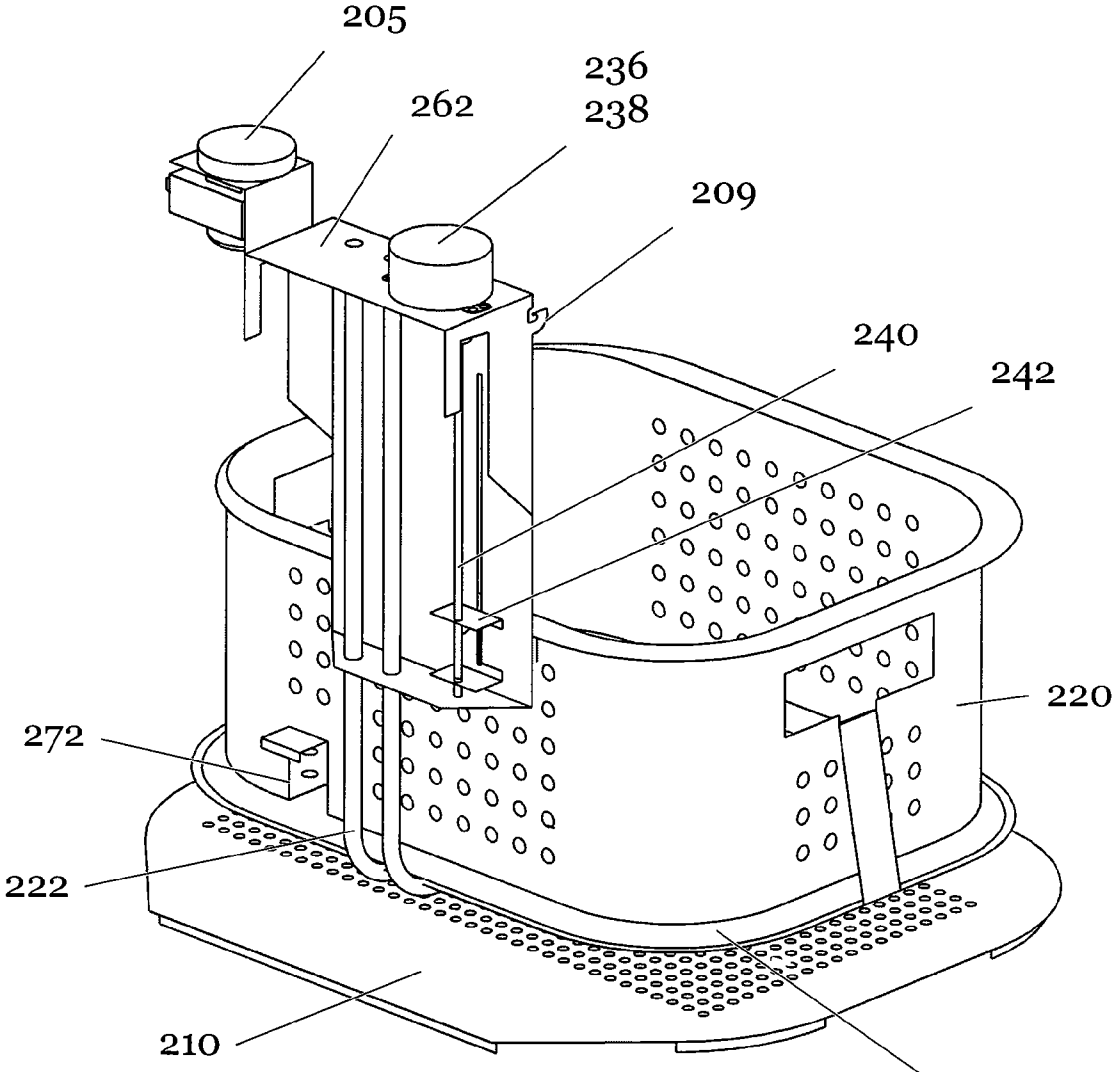


Figure 32

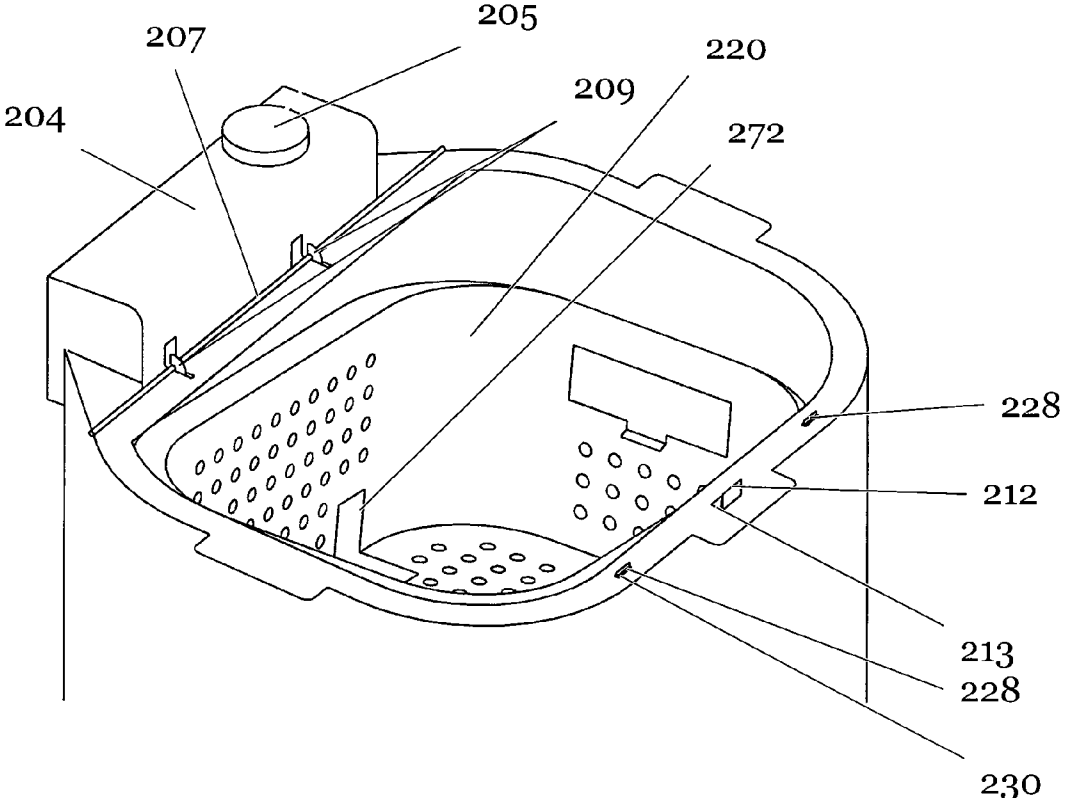


Figure 33

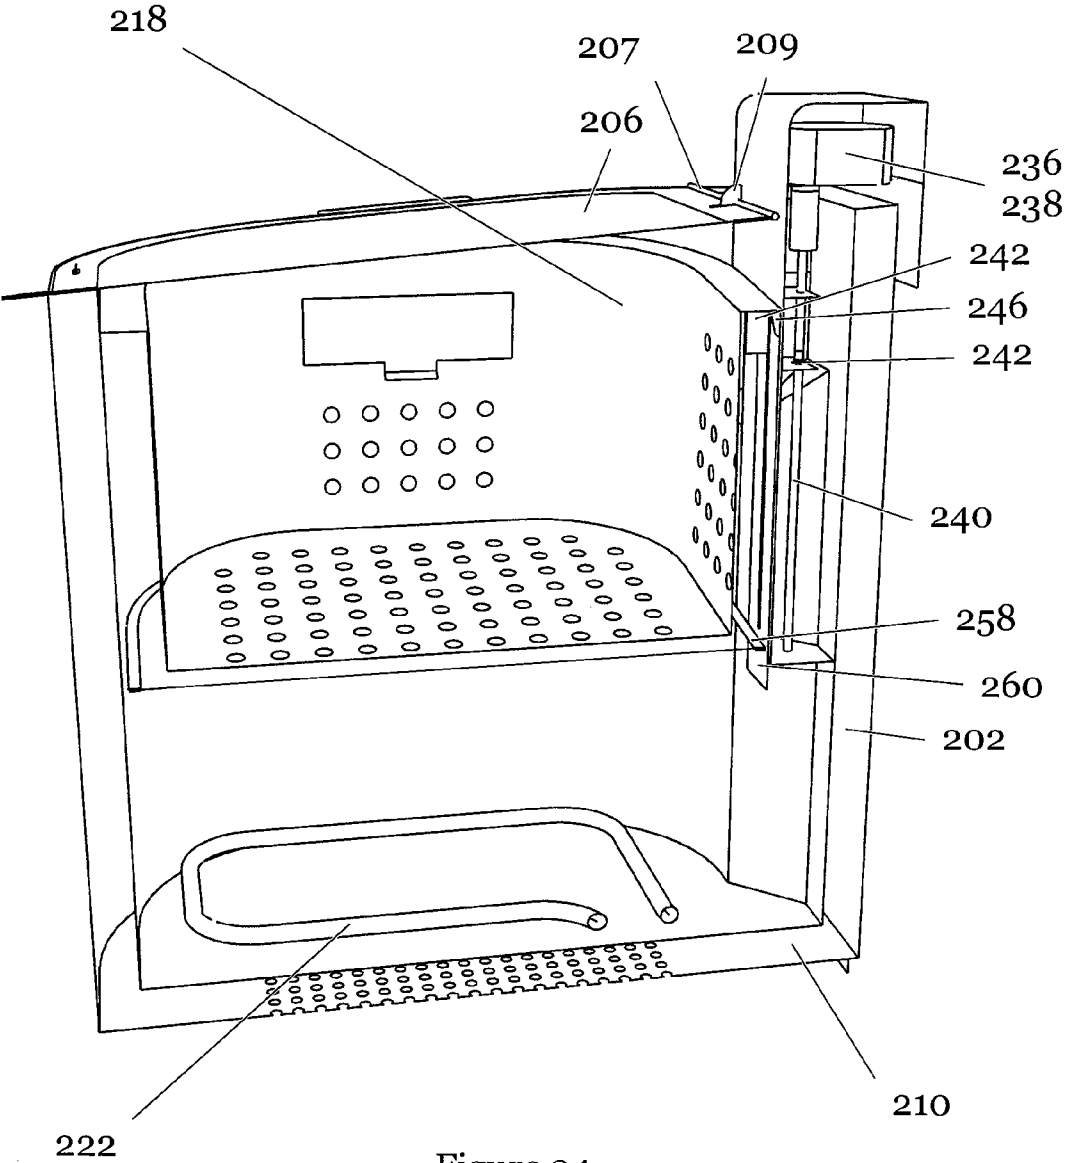


Figure 34

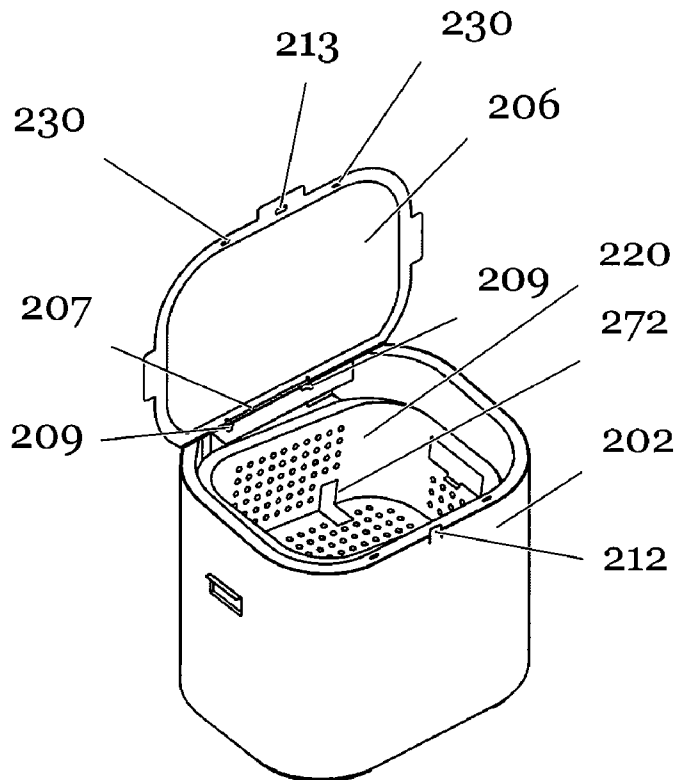


Figure 35

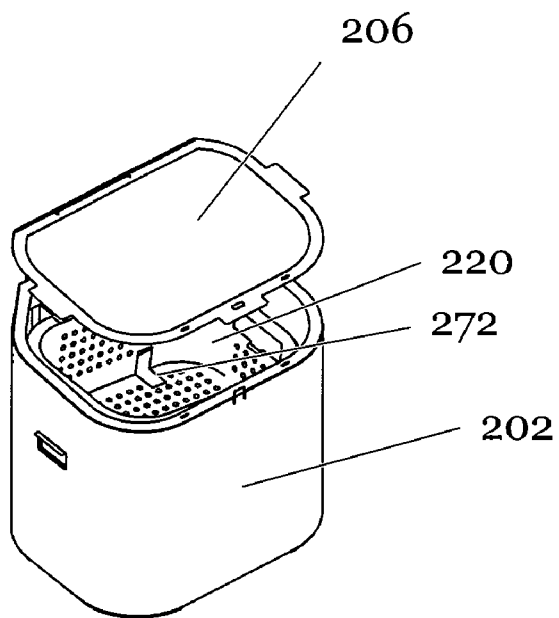


Figure 36

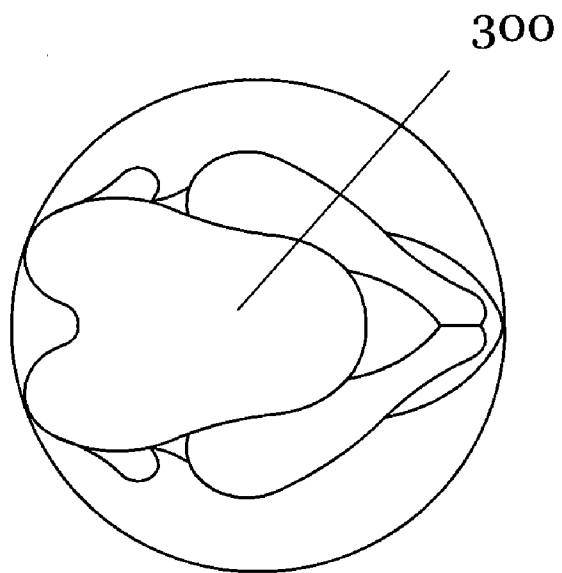


Figure 37

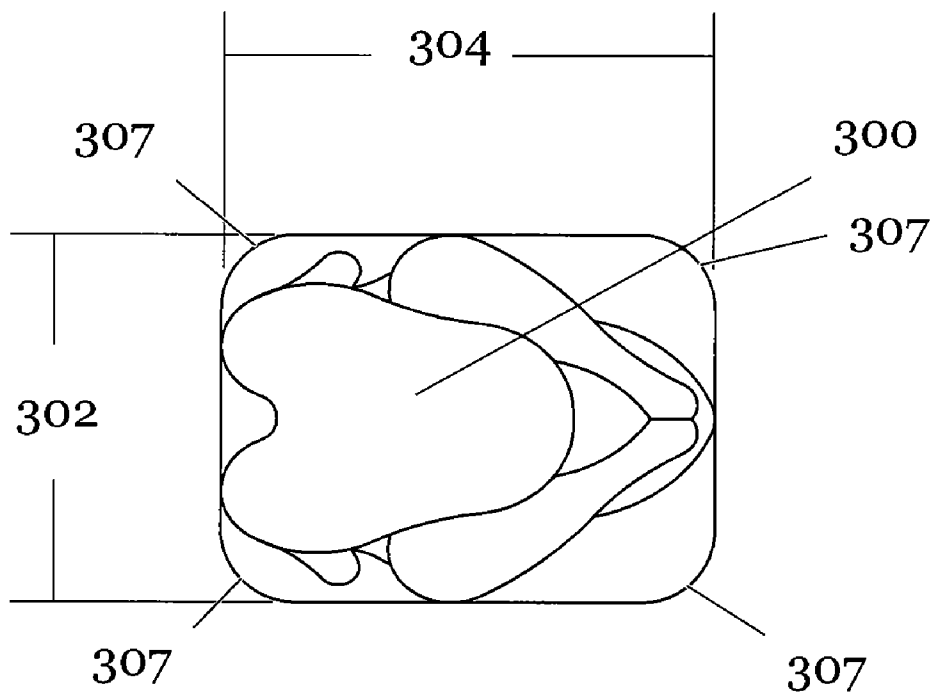


Figure 38



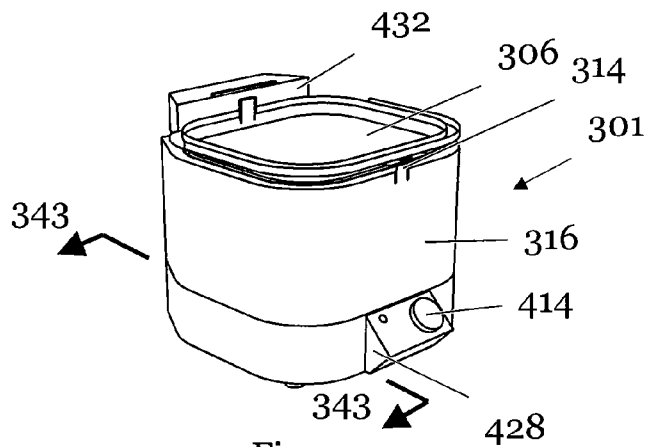


Figure 39

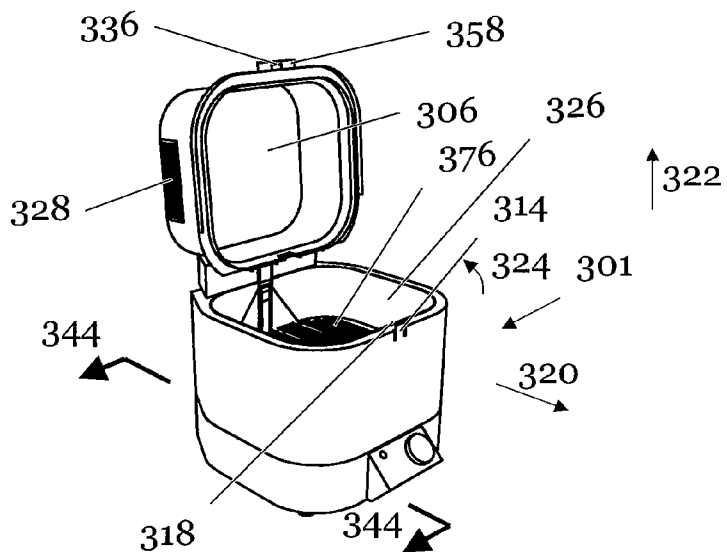


Figure 40

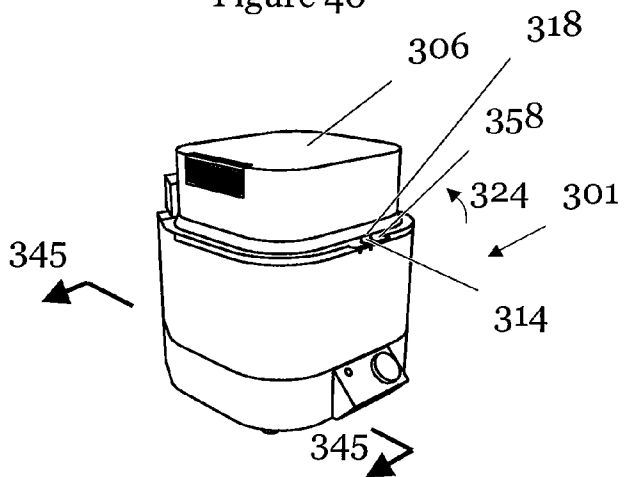


Figure 41

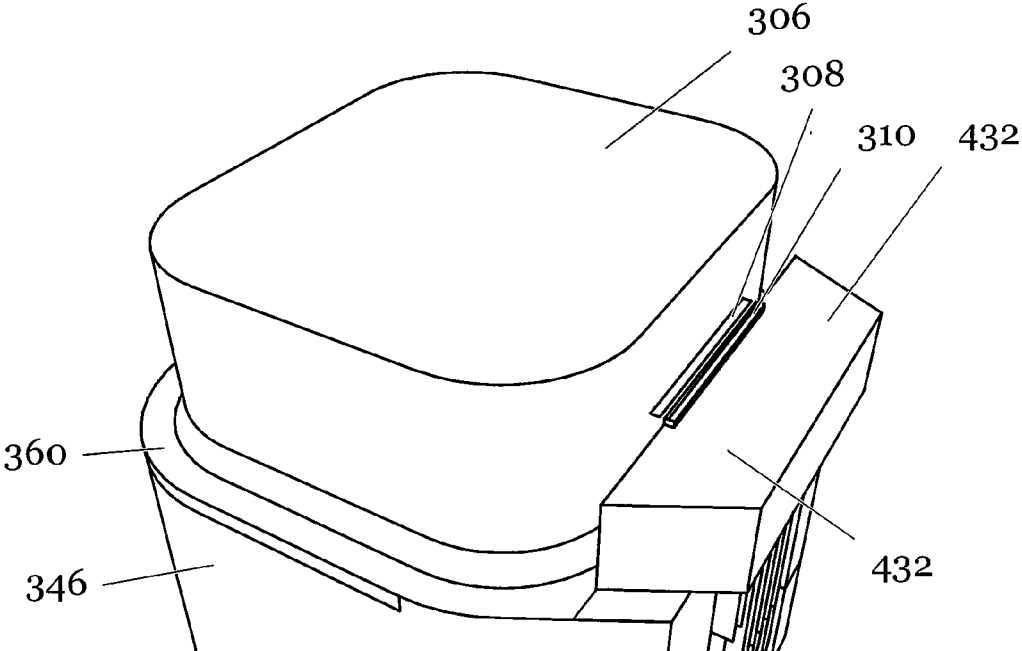


Figure 42

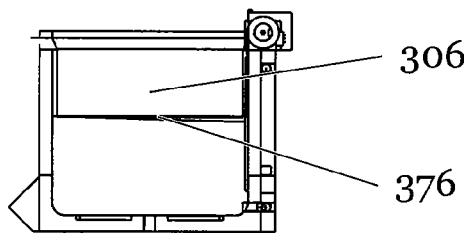


Figure 43

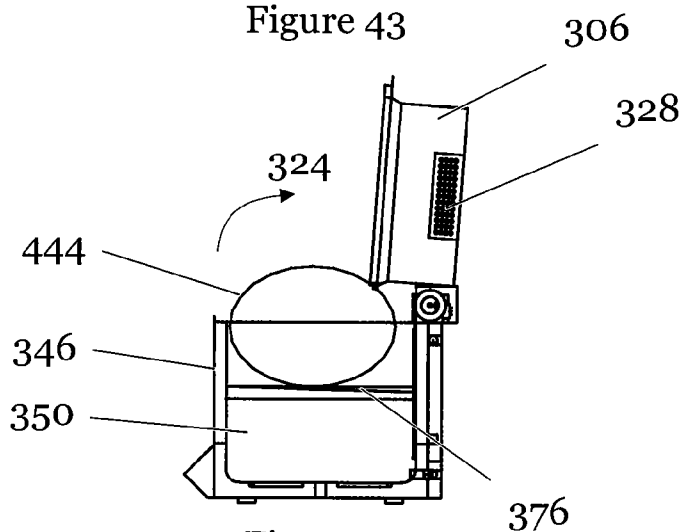


Figure 44

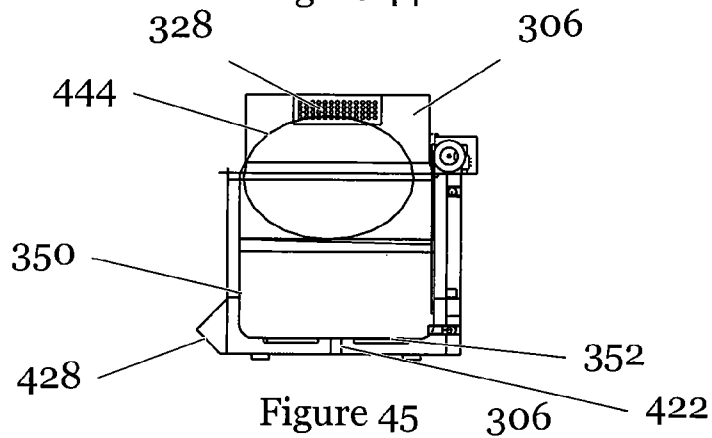


Figure 45

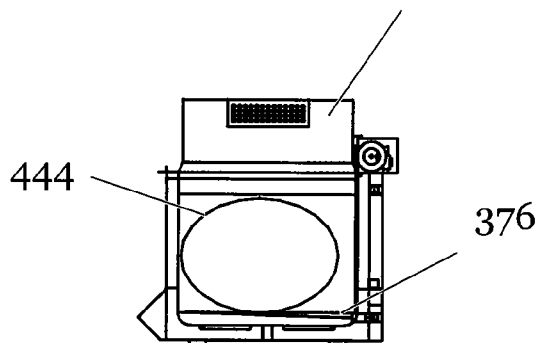


Figure 46

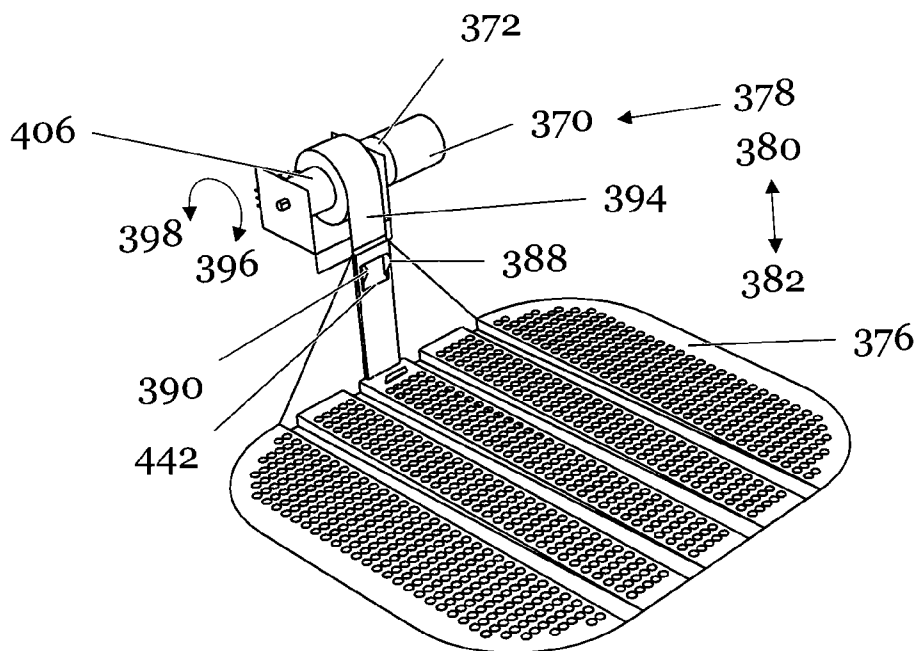


Figure 47

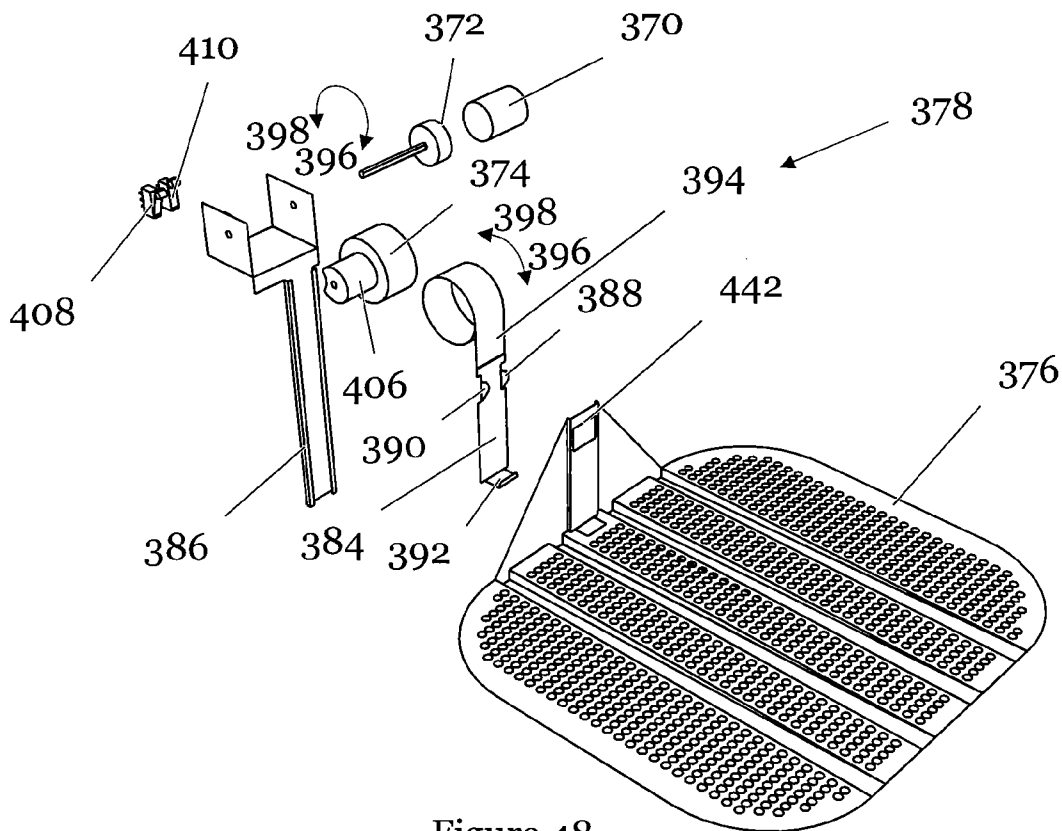


Figure 48

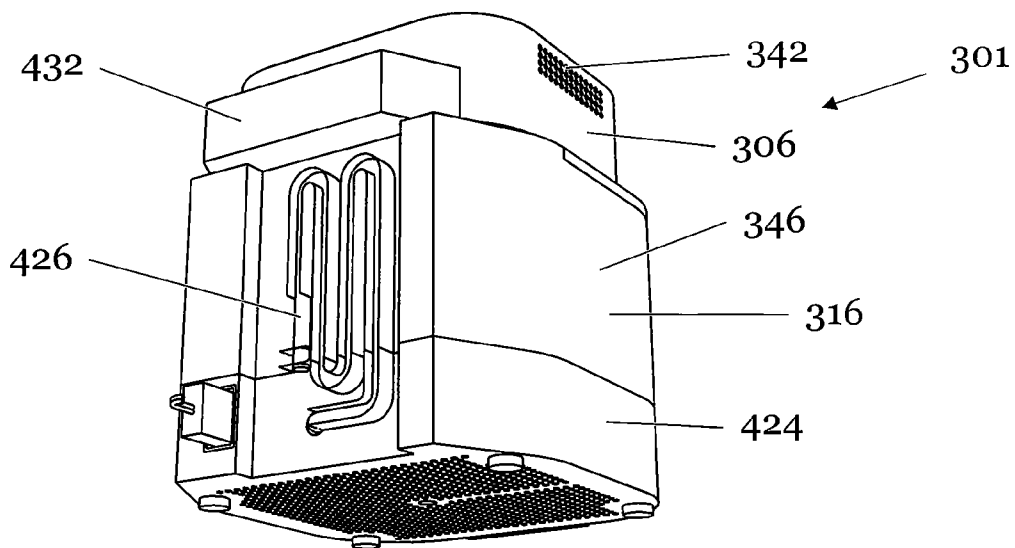


Figure 49

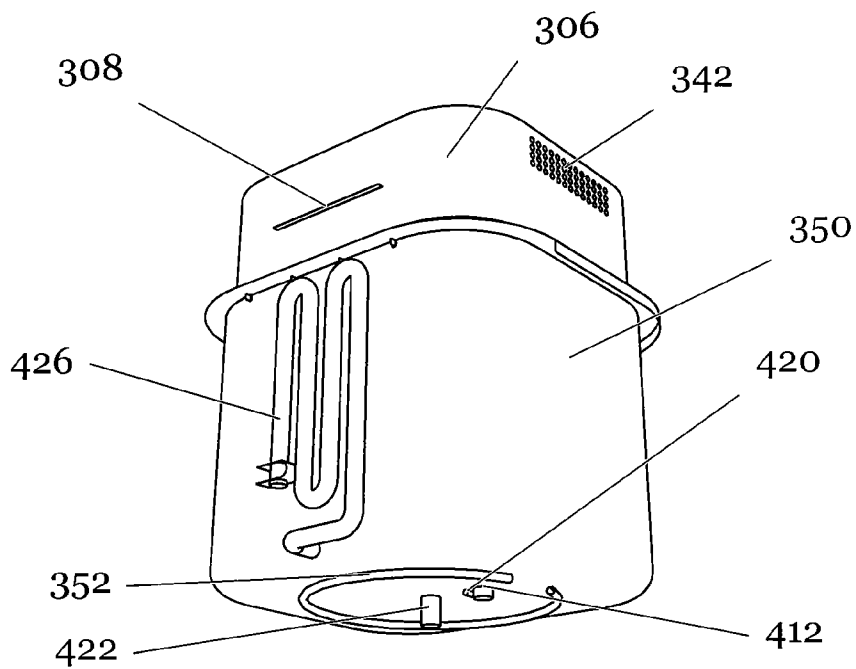


Figure 50

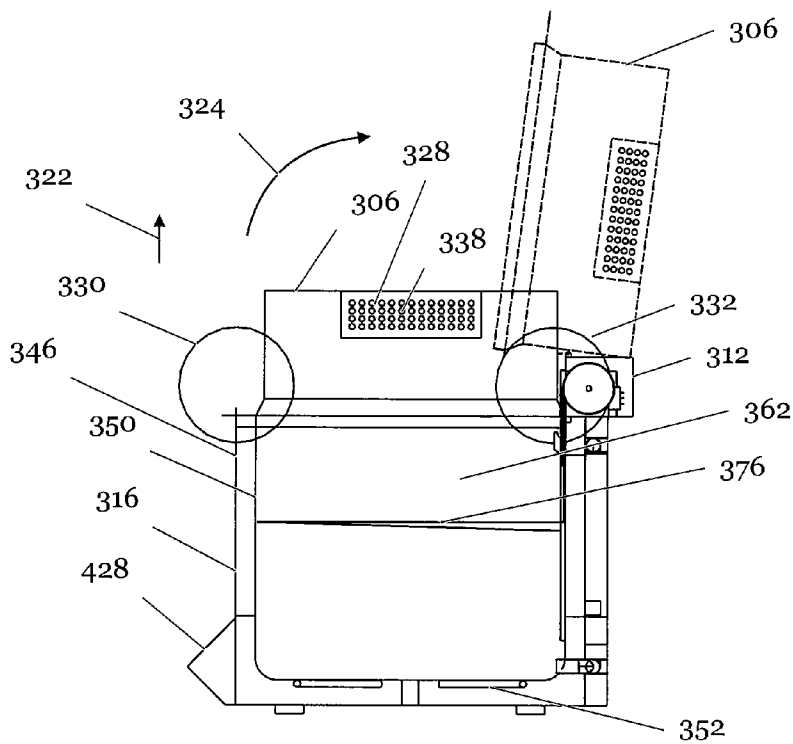
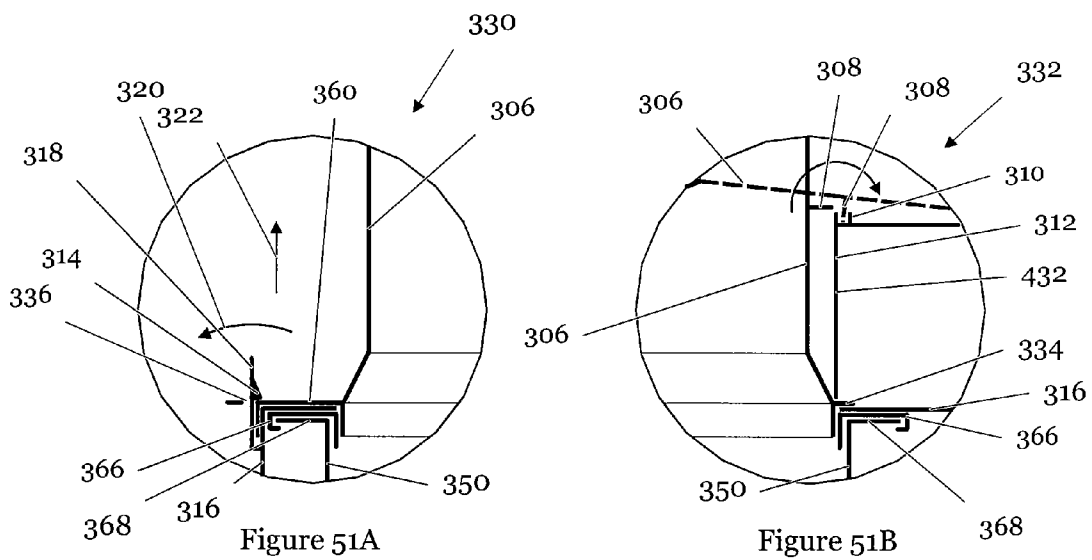


Figure 52

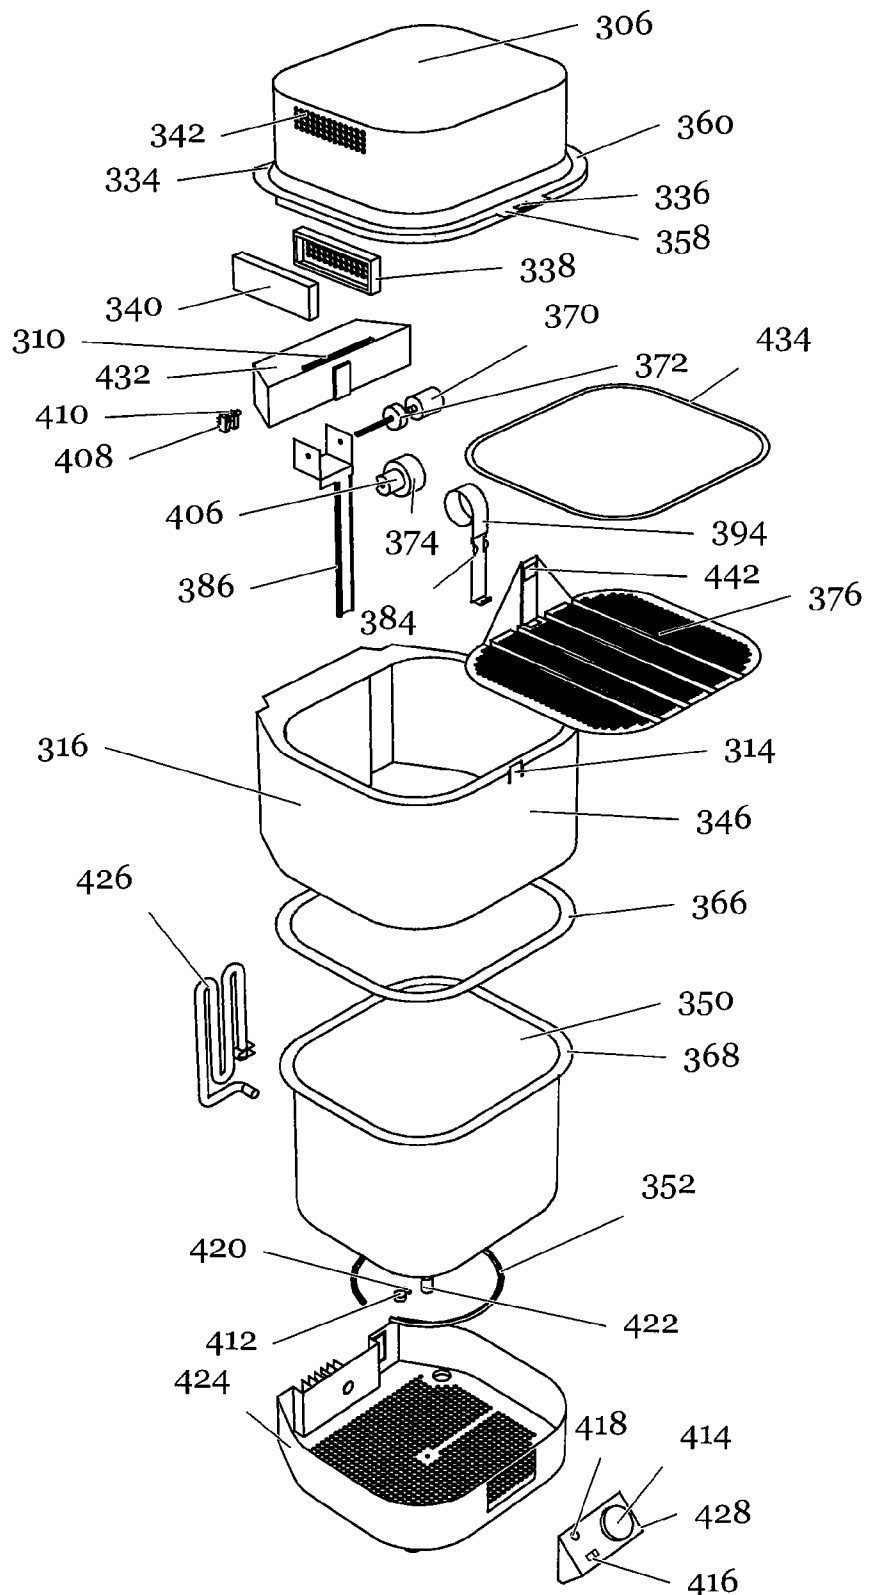


Figure 53

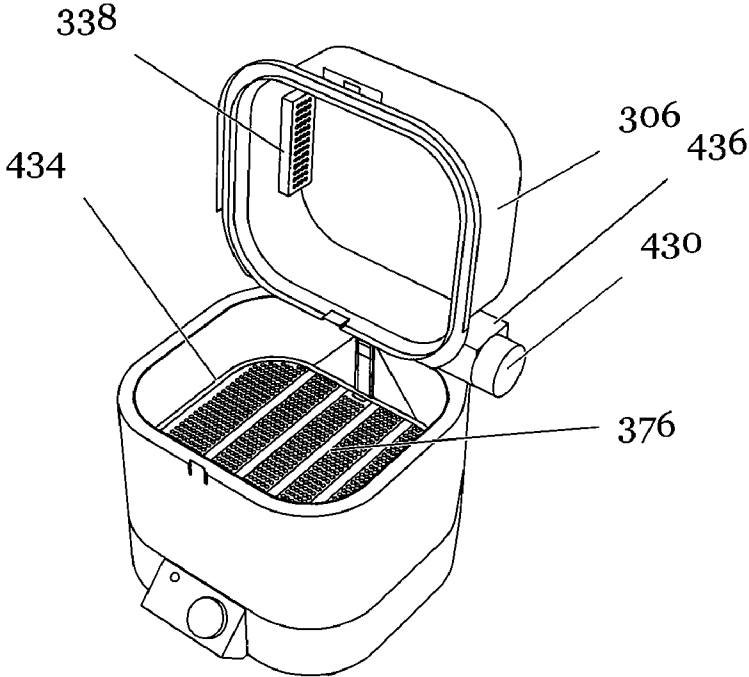


Figure 54

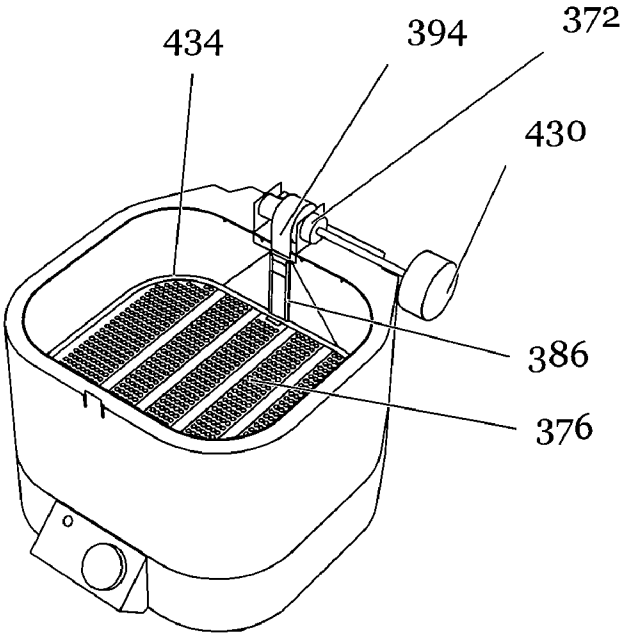


Figure 55



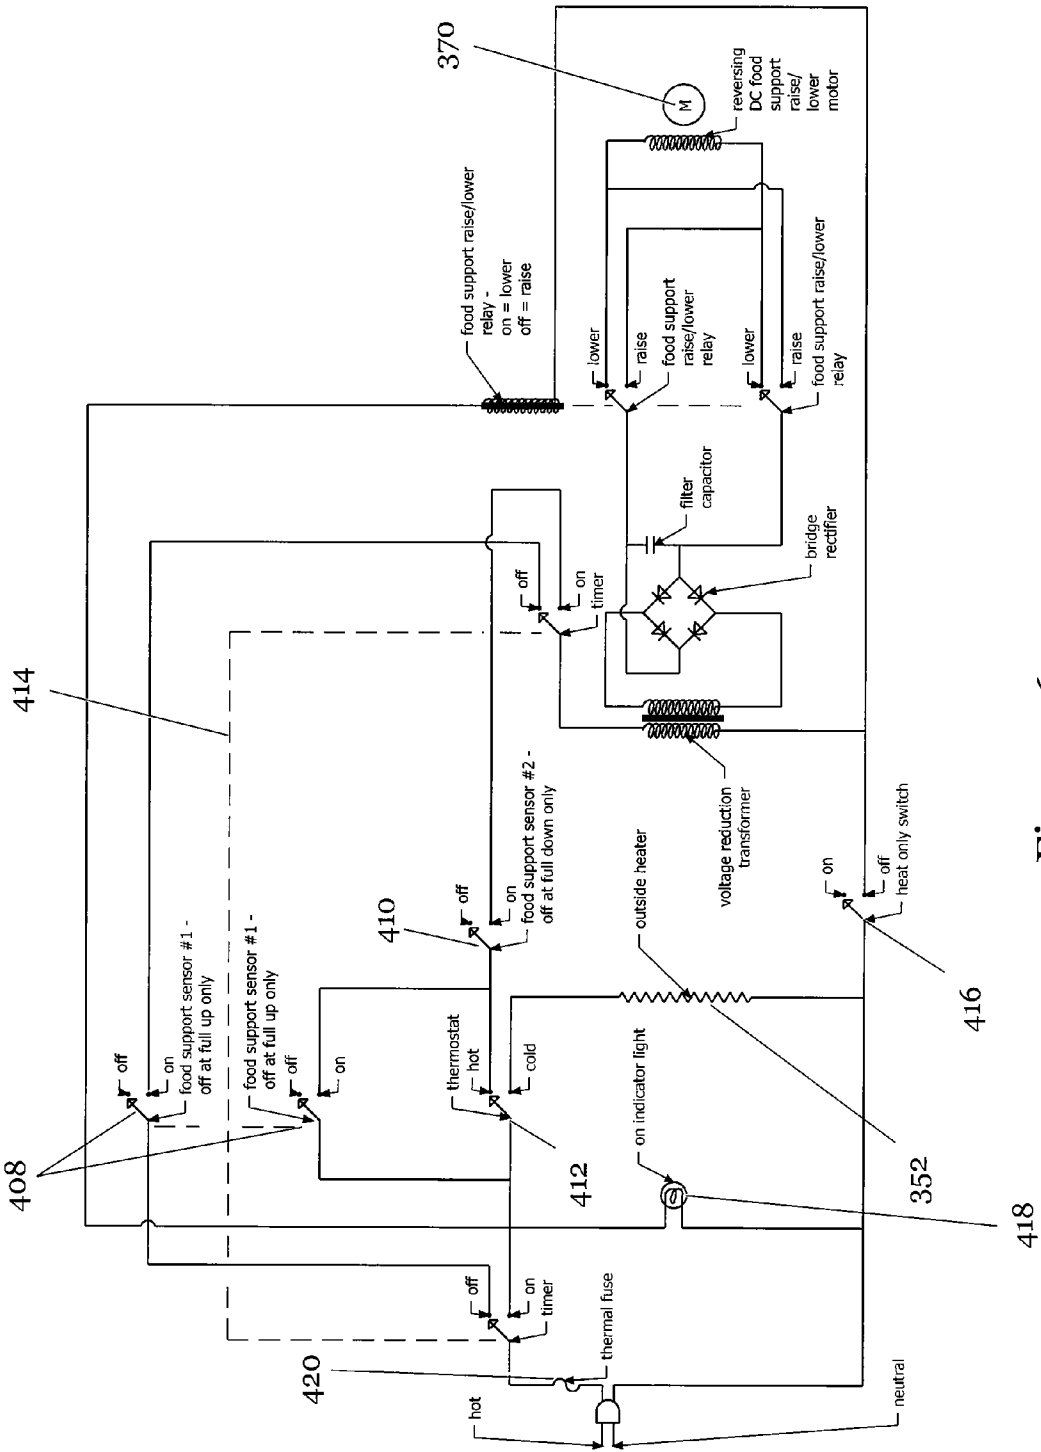


Figure 56

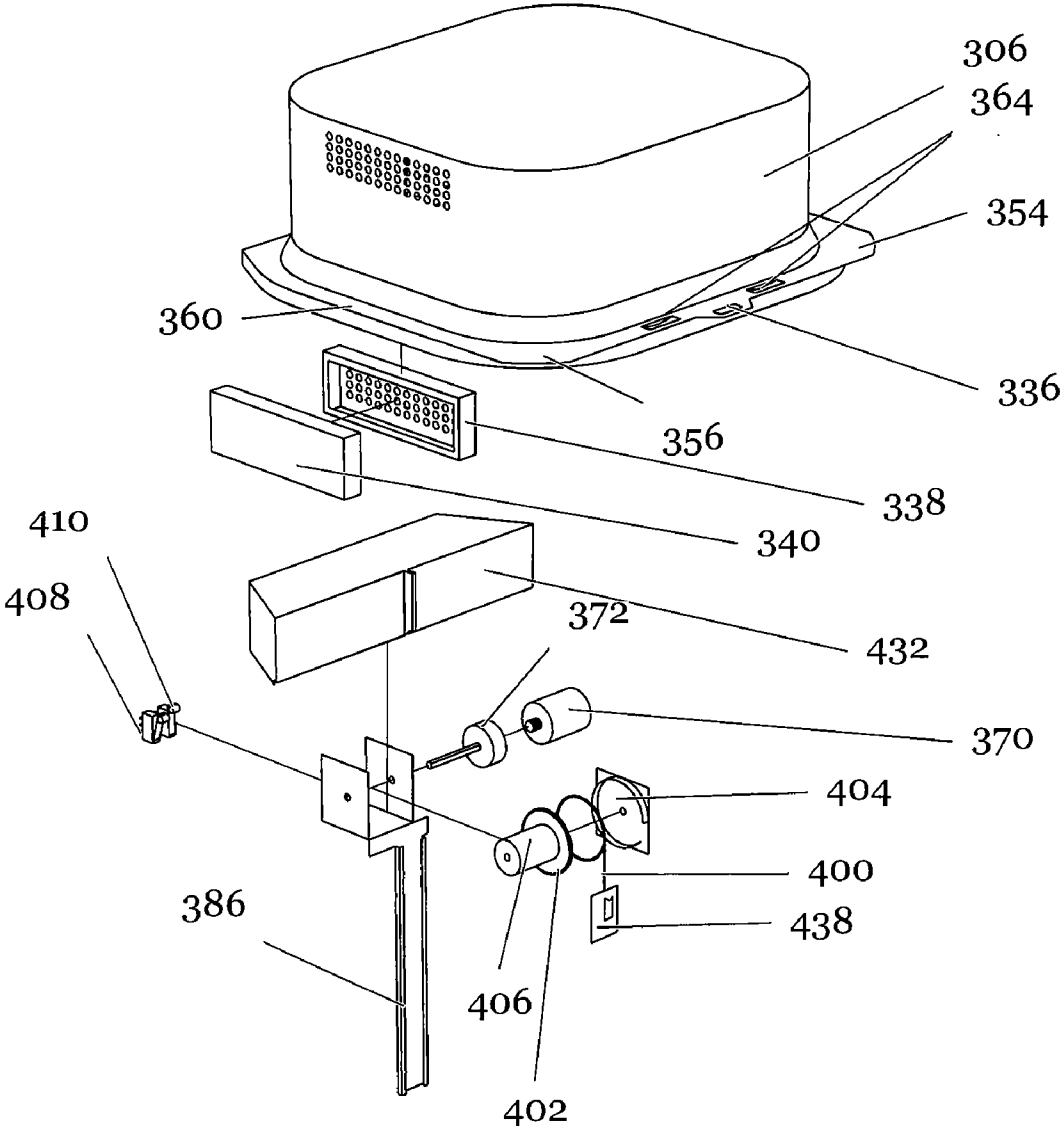


Figure 57

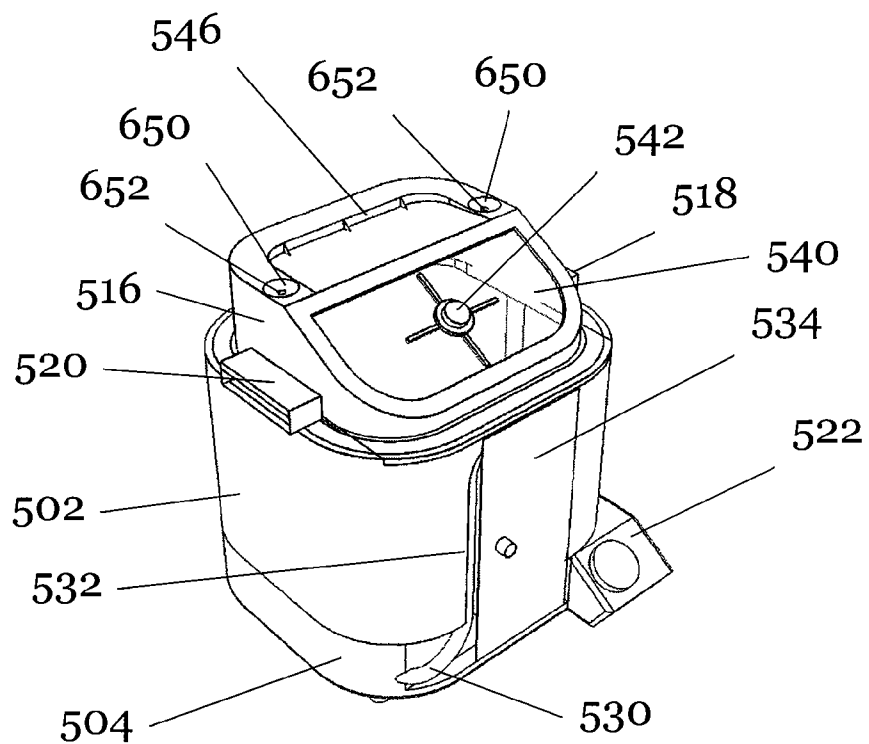


Fig 58

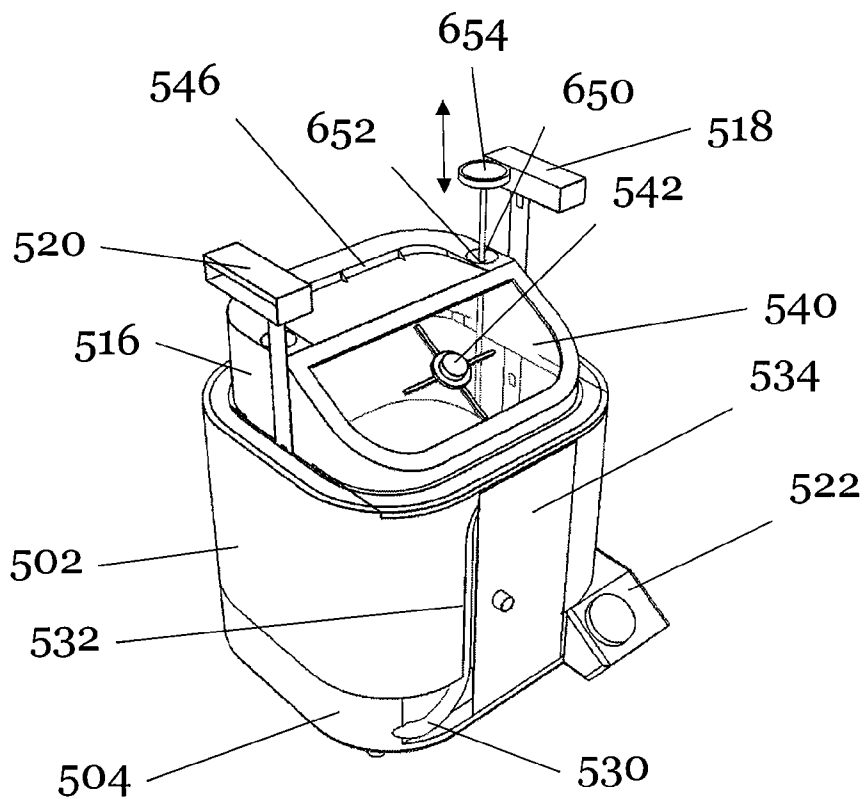


Fig 59



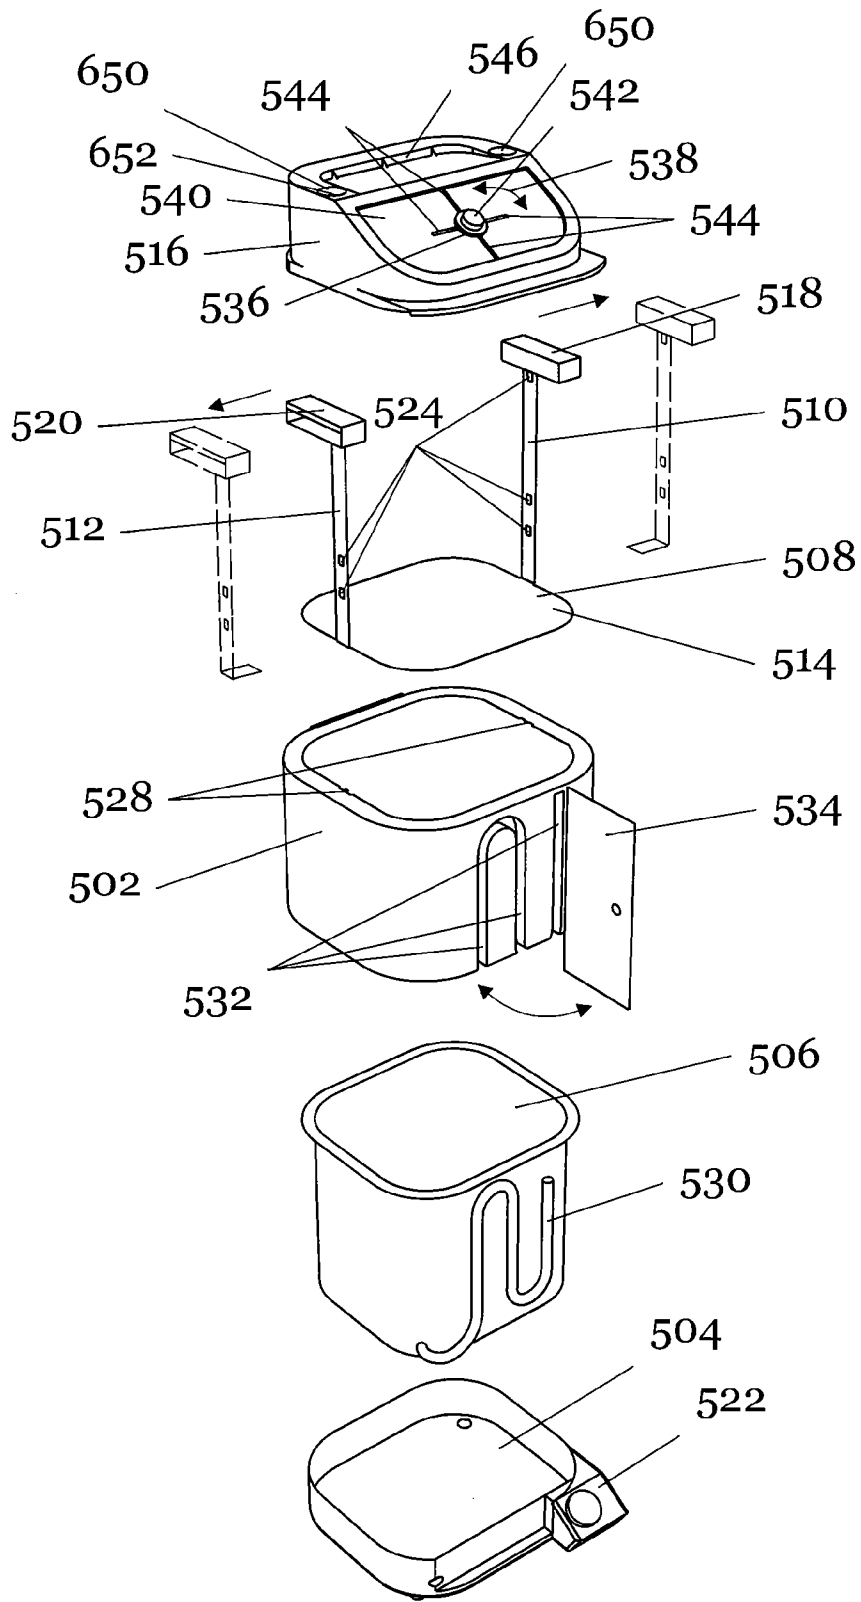
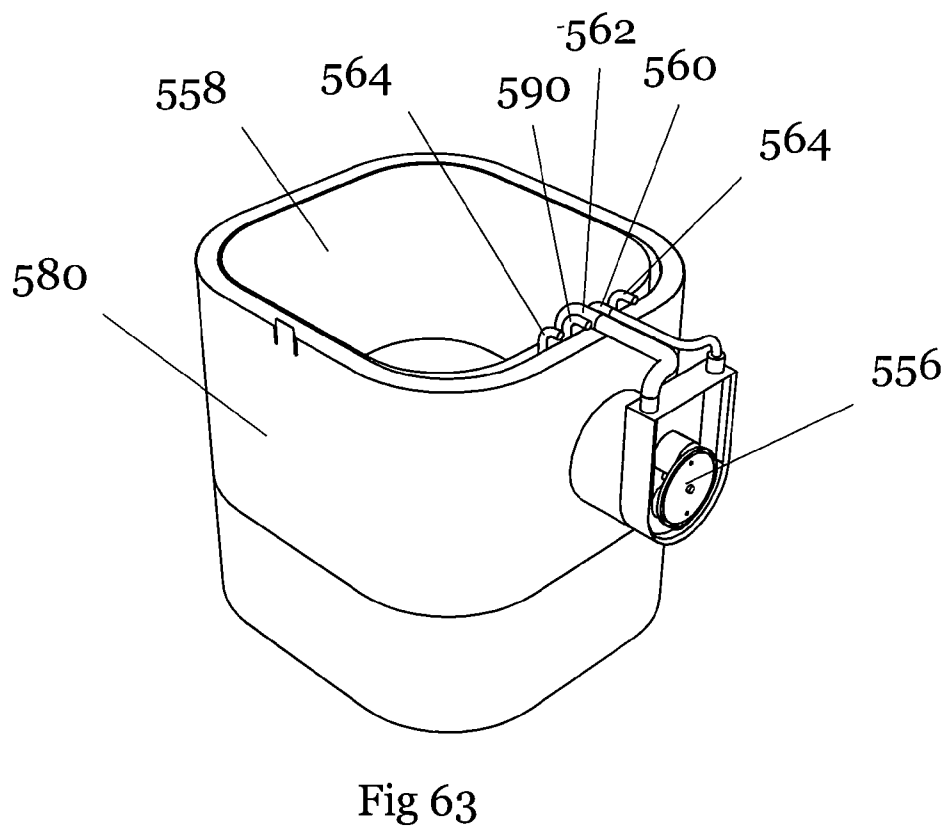
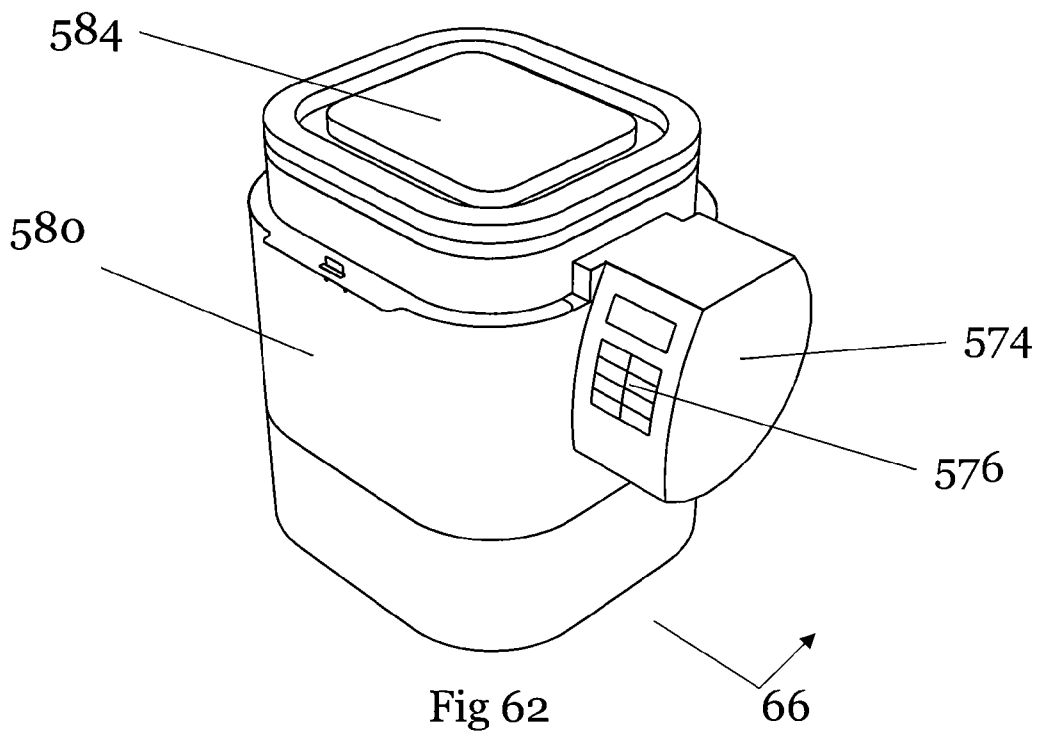


Fig 61



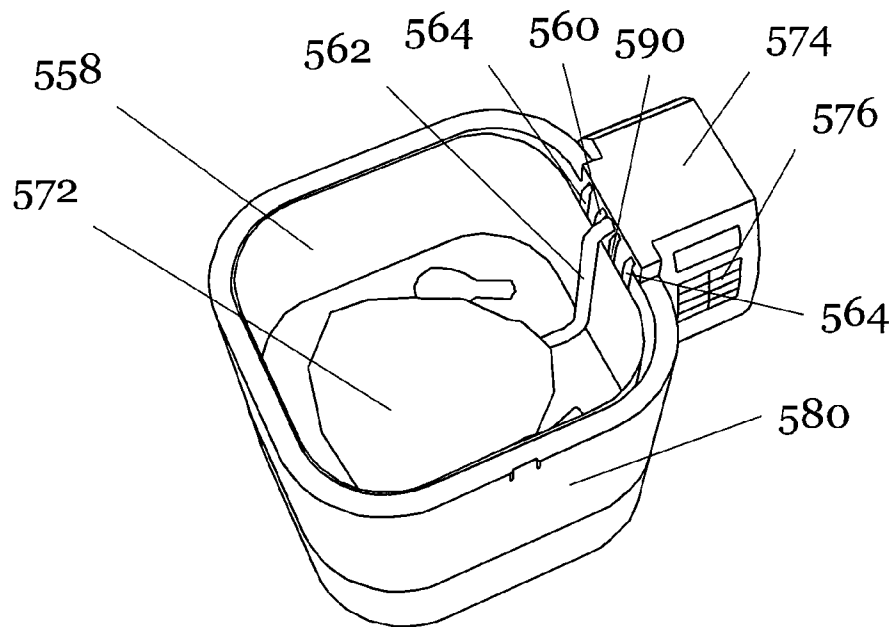


Fig 64

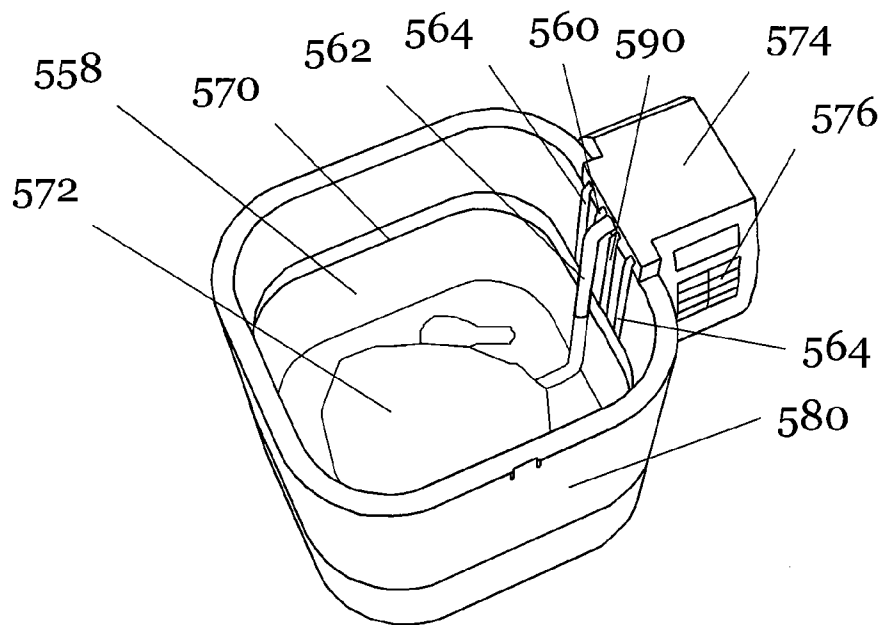


Fig 65

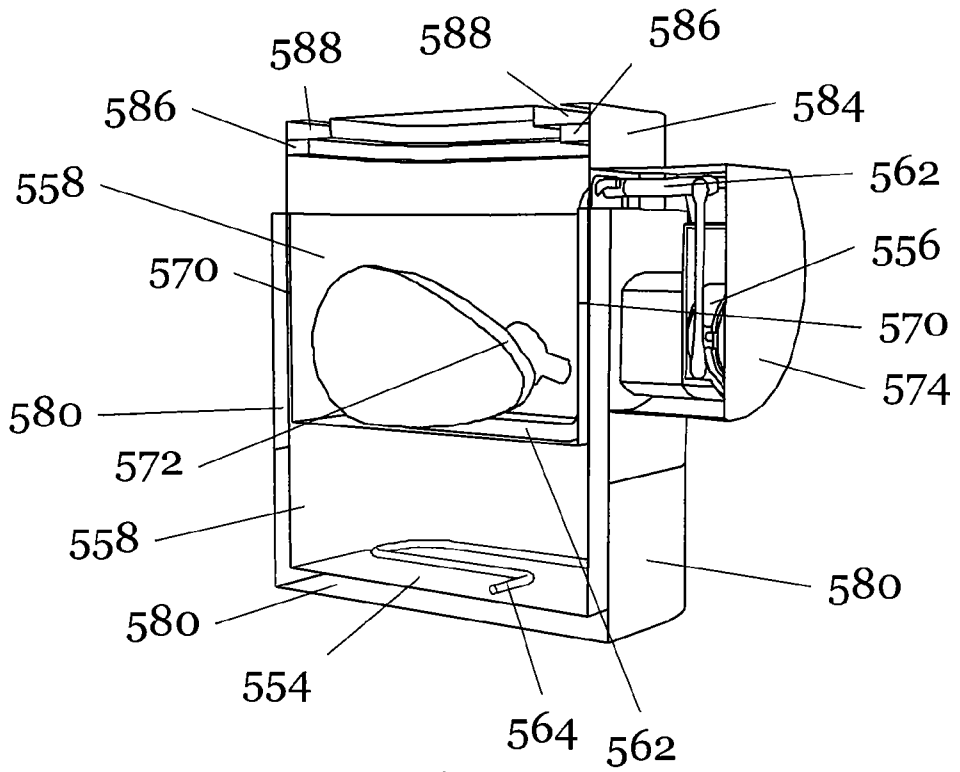


Fig 66

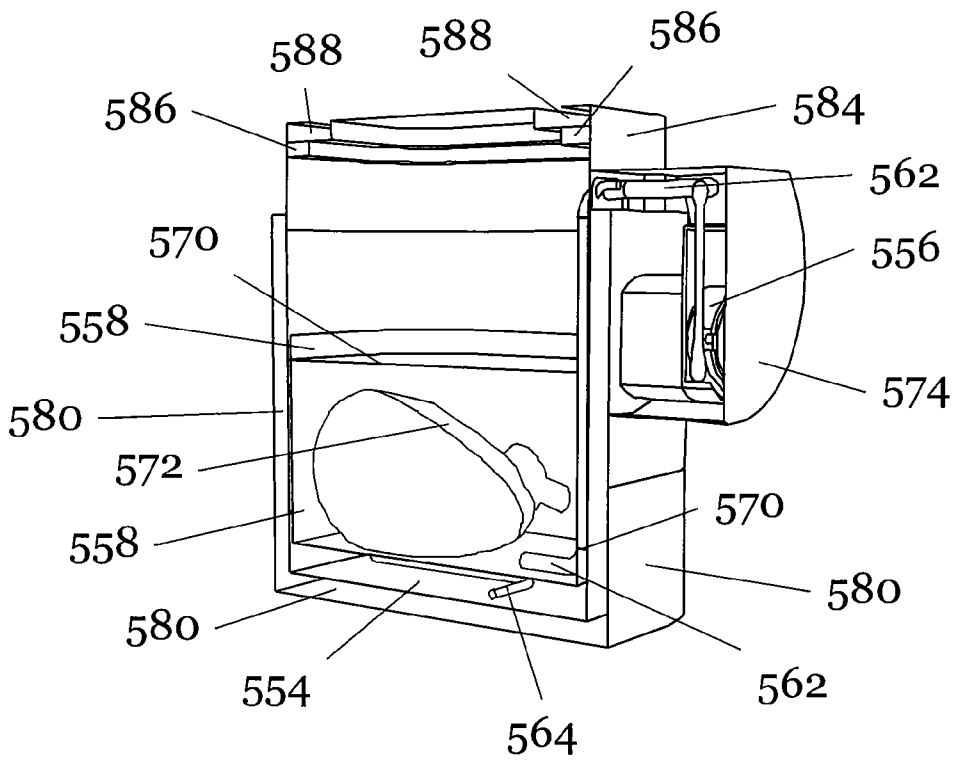


Fig 67



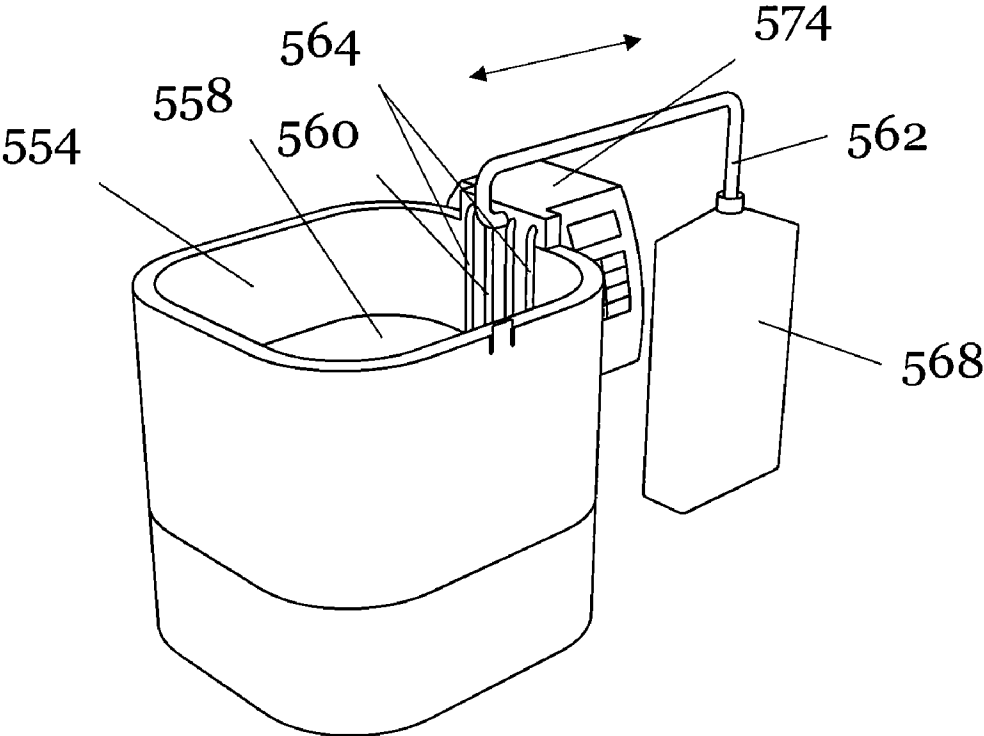


Fig 68

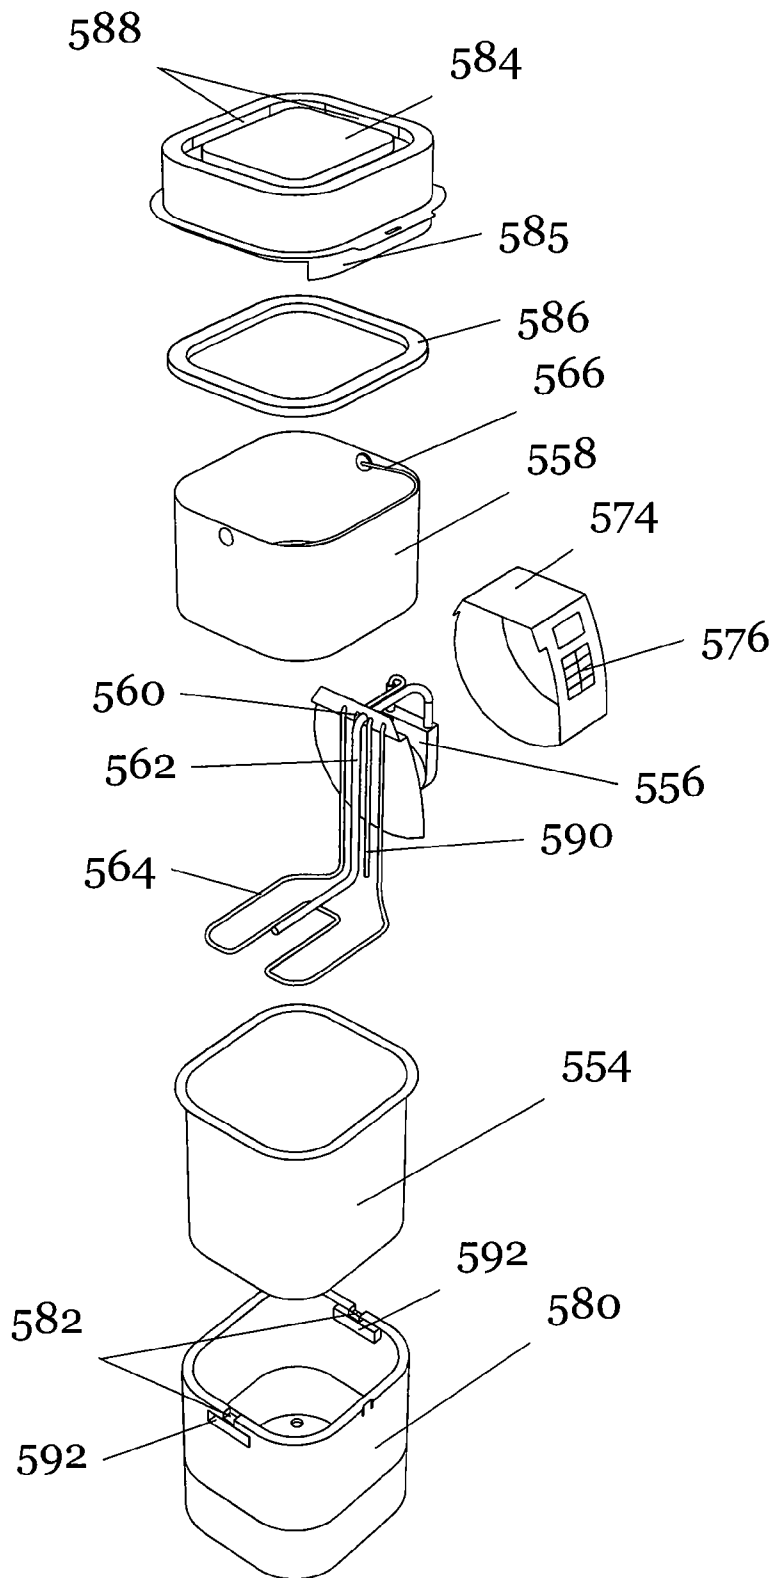


Fig 69

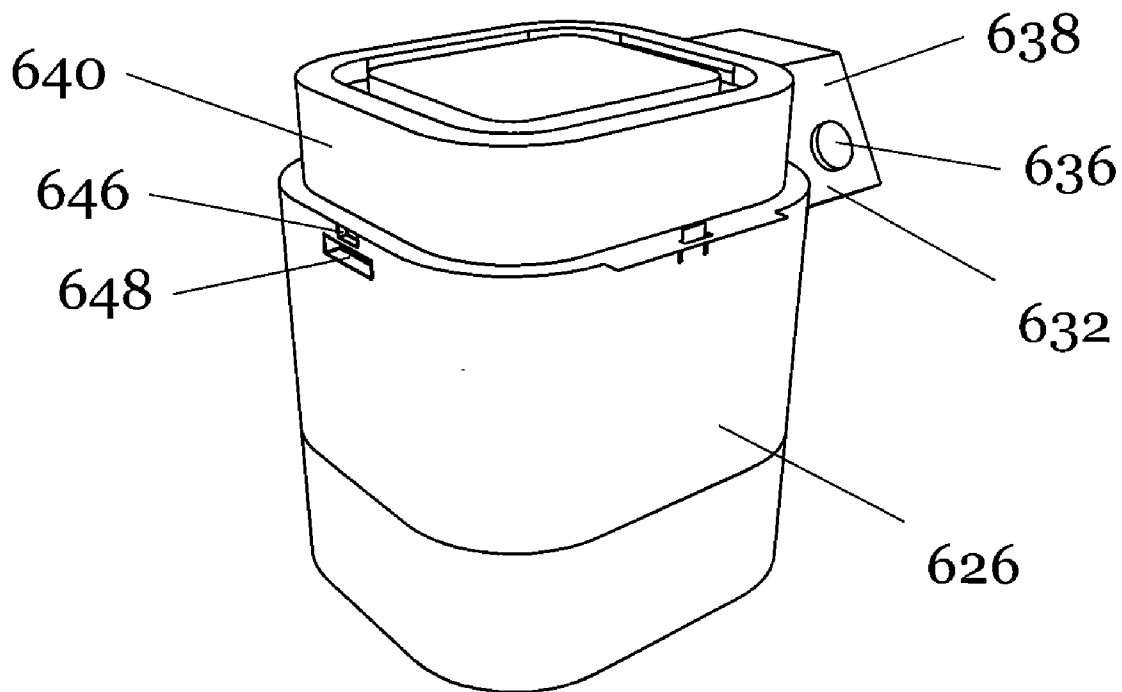


Fig 70

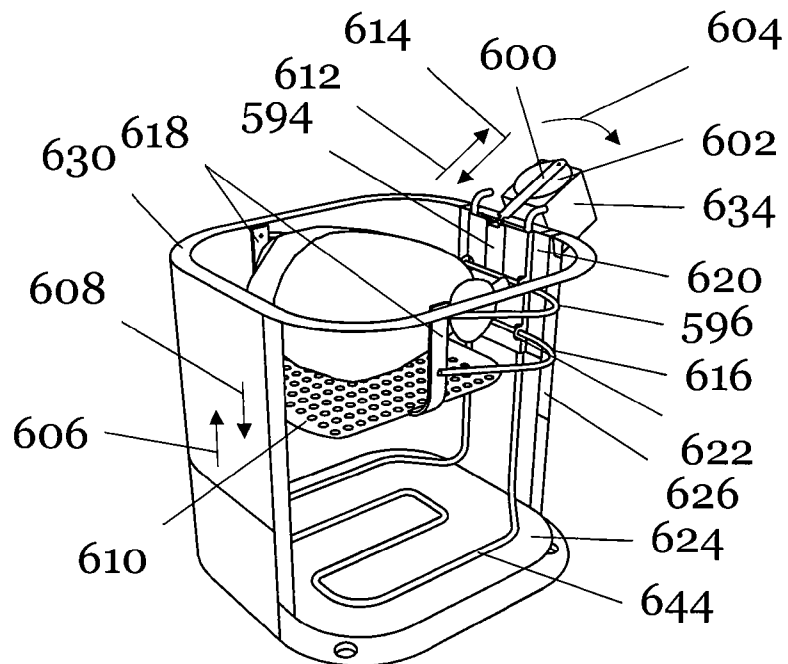


Fig 71

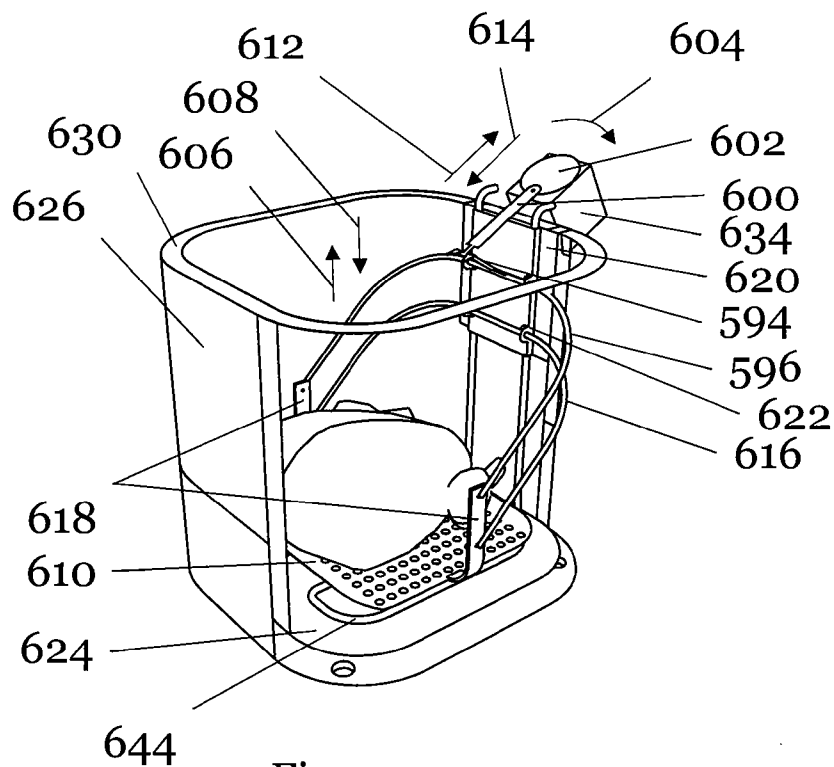


Fig 72

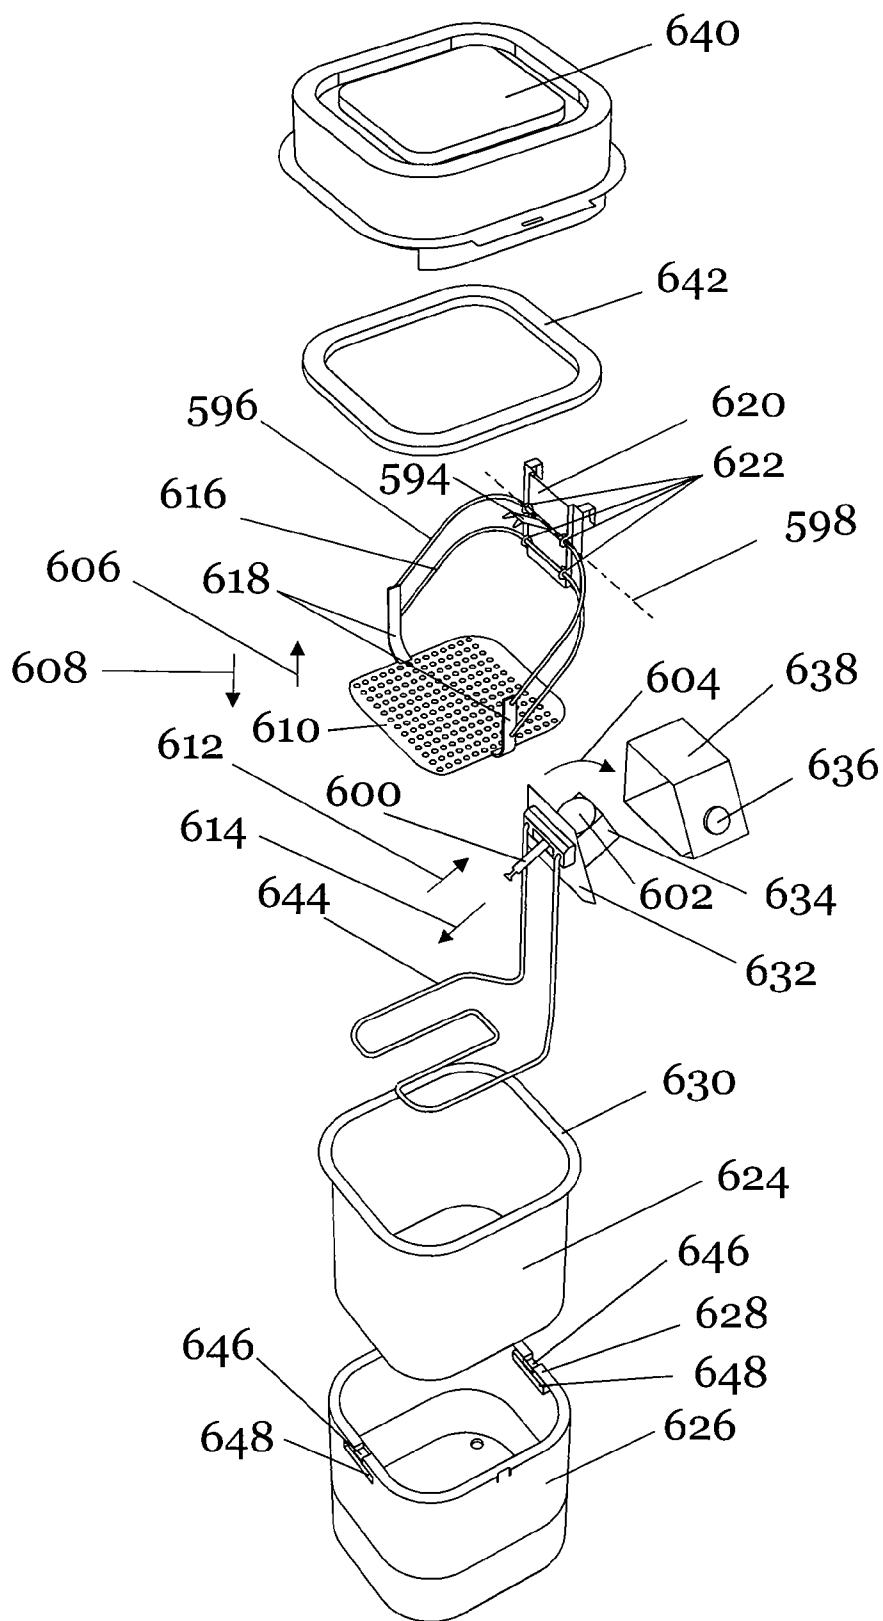


Fig 73

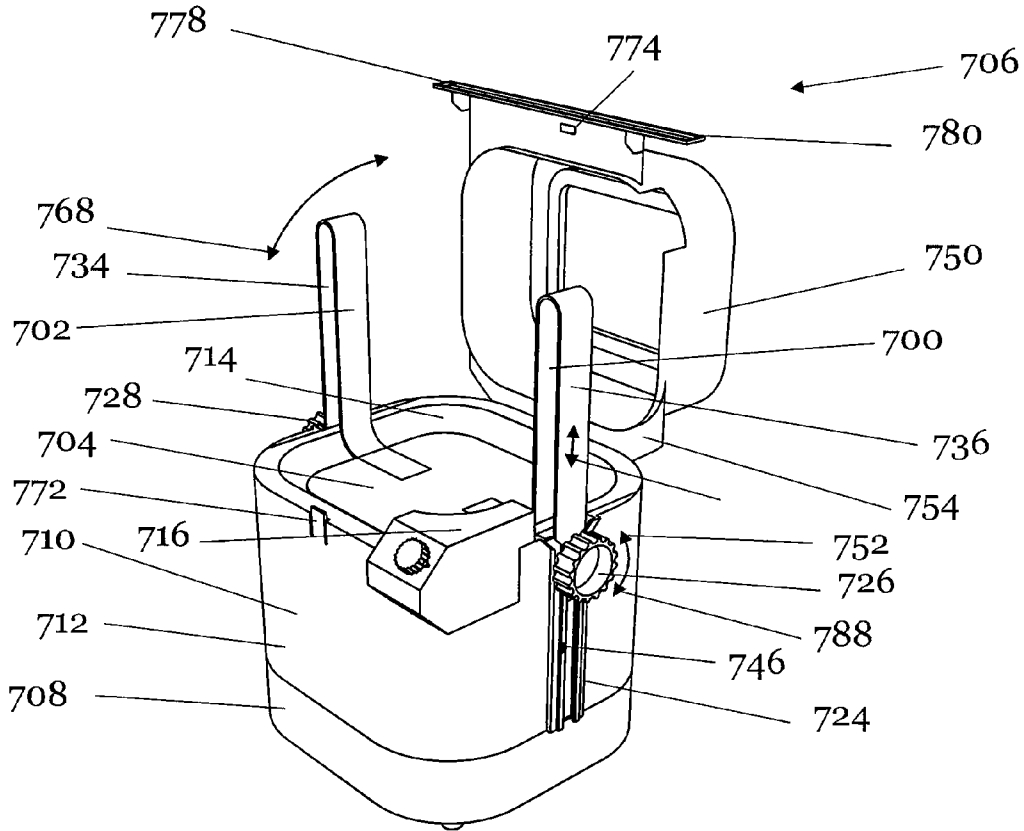


Fig 74

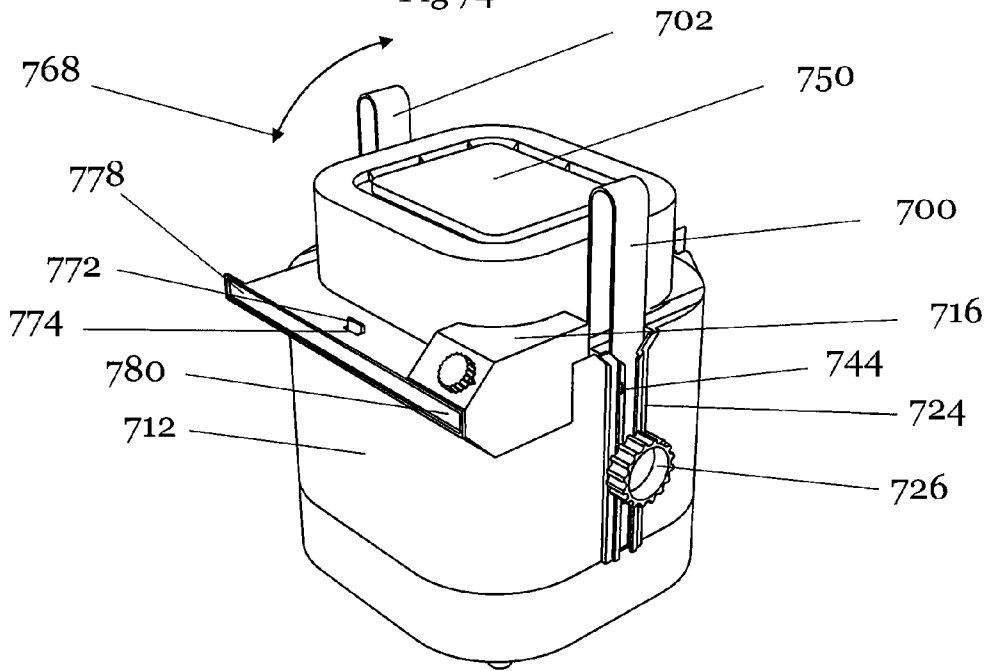


Fig 75

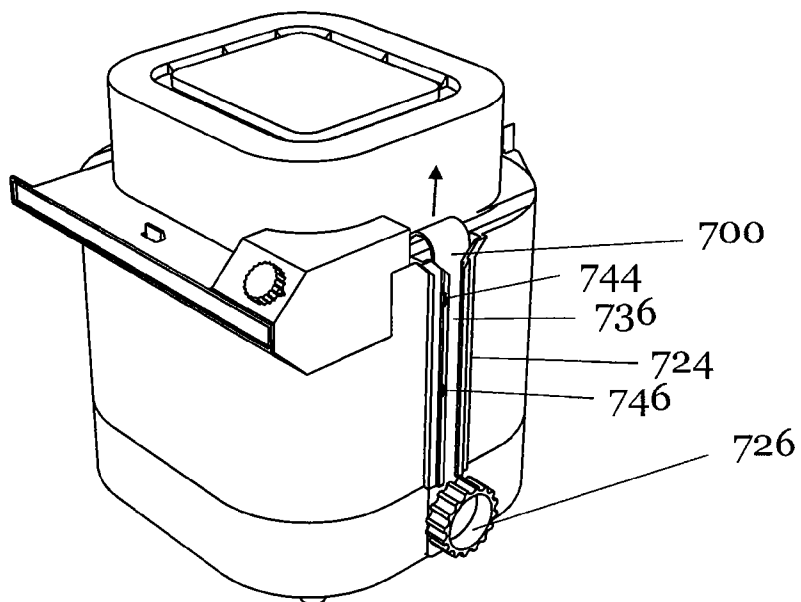


Fig 76

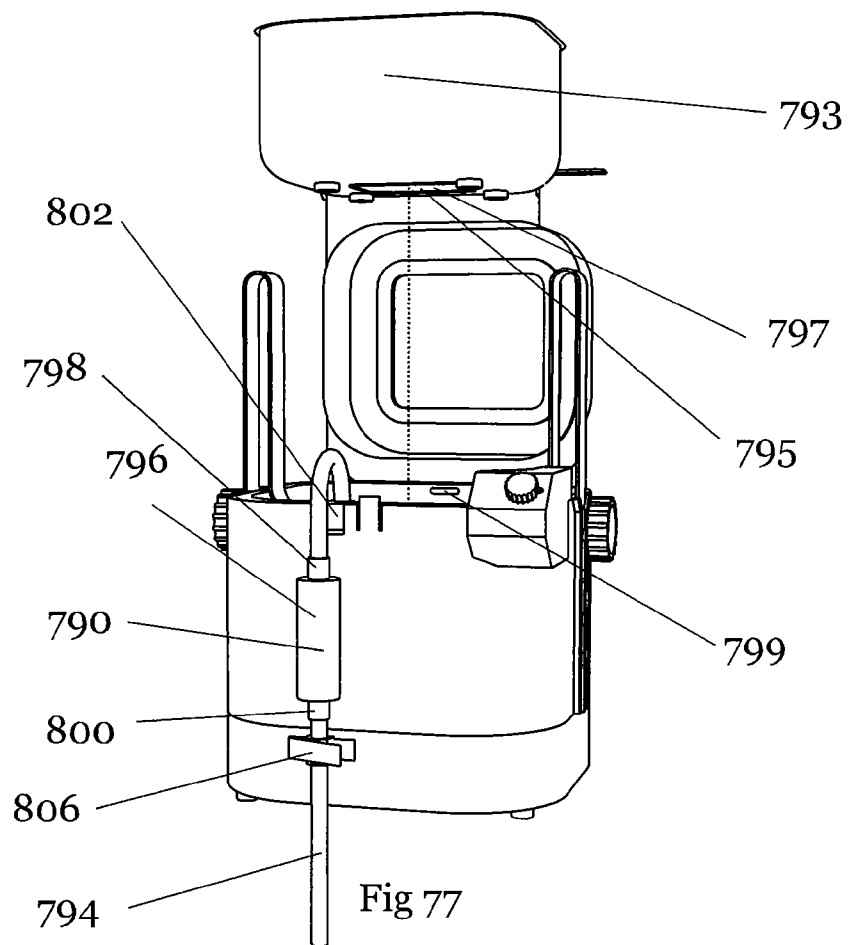
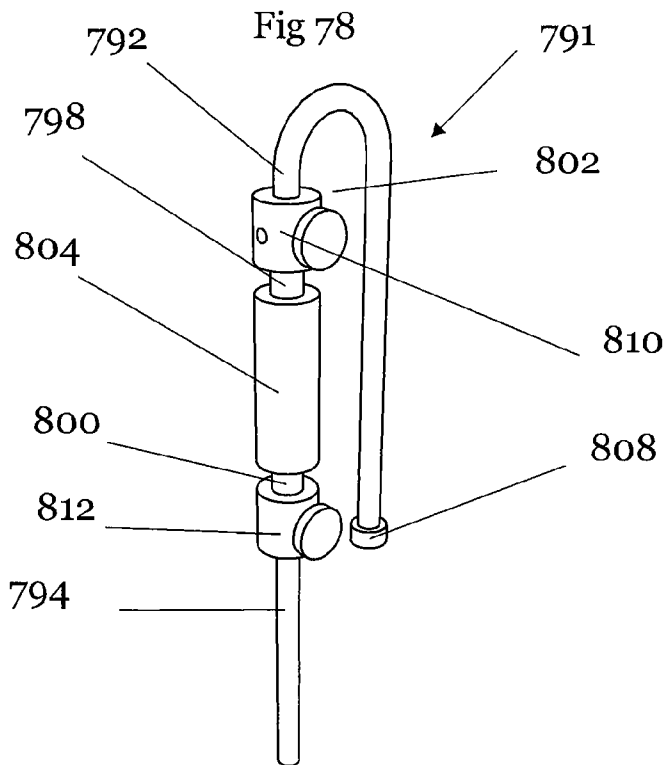
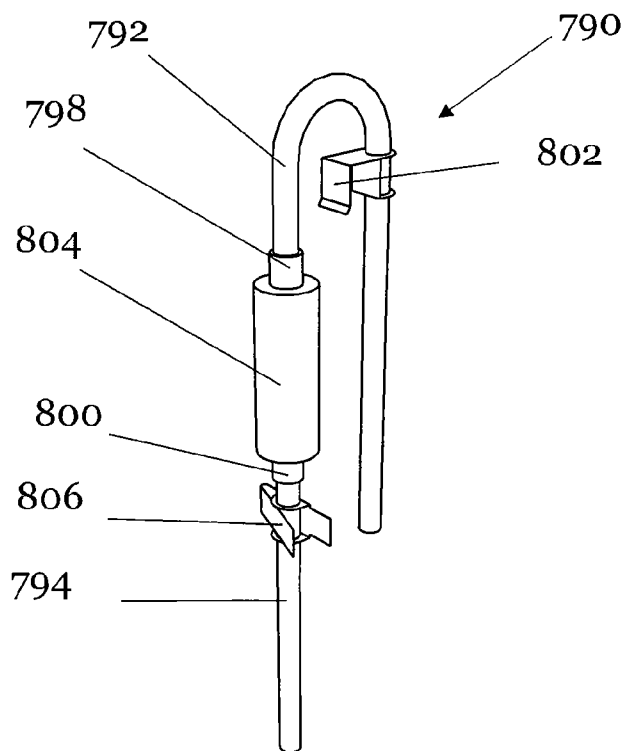


Fig 77





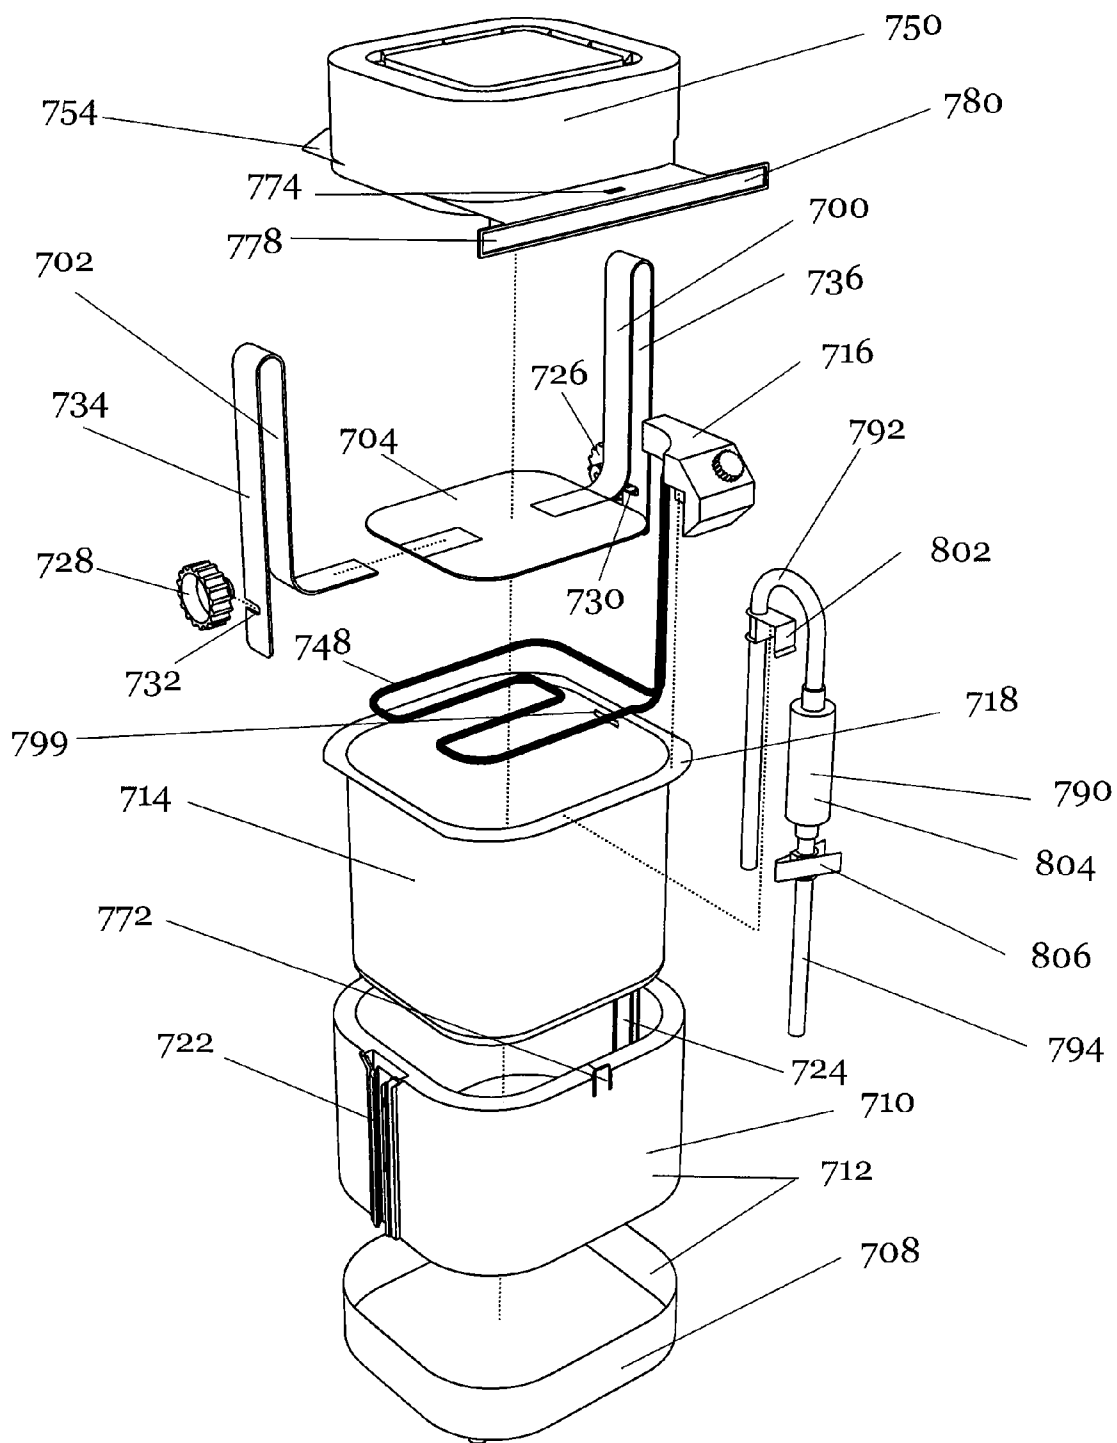
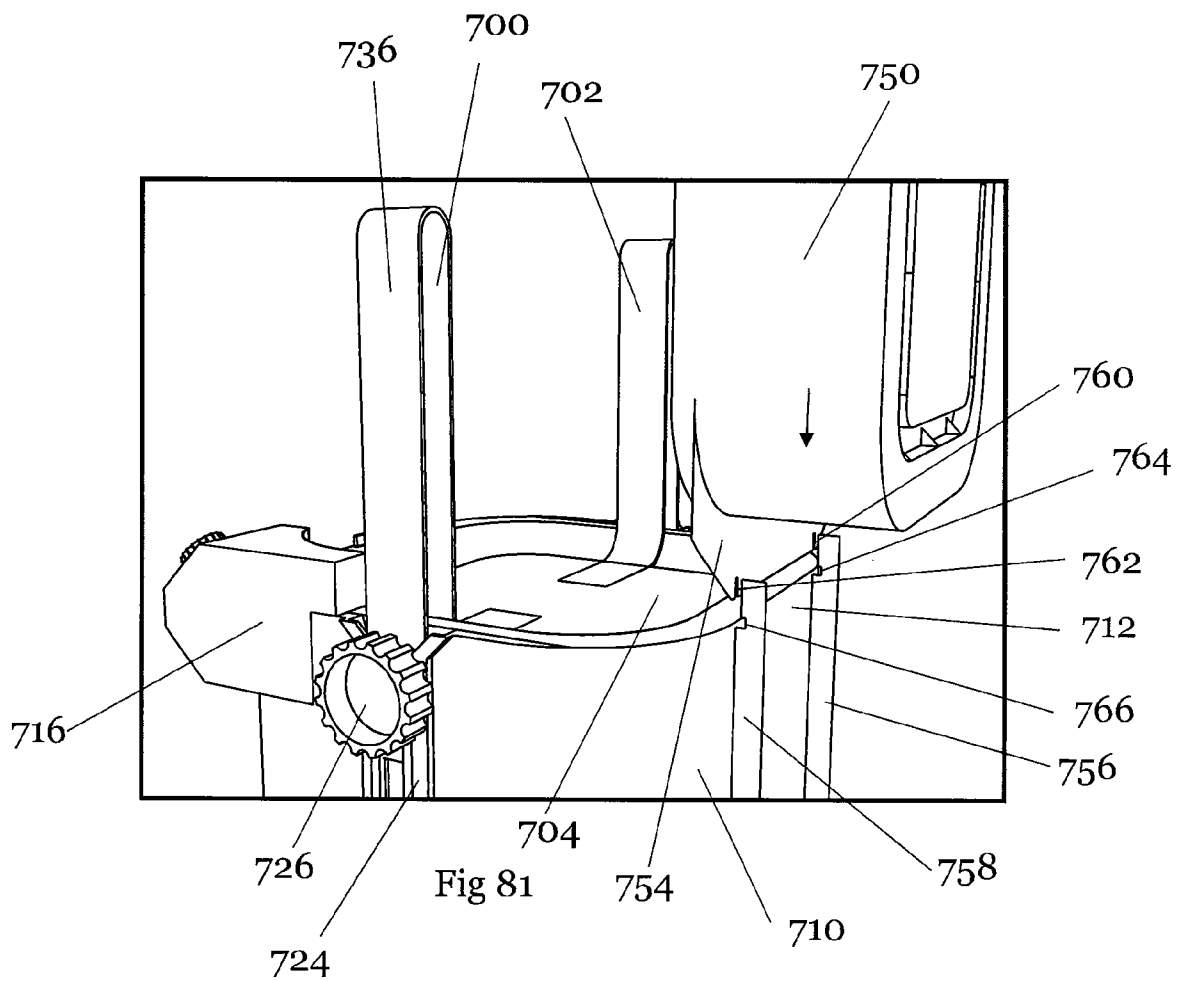


Fig 80



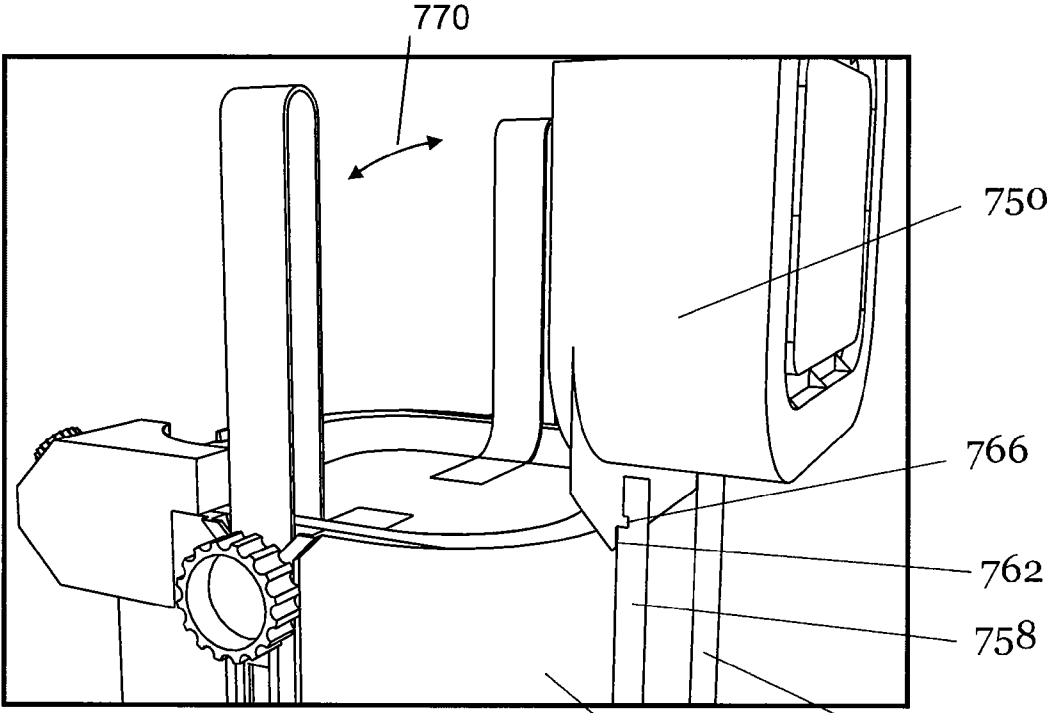


Fig 82

710

756

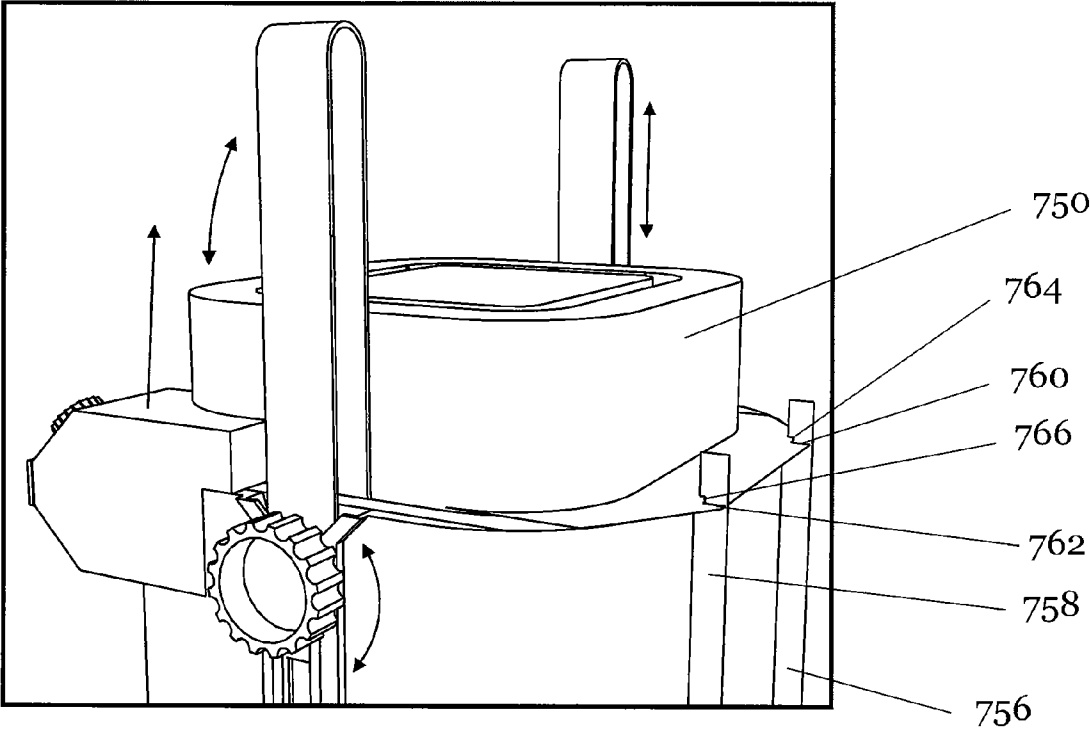
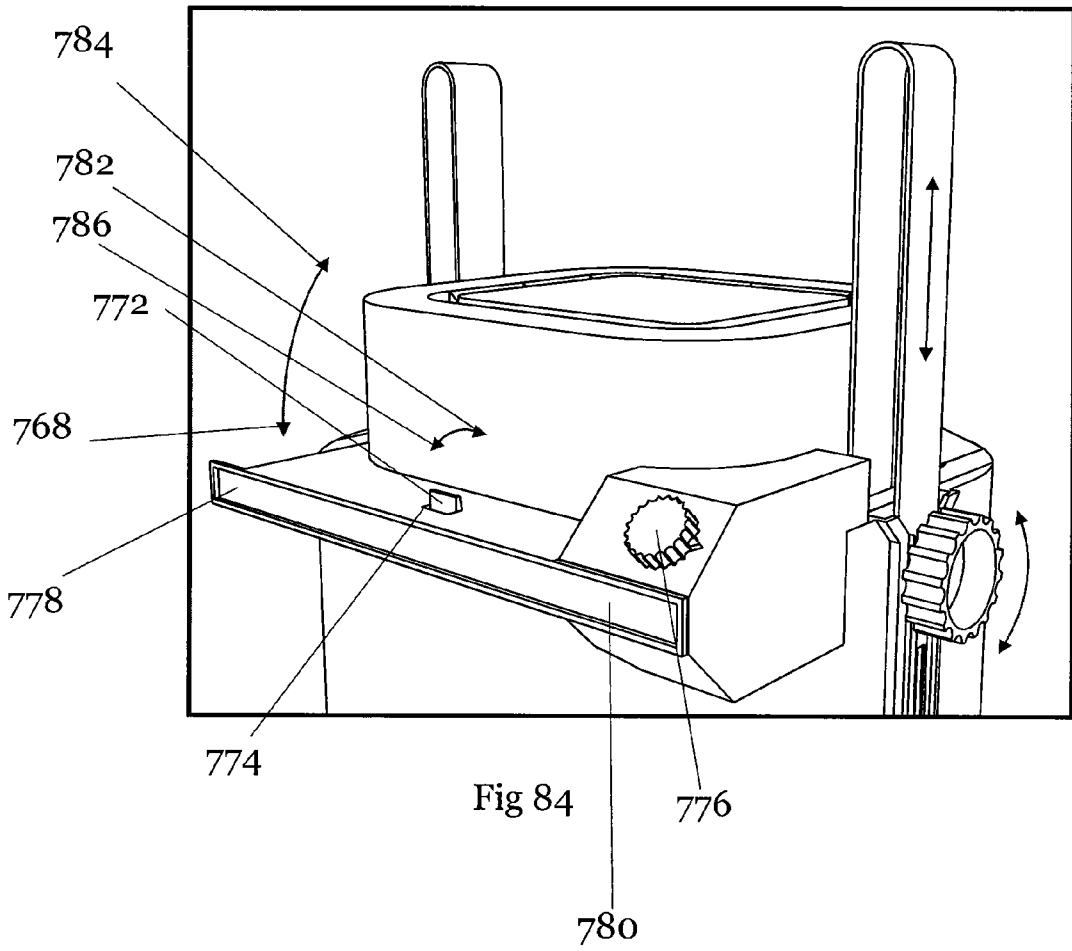


Fig 83



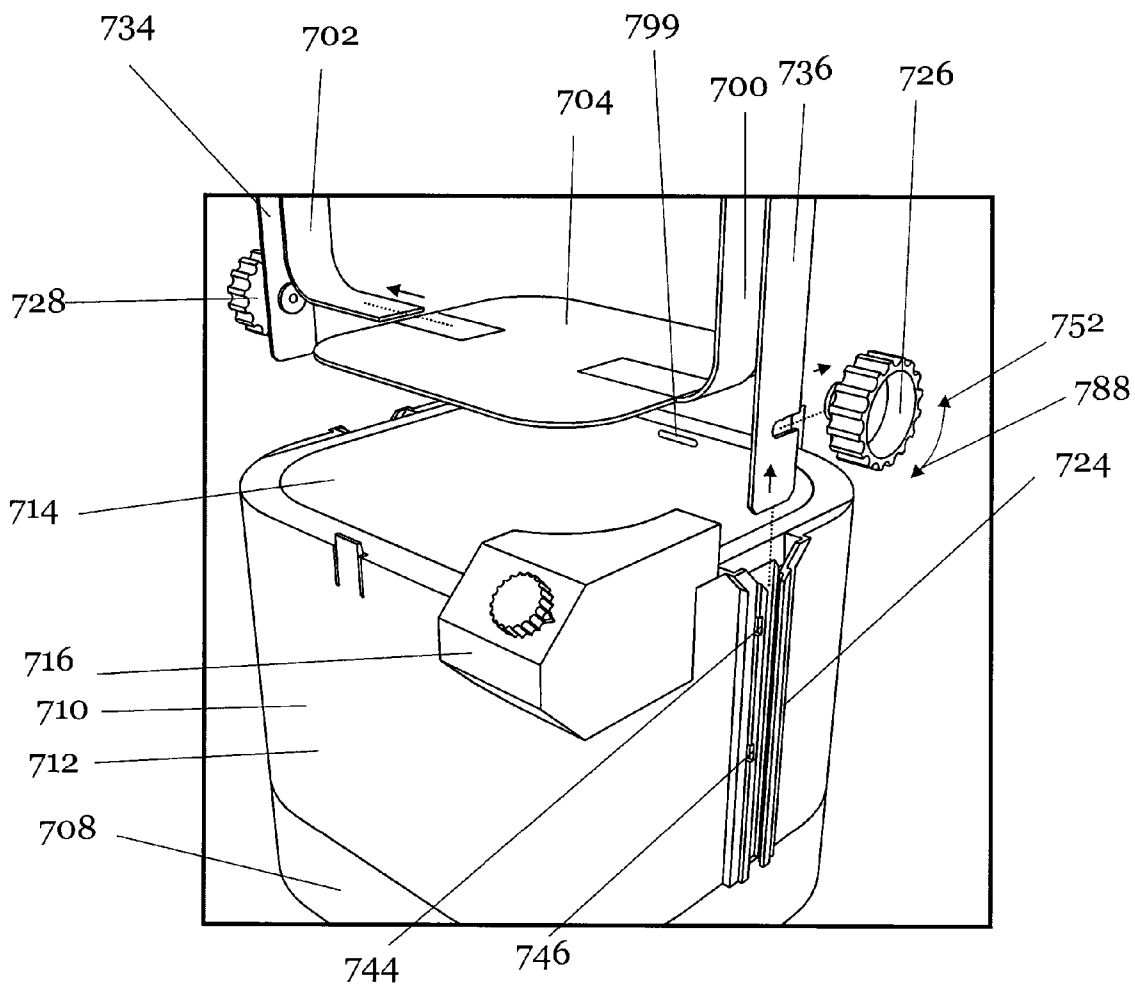
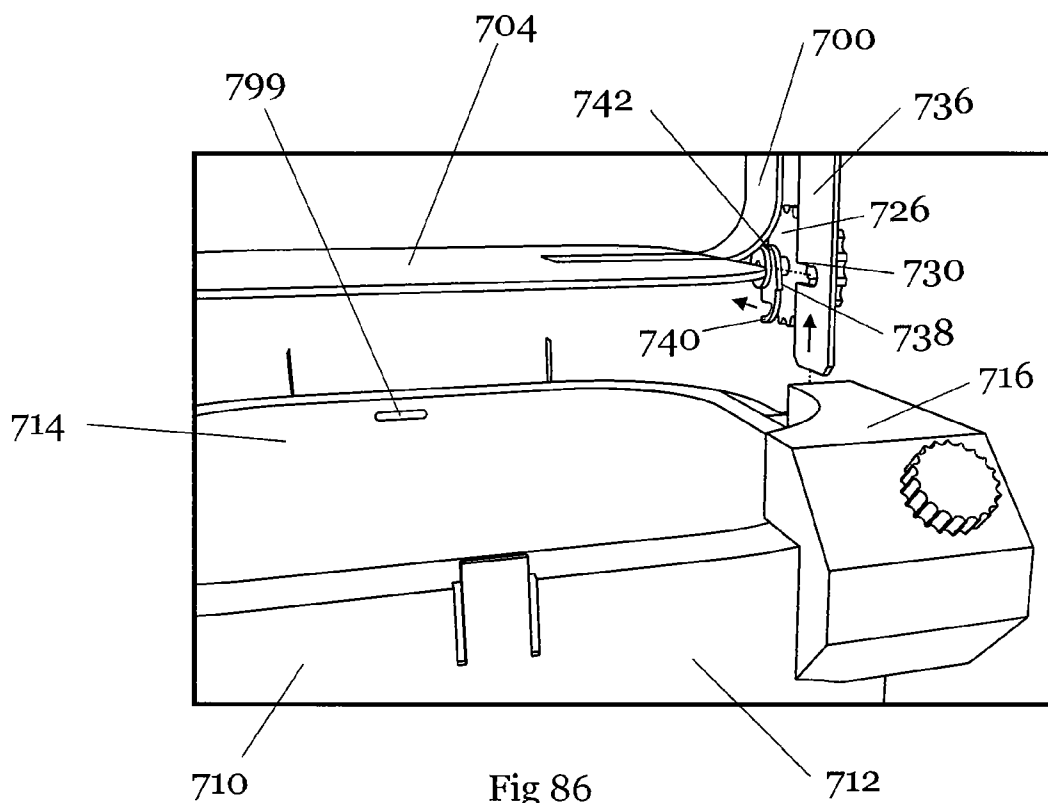
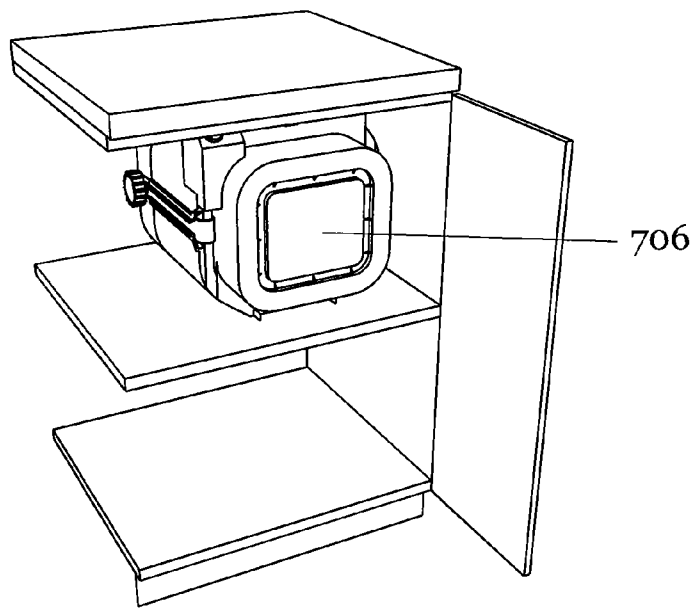
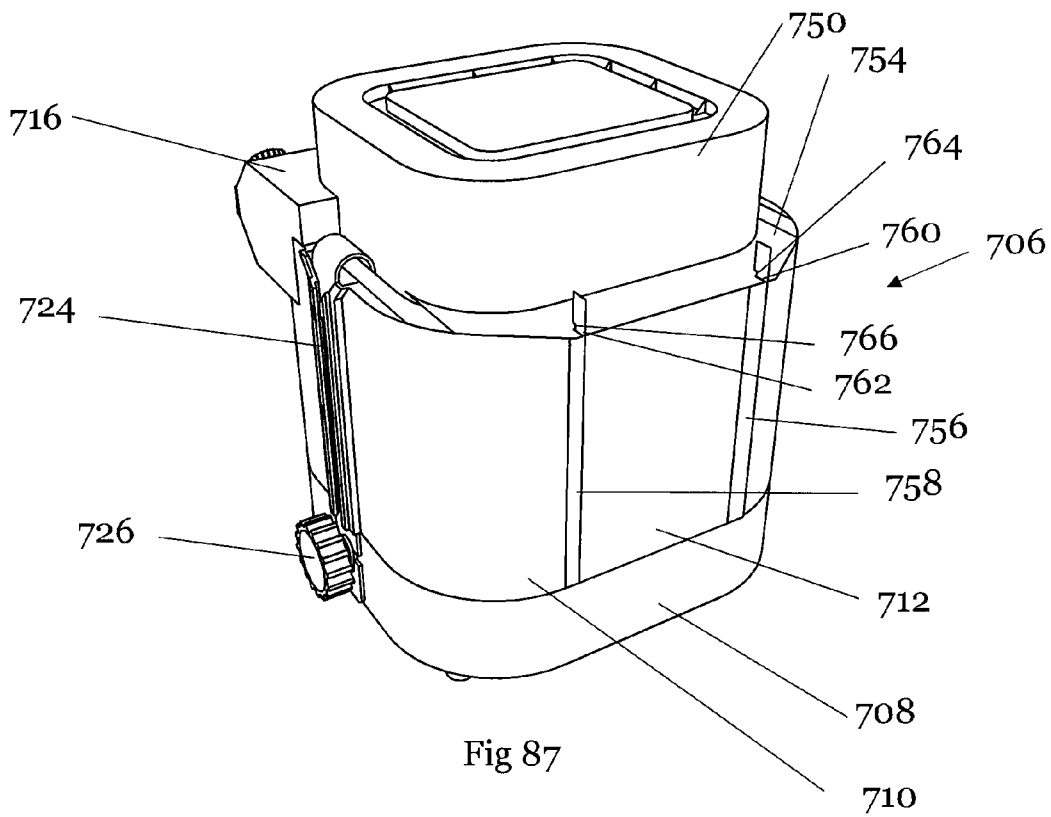


Fig 85







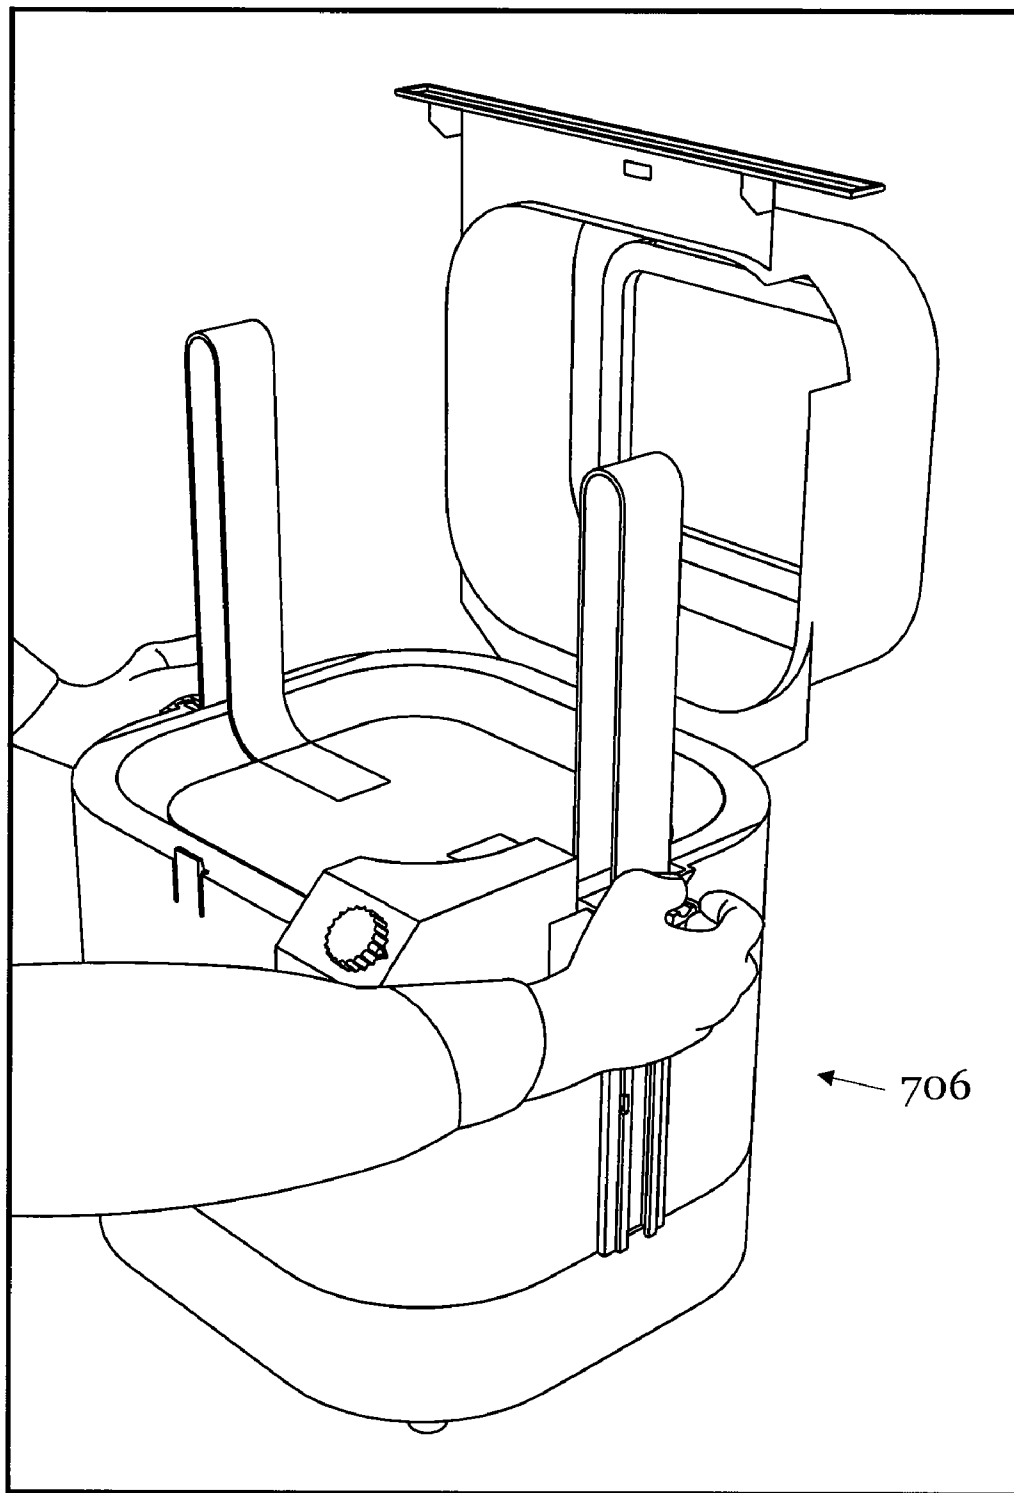


Fig 89

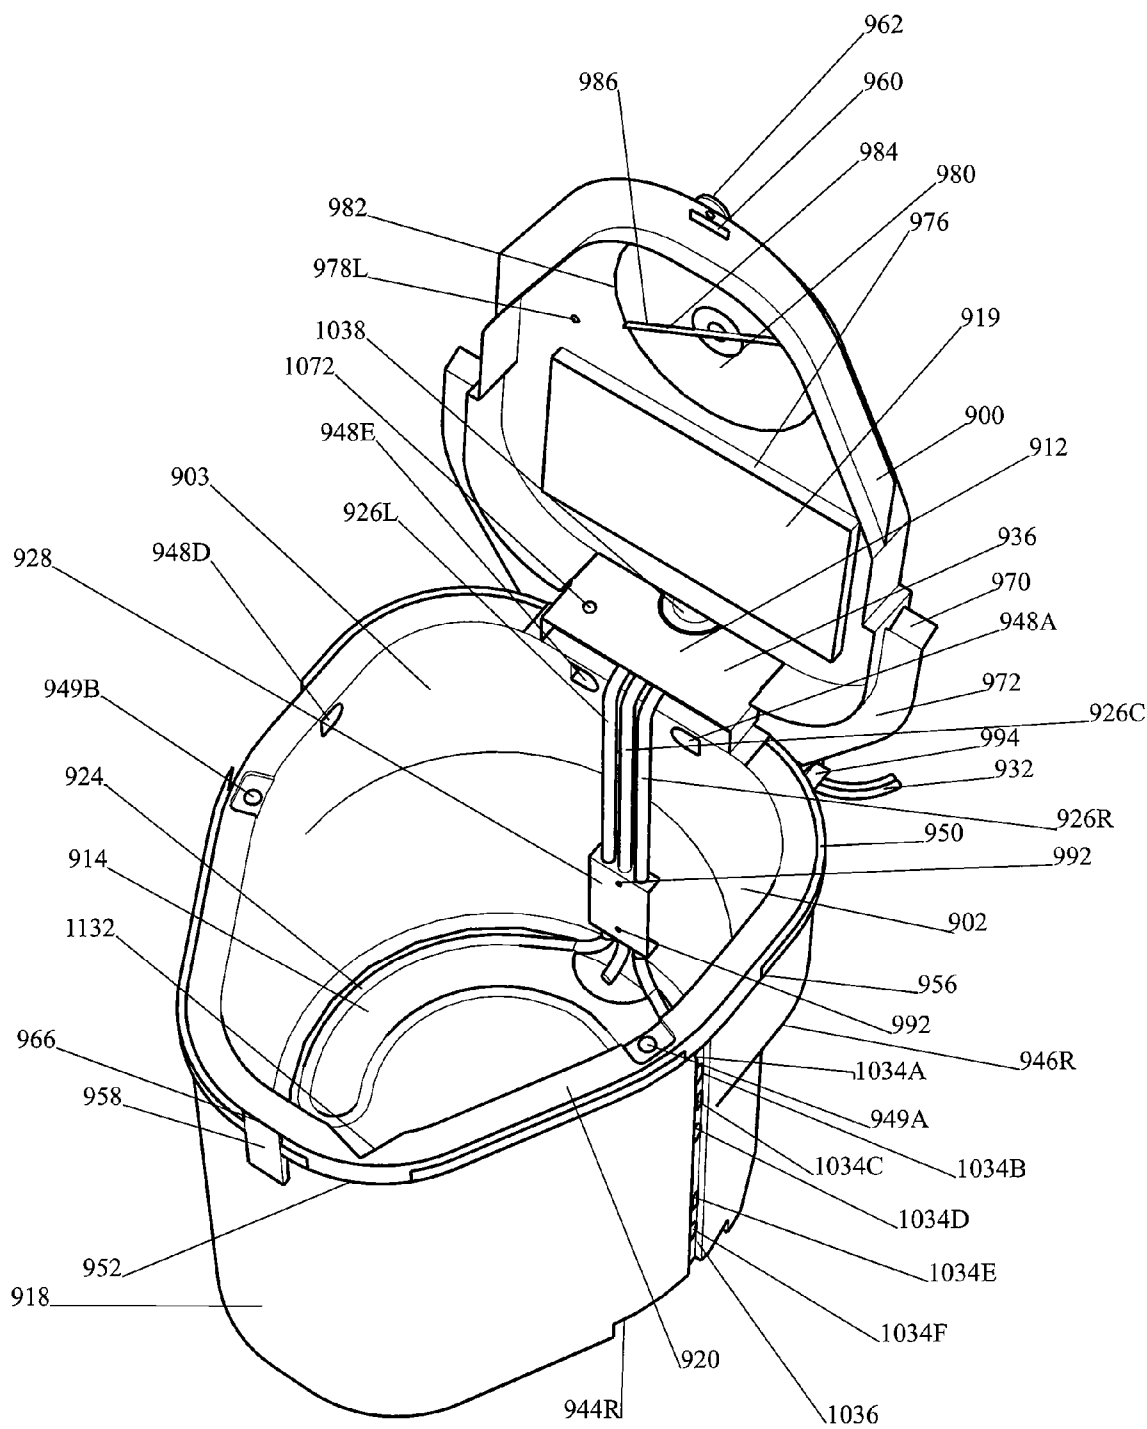


figure 90

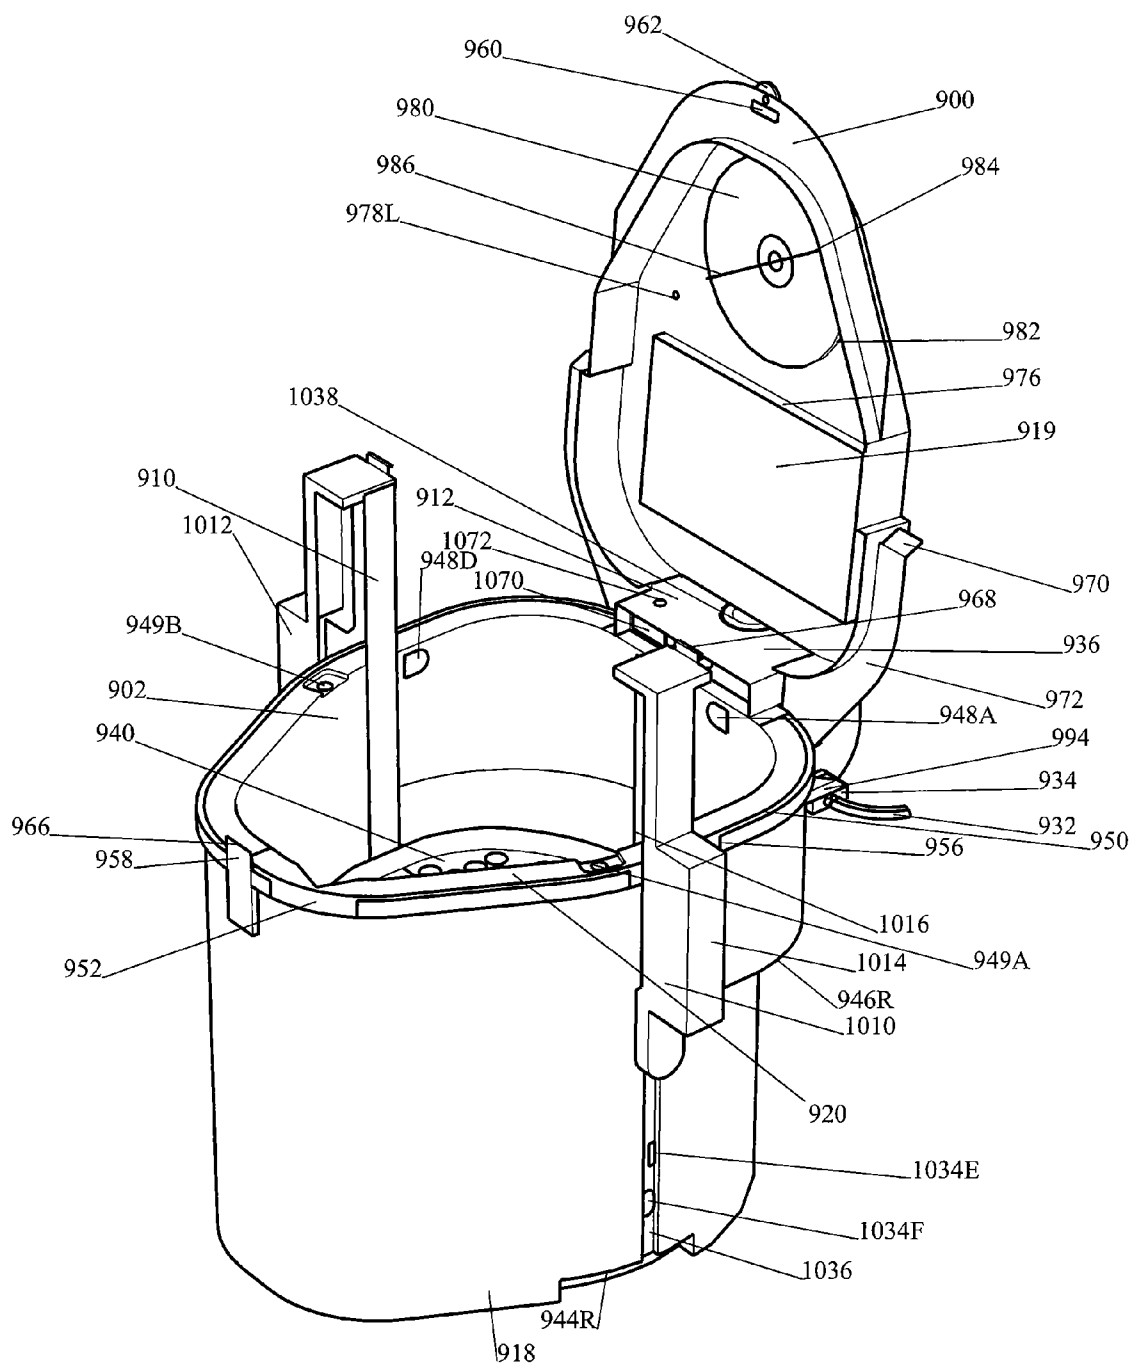


figure 91

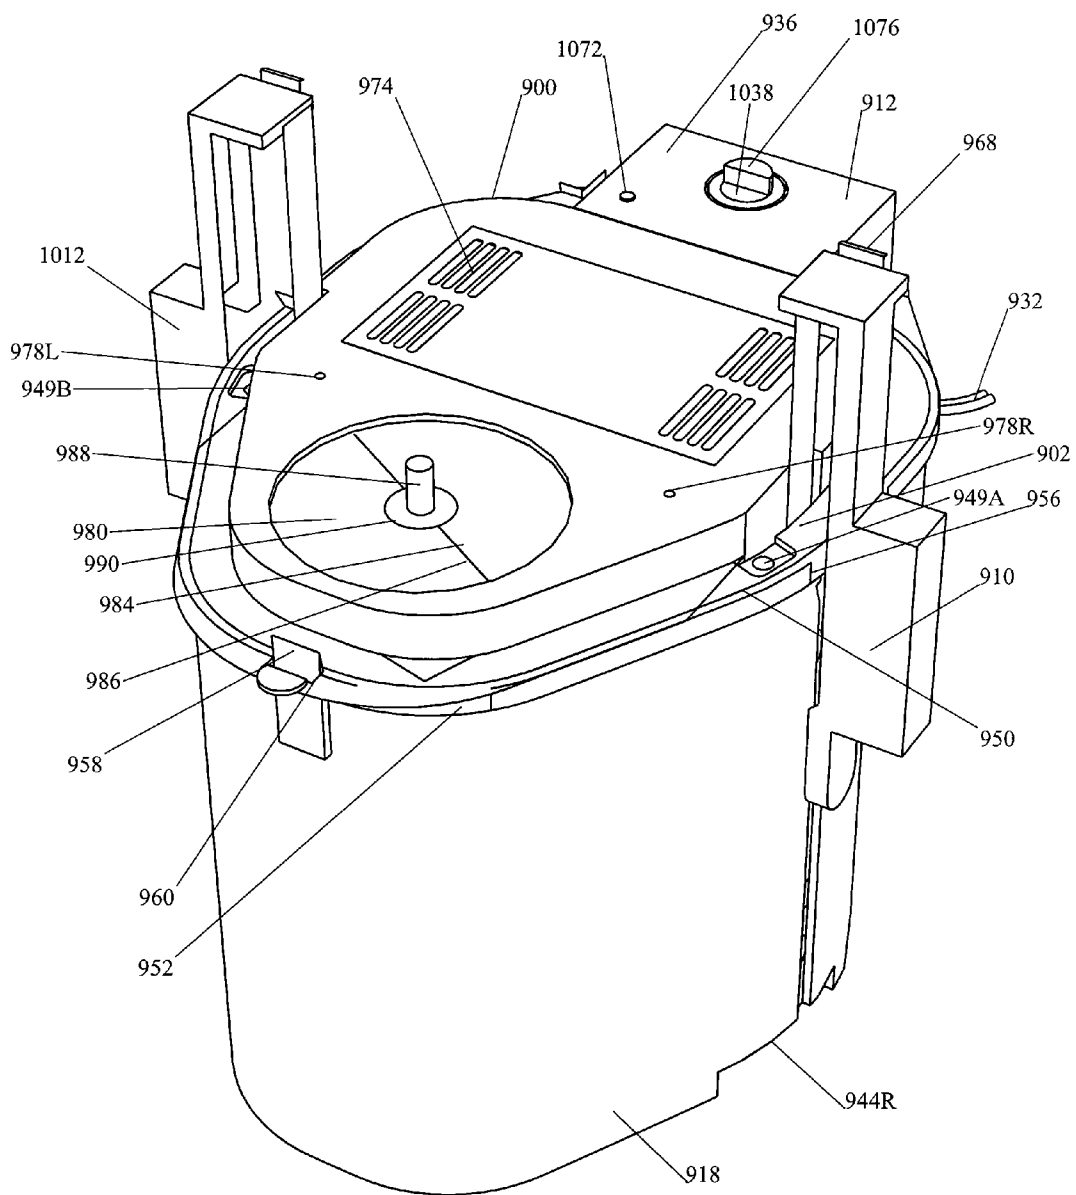


figure 92

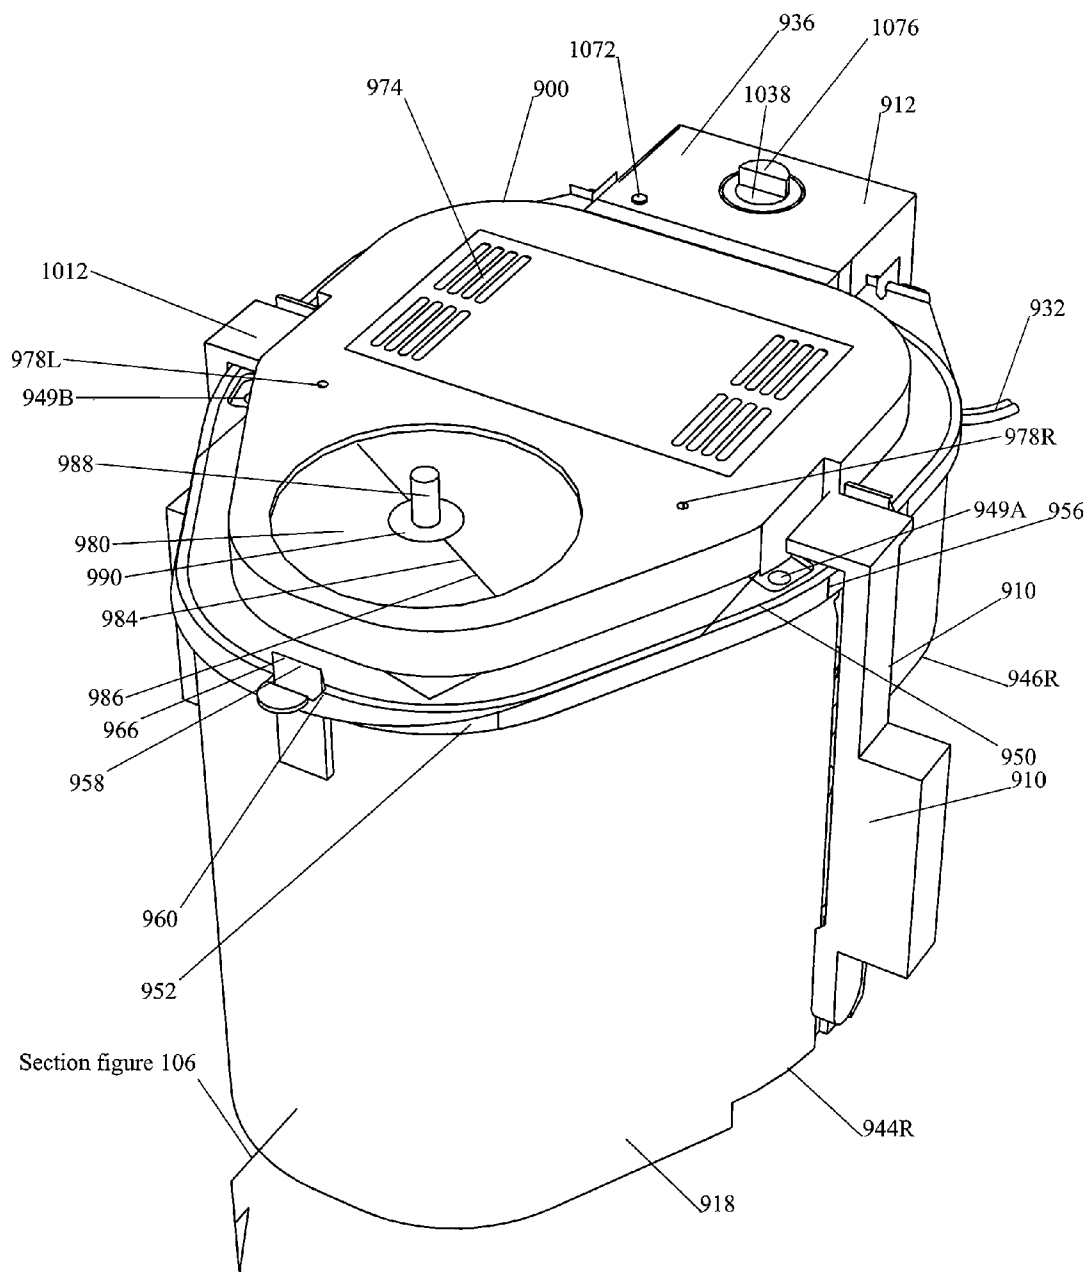


figure 93

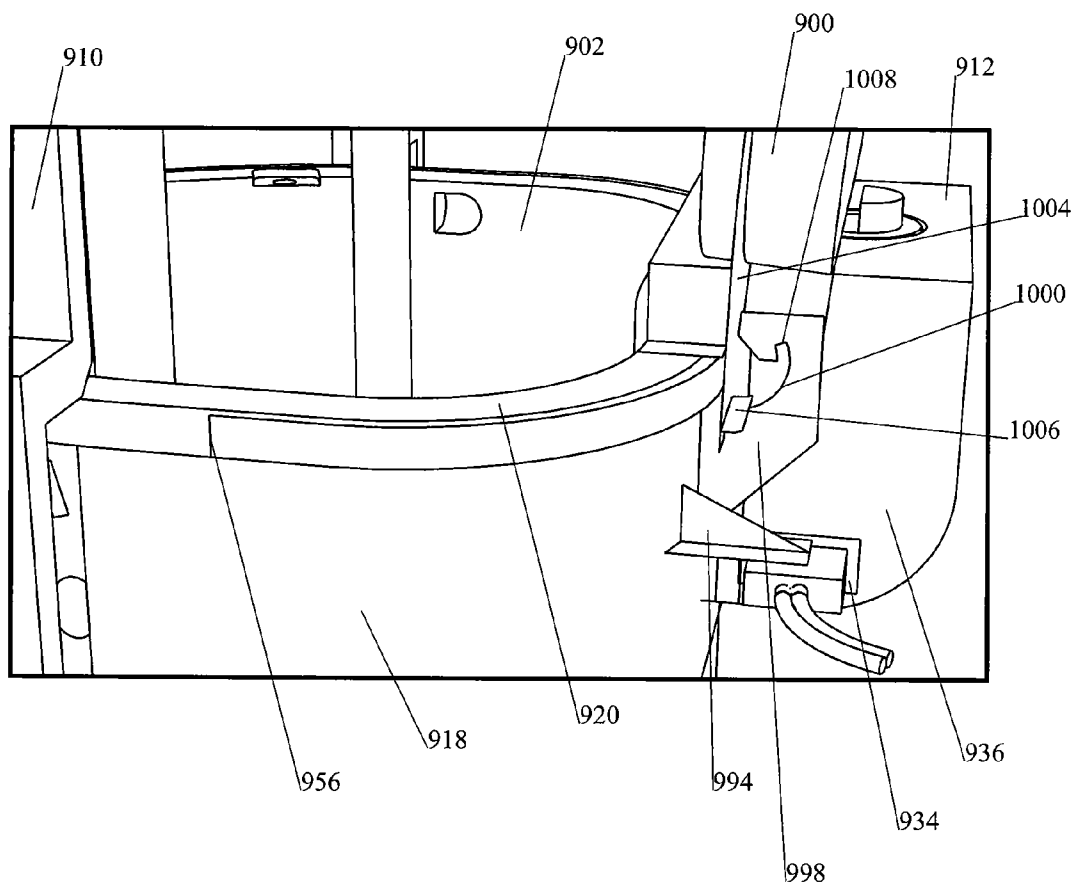


figure 94A

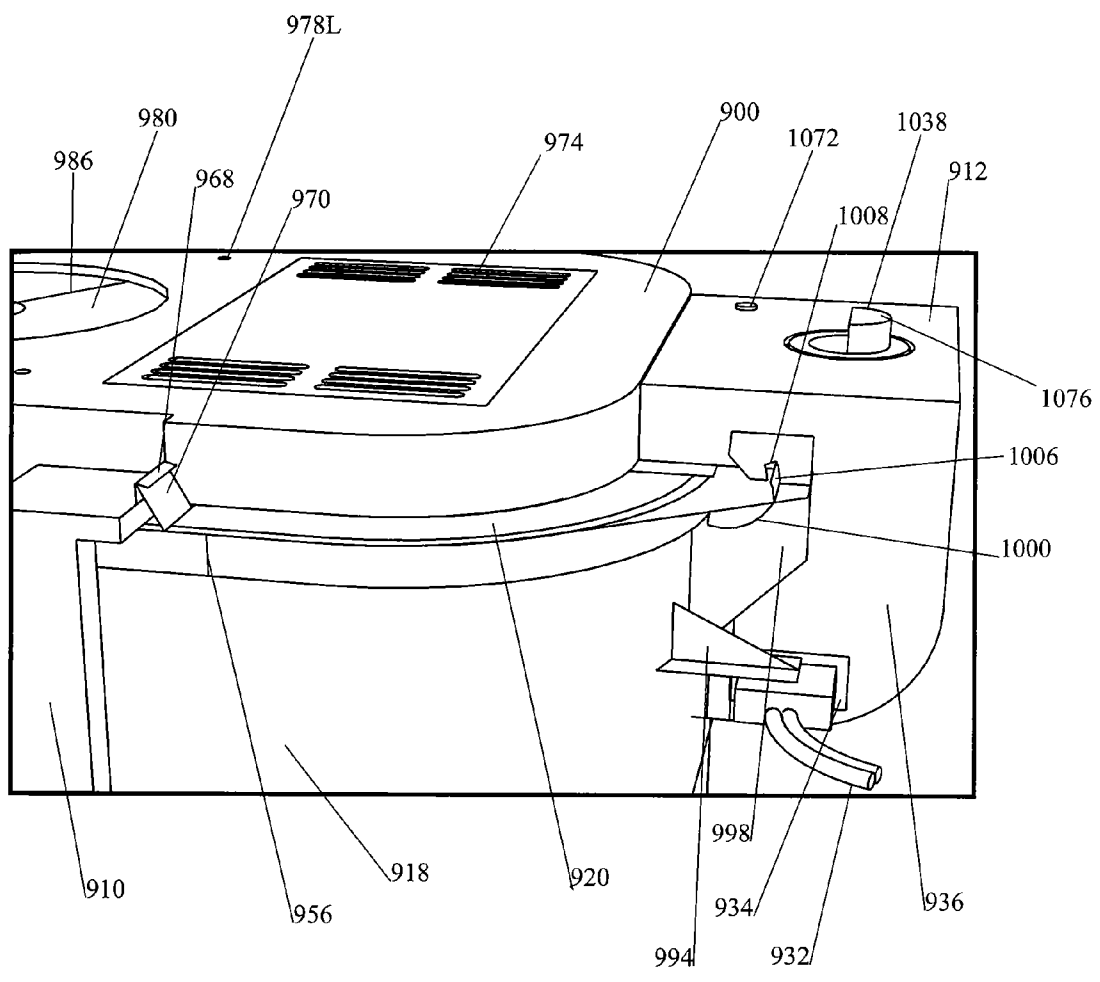


figure 94B

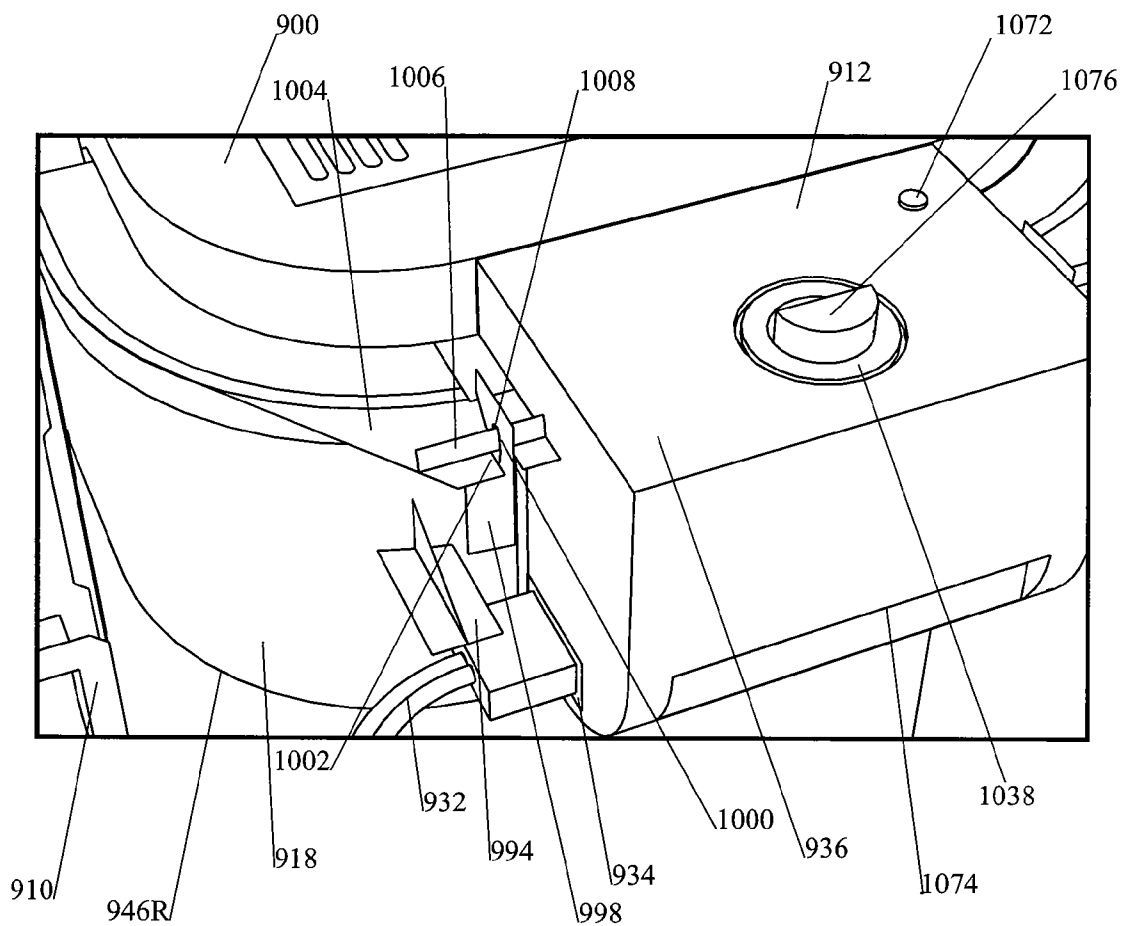


figure 94C



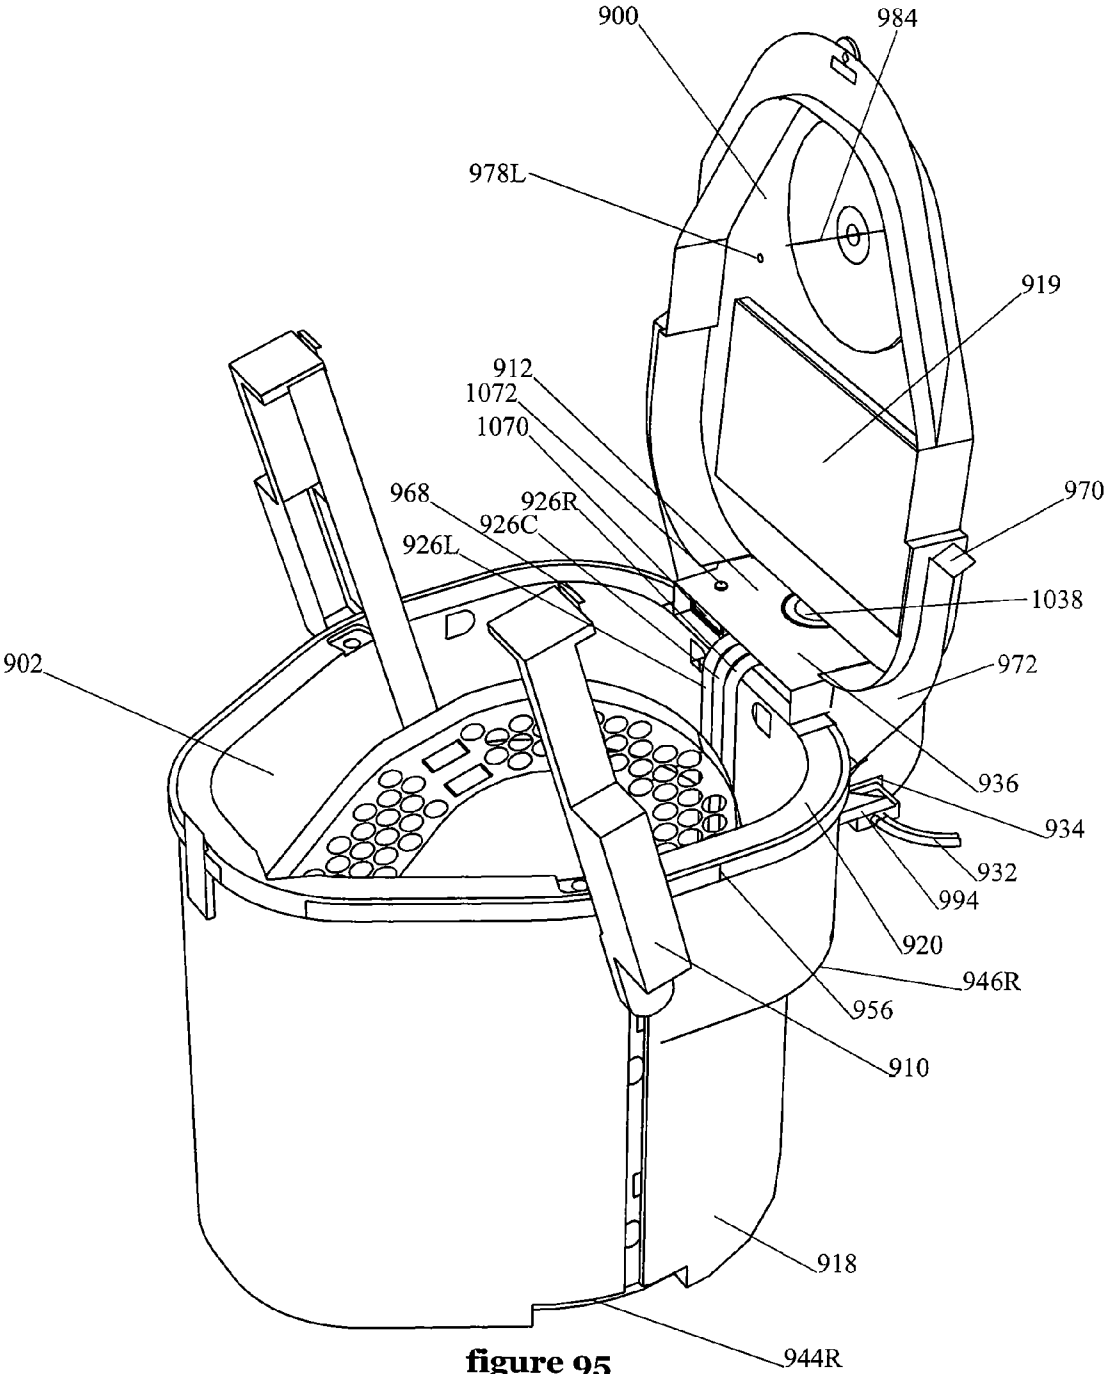


figure 95

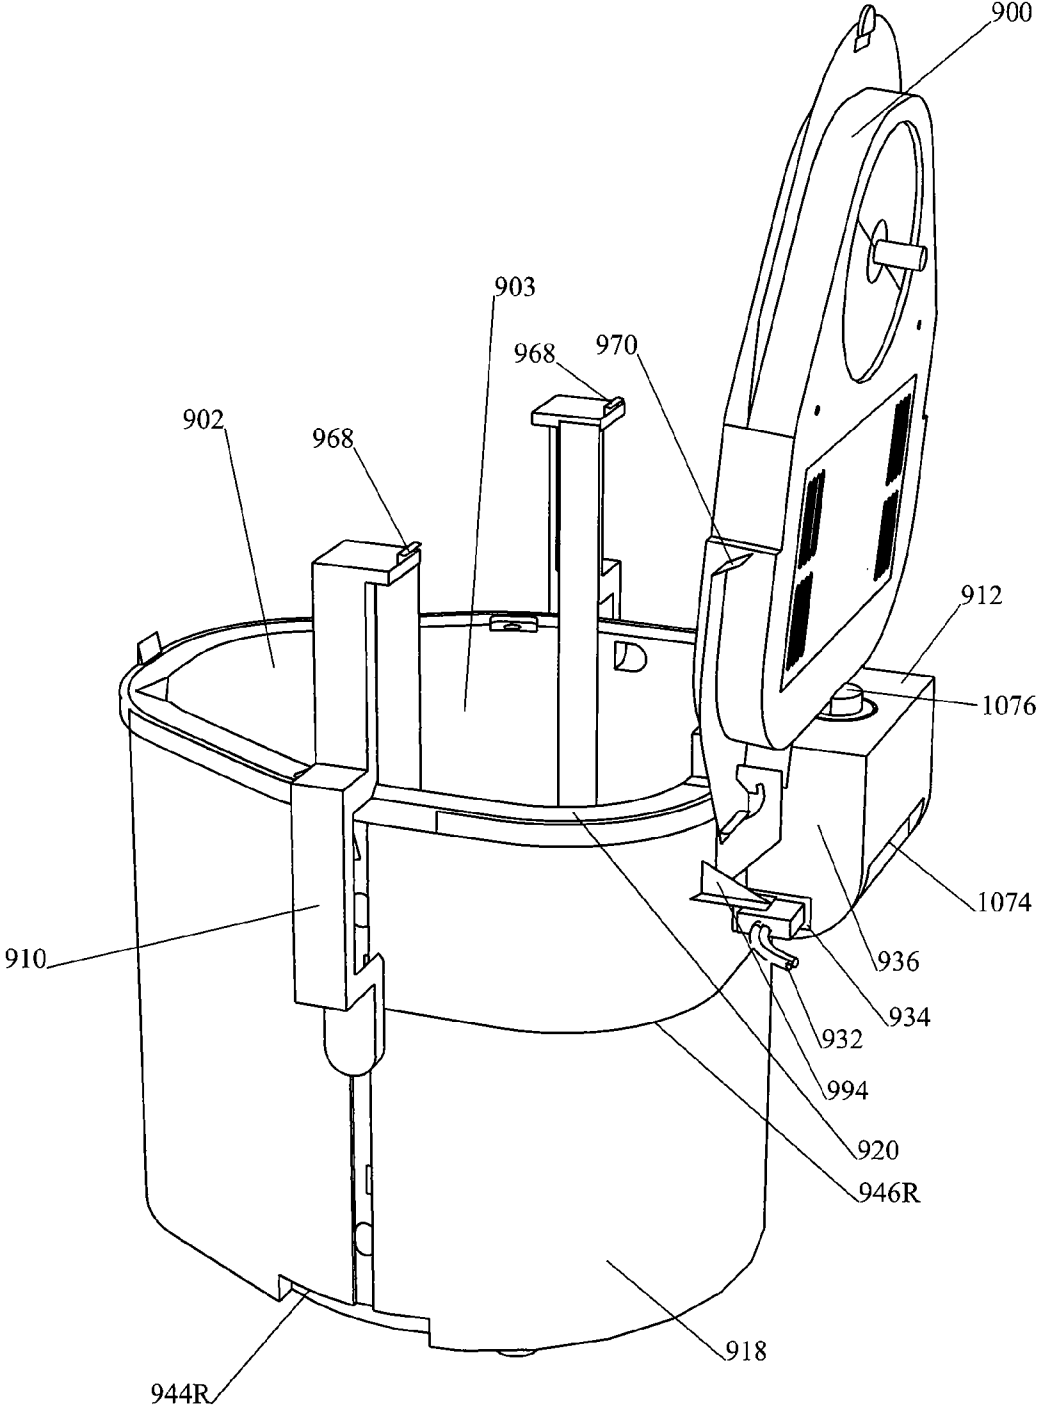


figure 96

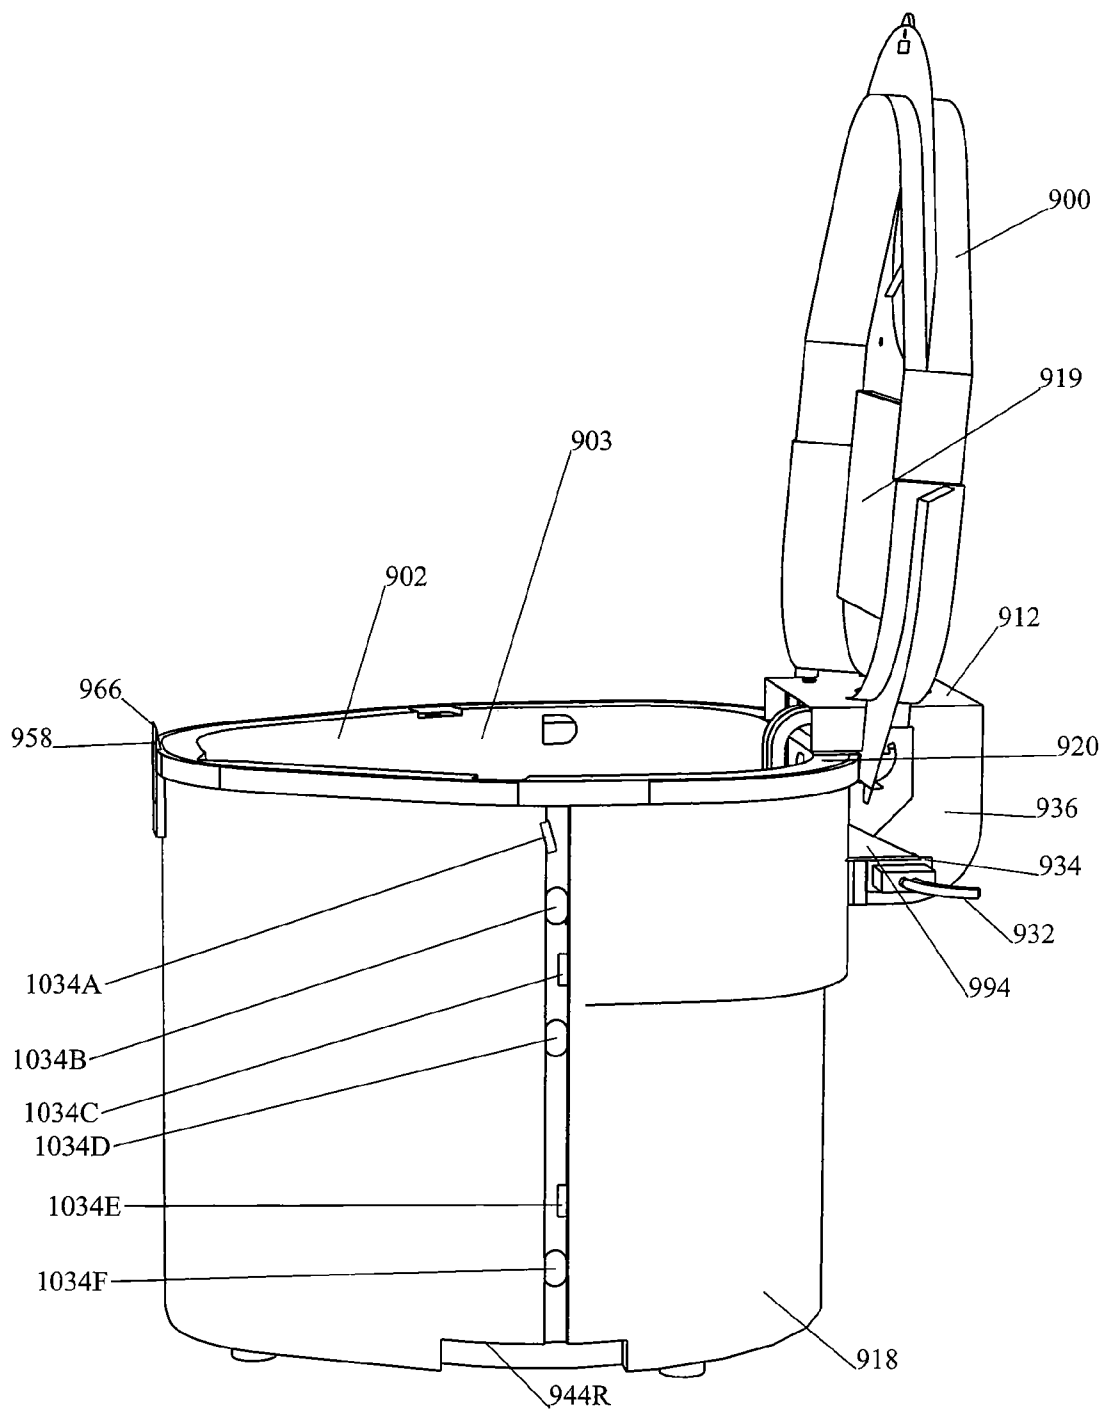


figure 97

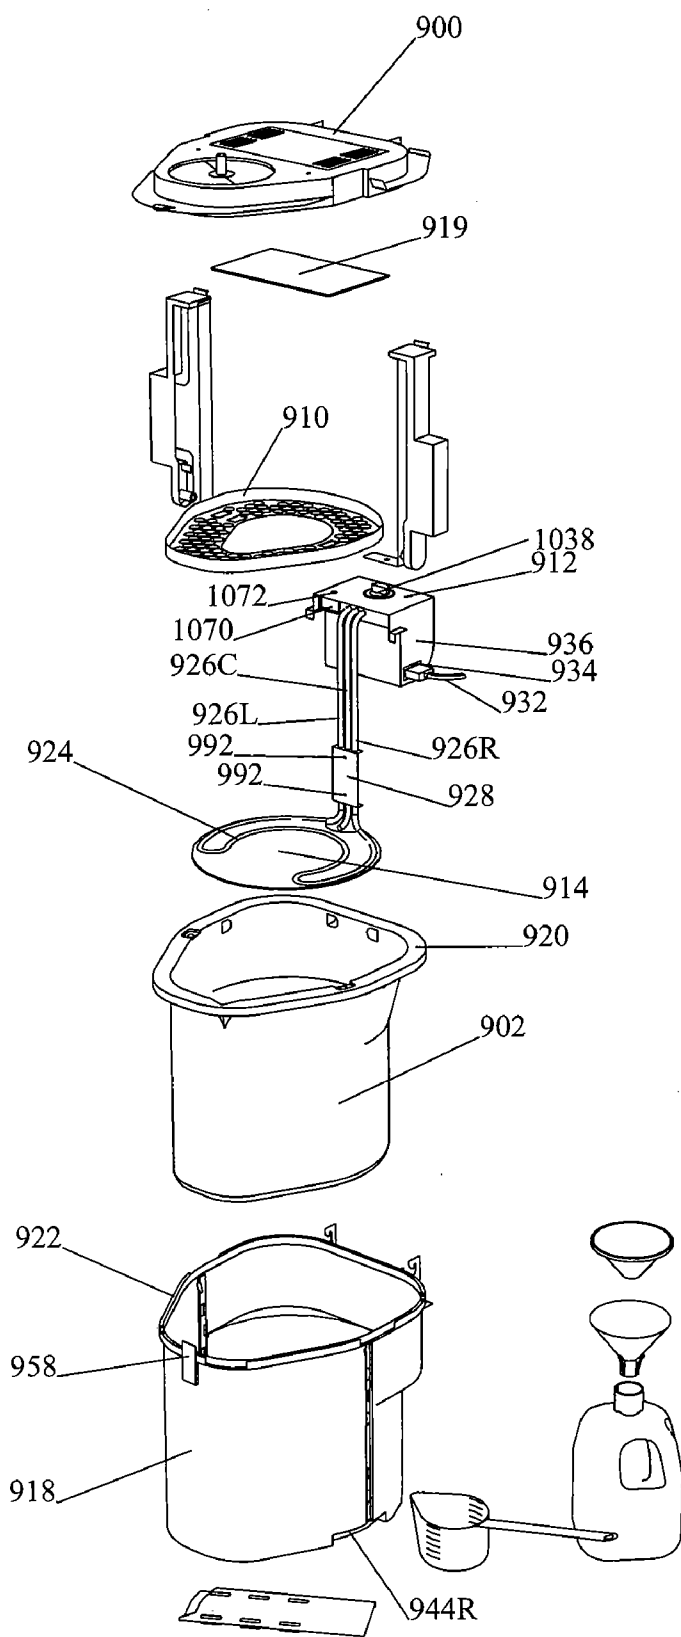


figure 98

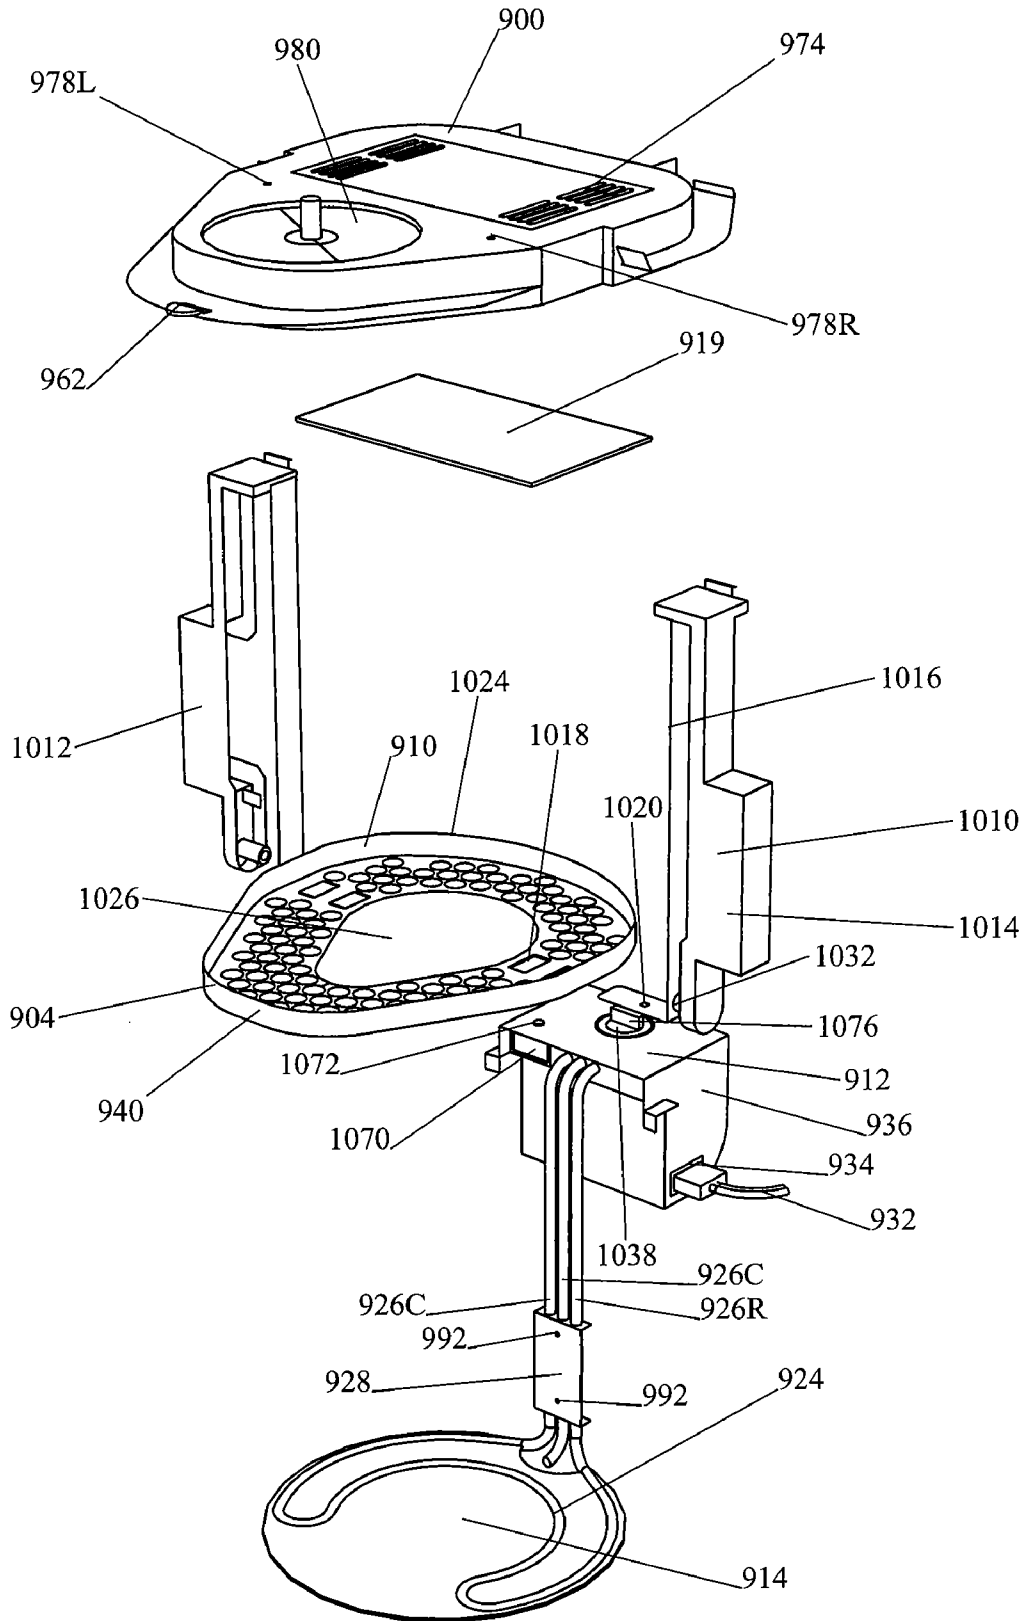


figure 99A

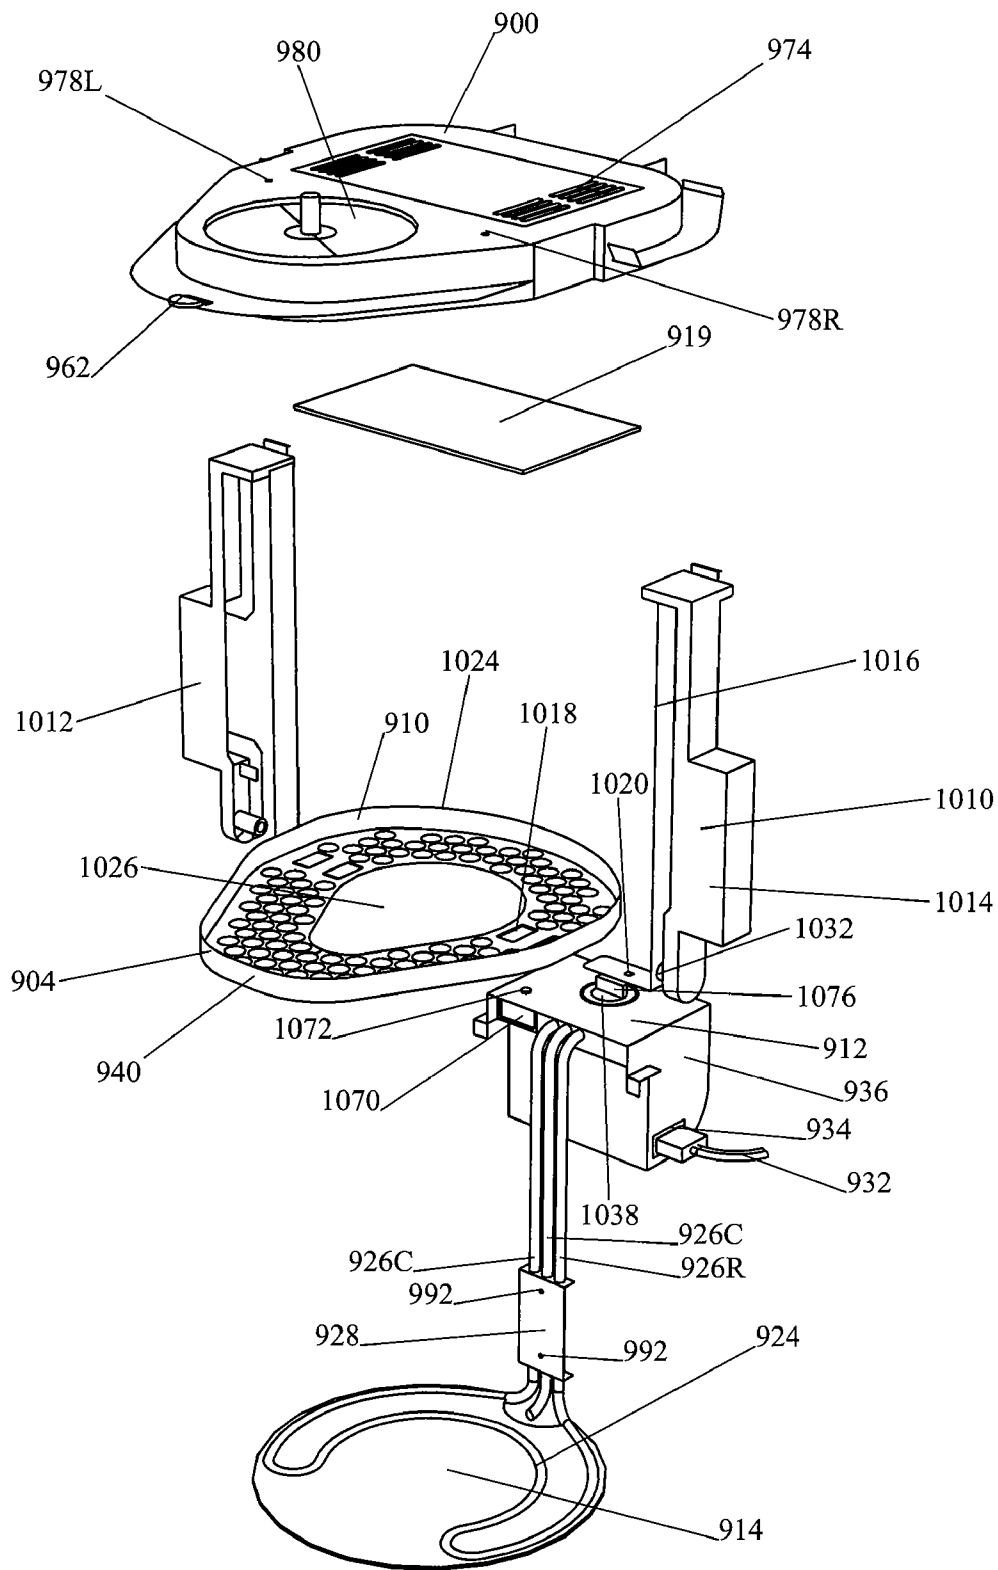
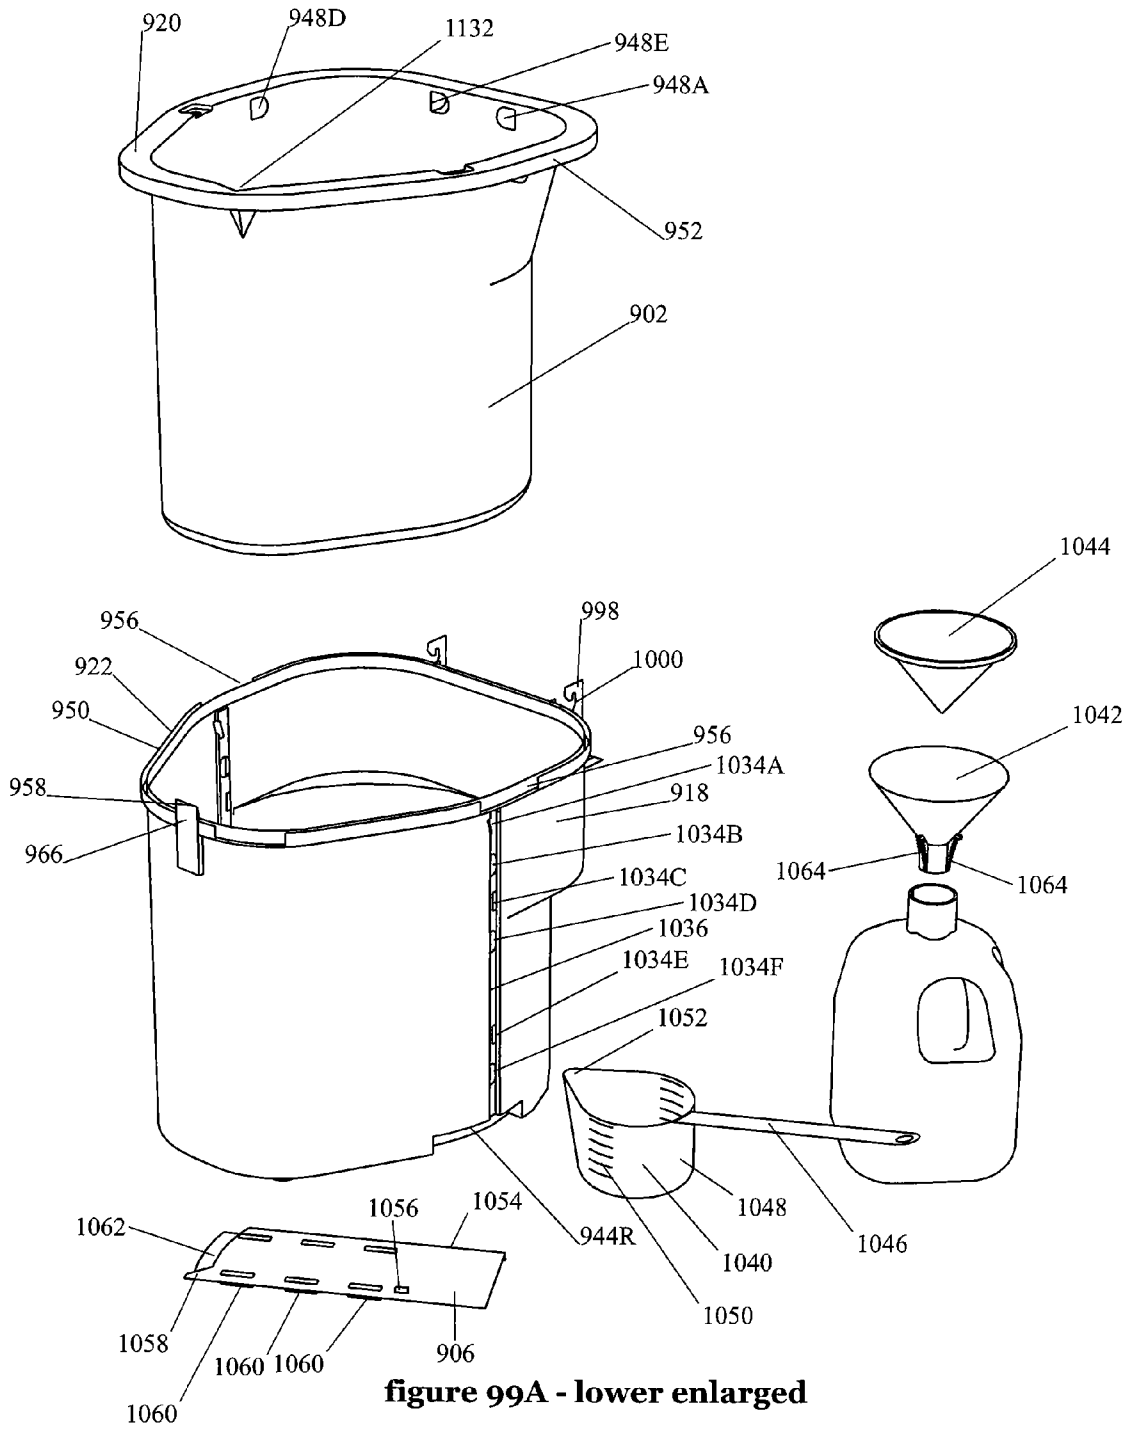


figure 99A - upper enlarged



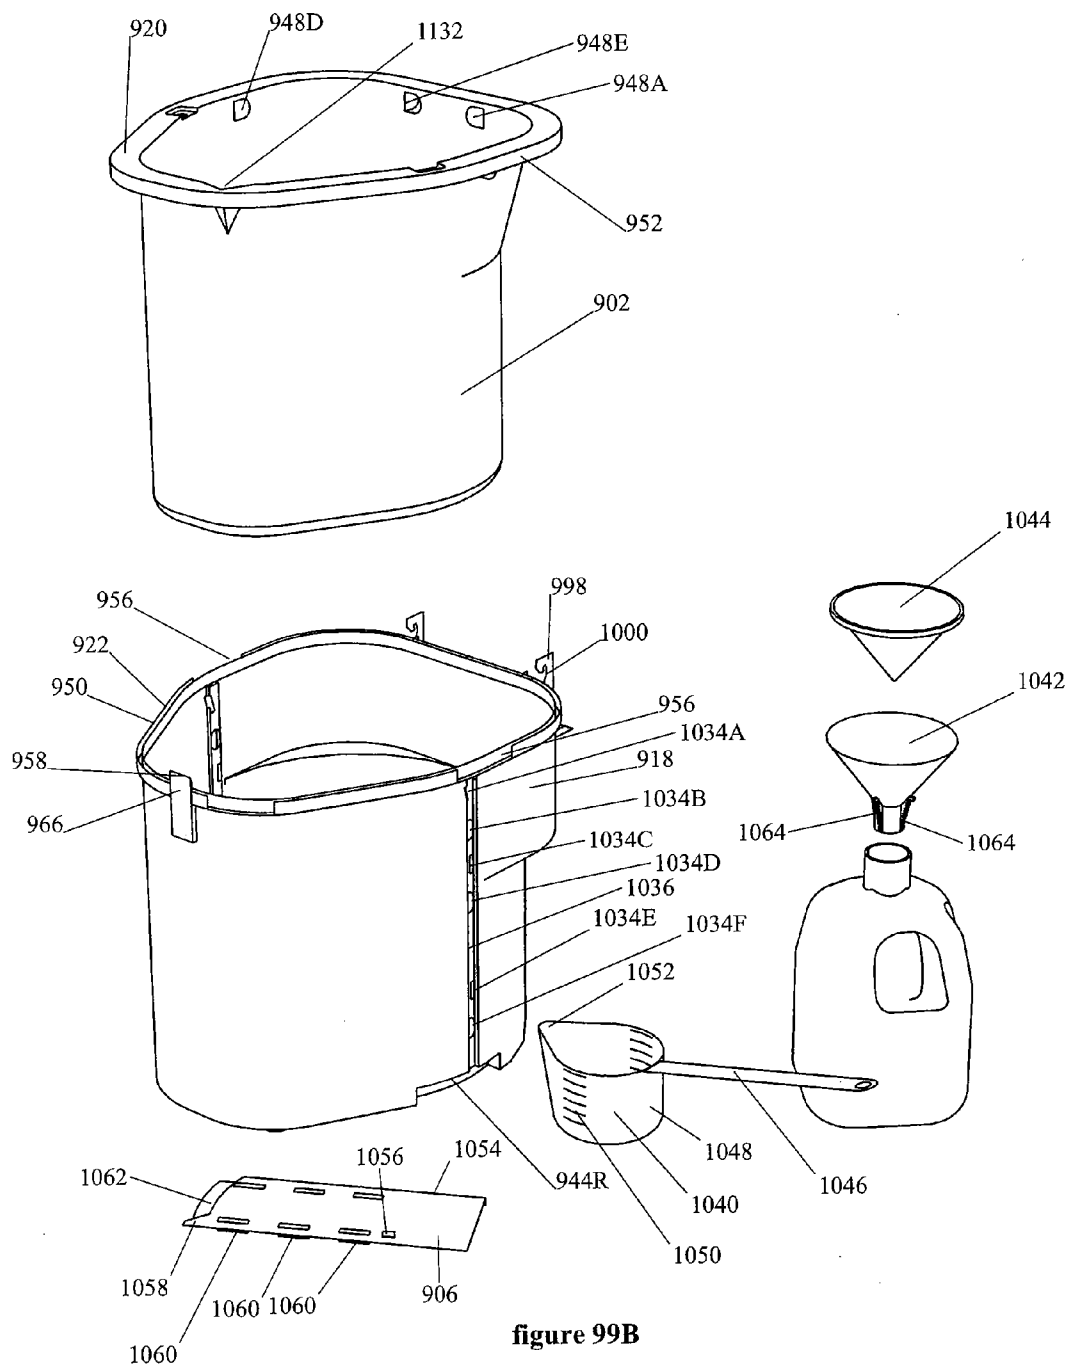
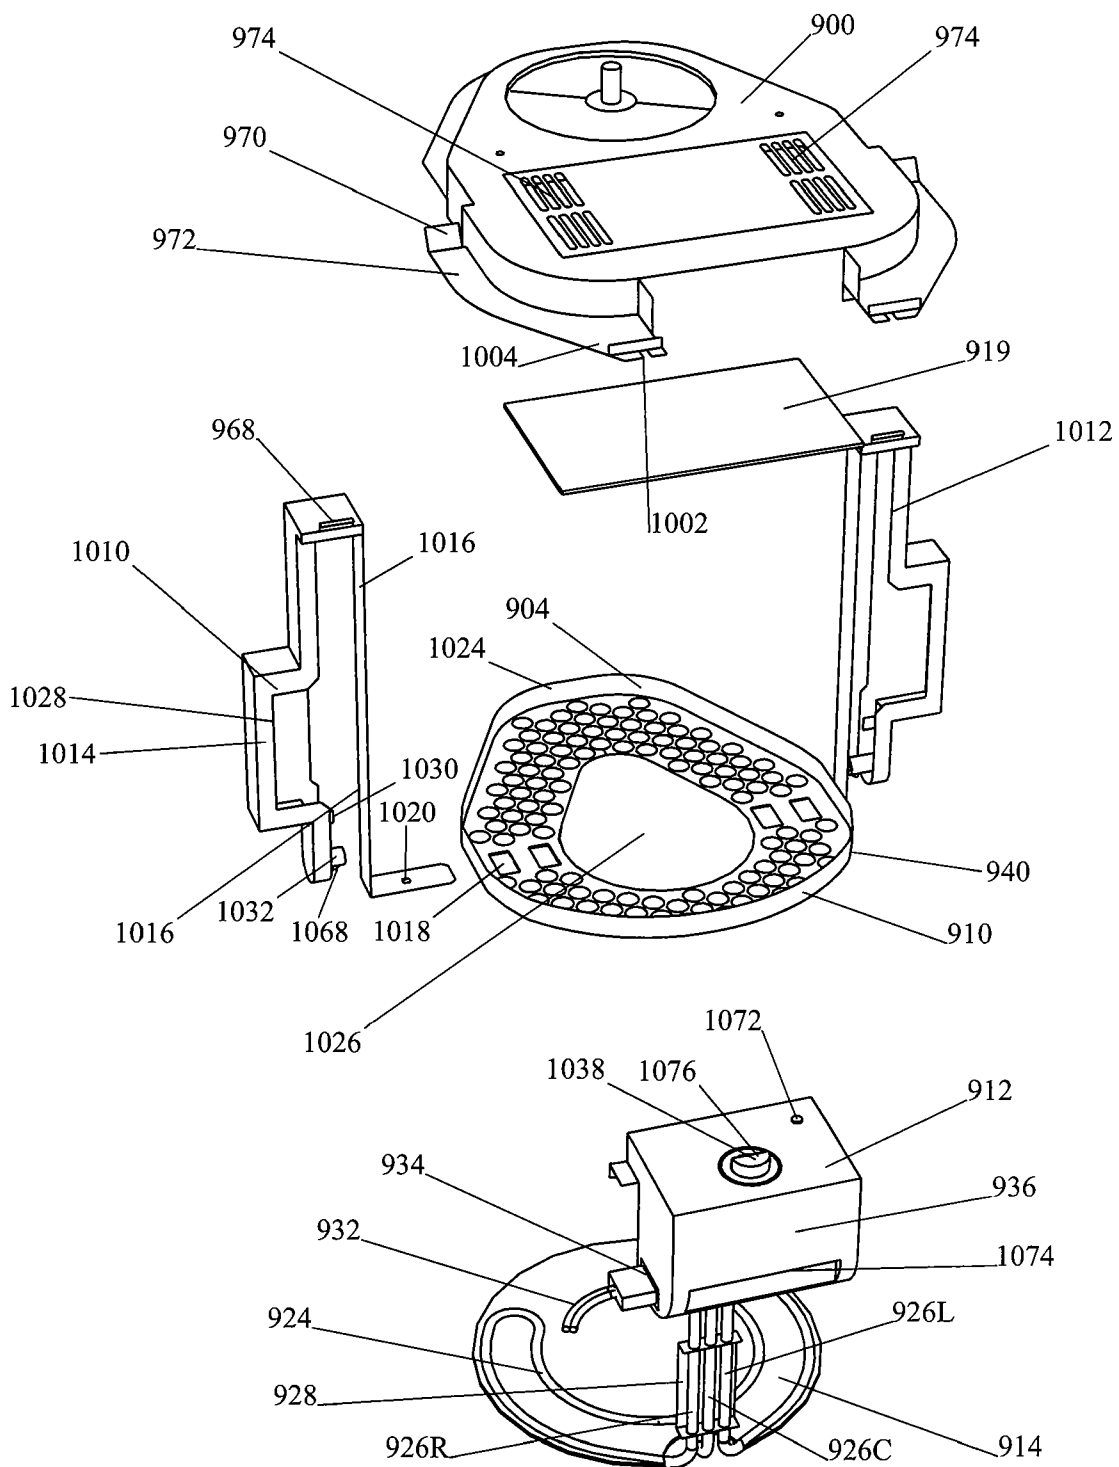


figure 99B





**figure 99B - upper enlarged**

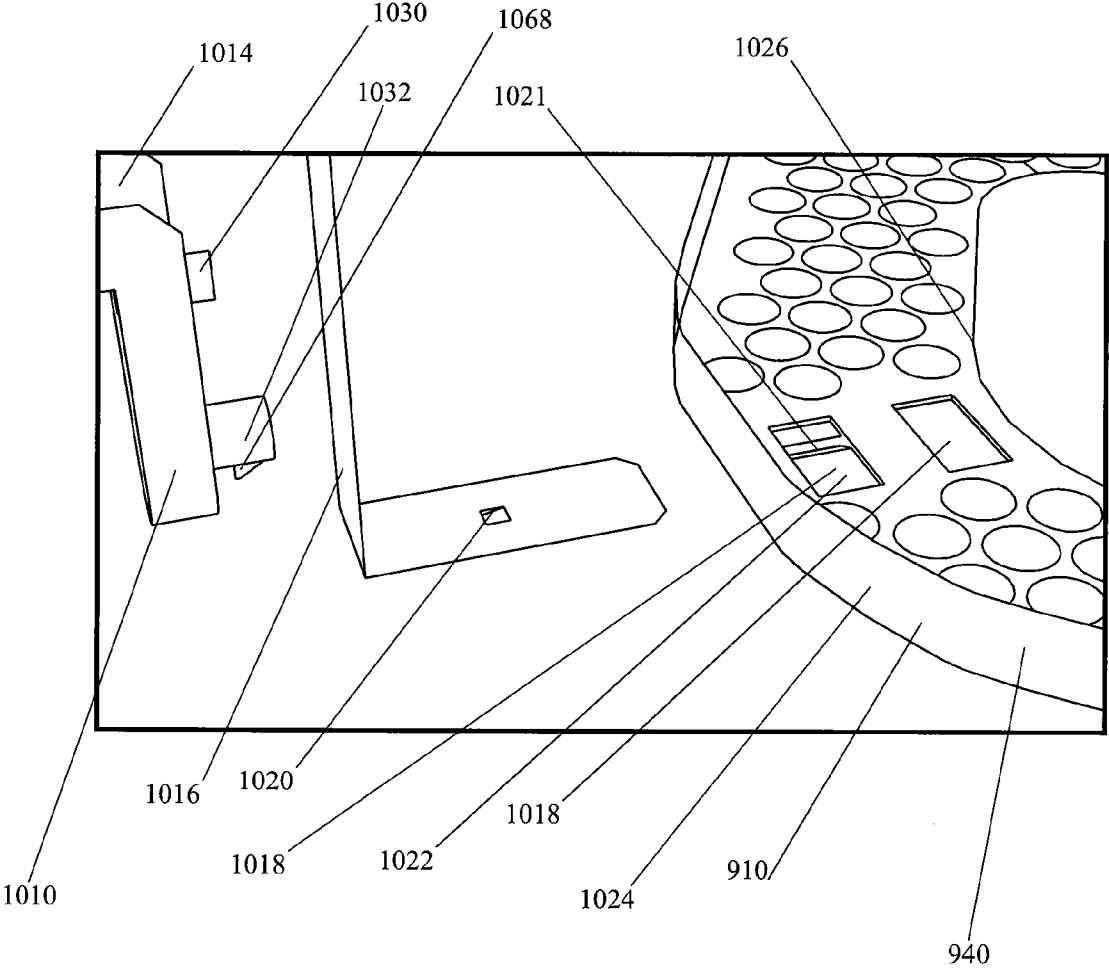


figure 99B - food support enlarged

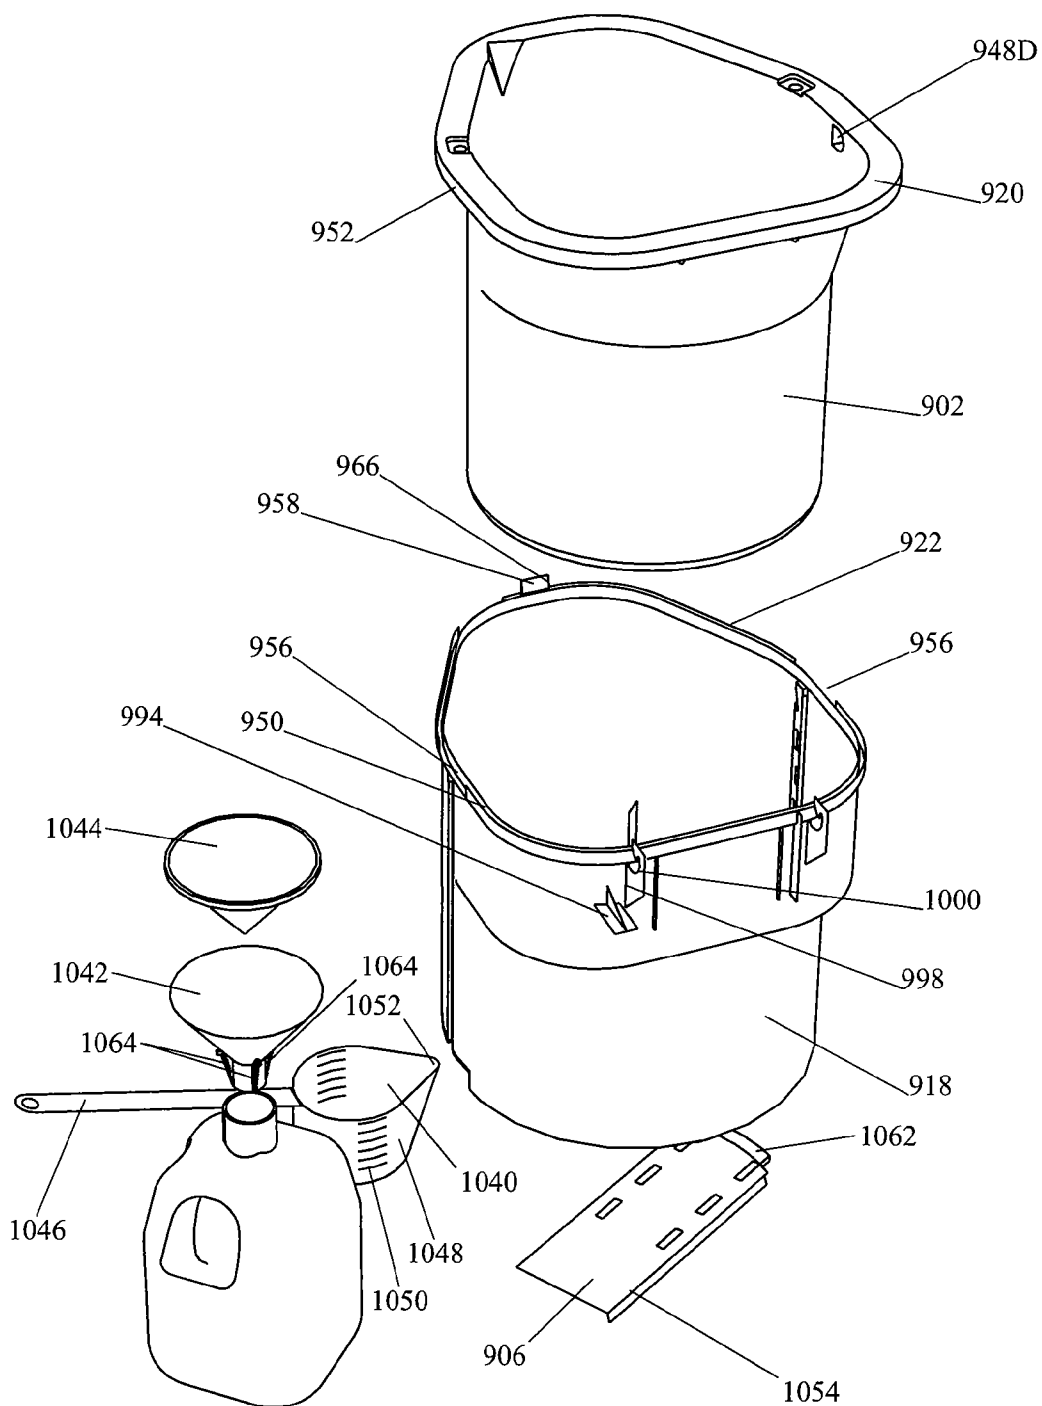


figure 99B - lower enlarged

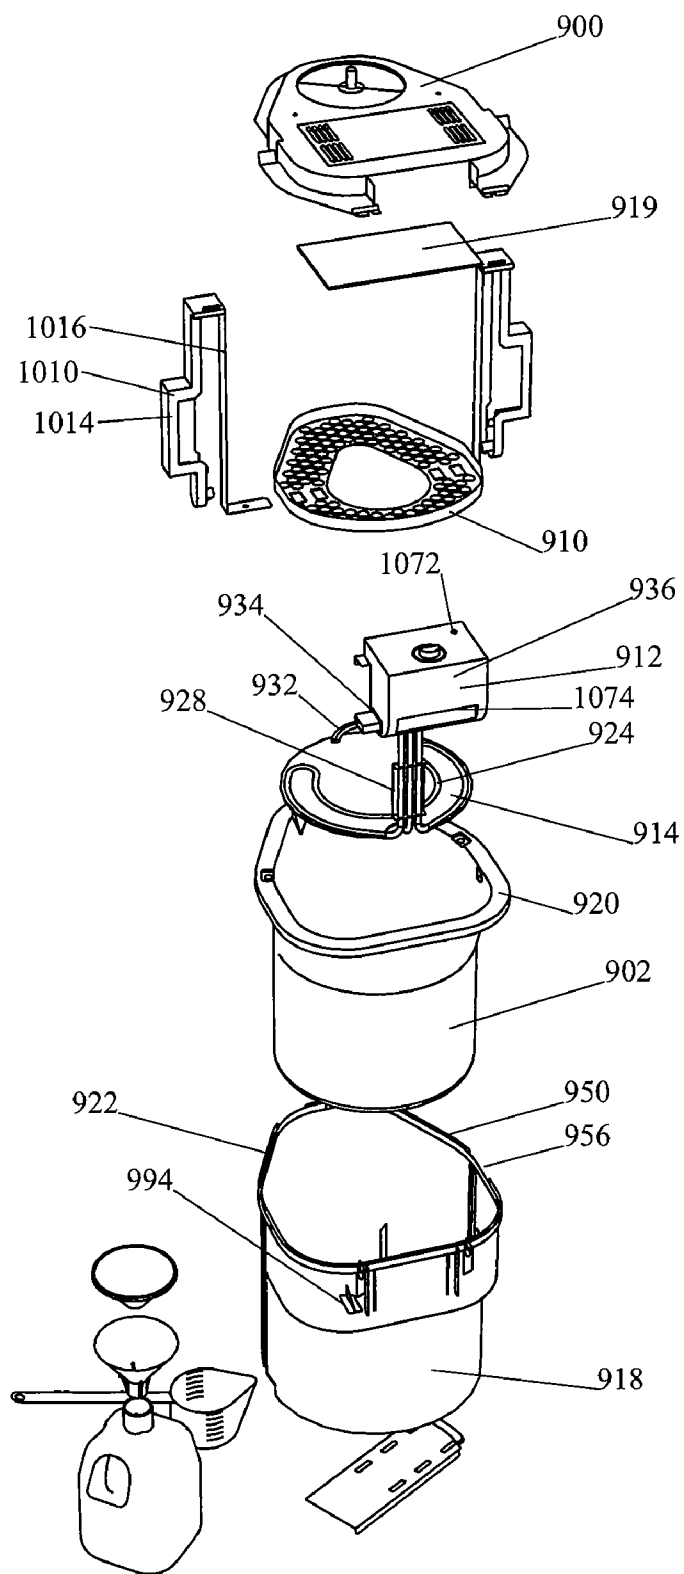


figure 99C

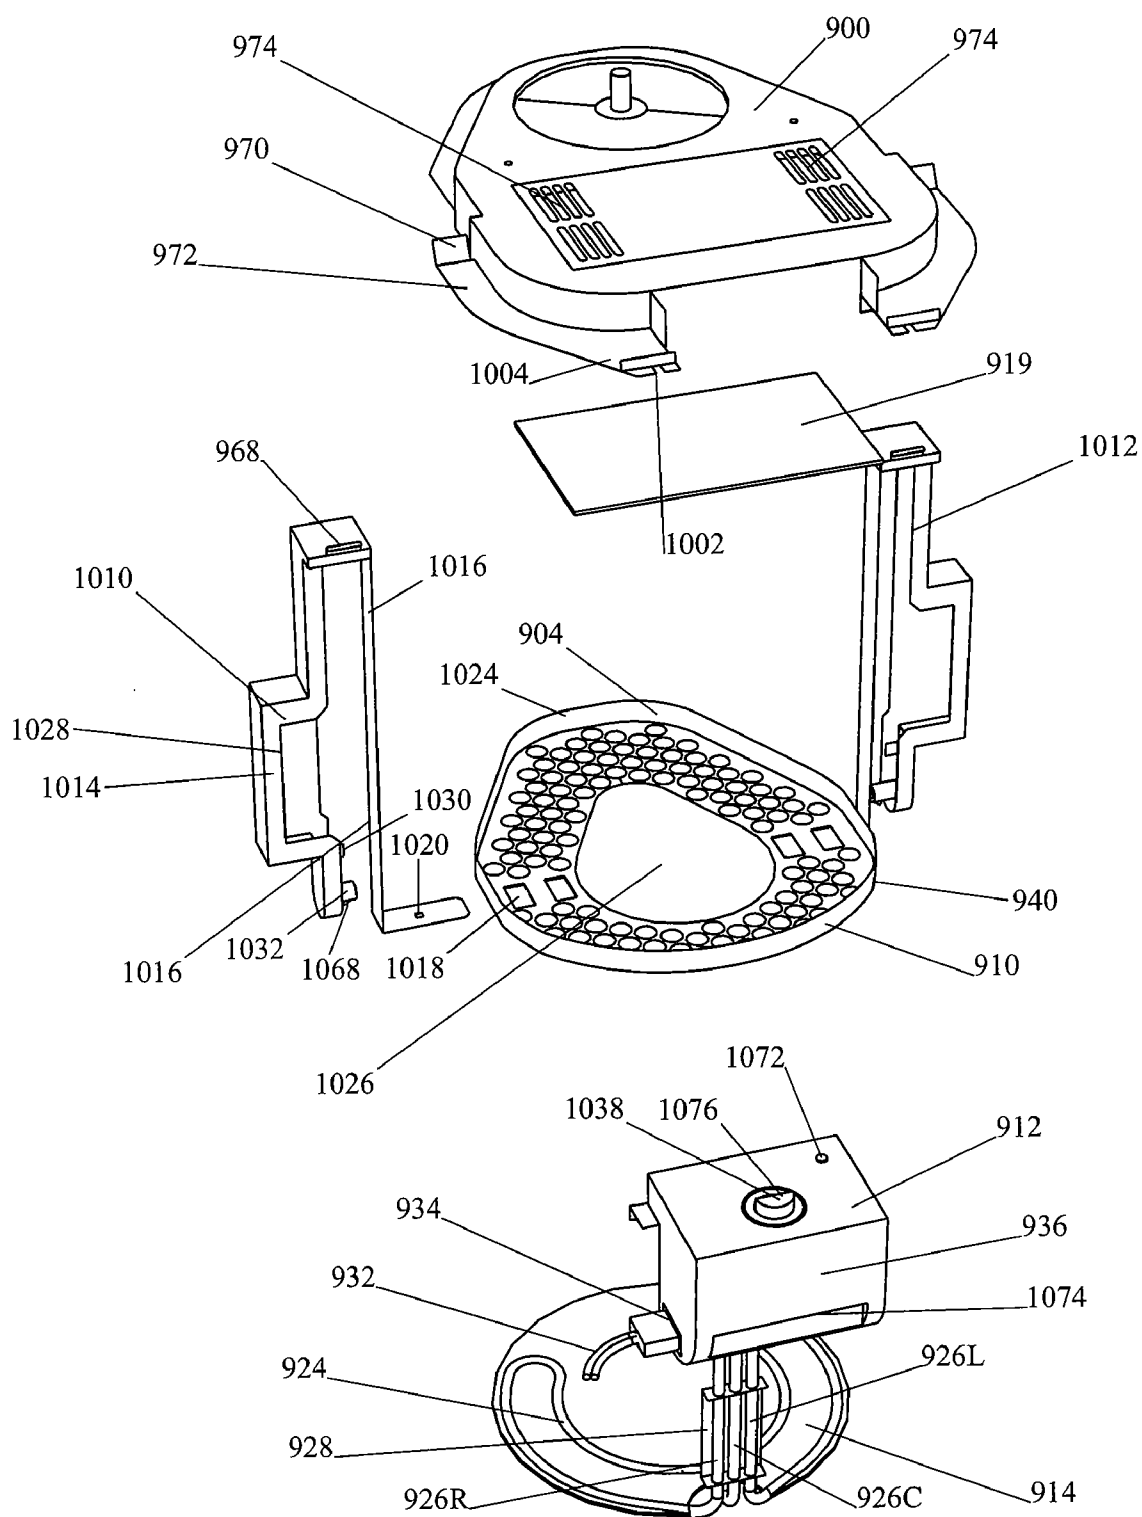


figure 99D

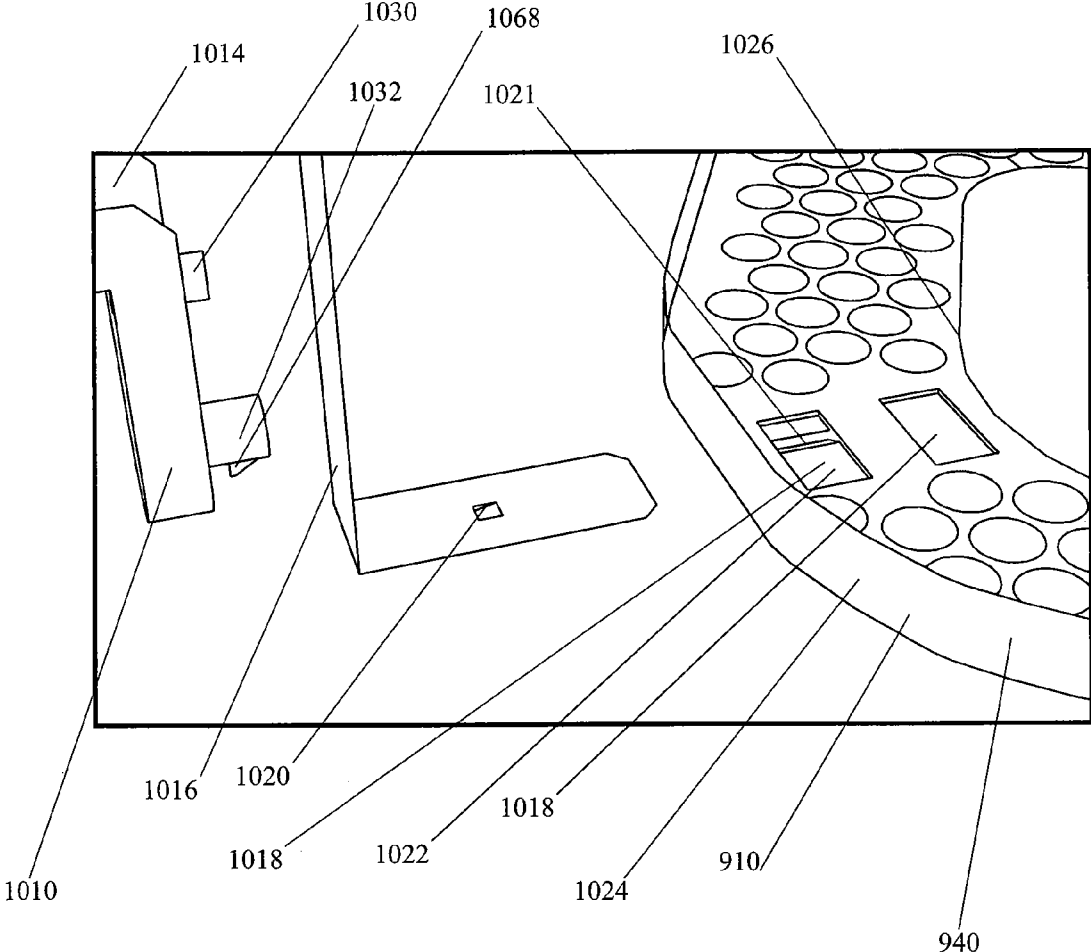


figure 99E

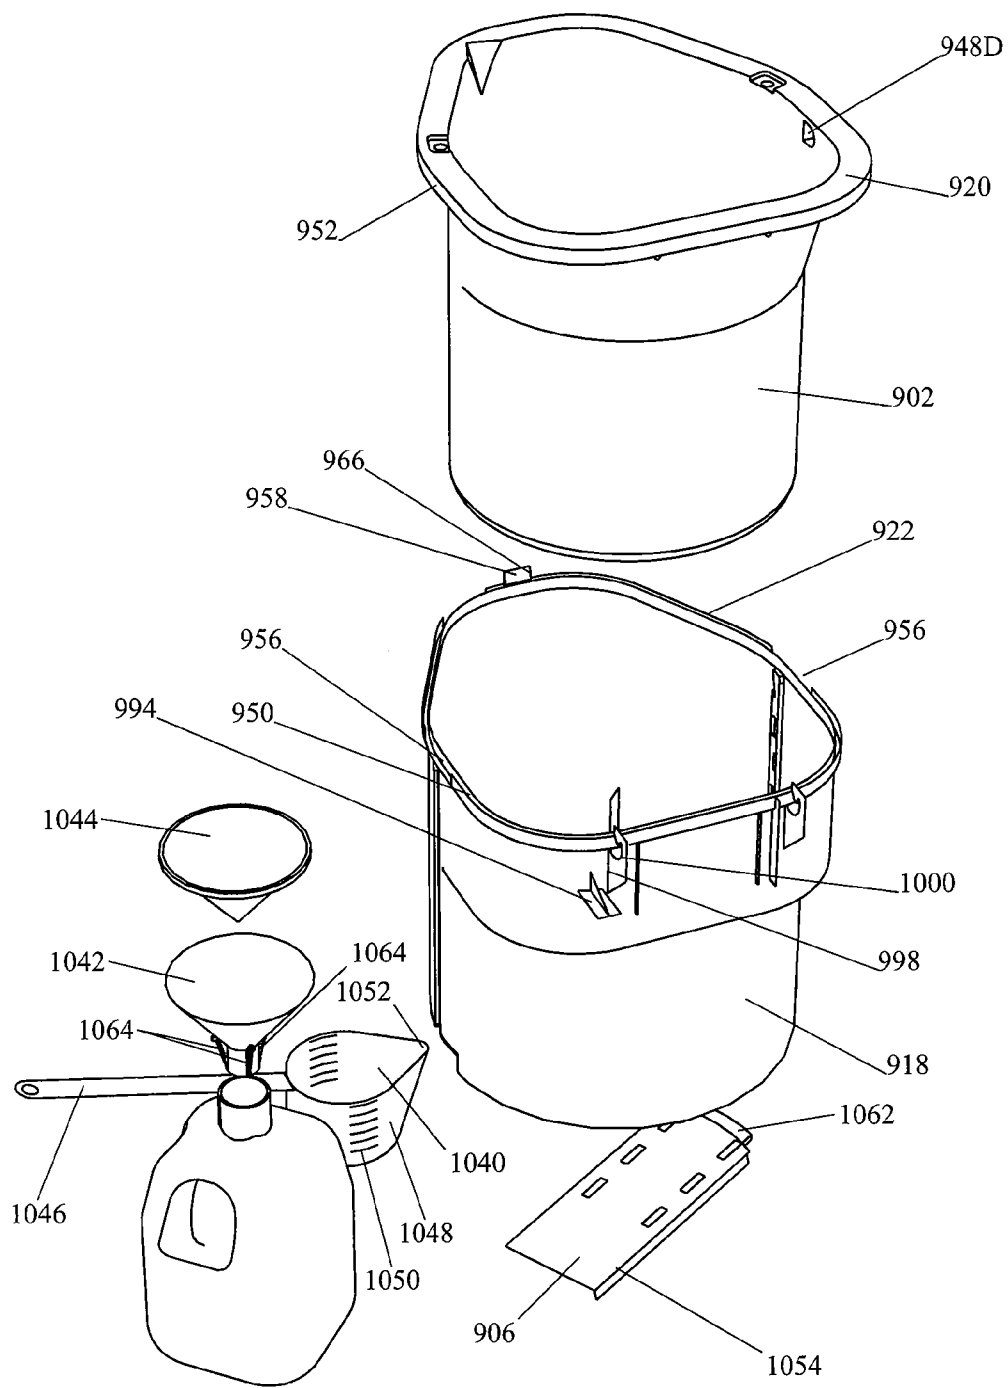
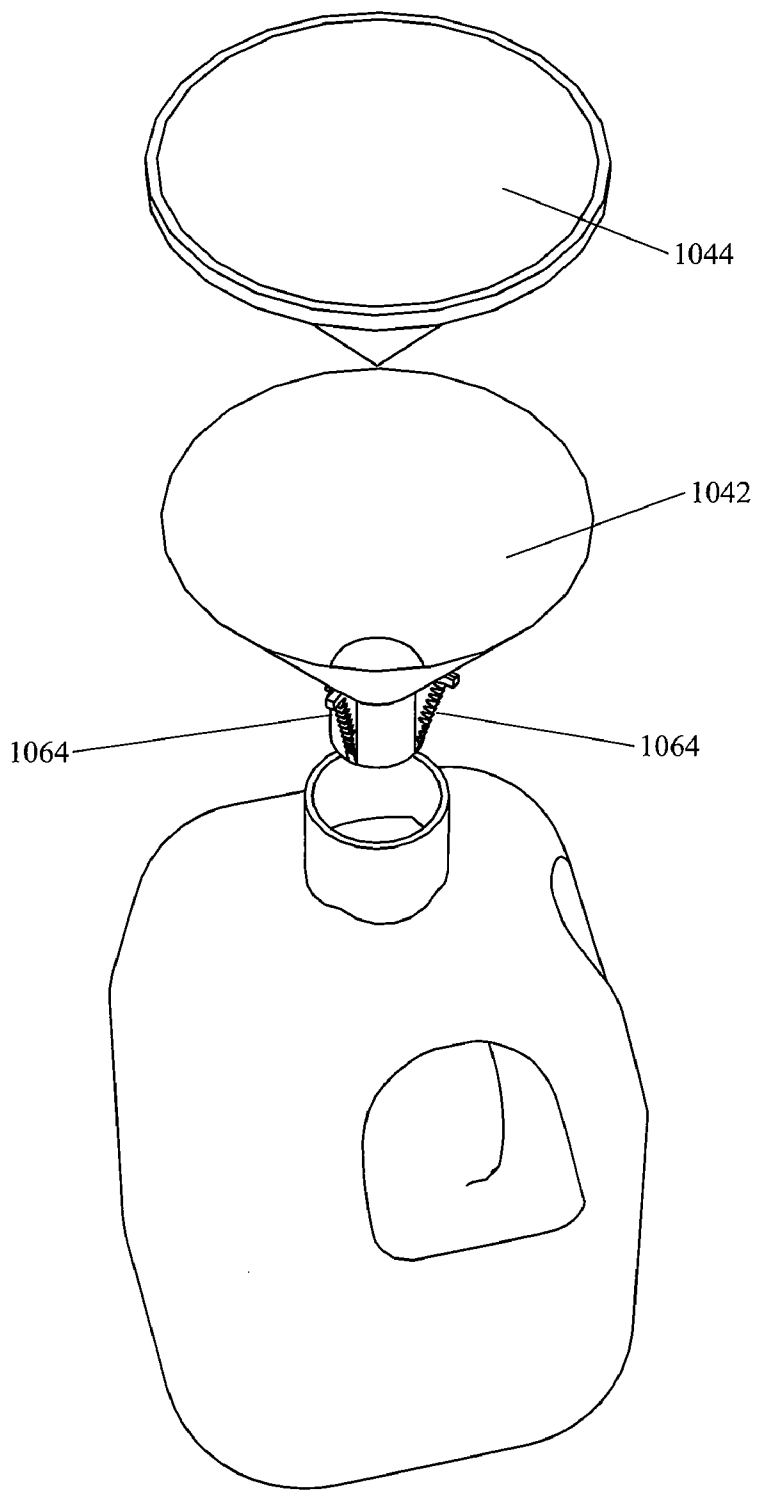
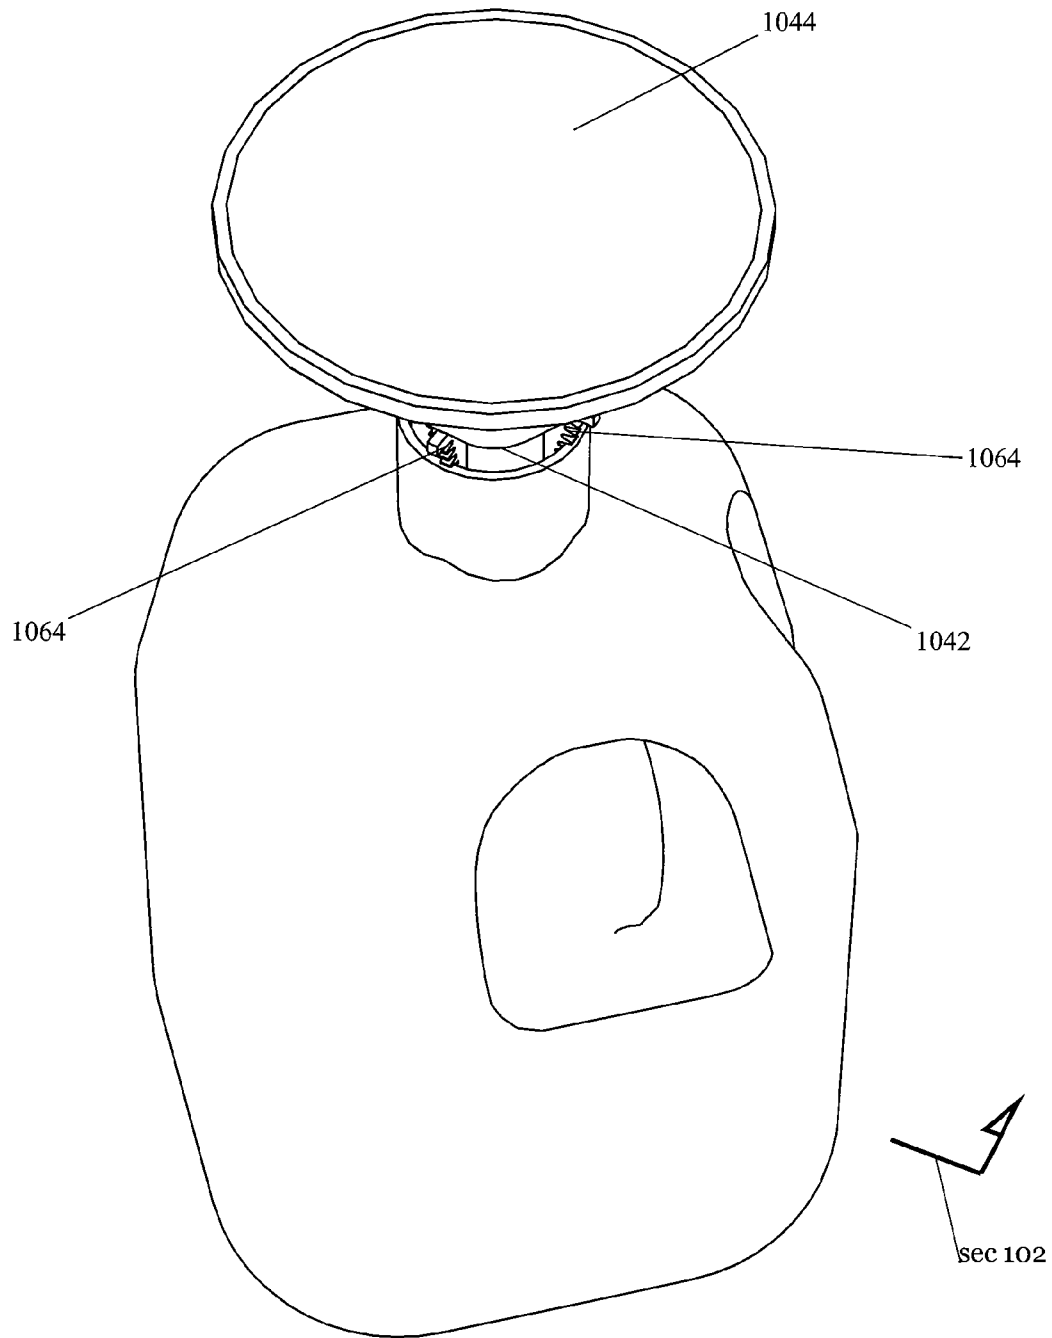


figure 99F



**figure 100**





**figure 101**

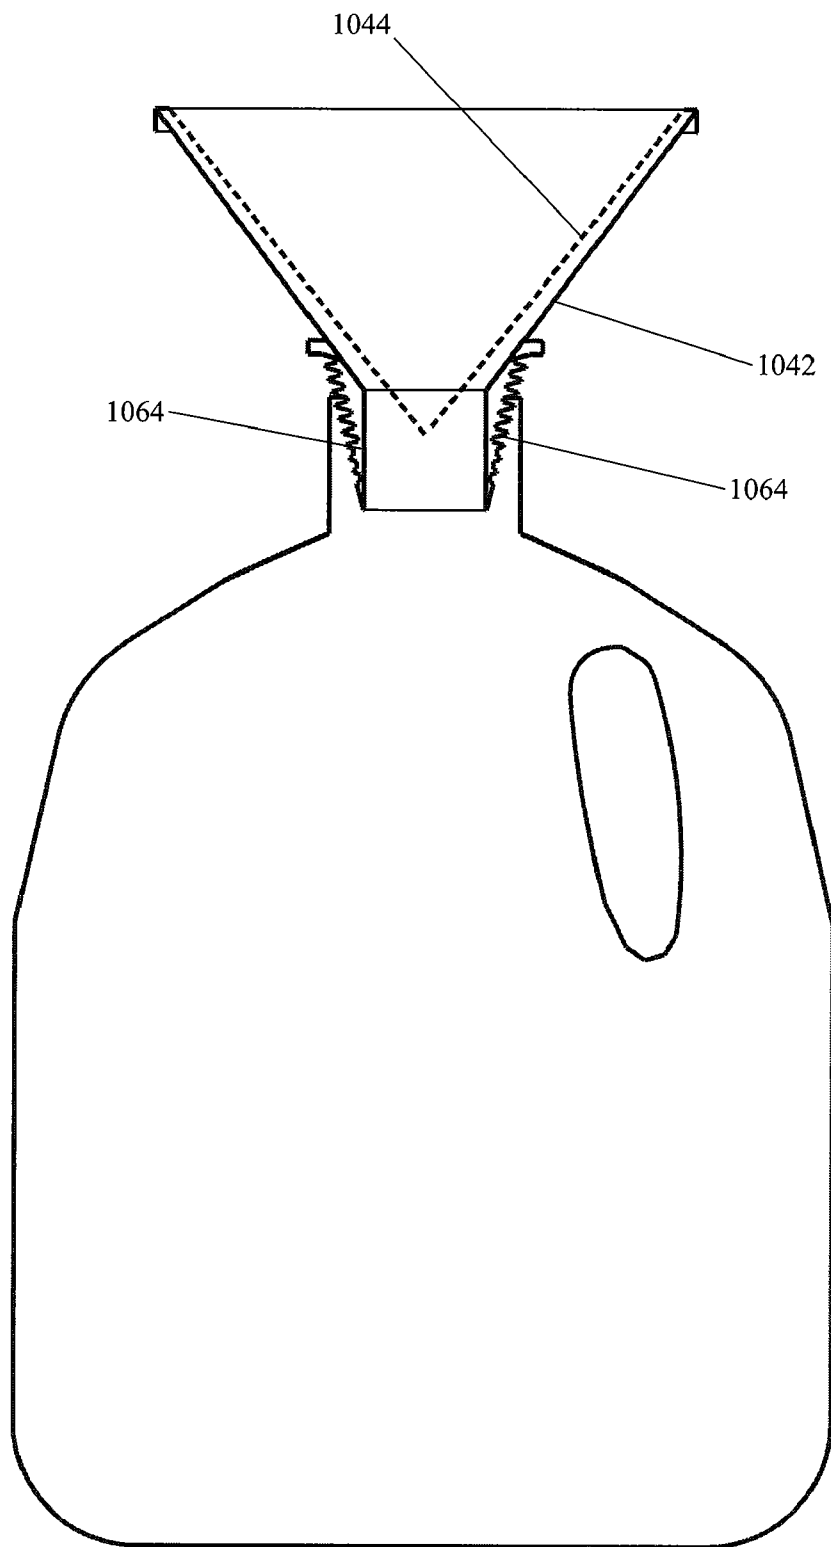


figure 102

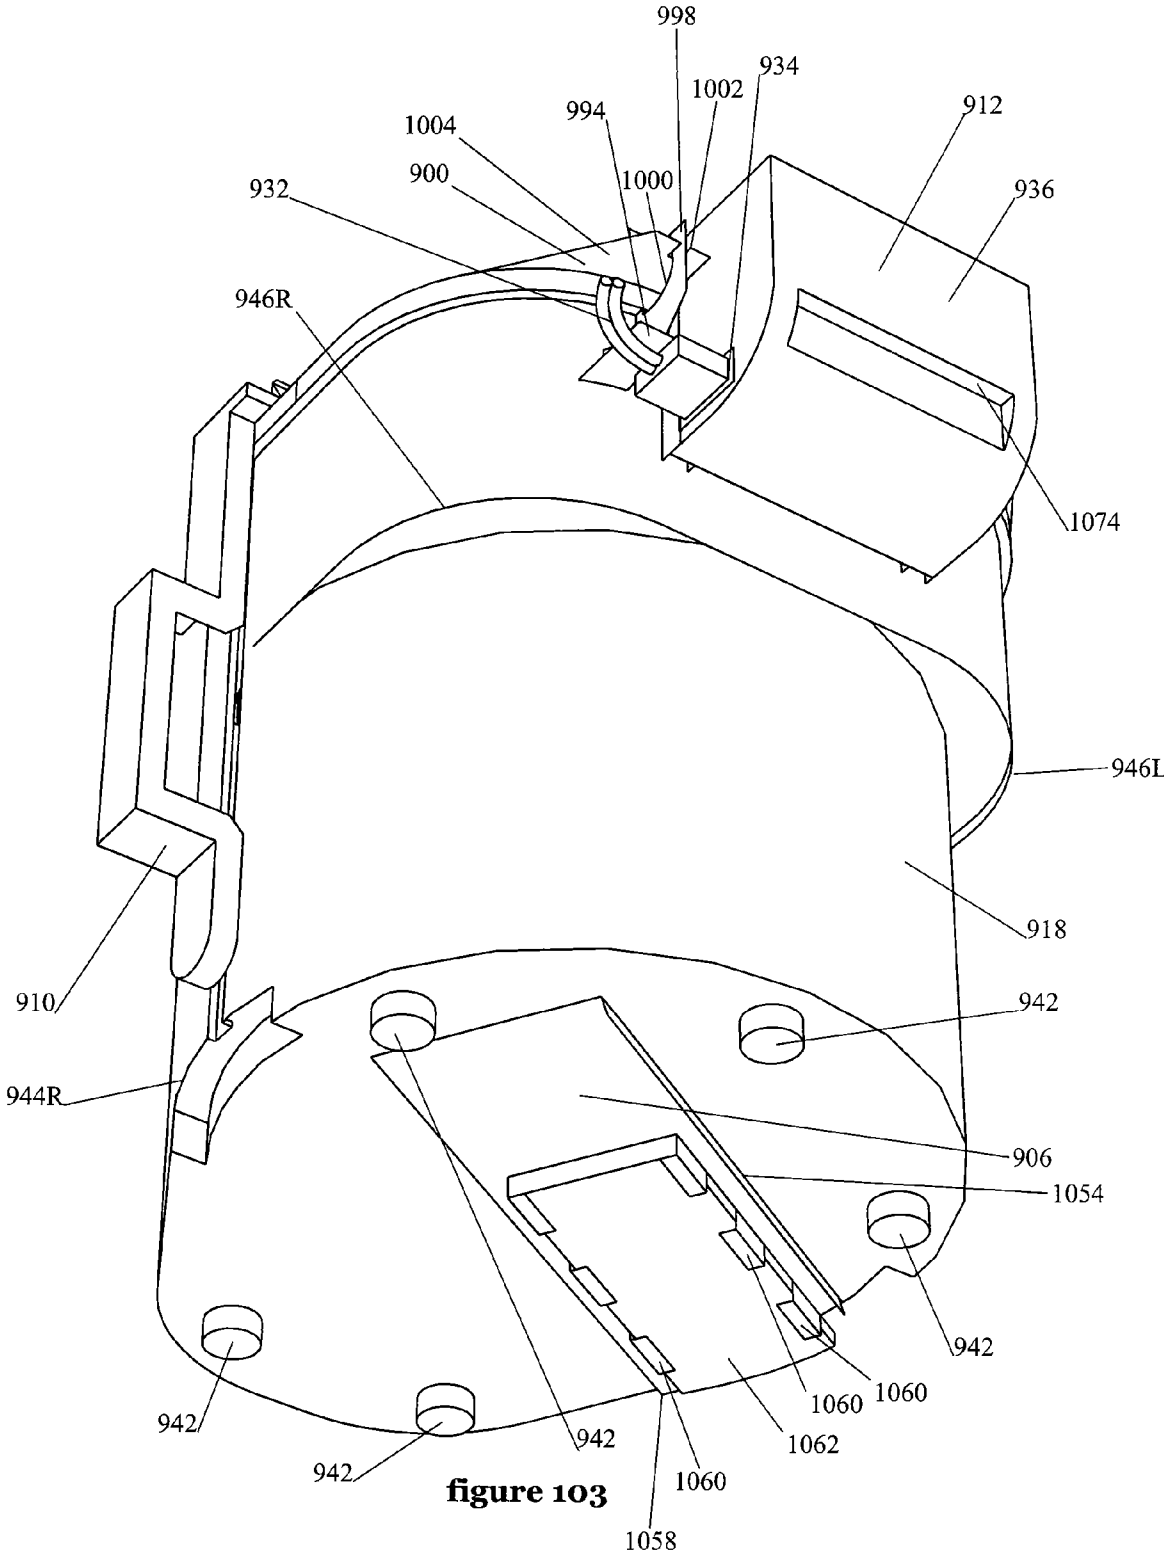
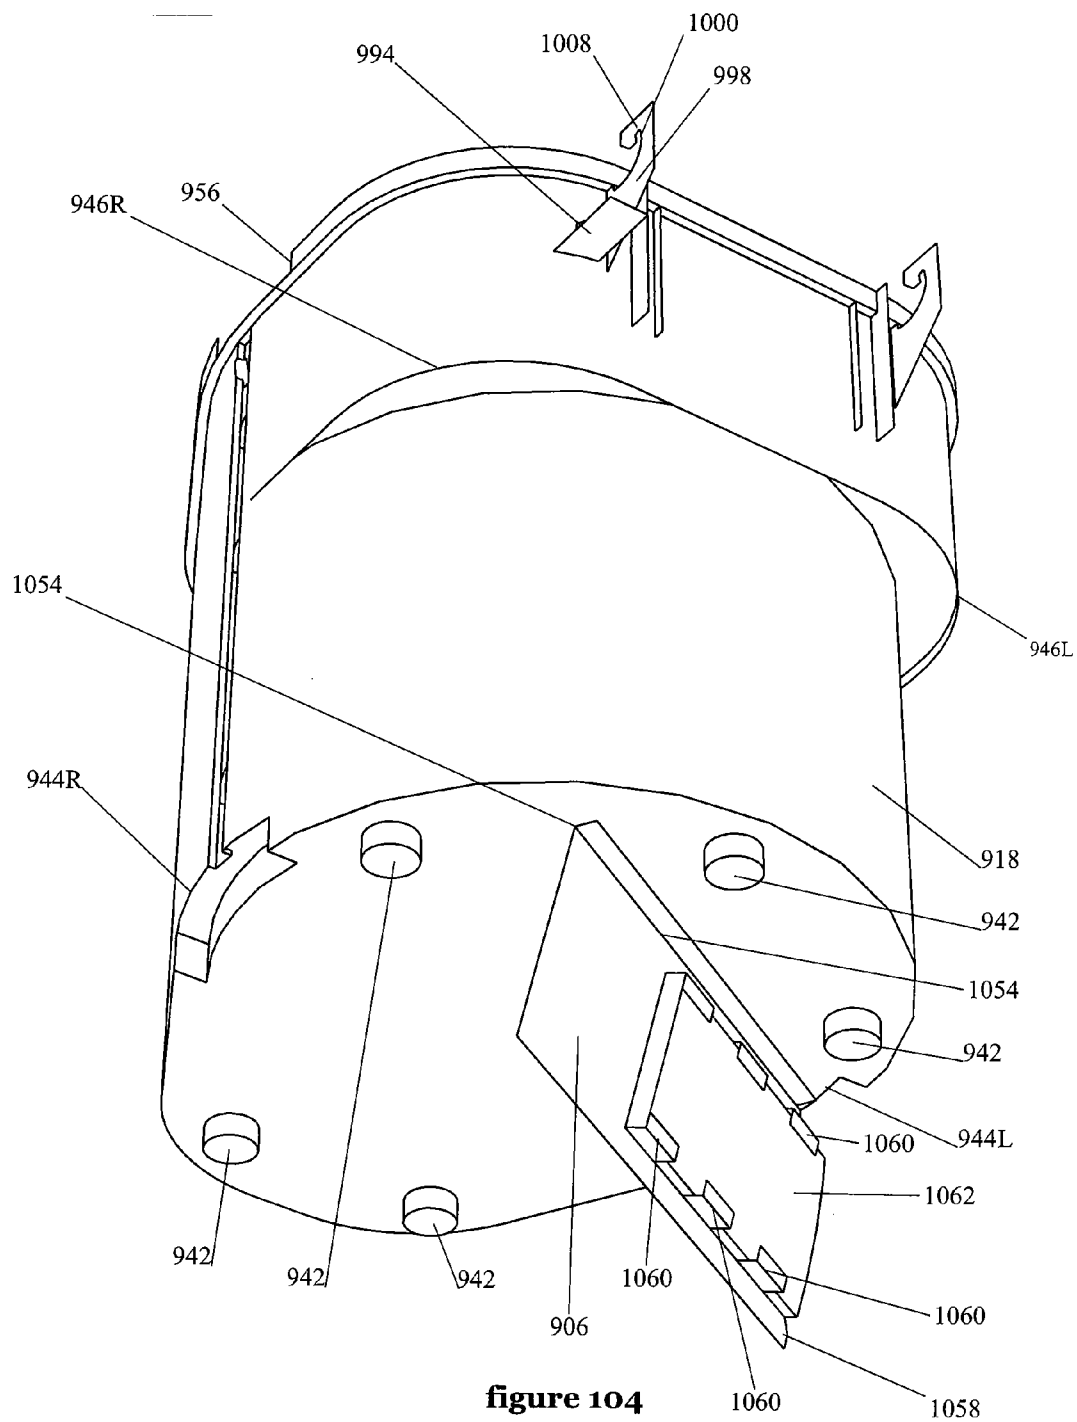


figure 103



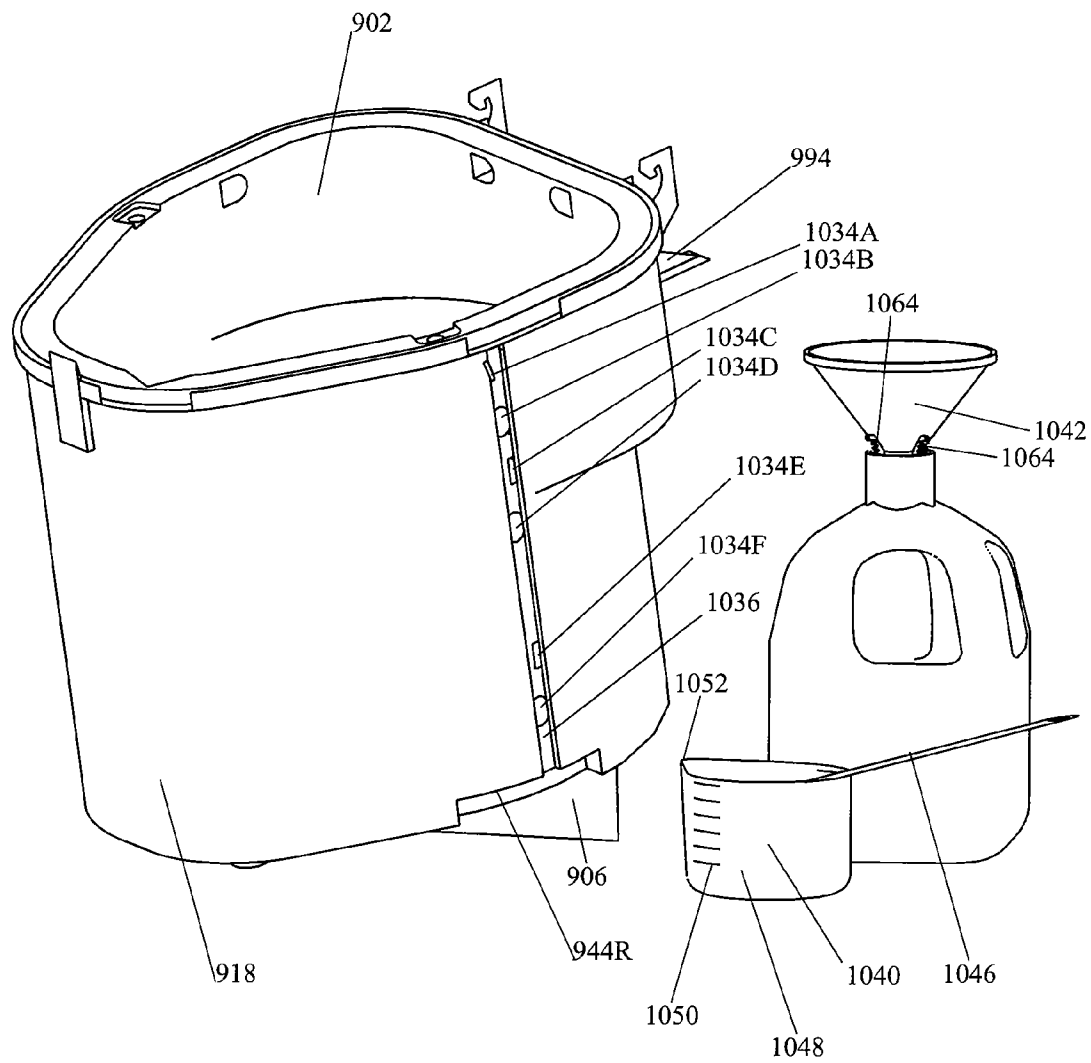
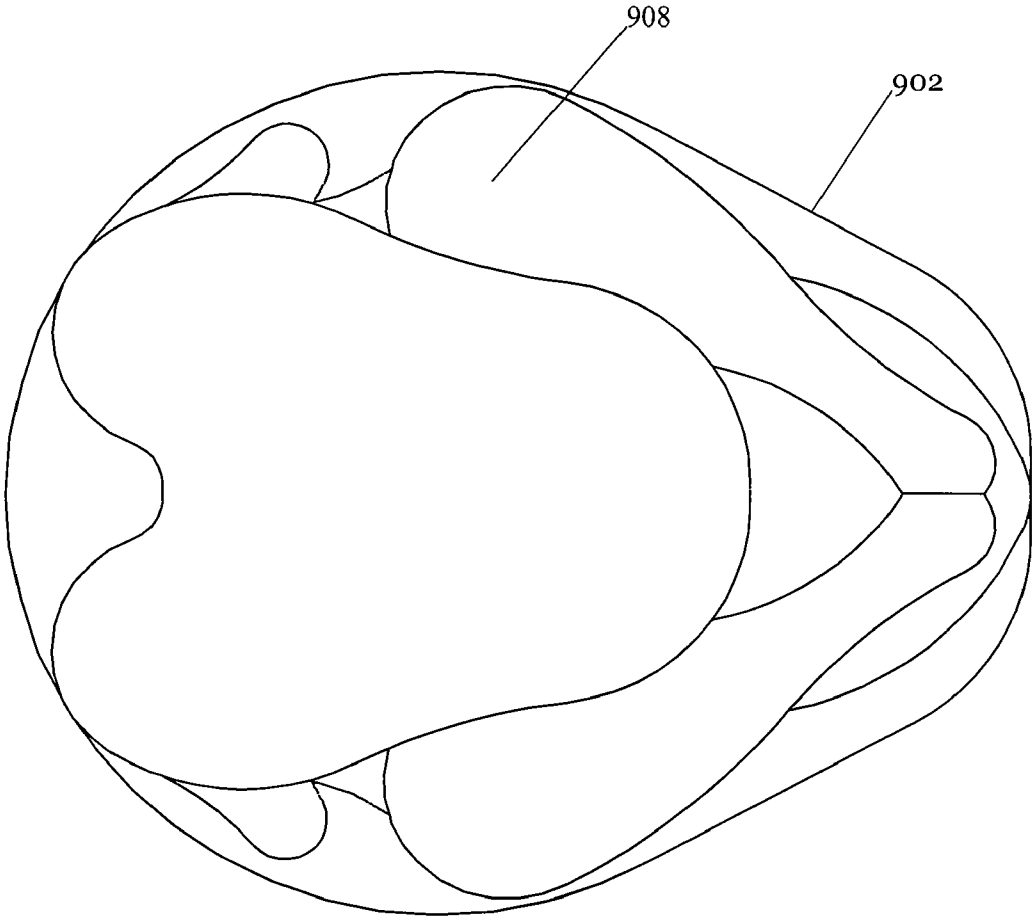


figure 105



**figure 106**

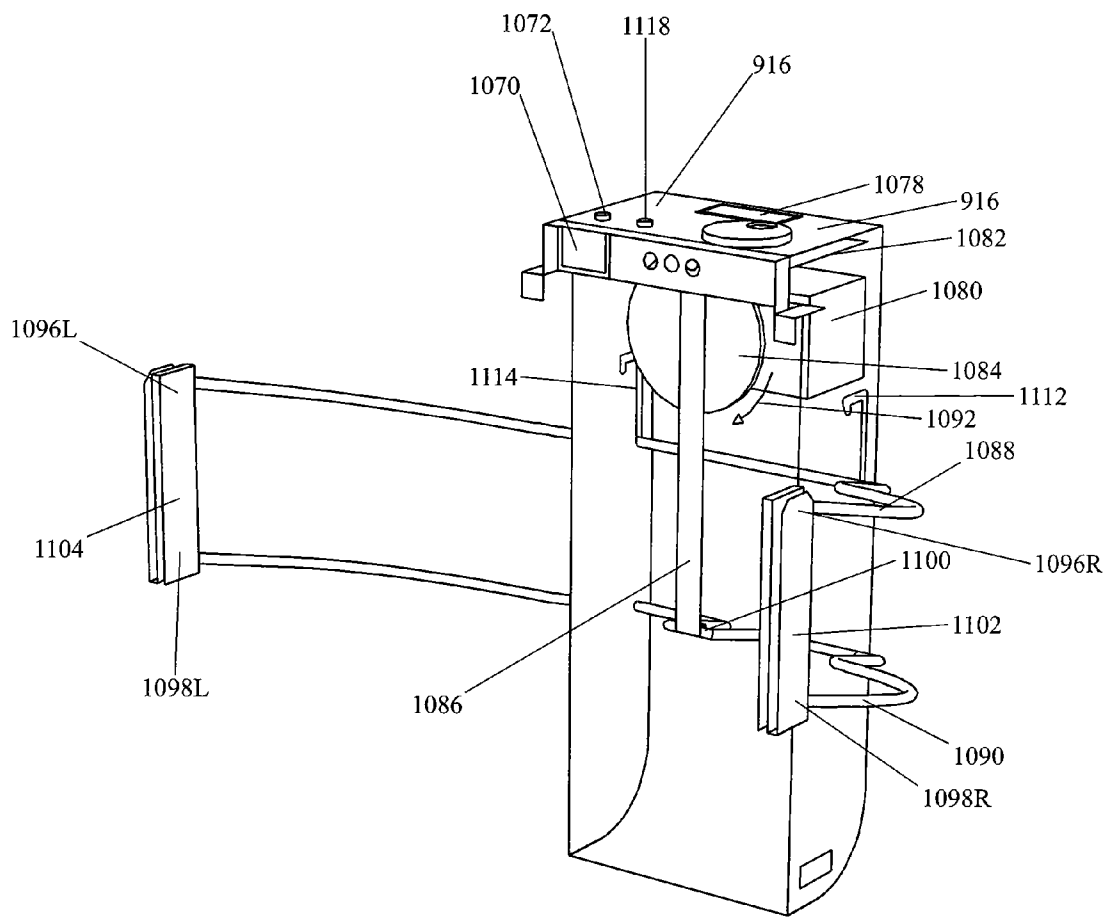


figure 107

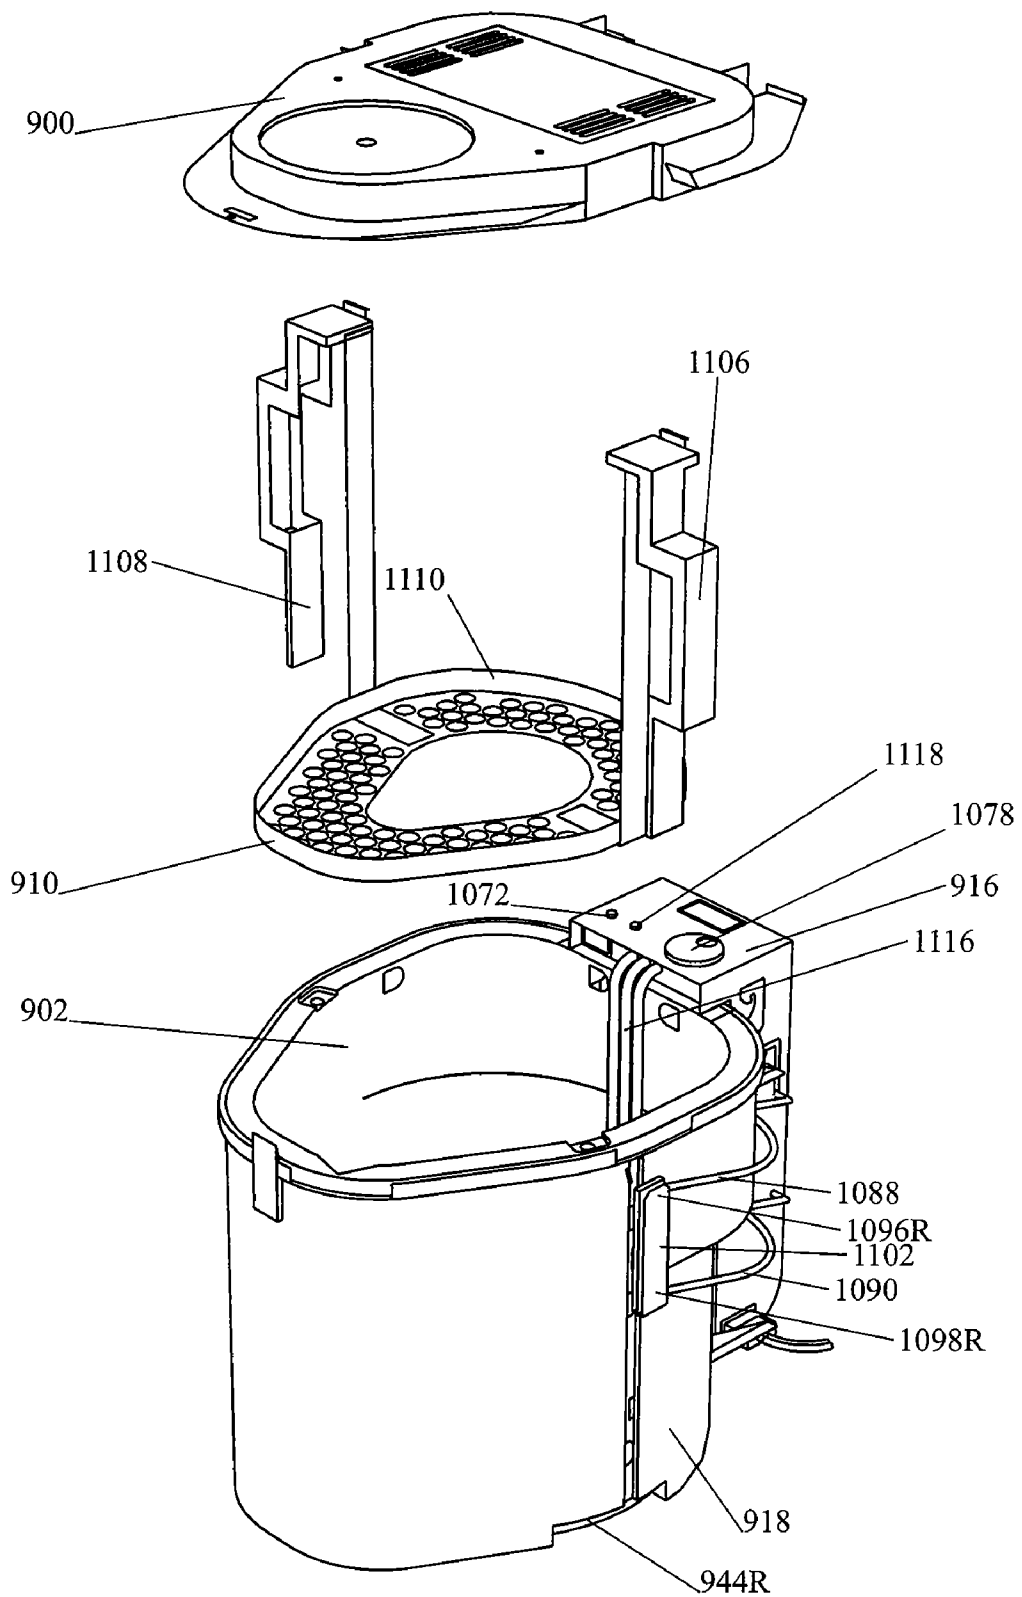


figure 108



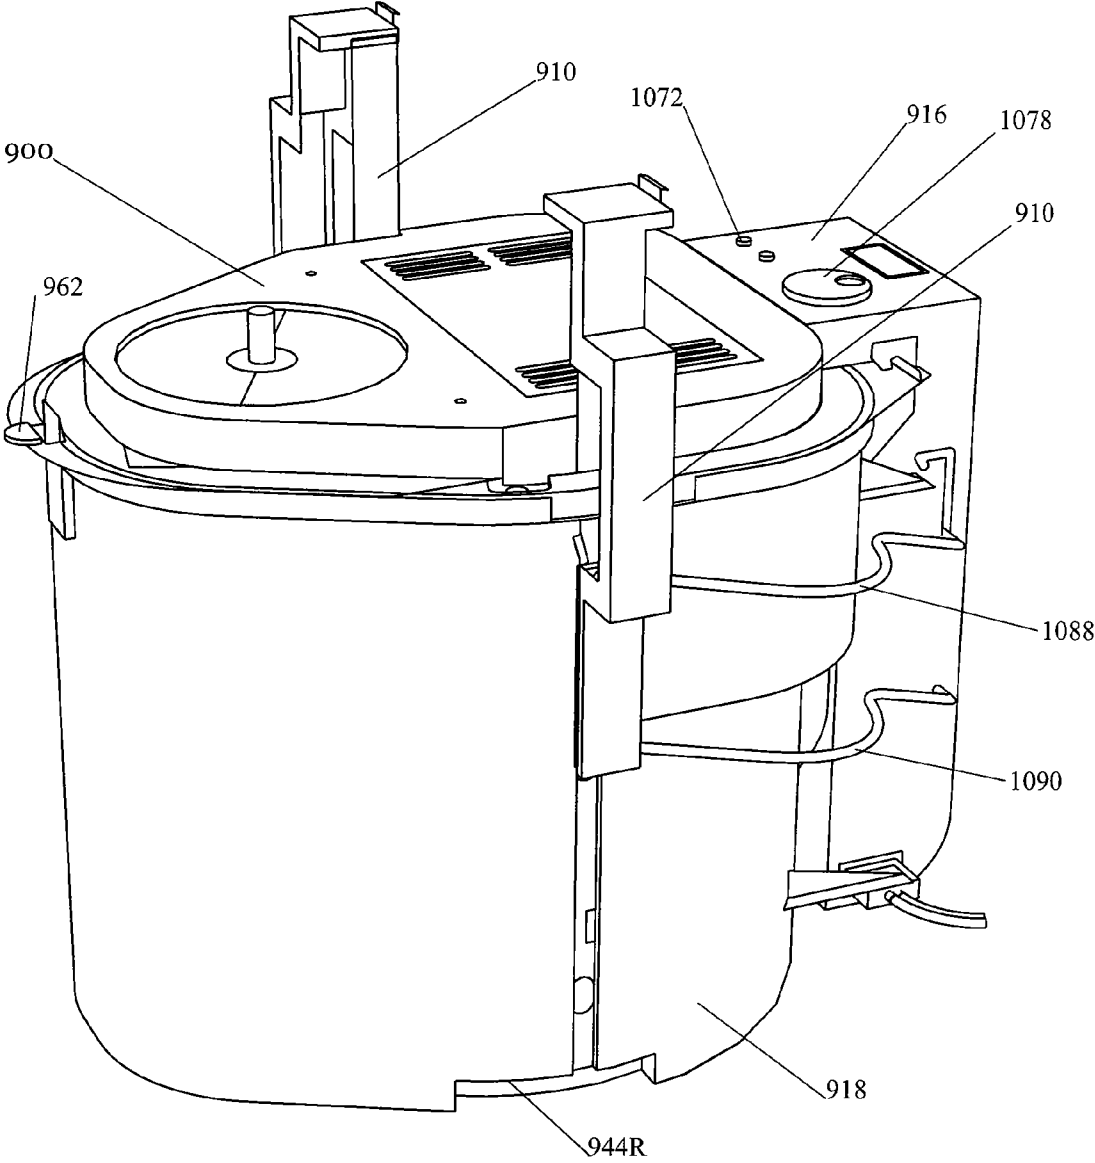
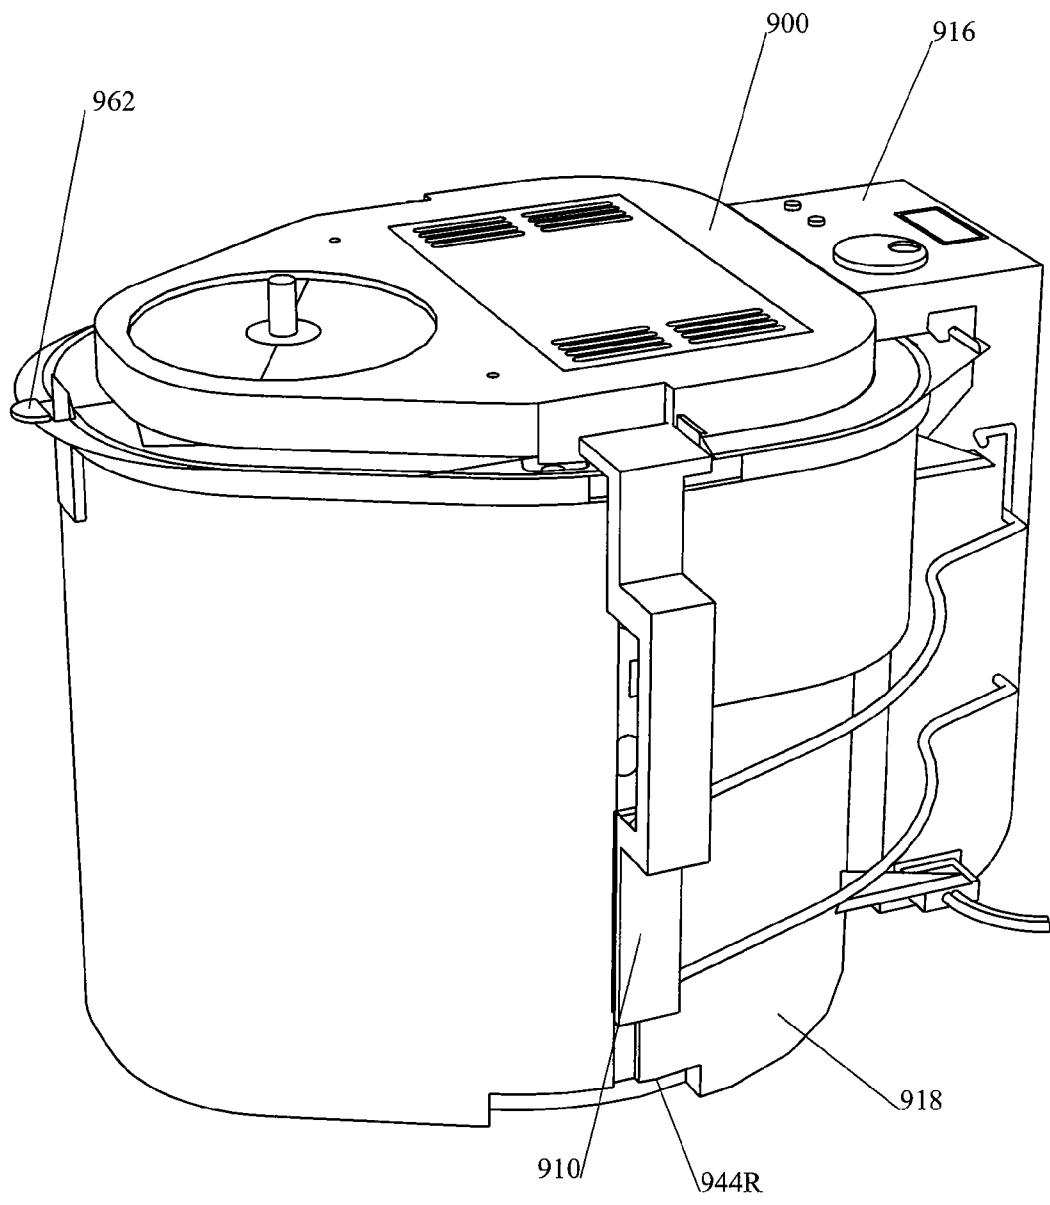


figure 109



**figure 110**

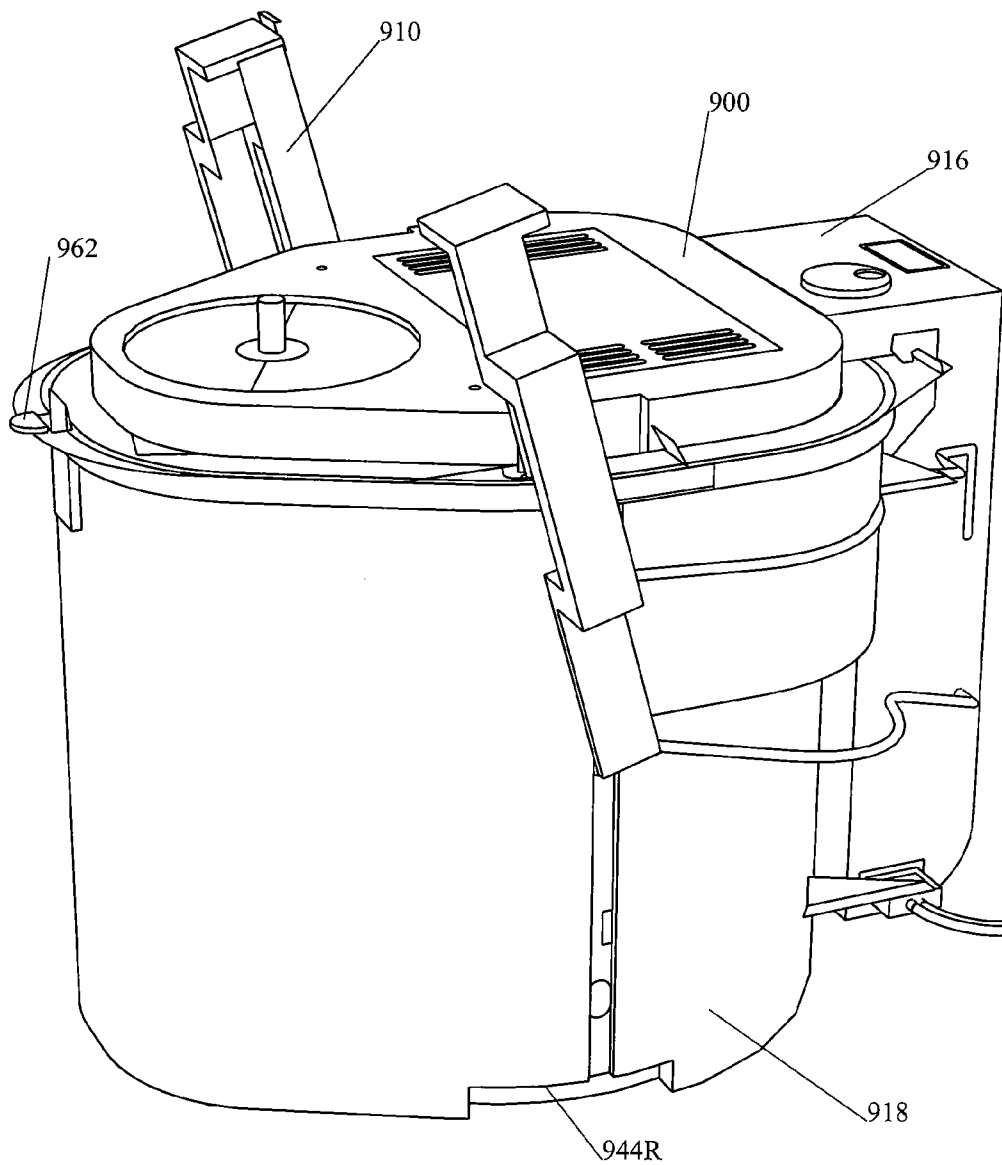


figure 111

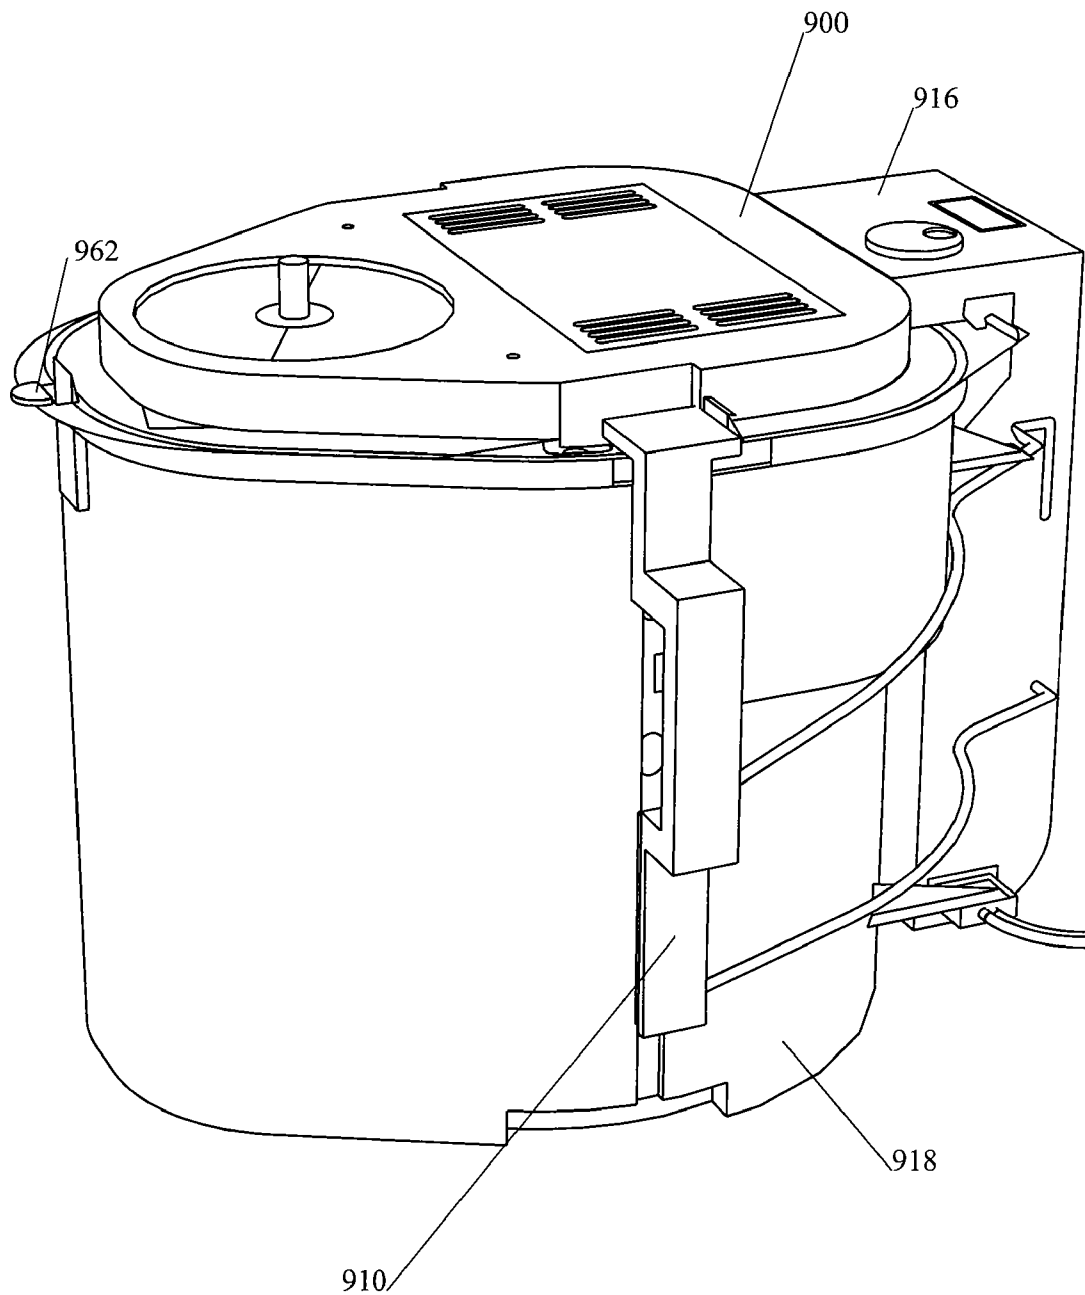


figure 112

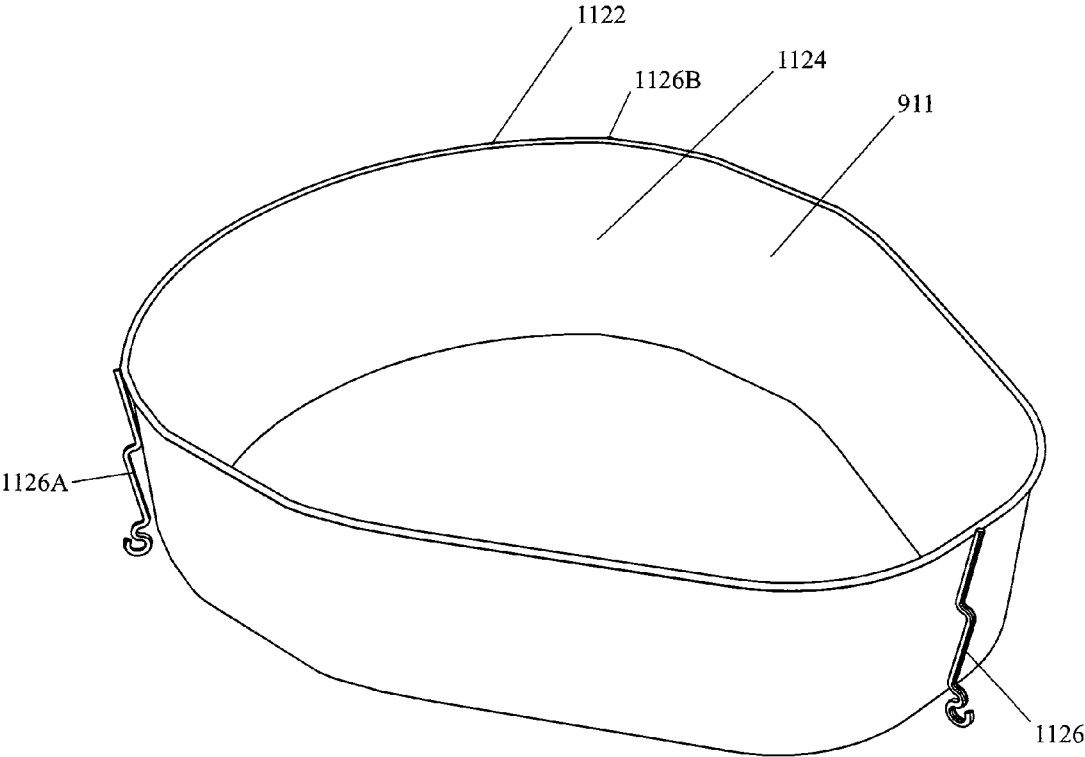


figure 113

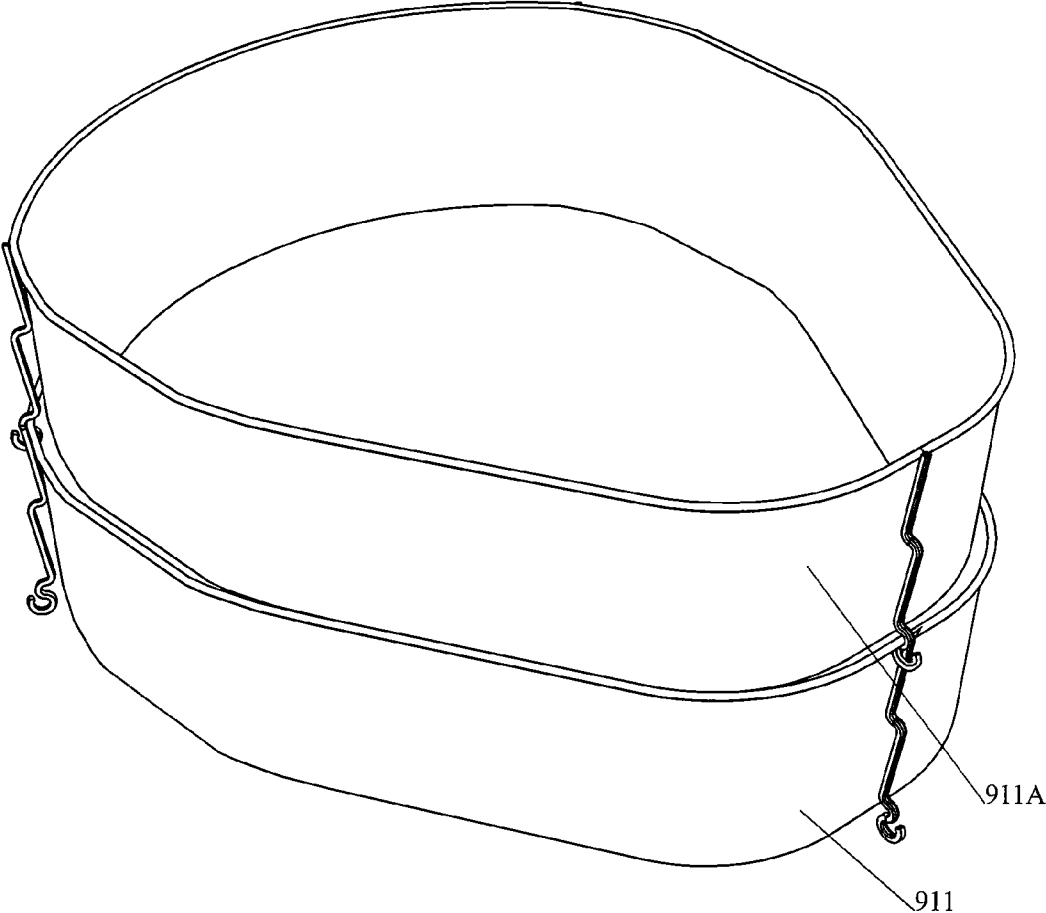


figure 114

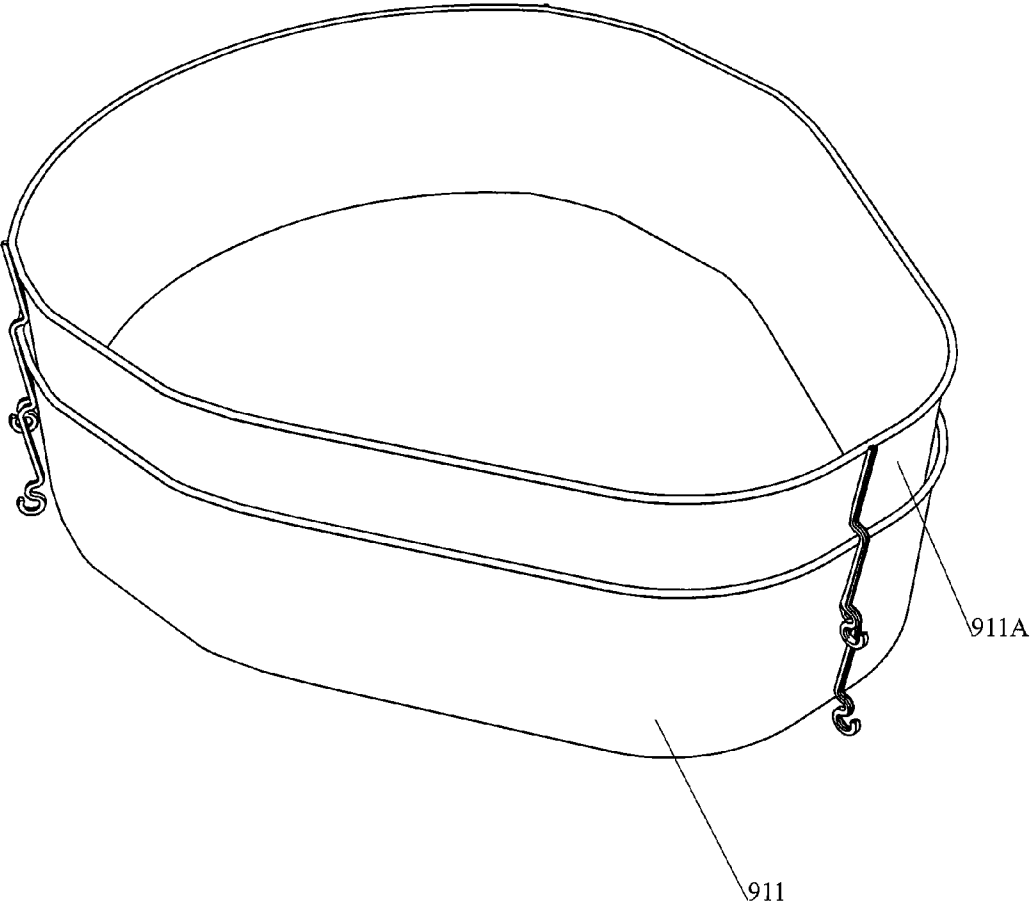


figure 115

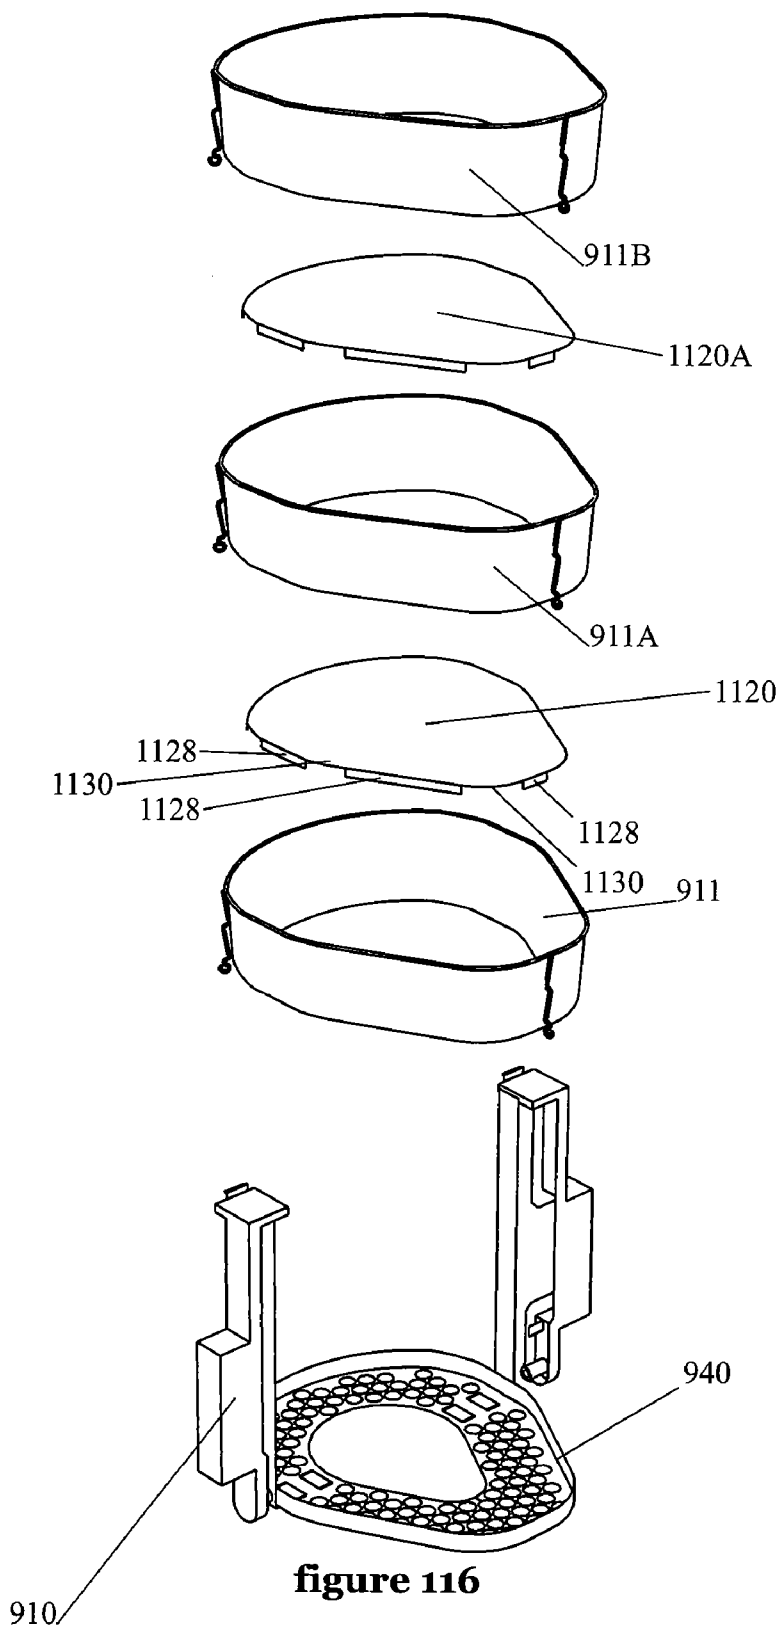


figure 116



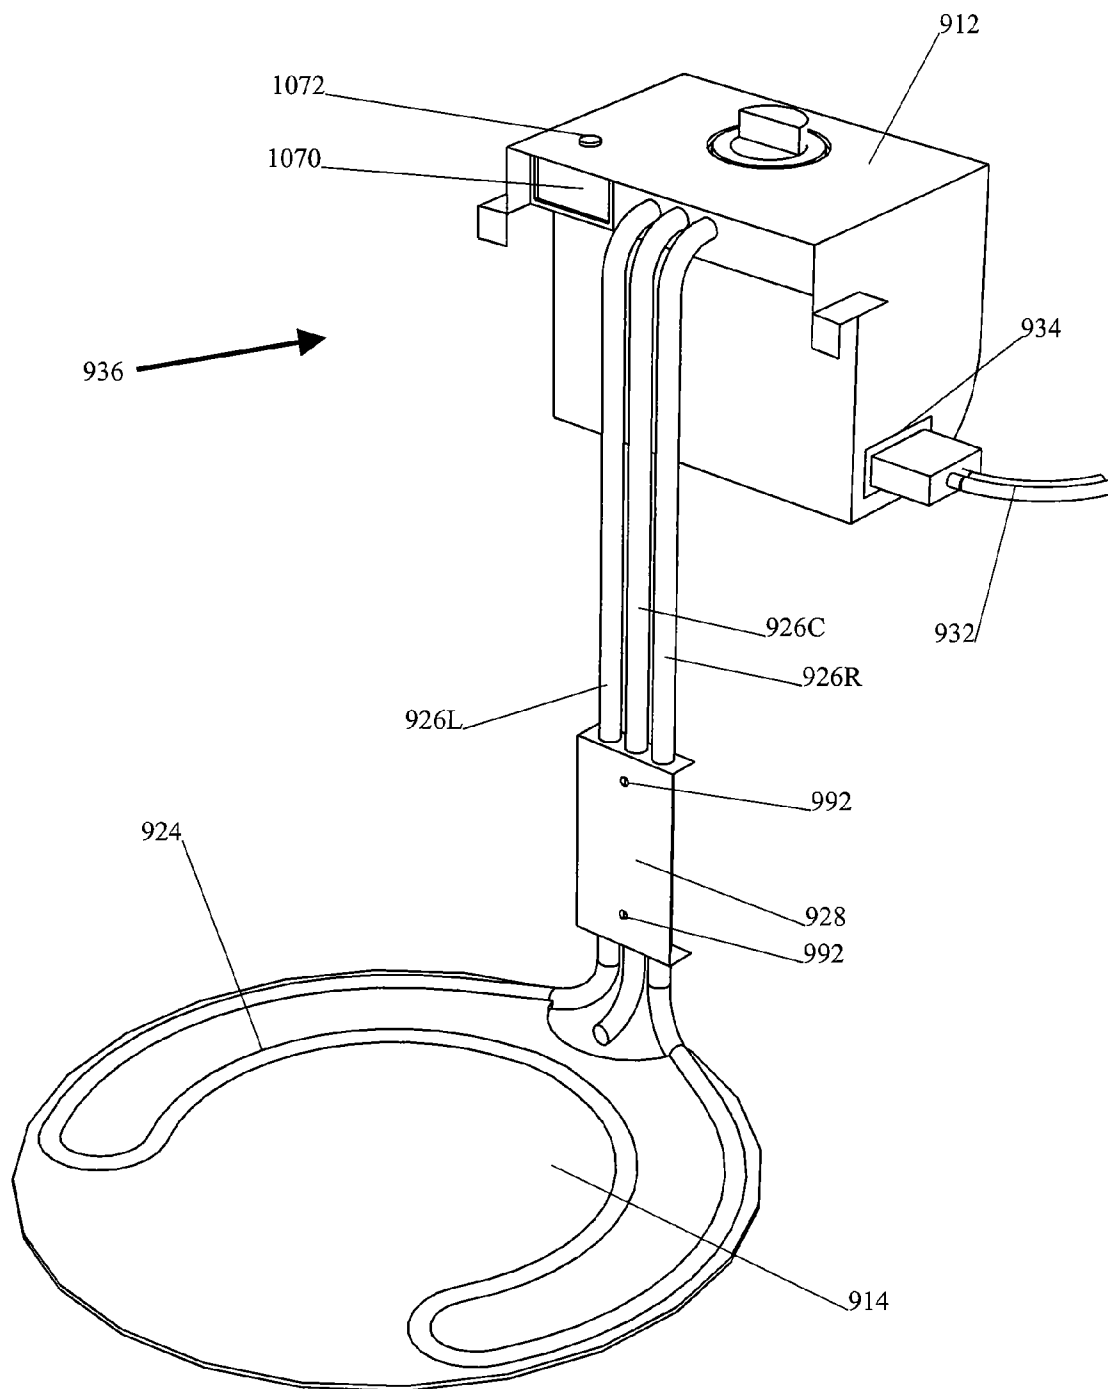


figure 117

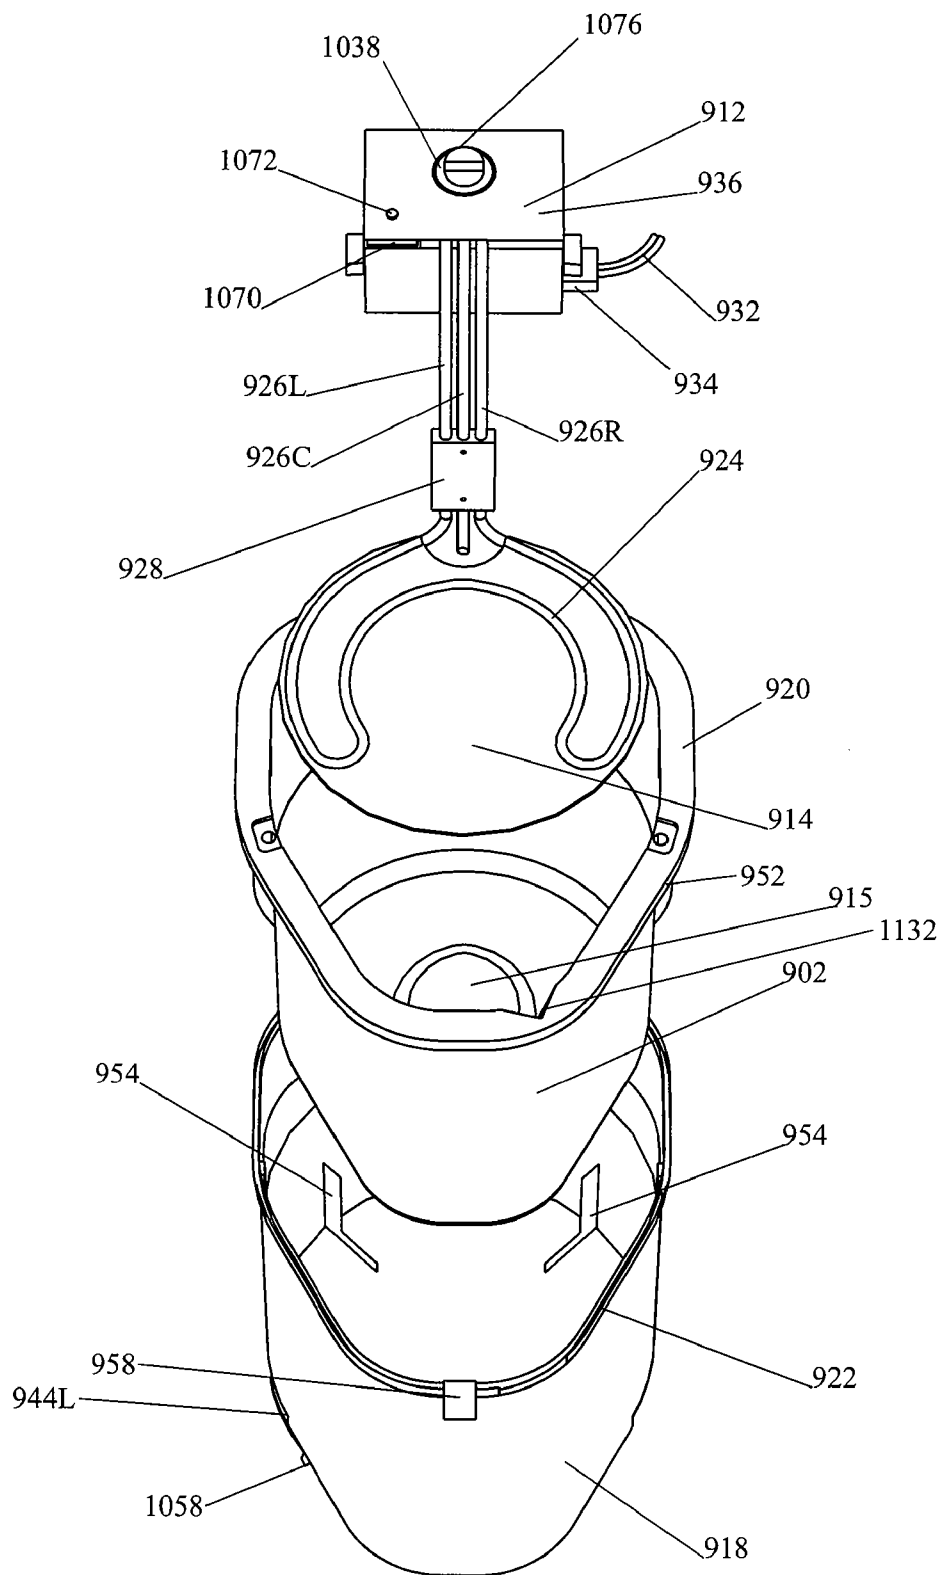
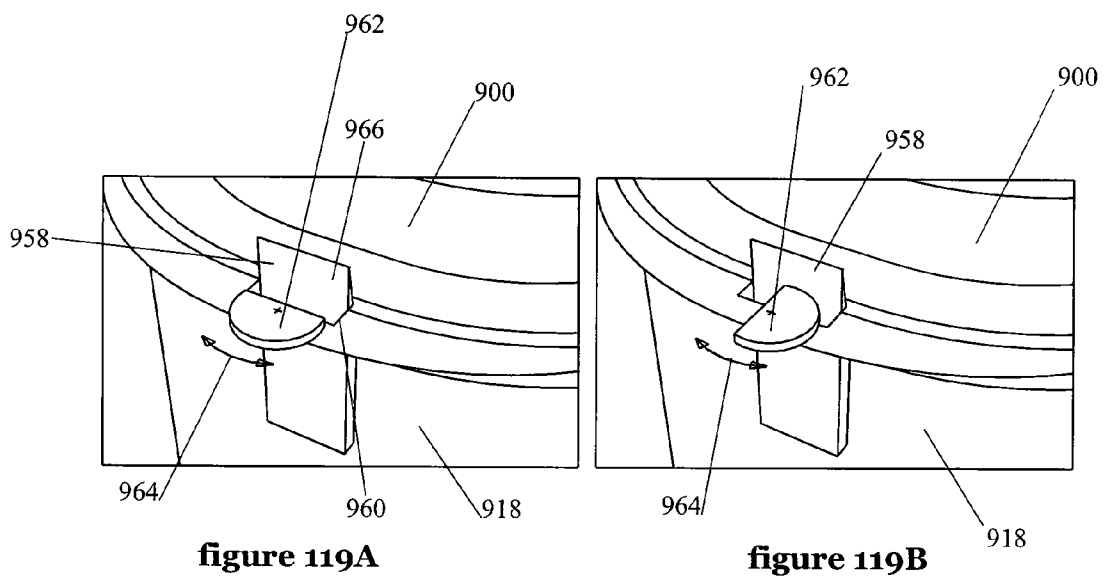


figure 118



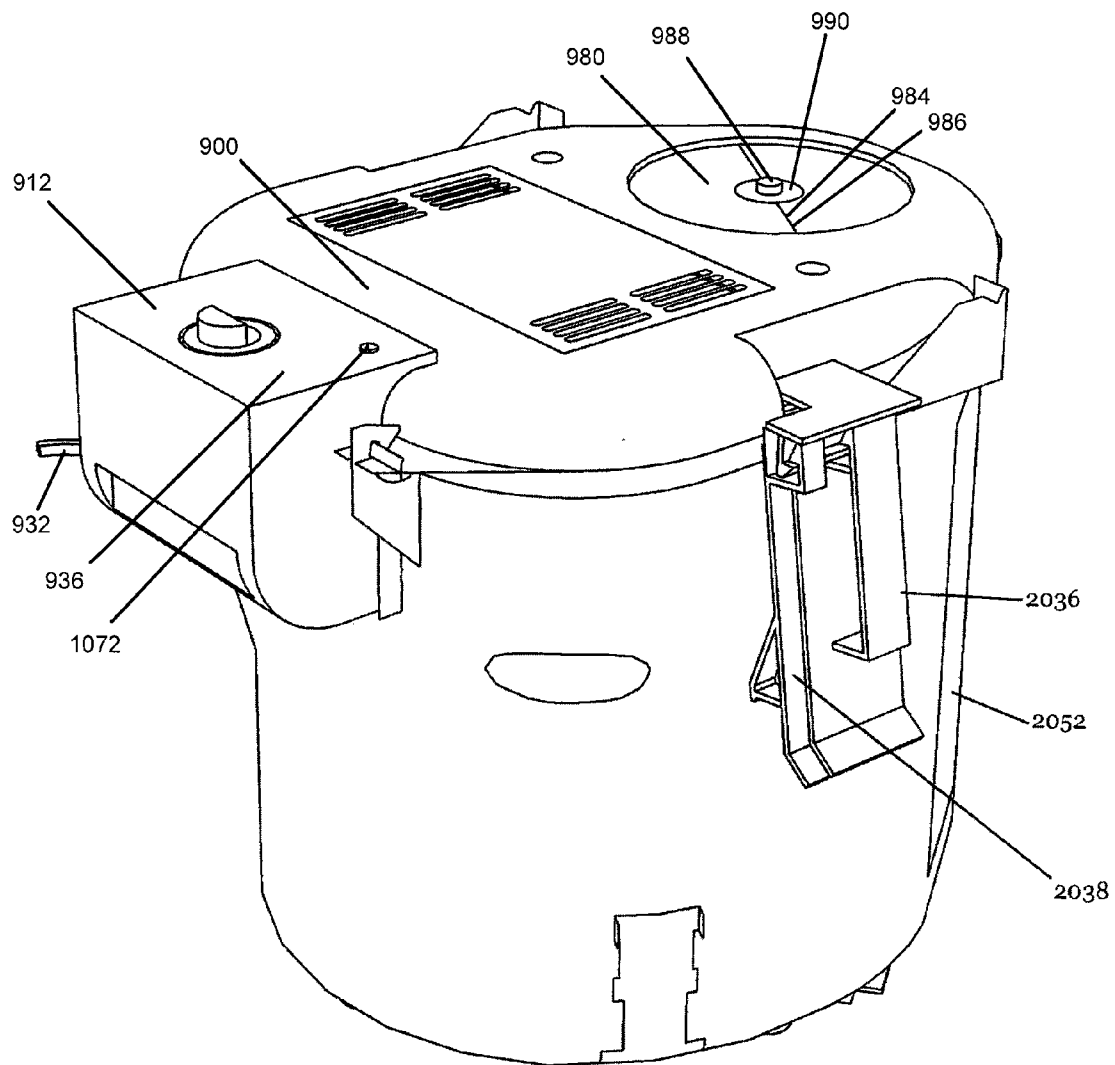
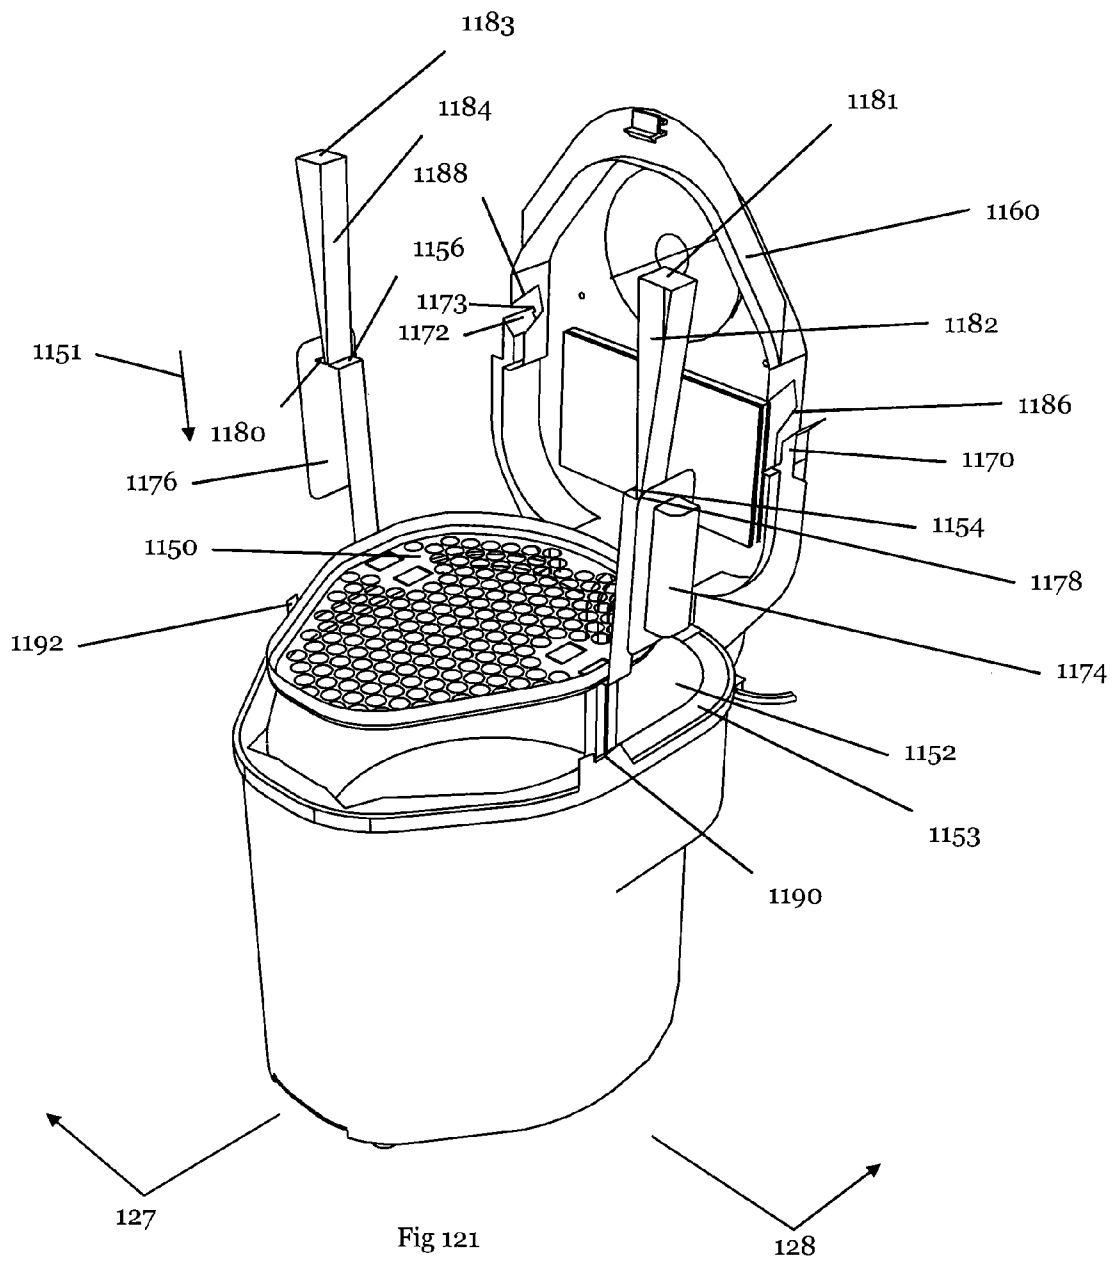


Fig 120



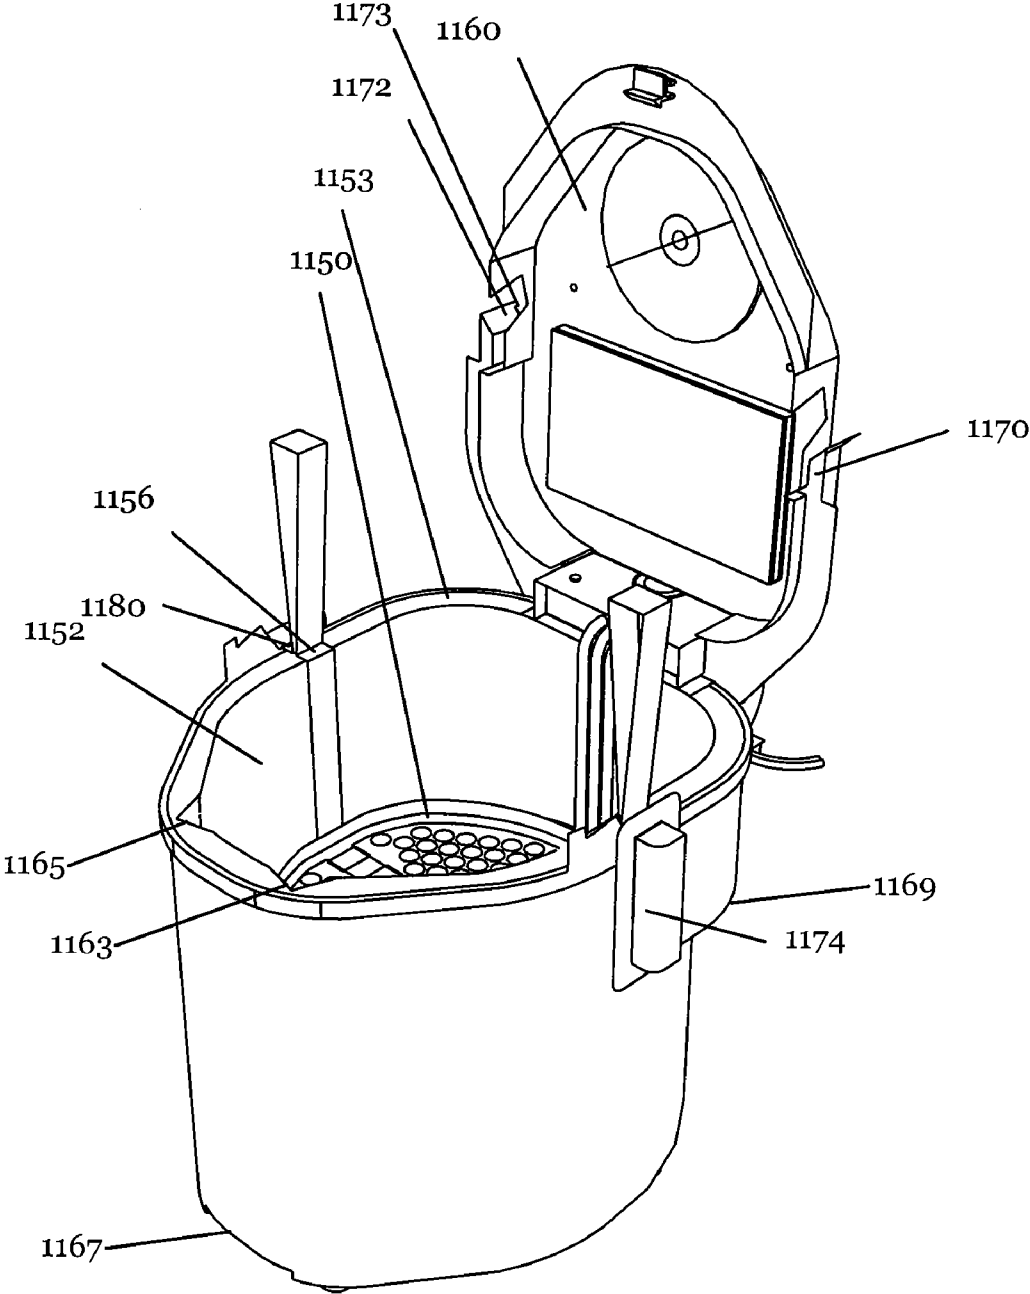


Fig 122

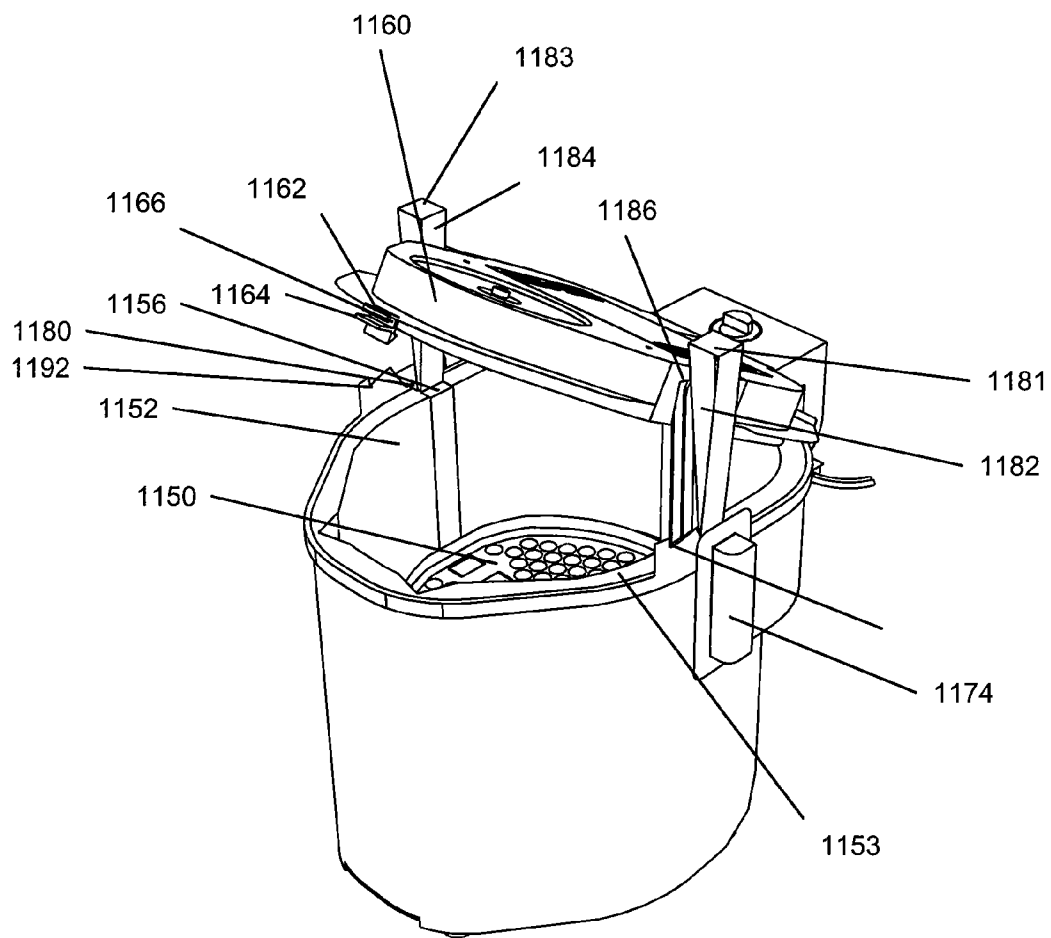


Fig 123

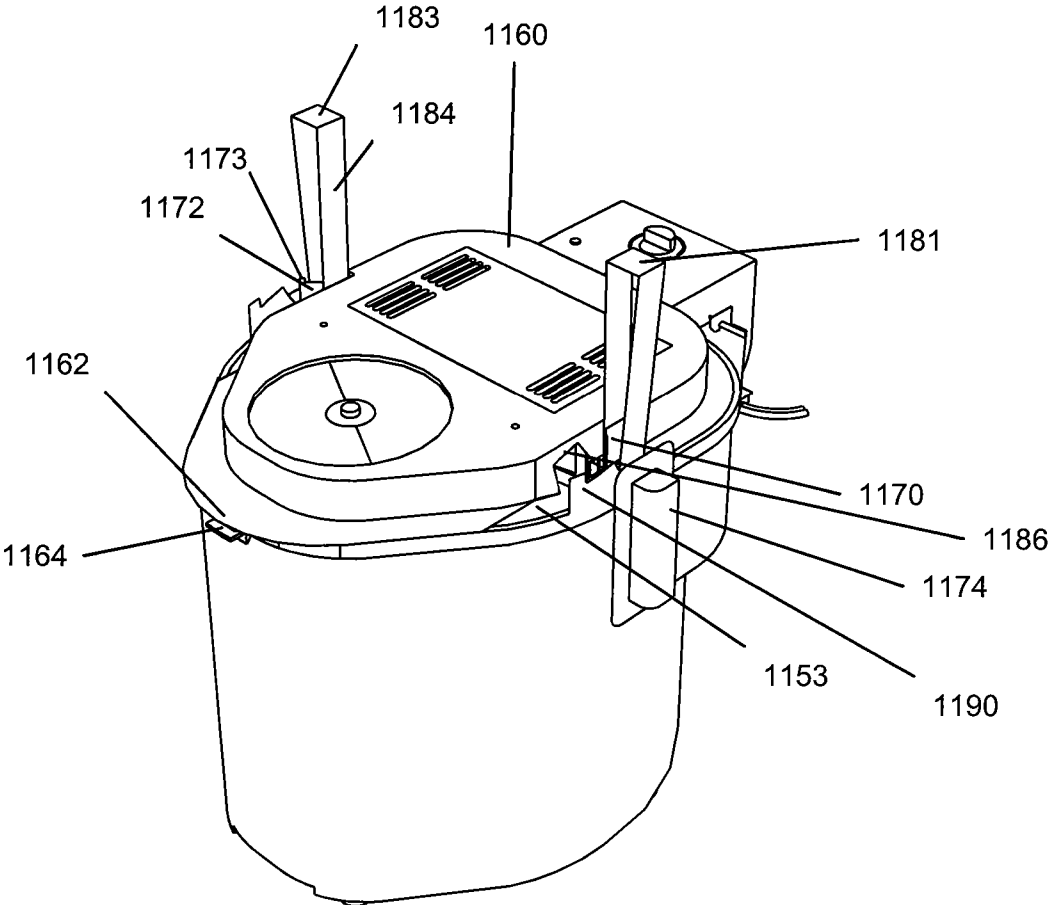


Fig 124



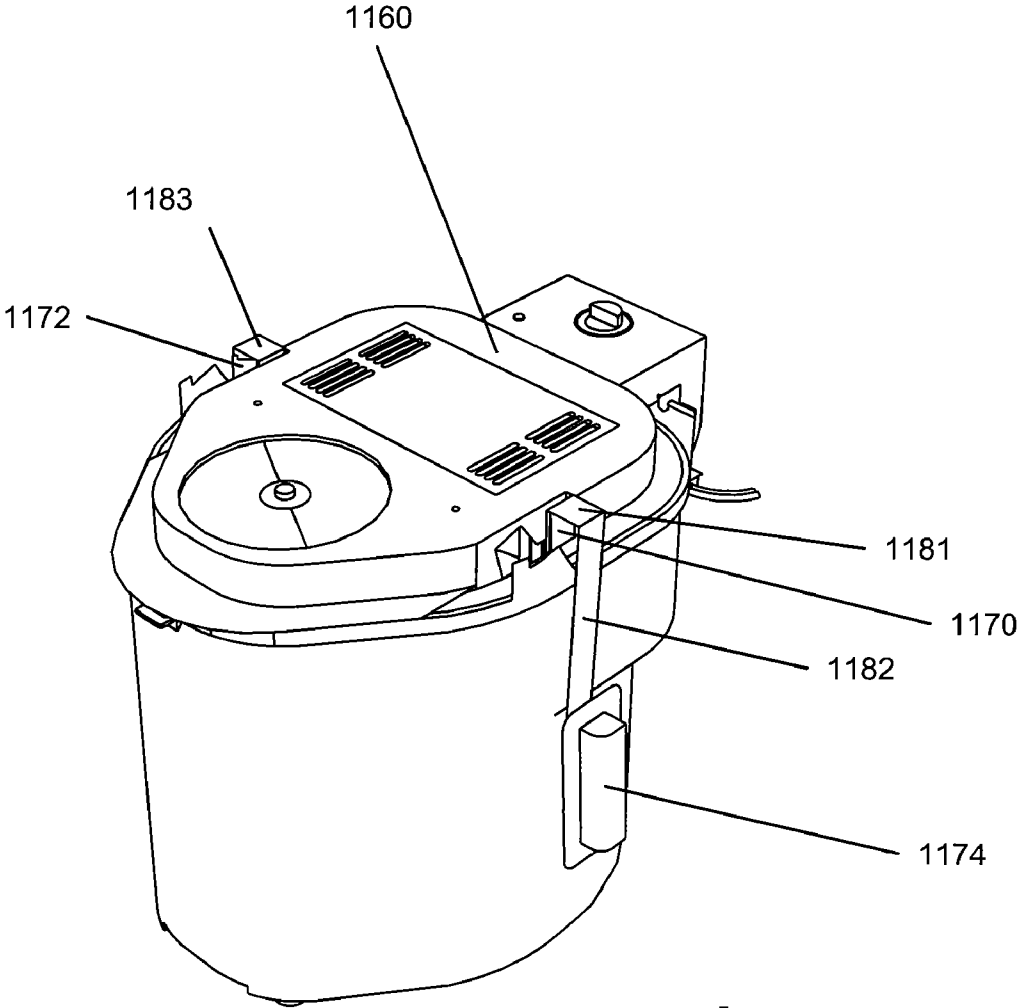


Fig 125

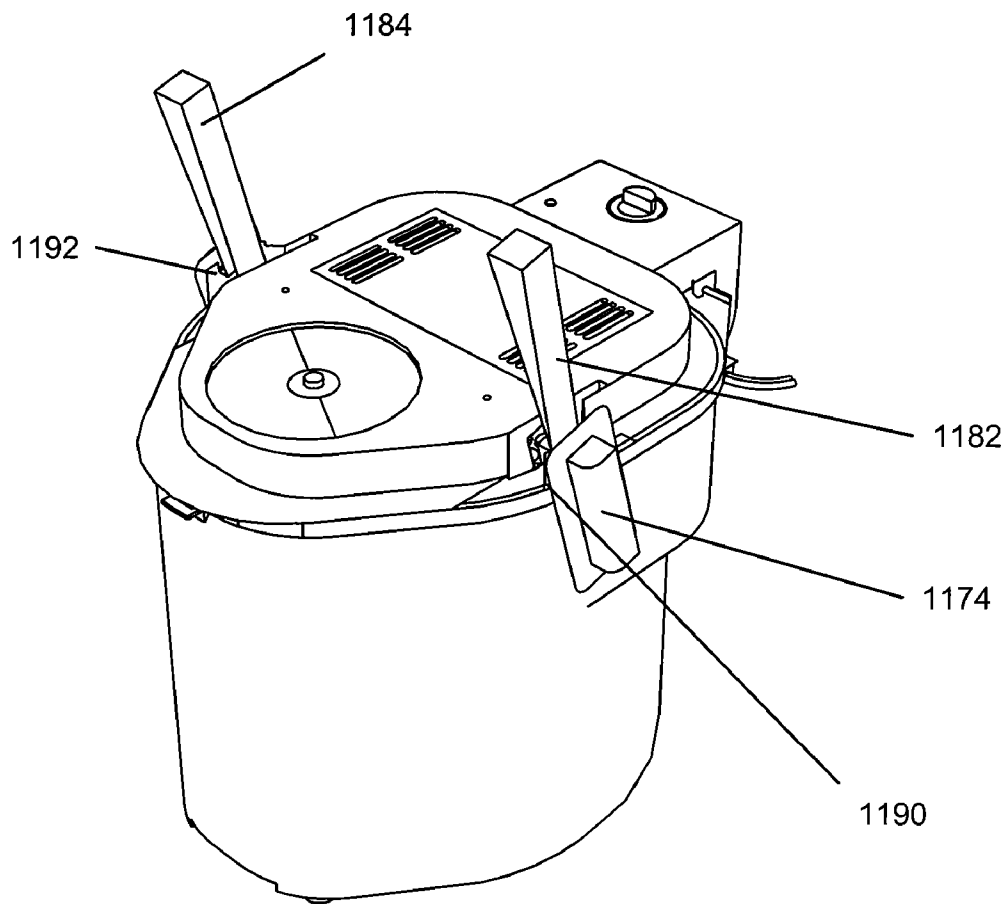


Fig 126

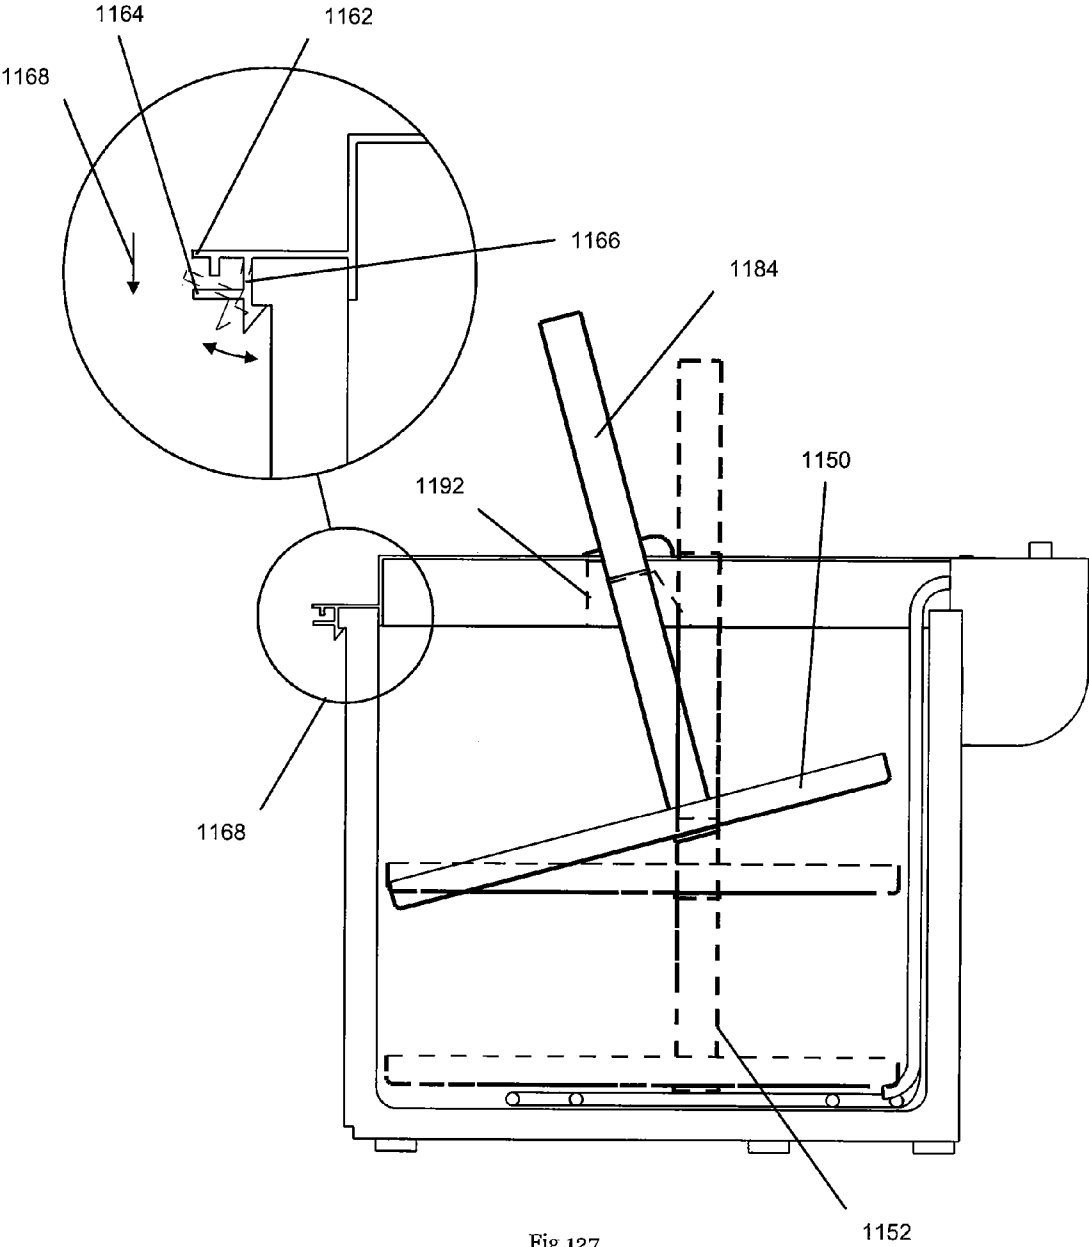


Fig 127

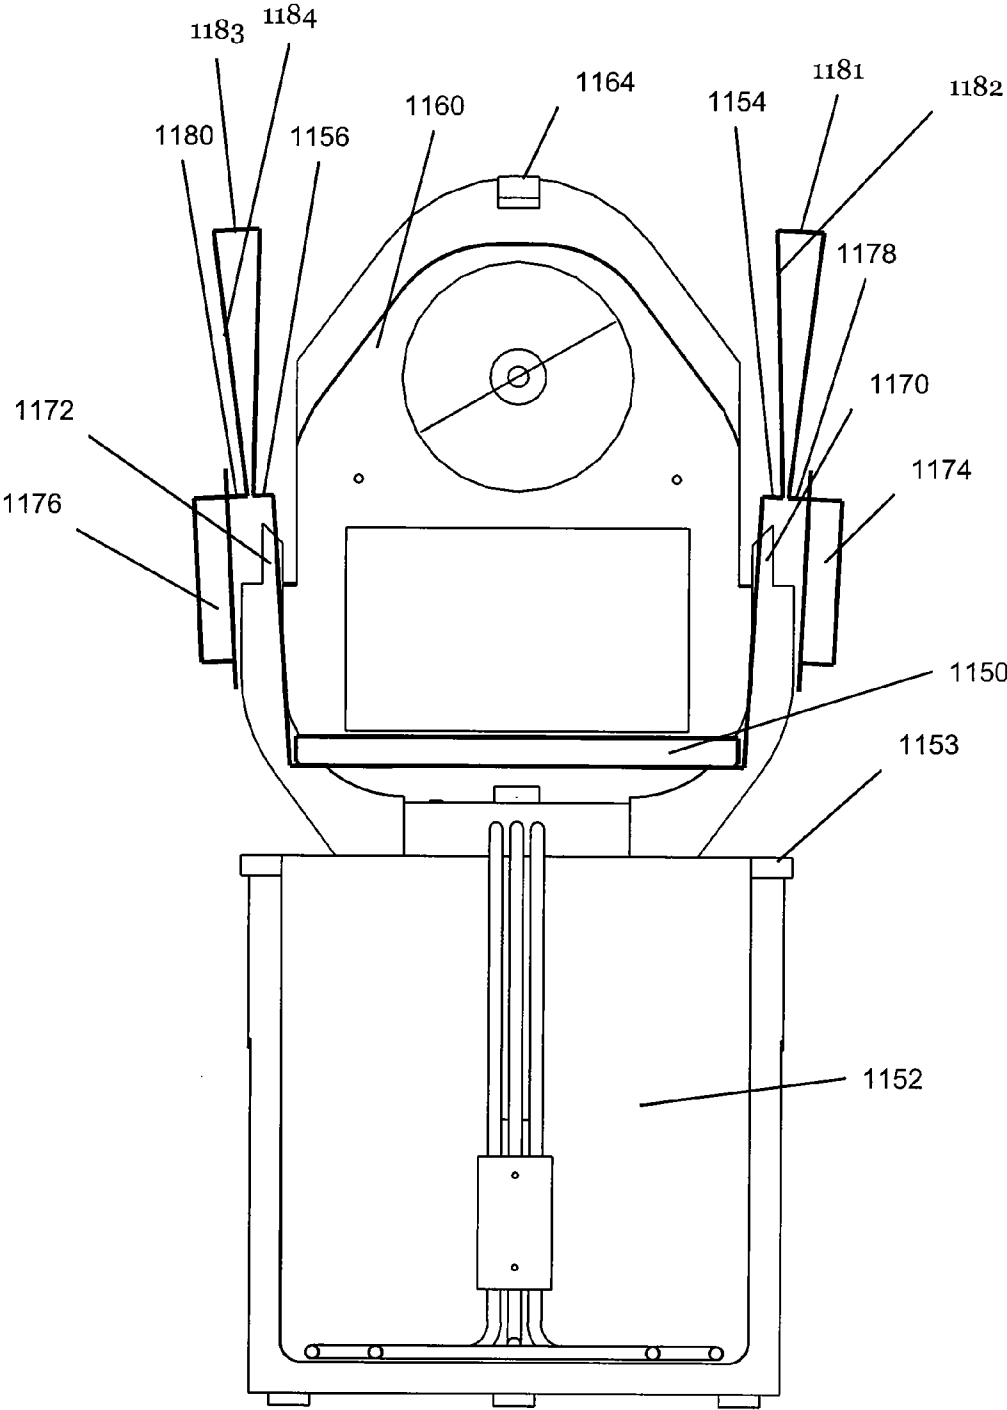


Fig 128

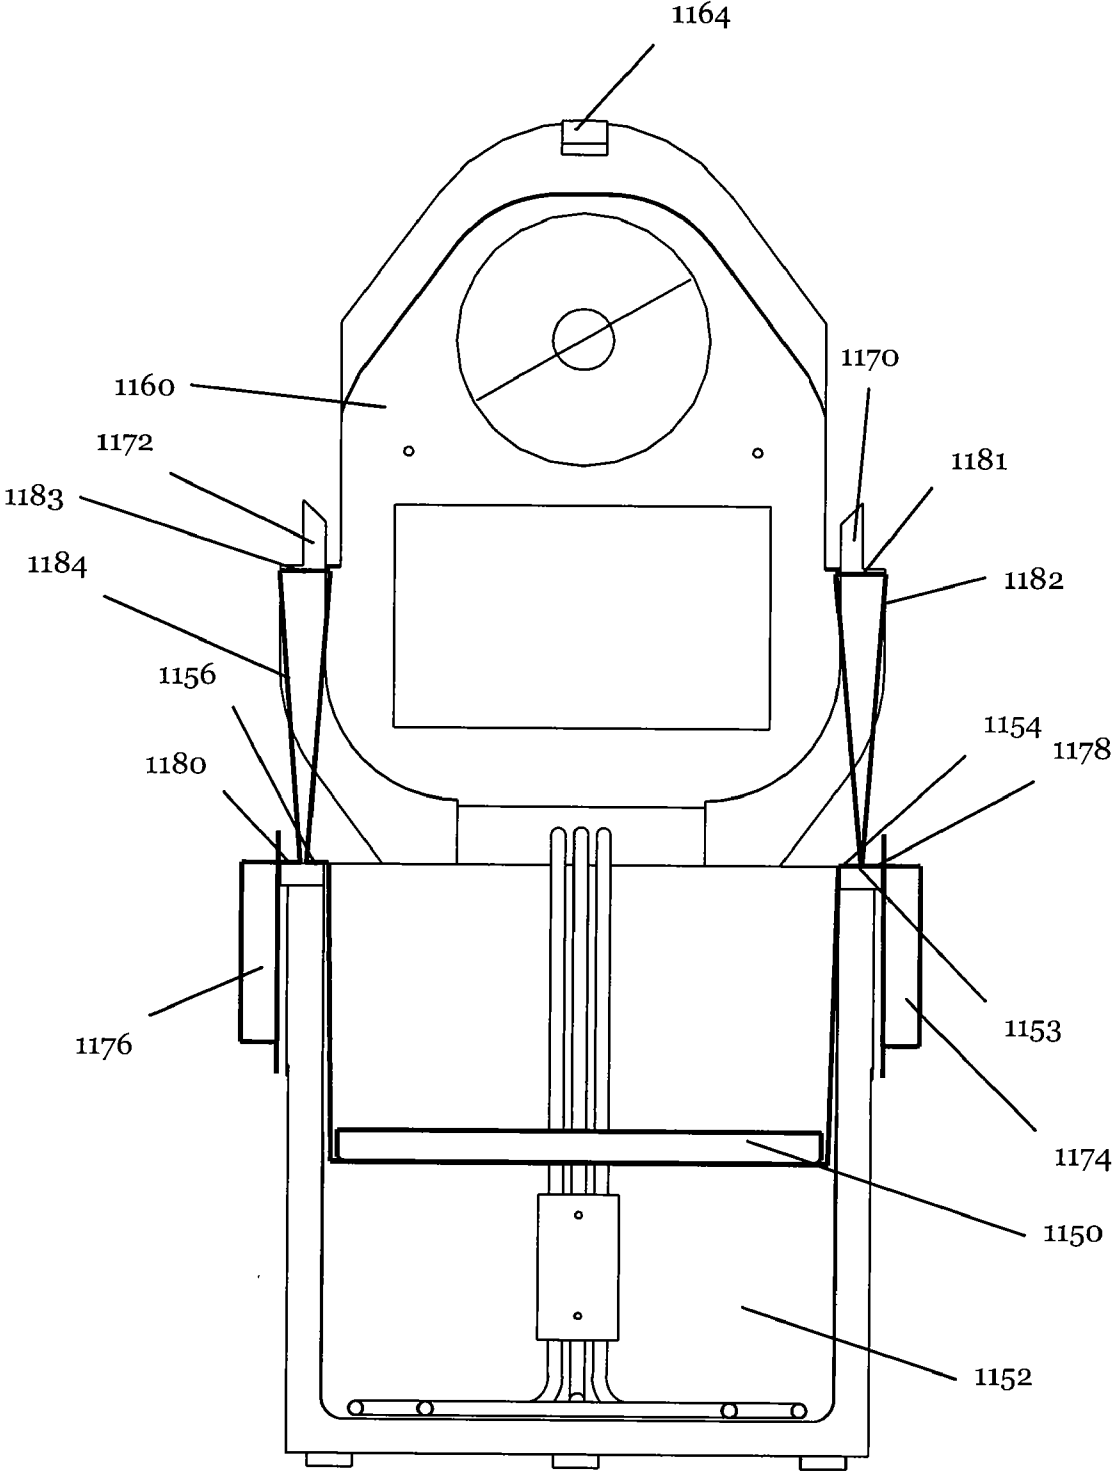


Fig 129

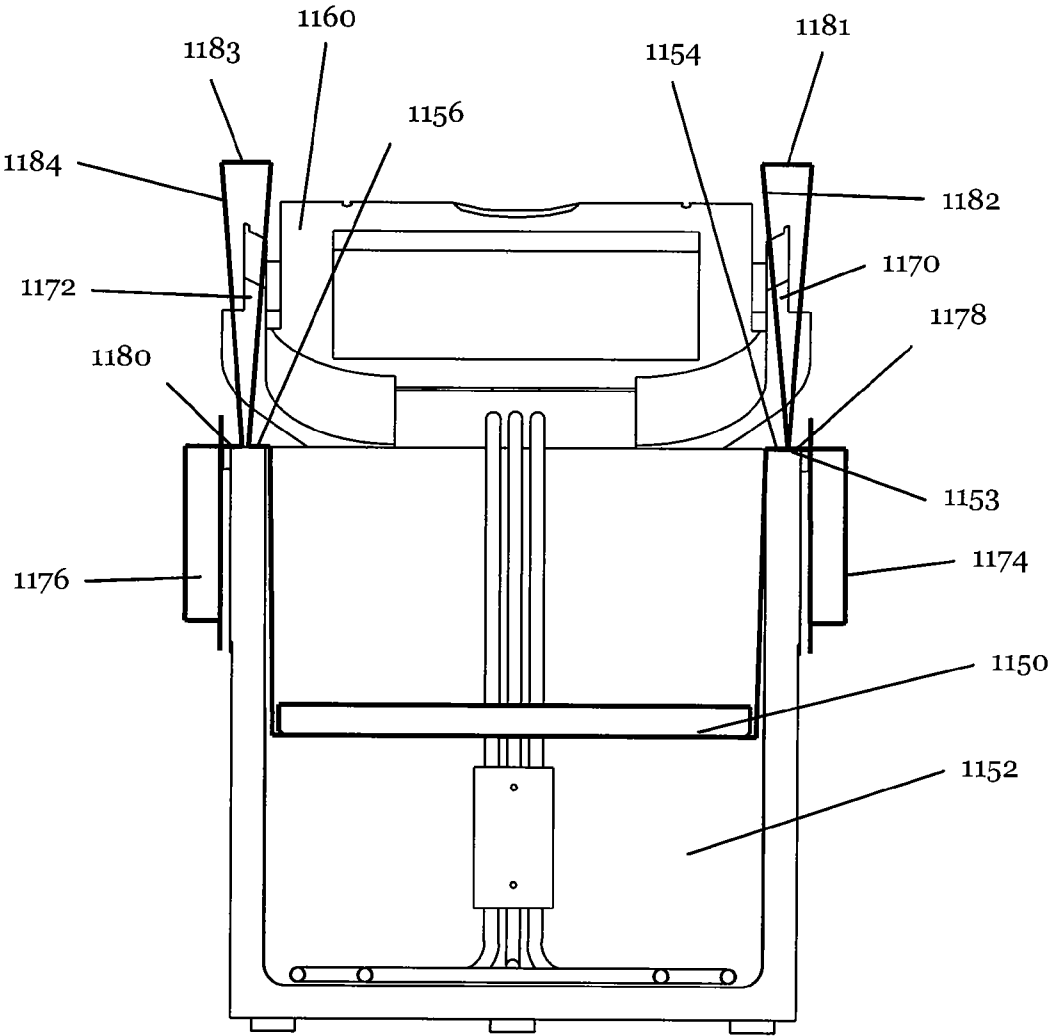


Fig 130

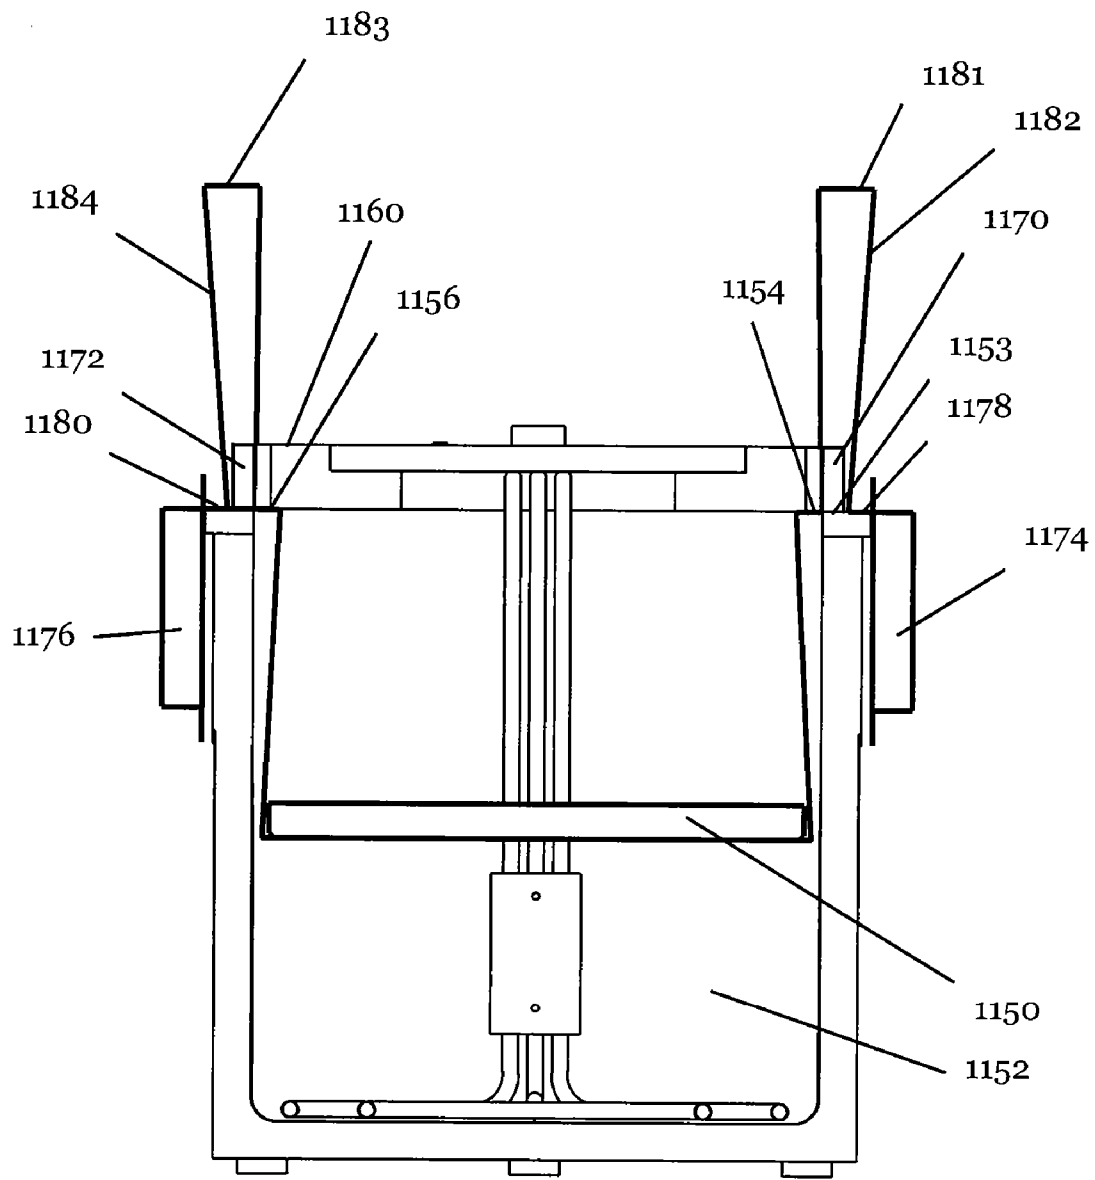


Fig 131

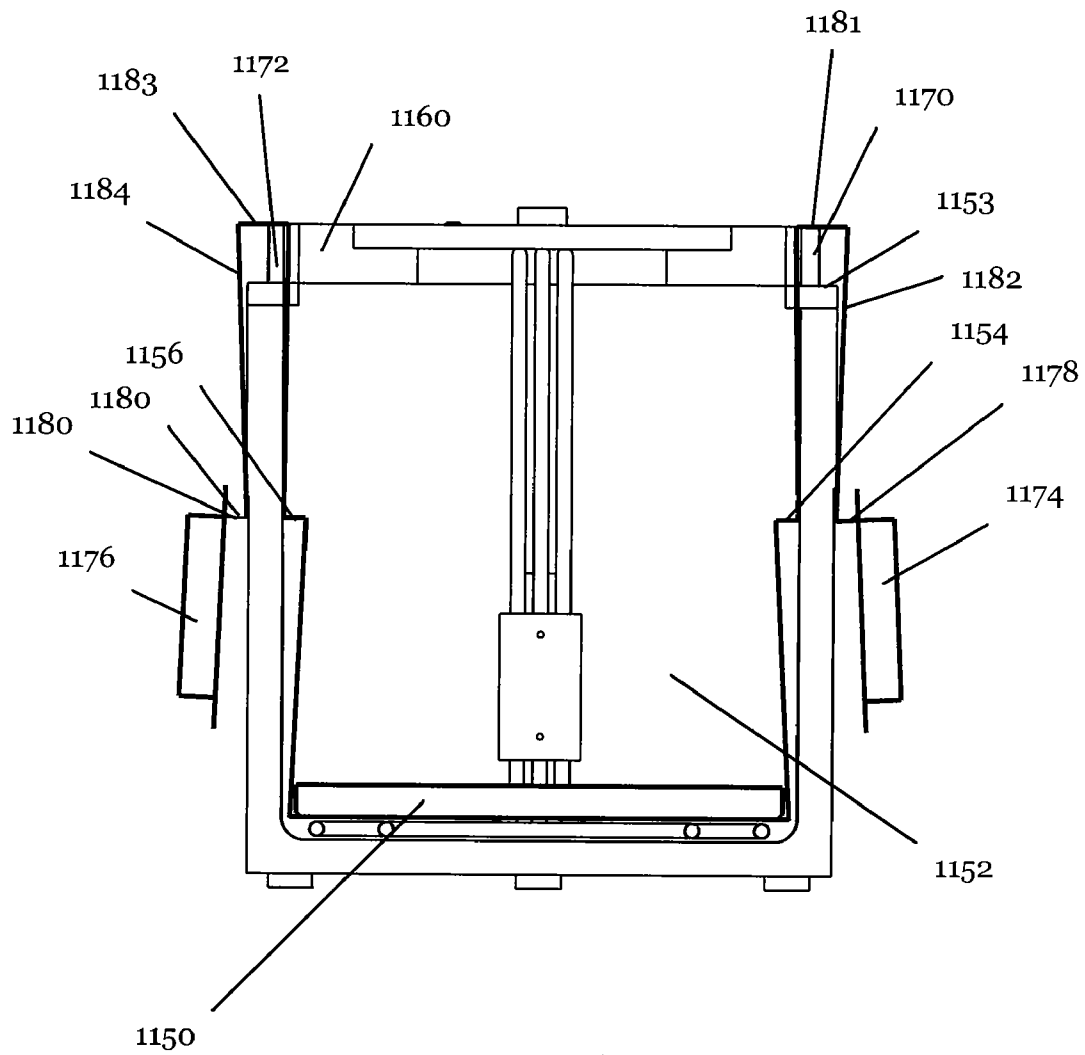


Fig 132



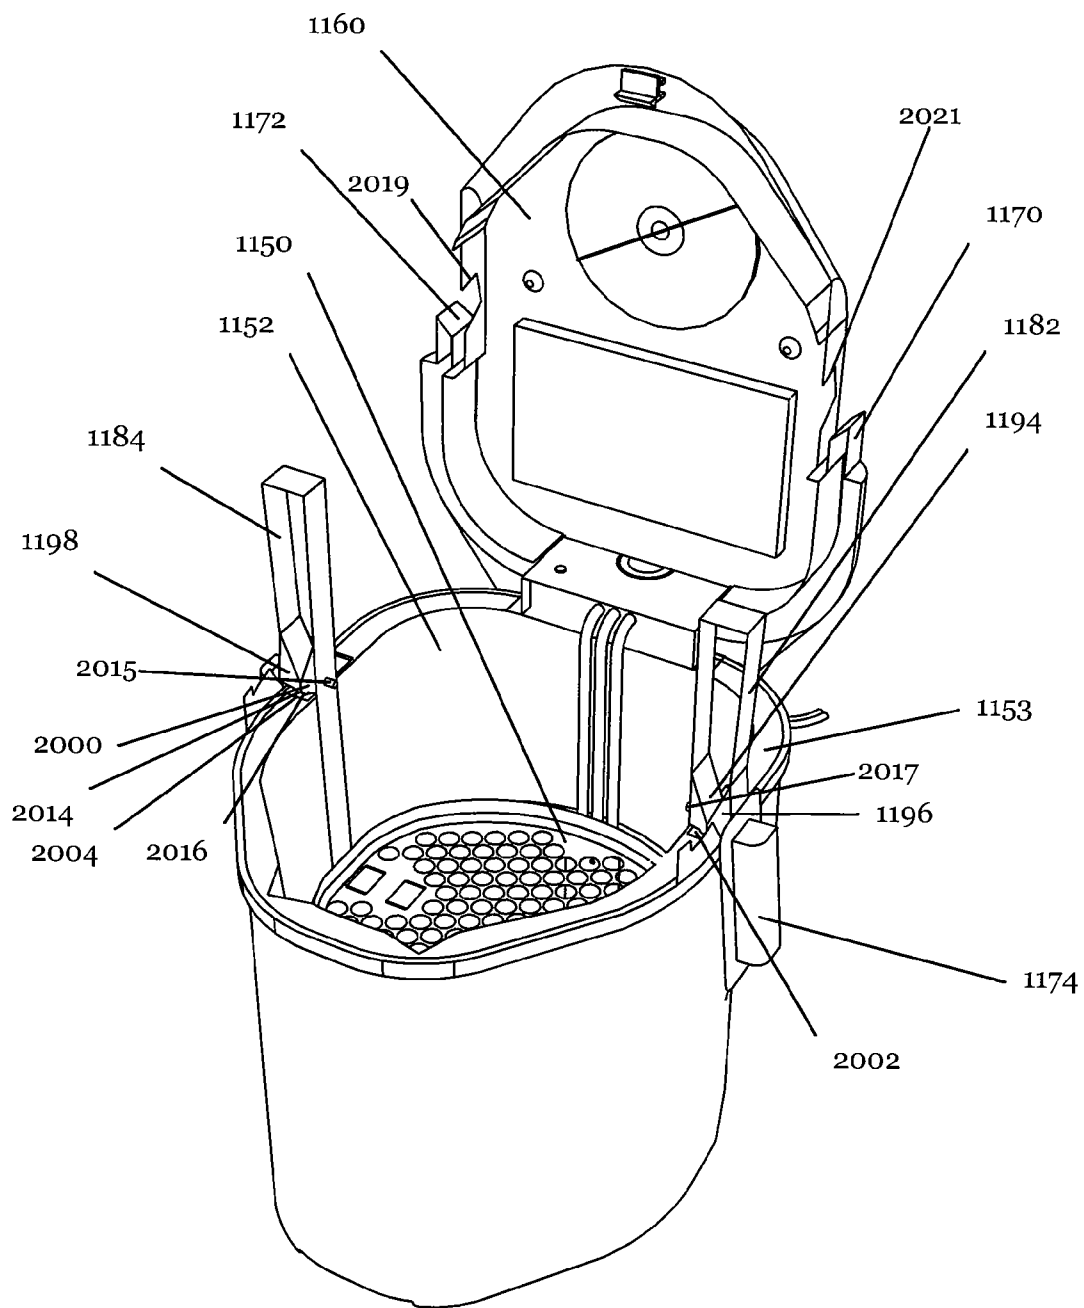


Fig 133

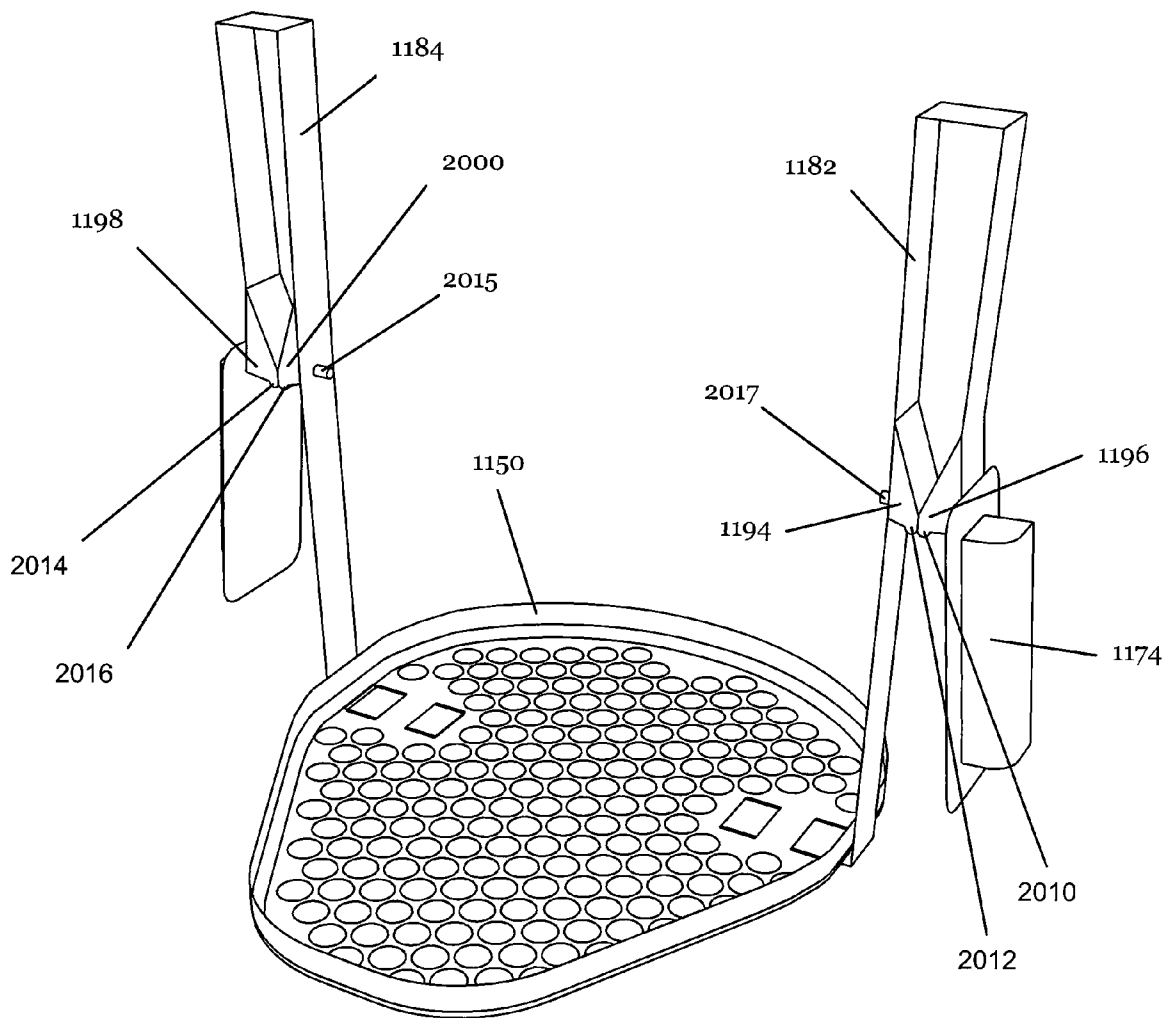


Fig 134

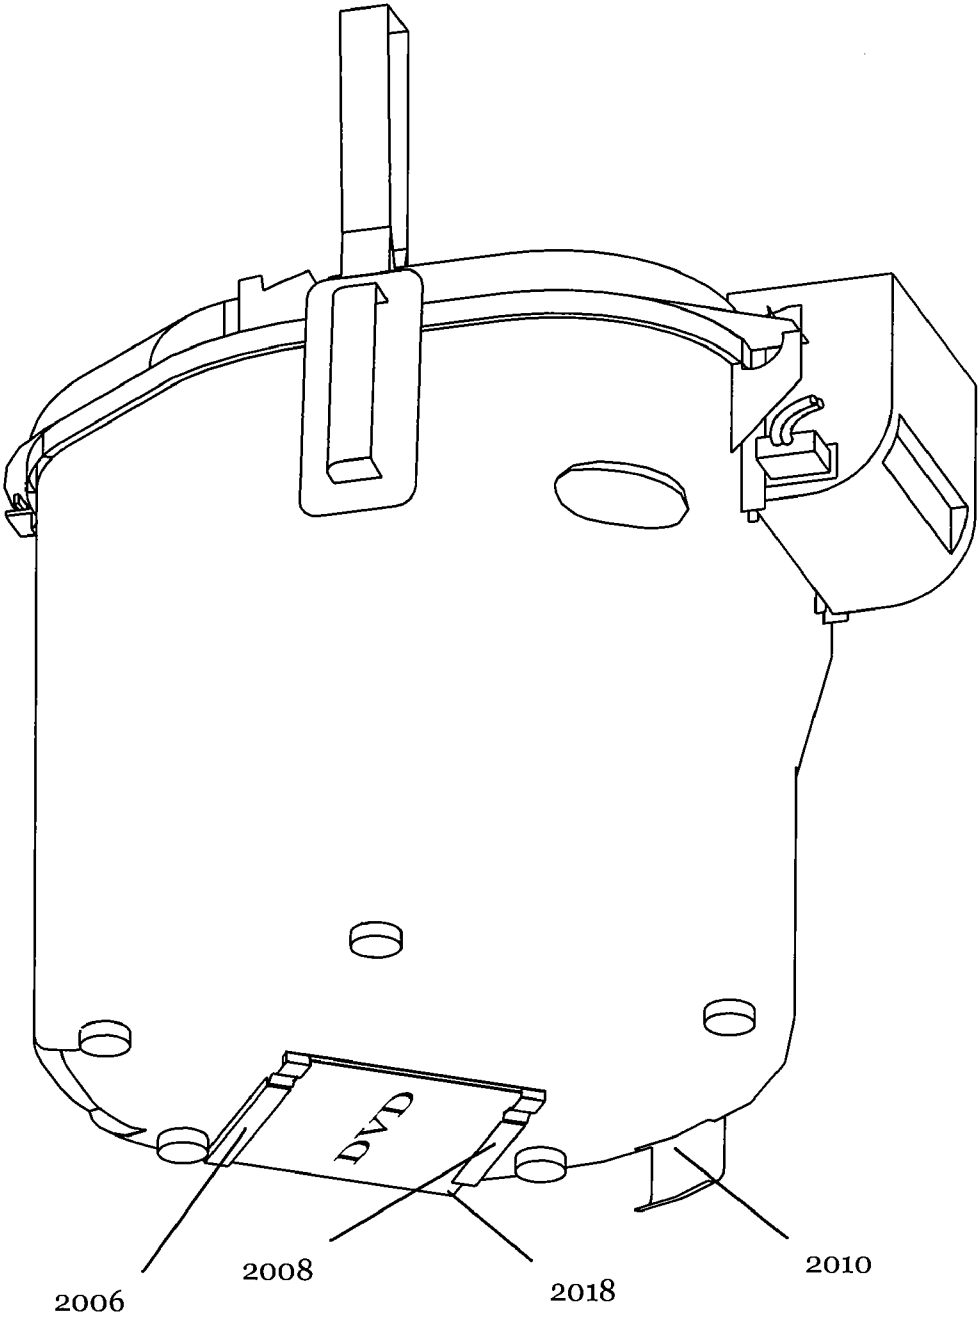


Fig 135

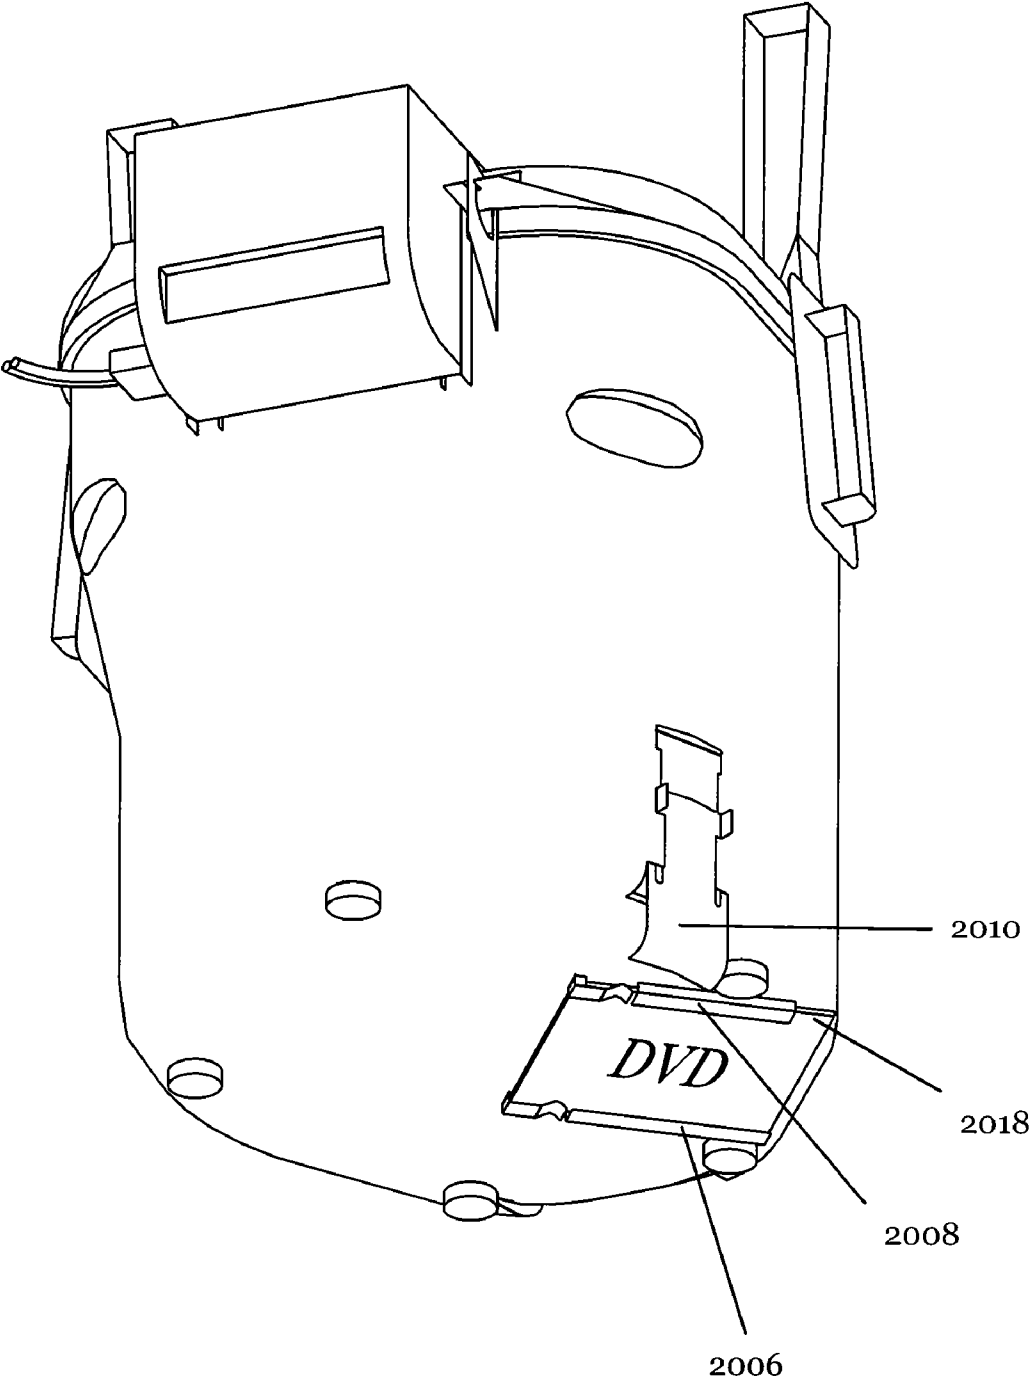


Fig 136

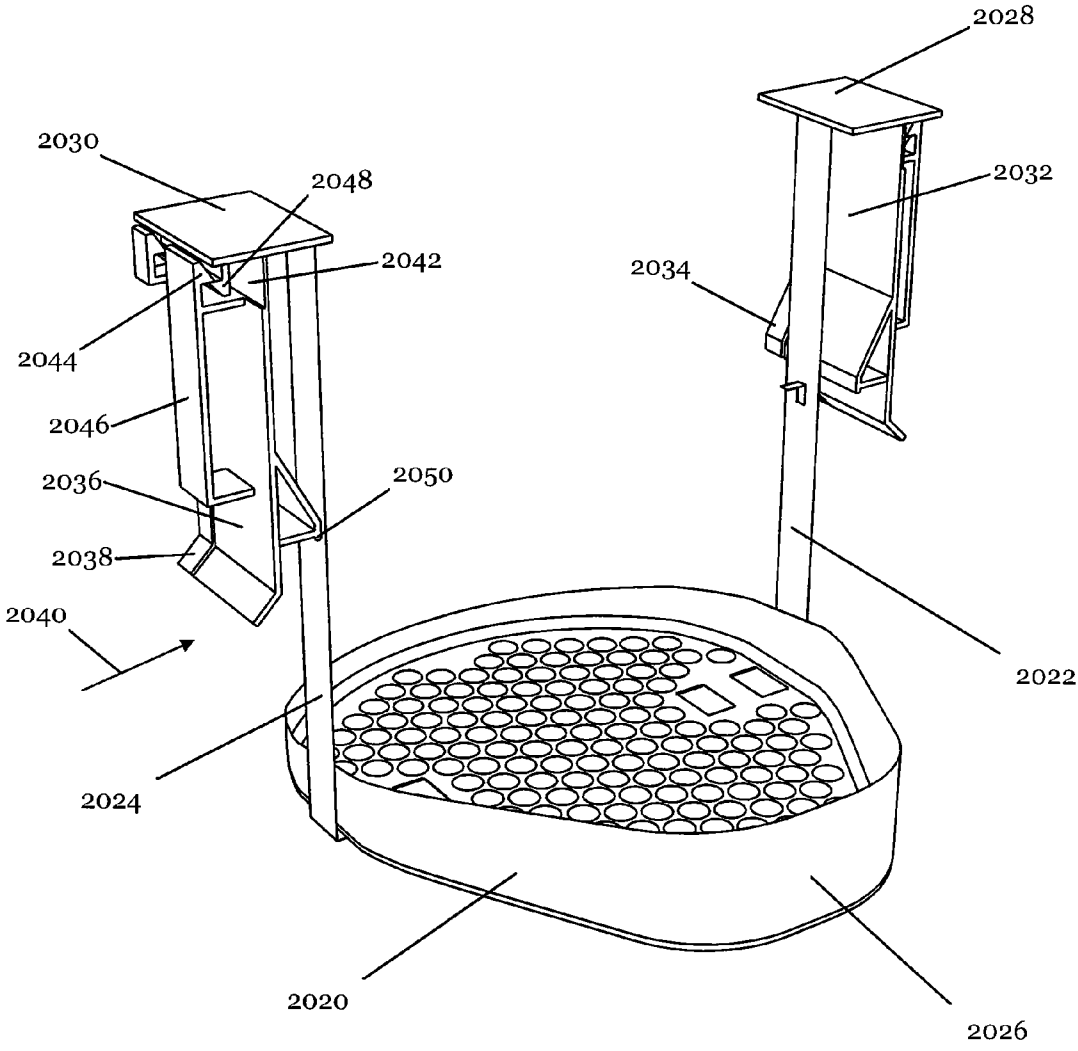


Fig 137

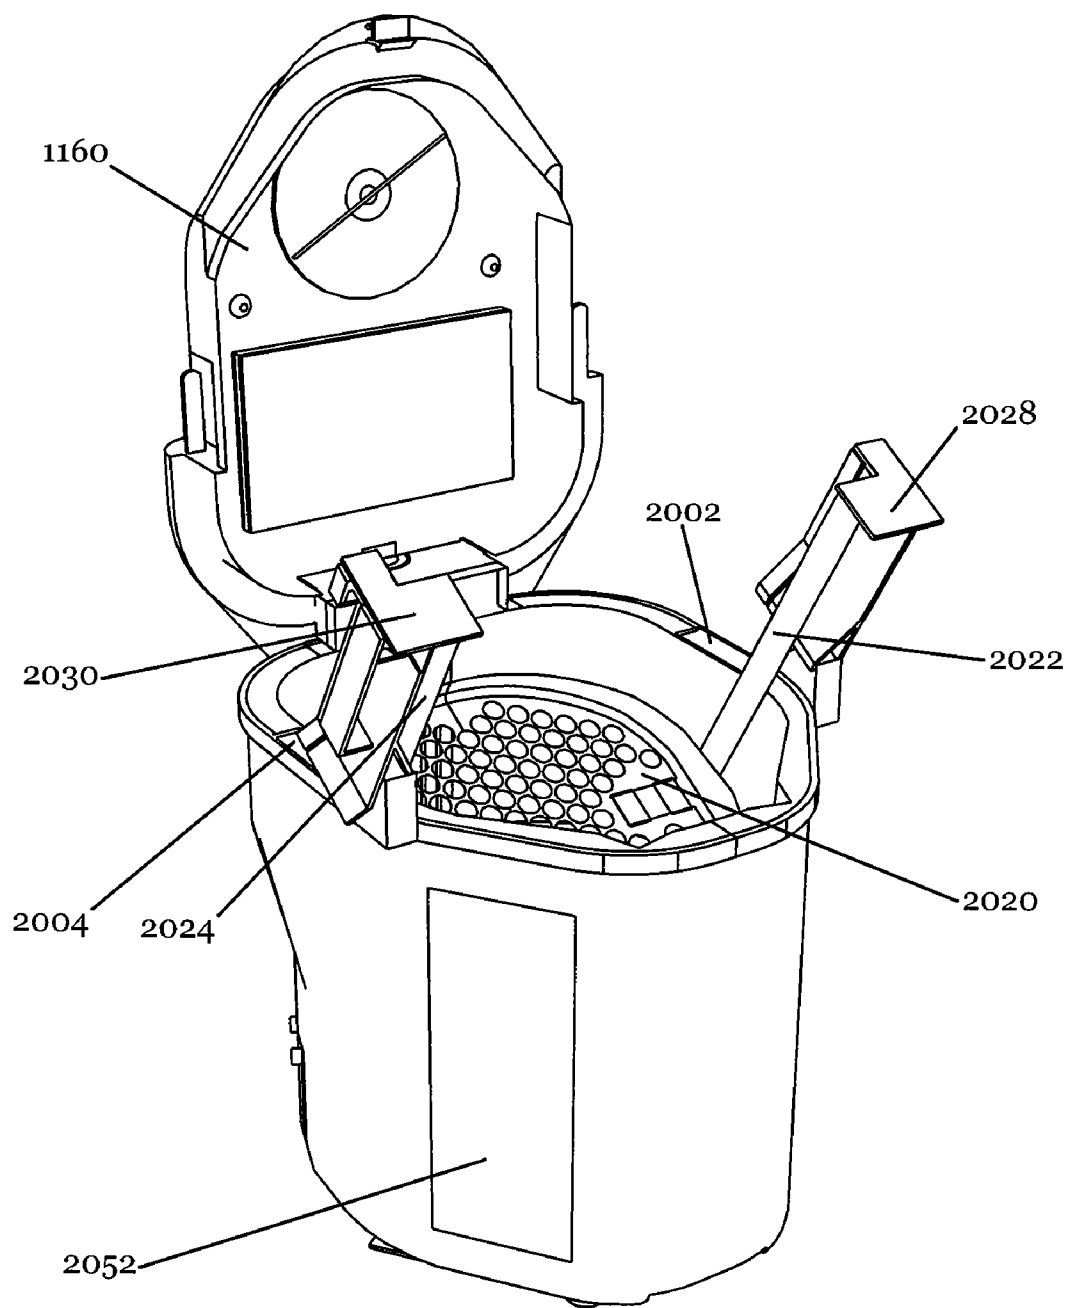


Fig 138

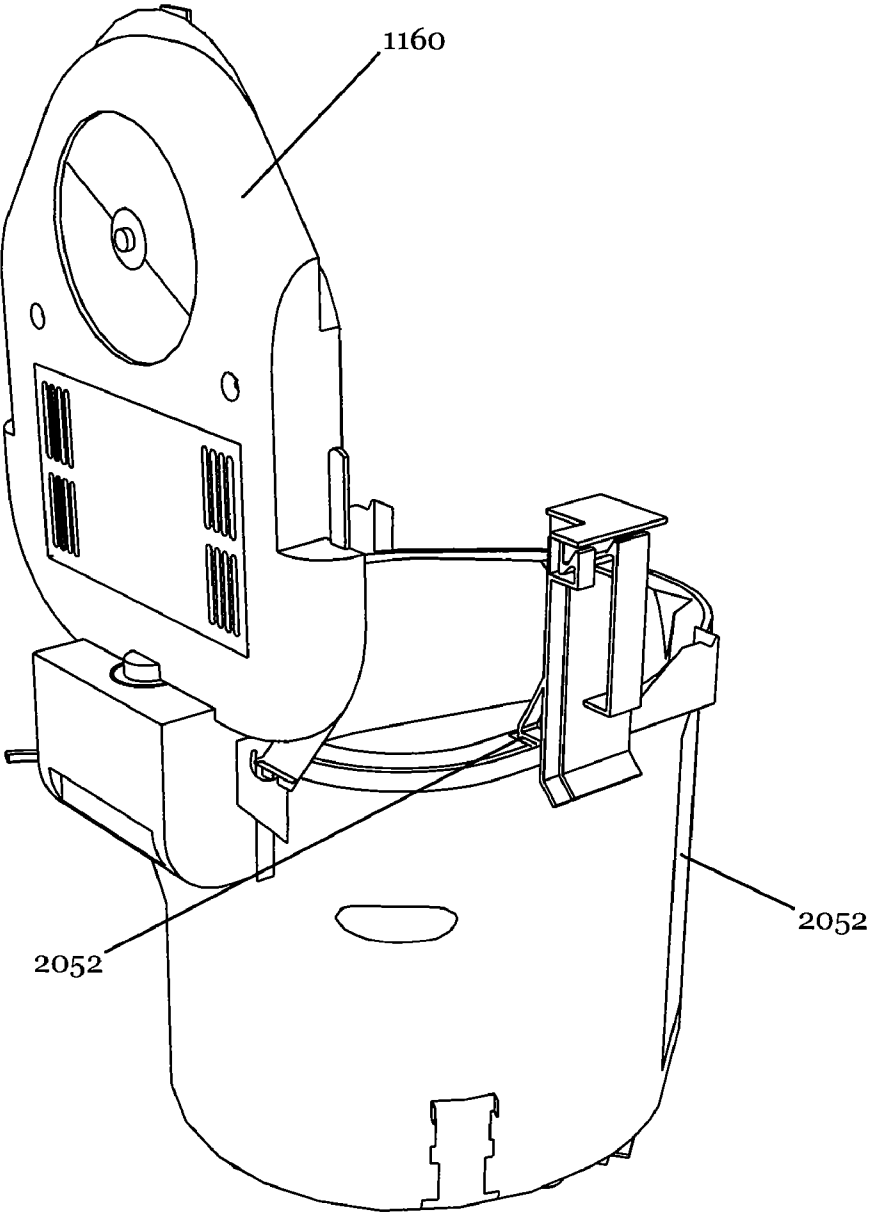


Fig 139

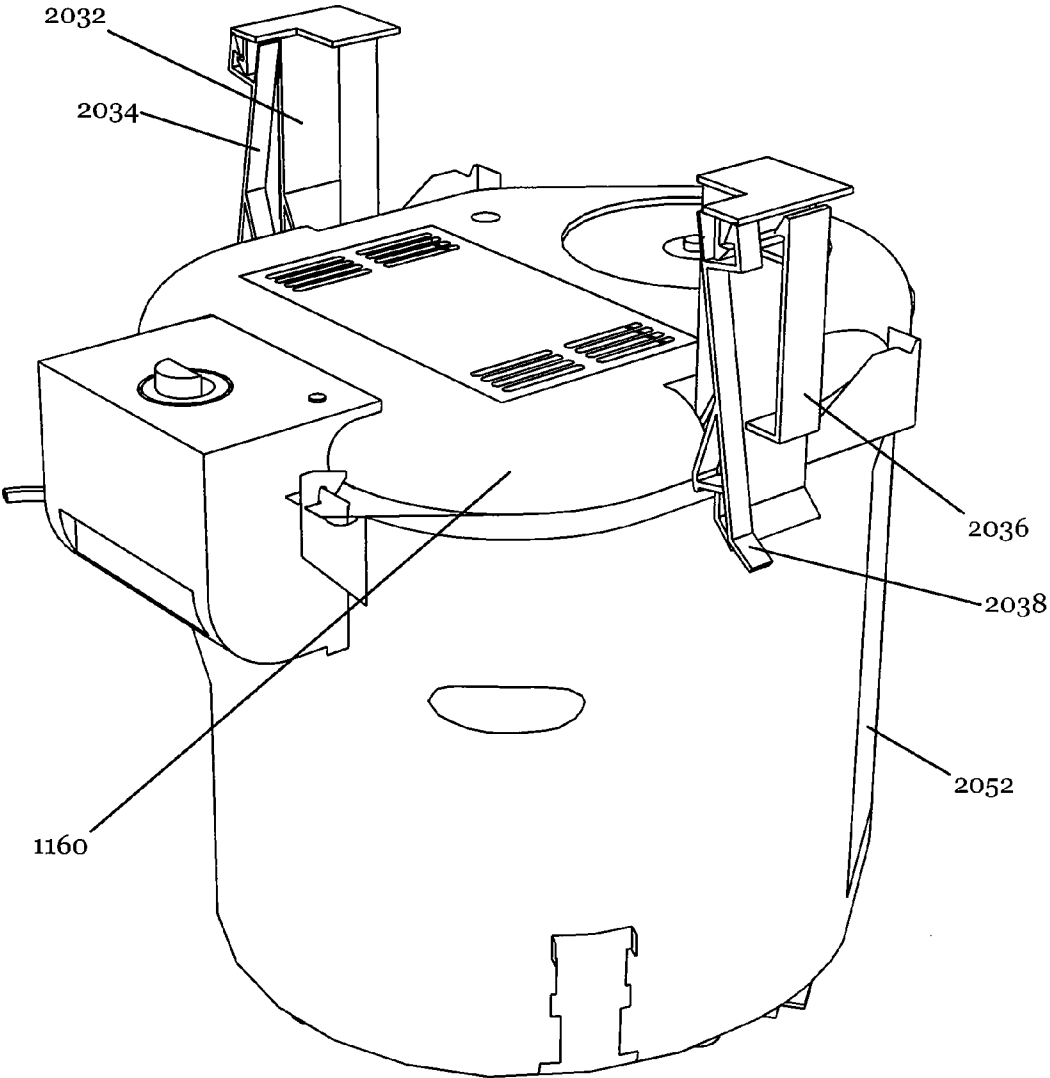


Fig 140



### COOKING DEVICE TO DEEP FAT FRY FOODS

[0001] This application is a Continuation-in-part of PCT Patent Application No. PCT/US2006/30946, filed Aug. 8, 2006, which is a PCT of U.S. patent application Ser. No. 11/425,317, filed Jun. 20, 2006, which is a Continuation-in-part of U.S. patent application Ser. No. 11/345,187, filed Feb. 1, 2006, which claims the benefit of U.S. Provisional Application No. 60/706,859, filed Aug. 8, 2005, all of which are incorporated herein by reference.

### FIELD OF THE INVENTION

[0002] The present inventions are directed to cooking devices used for cooking food articles and, more particularly to cooking devices that are configured to enable countertop deep fat frying of large foods in a manner that is safer, more efficient, and more user friendly than that provided by conventional deep fat frying devices used to cook large food articles.

### BACKGROUND OF THE INVENTION

[0003] What is known today in the art of home use deep fat fryers are small countertop devices. Such home use countertop devices have a very limited capacity, such as the ability to cook only a few ounces of French fries or the like in up to about 8 quarts of cooking oil. Besides lacking capacity, such conventional devices are inconvenient to use. Typically, a user must first pour cooking oil into the device and preheat the cooking oil before cooking can commence. Preheating the oil can take from a few minutes to more than half-an-hour, after which time the user must then return to immerse the food into the hot oil. If the user returns too soon, the oil is not fully heated, resulting further waiting by the user before using the device.

[0004] After oil preheating, the food must be immersed into the oil. Immersing food into the extremely hot cooking oil can be a dangerous process. For example, a user might be holding onto a short handle just a few inches away from the exposed surface of the hot cooking oil while trying to gently lower a basket full of food at the end of the handle. Upon placing the basket and the food contents into the hot oil, the oil can erupt with boiling, and/or sputtering that could burn the user, and that could possibly result in the basket being dropped and splashing into the hot oil should the user become burned during the process and let go of the basket to avoid further harm. Dropping the basket into the hot oil, however, could result in a more violent result that could cause further harm to the user. In many devices, the surface of the hot cooking oil may be fully exposed when the food is being lowered into the oil, thus presenting other safety hazards of accidental contact with the extremely hot oil.

[0005] Once the desired food content is immersed in the hot oil, the cooking process can take anywhere from a few minutes to more than an hour. At the end of the cooking process, the user must be present at a precise time to remove the food from the hot cooking oil. If the user arrives too late, the food may be overcooked. If the user arrives too soon, they may have to wait until the food is fully cooked, or have undercooked food.

[0006] Next, drainage of the oil from the food is required. This again can take anywhere from a few minutes to over half-an-hour. After the food has been drained, the user must again return to serve the food.

[0007] The cooking oil that is used in such conventional countertop devices may only last for one to about four uses, after which the oil must be changed. Filtering the cooking oil between uses generally helps to increase its useful life. While some commercial units have pumps and filters to periodically cleanse their cooking oil during and/or between uses, such countertop home units generally have no means for such oil filtration. Thus, the cooking oil in these devices must either be changed as noted above, or filtered by a manual method that involves a multi-step task of physically removing the oil from the device, filtering it outside of the device, and then reintroducing the oil into the device.

[0008] The oil from such countertop device is removed by pouring the oil from the device into a disposal container, and then discarding the oil by pouring it down the kitchen drain. The practice of discarding used oil down the drain may clog the drain pipes. Disposing of used oil is generally also a cumbersome process, as the heavy, greasy, oil must be carefully poured directly from its cooking pot, which generally has no pour spout, into the narrow neck of a containment bottle or the like for further handling.

[0009] Besides imparting a bad taste to foods being cooked, using the cooking oil too many times may result in the oil foaming like a bubble bath either when food is lowered into it, or spontaneously upon the oil being heated, with or without food. Such foaming vastly increases the amount of space required to contain the oil and food, and may result in the fryer being overflowed and hot oil potentially destructively dripping down to the countertop or other surface upon which the device is resting.

[0010] These small, countertop home use deep frying device also generally have no easy way of being cleaned. While the internal portion of the cook pots are typically cleaned by soap and water like any other cooking pan, because these devices also include electrical components for heating the device, it is important that such electrical components does not get wet or be exposed to water during the cleaning process. Thus, when cleaning such devices, it is important to avoid having water overflow into the electrical components particularly when the water is dumped out of the pans.

[0011] Larger deep fat frying, outdoor, home use, cooking devices, commonly referred to as turkey fryers, are also coming into use today. These units have the capacity to hold from 2-½ gallons to over 10 gallons of cooking oil, and the capacity to cook foods ranging from a few pounds, to well over a 20 pound turkey. Typically, such turkey fryers comprise a large metal bucket about a foot in diameter and a-foot-and-a-half high, which sits atop an open-frame support that contains a bottle gas fired burner. Some turkey fryers have metal lids similar to those found on saucepans, which are held in place only by gravity.

[0012] Except for typically having no electronics to complicate cleanup, such conventional turkey fryers have most or all of the same problems described above, except on a larger scale due to their increased size. For example, instead of, in a small home countertop deep fat fryer, lowering a few ounces of French fries contained in a small basket into a few quarts of cooking oil, such turkey fryers may present their users with the task of with slowly lowering a 15 pound or larger turkey into over 5 gallons of hot, sputtering cooking oil. The cooking oil in such turkey fryers are contained in a

tall, top-heavy, open bucket that rests precariously on an unstable platform which houses an open flame for heating the bucket contents. Thus, the act of accidentally dropping the food into the hot oil of such turkey fryer can have a result of a larger magnitude than splashes causes from dropping French fries into a few quarts of hot oil. Accidentally dropping a 15 pound turkey into the turkey fryer can cause the displacement of 5 gallons of hot oil, which could contact the user and/or which could come into contact the open flame burner and ignite, potentially resulting in further injury and/or property damage.

[0013] Safety issues may also arise from where and when turkey fryers are used. Generally, they must be used outdoors due to the open flame cooking element. The two most common times during the year that such turkey fryers are used in the United States are during Thanksgiving and Christmas. Cold and/or inclement weather are generally the rule in many parts of the United States during these times. A user may typically be in his or her driveway, under these weather conditions while trying to cook a large turkey. Additionally, there may be ice and/or snow on the ground. The task of slowly lowering a heavy turkey away from the user's body into a large, top-heavy, bucket containing hot oil precariously resting atop an unstable platform with an open flame may be dangerous under the best of circumstances, but being outdoors with cold and inclement weather, possibly combined with slippery footing, may make it especially hazardous.

[0014] Cleanliness may also be a problem with deep fat frying. During the deep fat frying cooking process, fats and oils may vaporize, and be disbursed into the air. Filtering air before it leaves a deep fat fryer may help to reduce contaminants in room air including cooking odors.

[0015] Viewing items being cooked may be a problem for both countertop home deep fat fryers as well as turkey fryers. Many home deep fat fryers have small horizontal windows in their lids to view the cooking progress. These windows, however, are virtually useless as steam condenses on their horizontal window surfaces and obfuscates the view. Also, construction of these small viewing windows includes many pieces, which are both expensive and time consuming to fabricate and assemble. In contrast, the food being cooked in a turkey fryers may be viewed by either looking into directly into the cooking bucket, in devices that are constructed without having a lid, or by removing any such lid that the turkey fryer may have. Both these situations present a hazard of directly exposing the user to the cooking oil with no intervening safety barrier.

[0016] Turkey fryers have at least one other typical hazard, that of overheating the oil due to lack of thermostatic control. Such fryers are typically heated by bottled gas-fired burners that generally have no thermostats or temperature control to shut the flame down when the oil has reached cooking temperature. By simply failing to turn down or off the flame at the appropriate time, cooking oils can be accidentally overheated to a point where they may produce smoke and possibly spontaneously combust into flame.

[0017] Recently, indoor use electric turkey fryers have made it into the marketplace. These units are primarily used on a kitchen countertop. The food to be cooked is hand lowered into the hot cooking oil at the end of a coat hanger like handle hooked onto a bucket-like bail handle, which is

attached to a perforated pot which holds the food. Adding even a minimal 36 inch countertop height, and the 14 inch turkey fryer height, and the 8 inch high perforated bucket, and the 14 inches of handle above it, this may require the user to lift a 14 pound or larger turkey, away from their body, a distance of about 72 inches into the air just to load it. As noted above, the task of lowering the turkey into the hot cooking oil must slowly avoid splashing the hot oil. This is difficult for a six foot tall man, but may be nearly impossible for those of smaller stature.

[0018] In addition, the presence of an electrical cord introduces the opportunity for these new units to be accidentally pulled off the countertop by their cords, thus presenting new potential safety hazards associated with spilled hot cooking oil.

#### SUMMARY OF THE INVENTION

[0019] Several preferred embodiments of the present inventions are described herein and illustrated in the accompanying figures. A preferred embodiment of the present inventions may have one, or a combination of the following features and advantages.

[0020] It may deep fat fry small and large foods up to, as an example, a large 20 pound turkey.

[0021] It may also be used as a food steamer for steaming items such as vegetables, clams, crabs, and many other foods.

[0022] A preferred embodiment may be used as a roaster, similar to roasters marketed today under the Nesco brand-name. Such a device may roast food, or be used to prepare soups and stews.

[0023] A preferred embodiment may be used to boil foods in water, such as eggs, lobsters and vegetables.

[0024] A preferred embodiment may be electrically powered.

[0025] A preferred embodiment may be used indoors.

[0026] A preferred embodiment may be used on a countertop.

[0027] A preferred embodiment may have its cooking functions controlled using only a simple, single, user-set timer.

[0028] A preferred embodiment may use its mounted food support as an intervening safety barrier between a user and hot cooking liquid contained within the embodiment.

[0029] A preferred embodiment may have a lid that can be latched down as a barrier between a user and hot cooking liquid.

[0030] A preferred embodiment may comprise means for lowering food into hot cooking liquid under motor power.

[0031] A preferred embodiment may have a compact food lifting and lowering mechanism that fits within the cooking enclosure. Such a mechanism may use a flexible tension member. Alternatively, such a mechanism might use a rotating screw threaded rod. Such a mechanism may be removable to facilitate embodiment cleaning.

[0032] A preferred embodiment may have a control box enclosure that can be removed from the rest of the device for

cleaning or other purposes. When removed, such an enclosure may automatically disconnect internal electrical components from electrical power by separating a plug and receptacle connecting the enclosure with the rest of the device. Such an enclosure may house the food lifting and lowering mechanism. Such an enclosure may also solidly connect to a heating coil.

[0033] A preferred embodiment may be vented to cool its outer enclosure. The outer enclosure may also be constructed from materials, such as plastics and the like, to reduce the potential of a user getting a burn from touching the outer enclosure.

[0034] A preferred embodiment may comprise means for lowering food into the hot cooking liquid immediately upon the cooking liquid becoming hot enough to cook.

[0035] As a safety and a convenience feature, a preferred embodiment may not require a user to be present when food is being lowered into the hot cooking liquid.

[0036] Also as a safety and a convenience feature, a preferred embodiment may not require a user to be present when food is raised from the hot cooking liquid.

[0037] A preferred embodiment may comprise means for lifting the food out of the hot cooking liquid under motor power.

[0038] A preferred embodiment may comprise means for lifting food out of hot cooking liquid at a user predetermined time.

[0039] A preferred embodiment may comprise means for automatically draining excess cooking liquid from foods after cooking is complete. It may also incline foods to facilitate this draining.

[0040] A preferred embodiment may be easily emptied of cooking liquid using an inexpensive, simple drain tube, hose or conduit that may be flexible to facilitate the draining process.

[0041] Likewise, wash and rinse water may also be emptied using the same simple, inexpensive, simple drain tube, hose or conduit.

[0042] A preferred embodiment may use such a drain hose as both a means for transporting drained liquids, and as a valve having no moving parts. It may also have a redundant, inexpensive, simple plug or pinch valve for safety.

[0043] A preferred embodiment may use a single, accurate, inexpensive preset thermostat instead of an expensive relatively inaccurate adjustable thermostat. Likewise, it may use two or more such inexpensive preset thermostats where two or more specific cooking temperatures are needed, such as cooking with hot oil and cooking with boiling water.

[0044] A preferred embodiment may use an inexpensive external heating element.

[0045] A preferred embodiment may have a lid whose area is over 90% transparent to facilitate viewing of foods being cooked, and thus stimulate appetite appeal, and aid in gauging of food cooking progress. The transparent portions of the lid may be inclined to minimize build up of vision obscuring moisture.

[0046] To accommodate larger foods, a preferred embodiment may have a concave lid which is over 20% deeper than it is wide moving radially from right to left across the lid surface. Such a concave lid may be transparent to provide an even more expansive viewing area of foods being cooked. Such a concave lid may be inverted and nested into an embodiment base to provide compact storage. Such a concave lid may be positioned close to the cooking oil level through use of a flexible, heat resistant gasket, which prevents any foam formed during the cooking process from escaping. Such a concave lid can be monolithic in construction. As an example, it might be injection mold to simplify construction, ease cleaning, reduce cost, and increase durability.

[0047] A preferred embodiment may have a lid that can be easily detached from the rest of the device for food insertion or removal, and/or for cleaning. Alternatively, the lid may be configured to be rotated back and rested in a stable open position for food insertion and removal.

[0048] A preferred embodiment may have a lid that can be latched down to prevent rapid egress of hot cooking liquid in the event the cooking device is tipped over, or it falls off a countertop or other supporting surface.

[0049] A preferred embodiment may be scaled to a height of not more than 16 inches to cook on a kitchen countertop having adjacent over-countertop cabinets.

[0050] A preferred embodiment may have side vents to minimize or eliminate damage to such over-counter cabinets.

[0051] A preferred embodiment may have handles on its side to facilitate movement and storage of the cooking device.

[0052] A preferred embodiment may have a spring loaded lid with a single latch to facilitate opening and latching the lid using only one hand.

[0053] A preferred embodiment may have handles at its foreword right and left hand corners to allow a user to open the device without putting their hands or arms in the direct path of hot vapors escaping from the cooking device's cooking cavity.

[0054] A preferred embodiment may attach an electrical cord using a magnetically coupled plug.

[0055] A preferred embodiment may use inexpensive low-temperature materials by insulating them from high temperature components using small insulation barriers.

[0056] A preferred embodiment may have a food support that is open without vertical walls on three of its sides, thus reducing construction costs, and minimizing embodiment countertop footprint.

[0057] A preferred embodiment may only need two user interventions to deep fat fry foods, as compared to conventional fryers which require four user interventions as described above.

[0058] A preferred embodiment may have a filter to condense and reduce cooking contaminants and odors from mixing with the room air.

[0059] A preferred embodiment may have a cooking oil filter disposed within its cooking cavity to strain cooking oil,

and thus extend the oil's cooking life. In conjunction with this, or as an alternative, a preferred embodiment may have a filter assembly to strain cooking oil when it is being drained from the cooking cavity for storage or other purposes.

[0060] The following additional exemplary embodiment addresses real world marketing and cost considerations. This means, as in earlier exemplary embodiments, that not all desired features are provided.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0061] These and other features and advantages of the present inventions will be appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0062] FIG. 1 is a front upper perspective view of a first preferred embodiment in a lip closed position;

[0063] FIG. 2 is a front upper perspective view of the first preferred embodiment of FIG. 1 in a lid up position;

[0064] FIG. 3 is a rear upper perspective view of the first preferred embodiment of FIGS. 1 and 2;

[0065] FIG. 4 is a top view of the first preferred embodiment of FIGS. 1 to 3 with a food support vessel removed;

[0066] FIG. 5 is a cross-sectional side view of the first preferred embodiment taken along section 5-5 in FIG. 4, with both its lid open and its food support vessel in a raised position;

[0067] FIG. 6 is a cross-sectional side view of the first preferred embodiment as shown in FIG. 5, but with the lid in an intermediate position between being opened and closed, and with the food support vessel in a raised position;

[0068] FIG. 7 is a cross-sectional side view of the first preferred embodiment as shown in FIG. 6, but with the lid in a closed position, and with the food support vessel in a raised position;

[0069] FIG. 8 is a cross-sectional side view of the first preferred embodiment as shown in FIG. 7, but with the lid in a closed position, and with the food support vessel in a raised position;

[0070] FIG. 9 is a side view of the food support vessel and a motor lifting mechanism;

[0071] FIG. 10 is a front perspective view of the motor lifting mechanism of FIG. 9;

[0072] FIG. 11 is a rear perspective view of the motor lifting mechanism of FIGS. 9 and 10;

[0073] FIG. 12 is an exploded cross-sectional perspective view of the first preferred embodiment of FIG. 1 showing its elements in an unassembled state;

[0074] FIG. 13 is a schematic diagram of an electrical system in the first preferred embodiment;

[0075] FIG. 14 is a front perspective view of a filter that may be attached to the end of a flexible drainage hose, and inserted as shown into a storage or disposal container;

[0076] FIG. 15 is an exploded cross-sectional view through the filter shown taken along section 15-15 in FIG. 14;

[0077] FIG. 16 is a cross-sectional perspective view taken along section 16-16 of FIG. 14;

[0078] FIG. 17 is a cross-sectional perspective view taken along section 17-17 of FIG. 18 of a second preferred embodiment;

[0079] FIG. 18 is a top perspective view of a second preferred embodiment;

[0080] FIG. 19 is a front upper perspective view of a third preferred embodiment;

[0081] FIG. 20 is a front exploded perspective of the third preferred embodiment of FIGS. 18 and 19 showing its elements in an unassembled state;

[0082] FIG. 21 is a schematic diagram of an electrical system of the third preferred embodiment of FIG. 19 utilizing a bidirectional DC lift motor;

[0083] FIG. 22 is a schematic diagram of an electrical system of the third preferred embodiment of FIG. 19 utilizing a bidirectional synchronous lift motor that reverses when stalled;

[0084] FIG. 23 is a front perspective view of a lifting mechanism from the third preferred embodiment of FIG. 19, with a basket lifting hook in an upper position;

[0085] FIG. 24 is a front perspective view of the lifting mechanism of FIG. 23, with the basket lifting hook in a lower position;

[0086] FIG. 25 is a side exploded perspective view of a food holding basket and a control box with an outer base cover and oil containment bucket 218 removed, taken from the third preferred embodiment of FIG. 19;

[0087] FIG. 26 is a front cross-sectional view through section 26-26 of the third preferred embodiment of FIG. 19, illustrating the food holding basket in its lower position;

[0088] FIG. 27 is a front cross-sectional view through section 26-26 of the third preferred embodiment of FIG. 19, illustrating the food holding basket in its upper and tilted position;

[0089] FIG. 28 is a rear exploded perspective view of the lifting mechanism of the third preferred embodiment of FIG. 19;

[0090] FIG. 29 is a rear perspective view of the third preferred embodiment of FIG. 19 with an outer base cover removed;

[0091] FIG. 30 is a rear perspective view of the third preferred embodiment of FIG. 19 with an outer base cover removed, and illustrating a drainage hose, hose plug, and basket position sensors switch;

[0092] FIG. 31 is a rear perspective view of the third preferred embodiment of FIG. 19 with an oil containment bucket removed, and the food holding basket is in its upper position;

[0093] FIG. 32 is a rear perspective view of the third preferred embodiment of FIG. 19 with the oil containment bucket removed, and the food holding basket is in its lower position;

[0094] FIG. 33 is an upper perspective view looking into the third preferred embodiment of FIG. 19, with food holding basket in its upper position;

[0095] FIG. 34 is cross-sectional side view of the third preferred embodiment of FIG. 19, with the food holding basket in its upper position;

[0096] FIG. 35 is a front upper perspective view of the third preferred embodiment of FIG. 19, with a lid in a raised stable position for loading and unloading food;

[0097] FIG. 36 is a front upper perspective view of the third preferred embodiment of FIG. 19, with the lid removed from the rest of the device;

[0098] FIG. 37 is a plan view of a poultry product in a round container;

[0099] FIG. 38 is a plan view of a poultry product in a rectangular container with radiused corners;

[0100] FIG. 39 is a forward upper perspective view of a fourth preferred embodiment of the present inventions, with a lid shown in its inverted storage position;

[0101] FIG. 40 is a forward upper perspective view of the fourth preferred embodiment of FIG. 39, with the lid shown in a raised stable position for loading and unloading food;

[0102] FIG. 41 is a forward upper perspective view of the fourth preferred embodiment of FIG. 39, with the lid shown in a closed position for cooking;

[0103] FIG. 42 is a partial rear upper perspective view of the fourth embodiment of FIG. 39;

[0104] FIG. 43 is a cross-sectional side view taken along section 343-343 through the fourth preferred embodiment of FIG. 39, with a food support platform in its raised position;

[0105] FIG. 44 is a cross-sectional side view taken along section 344-344 through the fourth preferred embodiment of FIG. 39, with the food support platform in its raised position;

[0106] FIG. 45 is a cross-sectional side view taken along section 345-345 through the fourth preferred embodiment of FIG. 39, with the food support platform in its raised position;

[0107] FIG. 46 is a cross-sectional side view taken along section 345-345 through the fourth preferred embodiment of FIG. 39, with the food support platform in its lowered position;

[0108] FIG. 47 is a forward perspective view of a lifting mechanism and food support platform of the fourth preferred embodiment of FIG. 39;

[0109] FIG. 48 is an exploded view of the lifting mechanism of FIG. 47 illustrating its elements in an unassembled state;

[0110] FIG. 49 is a rear lower perspective view of the fourth preferred embodiment of FIG. 39;

[0111] FIG. 50 is a rear lower perspective view of the fourth preferred embodiment of FIG. 39, with a lower body removed;

[0112] FIGS. 51A and 51B are cross-sectional views taken of detail sections 330 and 332 of FIG. 52;

[0113] FIG. 52 is a cross-sectional side view of the fourth preferred embodiment of FIG. 39, showing the lid in both the closed position (solid lines) and in the tilted back open position (phantom);

[0114] FIG. 53 is a forward upper perspective exploded view of the fourth preferred embodiment of FIG. 52 illustrating all of the elements in an unassembled state;

[0115] FIG. 54 is a forward upper perspective view of a hand powered version of the fourth preferred embodiment of FIG. 52;

[0116] FIG. 55 is a forward upper perspective view of the hand powered version of the fourth preferred embodiment of FIG. 52, with the lid and lift mechanism removed;

[0117] FIG. 56 is a schematic diagram of an electrical system of the fourth preferred embodiment of FIG. 52;

[0118] FIG. 57 is a forward upper perspective view of an alternative cable lifting mechanism for the fourth preferred embodiment of FIG. 52.

[0119] FIG. 58 is a forward perspective view of an exemplary embodiment of the present inventions with its lid on and its food support platform in its lowered cooking position.

[0120] FIG. 59 is identical to FIG. 58 except that FIG. 59 shows the embodiment with its food support platform in its partially raised position.

[0121] FIG. 60 is identical to FIGS. 58 and 59 except for showing the food support platform in its fully raised position and its lid raised but not removed.

[0122] FIG. 61 shows an exploded perspective view of the exemplary embodiment shown in FIGS. 58 through 60.

[0123] FIG. 62 shows a forward perspective view of another exemplary embodiment of the present inventions.

[0124] FIG. 63 shows the embodiment illustrated in FIG. 62 with its lid and control box cover removed.

[0125] FIG. 64 shows an overhead perspective of the embodiment illustrated in FIGS. 62 and 63 with its lid removed and its food support vessel in its raised floating position.

[0126] FIG. 65 is identical to FIG. 64 except showing the food support vessel mostly filled with cooking liquid and in its lowered cooking position.

[0127] FIG. 66 is a section perspective view of the embodiment shown in FIG. 62 as indicated in FIG. 62, with cooking liquid filled into outer bucket shaped cooking vessel 554 which in turn floats upward inner food support vessel 558.

[0128] FIG. 67 is identical to FIG. 66 except showing the food support vessel mostly filled with cooking liquid and thus in its lowered cooking position.

[0129] FIG. 68 is a forward perspective view of the exemplary embodiment shown in FIGS. 62 through 67 showing how the embodiment would look when draining or filling the cooking vessel with cooking liquid from an external container.

[0130] FIG. 69 is an exploded perspective view of the embodiment shown in FIGS. 62 through 68.

[0131] FIG. 70 is a forward perspective view of another exemplary embodiment of the present inventions.

[0132] FIG. 71 is identical to FIG. 70 except the exemplary embodiment has its lid and control box cover removed and portions of the forward walls of both the inner cooking vessel as well as the outer enclosure have been removed. The food support platform is in its raised food loading/unloading position.

[0133] FIG. 72 is identical to FIG. 71 except that it shows the food support platform in its lowered cooking position.

[0134] FIG. 73 is an exploded perspective view of the exemplary embodiment shown in FIGS. 70 through 72.

[0135] FIG. 74 is a forward perspective view of exemplary embodiment 706 with its food support platform in its uppermost position for food loading.

[0136] FIG. 75 is identical to FIG. 74 except lid 750 is closed and food support platform 704 is in its middle position.

[0137] FIG. 76 is identical to FIG. 75 except food support platform 704 is in its lower most position for cooking.

[0138] FIG. 77 is a forward perspective of the embodiment 706 showing siphon 790 used for cooking liquid drainage and showing fry pot 793 which is used for cooking smaller food articles. Fry pot 793 is shown removed and above embodiment 706.

[0139] FIG. 78 is a forward perspective view of first exemplary siphon 790.

[0140] FIG. 79 is a forward prospective view of alternative siphon embodiment 791.

[0141] FIG. 80 is an exploded forward prospective view of embodiment 706.

[0142] FIG. 81 is a rear perspective view of a portion of embodiment 706 with lid 750 detached from outer enclosure 712.

[0143] FIG. 82 is identical to FIG. 81 except lid 750 is shown in its open position and attached to outer enclosure 712.

[0144] FIG. 83 is identical to FIG. 82 except lid 750 is shown in its closed position.

[0145] FIG. 84 is a forward perspective view of a portion of embodiment 706 with lid 750 in its closed position.

[0146] FIG. 85 is a forward perspective you have a portion of embodiment of a 06 with partial explosions of food support platform 704.

[0147] FIG. 86 is a forward perspective view of embodiment 706 with food support platform 704 removed and partially exploded.

[0148] FIG. 87 is a rear perspective view of embodiment 706 with lid 750 closed and food support platform 704 in its lowermost cooking position.

[0149] FIG. 88 is a forward perspective view showing embodiment 706 being stored in a below countertop cabinet.

[0150] FIG. 89 is a forward perspective view of embodiment 706 in use, with a user gripping right handle knob 726

and left handle knob 728, and with food support platform 704 fully raised for food loading, and with lid 750 in its open position.

[0151] FIG. 90 is a forward perspective view of an additional exemplary embodiment with its lid 900 raised, and its food support assembly 910 removed, and the view looking down into the embodiment's cooking vessel 902.

[0152] FIG. 91 is a forward perspective view of the exemplary embodiment shown in FIG. 90 with its lid 900 raised and its food support assembly 910 in place in its intermediate raised position.

[0153] FIG. 92 is similar to FIG. 91 except lid 900 is lowered.

[0154] FIG. 93 is similar to FIG. 92 except food support assembly 910 is fully lowered.

[0155] FIGS. 94A, 94B, and 94C are partial side perspective views of the exemplary embodiment shown in FIGS. 90 through 93 and showing close-ups of various embodiment details.

[0156] FIG. 95 is similar to FIG. 91 except food support assembly 910 is fully raised and tilted forward for food draining.

[0157] FIG. 96 is similar to FIG. 91 except the perspective view is taken from the right side.

[0158] FIG. 97 is similar to FIG. 96 except food support assembly 910 is removed.

[0159] FIG. 98A is a forward exploded perspective view of the embodiment shown in FIGS. 90 through 98.

[0160] FIG. 98A—upper enlarged, is a close-up of the upper portion of FIG. 98A.

[0161] FIG. 98A—lower enlarged, is a close-up of the lower portion of FIG. 98A.

[0162] FIG. 98B is a rear exploded perspective view of the embodiment shown in FIGS. 90 through 98.

[0163] FIG. 98B—upper enlarged, is a close-up of the upper portion of FIG. 98B.

[0164] FIG. 98B—food support enlarged, is a close-up of FIG. 98B showing a portion of the right side of the food support assembly 910.

[0165] FIG. 98B—lower enlarged, is a close-up of the lower portion of FIG. 98B.

[0166] FIG. 99 is a forward exploded perspective view of components used to empty liquid from cooking vessel 902.

[0167] FIG. 100 is a forward perspective view of a subset of the components shown in FIG. 99.

[0168] FIG. 101 is a section view taken through FIG. 100 as indicated in FIG. 100.

[0169] FIG. 102 is a lower rear perspective view of the embodiment shown in FIGS. 90 through 98.

[0170] FIG. 103 is similar to FIG. 102 except prop member 906 is lowered, and lid 900, control box. 912 and food support assembly 910 are removed to facilitate emptying cooking vessel 902 of cooking liquid for cleaning for other purposes.

[0171] FIG. 104 is a forward perspective view of the components shown in FIG. 99 except outer enclosure 918 is tilted forward at an angle by prop member 906.

[0172] FIG. 105 is a plan section view, taken as indicated in FIG. 93, of large fowl 908 fitted within the lower portion of cooking vessel 902.

[0173] FIG. 106 is a forward perspective view of automated control box 916 with its forward walls ghosted out to reveal inner details.

[0174] FIG. 107 is an exploded view of an exemplary automated version of the embodiment shown in FIGS. 90 through 98.

[0175] FIG. 108 is a side perspective view of the embodiment shown in FIG. 107 with food support assembly 910 raised and level.

[0176] FIG. 109 is similar to FIG. 108 except that food support assembly 910 is lowered and level.

[0177] FIG. 110 is similar to FIG. 108 except that food support assembly 910 is raised and tilted forward.

[0178] FIG. 111 is similar to FIG. 110 except that food support assembly 910 is lowered and is set to raise in a tilted position.

[0179] FIG. 112 is a forward perspective view of food containment basket 911.

[0180] FIG. 113 is a forward perspective view of two food containment baskets 911, 911A stacked on top of one another in a first widely spaced stacking arrangement.

[0181] FIG. 114 is similar to FIG. 113 except food containment baskets 911, 911A stacked on top of one another in a second closely spaced stacking arrangement.

[0182] FIG. 115 is a forward exploded perspective view of three food containment baskets 911, 911A, 911B and including food support assembly 910

[0183] FIG. 116 is a forward perspective view including control box 912 and enclosed heatsink 914.

[0184] FIG. 117 is an upper perspective exploded view of the device shown in FIG. 91, but only showing control/heating assembly 936, cooking vessel 902, and outer enclosure 918.

[0185] FIG. 118A and FIG. 118B is a forward perspective view showing how latch lock 962 operates.

[0186] FIG. 119 is a forward perspective view showing overflow reservoir 996.

[0187] FIG. 120 shows another preferred embodiment which is different from the preferred embodiment shown in FIG. 136 and earlier. To show this embodiment, a forward perspective of its food support 2020 is illustrated in FIG. 137, a forward perspective of the assembled unit is shown in FIG. 138, and three rear perspectives are illustrated in FIGS. 120, 139 and 140.

[0188] FIG. 121 is a forward perspective view of an exemplary embodiment of the present inventions.

[0189] FIGS. 122 through 126 show the same exemplary embodiment illustrated in FIG. 121 in different use positions including: with its food support 1150 partially lowered into

cooking vessel 1152 with lid 1160 in its raised position (FIG. 122); with its lid 1160 partially lowered (FIG. 123); with its lid 1160 fully lowered, but with its food support still raised above the cooking liquid in cooking vessel 1152 (FIG. 124); with its lid 1160 fully lowered, but with its food support in its lower most position where food resting on food support 1150 is immersed in cooking liquid (FIG. 125); with its lid 1160 fully lowered, but with its food support in its upper and tilted position for draining cooking liquid from food resting on the food support (FIG. 126).

[0190] FIG. 127 shows a section view through the embodiment shown in FIG. 121 as indicated in FIG. 121. FIG. 127 also shows a detail view of an alternative lid latch and shows food support 1150 in its tilted forward drainage position, and in its partially raised position which is clear of the cooking liquid, and in its fully lowered position.

[0191] FIGS. 128 through 132 show sections through the exemplary embodiment illustrated in FIG. 121, as indicated in FIG. 121. Each section shows a different use position. FIG. 128 shows the embodiment with food support 1150 removed and lid 1160 in its open position. FIG. 129 is identical to FIG. 128 except that food support 1150 has been partially lowered into cooking vessel 1152. FIG. 130 is identical to FIG. 129 except lid 1160 has been partially lowered. FIG. 131 is identical to FIG. 129 except lid 1160 is fully lowered. FIG. 132 is identical to FIG. 131 except food support 1150 is in its lower most position.

[0192] FIGS. 133 through 136 illustrate yet another exemplary embodiment which is different from those described in earlier figures. FIGS. 133, 135 and 136 show the assembled exemplary embodiment respectively in a forward perspective (FIG. 133), and in two lower rear perspectives (FIGS. 135 and 136).

[0193] FIG. 134 shows a forward perspective of just the food support assembly used in the embodiment illustrated in FIGS. 133, 135, and 136.

[0194] FIGS. 137 through 140 show another preferred embodiment which is different from the preferred embodiment shown in FIG. 136 and earlier. To show this embodiment, a forward perspective of its food support 2020 is illustrated in FIG. 137, a forward perspective of the assembled unit is shown in FIG. 138, and three rear perspectives are illustrated in FIGS. 120, 139 and 140.

#### DETAILED DESCRIPTION OF THE INVENTION

[0195] Cooking devices, constructed in accordance with the principles of this invention, are generally configured to facilitate the cooking of a food article by placing the food article into contact with a hot cooking liquid, e.g., oil or hot water. The devices are specifically constructed to facilitate this process and comprise an internal cooking cavity designed to accommodate a volume of a cooking liquid and the desired food article. A heating source is contained in the device and is positioned adjacent the cooking cavity to heat the cavity and its contents. A lid is positioned over an opening of the cooking cavity and is transparent to permit viewing of the food article being cooked.

[0196] The device can be configured having a food support vessel or food basket disposed therein that can be raised and/or lowered automatically or manually to remove the

food article from the cooking liquid or place the food article into the cooking liquid, respectively. In an example embodiment, the device can be automatically controlled to provide a desired cooking temperature and/or to place and/or remove the food article into the cooking liquid to achieve a desired cooking effect.

[0197] Cooking devices, constructed in accordance with principles of the invention can be configured having a number of different embodiments. Accordingly, while a number of example embodiments of the cooking device are disclosed and illustrated herein, it is to be understood that other embodiments of cooking devices constructed according to principles of this invention not expressly disclosed or illustrated are also intended to be within the scope of this invention.

#### First Embodiment

[0198] FIGS. 1 to 12 illustrate a first embodiment cooking device 21 constructed in accordance with the principles of this invention. The cooking device 21 generally comprises an outer or external housing 22 that is sized and shaped to provide an inner cavity to accommodate the different elements of the device. The outer housing 22 can be formed from structurally rigid materials such as metals, plastics and the like and defines an outer structure of the device. The outer housing 22 comprises a wall structure that extends upwardly from a base or bottom portion that is positioned adjacent a device supporting surface, e.g., a table or kitchen counter, and that extends axially a distance to an open end. In an example embodiment, the outer housing is capped on its bottom end by a base 28 (as best shown in FIG. 12).

[0199] The outer housing 22 can be configured including one or more vents to facilitate providing a more user-friendly cool outer surface. In an example embodiment, the outer housing 22 is constructed having convection ventilation of hot air that is disposed within the annular space that is formed between the inside surface of the outer housing and the outside surface of the cooking vessel (24 described below). Specifically, the outer housing is constructed comprising a plurality of vent openings 86 disposed through the base 28, and vents 88 disposed through the wall surface of the outer housing 22.

[0200] A lid 20 is positioned over a top end of the device 21 and is located adjacent the open end of the outer housing 22. In an example embodiment, a portion of the lid is attached to the device to facilitate movement of the lid from an open to a closed position without being removed therefrom. In an example embodiment, the lid is configured to close against a cooking vessel 24 that is disposed within a cavity ## of the outer housing 22. The lid 20 is attached to the device 21 in a manner that permits it to both move axially within the device, to seal and unseal with the cooking vessel 24, and to pivot away from the open end of the outer housing 22, to permit for the loading and unloading of food into and out of the cooking device. In an example embodiment, the lid 20 is attached to the device through a slide and hinge mechanism 78 (as best shown in FIG. 3). The lid may be rested in an open position (as shown in FIG. 3) to make it more convenient to use the device.

[0201] The cooking vessel 24 is statically secured within the cavity of the outer housing and is made from a structural material such as metal, metal alloy and the like that is

capable of retaining a rigid structure while containing a volume of heated cooking liquid such as oil or water. In an example embodiment, the cooking vessel is formed from a metallic material. The cooking vessel is configured having a wall surface that is sized and shaped to fit concentrically within the outer housing cavity. The cooking vessel as a closed end that is positioned adjacent the outer housing base, and has an open end that is positioned adjacent the outer housing open end.

[0202] A food support vessel 26 is disposed within the device 21 and, more specifically, is removably disposed within the cooking vessel 24. The food support vessel 26 comprises a generally continuous wall structure that is sized and shaped to fit concentrically within the cooking vessel, and that extends axially from a base or floor 32 to an open end. The food vessel floor 32 comprises a plurality of holes or perforations 30 that extend therethrough that are sized and shaped to facilitate the passage of the desired cooking liquid from the cooking vessel and into the food vessel.

[0203] The food support vessel 26 is sized to permit axial movement within the cooking vessel 24 to facilitate moving the food vessel axially upwards and downwards therein. As better described below, the food support vessel 26 is configured to contain one or more desired food articles therein while the food article is being cooked within the cooking vessel, and while the food is being lowered into a cooking position and removed from a cooking position within the cooking vessel 24.

[0204] In an example embodiment, the cooking vessel 24 and food support vessel 26 are both configured having a slightly elongate cylindrical configuration, thus being better able to accommodate and being more closely contoured to fit an exterior of a turkey. Configuring the cooking vessel and food support vessel in this manner enables the device to more efficiently accommodate a turkey without wasted space, thereby helping to maximize counter space, as well as more efficiently cook a turkey without wasted cooking liquid and the energy and time necessary to heat the same, when compared to a simple cylindrical cooking device.

[0205] The lid 20 of the device is placed into an open position to allow for the loading of one or more food articles into the food support vessel 26. The lid is designed to move from an open position by hingedly swinging over the open end of the food support vessel 26, and then sliding axially towards the food support vessel 26 to cap and seal the cooking vessel 24.

[0206] In operation, the lid 20 is opened to exposing the food support vessel 26. The desired cooking liquid, e.g., oil, poured into the open end of the food support vessel 26 and runs through the holes 30 in the food support vessel floor 32. The cooking liquid is provided until a desired cooking volume is achieved. In an example embodiment, the floor of the food support vessel includes a viewing depression 34 disposed therein that enables viewing of the cooking liquid level within the device. Viewing the depression 34, located in and projecting below the bottom of food support vessel 26, by filling with oil before the acceptable oil level is exceeded, helps to ensure a user will not overflow, or underfill, the device with water for steaming, or with cooking oil for deep fat frying. Alternatively, a light conducting material, such as glass or plastic, may be formed to perform the same purpose.



[0207] The device includes a trough 64, formed at least along a lower forward outer portion of outer housing 22 that operates to catch and contain any cooking liquid that may spill when introducing it into the device or that overflows from the device for any reason. Accordingly, the trough 64 helps to prevent the spillage of cooking liquid from the device onto and potentially causing damage to a supporting substrate surface.

[0208] FIG. 5 shows the device after a desired food article 44 or food articles have been placed in the food supporting vessel 26. The food supporting vessel 26 is placed in a raised position with cooking vessel 24, and the lid 20 is retracted back away from the opening of the food supporting vessel 26. Once the food article is loaded within the food supporting vessel 26, the lid 20 is pivoted towards and placed over open end of the food supporting vessel as best shown in FIG. 6. Once positioned over the open end, the lid 20 is then axially moved into the food supporting vessel 26 and is closed into position to cap the cooking vessel 24. In an example embodiment, the lid is secured into place in its closed position by the use of one or more latches. In an example embodiment, the latches 36 are positioned along the device outer housing at diametrically opposed locations along the open end, and the latches can be operated to release the lid by latch switches positioned along an outside surface outer housing.

[0209] In an example embodiment, the device can include a timer that is configured to permit a user to set a desired cooking time. In a preferred embodiment, the timer is configured so that the set cooking time includes the time necessary to preheat the cooking liquid. Timer only control, where an adjustable thermostat is not used, may be desired for the purpose of making the cooking process simpler and more convenient.

[0210] The device 21 further includes means for lowering and raising the food support vessel 26 within the cooking vessel. In an example embodiment, such lowering and raising means is provided in the form of a motor lifting and lowering mechanism 42. In an example embodiment, the motor lifting and lowering mechanism 42 is activated by an electric circuit 40, and is configured to lower the food support vessel 26 further down into cooking vessel 24 (as shown in FIG. 8). The electric circuit can be configured to operate the mechanism 42 by user input and/or in conjunction with the timer. For example, the electric circuit can be configured to operate the mechanism to lower the food article into the cooking liquid when the cooking liquid has reached the desired cooking temperature.

[0211] In FIGS. 7 and 8, the food article being cooked is shown as 44 and the cooking liquid surface is represented by dotted straight line 46. Accordingly, FIGS. 7 and 8 illustrate how the motor lifting and lowering mechanism 42 operates to place the food article into contact with the cooking liquid, and how the cooking liquid is displaced within both the cooking vessel and the food supporting vessel to cover the food article to enable cooking of the same.

[0212] In such example, when the timer has reached the set cooking time, it is configured with the electric circuit 40 to operate the motor lifting and lowering mechanism to raise the food support vessel 26 and remove the food article out of the cooking liquid. As shown in FIG. 7, the food is then suspended above the cooking oil where the food may drain.

In an example embodiment, the lifting and lowering mechanism 42 can include a lifting bell mechanism 90 that is configured to ring when the food placed within the food support vessel is being raised or lowered in the device, thereby operating to provide an audio alert to the user to verify that these operations are carried out correctly.

[0213] An example electrical circuit utilizing a preset thermostat, shown as circuit 40 in FIG. 13, used in combination with food lifting and lowering 42, helps ensure that the food article is lowered into the cooking liquid immediately or soon after the cooking liquid has reached a temperature that is sufficient to cook the food. Once the food article is placed into the device and the thermostat is set at the desired cooking temperature, the remaining steps of heating the cooking liquid to the cooking temperature, lowering the food article into the cooking liquid, cooking the food article for a desired amount of time, and removing the cooked food article from the cooking liquid, is all done automatically, and without the need for user intervention. Thus, the electrical circuit and lifting and lowering mechanism combination helps to ensure that the food properly cooked, removed from the cooking liquid, and drained, all at the proper time, as set by the user, and all again without the need for user intervention after start up.

[0214] Thus, the circuit and lifting mechanism greatly simplifies and makes safer the cooking process. Instead of having to use the four-step process described earlier, where the user must first preheat oil, then come back and put the food into the heated oil, and then return a third time to take the food out from the oil, and finally return a fourth time after the food has been drained of excess oil to serve the food; the user of the present device must only put the food and the oil into the device, activate the circuit by setting the timer 38, and then return to serve the food after the food has been automatically cooked and drained.

[0215] The cooking liquid can be left in the device 21 for repeated use or may be removed, depending upon expected usage and operator desires. In an example embodiment, the device 21 is constructed comprising a drain tube or conduit 48 (best shown in FIG. 3) that is mounted in storage brackets 50 and 52 that are positioned along an outside surface of the outer housing 22. The drain tube has a first end that extends through an opening in the outer housing and that is in communication with cooking liquid disposed within the cooking vessel 24. The opposite end of the drain tube is closed by the use of an appropriate closing member, such as a valve, plug or the like. In an example embodiment, the drain tube end opposite from the cooking vessel is sealed by a plug 54 that is pressed into the end of tube. The drain tube can be formed from conventional materials that can be flexible and that are able to withstand the temperature of the cooking liquid. Suitable materials for forming the drain tube include.

[0216] In an example embodiment, the drain tube runs upwardly a distance along the outside surface of the outer housing 22 from the opening near the base of the outer housing to a height that is above the highest surface level of the cooking liquid, i.e., as measured when the food article is lowered therein for cooking. The drain tube then has a 180 degree bend at this point along the outer housing so that its end opposite the end disposed within the outer housing opening is positioned adjacent the outer housing base. The

drain tube 48 is positioned in this manner along the outer housing outside surface to prevent unwanted leakage of cooking liquid therefrom from gravity effect.

[0217] When the cooking liquid is to be removed from the device, the drain tube 48 is removed from the storage brackets 50 and 52, and the plug is removed from the tube end. The end of the tube 48 is then placed into communication with an appropriate storage or disposal device. The tube may also be configured having a pinch valve 58 positioned therealong in addition to or in place of the plug 54. The plug 54 and pinch valve 58 are optional redundant valving mechanisms, which may augment the gravity valve provided by drain tube 48 when it is stored on brackets 50 and 52. The cooking liquid is then allowed to drain from the device by gravity by moving the disposal container, and the drain tube, to a position below the surface level of the cooking liquid, e.g., by placing the disposal container onto the floor. In an example embodiment, the storage or disposal container can be configured as illustrated in FIG. 14.

[0218] FIGS. 14 to 16 illustrate a filtering mechanism 60 that can be used in conjunction with the device 21 for the purpose of filtering the cooking liquid removed from the device for reuse within the device or for storage. The filtering mechanism 60 comprises an upper filter housing 61 having a nipple 59 that projects outwardly therefrom, and that is sized and configured to permit connection to an end of the drain tube 48. The upper filter housing 61 is sealed to a lower filter housing 63 with the two housings forming an enclosure that contains a filter 65. All liquid entering the filter enclosure via the nipple 59 must therefore pass through the filter 65 before exiting out of the bottom of lower filter housing 63.

[0219] The lower filter housing 63 includes a plurality of surface features 75 that are configured to provide a secured fit with the storage or disposal container 56 and/or to allow air to escape from the container 56 during the cooking liquid draining process to prevent unwanted pressure build up within the container that could otherwise impair cooking liquid drainage. In a preferred embodiment, the surface features 75 are provided in the form of ribs that extend circumferentially around the lower filter housing 63.

[0220] The filtering mechanism additionally includes means for shutting off the flow of cooking liquid there though when the level of cooking liquid in the disposal or storage container 56 reaches a predetermined maximum level. In an example embodiment, the means for shutting off flow is provided in the form of a float valve that is embodied in the form of an inverted frustum-conical shaped filter stopper 67 that normally hangs in an open position allowing liquid flow thereby when the cooking liquid level within storage or disposal container 56 is below the bottom of filter assembly 60 as exemplified by dotted line 71 (as best shown in FIG. 16).

[0221] When the cooking liquid level in the container 56 rises above filter stopper 67's lower rim (as shown by the cooking liquid level 73 in FIG. 16), further transmission of liquid through filter assembly 60 is blocked by the upward movement of the filter stopper 67, floating up on higher cooking liquid level 73, blocking the cooking liquid from passing through the filtering mechanism, as indicated by as dotted outline 69. This, therefore, operates to prevent the storage or disposal container 56 from becoming overfilled.

The cooking liquid that is filtered through the filtering mechanism 60 can be reused in the device, and such filtering of the cooking liquid operates to extend the duration during which the same cooking liquid can be used without replacement.

[0222] In an example embodiment, the device 21 is configured to heat the cooking liquid contained therein by use of an electric heating element or coil 76 (as best shown in FIG. 4). In an example embodiment, a very efficient electric immersion heater, in the form of the heat coil 76, is used to bring the cooking liquid to a desired cooking temperature in minimum amount of time while simultaneously conserving electricity. This same heater can conveniently be unplugged and removed from the cooking vessel 24 to facilitate cleaning. Thereby, avoiding any potential damage or safety issue that may exist by exposing any electrical components to water during cleaning of the device.

[0223] Power can be supplied to the device by conventional household AC electricity via a conventional household electrical outlet. In a preferred embodiment, power is supplied into the device through the use of a plug 62 that is magnetically coupled to the device. The use of such a magnetically coupled plug 62 is desired for the purpose of permitting an easy release of the power supply cord from the device should the power supply cord be pulled. This feature provides an additional level of safety from the device unit being inadvertently moved or tipped due to an unintentionally stumbling or pulling on the cord.

[0224] The above-described and illustrated first embodiment cooking device has been described for cooking foods using a cooking liquid. Cooking liquids useful with the device are understood to be cooking oil and water. Thus, it is to be understood the device can be operated using either cooking oil or water using all of the same mechanisms described above to provide the same advantages noted above.

[0225] In an example embodiment, the device can be configured having an internal venting system that is engineered to reduce the possibility of foam overflowing from the cooking vessel 24. The venting system is operated to convert any cooking liquid foam formed in the device back into liquid cooking oil, and is provided in the form of a skirt 66 that extends downwardly a distance from an inside surface of the lid 20 and that is sized and configured to fit concentrically within the food support vessel 26 when the lid is in a closed position. The lid skirt 66 is basically a wall structure that extends a predetermined depth within food support vessel and that forms an annular space therebetween. In an example embodiment, the annular space is sufficient to allow for the free flow of cooking liquid therebetween.

[0226] The lid skirt 66 includes a plurality of vent holes 68 disposed therethrough and that are provided adjacent a top portion of the skirt where it meets the lid. Any foam that is formed in the device during the cooking process is forced by cooking pressure through the annular space between the skirt 66 and the food support vessel 26 wall, and optionally also through lid skirt vent holes 68, and this operation operates to convert the foam back to liquid that is channeled back into the device.

[0227] As best shown in FIG. 5, in an example embodiment, the outer housing 22, cooking vessel 24, and food

support vessel 26 are all configured having an inclined structure that is tilted towards a front of the device 21, and thus that is inclined towards the user. Such an inclined configuration is desired for the purpose of aiding the user in placing foods into and removing foods from the device. The inclined configuration of the outer housing 22, the cooking vessel 24, and the food support vessel 26 also makes the device easy to look into, without having to stand up directly over the device, thereby enabling a viewer to more easily view the food article being cooked.

[0228] To further facilitate this ease-of-viewing feature, the lid 20 is constructed comprising a large transparent window 70, which can be made from glass or plastic or the like.

[0229] In an example embodiment, the lid is configured to help prevent steam buildup on the inside surface of the lid glass through the inclined orientation of the lid on the device, and thus help a user to view the food being cooked. Additionally, the inclined placement of the lid and its window, by facing the user more directly than a horizontal window, also facilitates a user looking into cooking vessel 24 to view the food being cooked. In an example embodiment, the glass window 70 occupies about 80 percent of the lid upper surface, thereby also operating to provide an improved level of food viewing within the device.

[0230] In an example embodiment, a thermostat 80 is attached to the outside bottom surface of the cooking vessel 24, and its placement there may operate to facilitate cleaning of the cooking vessel as well as provide inexpensive manufacture. The thermostat 80 may be set at the factory for a fixed temperature or may be user adjustable. A thermal fuse 82 may also be attached to the exterior of the cooking vessel 24 to simplify manufacture and enhance safety.

[0231] As best shown in FIG. 1, the device may be constructed having handles 84 located on sides of the outer housing 22, to assist the user in conveniently and safely moving the device 21.

[0232] If desired, the internal parts of the device, such as the cooking vessel 24 and foods support vessel 26, can be formed having a nonstick coating for the purpose of facilitating cleaning and to prevent the food articles from adhering thereto.

[0233] Each of the embodiments described herein has the potential to deep fat fry, or steam, or roast, or heat foods. They may also function as a roaster, similar to those made today by the company Nesco, with virtually all of the advantages that company's product line offers. This includes not only roasting and cooking solid food, including meats and vegetables, but also making soups and other liquid foods.

#### Second Embodiment

[0234] FIGS. 17 and 18 illustrate an alternative or second embodiment of the cooking device 72 as constructed in accordance with the principles of the invention. Some features from the first embodiment cooking device described above and illustrated in FIGS. 1 to 13 are incorporated into second alternative embodiment 72, and will be obvious to those knowledgeable in the art.

[0235] The second embodiment cooking device 72 comprises a food support vessel 92 that is disposed within a

cooking vessel 94. As best shown in FIG. 18, in an example embodiment, the cooking vessel 94 and/or the food support vessel 92 are configured having one end that is slightly wider than an opposite end. In a preferred embodiment, the cooking vessel and food support vessel are each configured having one end slightly wider than an opposite end to better and more efficiently accommodate placement of a turkey therein. Configuring the cooking vessel and food support vessel in this manner helps reduce the overall size of the cooking devices, reduce countertop space usage, reduce storage space, reduce oil usage and thus oil warm-up time. In particular cooking vessel 94 and food support vessel 92, by being broad at one end to accommodate the turkey's breast when placed horizontally therein, minimizes the volume needed for cooking. Additionally, the placement of a turkey horizontally within the cooking device also helps to minimize cooking liquid usage during the cooking process, and thus reduce cooking liquid heating times.

[0236] As illustrated in FIG. 17, the food support vessel 92 is moved within the cooking vessel between a lower position 93 (shown in phantom) and an upper position 95 by a lift mechanism 74 that is similar to the lift mechanism 42 described above for the first embodiment cooking device. The lift mechanism 74 for this second embodiment includes an added track 99 that is positioned outside of the food support vessel and that is provided to restrict travel of the food support vessel and its contents to low-friction vertical linear movement only, with no side to side component. When the food support vessel 92 is in the upper position 95, it is inclined by gravity pulling on off-gravitational-center single pivot support 97 fixed on the side of food support vessel 92 to allow oil to drain from the food support vessel and its food contents.

#### Third Embodiment

[0237] FIGS. 19 to 36 illustrate a third embodiment cooking device 200, constructed according to principles of the invention. This third embodiment cooking device shares some of the advantages and features of the first two embodiment cooking devices disclosed above. The third embodiment cooking device 200 generally includes an outer housing 202 having a base support 210 positioned at a closed outer housing end. The closed base support 210 may comprise a plurality of holes disposed therethrough to facilitate a convective flow of air within the outer housing.

[0238] A cooking vessel or cooking liquid bucket 218 is statically disposed within a cavity of the outer housing 202 and is sized and configured to accommodate a volume of cooking liquid therein. The cooking vessel 218 is supported by the outer housing base support 210. A food support vessel or food holding basket 220 is disposed within the cooking vessel 218, and an oil straining screen 220 is interposed between the food support vessel 218 and the cooking vessel. As shown in FIG. 20, the food support vessel 218 includes an oil level viewing port 272 disposed therethrough to help the user ascertain how much oil is in, or needs to be added to, the cooking vessel 218.

[0239] The oil straining screen 258, which is suspended below the food support vessel 220, strains out impurities in the oil, which can operate shorten its useful life. This straining process takes place every time the food support vessel 220 is raised from the oil. Impurities are easily

cleaned from straining screen **258** by placing it in a dishwasher, or by washing it in a sink, or by other means. The oil straining screen **258** may include any appropriate filtering material. One particularly advantageous reusable filtering construction comprises a stainless steel screen with between 15 and 50 wires per inch.

[0240] An immersion heat coil **222** is disposed within the cooking vessel, positioned adjacent a bottom portion of the cooking vessel, and is interposed between the bottom portion of the cooking vessel **218** and the oil straining screen **220**. The immersion heat coil **222** is connected to a control box **204**. The control box **204**, including the heat coil **222**, is removably attached to a portion of a rear wall surface of the outer housing **202**, positioned adjacent the open end of the outer housing and positioned generally in a central position along the rear wall surface, via a mounting bracket **262**. A conventional multi-prong pin-type plug and socket can be used to electrically connect the control box **204** to the base of the cooking device, with both the plug and the socket being rigidly mounted, one to control box **204**, and the other to the cooking device outer housing. Such plugs and sockets are common and thus are not illustrated herein.

[0241] When the control box **204** is lifted from the outer housing **202**, the flow of electricity to the control device and its internal electrical components is cut off by the plug and socket arrangement described above being consequently disconnected. The control box **204** is configured so that it can be lifted clear of the outer housing **202** to allow for easier cleaning of the cooking vessel **218** without the presence of immersion heat coil **222** and any of the other electronic components attached to and removed with the control box **204**. The control box is constructed so that most of mounting bracket **262** and the immersion heat coil **222** are disposed within the cooking vessel **218** when control box **204** is mounted to the outer housing **202**.

[0242] A lid **206** is disposed over the open ends of the outer housing **202** and the cooking vessel **218**. The lid can be configured to permit opening by either unlatching it and pivoting it rearwards, or by unlatching it and lifting it off and away from the cooking device. In an example embodiment, the cooking device includes a lid latch **212** that projects from the outer housing **202** that is configured to releasably hold the lid in closed position, and by a rod axle **207** that is mounted on the back of lid **206** and that engages open hooks **209** that are part of control box **204**. Engagement of the lid rod axle **207** resting in the open hooks **209** permits the lid **206**, when released from its closed position, to be pivoted upwards away from the outer housing open end to a stable position that is just past vertical (best shown in FIG. **35**) to facilitate loading and unloading food from the cooking device, or for other purposes.

[0243] To enhance safety, in combination with the engagement between the open hooks **209** and the rod axle **207**, the lid latch **212** operate to secures the lid **206** to the outer housing **202** and the cooking vessel **218** during the cooking process. This lid is latched into a closed positioned in the cooking device by placing the lid over the open end of the outer housing and cooking vessel and passing the lid latch **212** projecting from the outer base cover **202** through a latch opening **213** in the lid. The latch **212** can include a spring mechanism to bias the latch **212** into a position within the latch opening **213** that causes the latch to interface and abut

against a portion of the lid to prevent its upward movement away from the outer housing.

[0244] In an example embodiment, the cooking device can include alignment pins **228** that extend from the an open end of the outer housing **202** and that cooperate with alignment holes **230** in the lid to assist ensuring proper positioning of the lid over the outer housing open end to ensure desired engagement of the latch within the latch opening. The lid is placed into position over the open end of the outer housing **202** by pulling the lid forward so that the rod axle **207** engages the hooks **209**, and the alignment pins **228** pass through the alignment holes **230** to force the lid forward permitting engagement of the latch within the latch opening.

[0245] As shown in FIGS. **19** and **20**, in an example embodiment, the lid **206** is constructed comprising a primary portion that is formed from a transparent material as noted above for the other cooking device embodiments of this invention, and further comprising an outer frame surrounding at least a portion of the transparent material. In an example embodiment, at least about 80 percent of the lid is formed from the transparent material. In a preferred embodiment, the lid comprises greater than about 90 percent of the transparent material. By allowing more ambient light into the cooking cavity, and by providing more viewing area, such lid comprising a large transparent portion facilitates viewing food while is cooking, and thus helps in both gauging food cooking progress, and also providing appetite appeal.

[0246] In an example embodiment, when the lid **206** is disposed over the open end of the outer housing **202** in a closed position it tilts or is inclined downwardly (moving from the rear of the lid forward). The inclined position of the lid can be provided by either the shape of the lid itself or by the shape of the outer housing open end. In an example embodiment, the outer housing open end is shaped having a front portion that is shorter than a rear portion to provide the downwardly tilted orientation. This downwardly tilted orientation makes it easier for the user to place and remove food articles into and out of the cooking assembly, and helps to keep moisture from collecting on the inside of lid **206** that could otherwise operate to obscure viewing of the food being cooked. Such downwardly tilted orientation also enables a user to have a clearer view of the interior of the cooking device and the cooking vessel where food is being cooked from a distance, i.e., without having to stand and look directly over the cooking device.

[0247] FIGS. **21** and **22** illustrate two electrical circuits **248**, **250** of a control system used with the cooking device of this invention that can be used to control the cooking process. One of the electrical circuits is used with a bi-directional DC motor, and the other of the electrical circuits is used with an auto-reversing when stalled synchronous motor.

[0248] In an example embodiment, a timer **205** is disposed within the control box and is part of the control system to control the cooking process. Specifically, timer and the control system are configured to raise the food from the hot cooking liquid once both a predetermined preheating of the cooking liquid and cooking of the food article has been completed. The control system is also configured to lower the food into the hot cooking liquid once the cooking liquid has been preheated to a temperature preset by thermostats

**232** and **234**. Thus, the control system operates to cook food in a minimum amount of time by precisely starting the cooking process immediately upon the cooking liquid being hot enough to cook.

[**0249**] A food article disposed within the food support vessel **220** is raised and lowered into the cooking vessel **218** by use of a lifting mechanism that is attached to the control box. In an example embodiment, the lifting mechanism comprises a gear reduced bidirectional motor **236**, **238** that is mounted in the control box **204**. The bidirectional motor **236**, **238** bidirectionally drives a screw threaded rod **240** that projects downwardly from the motor into the control box. The screw threaded rod **240** is threadedly engaged with a hook **242** to cause the hook to travel up and down by screw thread engagement with the threaded rod **240**. The hook **242** is configured having a forward face that removably engages a bracket **246** positioned on a backside portion of an upper flange of the food support vessel **220** (as best shown in FIG. **25**), and thereby enables mounting of the food support vessel **220** within the cooking vessel **218**.

[**0250**] The electrical circuits **248**, **250** control the cooking process in the following manner. Power enters through a power supply plug **252** and passes through both the thermostat **232**, **234** and the timer **205**. A food support vessel position sensor switch **254**, **256** is provided in the form of a snap-action toggle switch that switches when the food support vessel **220** is either at its lowermost or uppermost positions.

[**0251**] Circuits **248**, **250** start with the food support vessel **220** in its uppermost position as detected by the basket position sensor switches **254**, **256**. Once the cooking liquid has reached the desired cooking temperature, thermostat **232**, **234** switches and causes the food support vessel **220** and the food article disposed therein to lower until it reaches its lowermost position, at which point the basket position sensor switches **254**, **256** change their switching position. Cooking continues until the countdown timer **205** reaches the user preset time and then turns off. This causes motor **236**, **238** to raise the food support vessel **220** until it reaches its uppermost position and the basket position sensor switches **254**, **256** again switches.

[**0252**] A feature of this cooking device is that the control system and the lift mechanism allows automated cooking of a food article even when the user is not present. In operation, the user simply, in sequence: pours in the appropriate amount of cooking liquid oil into the cooking vessel **218**; mounts the food support vessel **220** to the hook **242**; inserts the food article to be cooked into the food holding vessel **220**; closes the lid **206**; sets the timer **205** for the combined oil warm-up and cooking time; and may then walk away with only minimal need for periodic checking to be sure everything is functioning normally. Once cooking is complete, the food is automatically lifted under control of circuits **248**, **250**, and without need for user interface, from the cooking oil, and is drained of oil. After oil draining, the food is ready to be removed from the cooking device and served.

[**0253**] This automated cooking system is much safer and more user friendly than systems that require the user to manually lower food into the cooking liquid, at least because it does not depend on the user slowly lowering the food into the hot cooking oil while using only imprecise muscle

power, and because the user need not be present adjacent to the unit when food is lowered into, or is removed from, the hot cooking liquid. Also, the lid may be closed when the food is lowered into the oil, thus providing yet one more level of safety.

[**0254**] FIGS. **26** and **27** illustrate how the food support vessel **220** may be configured to automatically tilt when placed into its raised position (shown in FIG. **27**) by action of the food support vessel **220** pivoting under gravity on an off-center connection between the hook **242** and the bracket **246**. When configured to provide such tilting operation, the tilting movement of the food support vessel **220** can be constrained or limited by action of the food support vessel contacting an adjacent side wall of the cooking vessel **218**. Tilting of the food support vessel **220** helps to facilitate draining of oil from a cooked food article container therein such as a turkey or a chicken.

[**0255**] FIGS. **23**, **24**, and **28** illustrates how the basket position sensor switch **254**, **256** operates. The hook **242** that threadedly engages the threaded rod **240** moves up and down under power from the bidirectional gear reduced motor **236**, **238**. The hook **242** passes through a slot **264** that extends vertically within a mounting bracket **262** of the control box. The hook **242** also passes through a slot **266** that is disposed through a slide plate **260**. In an example embodiment, the slide plate **260** is movably interposed between the mounting plate **262** and the threaded rod **240** and hook assembly. The slide plate slot **266** is sized having a vertical slot length that is slightly less than that of the vertical excursion of hook **242**, thereby causing causes the slide plate **260** to rise to with the hook a predetermined amount to a raised position when the hook **242** reaches its upper position (as shown in FIG. **23**). This also causes slide plate **260** to fall to a lower position when the hook **242** reaches its lower position (as shown in FIG. **24**).

[**0256**] The slide plate **260** includes an elongated switch lever that extends outwardly therefrom and that is configured to engage a toggle actuator **270** of switch **254**, **256**. In an example embodiment, elongated switch lever includes a hole **268** disposed therethrough that is sized to accommodate placement of the toggle actuator **270** therein. Configured in this manner, the upward and downward movement of the slide plate **260**, caused by hook **242** hitting the top and bottom of slide plate slot **266** when moving to its upper and lower positions, causes switch **254**, **256** to change its actuating position. In an example embodiment, the switch lever hole **268** is elongated vertically to allow space for the toggle actuator **270** to snap cleanly when changing its actuating position.

[**0257**] As shown in FIG. **30**, the third embodiment cooking device of this invention may also include a drain hose **274** with plug at its end **276**, that is attached to the outer housing **202** and that functions in a manner similar to the flexible hose described above for the first embodiment cooking device. In an example embodiment, the plug **276** is retained on the end of drainage hose **274** by a plug retainer **278** which secures the plug it to the end of hose **274** even when the plug **276** is removed from its plugged position.

[**0258**] FIGS. **37** and **38** illustrate the contrast in space efficiency between using food article containers, e.g., food support vessels, having a cylindrical cross section or circular plan view (shown in FIG. **37**) versus a rectangular cross

section or rectangular plan view (shown in FIG. 38) for cooking a poultry food product 300 in a horizontal position. A best efficiency for a food article food container having a rectangular plan design has been found where the ratio between length 304 and width 302 is between about 1.1 to 1.5. The improved space efficiency presented using such a rectangular food article container means that less oil may be used for cooking food, and that a cooking device comprising such food article container may take up less countertop space. The use of radiused corners 307 in such food article container further improve this efficient use of space. Best results are provided when the food article container for cooking poultry foods is rectangular as noted above, and has radiused corners 307 that are sized more than about 10% of the length 304. The above description of improved efficiencies that are gained by using a non-cylindrical food article container is understood to apply to all embodiments of the cooking device as constructed according to this invention.

#### Fourth Embodiment

[0259] FIGS. 41 to 57 illustrate a fourth embodiment food cooking device 301, constructed in accordance with the principles of this invention, generally comprising an outer housing 316 and a lid 306 that is movably position over a open end of the outer housing. FIGS. 39, 40, and 41 show forward perspective views of the cooking device 301 with the lid 306 in different positions. In FIG. 39, the device 301 is shown with the lid 306 in an inverted position to minimize the space needed for storage. In FIG. 40, the device 301 is shown with the lid in a raised position for loading and unloading foods. In FIG. 41, the lid is shown in a closed position for cooking a food article. The lid 306 may also be removed completely at any time, by simply unlatching and lifting it away from the outer housing 316.

[0260] The lid 306 is specially constructed having a wall section that projects outwardly a distance from a lip that extends around a peripheral edge of the lid and that is configured to contact the open end of the outer housing 316. The wall section extends to a closed end of the lid that forms the top portion of the lid when the lid is placed in a closed position on the cooking device. Accordingly, the lid is configured having a concave inside surface defined by the wall section and top portion.

[0261] This lid configuration provides improved storage compactness (when the lid is inverted and placed within the cooking device as shown in FIG. 39), and provides exceptional food visibility is accomplished because. In an example embodiment, it is desired that the lid wall section extend a vertical depth that is greater than about 20 percent of the width of the lid as measured from right to left across the front portion of the lid. As noted above, the lid 306 may be inverted and placed inside of the cooking device for compact storage. In an example embodiment, the cooking device of this fourth embodiment is designed to be efficient in storage by having over about 70% of the lid 306 store inside of the cooking device.

[0262] The lid 306 may be made of transparent material, such as those materials described above for the lid of the other cooking device embodiments. The use of such transparent material, in combination with the unusually large area of lid 306 due to its concave shape, operates to facilitate viewing food while the food article is cooking, both because

it allows more light into the food cooking vessel or compartment 326, and because it allows more viewing area to observe the food article disposed therein. The enhanced ability to view the food article being cooked has advantages of both creating appetite appeal, and helping in gauging food cooking progress.

[0263] The lid 306 may be constructed in many different ways well known in the art. In an example embodiment, the lid can be formed by injection molding from a plastic material, such as polypropylene plastic, as a single piece. Such lid construction would be both inexpensive to manufacture and very durable.

[0264] The lid 306 may be securely latched to the cooking device during the food cooking process through the engagement of a latch 314 extending from the outer housing and a latch opening 336 that is disposed within a lid lift handle 358 extending outwardly away from a forward portion of the lid lip. The latch 314 can be spring biased to provide a releasable latching attachment with the latch opening when the lid is lowered down onto the outer housing open end.

[0265] The lid 306 rests upon an upper portion 346 of the outer housing 316 (as shown in FIGS. 51A, 51B, and 52), which may be constructed of the same types of materials described above for the other embodiments of the cooking device, such as plastic or other temperature limited material.

[0266] A cooking vessel or bucket 350 is disposed within an inner cavity of the outer housing 316 and is sized and configured to accommodate a volume of cooking fluid therein. As best shown in FIG. 53, the outer housing 316 is sized and shaped to fit over and cover a portion of the cooking vessel 350. The cooking vessel 350 is covered along its upper region by the outer housing 316, and is covered along its lower region and is supported by an outer housing base 424. Thus, the outer housing of this fourth embodiment cooking device is provided as a two part assembly.

[0267] A pliable heat resistant gasket 366 is interposed between an outwardly flanged edge 368 of the cooking vessel 350 and an inwardly flanged edge of the outer housing 346 to protect and insulate the outer housing therefrom. Insulating connectors, such as stainless steel screws or the like may be used connect the outer housing 346 to the cooking vessel 350, wherein such connectors extend through the pliable heat resistant gasket 366.

[0268] As best shown in FIGS. 51A, 51B, and 52, the pliable heat resistant gasket 366 wraps over both the inner and outer perimeters of the cooking vessel flanged edge 368. Where the gasket 366 wraps over the inner perimeter of the flanged edge 368, it spaces the lid 306 away from, and thermally insulates it from, the cooking vessel 350 when lid 306 is in a closed position closed. The gasket 366 also operates to provide a seal between the lid 306 and the cooking vessel 350. If desired, this seal can be enhanced by ribs or the use of other surface features extending from the inner perimeter of pliable heat resistant gasket 366. Wrapping the exterior perimeter of pliable heat resistant gasket 366 around, over, and back again in a "C" shape over the outer perimeter of the cooking vessel flanged end 368 (as shown in FIGS. 51A and 51B) helps to lock the gasket 366 into place.

[0269] As best shown in FIGS. 50 and 53, an external heating element 352 is affixed to a bottom portion of the

cooking vessel **350**. Positioning the heating element **352** outside of bucket **350** is both less expensive to manufacture and easier to clean than a heater placed within bucket **350**. The heating element can be of the same type described above for the first cooking device embodiment. In addition to the heating element, a thermostat **412** and a thermal fuse **420** are also connected with the bottom of the cooking vessel. The thermostat **412** may actually be a single preset thermostat, can be two or more switch controlled preset thermostats, or can be a user adjustable thermostat. The thermal fuse **420** cuts power going to the cooking device in the event of unacceptable heat within the embodiment.

[0270] A support **422** can be used to connect between the bottom of the cooking vessel **350** and an inside surface of the outer housing base portion **424**. The support is provided to help distribute the weight of cooking vessel and its contents directly to the outer housing base **424** of the cooking device where the support feet are (see FIG. **49**).

[0271] FIGS. **51A** and **51B** illustrate respective details **330** and **332** taken from FIG. **52** that best show the manner in which the lid is attached to the outer housing. FIG. **51A** illustrates the releasable attachment that is formed between the lid and the outer housing along a forward portion of the lid, wherein the latch **314** projecting from the outer housing engages the latch opening **336** in the lip handle. FIG. **51B** illustrates the attachment between a rear portion of the lid and the outer housing, that is provided by the mechanism of a rear rib **334** projecting outwardly from a rearward portion of the lid and sliding under a lower portion of a lifting mechanism enclosure **432**. The lid **306** may be separated from the outer housing lower body **316** by pulling actuator lever **318** of latch **314** forward **320** and lifting lid **306** upward **322** (FIGS. **51A**, **51B**, and **52**).

[0272] FIG. **53** illustrates all of the elements of the fourth embodiment cooking device. The lid is shown with the central lid handle **358** extending outwardly a distance from a forward portion of the lid lip or rim **360**. The central handle **358** allows a user to both pull actuator lever **318** that is attached to an end of the latch, and simultaneously lift the central handle **358** rearwards **324** with one hand, in this manner enabling the user to release the lid from a locked down position and move the lid away from the cooking device opening.

[0273] FIG. **57** illustrates an alternate embodiment of the lid **306** comprising lid handles **354** and **356** that extend outwardly a distance from the forward right and left corners respectively of the lid rim **360**. Locating the handles on the sides of the lid in this alternative embodiment prevents the user from having to place their hands or arms directly above cooking cavity **362** when lid **306** is opened.

[0274] As shown in FIG. **57**, the lid of this embodiment comprises a biasing means **364**, e.g., provided in the form of a spring member or the like, molded into the lid rim **360** and that is configured and positioned to rest against an upper horizontal flange of the outer housing **316**. The spring member operates to impose a desired biasing force between the lid and the outer housing to bias the lid **306** open a short distance and uncouple latch **314** from rim **360**, when latch actuator lever **318** is pulled forward in a forward direction to release it from the latch opening **336**. The lid **306**, after becoming unlatched, may then be lifted upwardly and rearwardly **324** (as best shown in FIG. **44**) with one hand or two

hands gripping the lid lifting handles **354** and/or **356**. This allows the alternate embodiment of lid **306** to be unlatched and lifted with only one hand.

[0275] FIG. **42** illustrates a rear right perspective view of the fourth embodiment cooking device **301**. In an example embodiment, the cooking device comprises a lid that is configured to cooperate with a portion of the cooking device to facilitate moving or rotating the lid upwardly and rearwardly from a closed to an open position. In an example embodiment, the lid **306** is constructed having a pivot rib **308** that extends a predetermined distance from a rearward facing outside surface of the lid wall section. The pivot rib **308** extends horizontally a distance therealong and is sized and positioned to cooperate with a pivot groove or trough **310** that is positioned along a top surface of a control box **312** mounted to a rearward portion of the outer housing **316**. The pivot rib **308** is sized and configured to fit within the pivot groove **310** when the lid is rotated back into an open position to facilitate movement and placement of the lid thereon when the lid is placed into an open position. Alternatively, the lid can be configured comprising a pivot groove and the control box can be configured comprising a pivot rib, for the purpose of permitting the same type of cooperative engagement described above.

[0276] Configured in this manner, the lid **306** may be placed in its open position (as shown in FIGS. **40** and **44**) by unlatching it from the outer housing **316** as described above, and tilting it rearwardly **324** (as shown in FIG. **52**). During this translational movement of the lid, the pivot rib **308** is disposed within and engages the pivot groove **310**, and the cooperation of these two features operate to provide a pivot axis for the lid **306** when it is being tilted rearwardly **324**. After the lid is moved rearwardly in this fashion, the cooperation of the pivot rib and pivot groove also operates to locate the lid **306** in a stable position on top of control box **312** (as best shown in FIGS. **40**, **44**, and **52**).

[0277] As best shown in FIG. **57**, the cooking device **301** includes an odor filter assembly that is attached thereto. In such example embodiment, the odor filter assembly **328** is provided in the form of a filter box **338** that is removably attached to an inside surface of the lid **306**. A filter media **340** is disposed within the filter box **338** and can be made from one of any of variety of different filtering materials, including, alone or in combination: metal mesh, nonwoven materials such as nonwoven polyester or metal, woven material, activated charcoal, or other known filtering materials for: condensing grease and oils, and/or for filtering odors and/or gaseous and/or particulate matter.

[0278] In an example embodiment, the filter box **338** removably snaps to the interior of lid **306** and is positioned adjacent a section of the lid that includes a plurality of exit openings **342** disposed therethrough to facilitate the passage of air from the cooking device. In an example embodiment, the exit openings **342** are disposed through a wall section of the lid, thereby allowing for the passages of cooking exhaust, steam and/or hot air from the side of the lid **306** where its will not damage countertop splash or get caught between the splash and the over-counter cabinets. Such side exhausting arrangement has advantages over many current countertop deep fat fryers that exhaust damaging steam and hot air upward towards and against over-counter cabinets. Additionally, the cooking odor filter **328** operates in com-

ination with the pliable heat resistant gasket **366**, and lid **306** latching to lower body **316** during the cooking process to help to prevent the unwanted escape of cooking orders and directed then through the odor filter, to thereby help control and prevent such unfiltered cooking orders from contaminating room air.

[0279] Sections **343**, **344**, and **345** of the cooking device set forth in FIGS. **39**, **40**, and **41** are more fully illustrated in respective FIGS. **43**, **44**, and **45**. FIGS. **44** to **46** illustrate the cooking device comprising a food article disposed therein as represented by ellipse **444**. FIG. **44** shows the position of the food article after it has been loaded into the device and onto a food support vessel **376** for cooking. FIG. **45** shows the position of the food article after the lid has been lowered from its open position to a closed position onto the outer housing, and while the food support vessel **376** is maintained in a raised position. In this operative position, the lid is latched closed so that during the cooking process it operates to create a safety barrier to protect users of the device from possible splattering of hot cooking liquid. The closed lid may also help prevent rapid egress of cooking liquid in the event the device is accidentally tipped over or falls off of a supporting substrate surface such as a countertop. FIG. **46** shows the position of the food article **44** within the device when the food support vessel **376** has been lowered into a cooking position.

[0280] The food support vessel **176** is sized and configured to be removably disposed within the cooking bucket **350**. In an example embodiment, the food support vessel **376** is provided in the form of a planar member that, unlike the other described cooking device embodiments, does not include a surrounding wall structure. In a preferred embodiment, the food support vessel **376** is configured having a plurality of openings disposed therethrough to permit for the passage of cooking liquid during both cooking and after cooking to facilitate cooking oil draining from the food article.

[0281] In an example embodiment, the food support vessel **376** includes a number of channels extending along the surface to further facilitate the draining of cooking fluid away from the food article when raised above the cooking fluid. Such channels can be configured having an inclined or angled orientation to further facilitate the passage of cooking fluid away from the food article. In a preferred embodiment, the channels are configured having an orientation that is angled rearwardly towards a rearward portion of the cooking device so that the cooking fluid that drains from the food support vessel is channeled in a direction away from the front of the cooking device and the user.

[0282] As shown in FIG. **53**, an oil filter screen **434** may be positioned to rest upon the food support vessel **376** to filter used oil when the food support vessel **376** is raised, thereby helping to extend the useful cooking life of the oil. A fine mesh screen, as described earlier, or other filtering material, may be used. The oil filter screen **434** may be easily removed from the device for easy cleaning, such as in the dishwasher, or for other reasons, simply by lifting it off from food support platform **376**. In an example embodiment, the oil filter screen is sized and configured to fit within the cooking device in close proximity to the walls of the cooking vessel **350**.

[0283] In an example embodiment, the food support vessel **376** is detachably coupled to a food support vessel lifting

mechanism **378** that is constructed to raise **380** and lower **382** platform **376** (as shown in FIGS. **47** and **48**). The lifting mechanism **378** comprises a coupling bracket **384** that couples through hooks **388**, **390** and **392** to a backplate **442** attached to a rear side portion of the platform **376**. The coupling bracket **384** is slidably disposed within a track member **386** that is configured to enable vertical movement of the coupling bracket up **380** and down **382** along the track member. In example embodiment, the track member includes a "C" shaped channel that is sized to slidably retain the coupling bracket therein.

[0284] A lifting member **394** is disposed within a portion of the track member **386** and is attached to the coupling member to cause the coupling member upward and downward movement. In an example embodiment, the lifting member **394** is provided in the form of a flexible lifting tape **394**. The flexible lifting tape **394** is coupled to a spool **374** that is rotatably mounted to the track member. The spool **374** is driven clockwise **396** and counterclockwise **398** by a gear reduction member **372**, which in turn is powered by a reversing motor **370** (as best shown in FIGS. **47** and **48**). The flexible lifting tape **394** may be fabricated from a those materials capable of providing a sufficient degree of tensile strength and being rolled and unrolled, such as a coiled metallic material similar to that used for a tape measure and the like.

[0285] FIG. **57** illustrates an alternative lifting mechanism where the flexible lifting tape **394** has been replaced by a cable lift member **400** that is wound on a cable spool **402** and that is held against the cable spool **402** by a cable guard **404**. In an example embodiment, the cable lift member is provided in the form of a stainless steel cable, e.g., similar to cable found on many bicycle handbrake systems or the like. The cable **400** is connected to single cable hook member **438**, which in turn is removably hooked to the food support vessel backplate **442**. The single cable hook member **438** rides up and down in the track member **386** in the manner described above.

[0286] The food support vessel **376** includes a channel in its rearward facing surface, e.g., disposed along the backplate **384**, that engages both sides of track member **386** so as to provide a stabilizing effect, thereby eliminating the need for any additional connection to the lifting mechanism.

[0287] The lifting mechanism according to either embodiment includes a cam **406** that is coaxial and integral with the spool **374**. The cam includes two cammed surfaces that cause an upper food support vessel sensor switch **408** to turn off only when the food support vessel **376** reaches its uppermost position (as shown in FIG. **44**), and that cause a lower food support vessel sensor switch **410** to turn off only when food support vessel **376** reaches its lowermost position (as shown in FIG. **46**). In an example embodiment, the sensor switches **408** and **410** are mounted on the track member **386**. In an example embodiment, the cam **406** can operate reliably because less than one full turn of spool **374** is required to fully raise or fully lower food support vessel **376**, thus, in such example embodiment the spool **374** is sized having a circumference that is sized greater than the vertical distance traveled by the food support vessel **376**. An enclosure **432** is disposed over, surrounds and protects an upper portion of food support vessel lifting mechanism **378**.

[0288] FIG. **56** illustrates a control circuit useful for operating the cooking device of this fourth embodiment in



the following manner. In operation, a user places the cooking liquid into the cooking vessel 350, and places the food article to be cooked onto the food support vessel 376, before closing the lid 306 and setting a timer 414 that is configured with combined cooking fluid warm up and cooking times.

[0289] The outside heater 352 is activated, and the food support vessel 376 remains in its uppermost position (as shown in FIG. 44) until the thermostat 412 senses that the desired cooking liquid temperature has been reached. Once the cooking liquid temperature has been reached, the thermostat 412 is triggered to activate the motor 370 to lower 382 the food support vessel 376 to its lowermost position (as shown in FIG. 46) where it remains until the timer 414 reaches its user preset time. Once the preset time has been reached, the timer is turned off, causing activation of the motor 370 to raise 380 the food support vessel 376 to its uppermost limit (as shown in FIG. 44) where the food article is allowed to drain of liquids before being removed from the device and served.

[0290] The cooking device includes a user operable heater only switch 416 that is mounted with the timer 414 on the outer housing. The heater only switch, when on, only operates the outside heater 353 and does not operate the food support vessel lifting mechanism, thus maintains food article within the cooking device in an uppermost position to permit the food article to be steamed, roasted, or otherwise cooked without being automatically lowered on the food support vessel. For user convenience, the heater only switch 416 still allows for cooking control by timer 414 of the outside heater 352. Additionally, in the heat only mode of operation, foods may be cooked within the cooking vessel 350 without the use of food support vessel simply by removing the food support vessel 376 therefrom.

[0291] The cooking device includes a user interface enclosure 428. In an example embodiment, the user interface enclosure 428 is attached to a front portion of the outer housing, and more specifically, is mounted to a front portion of the base portion of the outer housing. The user interface enclosure is configured to accommodate an indicator light 418, the heater only switch 416, and the timer 414. In an example embodiment, the enclosure includes an upwardly angled faceplate that present each of the above-noted control elements in a manner that permits easy user control. Likewise, placement of the enclosure 428 on the outer housing base portion makes use of all controls and viewing of all indicators easier for a user. The forward upward angled face of enclosure 428 also catches more ambient light, which further increases the visibility of the controls and indicators.

[0292] The indicator light 418 notifies the user any time the timer 414 is turned on. As noted above, the heat only switch 416 allows the user to turn off the food lifting mechanism and use the embodiment with food support vessel 376 in its raised position, or use the cooking device without use of the food support vessel 376.

[0293] As shown in FIGS. 50 and 52, the fourth embodiment cooking device 301 is also constructed comprising a drain hose 426, which is configured similarly to the above-described cooking device embodiment, to facilitate draining the cooking vessel 350.

[0294] FIGS. 54 and 55 illustrate an alternative fourth embodiment cooking device of this invention that is con-

figured to use a manual method, rather than an electrically-powered motor, to raising and lowering the food support vessel. Such alternative embodiment comprises a hand grip knob 430 that is disposed adjacent the outer housing and that is connected to the lifting member 394 to permit the raising and lowering of the food support vessel by turning the knob in opposite directions. FIG. 55 illustrates the hand-powered lift mechanism with a hand-lift mechanism cover 436, and the lid 306 removed.

[0295] Each of the cooking device embodiments described above and illustrated in the various figures, depending on the scale at which it is produced, may have the potential to cook both small and large foods, ranging from a few ounces of French fries, to over a 20 pound turkey. Where the cooking device is specifically constructed to accommodate the cooking of larger types of food articles, wire baskets or other similar devices may be used in conjunction with the cooking device of this invention to facilitate cooking smaller foods. Such devices are well known in the art and hence are not illustrated herein. Such devices may also help in steaming, roasting, boiling, or otherwise cooking food articles in the cooking device of this invention.

[0296] Any and all of the cooking device embodiments described above and illustrated in the accompanying figures may be constructed in any practical scale. However, it has been found advantageous to make the height of such cooking devices with a lid on in the range of from about 14½ to 16 inches tall overall. This allows enough internal space within the cooking device to cook a 15 to 20 pound turkey and also provides sufficient clearance so that each cooking device embodiment can sit on a standard countertop and clear over-countertop cabinets.

[0297] Also it has been found practical for reasons of food cooking capacity and in-kitchen standard countertop space usage, to make each cooking device embodiment in the range of from about 14¼ to 17 inches wide (as measured left to right across the front of the cooking device), and from between about 11 to 15¼ inches deep.

[0298] Materials and method used for constructing cooking device embodiments of this invention may imitate those used by many of today's home use deep fat fryers. As an example, and not by way of any limitation, the outer housing can be formed from such materials as plastic, such as polypropylene or ABS. Alternatively, the cooking device outer housing may be constructed from metal, such as painted mild steel or aluminum, or may be constructed from a combination of metals and plastic.

[0299] The cooking device cooking vessel or cooking bucket can be formed from such materials as deep drawn aluminum or mild steel, and might be anodized, or coated with an easy-to-clean nonstick surface.

[0300] What have been described herein are several example embodiments of cooking devices constructed in accordance with principles of the invention. Those knowledgeable in the art will readily understand that many other cooking device embodiments not specifically described herein may employ the present invention. It is for this reason that the protections afforded by this document shall be limited only by the scope of claims contained herein and their legal equivalents.

## Fifth Embodiment

[0301] Referring to FIGS. 58 through 61, the exemplary embodiment shown offers economies in manufacture, as well as user safety, design/engineering simplicity, and ease of cleaning and operation.

[0302] The exemplary embodiment includes two-piece outer enclosure 502, 504 comprising tubular shaped upper outer enclosure 502 attached to the upper rim of open top box shaped lower outer enclosure 504. Lower outer enclosure 504 includes in its forward right portion control box 522 which contains embodiment controls.

[0303] Outer enclosure 502, 504, which generally resembles an open top box, contains within it open top box shaped cooking vessel 506 which has vertically movable food support 508 removeably located within it.

[0304] An air gap between outer enclosure 502, 504 and cooking vessel 506 helps reduce outer enclosure temperatures for user and countertop safety. An air gap, formed by feet on the bottom of outer enclosure 504, and formed between the bottom of outer enclosure 504 and the countertop on which it rests, also reduces potential damage to countertops from heat.

[0305] Cooking liquid within vessel 506 is heated by an external heater attached on the bottom of cooking vessel 506 similar to those shown in earlier exemplary embodiments contained herein (see FIGS. 50 and 53).

[0306] Right handle bracket 510 and the left handle bracket 512 provide means for manually lifting and lowering food support platform 514 within cooking vessel 506. Grips 518 and 520 are at the ends of right handle bracket 510 and left handle bracket 512 respectively to provide manual gripping locations and to reduce heat at those locations.

[0307] Right handle bracket 510 and the left handle bracket 512 removeably attach to the right and left sides respectively of food support platform 514, as shown in FIG. 61, to make movable food support 508 more compact and/or less bulky, as an example during shipment, cleaning, and/or storage. The attachment of brackets 510 and 512 to food support platform 514 may be made, as an example, by threaded studs welded to platform 514 passing through holes in brackets 510 and 512 and being capped on the threaded stud ends with wing nuts.

[0308] Spaced along the length of both right handle bracket 510 and left handle bracket 512 are holes 524 which engage protrusions 526 and 528 located on the interior upper rim of upper outer enclosure 502. This in turn, by pushing grips 518 and 520 towards each other provides manually controlled engagement at various vertical levels for movable food support 508.

[0309] Holes 524 are located to provide: a low cooking position; an intermediate raised position where food can be raised out of hot cooking oil and yet not touch lid 516 when closed; and a fully raised position where food support 508 is raised to its fullest extent for food insertion and removal. This versatility enhances the ease-of-use of the exemplary embodiment.

[0310] Similar to earlier exemplary embodiments described herein (see FIGS. 51A, 51B, and 52), lid 516 may be latched in its down position to cap cooking vessel 506, or

it may be rested in a vertical open position, or it may be completely removed from cooking vessel 506.

[0311] Likewise similar to exemplary embodiments earlier described herein (see FIGS. 49, 50, and 53), drainage tube 530 is flexible and attached to the bottom of cooking vessel 506, and may be dismounted from slots 532 and used to drain cooking vessel 506.

[0312] Door 534, when closed, hides all but a left-hand section of drainage tube 530 (see FIGS. 58 and 59) and prevents drainage tube 530 from being accidentally dismounted from slots 532. Thus door 534 provides both aesthetic features, by hiding most of drainage tube 530, and provides safety features, by preventing drainage tube 530 from being accidentally dismounted where it might accidentally spill hot or cold cooking liquid.

[0313] Flexible drainage tube 530 may be translucent or transparent. This in combination with allowing a portion of drainage tube 530 to be visible with door 534 closed allows drainage tube 530 to be used as an accurate indicator of liquid levels within cooking vessel 506 because the liquid level within drainage tube 530 is the same as the liquid level within cooking vessel 506. This provides an accurate, simple, and inexpensive liquid level gauge for cooking vessel 506. For added safety, a removable plug, similar to that shown in FIGS. 30, 49, 50, and 53, may be placed on the end of drainage tube 530, however an air hole must be present in the plug if drainage tube 530 is to be used to measure the liquid level in cooking vessel 506.

[0314] Wiper blades 544 are located on the interior of glass 540, and may be rotated 538, using knob 542, which is located on the exterior of glass 540, to clear condensation or other debris from the interior of glass 540 so that the contents of cooking vessel 506 may be more easily viewed when condensation or other debris is present on glass 540.

[0315] Wiper 536 has wiper blades 544 integrally connect to one end of an axle which penetrates through a hole in glass 540. Attached solidly on the other end of the axle and located on the exterior side of glass 540, is knob 542. Wiper blades 544 contact the interior surfaces of glass 540 and wipe condensation and/or debris from those surfaces when knob 542 is rotated. This device works similar to windshield wipers on a car.

[0316] Glass 540 is forward inclined to both reduce condensation and other debris build up on its interior during cooking, and to help in viewing the contents of cooking vessel 506 during the cooking process by providing a more natural viewing angle and by allowing substantial amounts of ambient light into the cooking area of the exemplary embodiment.

[0317] Vents 546 exit cooking exhaust forward during the cooking process and help prevent over counter cabinet damage by directing cooking exhaust away from such cabinets. Vents 546 may be backed by one or more filters (not shown) to reduce odors and pollution exiting from the exemplary embodiment. Vents 546 are located high and back, away from positions a user would normally touch, thus helping to prevent user injuries from hot cooking exhaust.

[0318] Frustum conical depressions 650 each have holes 652 penetrating their bases to allow insertion of long stem cooking thermometers 654 or other sensing devices through

holes 652 and thus through lid 516 without opening lid 516. This advantageously allows heat measurement of cooking liquid without having to open lid 516. By having transparent glass 542 to view where foods being cooked within the exemplary embodiment might be pierced to measure their temperatures, and by using a cooking thermometer or other temperature sensing device with a rod type probe with a food piercing tip to pass through holes 652, foods being cooked may also be temperature measured without opening lid 516. Not having to open the lid 516 to take cooking liquid or food temperature measurements helps improve both embodiment usability and safety.

[0319] One example of a cooking process using the embodiment is as follows. The user partially fills cooking vessel 506 with cooking oil using direct observation and/or viewing drainage tube 532 to fill vessel 506 to the proper level. It has been found that to deep fry a 9 pound to 25 pound turkey, 2½ gallons to 6 gallons of cooking oil is most advantageously used.

[0320] Either before or after this, movable food support 508 is inserted into cooking vessel 506 and raised to its uppermost position where it is held by protrusions 526 and 528 engaging holes 524. Here food is placed on food support 508, food support 508 is lowered to its intermediate position where it is above the cooking liquid but still low enough that lid 516 can be lowered without hitting the food. Lid 516 is then latched down in its cooking vessel 506 capping position.

[0321] Using the controls contained in control box 522, the user turns on the heat and warms the oil to cooking temperature. A timer or heat sensing mechanism within control box 522 may sound an alarm to alert the user when the oil has reached cooking temperature.

[0322] Once oil cooking temperature has been obtained, using handle brackets 510 and 512, the user presses grips 518 and 520 towards each other which disengages holes 524 from protrusions 526 and 528 and allows food support 508 and the food resting on it to be lowered into the hot cooking oil where they remain until the cooking process is complete.

[0323] Once cooking is complete, the user reverses the above process, and raises movable food support 508 and the food on it from the hot cooking oil and latches them in the intermediate position, away from the hot oil, where the food can drain and cool.

[0324] After this, the user opens lid 516 and removes the food. Oil may be drained from cooking vessel 506 by opening door 534 and placing the dismantled end of flexible drainage tube 530 into a storage or disposal container and then lowering the container to below the bottom of cooking vessel 506 for drainage.

[0325] Food support 508 may be removed and possibly disassembled for cleaning in a dishwasher or sink. Nonstick coating may be used on the exterior surfaces of food support 508 and cooking vessel 506 to help in the cleaning process. Lid 516 may also be washed in a dishwasher or sink. For storage, food support 508 may be placed back within cooking vessel 506 and lid 516 turned upside down and nested into the top of cooking vessel 506 (analogous to the lid inversion shown in FIGS. 43 through 46).

[0326] This exemplary embodiment may be constructed at any advantageous size and in any advantageous proportions.

To deep fat fry a 9 to 20 pound turkey, the most common turkey sizes available in the United States, it has been found that cooking vessel 506 should be between 9 inches and 14 inches in depth, 9 inches and 15 inches in width, and between 9 inches and 14 inches in height.

[0327] Various materials may be used to construct the embodiment including, by way of example only, metal: such as mild steel, stainless steel, or aluminum, each possibly coated with nonstick or plated with chromium or nickel; may be used to construct cooking vessel 506 and food support 508. Plastics; such as polypropylene, polycarbonate, SAN, Melamine, Bakelite, or ABS, may be used to construct outer enclosure 502504 and lid 516. Lid 516 may be constructed from translucent materials, including, by example only: polypropylene, polycarbonate, or SAN, to advantageously allow in more ambient light to cooking vessel 506 to make viewing its contents easier.

#### Sixth Embodiment

[0328] Referring to FIGS. 62 to 69, another exemplary embodiment of the present inventions is illustrated.

[0329] This embodiment offers: economies in manufacture; design/engineering simplicity; safety; and ease of use and cleaning.

[0330] Generally described, this embodiment has inner bucket shaped food support vessel 558 nested within outer bucket shaped cooking vessel 554, with bidirectional pump 556 moving cooking liquid between the inner and outer bucket shaped vessels. Heater 564 is located inside and near the bottom of outer cooking vessel 554 and outside of inner food support vessel 558.

[0331] At the start of an exemplary cooking process, inner cooking vessel 554 contains food to be cooked but no cooking liquid, and it floats on cooking liquid 570 which has been added by a user into outer vessel 554 either by pouring the cooking liquid directly into outer vessel 554, or by using bidirectional pump 556, as shown in FIG. 68. The user also places one end of flexible tube 562 into inner support vessel 558.

[0332] Once heater 564 raises the cooking liquid in outer cooking vessel 554 to cooking temperature as determined by a sensor, a logic mechanism triggers bidirectional pump 556 to move the liquid through tube 560, which has one end open near the floor of cooking vessel 554, into cooking vessel 554 through flexible tube 562 which has an open end user placed into the bottom of inner food support vessel 558.

[0333] This removes most, but not all, of the hot cooking liquid 570 from outer cooking vessel 554, and moves it into food support vessel 558, where hot cooking liquid 570 partially fills vessel 554, and immerses any food 572 contained within it with hot cooking liquid 570.

[0334] This hot cooking liquid movement causes outer cooking vessel 554 to no longer contain substantial liquid, and causes inner food support vessel 558 to be partially or mostly filled with cooking liquid (see FIGS. 65 and 67). This in turn results in inner food support vessel 558 sinking to near the bottom of outer cooking vessel 554 as shown in FIGS. 65 and 67. The reduced amounts of cooking liquid still left in outer cooking vessel 554 convey heat from heater 564 to the cooking liquid contained in inner food support vessel 558.

[0335] The amount of cooking liquid left within cooking vessel **554** is precisely determined by how high the open end of tube **560** is above the floor of cooking vessel **554**. Further, this height adjustment of tube **560** may be made to be user controlled by the user simply sliding tube **560** up or down. This, by sliding tube **560** to its fullest downward extent, may also help in more completely draining cooking liquid from outer cooking vessel **554** in the cooking vessel draining operation explained below.

[0336] Alternatively, the amount of cooking liquid moved between cooking vessel **554** and food support vessel **558** may be controlled by a timer mechanism or a flow measuring device.

[0337] Upon food contained in food support vessel **558** being immersed in hot cooking liquid by the aforementioned hot cooking liquid movement, cooking commences. The duration of this cooking may be determined by a control timer. Alternatively, in combination or as a separate alternative, food temperature, as determined by a probe inserted into the food might be used to time the cooking process.

[0338] After the cooking process is complete, the above process is reversed, with bidirectional pump **556** moving cooking liquid from inner food support vessel **558** into outer cooking vessel **554** through tubes **562** and **560**. This again causes inner food support vessel **558** to float upward on liquid contained in outer cooking vessel **554** (see FIGS. **64** and **66**).

[0339] Because inner food support vessel **558** no longer contains substantial amounts of cooking liquid, food within it may cool and drain. The cooling and draining time may be measured by an integrated timing mechanism with an alarm. Once the food cooling and draining is complete, food is removed and may be served.

[0340] The amount of hot cooking liquid used during any cooking process may vary depending on the quantity and type of food being cooked. In certain circumstances the amount of cooking liquid present may not be sufficient to float inner food support **558**, and therefore no upward or downward movement of food support **558** will occur even though cooking liquid is being pumped between outer cooking vessel **554** and inner food support vessel **558**.

[0341] The removal of food from the exemplary embodiment may be accomplished by removing the food from within inner food support vessel **558** while it is still nested within outer cooking vessel **554**, or alternatively, inner food support vessel **558** may be removed from outer cooking vessel **554**, possibly using bucket handle **566** to assist, before food is removed from inner food support vessel **558**.

[0342] Bucket handle **566** is mounted to the top rim of food support vessel **558** to help in removing it, and possibly food contained within it, from within cooking vessel **554**.

[0343] As illustrated in FIG. **68**, flexible tube **562** may be removed from within cooking vessel **554** and placed into cooking liquid container **568**. Here bidirectional pump **556** may move cooking liquid either out of liquid container **568** into cooking vessel **554** to fill it in preparation for cooking; or move cooking liquid from cooking vessel **554** into cooking liquid container **568** to empty cooking vessel **554** and either store or dispose of the cooking liquid.

[0344] Bidirectional pump **556** may comprise one or more pumps of any suitable type. As examples; it may be a pair of piston pumps, or a pair of diaphragm pumps, or a peristaltic pump (as illustrated), or a gear pump, or any other suitable pump or pumps.

[0345] The peristaltic pump illustrated has two rollers which successively crush a resilient hose around a semi circular track. This pump has advantages of being: self priming, able to contain hot liquids, and bidirectional.

[0346] One or more filters may be placed between the ends of tube **560** and flexible tube **562** to help cleanse the cooking liquid during the pumping process and therefore extend the liquid's useful life.

[0347] Control box **574**, including attached devices: bidirectional pump **556**, flexible tube **562**, heater **564**, tube **560**, controls **576**, heat sensing tube **590**, and control box cover **578**, are removeably attached over the overlapping upper right hand edges of outer cooking vessel **554** and outer enclosure **580**.

[0348] Removal of control box **574** from outer cooking vessel **554** and outer enclosure **580** is accomplished by the user simply lifting control box **574** vertically.

[0349] Once control box **574** is separated from outer cooking vessel **554** and outer enclosure **580**, outer cooking vessel **554** may be lifted and separated from outer enclosure **580**. This separation may make embodiment cleaning or other operations easier. Finger detents **582** in the upper rim of outer enclosure **580** may help in the removal of outer cooking vessel **554** from outer enclosure **580** by allowing room for fingertips to get under the upper rim of cooking vessel **554**.

[0350] Lid **584** may be mounted to outer enclosure **580** and outer cooking vessel **554** in a manner similar to earlier embodiments described earlier herein (see FIG. **51**, and FIGS. **51a** and **51b**). This affords advantages of: being latched closed onto outer cooking vessel **554**, being opened in a near vertical position, and being able to be fully removed.

[0351] Like the exemplary embodiment direct the above, lid **584** may contain holes similar to those identified as **652** for use in introducing a cooking thermometer into the interior of cooking vessel **554** without having to open or remove lid **584**.

[0352] Lid **584** may be constructed mostly or entirely of transparent or translucent material to aid in viewing of foods being cooked in the embodiment and to help in placement into foods within the embodiment of heat sensing probes introduced through holes in lid **584** which may be present and may be similar to those identified as **652** in the previous exemplary embodiment.

[0353] Alternatively, lid **584** may be constructed mostly or entirely of opaque material.

[0354] Steam guard rib **585** extends downward from the forward lower portion of lid **584** and helps protect the user from hot steam when lid **584** is being raised.

[0355] Filter **586** fits within the top of lid **584** and filters odors, grease and other pollutants from the exhausts of the cooking operations. These exhausts exit through inward

facing annular vents **588** which are adjacent to, and are surrounded by, the outer upper perimeter of lid **584**.

[0356] Heat sensing tube **590** may contain thermostats, thermal sensors, and/or thermal fuses any or all of which may be used in the control mechanism.

[0357] Handles **592**, located on either side of outer enclosure **580** may aid in transporting the embodiment.

#### Seventh Embodiment

[0358] FIGS. **70** to **73** show an additional exemplary embodiment. This embodiment uses the rotation of parallel swing arms **596** to raise **606** and lower **608** a horizontal food support platform **610**.

[0359] This embodiment offers: economies in manufacture; design/engineering simplicity; safety; and ease of use and cleaning.

[0360] In the embodiment, lever **594** is rigidly attached to upper swing arm **596** along rotational axis **598** of swing arm **596**.

[0361] Connecting rod **600** links to crank disk **602** in such a manner as to pull **612** and push **614** the upper extent of lever **594** as crank disk **602** rotates **604** and thus pulls **612** and pushes **614** on connecting rod **600**.

[0362] Crank disk **602** rotation **604** results in lever **594** being pulled **612** and pushed **614** by connecting rod **600** in such a manner as to cause swing arm **596** to rotate on axis **598** and thus raise **606** and lower **608** food support platform **610** between respectively food support platform **610**'s raised food loading and unloading position (FIG. **71**) and lowered food cooking position (FIG. **72**).

[0363] Lower parallel swing arm **616** rotationally connects to both vertical food support members **618** which are in turn attached to the floor of food support platforms **610**, and lower parallel swing arms **616**, along with upper swing arms **596** which also rotationally connect to both vertical support members **618**, forming two parallelograms which keep food support **610** horizontal while it raises **606** and lowers **608**.

[0364] Both lower swing arm **616** and upper swing arm **596** rotate at their respective bases from pivots **622** extending from food support mounting bracket **620**. Food support mounting bracket **620** is essentially an inverted "U" in cross-section and mounts on outer enclosure **626** by straddling flange **630** which extends outward from the upper rim of cooking vessel **624**, and by simultaneously straddling flange **628** which extends inward from the upper rim of outer enclosure **626** as illustrated in FIGS. **71** and **72**.

[0365] Cooking vessels **624** nests inside of outer enclosure **626**, with its flange **630** resting on top of outer enclosure **626** flange **628**, but below food support mounting bracket **620** which straddles both flange **630** of cooking vessels **624** and flange **628** of outer enclosure **626**.

[0366] Control box **632** also mounts to outer enclosure **626** by straddling flanges **628** and **630**. Control box **632** contains crank disk drive motor **634** which powers crank disk **602** to rotate **604**. Control box **632** also encloses: crank disk **602**, part of connecting rod **600** as well as embodiment controls **636**.

[0367] Rigidly attached to control box **632** is heating element **644** which extends downward into cooking vessel **624** when control box **632** is mounted and is straddling flanges **628** and **630**.

[0368] Control box cover **638** encloses control box **632**.

[0369] Lid **640** and filter **642** are similar in construction and function to lid **584** and filter **586** described herein for an earlier exemplary embodiment.

[0370] In operation, cooking vessel **624** is dropped into outer enclosure **626** and rests with flange **630** on top of flange **628**. Control box **632** is then mounted over flanges **630** and **628** by dropping it in place.

[0371] Cooking liquid may then be poured into cooking vessel **624**.

[0372] Food support platform **610** is next mounted into cooking vessels **624** by lowering it into place with food support mounting bracket **620** straddling flanges **630** and **628** and contacting the inside of the right side wall of cooking vessel **624** and the outside of the right side wall of outer enclosure **626**.

[0373] Food support platform **610** is then manually raised **606** so that connecting rod **600** may be coupled to lever **594**.

[0374] Food is next placed on top of food support platform **610**. Lid **640** is then latched down to enclose cooking vessel **624**.

[0375] Embodiment controls **636** are then activated causing heating element **644** to warm the cooking liquid.

[0376] Once the cooking liquid has reached cooking temperature, a heat sensor triggers embodiment controls **636** to cause crank disk motor **634** to rotate **604**, which in turn causes crank disk **602** to rotate **604** and push **614** on connecting rod **600**, which then results in lever **594** rotating upper swing arm **596** on axis **598** which in turn causes food support platform **610** to lower **608** to its food cooking position (FIG. **72**).

[0377] Once the food is in its food cooking position (FIG. **72**), cooking commences. Determination of cooking time may be done by a timer mechanism, or by other means such as, for example, a sensor placed within the food.

[0378] After cooking time is complete, as determined by time or other means, embodiment controls cause the above process to be reversed, with cranked disk motor **634** being rotated **604** causing attached crank disk **602** to rotate **604** thus pulling **612** connecting rod **600** which rotates lever **594** causing upper swing arm **596** to raise **606** food support platform **610** to its food loading and unloading position (FIG. **71**).

[0379] Crank disk **602** may have one or more cams on its underside (analogous to the cam shown on FIG. **11**) which may activate sensing switches which tell embodiment controls **636** when food support platform **610** is in its food loading and unloading position (FIG. **71**), or in its food cooking position (FIG. **72**).

#### Eighth Embodiment

[0380] FIGS. **74** to **88** show an additional exemplary embodiment. This embodiment uses right handle member

**700** and left handle member **702** to manually raise and lower food support platform **704** within cooking vessel **714** (FIG. **89**).

[**0381**] This embodiment offers: economies in manufacture; design/engineering simplicity; safety; and ease of use and cleaning.

[**0382**] Referring in general to FIGS. **74** through **88**, and with particular attention to FIG. **80**, this embodiment **706** is constructed as follows.

[**0383**] Lower outer enclosure **708** and upper outer enclosure **710** couple together to form outer enclosure **712**.

[**0384**] Cooking vessel **714** drops into, and is mounted within, outer enclosure **712**. This operation may be done by manually lowering cooking vessel **714** into outer enclosure **712**. The tops of left handle track **722** and right handle track **724** undercut the upper horizontal rim of cooking vessel of **714** and provide finger holds to make manually lower cooking vessel **714** into our enclosure **712** easier. Mounting may be done using gravity, or by using other mechanical means such as: latches, magnets, mechanical engagement mechanisms, or other means.

[**0385**] After performing this assembly, heating and control unit **716** is manually lowered toward, and is mounted onto, forward right corner **718** of the assembly comprised of cooking vessel **714** and outer enclosure **712**. By having cooking vessel **714** easily mountable and dismountable from our enclosure **712**, cleaning and other operations are made easier.

[**0386**] Heating and control unit **760** has within it controls. These controls may be similar to control units described earlier in this document for other embodiments, including those controls which lower food into cooking liquid once the cooking liquid has reached cooking temperature, and controls which lift food from cooking liquid at a user set time **776** interval.

[**0387**] Heating and control unit **760** also is integrally attached to heat coil **748**. A thermostatic sensor and a thermal fusing device are also attached to heating and control unit **760**.

[**0388**] Controls may include a user adjusted temperature setting mechanism for controlling cooking liquid temperature, or the embodiment may use a single factory set cooking temperature, such as 400° F. cooking oil temperature for deep fat frying.

[**0389**] Food support platform **704**, including attached right handle member **700**, and attached left handle member **702** may then be lowered into cooking vessel **714** and mounted (FIG. **89**). During this operation, left outer arm **734** of left handle member **702** is mounted within left handled track **722**, and right outer arm **736** of right handle member **700** is mounted within right handle track **724** which, through arm members **734** and **736** sliding within handle tracks **722** and **724**, allows food support platform **704** to vertically move within cooking vessel **714**.

[**0390**] Using right annular trough **742**, right handle knob **726** snaps into limited rotational engagement within right knob mounting slot **730** which is located at the base of right outer arm **736** (FIG. **86**). Likewise, left handle knob **728** is engaged within left knob mounting slot **732** (see FIGS. **80**, **85** and **86**).

[**0391**] Referring to FIG. **86**, located on right handle knob **726**, and directly adjacent and outward of right annular trough **742**, are right latch spring **740** and right latching paw **738**. Right latching spring **740** rotationally biases **788** right latching paw **738** into engagement with upper right latch receptacle **744**, and alternatively, with right lower latch receptacle **746** (FIGS. **85** and **86**) when right handle member **700** is mounted within right handle track **724**.

[**0392**] The above handle mechanism is mirror imaged on the left side of embodiment **706** (FIG. **85**).

[**0393**] Right handle member **700** and left handle member **702** may be detached from food support platform **704** for storage, cleaning, or other purposes. Handle members **700** and **702** may attach to food support platform **704** using: screws and wing nuts; two flat formed tunnels in food support platform **704** engaging by friction, snap fit or latches the ends of handle members **700** and **702**; or other means.

[**0394**] Descriptions herein related to right handle member **700** and components coupled to it also apply in mirror image to left handle member **702** and components coupled to it.

[**0395**] Food support platform **704** may be lowered into cooking vessels **714** and secured at one of at least three positions. The upper two of these three positions are controlled by engagement between right latching paw **738**, and right upper latch receptacle **744** and right lower latch receptacle **746**. The third of these three positions is the lowest position and is secured by food support platform **704** bottoming out above heat coil **740**. As shown in FIG. **76**, this lowermost position is the cooking position where foods are fully immersed into cooking liquids.

[**0396**] As shown in FIG. **74**, the uppermost of the three food support platform **704** positions may be used for loading and unloading food. By mounting food support platform **704** high within cooking vessel **714** in this uppermost position, food loading and unloading is simplified and made more convenient by most of the food being exposed above or near the upper rim of cooking vessel **714** where the food can be easily gripped and manipulated.

[**0397**] As shown in FIG. **75**, the middle of these three food support platform **704** positions allows foods to be suspended above cooking liquid contained in cooking vessel **714**, and simultaneously allows lid **750** to be lowered and latched closed enclosing even the tallest foods able to be cooked within embodiment **706**.

[**0398**] Food support platform **704** may be first lowered into cooking vessel **714** by gripping right handle knob **726** and left handle knob **728** (FIG. **89**) and lowering them so that left outer arm **734** engages within left handled track **722** and right outer arm **736** engages within right handled track **724**. Knobs **726** and **728** are then further lowered until right latching paw **738**, biased by right latch spring **740**, engages right upper latch receptacle **744**. Simultaneously, this latching engagement occurs mirror imaged on the handle mechanism on the left-hand of embodiment **706**.

[**0399**] Lowering food support platform **704** from its uppermost to its middle position requires turning right handle knob **726** counterclockwise **752** (FIG. **85**), and likewise, in mirror image, turning left handle knob **728**. This disengages right latching paw **738** from right upper latch

receptacles **744**, and likewise with left handle knob **728**, and allows food support platform **704** to be lowered to its middle position.

[0400] This operation is repeated to lower food support platform **704** from its middle position to its lowermost position.

[0401] Raising food support platform **704** from its lowermost position to its middle position requires only gripping and lifting left handle knob **728** and right handle knob **726** until food support platform **704** is in its middle position. At this location, the right and left latching paws, biased by their respective latching springs, engage their respective lower latch receptacles.

[0402] Similarly, raising food support platform **704** from its middle position to its uppermost position, simply repeats the above process.

[0403] In all operations involving spring **740** pressure turning of handle knobs **728** and **726**, biasing these knobs may be augmented through hand torsional pressure.

[0404] Dismounting food support platform **704** from within cooking vessel **714** merely requires upward lift on left handle knob **728** and right handle knob **726**.

[0405] FIGS. **80** through **84** show how lid **750** attaches to cooking vessel **714** when cooking vessel **714** is assembled with outer enclosure **712**.

[0406] Lid rear flange **754** includes at its back left engagement slot **760** and right engagement slot **762**. When lid **750** is lowered **770** onto outer enclosure **712**, as shown in FIGS. **81** and **82**, left engagement slot **760** straddles left engagement notch **764**; and right engagement slot **762** straddles right engagement notch **766**.

[0407] Once lowered, lid **750** may rest in a stable open vertical position as shown in FIG. **82** supported by the upper portion of enclosure rear left flange **756** and the upper portion of enclosure rear right flange **758** (FIG. **82**).

[0408] From this open position lid **750** may be rotated forward **768** to its closed position as shown in FIG. **84**. Interference between left engagement slot **760** and left engagement notch **764**, as well as interference between right engagement slot **762** and right engagement notch **766**, hold down the rear of lid **750** when lid **750** is in its closed position (FIG. **83**).

[0409] In its closed position the forward portion of the lid **750** is held in place by the engagement between lid latching member **772** and lid latch orifice **774** (FIG. **84**). Lid latching member **772** comprises a flat probe with a barb undercut on its rear face. This undercut is biased rearward **782** and latches over the rear portion of lid latching orifice **774** when lid **750** is in its closed position.

[0410] To help in opening lid **750**, a spring may bias **784** the lid to lift away from its fully closed position when lid latching member **772** is moved forward **786** and releases from engagement from the rear portion of lid latching orifice **774**. This spring may be located on the forward portion of the upper horizontal rim of outer enclosure **712**, or it may be located on the portion of lid **750** directly adjacent to this location. This may be a separate spring, such as a metal leaf spring, or it may be integrally molded into either outer enclosure **712** or into lid **750**.

[0411] Such a spring biasing lid **750** makes it easier to open lid **750** by springing it into full disengagement with lid latching member **772** when lid latching member **772** is pulled away from its engagement with lid latch orifice **774**.

[0412] The above lid coupling arrangement makes it easy to remove lid **750** for cleaning or other purposes. It also allows lid **750** to rest in a fully open upright position for food loading or other purposes. Further, it allows lid **750** to be removed and inverted into cooking vessel **714** for compact storage. Finally, it allows lid **750** to be solidly latched closed while food is being lowered into, or being removed from, cooking liquid, and also while food is being cooked. This is a major safety factor.

[0413] Referring to FIG. **84**, left lid handle **778** and right lid handle **780** are disposed on lid **750** at its forward left-hand and right-hand corners respectively. This reduces the chance a user will be burned by escaping steam when the user opens embodiment **706** during cooking.

[0414] Lid **750** may have exhaust vents, filters, as well as other features, similar to those described earlier in this document for lids used on other exemplary embodiments.

[0415] Outer enclosure **712** includes enclosure rear left flange **756** and enclosure rear right flange **758** which extend rearward from the back face of enclosure **712** and provide support for storing embodiment **706** on its back as shown in FIG. **88**. This may be particularly convenient in many storage situations where storage height is limited, such as the below countertop storage illustrated in FIG. **88**.

[0416] During storage, whether embodiment **706** is stored on its back, its side, or upright, lid **750** may be inverted and placed into the top of cooking vessels **714** as described for other exemplary embodiments within this document.

[0417] FIG. **77** illustrates fry pot **793** which is used to cook smaller food articles such as, by way of example only: French fried potatoes, fish sticks, shrimp, onions, and other small food articles.

[0418] In embodiment **706**, fry pot **793** is placed on top of food support platform **704**.

[0419] Food is placed within fry pot **793**, and then hot cooking liquid is introduced into fry pot **793** through fry pot entry **797** located in the bottom of pot **793**. In embodiment **706** this is done by lowering food support platform **704**, with fry pot **793** on top of it, into hot cooking liquid contained within cooking vessel **714**, and allowing the hot cooking liquid to fill fry pot **793** through fry pot entry **797**.

[0420] Filter **795** covers fry pot entry **797** and filters liquid entering or leaving fry pot **793**. By filtering cooking liquid entering fry pot **793**, impurities which might affect food taste are filtered out. By filtering cooking liquid leaving fry pot **793**, cooking liquid useful life may be increased as explained herein.

[0421] In embodiment **706**, oil is emptied from fry pot **793** by elevating food support platform **704**, and fry pot **793** on top of it, above cooking liquid contained within cooking vessel **714**.

[0422] Filter **795** may be reusable and/or disposable. By way of example only, it may be a fine mesh stainless steel screen. Filter **795** may be removable from fry pot **793** for cleaning or other purposes.

[0423] Filter 795 may be placed in the bottom and/or any of the sides of fry pot 793.

[0424] Fry pot 793 is functionally different than perforated metal buckets which are commonly used in deep fat frying at least because such buckets have 20% or more of their surface area penetrated by open holes which freely allow cooking liquid to flow and circulate in and out of the buckets without substantial restriction.

[0425] Likewise, fry pot 793 is functionally different from baskets which are also commonly used in deep frying at least because such baskets also allow cooking liquid to freely circulate in and out of their interiors without substantial restriction.

[0426] Fry pot 793 may also be easier to clean than commonly used frying baskets.

[0427] An alternative to filter 795 is use of restrictive filler-drain holes. Such holes would limit cooking liquid entry and exit by occupying less than 10% of the surface area of fry pot 793. Such restrictive filler-drain holes would be placed in the bottom and/or sides of fry pot 793. Such restrictive filter-drain holes may reduce the uneven cooking effects of convection currents rising from heat elements.

[0428] Fry pot 793 may be adapted for use on any of the exemplary embodiments described herein.

[0429] FIG. 77 illustrates the presence of drain hole 799. Excessive foaming is an unpredictable problem in deep fat frying. It may be caused by: overusing cooking oil, or by mixing cooking oils, or by the type of cooking oil used, or by other reasons. When cooking oil excessively foams, the surface of the foam may overflow the oil containment vessel and cause oil to flow onto the top of the surface supporting the fryer.

[0430] Drain hole 799 helps prevent this by allowing oil foam to drain out of cooking vessel 714 before the foam overflows the upper rim of cooking vessel 714. Oil foam which exits drain hole 799 falls into lower outer enclosure 708 (which must be constructed without open holes in the overflow oil reservoir area). The oil may collect in lower outer enclosure 708 until emptied by a user. This helps prevent countertop or supporting surface damage, and helps reduce the risk of a user burning themselves by trying to stop extremely hot oil from flowing onto, and potentially damaging, their countertops.

[0431] To make user cleanup of this overflow oil easier, an oil collection bucket may be placed into lower outer enclosure 708. Such a collection bucket could slide in and out of lower outer enclosure 708 like a drawer, or simply be lifted from lower outer enclosure when cooking vessels 714 is removed from outer enclosure 712.

[0432] Drain hole 799 may be adapted for use on any of the exemplary embodiments described herein, and may be particularly useful in exemplary embodiments which automatically lower food into cooking liquid without the necessity of user presence. In such automated exemplary embodiments, unwitnessed overflowing oil could cause substantial damage before anyone became aware of it.

[0433] FIG. 77 also illustrates how cooking vessel 714 may be drained using a siphon. In FIG. 77, siphon 790, including: inlet hose 792, outlet hose 794, pinch valve 806,

hand pump 796 (which includes inlet one-way valve 798, siphon bulb 804, and outlet one-way valve 800); is shown mounted onto the forward upper lip of outer enclosure 712 through the use of siphon mounting clip 802.

[0434] To drain cooking liquid from cooking vessel 714, using siphon mounting clip 802, a user clips inlet hose 792 of siphon 790 to the forward rim of outer enclosure 712 (FIG. 77), and places the end of the outlet hose 794 into a containment and/or storage and/or disposal vessel. The user initiates the siphon process by repeatedly squeezing siphon bulb 804 until siphon action commences.

[0435] Should it be necessary to interrupt the siphon process to change containers or for other purposes, the user may squeeze pinch valve 806 closed.

[0436] FIG. 78 shows siphon 790 when not mounted to cooking vessels 714.

[0437] FIG. 79 shows alternative siphon 791. This is identical to siphon 790 except: pinch valve 806 has been replaced by stopcock 812; weighted inlet 808 is used to hold inlet hose 792 at or near the bottom of cooking vessel 714 instead of using siphon mounting clip 802; and air bleed valve 810 is shown which may be used to break the siphon drainage at any desired point rather than using a flow restricting valve such as pinch valve 806 or stopcock 812.

[0438] Air bleed valve 810 stops the flow of liquid through siphon 790 by introducing outside air into inlet hose 792 and thus breaking the siphon action.

[0439] To break the siphon action, any one of, or all of, or combination of: pinch valve 806, stopcock 812, or air bleed valve 810, may be present and used. Alternatively, a hose soft enough to be bent or finger pinched may be used to stop the siphon action.

[0440] Likewise, positioning the intake end of inlet hose 792 near or at the bottom of cooking vessel 714 may use any one of, any combination of, or all of: siphon mounting clip 802 and/or weighted Inlet 808, and/or other means, such as, by way of example only, a hose gripping notch cut into food support platform 704.

[0441] Weighted inlet 808 positions the end of the inlet hose 792 near or at the bottom of cooking vessel 714 by placing weight near or at the end of inlet hose 792. Weighted inlet 808 may also have a particulate filter within or coupled to it to strain particulates within the cooking liquid being drained so as to lengthen the useful life of the cooking liquid. By way of an example, weighted inlet 808 may have a fine mesh screen within it. This filter may be removable for cleaning or other purposes.

[0442] Drained cooking liquid may be disposed or reused. It is possible cooking liquid may be reused several times, depending on, among other things: cooking conditions, food being cooked, and type of cooking oil or liquid being used. Between uses it may be desirable to drain the cooking liquid from cooking vessel 714 and store it in protective containers.

[0443] Siphon 790 and/or alternative siphon 791 may also be used to fill cooking vessel 714 with cooking liquid by placing inlet hose 792 into the container of the cooking liquid, and placing the end of outlet hose 794 into cooking vessel 714, and then starting the siphon action.



[0444] Numerous features, devices, methods, constructions, and designs have been taught herein. Many, if not most, may be interchanged between exemplary embodiments. As examples: handles which are on the side walls of an outer enclosure and are used to transport an embodiment which uses motor powered swing arms to raise and lower a food support platform, may also be used on an embodiment which uses handles to manually raise and lower a food support platform; a bail type handle used to lift a food support platform free from an exemplary embodiment cooking vessel which moves its food support platform up and down by pumping cooking liquid using a bidirectional pump may also be used on exemplary embodiments which use powered swing arms or hand operated handles to raise and lower their food support platforms; heat coils that are immersed into cooking liquid may be interchanged for heat coils that mount external to a cooking vessel; or a lid which has an angled glass viewing window might be replaced with a lid which is molded from transparent or translucent material; or a wiper mechanism used to clear the inside of a glass panel from condensation might equally well be use on a molded transparent or translucent lid; or a lift mechanism which uses powered swing arms might replace a manual lift mechanism; or a thermostatic tubular probe which mounts inside a cooking vessel where its end is immersed in cooking liquid might replace an externally mounted thermal sensor; or a circuit which determines cooking time through use of a timer might be replaced or used in conjunction with a circuit which gauges cooking time by the temperature of the food being cooked; etc. One knowledgeable in the art would easily understand this interchangeability and therefore would readily recognize the value of each feature, device, method, construction, and design when placed in combination with any or all of the other similar items suggested.

[0445] Likewise, one knowledgeable in the art would recognize that devices taught herein might be used for various kinds of cooking. As examples: they might be used for deep fat frying; steaming of fish, fowl, meats, and vegetables; flavored steaming of various kinds of food including imparting smoked, spiced, sweet or other kind of flavors to foods; baking, such as is common with tub roasters of the type made by Nesco; making of stews and soups; boiling of fish, fowl, meats, and vegetables; etc.

[0446] Again, one knowledgeable in the art would readily see these alternative applications.

[0447] Referring to FIGS. 90 through 99, this additional preferred embodiment includes: lid 900 which contains and mounts wire mesh filter 919 which filters debris from the exhaust of the cooking process. When closed, lid 900 rests upon upper flange 920 of cooking vessel 902 forming a cooking cavity 903. Upper flange 920 in turn engages upper rim 922 of outer enclosure 918. When cooking, cooking vessel 902 rests within outer enclosure 918.

[0448] Electric heater unit 924 is contained entirely within enclosed heatsink 914 where it is free from contact with cooking liquid contained within cooking vessel 902.

[0449] Alternatively, electric heater unit 924 may be a bare exposed rod type heat coil in direct contact with cooking liquid contained within cooking vessel 902.

[0450] Wires run within tubes 926R and 926L which are contiguous with tubes which are part of electric heater unit 924 or which are contiguous with outer rods of the rod type heat coil.

[0451] Bracket 928 is coupled to tubes 926R, 926L, and 926C and provides structural stability. Oil level indication holes 992 (FIG. 116) penetrate bracket 928 and provide a clear, difficult to obscure, indication of the height of cooking fluid levels within cooking vessel 902. This in turn provides unambiguous, easy to read indications of the volume of cooking fluid within cooking vessel 902.

[0452] At their tops, tubes 926R, 926L, and 926C bend and couple to control box 912 (see FIG. 116). This coupling may be through a fixed rigid mounting, or it may be through a plug which can be detached to separate tubes 926R, 926L, and 926C as a unit from control box 912, for storage, shipping, cleaning, or for other purposes.

[0453] Wires within tubes 926R, 926L, and 926C connect control box 912 to respectively: the heat coil input, the thermostat and thermal fuse, and heat coil output. By connecting the thermostat and thermal fuse in series with either the heat coil input or the heat coil output, the number of connections required between the control box and the wires within tubes 926R, 926L, and 926C can be reduced to two. This means that if tubes 926R, 926L, and 926C are coupled to control box 912 through a plug, then only a two prong plug is required. Such a simplified plug, when compared with alternatives having plugs with three or more prongs, should be less expensive to produce and be more reliable.

[0454] Control box 912 and attached electric heater unit 924 may be detached from cooking vessel 902 and outer enclosure 918 simply by lifting control box 912 upward.

[0455] Power cord 932 couples to control box 912 through magnetically secured safety power socket 934, such as in use on many home deep fryers. Magnetically secured safety power socket 934 easily breaks away and disconnects power from control box 912 if tension is placed on power cord 932.

[0456] Power cord 932 may couple to a wall mounted power outlet plug, or connect to power through other means.

[0457] Rib 994 projects from the back of outer enclosure 918 (FIG. 96) and dislodges magnetically secured safety power socket 934 from power cord 932 when control box 912 and attached electric heater unit 924 are lifted and detached from cooking vessel 902 and outer enclosure 918. This provides safety by automatically disconnecting power from the control box when the control box is dismounted from the rest of the exemplary embodiment. It is also more: obvious, inexpensive, and reliable than safety switches which may provide similar type safety protection.

[0458] Handle 1074 (FIGS. 98B—upper enlarged, and 102) on the back of control box 912 provides a convenient hand grip for the removal of control box 912 from cooking vessel 902.

[0459] Cooking vessel light 1070 is located in the forward left vertical upper portion of control box 912 (FIG. 98A—upper enlarged). Cooking vessel light 1070 turns on when electric heater unit 924 is activated, and may illuminate the interior of cooking vessel 902 when the exemplary embodiment is cooking. This may help in determining cooking progress as well as provide a certain level of visual interest from light emanating from the exemplary embodiment. Lens 1072 on the top of control box 912 is illuminated by the bulb in cooking vessel light 1070 and may serve as an inexpensive “on” indicator light.

[0460] When the device is cooking, the control/heating assembly 936, which includes: control box 912, tubes 926R, 926L, and 926C, electric heater unit 924 and heatsink 914, is lowered over and mounted on to the edge of upper flange 920 by straddling it, as shown in FIGS. 96 and 97. This results in enclosed heatsink 914 being cantilevered and spaced above the floor of cooking vessel 902. A brace, extending from or part of either the floor of cooking vessel 902 or from heatsink 914 or some combination of these, may be added to give strength to cantilevered heatsink 914. As an example of such a brace, and not by way of any limitation, raised lower floor portion 915 of cooking vessel 902 (FIG. 117) may contact heatsink 914, may be added to provide strength. As stated herein, heatsink 914 may not be present in all embodiments built according to the teachings herein. Each of the above structures may be adapted to function with bare rod type heat coils. Such adaptation is easily done by one knowledgeable in the art and thus is not covered in detail herein.

[0461] Alternatively, raised lower floor portion 915 (see FIG. 117) may contact the bottom of food support platform 940 to provide structure, and to provide spacing away from heatsink 914, or an alternative rod type heat element. Raised lower floor portion 915 may be constructed to resemble a two tiered wedding cake and provides structural support and spacing to both the heating element and the food support member.

[0462] Raised lower floor portion 915 may reduce the amount of cooking liquid needed by substituting its volume for expensive cooking liquids.

[0463] Heatsink 914 contacts electric heater unit 924 to increase heat dispersion and transfer area and thus lower transfer temperatures between electric heater unit 924 and liquid contained within cooking vessel 902. High temperatures may cause cooking oil to have shortened life, and high temperatures have been alleged to generate unhealthy substances, such as cancer-causing agents, within cooking oils.

[0464] Heatsink 914 may be fabricated from any suitable heat transmitting material including, but not limited to, metals such as: aluminum, copper, and steel.

[0465] Food support assembly 910 may be mounted in one of three positions, each positioning food support assembly 910 differently with respect to cooking vessel 902. Each position in turn results in food support platform 940 being in different positions above the floor of cooking vessel 902 as shown in FIGS. 92, 93, and 95.

[0466] Feet 942 (FIGS. 102 and 103) elevate the bottom of outer enclosure 918 from the surface on which it rests. This elevation helps prevent heat damage to countertop surfaces. Feet 942 may have pliable outwardly domed the lower surfaces. Such construction reduces embodiment rocking when the embodiment is placed on uneven surfaces.

[0467] Lower handles 944R and 944L located on the lower right and left hand perimeter of outer enclosure 918 (see FIGS. 95 and 96), and upper handles 946R and 946L located on both sides of the back of outer enclosure 918, make it much easier for the exemplary embodiment to be: lifted, tipped, carried, dumped and otherwise maneuvered.

[0468] FIG. 105 illustrates how the rounded coffin shape of the lower cross section of cooking vessel 902, which is

generally broad and circular at one end and tapers back and away from the generally broad and circular end to have a generally narrower opposite end, efficiently fits fowl 908, such as a chicken or a turkey, with minimal wasted space. This cross-sectional shape also is able to efficiently accommodate substantial quantities of other foods to be fried or steamed or otherwise cooked.

[0469] Other fryers have lower cooking pot cross sections which are generally symmetrical along two orthogonal horizontal axes. The exemplary embodiment as illustrated by contrast, is generally symmetrical to one horizontal axis only, while being asymmetric to any horizontal axis which is orthogonal to this first horizontal symmetrical axis.

[0470] This efficient rounded coffin shape cross-section may be used in any orientation. As nonlimiting examples: the narrow end can face toward the user, or away from the user, or be rotated to any angle in between. In combination with this, it may be generally horizontal as illustrated, or rotated up to where the narrow end is vertically above the broad and circular end, or rotated down to where the narrow end is vertically below the broad and circular end, or any angle in between. In combination with both of the above, it may be rotated so that large fowl 908 rests generally on its back, or on its breast, or on its head end, or on its tail end, or on its side, or any angle in between.

[0471] This efficiency, when frying, reduces the amount of cooking oil needed to cook fowls, and particularly to cook large ones. This in turn reduces operating costs and warmup times. This efficiency also, in all cooking situations, reduces the countertop footprint needed for the exemplary embodiment when it is compared to other fryers using alternative shaped cooking vessels to cook equal sized fowls and other foods.

[0472] As shown in FIGS. 90, 91, 98A and 98B, cooking vessel 902 has a broader cross-section at its top than in its lower portion. It is common when deep fat frying for cooking oil to foam and expand its volume. The broader cross-section in the upper portion of cooking vessel 902 reduces the chance of foaming cooking oil overflowing cooking vessel 902 by providing additional room for the expanding cooking oil to habitate. This geometry also reduces the chance that foaming cooking liquid will overflow cooking vessel 902 resulting in the loss of cooking liquid for the cooking process.

[0473] Overflow holes 948a, 948d, and 948e (FIGS. 90 and 91) help drain off excess cooking liquid and foam to greatly reduce the likelihood of cooking vessel 902 overflowing on to a countertop. Excess liquid and foam exiting through the drain holes drain directly into the bottom of outer enclosure 918 where they can be easily dumped or otherwise emptied. Alternatively, the drain holes may drain into a container placed in the bottom of outer enclosure 918. This container could be easily removed, dumped and cleaned. This container could also be, in yet a third alternative, located under the floor of outer enclosure 918 with outer enclosure 918 having one or more drain holes to empty into the container. In this configuration, as just one alternative, the container could hang below outer enclosure 918 and be pulled in and out like a drawer.

[0474] Overflow holes 948a, 948d, and 948e may be formed by punching holes into the sides of cooking vessel

**902** and bending back the punched metal so that it is in close proximity or touching the inside upper perimeter wall of outer enclosure **918**. This can enhance the structure of the exemplary embodiment, and help it resist damage, particularly in an accidental drop or during shipping.

[0475] Overflow drain holes **949A** and **949B** are shown indented into upper flange **920** of cooking vessel **902**. Overflow drain holes **949A** and **949B** may be used in conjunction with, or instead of, overflow holes **948a**, **948d**, and **948e**. Overflow drain holes **949A** and **949B** may drain in the same manner and into the same receptacles as overflow holes **948a**, **948d**, and **948e**. Overflow drain holes **949A** and **949B** may penetrate through a lowered horizontal plane surface as shown, or through an angled surface which may be curved or flat, or through any other geometric configuration which will place upper flange **920** of cooking vessel **902** above drain holes **949A** and **949B**.

[0476] FIG. 119 shows overflow reservoir **996** which can be used in conjunction with any of the drain holes described above, simply by providing one or more passageways to reservoir **996** from the drain holes, such as, by way of a nonlimiting example, by placing one or more holes in the floor of outer enclosure **918**. Overflow reservoir **996** may alternatively be used without any drain holes. By way of a nonlimiting example, upper flange **920** of cooking vessel **902** may be uniformly horizontal, angled, or may have one or more lowered sections. In each of these examples, cooking fluid would be allowed to overflow all or portions of upper flange **920** and subsequently drain into overflow reservoir **996**. Outer enclosure **918** may loosely rest within overflow reservoir **996**, or it may be wedge fitted, or latch fitted, or may be coupled by some other acceptable means.

[0477] Cooking vessel **902** may be constructed out of any suitable material. As an example, and not by way of any limitation, it may be constructed from: aluminum, copper, stainless steel, mild steel, or any other suitable material. This material may or may not be coated. As an example, and not by way of any limitation, it may be coated with a nonstick coating, or with a corrosion resistant coating such as chromium or nickel.

[0478] Downward facing flange **952** (FIGS. **98A**—lower enlarged and **98B**—lower enlarged) located on the upper perimeter edge of cooking vessel **902** engages into trough **950** located on the upper perimeter edge of outer enclosure **918** when cooking vessel **902** is inserted into outer enclosure **918**. This helps increase the structure of the device and makes it easy to remove cooking vessel **902** from outer enclosure **918** simply by lifting cooking vessel **902** upward.

[0479] Bracing brackets **954** located in bottom inner perimeter of outer enclosure **918** (FIG. 117), directly contact, or come close to contacting cooking vessel **902**. They provide additional structure both under normal use, and in the event of accidents, such as falling off a countertop, or impacts while shipping. Bracing brackets **954** may be formed as part of outer enclosure **918**, or they may be additional parts. As but two examples, and not by way of limitation, outer enclosure **918** may be molded from polypropylene with bracing brackets **954** included as part of the molded part; or bracing brackets **954** could be made of metal, such as galvanized steel, and be mounted into outer enclosure **918**.

[0480] Hand grip interruptions **956** cut into the outside right and left hand edges of trough **950** (FIGS. **91**, **92**, **93**,

and **95**) allow the user to grasp downward facing flange **952** to help in the insertion and removal of cooking vessel **902** into and from outer enclosure **918**. Overflow hole **948D** and its corresponding counterpart on the right hand side of cooking vessel **902** which is not shown, may also may serve as finger/thumb grips to help in the insertion and removal of cooking vessel **902** into and from outer enclosure **918**. Being able to easily insert and remove cooking vessel **902** into and from outer enclosure **918** may at least facilitate cleaning.

[0481] Latch **958** is located on the forward upper edge of outer enclosure **918**. It secures lid **900** when lid **900** is lowered. Latch **958**'s barbed point **966** (FIGS. **118A** and **118B**) is resiliently biased toward the back of outer enclosure **918**, causing latch **958** to catch on the backside of latch hole **960** and automatically latch lid **900** down when lid **900** is lowered.

[0482] Latch lock **962** rotates **964** (FIGS. **118A** and **118B**) to lock latch **958** closed (FIG. **118B**) and rotates again to release the latch **958** before lid **900** can be reopened (FIG. **118A**). This is both a safety feature, due to requiring two deliberate actions instead of just one to release latch **958** and open lid **900**; and a structural feature to ensure latch **958** remain securely closed even when stressed, such as, by way of nonlimiting examples, during an accidental drop or during shipping.

[0483] At its rear, lid **900** is coupled to the rest of the exemplary embodiment through a hand releasable hinge arrangement (FIGS. **94A**, **94B**, and **94C**). This structure allows lid **900** to be fully closed (FIGS. **94B** and **94C**) or rotated open to a stable, just past vertical position (FIGS. **90**, **91**, and **94A**). It also allows lid **900** to be easily disengaged from engagement with the rest of the exemplary embodiment simply by lifting lid **900** upward.

[0484] Referring to FIGS. **94A**, **94B**, and **94C**, right hinge flange **998** is part of outer enclosure **918** and includes cut out **1000** which engages right slot **1002** located on the rearmost portion of horizontal outer flange **1004** of lid **900**. Cut out **1000** limits the rotational travel of lid **902** to its open and close positions. When lid **900** is open (FIG. **94A**), horizontal flange **1004** rests against the top of right hinge flange **998** and prevents lid **900** from falling further backward. When lid **900** is in its closed position (FIGS. **94B**, and **94C**), cut out **1000** limits the upward travel of the rear of lid **900** away from cooking vessel **902** by trapping lid **900**'s rear under the upper portion of cut out **1000** (FIG. **94B** and **94C**).

[0485] When lid **900** is closed, rib **1006** is generally at right angles to and also is located on the rear of lid horizontal outer flange **1004** (FIGS. **94A**, **94B**, and **94C**), engages into slot **1008** located on right hinge flange **998** as part of cut out **1000**. This makes the engagement between lid **900** and outer enclosure **918** more secure by limiting fore and aft movement of lid **900**.

[0486] The hinge arrangement described above is mirror imaged on the left-hand side of the exemplary embodiment.

[0487] Referring to FIGS. **94A**, **94B** and **94C**, lid **900** is also held closed when food support assembly **910** is fully lowered to its cooking position (FIG. **93**). Referring to FIGS. **94B**, **95**, **96** and **98B**—upper enlarged, hook **968** located on the rear top of food support assembly **910**, latches onto resilient, cantilevered, forward angled rib **970** located on right perimeter flange **972** of lid **900** (FIG. **94B**) and holds

lid **900** in its closed position until food support assembly **910** is raised (FIG. **92**). Similar structure is mirror imaged on the left-hand side of the exemplary embodiment. By being resilient; cantilevered, forward angled rib **970** allows lid **900** to lower and become latched under hook **968** even if food support assembly **910** is mistakenly in its lower most cooking position (FIG. **94**) when lid **900** is lowered. Having lid **900** secured closed when food support assembly **910** is lowered is a safety feature which helps ensure lid **900** will not be accidentally raised when cooking is taking place.

[**0488**] Lid **900** secures filter **919** below filter vent holes **974** using a snap fit into rectangular vertical rib frame **976** (see FIGS. **90**, **91**, **95**, **97**, **98A**—upper enlarged, and **98B**—upper enlarged). Filter **919** is open on its lower side which faces into cooking vessel **902**. Filter **919** helps to remove undesirable debris from cooking exhaust. Filter **919** is spaced away from the roof of lid **900** to allow circulation through all portions of filter **919**. Filter **919** may be constructed from any of several different materials known to those knowledgeable in the art. As nonlimiting examples: filter **919** may be an open metal mesh, or an open plastic mesh, or a nonwoven substance such as nonwoven polyester, or fiberglass, or it may contain activated charcoal, or any other appropriate filtering material. Likewise, Filter **919** may be reusable or disposable. Filter **919** may work on any suitable filtering principle. As nonlimiting examples: it may condense pollutants onto cool surfaces, it may limit the size of particles, it may introduce substances to help exhaust be more benign, or it may use other advantageous principles.

[**0489**] Referring to FIG. **98A**—upper enlarged, probe holes **978R** and **978L** allow a user to insert an elongated tool or probe, such as the rod on a long stem cooking thermometer, into cooking vessel **902**, as an example to test the temperature of cooked food or cooking liquid, without opening lid **900**. This is a safety feature providing lid **900** as a safety barrier when such temperatures are being taken.

[**0490**] Lid **900** may be made of any suitable material. As an example, and not by way of any limitation, it may be formed from opaque material, such as the molded ABS or molded polypropylene. Lid **900** could also be formed from transparent or tinted transparent material, such as acrylic, polycarbonate, SAN, or other transparent material.

[**0491**] Alternatively, lid **900** may be molded from translucent plastic, such as polypropylene, which would allow ambient light to enter into cooking vessel **902**. However, using a translucent material may not allow suitably clear observation of the contents of cooking vessel **902**. Such clear observation may be useful, at least in determining the cooking progress of foods.

[**0492**] Circular glass **980**, mounted in the forward upper portion of lid **900**, allows clear observation of the contents of cooking vessel **902**. Circular glass **980** is mounted with a snap fit into circular vertical rib frame **982** (see FIGS. **95** and **96**). In combination with translucent material used to fabricate to lid **900**, circular glass **980** (FIG. **98A**—upper enlarged) may provide unusually good observation of the contents being cooked in cooking vessel **902**, particularly when compared to other deep fryers having mostly opaque lid surfaces.

[**0493**] Lid **900** may be virtually or totally monolithic. As an example, and not by way of any limitation, it may be

molded in a single piece from clear, opaque, or translucent material without having circular glass **980**. This could provide substantial cost savings and increase reliability, structure, and durability.

[**0494**] Being completely monolithic, as an example, being molded as a single piece without glass **980**, or being almost monolithic, as shown, with the presence of glass **980**, may allow lid **900** to be easily cleaned by hand or in a dishwasher.

[**0495**] During the cooking process, condensation and debris may collect on the inward side of circular glass **980**. Referring to FIGS. **90** and **92**, in order to help prevent this from obscuring clear observation of the contents of cooking vessel **902**, rotary wiper **984** may be hand rotated using knob **988**, causing its wiper blades **986** to rotate against the inside of glass **980** and thus to wipe and clean the inside of circular glass **980**. Flange **990**, located at the base of knob **988** and above the upper surface of circular glass **980** (FIG. **92**) helps prevent users from getting burned on circular glass **980** when knob **988** is being hand turned.

[**0496**] Referring to FIG. **98A**—upper enlarged, food support assembly **910** includes right hand handle assembly **1010** and left hand handle assembly **1012** respectively which are removeably attached to food support platform **940**. Right hand handle assembly **1010** includes right hand grip **1014** which is rigidly coupled to right handle support member **1016**. Right handle support member **1016** at its base is bent at right angles and away from right hand grip **1014** (see FIG. **98A**—upper enlarged).

[**0497**] Also referring to FIG. **98A**—upper enlarged, this bent end of right handle support member **1016** slides into, and removeably mounts into right handle mounting track **1018** located on the right side of support platform **940**. Referring to FIG. **98B**—food support enlarged, once fully slid into track **1018** the bent end of right handle support member **1016**, engages food support platform **940** through right latch member **1020** located on the bent end latching against right resilient latch member **1022**. Right hand handle assembly **1010** may be released from engagement with food support platform **940** by pulling down on the end **1021** of right resilient latch member **1022** and pulling right hand handle assembly **1010** away from food support platform **940**. This structure is mirrored on the left side of the food support assembly.

[**0498**] Food support platform **940** has holes in its floor to facilitate draining of cooking liquid. Food support platform **940** includes solid perimeter wall **1024** which provides structure and helps support food placed upon food support platform **940** (FIG. **98B**—food support a large).

[**0499**] Referring to FIGS. **98A**—upper enlarged, and **98B**—upper enlarged, large central hole **1026**, located generally in the center of food support platform **940** helps steady food placed upon food support platform **940** and allows food placed upon food support platform **940** to rest as low as possible within cooking vessel **902**, which, by way of example, may result in less cooking oil being needed to cover food being cooked, which in turn may result in lower operating costs and quicker warm up and overall cooking times.

[**0500**] Right handle support member **1016** rigidly connects at its top to right hand grip **1014**. Midway down right hand grip **1014** is right handle indent **1028** which provides a grip point for the user.

[0501] Further down still on right hand grip **1014** are right upper engagement member **1030** and right lower engagement member **1032** (see figure. **98B**—food support enlarged). Right upper engagement member **1030** and right lower engagement member **1032** cooperatively engage engagement holes **1034A** and **1034B**, or **1034C** and **1034D**, or **1034E** and **1034F** (FIG. **97**) to mount food support assembly **910** in respectively: its forward tilted uppermost drainage position (FIG. **95**), in its horizontal middle food insertion position (FIG. **96**), or in its horizontal lower most cooking position (FIG. **93**). This engagement is aided by barb **1068** (FIG. **98B**—food support enlarged) located at the end of right lower engagement member **1032**. Barb **1068** engages the lower portion of each appropriate engagement hole and helps prevent right lower engagement member **1032** from being accidentally disengaged.

[0502] This engagement between engagement members **1030** and **1032**, and their respective engagement holes is also aided by right handle support member **1016** acting like a leaf spring which biases engagement members **1030** and **1032** against right the side of outer enclosure **918** where they may be spring loaded into their respective engagement holes. Again, this action is mirror image of the left side of outer enclosure **918**.

[0503] An alternative to the essentially horizontal axis of right lower engagement member **32** is to incline right lower engagement member **32** downward  $10^{\circ}$  to  $60^{\circ}$  as it extends out and away from right hand grip **1014**. This provides natural engagement which increases as weight on food support assembly **910** increases. Such a configuration may also eliminate the need for barb **1068**.

[0504] Note, all structure and actions described herein for the right hand side of this exemplary embodiment for mounting food support assembly **910** to outer enclosure **918** are mirror imaged on the exemplary embodiment's left-hand side.

[0505] Also note that all referenced figures within this document are given to help in more quickly understanding the features of the exemplary embodiments. They are not intended as a substitute for reviewing all information within this document to understand the teachings herein

[0506] To accomplish the engagement between food support assembly **910** and outer enclosure **918**, a user pulls right handle indent **1028** and its mirror image counterpart on the left side away from food support platform **940**. This is made possible through the ability of right handle support member **1016**, and its counterpart on the left-hand side, to resiliently bend allowing outward excursion of the lower portion of right hand grip **1014**.

[0507] This in turn may be possible by constructing right handle support member **1016** from any suitable resilient material. This, by way of nonlimiting examples, could include constructing it from: stainless steel, aluminum, mild steel, or other suitable material.

[0508] Right lower engagement member **1032** is inserted into right open track **1036** located on the right side of outer enclosure **918** and is slid up and down until it reaches the desired position, and then it is inserted into the appropriate engagement hole (see FIGS. **90**, **98A**—upper enlarged, and **98A**—lower enlarged). Right open track **1036** makes it

easier to slide engagement members **1030** and **1032** up and down and find their respective engagement holes.

[0509] Having two engagement members, right upper engagement member **1030** and right lower engagement **1032** (FIG. **98B**—food support enlarged), helps stabilize the food support platform from tipping forward or backward.

[0510] Once again, these structures and actions are simultaneously replicated and mirrored on the exemplary embodiment's left-hand side.

[0511] Right upper engagement holes **1034A** and **1034B** are angled off vertical (see FIGS. **95**, **97** and **104**) to cause food support **904** to tilt forward to aid in draining of foods including large and small fowl, as well as other foods.

[0512] Right upper engagement member **1030** and right lower engagement member **1032** are different in shape. This difference prevents engagement member **1032** from being mistakenly placed into a hole design for engagement member **1030**, as an exemplary benefit. Because of this, food support assembly **910** slides smoothly up and down guided in open track **1036** until it reaches one of its three pre-designated food holding positions.

[0513] Although three food support assembly **910** positions are described, more positions can be easily added as desired simply by adding more engagement holes.

[0514] Control box **912** is mounted to cooking vessel **902** and outer enclosure **918** by control box **912** straddling the upper overlapping rear edges of both the structures (FIGS. **95**, **96**, and **98A**). Electric heater unit **924** suspends downward from control box **912** into cooking vessel **902** (FIG. **98A**). Control box **912** includes user set timer **1038** which turns on and off heater unit **924**, and sounds an alarm simultaneous with turning off the heater (FIG. **98A**).

[0515] Cooking liquids can be heated to predictable desired temperatures simply by using timer **1038** to adjust the amount of time the cooking liquid is heated during warm-up.

[0516] Likewise, timer **1038** may be used to time the cooking cycle using its alarm. Timer **1038** may also be a safety feature by having no continuously on position and thus limiting to the timer limit the maximum amount of time the heater is on for.

[0517] As shown in FIGS. **91** and **96**, user access to user set timer **1038** is blocked when lid **900** is in its raise position. This is a safety feature preventing the user from turning on timer **1038**, and thus electric heater unit **924**, until lid **900** is lowered.

[0518] Also, timer **1038** has raised half moon shaped central portion **1076** (FIGS. **94C**, **96** and **98B**—upper enlarged) which serves as a finger grip and also prevents lid **900** from being fully opened until timer **1038** is in its full off position. This also is a safety feature.

[0519] Using this exemplary embodiment may include several steps. As an example of one way of using the exemplary embodiment, and not by way of any limitation, the following process may be used. Note that there are several other alternative methods for using this exemplary embodiment.

[0520] First, the user must open lid **900**, remove food support platform **910**, and pour in the appropriate amount of cooking liquid. This may be aided through the use of cooking fluid level indication holes **992** on bracket **928** (FIGS. **90** and **116**).

[0521] Next, the user must place the food to be cooked into cooking vessel **902**. This may be done by placing food support assembly **910** on a countertop and placing the food to be cooked on to it, and then lifting the food and support assembly into the cooking vessel and securing food support assembly **910** at its mid-level food insertion/removal position as described above (FIG. **91**). Lid **900** is then lowered and latched closed including locking the latch using latch lock **962** (see FIGS. **118A** and **118B**).

[0522] Next, the user must set timer **1038** to the appropriate time for heating the cooking liquid to the desired temperature. Note, the exemplary embodiment could have an adjustable thermostat. However, for reasons at least of: ease-of-use, cost, reliability, and simplicity, the illustrated exemplary embodiment uses a single temperature preset thermostat with backup thermal fuse.

[0523] Next, after the time set on timer **1038** has been reached and the cooking liquid is at cooking temperature, the user lowers food support assembly **910**, and the food that it is holding, into the hot cooking liquid.

[0524] At the end of the desired cooking time, possibly triggered by the alarm from user set timer **1038**, food support assembly **910** is raised by the user to either its intermediate or uppermost positions to allow the food to cool and drain. After the food has been cooled and drained, lid **900** is raised and food support assembly **910** and the cooked food is removed by lifting food support assembly **910** and the cooked food from cooking vessel **902** and back onto the countertop.

[0525] After cooling, cooking liquid may be removed from cooking vessel **902** using bailing ladle **1040** and funnel adapter **1042** (see FIGS. **98A**, **98A**—lower enlarged, **98B**, **98B**—lower enlarged, **99**, **100**, **101**, and **104**). Funnel filter **1044** snaps into funnel adapter **1042** (see FIGS. **99**, **100** and **101**) and filters cooking liquids, such as cooking oil, as they are emptied from cooking vessel **902** to extend their useful life.

[0526] Filter funnel **1044** is designed to snap into the pouring openings of various size cooking liquid containers. As an example, and not by way of any limitation, filter funnel **1044** is designed to snap into the pouring openings of blow molded 1 gallon to 3 gallon containers commonly used in grocery stores to contain cooking oils such as: corn oil, vegetable oil, and canola oil. Notched ribs **1064** engage the interior perimeter of pouring openings on common blow molded and other containers and securely hold funnel adapter **1042** in an upright position.

[0527] Filter funnel **1044** is snapped into funnel adapter **1042**, as a nonlimiting example, like snapping on a Tupperware (R) cap, as shown in FIGS. **99**, **100**, and **101**. Filter funnel **1044** is spaced away from the interior wall of funnel adapter **1042** (FIG. **101**) so that the interior wall of funnel adapter **1042** does not block cooking liquid from passing through the filter.

[0528] Filter funnel **1044** may use any of a variety of reusable or disposable filter mediums to filter out particu-

lates, chemical impurities, grease, oil, and other impurities. By way of nonlimiting examples: fine mesh screen, non-woven polyester, activated charcoal, cloth, or any other appropriate filter mediums might be used. By way of an example which is not limiting: filter funnel **1044** could resemble conical home coffee strainers which have either permanent fine mesh screens, or use conical shaped disposable insert filters.

[0529] Emptying cooking vessel **902** of cooled down cooking fluid is accomplished by repeatedly bailing cooking vessel **902** using ladle **1040**. This is most efficiently done with both food support assembly **910** and control box **912** removed from cooking vessel **902**.

[0530] The bailed cooking liquid contents of cooking vessel **902** may be dumped into filter funnel **1044** which is press mounted into the pouring opening of a liquid container, such as the container which the cooking liquid may have been purchased in. This is desirable because it allows convenient storage of the cooking liquid or it allows the cooking liquid's clean disposal.

[0531] Ladle **1040** is specifically designed for bailing cooking vessel **902**. Ladle handle **1046** is angled at 5° to 30° from ladle bucket **1048** so that ladle **1040** may reach deep inside cooking vessel **902**. Ladle handle **1046** has a hole at one end and so it may be hung.

[0532] Ladle bucket **1048** also has snout **1052** which protrudes forward off vertical 10° to 45° and is narrower at its tip than the corners of cooking vessel **902** so that ladle **1040** can fully bail out each corner of cooking vessel **902**.

[0533] Ladle bucket **1048** also has markings **1050** which allow it to be used as a measuring device.

[0534] Referring to FIGS. **98B**—lower enlarged, **102**, **103**, and **104**, outer enclosure **918** on the underside of its floor has prop member **906** which is attached to the underside of outer enclosure **918**'s floor by hinge **1054** and snap **1056**. Snap **1056** (FIG. **98A**—lower enlarged) holds prop member **906** flat against the underside of the floor of outer enclosure **918**.

[0535] Prop member handle **1058** extending from the forward left hand corner of prop member **906** (see FIG. **98A**—lower enlarged) allows the user to swing prop member **906** from its position resting against the underside of the floor of outer enclosure **918** (FIG. **102**) to a lowered position (FIGS. **103**, and **104**) where it can prop up and tilt outer enclosure **918** and cooking vessel **902** diagonally forward as shown in FIG. **104**. This tilting increases the ease with which cooking vessel **902** may be bailed.

[0536] Pour spout **1132** allows cooking vessel **902** to be emptied by tipping it and pouring out its contents. This may be used instead of bailing, or to augment bailing. Tipping the exemplary embodiment and pouring out the contents of cooking vessel **902** is made much easier due to the presence of upper handles **946R** and **946L** and the presence of lower handles **944R** and **944L** which alone or in combination make lifting, tipping, and pouring easier.

[0537] The outer wall of trough **950** is interrupted directly adjacent to pour spout **1132** to prevent cooking liquid from entering into and dirtying trough **950** during the pouring process.

[0538] Brackets **1060** extending from the underside of prop member **906** (FIG. **102**) hold information cards **1062** which can be pulled out at any time so that user can have information about the exemplary embodiment without having to find a recipe/instruction book. Information cards **1062** may also contain other information.

#### Additional Exemplary Embodiment

[0539] FIGS. **106** through **111** illustrate a variant of the just described exemplary embodiment. In this variant exemplary embodiment, control box **912** is replaced by automated control box **916**.

[0540] Referring to FIG. **106**, automated control box **916** contains: a central portion of upper basket lift arm **1088**, and a central portion of powered lower basket lift arm **1090**. Powered lower basket lift arm **1090** in turn is connected through a central levered portion **1100** formed in powered lower basket lift arm **1090** to the lower end of connecting rod **1086**, with the upper end of connecting rod **1086** being coupled to crank disk **1084**, which in turn is connected to, and rotated **1092** by, the output shaft of gear reduced lifting motor **1080**.

[0541] As seen in FIG. **106**, all of the above mechanism is contained within automated control box **916**. Automated control box **916** also contains electronic circuit **1082** which includes timer **1078**. A microswitch (not shown), which rides on a cam (not shown) positioned on the back surface of crank disk **1084**, is mounted behind crank disk **1084** and on the front face of the outer casing of gear reduced lifting motor **1080**.

[0542] This microswitch/cam combination, is similar to those described earlier in this document for alternative exemplary embodiments, allows electronic circuit **1082** to sense the position of upper basket lift arm **1088** and powered lower basket lift arm **1090**.

[0543] Upper basket lift arm **1088**, and lower basket lift arm **1090** each protrude out both sides of automated control box **916** and extend forward to the central right and left hand sides of outer enclosure **918** (see FIG. **107**) where they connect through upper pivot **1096R** and upper pivot **1096L** and through lower pivot **1098R** and lower pivot **1098L** (see FIG. **106**) to right handle assembly connecting bracket **1102** and left handle assembly connecting bracket **1104** (FIG. **106**).

[0544] Right handle assembly connecting bracket **1102** connects to right handle assembly **1106** through a vertical track sliding engagement. Likewise, left handle assembly connecting bracket **1104** connects to left handle assembly **1108** through a vertical track sliding engagement. Right handle assembly **1106** and left handle assembly **1108** are part of food support assembly **1110**, and are slideably releasable by hand from the rest of food support assembly **1110**. Right handle assembly **1106** and left handle assembly **1108**, unlike for the direct previous exemplary embodiment, do not engage outer enclosure **918**.

[0545] Upper basket lift arm **1088** exits automated control box **916** on its right side through right inverted "L" shaped elongated channel **1112**, and exits automated control box **916**'s left side through left inverted "L" shaped elongated channel **1114** (FIG. **106**). A user may slide, by hand, the central portion of upper basket lift arm **1088** to exit both

sides of automated control box **916** through the top or bottom of both right inverted "L" shaped elongated channels **1112** and **1114**.

[0546] This results in two different lifting geometries illustrated in FIGS. **108**, **109**, **110**, and **111**. When upper basket lift arm **1088** is in its lowest position exiting the elongated channels **1112** and **1114**, food support assembly **1110** is horizontal in both its raised (FIG. **108**) and lowered (FIG. **109**) positions.

[0547] When upper basket lift arm **1088** is in its highest and most forward position exiting the elongated channels **1112** and **1114**, food support assembly **1110** is horizontal in its lowered position (FIG. **111**), but it is tipped forward for food drainage (FIG. **110**) in its raised position.

[0548] Some foods, as a nonlimiting example, like French fries, are better cooked when they raise and lower on a horizontal food support. Some other foods, as a nonlimiting example, like turkeys, are better cooked if they are horizontal while cooking, but are tilted when they are drained and cooled at the end of the cooking cycle. The above structure advantageously provides both of these options.

[0549] Electronic circuit **1082** is connected to an electronic heat sensor located on the lower end of tube **1116** (FIG. **107**). When cooking liquid temperature is above a predetermined level which might injure the user in the event of direct contact (as a nonlimiting example, above 120° F.), even if the timer **1078** has expired and the exemplary embodiment is turned off, electronic circuit **1082** activates warning light **1118** which is located on the top of automated control box **916** (FIG. **107**) and warns the user of the potential hazard of hot cooking liquid. This is a safety feature.

[0550] The control mechanisms in this exemplary embodiment may function similarly to those described earlier in this document for alternative exemplary embodiments. As a nonlimiting example, the control mechanisms may employ the following process. When timer **1078** is user set for the desired cooking time, the cooking liquid heater is turned on and remains on until the desired cooking temperature is reached. On the embodiment shown, this is a factory preset temperature. However, variant embodiments may employ a user set cooking temperature.

[0551] Either at the end of a factory set interval, or more advantageously, when the desired cooking temperature is reached, electronic circuit **1082** activates the food lowering mechanism to lower the food into the cooking liquid. The food lowering/raising mechanism includes, but is not limited to: electronics circuit **1082**, food support platform **940**, lifting arms **1088** and **1090**, crank disk **1084**, and gear reduced lifting motor **1080**.

[0552] The food remains in the cooking liquid until the end of the user set cooking time interval is reached. At this point, the food lowering/raising mechanism, activated by electronic circuit **1082**, raises the food out of the cooking liquid. At this point electronic circuit **1082** turns off the heating coil and may or may not sound an alarm. Electronic circuit **1082** then delays for a preset time and sounds an alarm to indicate to the user that the food has been cooled and drained, and may be removed safely from the cooking vessel.

[0553] This exemplary embodiment may be produced using elements common with the previous exemplary embodiment, thus providing economies and flexibilities in manufacture. As a nonlimiting example, virtually all components except for the control box and handle assemblies may be commonly shared with both exemplary embodiments. A user could even interchange these components in their home, allowing for an easy way for a user to upgrade their product.

[0554] FIGS. 112, 113, 114, and 115 show a food holding basket system including: food containment baskets 911, 911A, 911B, as well as sheet food supports 1120, and 1120A. Food containment baskets 911, 911A, 911B share common construction as do sheet food supports 1120, and 1120A.

[0555] Referring to FIG. 112, food containment basket 911 has upper perimeter wire frame 1122 which mounts concave wire screen 1124 and springy bent rod support arms 1126, 1126A, and 1126B.

[0556] Referring to FIGS. 112, 113, 114, and 115, food containment basket 911 may rest and be supported on food support platform 940. Engagement of springy support arms 1126, 1126A, and 1126B of food containment basket 911A onto upper perimeter frame 1122 of containment basket 911, allows food containment basket 911A to mount on top of food containment basket 911 in one of two vertical positions as shown in FIGS. 113 and 114.

[0557] Food containment baskets 911, 911A, 911B, and sheet food supports 1120, and 1120A rest on, and generally mimic the plan view shape of, food support platform 940 (FIG. 115).

[0558] Basket 911 can be used alone in shallow cooking liquid to cook various foods such as onion rings and French fried potatoes. In these cases, as a nonlimiting example, a relatively small amount of oil is placed into cooking vessel 902 and heated, and food support platform 940, with food containing basket 911 on top of platform 940 is lowered into the cooking liquid.

[0559] Larger foods, such as, as a nonlimiting example, bigger cuts of meat, may also be cooked using just basket 911 alone and an appropriate amount of cooking liquid.

[0560] Basket 911A may also serve as just a lid for basket 911 in order to keep the content of basket 911 contained, and also possibly to keep the contents of basket 911 continuously submerged in the cooking liquid during the cooking process. To do this basket 911A may be in either its highest position (FIG. 113), or in its lowest position (FIG. 114).

[0561] Basket 911A in deeper cooking liquid may not only serve as a lid for food contained in basket 911, but it may contain food as well. In such an example, food may be placed between the floor of basket 911A and the floor of basket 911, as well as directly into basket 911A. Likewise, basket 911B may be attached to basket 911A for a three basket stack, with basket 911B either used as just a lid or as a lid and food container.

[0562] Using stacked baskets can greatly increase the amount of food the exemplary embodiment may cook.

[0563] Sheet food support 1120 fits within basket 911 and provides support for various types of food which cannot be cooked directly in a wire screen basket. As examples not to

be construed as limiting, doughnuts, tempura, Hush Puppies, and many soft doughy foods bake onto wire screening during frying. Most of these foods are generally cooked by directly dropping the foods into a pool of hot oil. This, however, presents a safety hazard by exposing a user directly to an open pool of very hot cooking liquid which may sputter and boil upon food contact.

[0564] Such foods can be more safely cooked by placing them on top of sheet food support 1120, and possibly one or more additional sheet food supports stacked in baskets above sheet food support 1120 (FIG. 115), and placing the baskets on food support platform 940, and lowering the entire structure into hot cooking liquid with lid 900 closed to safely protect the user.

[0565] Sheet food support 1120 may have nonstick coating on its upper surfaces to facilitate foods not sticking to such upper surfaces.

[0566] Sheet food support 1120 has bent down edges 1128 to space it away from the wire screen floor of food containment basket 911.

[0567] During cooking, food placed on the upper surface of food support 1120 generally boils and floats away from the upper surface and is restrained from floating by contacting the undersurface of the floor of the wire basket directly above it, if such a basket is present. If such a basket is present, and if it has a sheet food support resting in it, the boiling action of the food can trap steam bubbles between the food floating against the overhead basket wire screen floor and the sheet food support resting on the wire screen floor of the overhead basket. This can cause uneven cooking of the food. To prevent this, bent down edges 1128 allows space between the wire screen floor of the overhead basket and the sheet food support resting on the wire screen floor.

[0568] Horizontal spaces 1130 between the bent down edges 1128 allow steam bubbles to exit from underneath the sheet food support without creating trapped steam bubbles which can cause uneven cooking.

[0569] It may be much safer to cook using sheet food support 1120 and having lid 900 lowered when food is: lowered into, cooked, and removed from hot cooking liquid.

[0570] All of the exemplary embodiments taught herein and in earlier documents to which this continuation in part is appended, may be constructed at any desired scale. As an example that is not to be construed as in anyway being limiting; in the exemplary embodiment directly above, it may be constructed for home kitchen countertop use. It might be particularly advantageous to construct such an exemplary embodiment so that it does not exceed 16½" in overall exterior height so that it will fit under most over countertop cabinets, at least for countertop storage. It would be even more advantageous if the height did not exceed 15½" to allow a margin of error for homes built which did not adhere strictly to accepted architectural standards.

[0571] Likewise, it is common for people to cook up to a 16 pound turkey for Christmas or Thanksgiving. To do this, it has been found advantageous to, in plan view, construct the interior of the cooking vessel to be between 10 inches and 14 inches at its widest point orthogonal to its generally symmetrical axes, and to be between 11 inches and 14½ inches along its generally symmetrical axis.



[0572] The exemplary embodiments taught herein have many features. To one knowledgeable in the art it would be obvious to combine features found in different embodiments taught herein in ways not specifically described in this document. As an example which should not be interpreted as being in anyway limiting, the system of emptying cooking oil from the cooking vessel by tipping and pouring the contents of the cooking vessel out through a pouring spout located on the upper rim of the cooking vessel, could be combined with one of the automated lift systems described at the very start of this document. Such apparent combinations should be considered as obvious and as part of the teachings herein.

[0573] FIGS. 121 through 132 illustrate another exemplary embodiment of the present inventions.

[0574] This exemplary embodiment contains many similar elements to exemplary embodiments described earlier. However, the handles and food support have been changed to offer at least, but not limited to, the following advantages.

[0575] When lowering 1151 food support 1150 into cooking vessel 1152 (FIGS. 121 and 128), right inner shoulder 1154 and left inner shoulder 1156 engaging upper rim 1153 of cooking vessel 1152 prevent food support 1150 from descending 1151 directly into cooking liquid contained in the bottom of cooking vessel 1152 when lid 1160 is raised (FIGS. 122 and 129). This, by stopping food movement just before the food enters the cooking liquid, prevents cooking liquid from being splashed onto the device user from food resting on food support 1150 being directly lowered too quickly into the cooking liquid. This also prevents cooking liquid from being splashed onto the device user by insuring that lid 1160 must be lowered before the food can be fully lowered into the cooking liquid.

[0576] After food resting on food support 1150 has been initially lowered into cooking vessel 1152 and lid 1160 has been lowered (FIGS. 124 and 131), right inner shoulder 1154 and left inner shoulder 1156 are disengaged from resting on upper rim 1153 by being pushed inwardly by right disengagement member 1170 and left disengagement member 1172 located on the right and left-hand sides respectively of lid 1160. Food support 1150 is then hand lowered 1151 into cooking liquid contained in the bottom of cooking vessel 1152, by lowering and opposingly outwardly moving right handle 1174 away from left handle 1176. This opposed movement of right handle 1174 away from left handle 1176 causes right outer shoulder 1178 and left outer shoulder 1180 to be disengaged from resting on upper rim 1153 which in turn allows food support 1150 to be lowered. Again, this lowering of food support 1150 into cooking liquid is only permitted when lid 1160 has been lowered and is able to provide protection from the device user being accidentally splashed by cooking liquid contained in cooking vessel 1152.

[0577] When food support 1150 is in its lower most position (FIGS. 125 and 132), due to the resting of the upper portion 1181 of right support arm 1182 and the upper portion 1183 of left support arm 1184 on the top of right disengagement member 1170 and the top of left disengagement member 1172 respectively, lid 1160 will only rise when food support 1150 is also raised. This

acts to prevent lid 1160 from being accidentally raised during cooking. Projection 1173 on the forward upper portion of left disengagement member 1172 limits the amount of upward travel for lid 1160 by binding against the inner top portion of right support arm 1182. This structure is mirror imaged on the right side of the embodiment. As an alternative, projection 1173 may be replaced with a rounded cam surface which lifts food support 1150 above its uppermost resting position before disengaging when lid 1160 is being raised. This has the net result of latching food support 1150 in its upper position if lid 1160 is accidentally raised during cooking.

[0578] Referring specifically to FIGS. 124 and 131, due to the impacting of the inner portion of right inner shoulder 1154 and the inner portion of left inner shoulder 1156 against right lid cut out 1186 and left lid cut out 1188 respectively, when food support 1150 is raised from its lower most position (FIGS. 125 and 132), it is not allowed to raise so high as to cause food resting upon food support 1150 to touch the underside of lid 1160 where it might cause an undesired cleaning problem.

[0579] Referring specifically to FIGS. 126 and 127, when food support 1150 is raised to its upper position (FIGS. 124, 126, 127, and 129), it may be tilted forward (FIGS. 126 and 127) to facilitate draining of cooking liquid from food supported on food support 1150. Tilting forward occurs by right outer shoulder 1178 and left outer shoulder 1180 being respectively rested on right shoulder support 1190 and left shoulder support 1192.

[0580] The lid latching mechanism on this exemplary embodiment has been changed. Referring specifically to FIG. 127, to release lid 1160 from its locked down position, this exemplary embodiment has a lid latching mechanism which requires only pinching together of two forward facing ribs, upper rib 1162 which is fixed to the lid, and lower rib 1164 which is attached to lid 1160 and is biased to a downward latched position 1168 by integral springing member 1166. Like other lid locking mechanisms described herein, latching this mechanism requires only moving lid 1160 to its closed position (see FIGS. 127, 126, and others).

[0581] Referring to FIG. 122, right forward pour spout 1163 and left forward pour spout 1165 in cooperation with forward lower handle 1167 and rear right handle 1169 and its mirror image counterpart, which is not shown in FIG. 122, help in tipping the exemplary embodiment to facilitate draining of cooking liquid from cooking vessel 1152. Cooking vessel 1152 may be removed from its outer enclosure to facilitate both draining of cooking liquid and cleaning.

[0582] FIGS. 133 through 136 illustrate a variant of the exemplary embodiment just described. This embodiment replaces right inner shoulder 1154 which is formed in right support arm 1182 with self lubricating block 1194. Likewise it replaces right outer shoulder 1178 with self lubricating block 1196, and left outer shoulder 1180 with self lubricating block 1198, and left inner shoulder 1156 with self lubricating block 2000.

[0583] Self lubricating blocks, 1194, 1196, 1198, and 2000, may be formed of any of many materials including,

but not limited to: Teflon, nonstick ceramics, oil impregnated sintered brass, as well as other materials having lubricating characteristics. Self lubricating blocks **1194** and **2000** may require resistance to cooking liquids at high cooking temperatures as well. Such high temperature cooking liquids may include, but are not necessarily limited to, cooking oils as well as water

[0584] This variant exemplary embodiment may move and operate more smoothly as a result of slippery, self lubricating blocks, **1194**, **1196**, **1198**, and **2000**.

[0585] Also illustrated in this variant exemplary embodiment are right indent **2002** formed in the right hand side of upper rim **1153** of cooking vessel **1152**, and left indent **2004** formed in the left hand side of upper rim **1153** of cooking vessel **1152**, which cooperate respectively first with right side protrusions **2010**, and **2012**, and secondly with left side protrusions **2014**, and **2016**, formed respectively in right side self lubricating blocks **1194**, and **1196**, and with left side self lubricating blocks **1198**, and **2000** (as shown in FIGS. **133** and **134**) to provide a more positive engagement between the food support assembly and cooking vessel **1152**.

[0586] Left peg **2015** and right peg **2017** protrude respectively from the inner surfaces of left support arm **1184** and right support arm **1182**, and by colliding respectively with left cut out **2019** and right cut out **2021** on the underside of lid **1160**, prevent food supported on food support platform **1150** from raising too high and hitting the underside of lid **1160** when food support platform **1150** is being raised and lid **1160** is in its lowered position.

[0587] FIGS. **135** and **136** show two other features of this variant exemplary embodiment. The bottom of the embodiment has L-shaped tracks **2006** and **2008** protruding downward from it which are spaced apart and dimensioned to accept by sliding in, one or more DVDs or CDs and/or printed material having similar dimensions to a DVD or CD in plan view. Such DVDs/CDs and/or printed material may include, but are not be necessarily limited to, instructions, recipes, sales materials, safety instructions or warnings, and/or other information. An edge or corner of these materials, such as corner **2018**, may be exposed for easy gripping to slide them out for use. Among other purposes, having L-shaped tracks **2006** and **2008** may serve to keep recipes and operating instructions readily at hand any time the embodiment is used.

[0588] FIGS. **135** and **136** also show a prop foot **2010** which may be slid down and locked in the down position to tilt the exemplary embodiment at a forward angle when it's cooking liquid is being bailed out. This is similar to the pivoting prop described earlier which accomplished a similar purpose.

[0589] FIGS. **137** through **140** illustrate another exemplary embodiment. In this embodiment food support **2020** has right stiff support arm **2022** and left stiff support arm **2024** removably attached to its right and left sides respectively. Forward perimeter wall **2026** of food support platform **2020** is elevated to help support food resting on food support **2020**, particularly when food support platform **2020** is tilted forward to help in food drainage, similar to the event illustrated in earlier FIGS. **126** and **127**, and illustrated for this exemplary embodiment in FIG. **138**.

[0590] This exemplary embodiment functions similarly to exemplary embodiments shown in FIGS. **121** through **136**, but uses different mechanics to locate food support **2020** in its various operating positions.

[0591] FIG. **137** shows food support **2020** removed from the rest of the embodiment. Mounted at the top of right stiff support arm **2022** and left stiff support arm **2024** are respectively right handle support mechanism **2028** and left handle support mechanism **2030**, which are essentially mirror images of each other.

[0592] Right handle support mechanism **2028** includes right spring-loaded handle **2032**, and right spring-loaded safety member **2034**. Left handle support mechanism **2030** includes left spring-loaded handle **2036** and left spring-loaded safety stop **2038**.

[0593] Left spring-loaded handle **2036** is biased **2040** toward its locking position by molded-in springing flexing member **2042**. This bias urges left spring-loaded handle **2036** toward the central portion of food support **2020**. Hook **2044**, located on the top of left handgrip **2046**, engages hook **2048** which extends downward from the fixed top portion of left handle support mechanism **2030** and provides a mechanical stop to prevent spring-loaded handle **2036** from over traveling its locked position.

[0594] Likewise, this engagement provides a mechanical stop that prevents left spring-loaded handle **2036** from over traveling outwardly its open unlocked position by the top of hook **2044** contacting the underside of the uppermost portion of left handle support mechanism **2030**. Similar hooks on both left spring-loaded safety stop **2038** and the rear portion of the fixed top portion of left handle support mechanism **2030** provide similar functions.

[0595] Spring bias **2040** is enhanced on both left spring loaded handle **2036** and left spring-loaded safety stop **2038** by they being molded at angles which are passed their closed positions. After they are molded they are pushed back so that **2044** and **2048** engage with increased spring bias **2040** on both left spring-loaded handle **2036** and left spring-loaded safety stop **2038**.

[0596] This entire mechanism is mirror imaged on right handle support mechanism **2028**.

[0597] As shown in FIG. **139** when lid **1160** is in its raised position and food support **2020** is lowered into cooking vessel **1152**, food support **2020** remains in its upper position clear of cooking liquid contact. This is because left handle gripping claw **2050** on left spring-loaded handle **2036** and left safety stop gripping claw **2052** located on left spring-loaded safety stop **2038** rest downwardly against the upper rim of cooking vessel **1152** and prevent food support **2020** from descending into the cooking liquid. This is also because counterparts on the right hand side of the exemplary embodiment perform a similar function only in mirror image.

[0598] Referring to FIG. **140**, once lid **1160** is lowered, it forces disengagement of left safety stop gripping claw **2052** located on left spring-loaded safety stop **2038**, as well as its counterpart on the right-hand side, from resting downwardly against the upper rim of cooking vessel **1152**, and thus allows food support **2020** to be lowered to its lowermost position when left handle gripping claw **2050** on left spring-

loaded handle **2036**, as well as its counterpart on the right-hand side, are disengaged by hand through outward movement.

[0599] The mechanics of raising and lowering food support **2020** and lid **1160** share the same principles as earlier exemplary embodiments described herein. Likewise, FIG. **138** shows food support **2020** tilted forward for draining. This is also using the same principles described herein for earlier exemplary embodiments.

[0600] FIG. **138** also shows information panel **2053** located on the forward portion of the embodiment. This information panel, through use of labels, or silkscreening, or pad printing, or engraving, or other means, may be used to display useful information such as, by way of nonlimiting examples: recipes, embodiment use instructions, embodiment features, safety warnings, or other data.

What is claimed:

1. A hot fluid cooking vessel comprising:

an enclosure having,

a bottom wall portion and a opening separated from one another by a curved side wall portion;

the opening including a rim region disposed generally perpendicularly to the side wall portion;

means adapted for receiving an associated resistive heating element into the opening so as to be oriented along

the bottom wall portion and having a conductive path disposed along the side wall portion and through the opening;

means adapted for receiving an associated lid so as to substantially cover the opening by engagement with the rim region;

at least one overflow drain disposed in the side wall portion near the opening;

a fluid path from the overflow drain to an associated fluid overflow reservoir; and

means adapted for receiving an associated food support surface into the enclosure, which food support surface oriented so as to be interposed between the resistive heating element and food received in to the enclosure.

2. The hot fluid cooking vessel of claim 1 wherein the side wall portion defines a generally coffin-shaped cross section corresponding to a contour of fowl received therein.

3. The hot fluid cooking vessel of claim 2 further comprising a fill level indicator disposed on an exterior of the side wall portion and having at least one fluid path to an interior of the enclosure.

4. The hot fluid cooking vessel of claim 3 further comprising the associated lid inclusive of a hinged interconnection with the rim region.

\* \* \* \* \*