



(86) Date de dépôt PCT/PCT Filing Date: 2005/01/28

(87) Date publication PCT/PCT Publication Date: 2005/08/11

(45) Date de délivrance/Issue Date: 2012/04/17

(85) Entrée phase nationale/National Entry: 2006/07/11

(86) N° demande PCT/PCT Application No.: FI 2005/000060

(87) N° publication PCT/PCT Publication No.: 2005/073488

(30) Priorité/Priority: 2004/01/30 (FI20040137)

(51) Cl.Int./Int.Cl. *E05B 3/04* (2006.01),
F16B 2/06 (2006.01), *F16B 7/04* (2006.01),
F16D 1/06 (2006.01), *H01H 3/06* (2006.01),
H01H 3/10 (2006.01), *H02G 3/08* (2006.01)


(72) Inventeurs/Inventors:
MATTLAR, HARRI, FI;
KOLMONEN, RAINER, FI;
ALANEN, JARKKO, FI

(73) Propriétaire/Owner:
ABB OY, FI

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MECANISME PERMETTANT DE FIXER UNE TRINGLE DE COMMANDE DE COMMUTATEUR A UNE
CONDUITE DE COMMUTATEUR

(54) Title: ARRANGEMENT FOR SECURING SWITCH CONTROL SHAFT TO SWITCH PIPE SHAFT

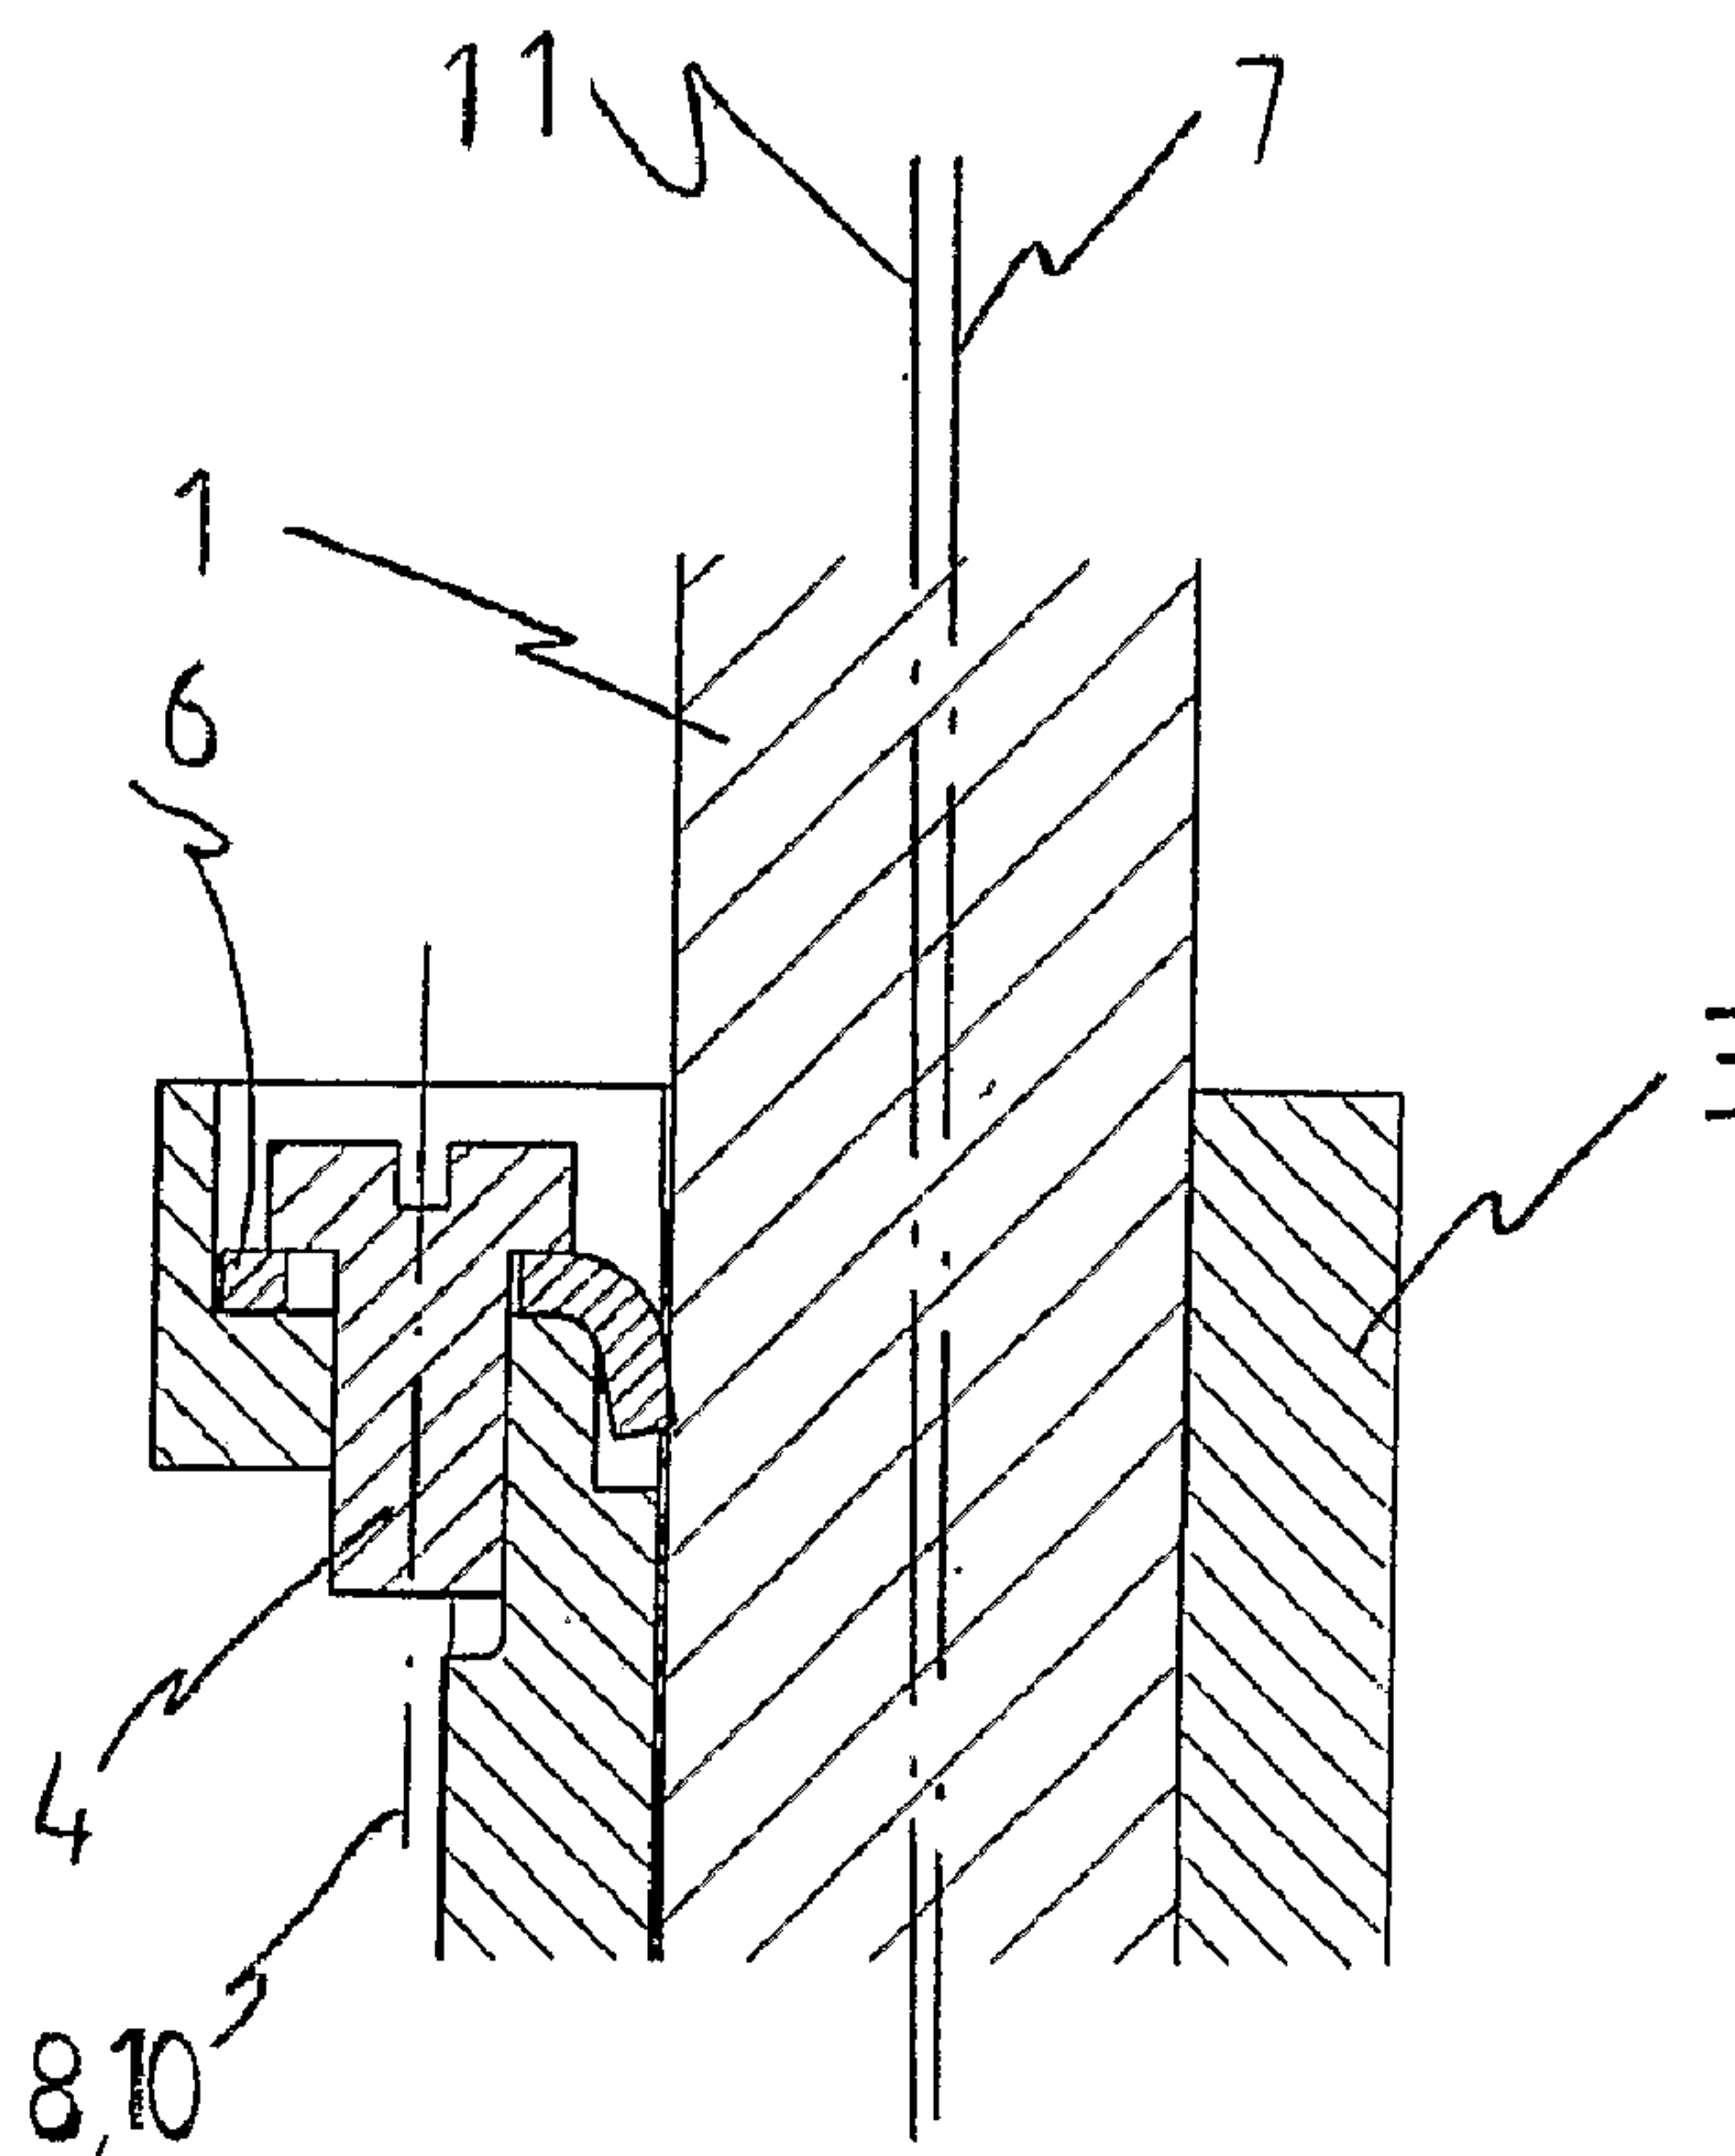

(57) Abrégé/Abstract:

The invention relates to an arrangement for attaching a switch (2) control shaft (1) to a switch (2) pipe shaft (3), where the control shaft (1) is mounted partly in the switch (2) pipe shaft (3) and tightened to the switch (2) pipe shaft (3) by a screw (4). The arrangement comprises a tightening piece (6). The screw (4) is arranged to act on the control shaft (1) through the tightening piece (6) so that when the screw (4) is turned, the tightening piece (6) is arranged to press the control shaft (1) against the pipe shaft (3) so that the control shaft (1) tightens fast between the tightening piece (6) and the pipe shaft (3).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073488 A1

(51) International Patent Classification⁷: **E05B 3/04**, H01H 3/06, 3/10, H02G 3/08, F16B 2/06, 7/04, F16D 1/06

(21) International Application Number:
PCT/FI2005/000060

(22) International Filing Date: 28 January 2005 (28.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20040137 30 January 2004 (30.01.2004) FI

(71) Applicant (for all designated States except US): **ABB OY** [FI/FI]; Strömbergintie 1, FI-00380 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MATTLAR, Harri** [FI/FI]; Jungsundsvägen 809, FI-65760 Iskmo (FI). **KOLMONEN, Rainer** [FI/FI]; Urputie 3 as 1, FI-66400 Laihia (FI). **ALANEN, Jarkko** [FI/FI]; Koukkuluomantie 301, FI-62375 Ylihärmä (FI).

(74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O. Box 148, FI-00121 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,

[Continued on next page]

(54) Title: ARRANGEMENT FOR SECURING SWITCH CONTROL SHAFT TO SWITCH PIPE SHAFT

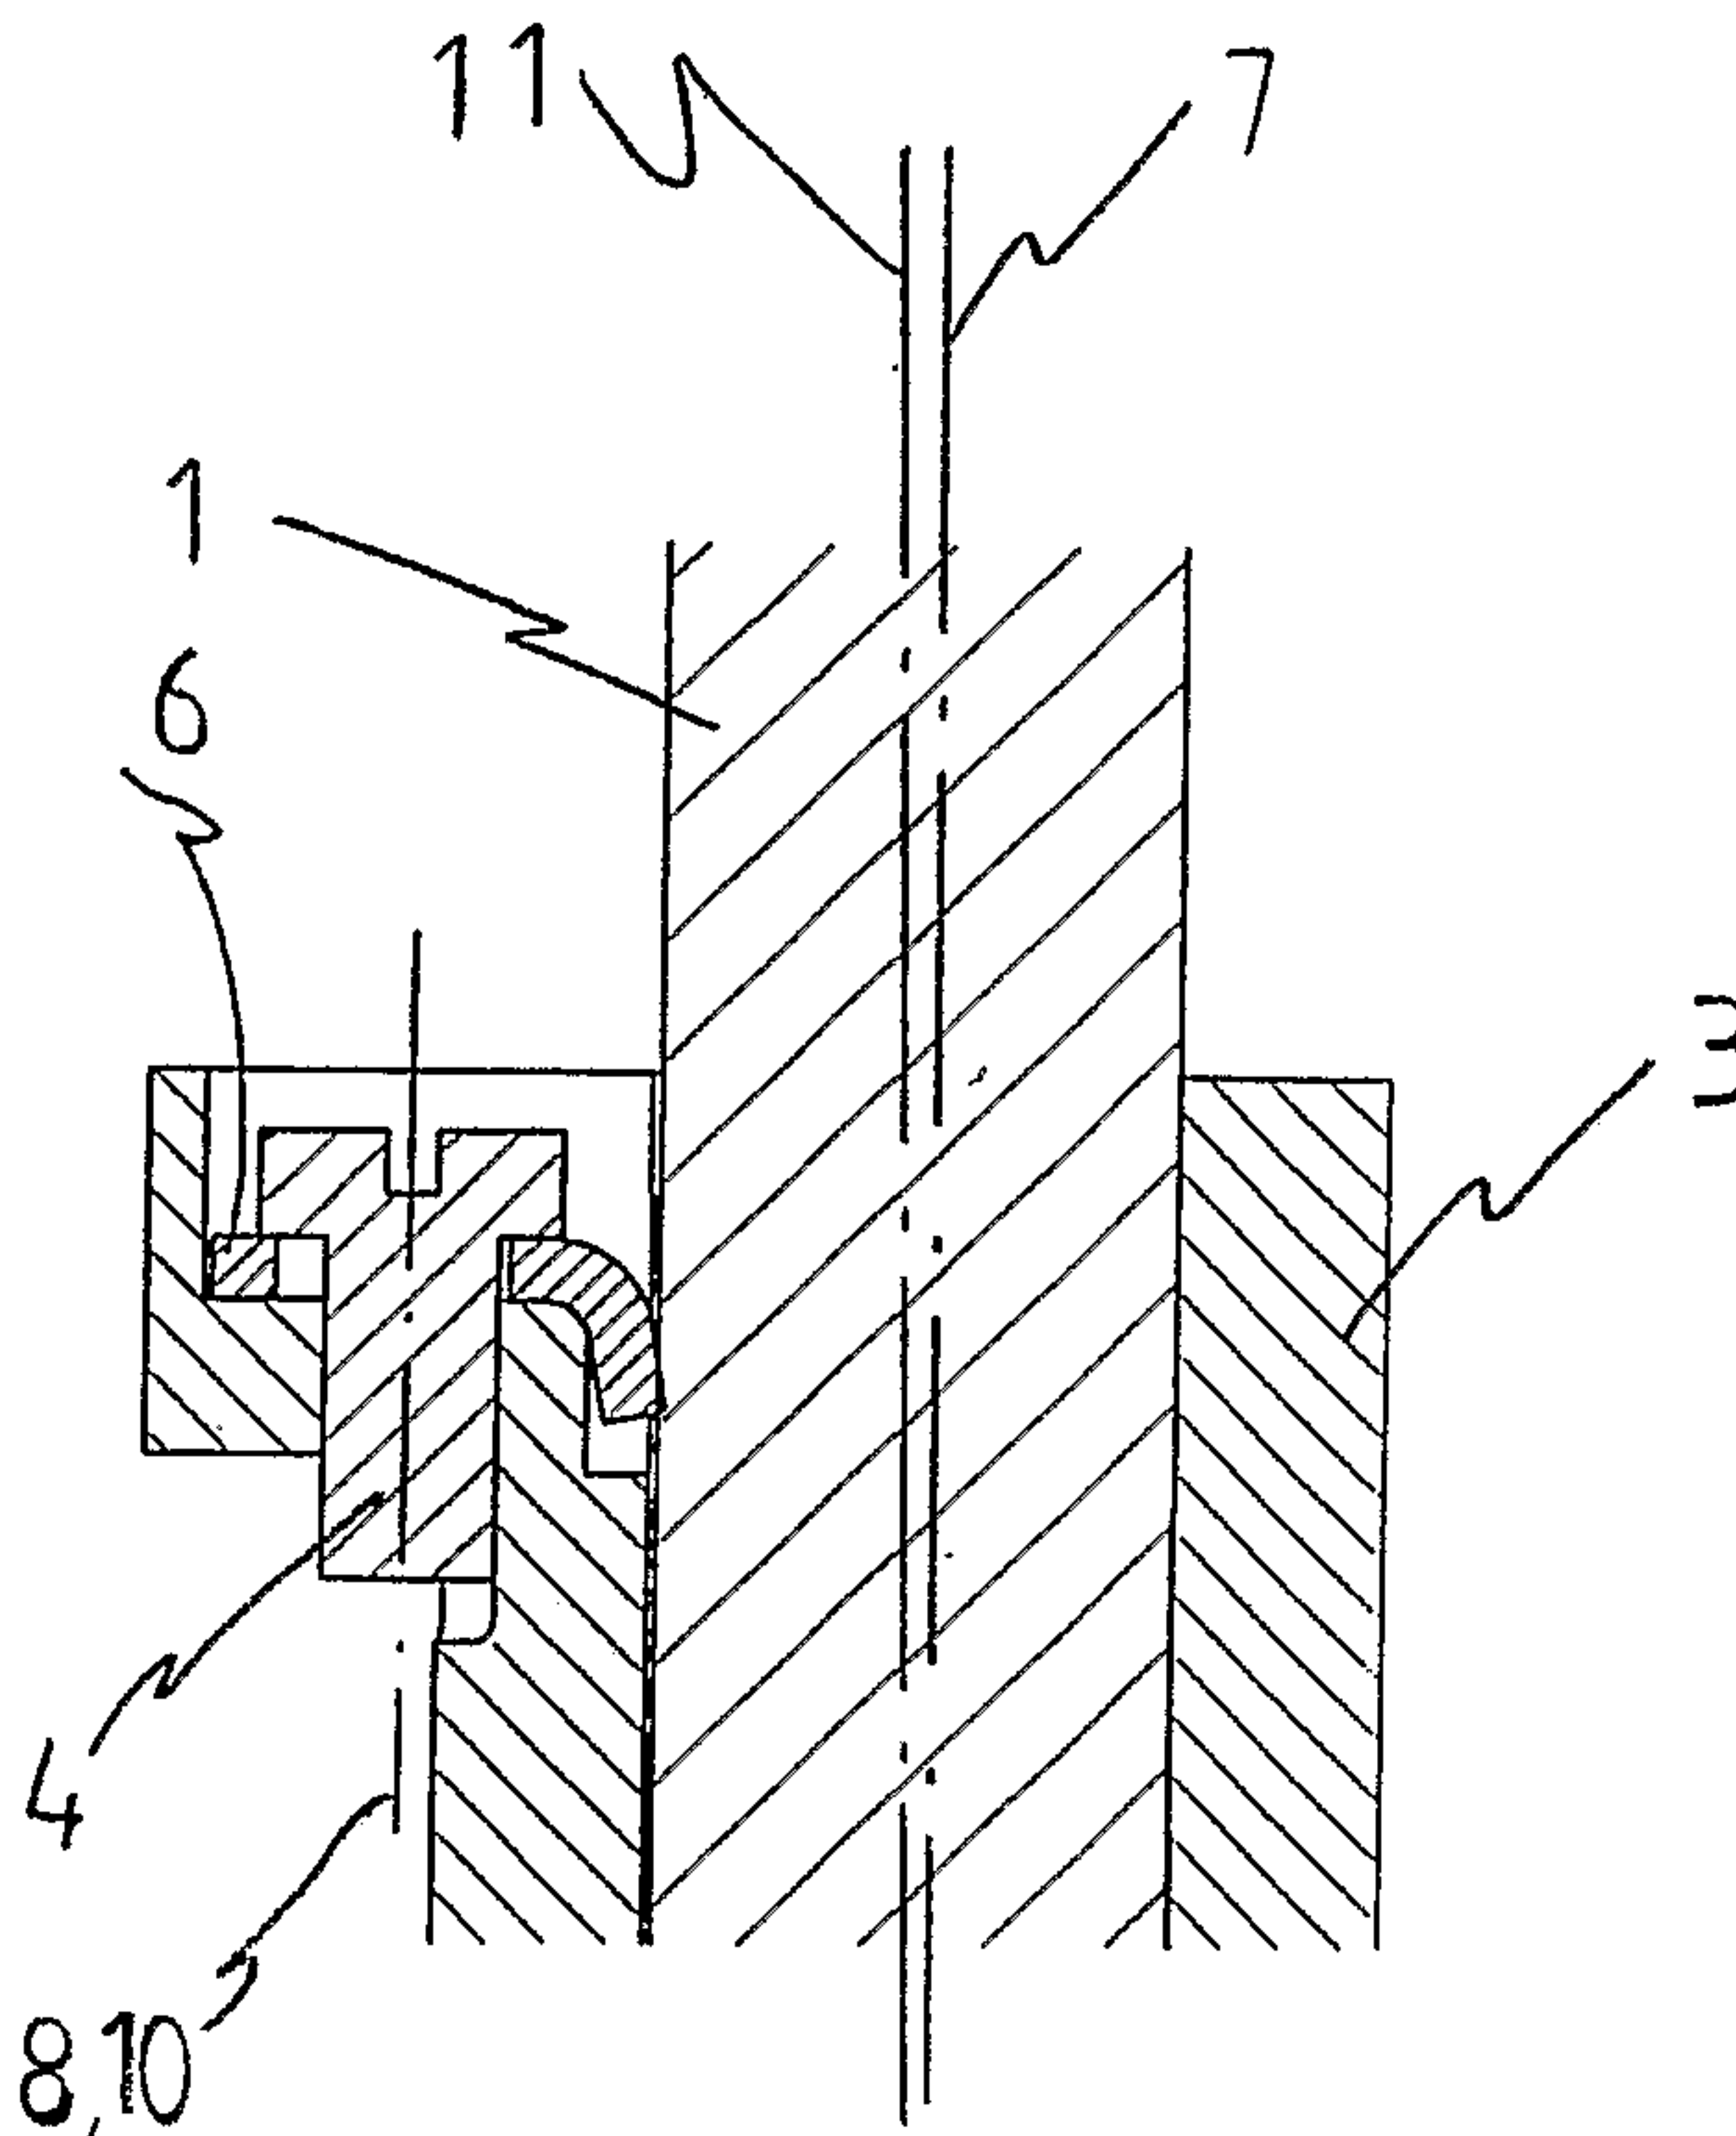

(57) Abstract: The invention relates to an arrangement for attaching a switch (2) control shaft (1) to a switch (2) pipe shaft (3), where the control shaft (1) is mounted partly in the switch (2) pipe shaft (3) and tightened to the switch (2) pipe shaft (3) by a screw (4). The arrangement comprises a tightening piece (6). The screw (4) is arranged to act on the control shaft (1) through the tightening piece (6) so that when the screw (4) is turned, the tightening piece (6) is arranged to press the control shaft (1) against the pipe shaft (3) so that the control shaft (1) tightens fast between the tightening piece (6) and the pipe shaft (3).

WO 2005/073488 A1

WO 2005/073488 A1

EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ARRANGEMENT FOR SECURING SWITCH CONTROL SHAFT TO SWITCH PIPE SHAFT

BACKGROUND OF THE INVENTION

[0001] The invention relates to an arrangement for securing a switch control shaft to a switch pipe shaft, where the control shaft is mounted partly in the switch pipe shaft and tightened to the switch pipe shaft by a screw.

[0002] The invention relates to switchboard cabinets which include a control handle arranged in the cabinet door or the like for controlling a switch included in the switchboard cabinet from outside the cabinet and in which a switch control shaft is arranged between the control handle and the switch for transmitting the rotational motion directed at the control handle to the switch and for turning the switch from one operating position to another.

[0003] The switch is typically mounted on a baseboard included in the cabinet and the control handle of the switch is installed in the cabinet door at the site of the control mechanism. For the switch control handle to be placeable at a distance from the actual switch, i.e. in the cabinet door so as to enable controlling the switch by the control handle arranged in the door, the control shaft of the above-mentioned switch is arranged between the switch and the control handle.

[0004] The switch control shaft is usually a bar with a square cross section, whose one end goes inside the pipe shaft provided in the switch, into a space with a square cross-section, and whose other end extends to a corresponding opening with a square cross section in the control handle installed in the door. When the switch is turned, the control handle pivots around its longitudinal axis, whereby the switch turns into another operating position.

[0005] In the installation stage, the control shaft is cut roughly to the correct length and adjusted to its exact length by testing, and finally the control shaft is secured, i.e. locked, to the pipe shaft. The length of the control shaft depends on the distance between the switch and the cabinet door, i.e. the opening for the control handle in the door. Since the switch control handle is installed in the door of the cabinet, the control shaft has to remain secured to the switch when the door is opened. The control shaft should also stay in the same position during the whole time the door is open so as to facilitate the closing of the door and the placing of the control shaft in the opening of the control handle (inside the door).

[0006] The control shaft is conventionally secured, i.e. locked, to the pipe shaft by means of screw fastening. In a prior art solution, on the side of the pipe shaft, there is a through threaded hole, through which a locking screw locks the control shaft to the pipe shaft of the switch. The locking screw presses the control shaft against the pipe shaft so that the control shaft locks, i.e. tightens fast between the locking screw and the inner surface of the pipe shaft. The middle axis of the threaded hole and the middle/longitudinal axis of the switch pipe shaft are thus substantially transverse to each other in this prior art solution.

[0007] A problem associated with the arrangement described above is that since the adjustment of the control shaft and its locking into position with respect to the pipe shaft are usually performed in a fully-equipped cabinet, it is difficult to access the screw for tightening from the side of the pipe shaft.

BRIEF DESCRIPTION OF THE INVENTION

[0008] The object of the invention is to provide an arrangement for securing a switch control shaft to a switch pipe shaft that solves the above-mentioned problems.

[0009] The object of the invention is achieved by an arrangement which is characterized by what is disclosed in the independent claim.

[0010] Preferred embodiments of the invention are disclosed in the dependent claims.

[0011] The invention is based on the idea that it comprises a tightening piece, which enables the removal of a screw from the side of the pipe shaft and the mounting of the screw in a place where it can be tightened easily. According to the invention, the screw acts on the tightening piece, which in turn acts on the control shaft and presses this against the pipe shaft so that the control shaft locks with respect to the pipe shaft, into a desired position between the tightening piece and the inner surface of the pipe shaft.

BRIEF DESCRIPTION OF THE FIGURES

[0012] The invention will now be described in greater detail by means of preferred embodiments, with reference to the accompanying drawings, in which

Figure 1 illustrates a switch pipe shaft and part of the switch,

Figure 2 is a cross-sectional view of the pipe shaft provided with a tightening piece, and

3

Figure 3 is a cross-sectional view of the pipe shaft provided with a control shaft attached thereto.

DETAILED DESCRIPTION OF THE INVENTION

[0013] Figure 1 to 3 illustrate an arrangement for securing a control shaft 1 to a pipe shaft 3 of a switch 2. The control shaft 1 is mounted partly in the switch 2 pipe shaft 3 and tightened to the switch 2 pipe shaft 3 by a screw 4.

[0014] In Figure 1, the pipe shaft 3 is provided with a hole 5 having a substantially square cross section. It is, however, obvious to a person skilled in the art that the hole 5 of the pipe shaft 3 may also have another cross-sectional shape.

[0015] The arrangement comprises a tightening piece 6. The screw is arranged to act on the control shaft 1 through the tightening piece 6 so that when the screw 4 is turned, i.e. tightened, the tightening piece 6 is arranged to press the control shaft 1 against the inner surface (not denoted by a reference number) of the pipe shaft 3 so that the control shaft 1 tightens fast between the tightening piece 6 and the inner surface of the pipe shaft.

[0016] In the figures, the tightening piece 6 is securable by a screw and tightenable to the pipe shaft 3 by the screw 4 so that the tightening piece 6 is arranged to press the control shaft 1 against the inner surface of the pipe shaft 3 when the screw 4 is tightened so that the control shaft 1 tightens fast between the tightening piece 6 and the inner surface of the pipe shaft 3. Since the tightening piece 6 is secured to the pipe shaft 3 by the screw 4, the actual tightening piece 6 stays well in place.

[0017] In Figure 3, the control shaft 1 and the screw 4 are essentially parallel.

[0018] In Figure 3, the control shaft 1 has a first middle axis 7 and the screw 4 has a second middle axis 8. In Figure 3, the first middle axis 7 of the control shaft 1 and the second middle axis 8 of the screw 4 are substantially parallel. It is obvious to a person skilled in the art that one may alternatively deem that the control shaft 1 has a first longitudinal axis and/or that the screw 4 has a second longitudinal axis.

[0019] In Figure 3, the pipe shaft 3 is provided with a threaded hole 9 for the screw, the threaded hole having a third middle axis 10, and the pipe shaft 3 having a fourth middle axis 11. In Figure 3, the third middle axis 10 of

the threaded hole 9 and the fourth middle axis 11 of the pipe shaft 3 are substantially parallel. It is obvious to a person skilled in the art that one may alternatively deem that the threaded hole 9 has a third longitudinal axis and/or that the pipe shaft 3 has a fourth longitudinal axis.

[0020] In Figure 3, the pipe shaft 3 also includes a projection 12, which is provided with a threaded hole 9. In the embodiment illustrated in the figures, the screw 4 preferably assumes a place immediately next to the pipe shaft 3 in the threaded hole 9 so that it is also parallel with the pipe shaft 3.

[0021] In the figures, the projection 12 is also provided with a cavity 13, which is arranged to prevent the tightening piece 6 from turning when the screw 4 is tightened.

[0022] The tightening piece 6 is preferably, but not necessarily, a spring steel piece, which tightens when the screw 4 is tightened and presses the control shaft 1 against the inner surface of the pipe shaft 3. In the figures, the tightening piece 6 is substantially an L-shaped spring steel piece. Alternatively, the tightening piece may be a J-shaped spring steel piece, for example.

[0023] In the figures, the tightening piece 6 comprises a through opening 14 for the screw 4.

[0024] It is obvious to a person skilled in the art that as the technology advances, the inventive concept can be implemented in various ways. The invention and its embodiments are thus not restricted to the above examples but they may vary within the scope of the claims.

CLAIMS

1. An arrangement for attaching a switch (2) control shaft (1) to a switch (2) pipe shaft (3), where the control shaft (1) is mounted partly in the switch (2) pipe shaft (3) and tightened to the switch (2) pipe shaft (3) by a screw (4), the arrangement comprising a tightening piece (6), and the screw (4) being arranged to act on the control shaft (1) through the tightening piece (6) so that when the screw (4) is turned, the tightening piece (6) is arranged to press the control shaft (1) against the pipe shaft (3) so that the control shaft (1) tightens fast between the tightening piece (6) and the pipe shaft (3), **characterized** in that
- the pipe shaft (3) comprises a threaded hole (9) for the screw (4),
the tightening piece (6) is secured to the threaded hole (9) of the pipe shaft by the screw (4), and
the tightening piece (6) is tightenable to the threaded hole (9) of the pipe shaft (3) by the screw (4) so that the tightening piece (6) presses the control shaft (1) against the pipe shaft (3) when the screw (4) is tightened so that the control shaft (1) tightens fast between the tightening piece (6) and the pipe shaft (3).
2. An arrangement according to claim 1, **characterized** in that
- the threaded hole (9) has a third middle axis (10),
the pipe shaft (3) has a fourth middle axis (11), and
the third middle axis (10) of the threaded hole (9) and the fourth middle axis (11) of the pipe shaft (3) are substantially parallel.
3. An arrangement according to claim 1 or 2, **characterized** in that
- the pipe shaft (3) has a projection (12), and
the threaded hole (9) is in the projection (12).
4. An arrangement according to claim 3, **characterized** in that
- the projection (12) is provided with a cavity (13), which is arranged to prevent the tightening piece (6) from turning when the screw (4) is tightened.
5. An arrangement according to any one of claims 1 to 4, **characterized** in that
- the control shaft (1) has a first middle axis (7),
the screw (4) has a second middle axis (8), and

the first middle axis (7) of the control shaft (1) and the second middle axis (8) of the screw (4) are substantially parallel.

6. An arrangement according to any one of claims 1 to 5, **characterized** in that the tightening piece (6) is a spring steel piece.

5 7. An arrangement according to any one of claims 1 to 6, **characterized** in that the tightening piece (6) is substantially an L-shaped or a J-shaped spring steel piece.

10 8. An arrangement according to any one of claims 1 to 7, **characterized** in that the tightening piece (6) comprises a through opening (14) for the screw (4).

9. An arrangement according to any one of claims 1 to 8, **characterized** in that

15 the switch (2) is in a switchboard cabinet provided with a door,
the door is provided with a control handle or the like for controlling
the switch (2) in the switchboard cabinet, and

the control shaft (1) extends between the control handle or the like in the switchboard cabinet and the switch (2) pipe shaft (3) when the door of the switchboard cabinet is closed.

1/1

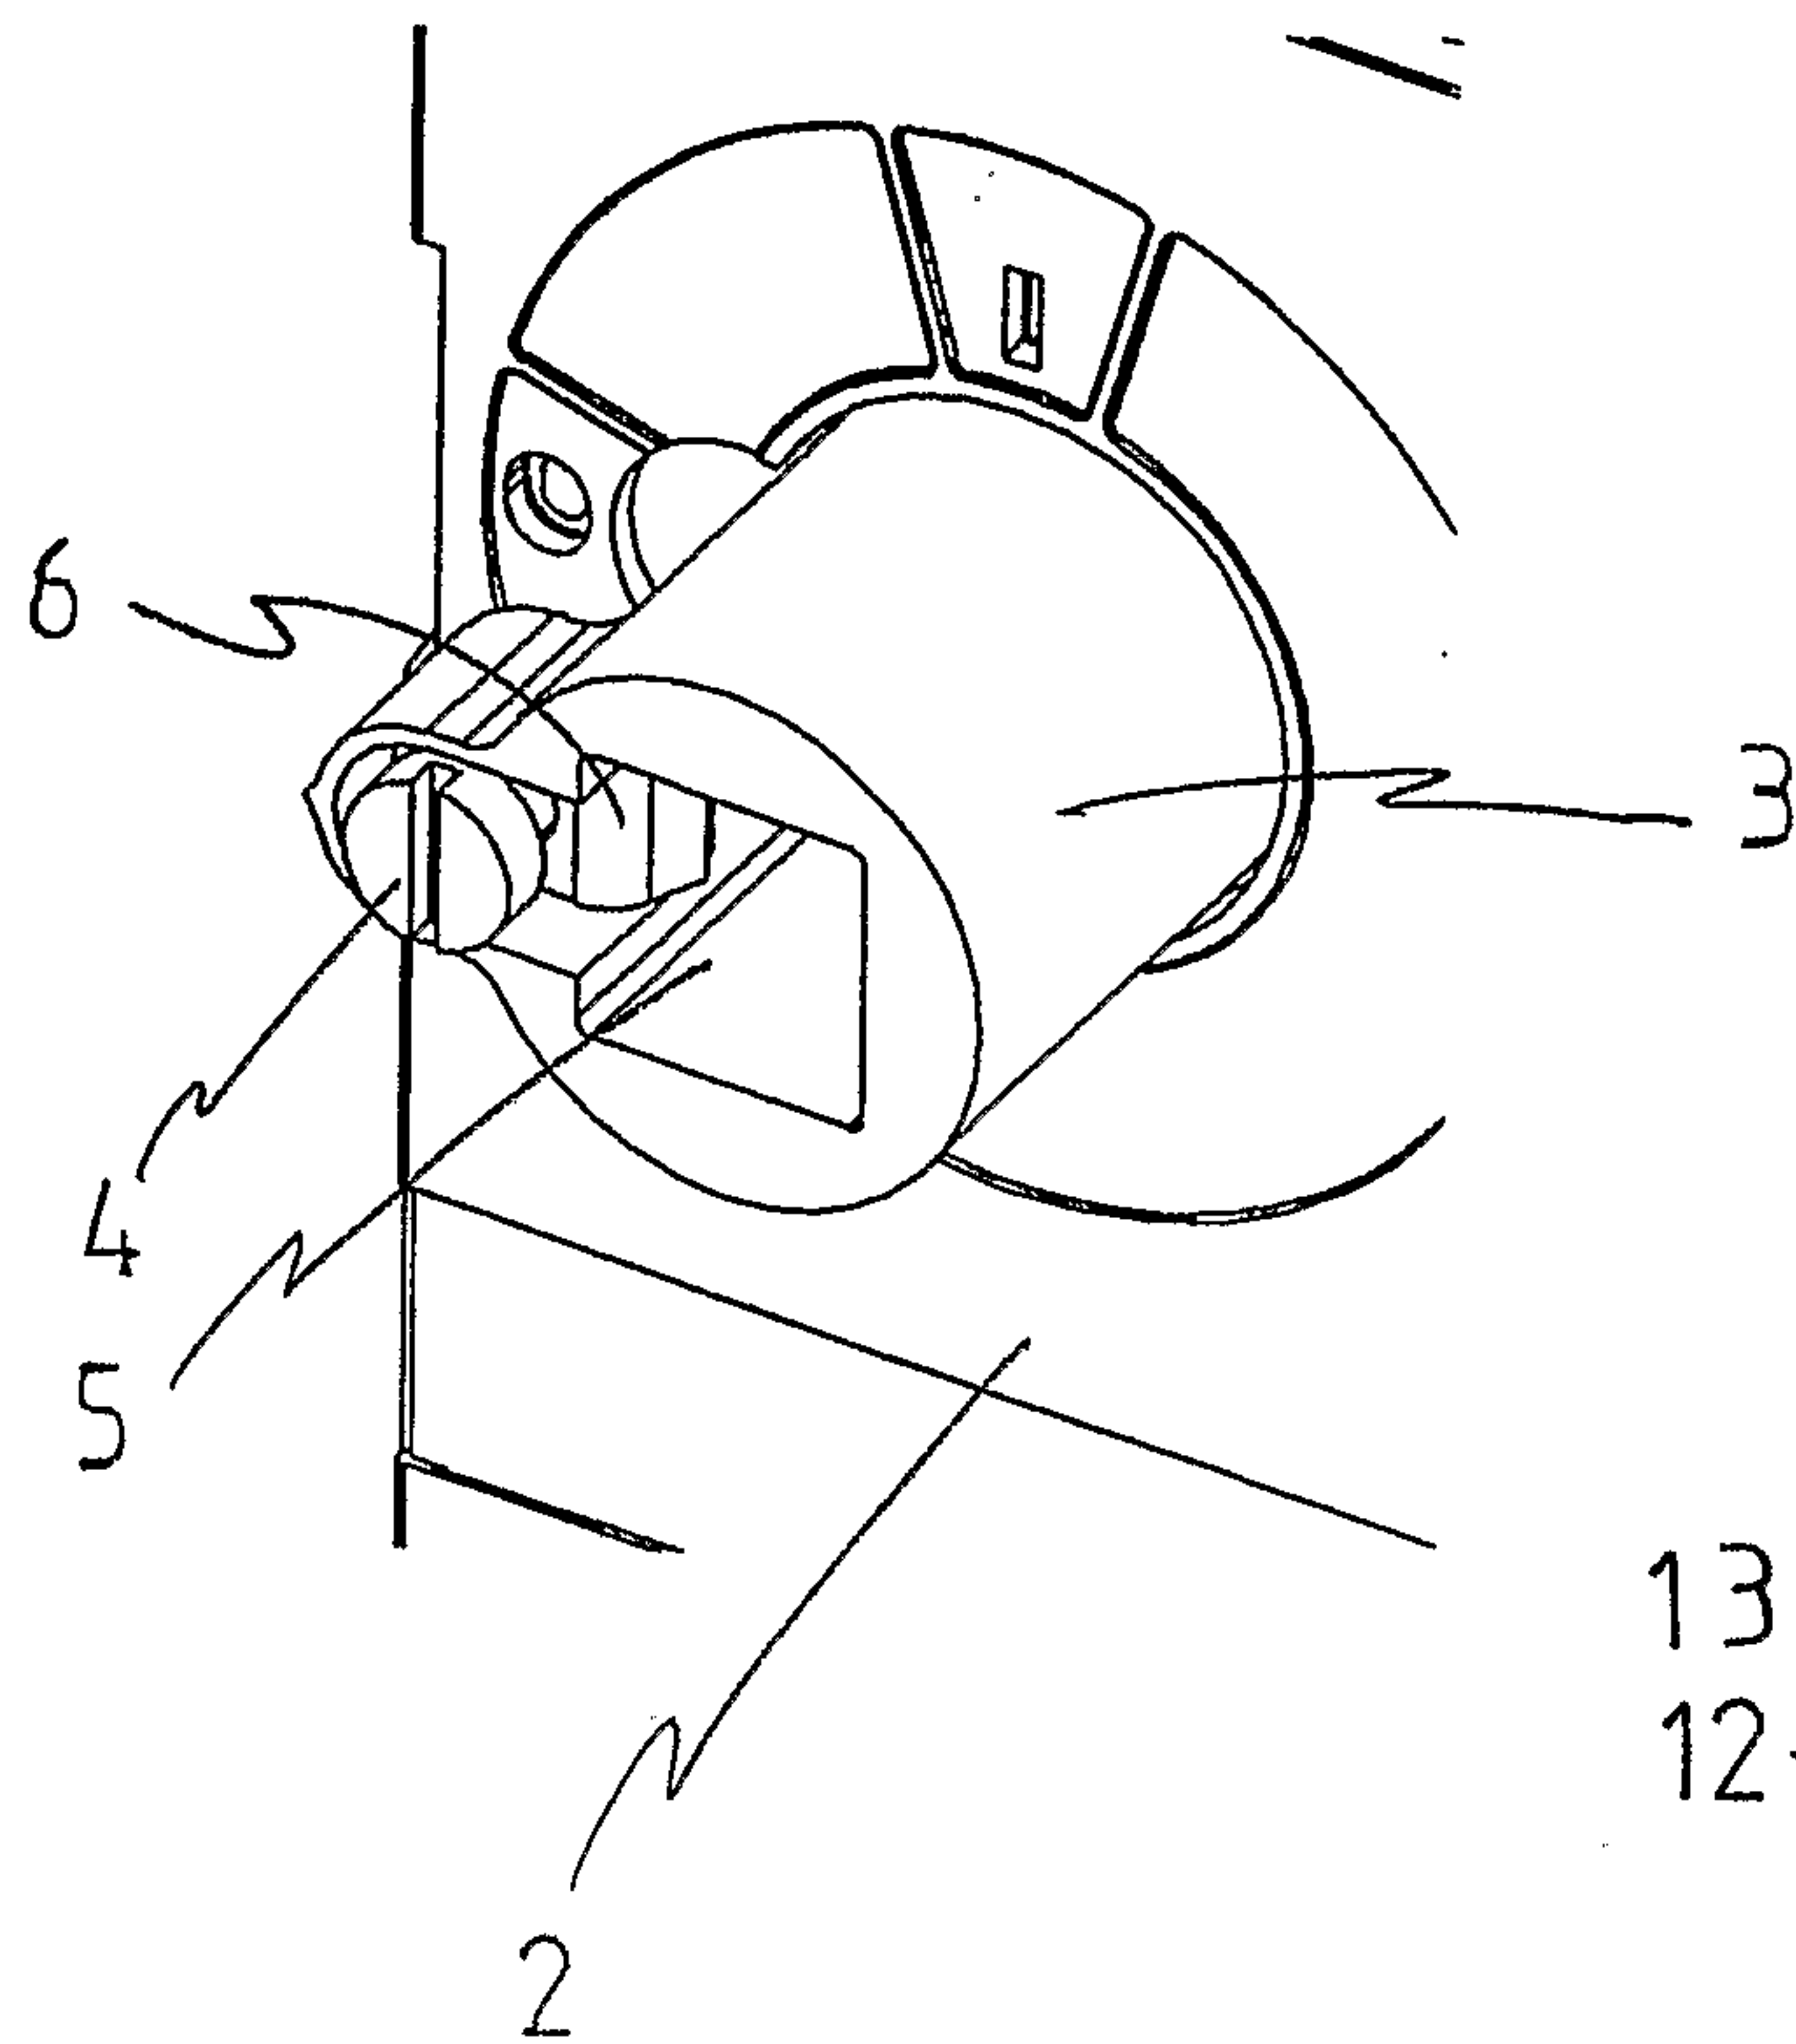


FIG 2

