



(51) International Patent Classification ⁶ :

B66C 9/14 // 5/02

WO 9602455A1

A

(43) International Publication Date: 1 February 1996 (01.02.96)

(21) International Application Number: PCT/FI95/00395

(22) International Filing Date: 7 July 1995 (07.07.95)

(30) Priority Data: 943399 15 July 1994 (15.07.94) FI

(71) Applicant (for all designated States except US): KCI
KONECRANES INTERNATIONAL CORPORATION
[FI/FI]; Koneenkatu 8, FIN-05830 Hyvinkää (FI).

(72) Inventor: and

(75) Inventor/Applicant (for US only): JUSSILA, Olavi [FI/FI];
Puolimatkatankatu 42, FIN-05830 Hyvinkää (FI).


(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) Designated States: CN, JP, KR, SG, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: A TRAVERSING GEAR ARRANGEMENT FOR A CRANE MOVING ON RUBBER-TYRED WHEELS OR THE LIKE

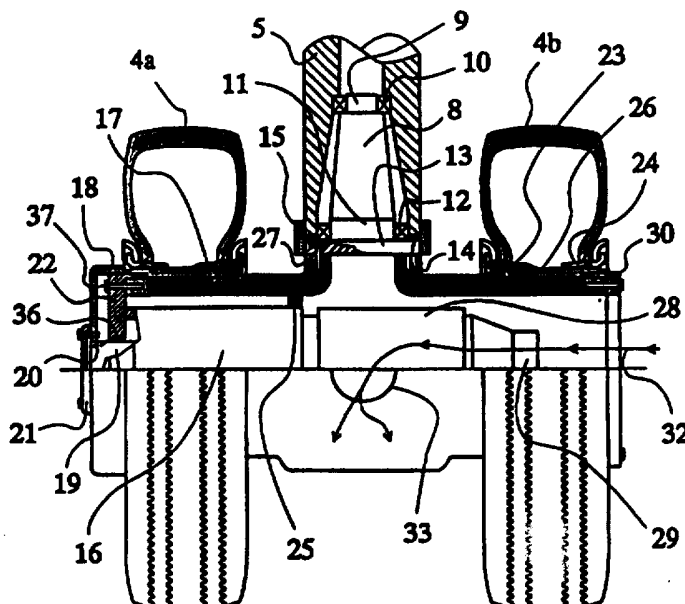

(57) Abstract

The invention relates to a traversing gear arrangement for a crane moving on rubber-tyred wheels (4) or the like, the crane comprising an electric motor (28) functioning as traversing gear and including gearing (16), and the wheels of the crane being arranged as a pair of wheels (4). The wheels (4a, 4b) in the pair of wheels (4) are connected to each other by a hollow pipe shaft (17) such that one of the wheels is a drive wheel (4a) while the other is a free wheel (4b). The traversing gear connected to the drive wheel is inside the pipe shaft (17).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A traversing gear arrangement for a crane moving on rubber-tyred wheels or the like

5 The invention relates to a traversing gear arrangement according to the preamble of claim 1 for a crane moving on rubber-tyred wheels or the like.

10 In prior art, a sub-chassis of a crane moving on rubber-tyred wheels comprises two large wheels one after the other, and the wheels can be turned to be parallel for lateral movement. The turning is conducted by turning the wheels to the same direction with a hydraulic cylinder or aggregate in a place specifically reserved for turning, e.g. on a marble slab. Another possibility is to lift the wheels from the ground for the duration of the turning action. Instead of two large wheels, the sub-chassis may comprise a pair of small wheels, both of which are drive wheels. In the traversing movement, power transmission is usually implemented by open gearing with chain gears and transmission chains.

20 U.S. Patents 3,280,931 and 3,645,406 teach a solution in which a sub-chassis of a crane comprises two parallel wheels that are both drive wheels. The pair of wheels is turned with a separate turning gear. The disadvantage of the prior art arrangement is that turning is difficult. Further, because of the hydraulic equipment and chain gearing, many components are needed, and so there are many points that may need servicing or that may leak. Chain gearing, implemented as open gearing, extends at least partly beyond the wheelwork and thereby requires a lot of space and, since it is not sufficiently protected against minor bumps, may be easily damaged.

30 The object of the present invention is to overcome the above disadvantages and to provide a new

and advantageous solution for a traversing gear arrangement of a crane moving on rubber-tyred wheels or the like. This is achieved with the arrangement of the invention, which is characterized by what is set forth
5 in the characterizing part of claim 1. Other embodiments of the invention, in turn, are characterized by what is set forth in the other claims.

An advantage of the invention is that the traversing gear will be protected inside a pair of
10 wheels. The gear casing is small and compact: no parts extend beyond the tyres. Because there are few components, little servicing is needed. Another advantage is that the wheels can be turned without any additional apparatus, such as hydraulic equipment, and
15 the turning can be performed anywhere. Yet another advantage is that the wheels can be turned steplessly, so it is possible to move the crane diagonally or in a circle. Also, the turning does not wear the tyres notably.

20 In the following the invention will be described in greater detail by means of one embodiment with reference to the attached drawings, in which

fig. 1 shows a diagonal top view of a crane,
fig. 2 shows a shaft arrangement in one pair
25 of wheels on a sub-chassis in the longitudinal direction of the sub-chassis, and

fig. 3 shows a partly cross-sectional side view of a pipe shaft in one pair of wheels.

Fig. 1 shows a crane 1 in which the invention
30 is used, four sub-chassis assemblies 3 being fitted on two lower beams 2 of the frame structure at the lower corners of the crane. Each sub-chassis comprises two pairs of wheels 4 mounted in the middle of the horizontal shaft between the pair of wheels on vertical
35 pipes 5 located at the ends of the sub-chassis such that

they pivot about the vertical axis of the vertical pipe. The crane is also provided with a diesel generator 6, which supplies the crane with power, and a electric distribution unit 7. The traversing gear of the crane, which is not shown in fig. 1, is arranged in connection with the pairs of wheels 4 and comprises e.g. a secondary shaft 19, gearing 16, an electric motor 28, and a brake 29 affecting the shaft of the electric motor.

Fig. 2 shows the structure in greater detail. At both ends of the sub-chassis, a vertical pipe 5 extends downward from the sub-chassis; the pipe is hollow, and expands conically on the inside toward the bottom. At the upper end of the conical expansion there is a space for a bearing 10, and at the lower end of the expansion there is a space for a lower bearing 12. Each pair of wheels 4 is mounted on a conical hole in the vertical pipe to pivot about the vertical axis of the hole by means of a king pin 8, which comprises an upper cylindrical bearing area 9 for bearing 10 and a lower cylindrical bearing area 11 for bearing 12. The part of the king pin between the bearing areas narrows conically toward the top, and so the diameter of bearing area 9 is smaller than that of bearing area 11. Immediately below bearing area 11 the king pin comprises a cylindrical flange 13, whose diameter is greater than that of bearing area 11. The flange provides a supporting surface for bearing 12, and the king pin is fastened at this flange to a pipe shaft 17 between wheels 4a and 4b of the pairs of wheels 4 with fastening bolts 27.

At the lower end of the vertical pipe 5 there is also a locking device, such as a band brake 15, affecting the lower end of the vertical pipe and the flange 13 of the king pin 8, the locking device being

springdrivenly pressed against the lower end of the vertical pipe and the perimeter of the flange as the brake is in the hold position. The brake is released by means of a spindle motor (not shown in the figs.) or the like as the wheels are turned. Between the flange 13 and the lower end of the vertical pipe there is also a packing 14 that prevents the lubricant of the bearing from coming into contact with the braking area of the band brake.

Both wheels of the pair of wheels 4 are mounted on a pipe shaft 17 connecting the wheels by means of cylindrical roller bearings 23 and 24 arranged on a bearing area specifically provided on the pipe shaft. The innermost bearing 23 extends inward in the axial direction to a shoulder 31 that is adjacent to the bearing area of the pipe shaft. On the side of the free wheel 4b, the innermost bearing 23 is axially locked by an abutment ring 26 for the rim of the wheel, and on the side of the drive wheel 4a, by an abutment ring 18 for the rim of the drive wheel. The outermost bearing 24, in turn, is axially locked on the side of the drive wheel 4a by the abutment ring 18 for the rim of the drive wheel and by a ring-shaped flange 22 fastened to the pipe shaft, and on the side of the free wheel 4b, by the abutment ring 26 for the rim and by a ring-shaped flange 30 fastened to the pipe shaft.

The abutment ring 18 for the rim of the drive wheel 4a in a pair of wheels 4 is part of the rim beyond which part of the abutment ring 18 extends, forming a cup-shaped part lying on its cylindrical surface with its bottom in an essentially vertical position. In the middle of the cup bottom there is a toothed 20 hole that fits into the toothed end of the secondary shaft 19. Power is transmitted from a traversing motor 28 through gearing 16 to the drive wheel via the toothing of the

abutment ring 18. The tothing is protected by a cover 21, which is fastened to the bottom of the cup of the abutment ring by means of screws.

5 The pipe shaft 17 forms a frame for the entire system of pairs of wheels. The pipe shaft protects the traversing gear against damage, functions as a bearing area, a gear casing, a cooling tunnel for the motor and a supporting surface 35 for the king pin 8 functioning as the turning bearing. Seen from the lateral side, the
10 pipe shaft is symmetrical and has on the upper surface in the middle of the pipe shaft a short upward-opening pipe branch 34 whose upper surface 35 is provided at symmetrical intervals with threaded holes for the fastening bolts 27, with which the king pin 8 is
15 fastened to the pipe shaft 17. In addition, the ends of the pipe shaft are provided with threaded holes for fastening the flanges 22 and 30 by means of screws.

The hollow interior of the pipe shaft is sufficiently large to accommodate the gearing 16 and the
20 motor 28 and brakes 29 of the traversing gear. One end of the gearing is fastened to the pipe shaft by a ring-shaped flange 22 with screws 37. The ring-shaped flange 22 may be a separate flange, whereby it must also be fixed separately to the gear casing, or it may be an
25 integral part of the gear casing, as shown in fig. 2. Between the flange 22 and the secondary shaft 19 there is a packing 36. The countertorque of the torque affecting the wheels is supplied to the pipe shaft 17 with the flange 22 and fixing screws 37, i.e. the gear
30 is prohibited from rotating in relation to the pipe shaft. Further, the gearing is supported on the inside of the pipe shaft by an abutment ring 25. The electric motor inside the pipe shaft operating as a traversing motor is fastened to the other end of the gearing. The
35 pipe shaft also comprises at least two vent holes 7 -

one on each side - for throughflow of the cooling air. The cooling air is input through the centre hole of the ring-shaped flange 30 from that end of the pipe shaft which is on the side of the free wheel 4b e.g. by means
5 of a fan (not shown in the figure) that is positioned behind the brake, and output through the vent holes past the brake and motor.

The traversing gear arrangement of the invention makes it possible to turn the direction of
10 travel of the crane in the following manner: Usually, when a crane is steered to the lateral direction, the pairs of wheels 4 on the sub-chassis 3 are one after the other in the longitudinal direction of the sub-chassis. The band brake 15 functioning as a locking device is
15 locked and although only wheels 4a are drive wheels, the crane moves in a straight line thanks to the locking effect of the band brake. If one wants to change the direction of travel, the band brake 15 is released, whereby the pair of wheels is able to turn about the
20 symmetrically positioned vertical axis of the pair, the vertical axis coinciding with the vertical axis of the vertical pipe 5 at the end of the sub-chassis and with the vertical axis of revolution of the king pin 8. A turning action takes place since only one of the wheels
25 in the pair of wheels is a drive wheel, while the other is a free wheel. At one end, the pairs of wheels on both sub-chassis assemblies are arranged to turn simultaneously to opposite directions as the crane is turned, whereby the forces caused by the turning action are reversed and the crane remains stationary. After the
30 turning, the band brake 15 is locked and the crane is ready to be steered to the new direction. The turning action is performed by the traversing gear of the crane, which comprises e.g. the above-mentioned electric motor
35 28 and gearing 16.

The driving and turning action of the crane are implemented by PLC control. The secondary shaft 19 comprises a pulse detector arrangement, which calculates the turning angle of the secondary shaft, starting from a specified zeroing point. The pulse calculation information is supplied to a control circuit, which forwards it to the electric motor 28. The calculation conducted by the pulse detector arrangement shows the turning angle of the wheels, and the wheels can also be adjusted to a desired angle by this arrangement. In the positions for lateral travel and longitudinal travel the pulse detector arrangement comprises extra control limits that are 90 degrees apart. At the control limits, the pulse detector information is zeroed, so that the system will always know the position of the wheels.

It will be obvious to one skilled in the art that the different embodiments of the invention are not limited to the example described above but may vary within the scope of the attached claims. For example, some part of the traversing gear may thus be located either fully or partly outside the pipe shaft.

Claims

1. A traversing gear arrangement for a crane moving on rubber-tyred wheels (4) or the like, the crane comprising an electric motor (28) functioning as traversing gear and including gearing (16), the wheels of the crane being arranged as a pair of wheels (4), and the wheels (4a, 4b) in the pair of wheels (4) being connected to each other by a hollow pipe shaft (17) such that the traversing gear connected to the drive wheel is at least partly inside the pipe shaft (17), c h a r a c t e r i z e d in that one of the wheels in the pair of wheels (4) is a drive wheel (4a) and the other is a free wheel (4b).
2. A traversing gear arrangement according to claim 1, c h a r a c t e r i z e d in that the drive wheel (4a) and the free wheel (4b) are mounted on the same pipe shaft.
3. A traversing gear arrangement according to any one of the preceding claims, c h a r a c t e r i z e d in that the roller bearings (23, 24) are arranged to roll on the surface of the pipe shaft (17).
4. A traversing gear arrangement according to any one of the preceding claims, c h a r a c t e r i z e d in that the pipe shaft (17) is arranged to function as an air guide for the motor (28).

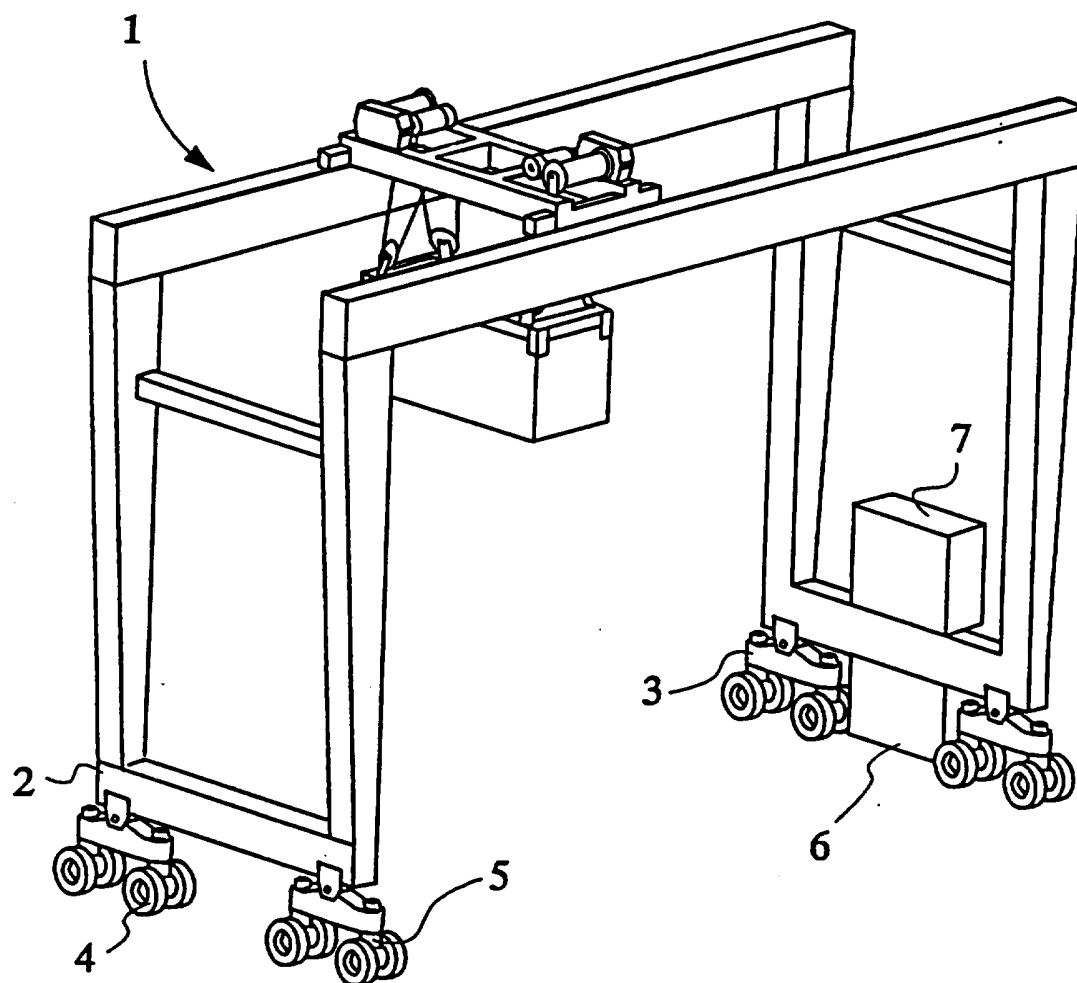


Fig. 1

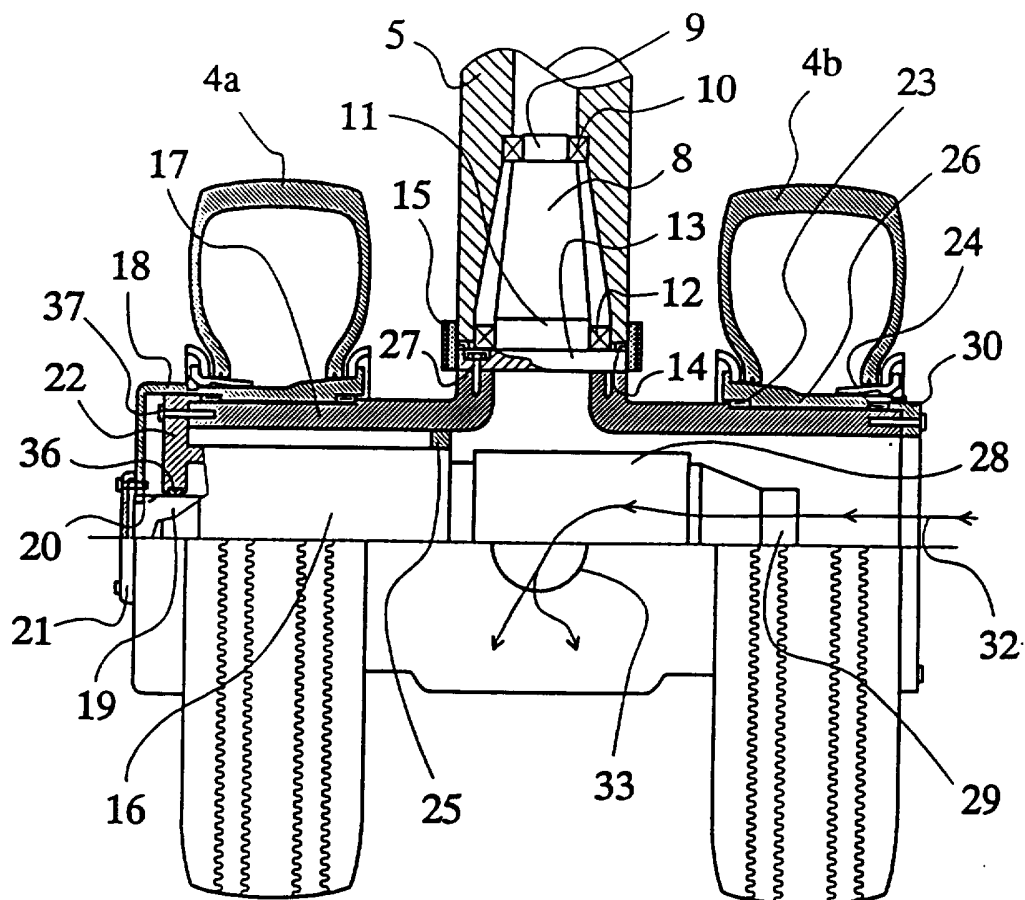


Fig. 2

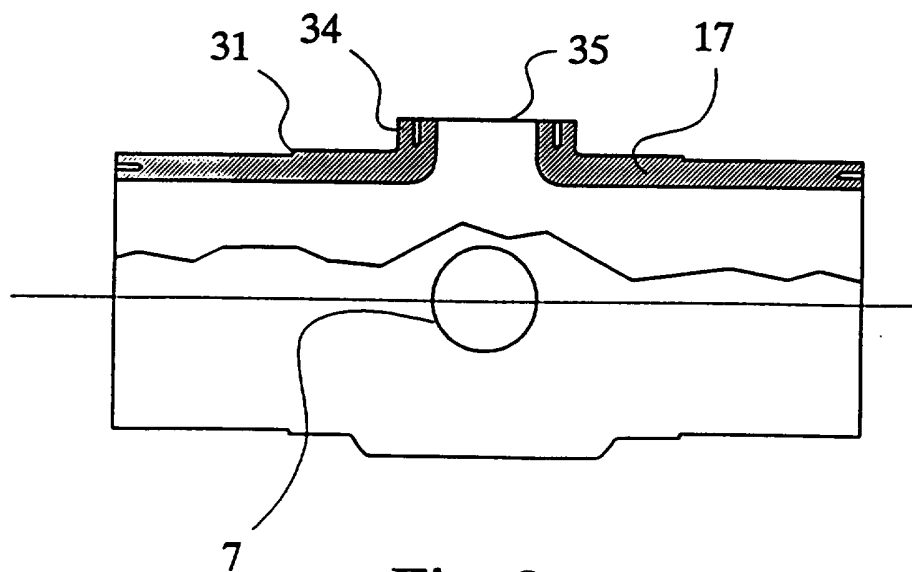


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 95/00395

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B66C 9/14 // B66C 5/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B66C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3280931 A (R.F. CAHILL ET AL), 25 October 1966 (25.10.66), column 5, line 4 - line 18, figure 9 --	1-4
A	US 3645406 A (J.W. BRAZELL), 29 February 1972 (29.02.72), column 8, line 3 - line 13, figure 18 -- -----	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 November 1995

Date of mailing of the international search report

02 - 11 - 1995

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Vilho Juvonen
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/10/95

International application No.

PCT/FI 95/00395

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 3280931	25/10/66	NONE	
US-A- 3645406	29/02/72	US-A- 3792779	19/02/74