


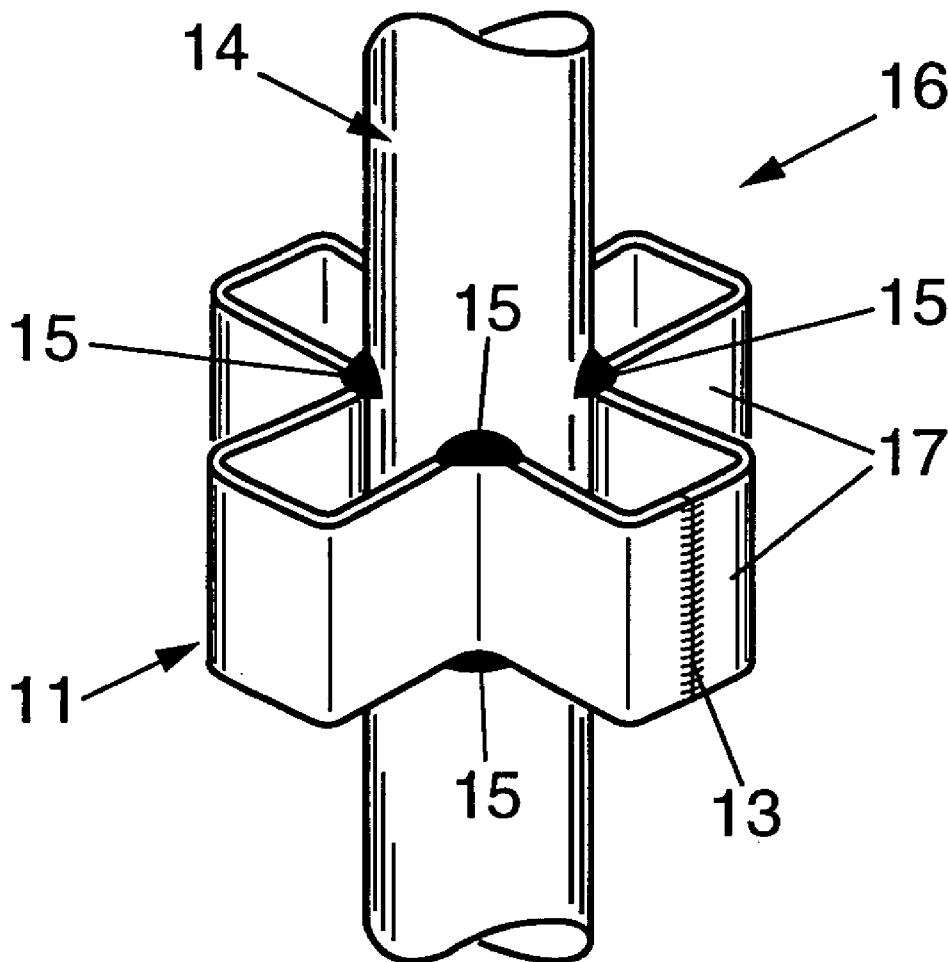







US 20060201745A1

(19) **United States**(12) **Patent Application Publication****Arnault et al.**(10) **Pub. No.: US 2006/0201745 A1**(43) **Pub. Date: Sep. 14, 2006**(54) **METHOD OF MANUFACTURING A
VERTICAL SCAFFOLDING ELEMENT, AND
ELEMENT THUS OBTAINED****Publication Classification**(51) **Int. Cl.**
E04G 1/00 (2006.01)(52) **U.S. Cl.** **182/186.8**(76) Inventors: **Francis Arnault**, Venizy (FR);
Jean-Pierre Sarrazy, Andresy (FR)Correspondence Address:
STITES & HARBISON PLLC
1199 NORTH FAIRFAX STREET
SUITE 900
ALEXANDRIA, VA 22314 (US)(57) **ABSTRACT**

A vertical scaffolding element consists of a tubular portion provided with a number n of radially projecting sockets, distributed peripherally in a star arrangement. The element is designed for the attachment of one end of a horizontal crosspiece of the scaffolding. The sockets are defined by a metal strip folded in order to form a star-shaped part closed on itself having protuberances forming the sockets alternating with re-entrant regions bearing against the tubular portion. The upper and lower edges of the re-entrant regions in contact with the tubular portion are welded thereto by continuous or discontinuous annular weld beads.

(21) Appl. No.: **11/433,487**(22) Filed: **May 15, 2006****Related U.S. Application Data**(63) Continuation of application No. 10/244,613, filed on
Sep. 17, 2002, now abandoned.

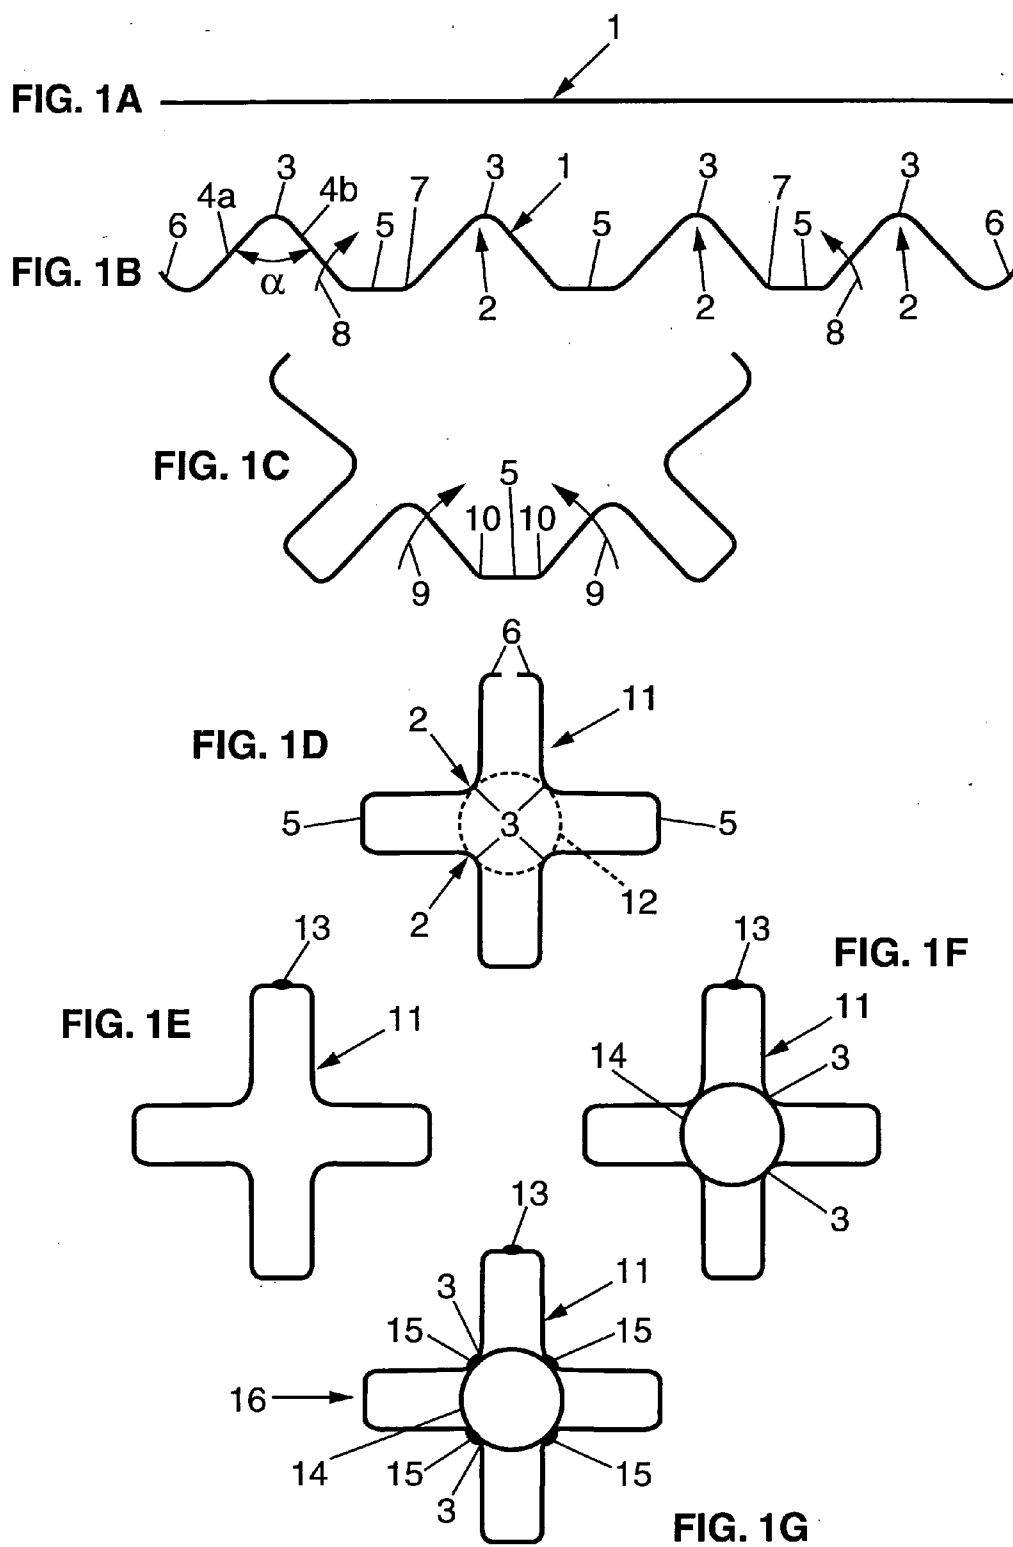

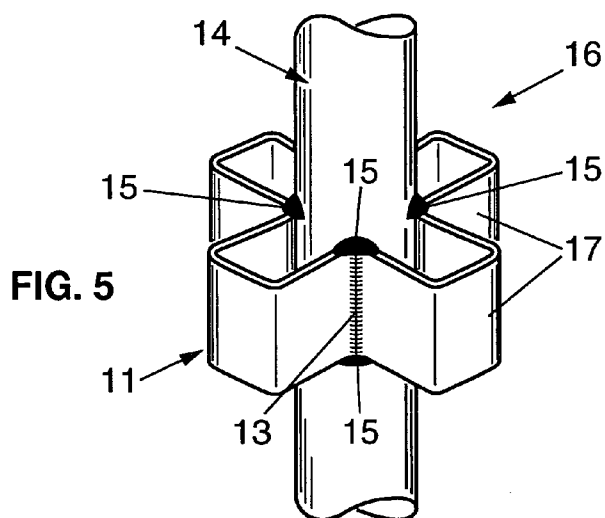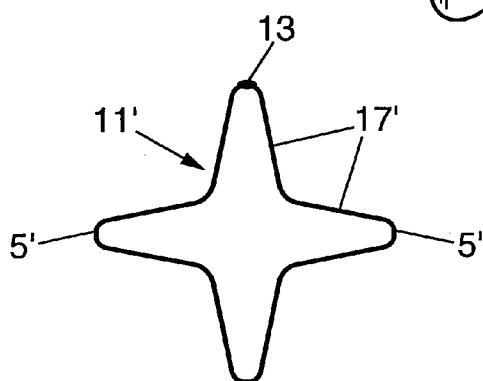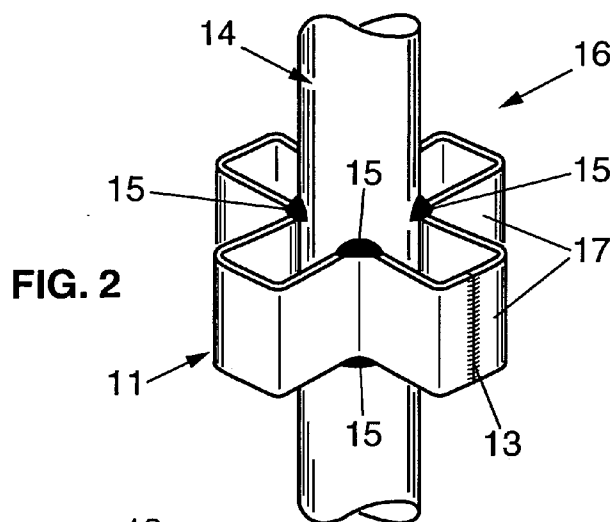

METHOD OF MANUFACTURING A VERTICAL SCAFFOLDING ELEMENT, AND ELEMENT THUS OBTAINED

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of application Ser. No. 10/244,613, filed Sep. 17, 2002 (which is hereby incorporated by reference).

FIELD OF THE INVENTION

[0002] The present invention relates to the field of scaffolding and, more specifically, it relates to improvements made to the vertical scaffolding elements consisting of a tubular portion provided with a certain number of radially projecting sockets, distributed peripherally in a star arrangement, intended for the attachment of one end of a horizontal transverse member of the scaffolding.

DESCRIPTION OF THE PRIOR ART

[0003] Scaffolding elements of the type in question are described and shown, for example, in document FR-A-1 521 232.

[0004] In the scaffolding elements of the type in question which are currently used, the sockets are manufactured individually, from a folded metal plate in the form of a U-shaped yoke, then welded individually to the tubular portion. Each edge of the U-shaped yoke is welded to the tubular portion both externally and possibly internally.

[0005] This results, for a scaffolding element equipped with four sockets placed in a cross arrangement, in the need to produce eight linear weld lines extending longitudinally. In addition, the production of internal welds is complex and requires specific equipment capable of being engaged inside the sockets.

[0006] The manufacture of this type of equipment proves to be difficult, lengthy and expensive.

[0007] Documents GB-A-2 207 875 and FR-A-1 553 487 certainly show arrangements of scaffolding elements comprising a part shaped into a star arrangement, defining radial sockets for the attachment of transverse member(s). However, these star-shaped parts have a geometrical shape which does not allow easy manufacture with simple equipment by an unskilled worker.

SUMMARY OF THE INVENTION

[0008] The aim of the invention is to overcome these drawbacks and to provide an improved solution suitable for simplifying the manufacturing process, and in rendering it shorter, simpler and therefore less expensive.

[0009] To these ends, according to a first of its aspects, the invention provides a method of manufacturing a vertical scaffolding element consisting of a tubular portion to which is welded a star-shaped part defining a number n of radially projecting sockets, distributed peripherally in a star arrangement, intended for the attachment of one end of a horizontal crosspiece of the scaffolding, the said process consisting in stamping flat a plane metal strip of a predetermined length at n regularly spaced locations so as to form n recesses, then in folding the said strip shaped in this way in order to close

it on itself and to form a star-shaped part, and finally to position the latter on the said tubular portion and to weld it thereto,

[0010] wherein, according to the invention, said strip is stamped at n regularly spaced locations so as to form n recesses approximately in a dihedral arrangement with a rounded ridge transverse to the length of the strip,

[0011] wherein said strip stamped in this way is folded at the joins of the ends of the faces of the dihedral with the intermediate plane regions of the strip so as to bring closer to each other the lateral faces of two adjacent recesses which are located on each side of a plane region of the strip and so as to position the rounded ridges of the recesses on an axisymmetric cylindrical outline having substantially the same diameter as the external diameter of the tubular portion,

[0012] and wherein, after welding the abutted ends of the strip to each other and positioning the star-shaped part onto the tubular portion with the rounded ridges of the dihedral formed by the recesses placed bearing against the outer face of the tubular portion, the said star-shaped part is secured to the tubular portion by discontinuous circular welds made on the upper and lower edges of the rounded ridges in contact with the tubular portion.

[0013] By virtue of the invention, the sockets are no longer manufactured and secured individually to the tubular portion by a high number of longitudinal welds, but they result from the production of a star-shaped part; and in addition, this star-shaped part is obtained by simple stamping and folding operations on an initially flat metal strip, which part is then welded to the tubular portion by a small number of circular arc-shaped welds which can be produced quickly with simple equipment, and without the need for skilled personnel.

[0014] The cost of manufacturing a scaffolding element by implementing the method of the invention is considerably reduced, at the same time, the element is manufactured in a much shorter period of time.

[0015] A considerable advantage will also be noted as regards safety. If a socket is torn off—that is to say that its welds to the tubular portion are broken—for example under the effect of too high a force, the torn socket continues to be integral with the rest of the part which, itself, remains secured to the tubular portions by its other welds. Thus, a crosspiece bearing on the torn socket is prevented from collapsing, as would happen with individual sockets.

[0016] In a simple manner, provision is made that the recesses are formed as dihedral which are open over an angle of $2\pi/n$.

[0017] Also, advantageously, the stamped strip is folded so as to bring the lateral faces of two adjacent recesses into a substantially parallel mutual position.

[0018] In a preferred embodiment which seems to constitute the most common practical application of the invention, provision may be made for the number of recesses to be four and for the angle α of opening of the dihedral formed by the recesses to be about 90° , by virtue of which a vertical scaffolding element is obtained, consisting of a tubular portion equipped with four sockets placed substantially in a cross arrangement.

[0019] Preferably, the metal strip is treated such that the said abutted ends of the strip which are welded are located away from the end of a socket, so that the weld bead does not hamper the attachment of the additional scaffolding members to the socket. Advantageously, there will be a benefit in that the welded abutted ends of the strip are located in a region of the star-shaped part which bears against the tubular portion, such that the upper and lower ends of the weld bead are remelted during subsequent welding of the star-shaped part to the tubular portion.

[0020] According to a second one of its aspects, the invention provides a vertical scaffolding element comprising four sockets defined by a metal strip folded in a cross arrangement with orthogonal branches and welded to a tubular portion which is characterized in that it is manufactured by implementing the method described above.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The invention will be better understood on reading the following detailed description of certain embodiments given by way of purely illustrative example. In this description, reference is made to the appended drawings in which:

[0022] **FIGS. 1A to 1G** illustrate successive steps in the manufacture of a preferred embodiment of a vertical scaffolding element according to the invention;

[0023] **FIG. 2** is a perspective view of a vertical scaffolding element constructed according to the invention;

[0024] **FIGS. 3 and 4** are, respectively, two schematic views of variant embodiments of the star-shaped part of **FIG. 1E**;

[0025] **FIG. 5** is a perspective view similar to that of **FIG. 2**, showing a preferred variant embodiment; and

[0026] **FIG. 6** is a schematic view of an alternative shape of the rounded ridges.

DETAILED DESCRIPTION OF THE INVENTION

[0027] The method of the invention will now be explained with reference to **FIGS. 1A to 1G**, by considering more particularly a preferred embodiment with four sockets placed substantially in a cross arrangement, that is to say diametrically opposed in pairs along two perpendicular branches, since this is the configuration which, in practice, seems to have the most widespread application.

[0028] Initially, a plane metal strip **1** of a predetermined length (**FIG. 1A**, together with the following figures, in which the metal strip **1** is shown with no thickness, by a single line, for reasons of clarity) is formed.

[0029] Next, diagonal bolt housings are punched out, this punching thus being carried out flat, under proper conditions.

[0030] Then, the said strip **1** is flat-stamped at n (in this case four) regularly spaced locations so as to form n recesses **2** approximately in a dihedral arrangement with a rounded ridge **3** extending transversely for the length of the strip **1**.

[0031] Preferably, the dihedral recesses **2** are open over an angle $\alpha=2\pi/n$, which, in the case illustrated, is an angle of about 90° .

[0032] As can be seen in **FIG. 1B**, each dihedral recess **2** is therefore defined by two substantially plane walls **4a, 4b** which are mutually inclined by the said angle $\alpha=2\pi/n$ and which are joined by the rounded ridge **3**. Two successive recesses **2** are separated by a flat undeformed region **5** of the strip **1**. At the ends of the strip **1**, a short portion **6** is stamped substantially perpendicular to the wall **4a** or **4b** of the adjacent recess **2**.

[0033] Next, on the strip stamped in this way with its recesses **2**, a bending or folding operation is carried out on the strip by folding the metal strip at the joins of the ends of the faces **4a, 4b** of the recesses with the intermediate flat regions **5** so as to bring closer to each other successive lateral faces **4a, 4b** belonging respectively to two adjacent recesses which are located on each side of a flat region **5**.

[0034] In the example with four recesses taken into consideration here, the bending or folding operation is carried out in two steps.

[0035] In **FIG. 1C**, initially the two ends of the strip are folded by pivoting (arrow **8**) the respective extreme recess **2** and the adjacent flat region **5** about the join **7** of the said flat region **5** with the adjacent recess **2**.

[0036] Then, on the intermediate part thus obtained (**FIG. 1C**), the two parts surrounding the central flat region **5** are folded by pivoting (arrow **9**) about the joins **10** of the said parts with the said central flat region **5**.

[0037] Following on from this, a star-shaped part **11** provided with n branches mutually separated by an angle of $2\pi/n$ is obtained. In the example in question here, the star-shaped part **11** is cross-shaped with opposed arms, offset by 90° , as illustrated in **FIG. 1D**. The short portions **6** of the ends of the strip **1** are abutted in order to form one end of one of the branches.

[0038] The star-shaped part **11** is finished by welding, at **13**, the aforementioned ends **6** edge to edge, such that an integral star-shaped part **11** is obtained, consisting of a metal strip closely following a closed outline with a complex shape as illustrated in **FIG. 1E** (in this case, the part **11** has a cross section in the form of a cross with four branches).

[0039] In addition, it will be noted that the rounded ridges **3** of the dihedral recesses **2** are all positioned on an axisymmetric cylindrical outline, the dimensions of the various deformed/folded parts of the strip **1** being chosen such that this cylindrical contour **12** (drawn in dotted lines in **FIG. 1D**) has substantially the same diameter as the external diameter of a tubular mounting portion.

[0040] Then, the star-shaped part **11** is pulled over and positioned on a tubular metal portion **14** (**FIG. 1F**), the rounded ridges **3** of the dihedra formed by the initial recesses **2** bearing against the outer face of the tubular portion **14**. It may be emphasized here that there is a benefit in the cylinder of revolution **12** for positioning the rounded ridges **3** having a diameter which is very slightly less than that of the outer face of the tubular portion **14** so that the star-shaped part **11** elastically clamps the tubular portion **14** over which it is fitted: the star-shaped part **11** then remains in place without any other retaining means for the purpose of the following operation.

[0041] Finally, the star-shaped part **11** is welded to the tubular portion **14**: weld beads **15** (**FIG. 1G**) are deposited,

in two circular passes, on the upper and lower edges of the rounded ridges 3, that is at eight locations in the example illustrated in FIG. 1G.

[0042] Following on from which, a vertical scaffolding element is obtained, as illustrated in FIG. 2, denoted overall by the reference 16, which consists of a tubular portion 14 provided with a number n (in this case four) of radially projecting sockets 17 distributed peripherally in a star arrangement, the said sockets being intended for the attachment of one end of a horizontal crosspiece of the scaffolding. The configuration of the star-shaped part 11 and its weld to the tubular portion 14 by upper and lower circular arc-shaped weld beads 15 are clearly visible in FIG. 2.

[0043] The method of the invention overcomes the drawbacks associated with the manufacture and the securing of individual sockets. It makes it possible to manufacture all of the sockets 17 integrally, it being possible for the star-shaped part 11 to be obtained by implementing simple mechanical processes. Furthermore, its attachment to the tubular portion requires two welding operations carried out discontinuously, in a circular manner, over the periphery of the tubular portion, and therefore under very simple conditions. These two welding operations may be carried out in a single pass by using two welding apparatuses, or else in two successive passes.

[0044] In the example envisaged above with regard to FIGS. 1A to 1G and 2, it has been assumed that the sockets have substantially parallel lateral faces, the folding operations (FIGS. 1C and 1D) being carried out as a consequence.

[0045] However, the invention is not limited to this single configuration and it is possible to envisage an implementation of the method of the invention capable of leading to a star-shaped part 11', the branches 17' of which have a different shape, for example a tapered shape, as illustrated schematically in FIG. 3. The branches 17' may have convergent walls joined at their end by a flattened transverse part 5' having a width less than the part 5 provided in FIGS. 1A to 1G and 2. Even the transverse part 5' may be reduced to nothing with the convergent walls joining at a point. As a consequence, all that is needed for this is to adapt the stamping operation of FIG. 1B (recesses 2 fairly close together, or even touching), and to adapt the folding operations of FIGS. 1C and 1D (bringing the walls 4a, 4b closer together so that they converge without becoming parallel).

[0046] Furthermore, the invention is not limited to the manufacture of vertical scaffolding elements equipped with four sockets. It is possible, by the method of the invention, to manufacture elements having any number n of sockets spaced apart by an angle of $2\pi/n$; in this case, the recesses 2 are formed, at the stamping step of FIG. 2, with side walls 4a, 4b forming an angle of $2\pi/n$ between them. By way of example, FIG. 4 illustrates schematically the shape of a vertical element 16' incorporating a star-shaped part 11" defining three sockets 17" separated by 120° , with convergent side walls according to the arrangements of FIG. 3.

[0047] In the exemplary embodiments which have just been described and which are illustrated in FIGS. 1A-1G and 2 to 4, the abutted ends of the metal strip folded according to the method of the invention are located approximately on the end of a socket. The weld bead 13 securing these ends risks causing problems for the attachment to the socket of scaffolding members. It may therefore prove desirable to make sure that the said abutted ends are

located away from the end of the socket, for example laterally, or even preferably in a region of the star-shaped part 11 which bears against the tubular portion (that is to say in the re-entrant angle separating two consecutive sockets), as is clearly illustrated in FIG. 5. In such an arrangement, the upper and lower ends of the weld 13 are remelted when welding the star-shaped part 11 on the tubular portion, which favorably affects the quality of these welds.

[0048] Finally it may prove to be particularly beneficial, as illustrated in FIG. 6, for the rounded ridges 3 to be shaped with their concavity turned outwards, such that these ridges 18 with a concave shape better follow the cylindrical outline of the tubular portion 14 to which they are applied and welded.

What is claimed is:

1. A method of manufacturing a vertical scaffolding element having a tubular portion to which is welded a star-shaped part defining a number n of radially projecting sockets, said sockets being distributed peripherally in a star arrangement and intended for the attachment to one end of a horizontal crosspiece of the scaffolding, said method comprising the steps of:

- a) stamping a plane metal strip of a predetermined length at n regularly spaced locations so as to form a stamped strip with n recesses, each said recess being approximately a dihedral arrangement with a rounded ridge transverse to the length of the strip,
- b) folding said stamped strip at joins joining ends of lateral faces of the dihedral arrangements with intermediate plane regions of the strip so as to bring closer to each other the lateral faces of two adjacent recesses which are located on each side of the plane regions of the strip and so as to position the rounded ridges of the recesses on an axisymmetric cylindrical outline having substantially a same diameter as an external surface of the tubular portion in order to close said stamped strip on itself with free ends of said stamped strip being abutted whereby a star-shaped member is formed,
- c) positioning said star-shaped member on said tubular portion with the rounded ridges of the dihedral arrangements formed by the recesses resting against the external surface of the tubular portion, and
- d) welding said star-shaped member to said tubular portion,

wherein the free abutted ends of the stamped strip are located substantially in a region of the star-shaped member which bears against the tubular portion after the star-shaped member has been mounted thereon, and

wherein after said folding step b) and before said positioning step c), both free abutted ends of the stamped strip are welded to each other so as to obtain the star-shaped member which is integral, and

wherein during said welding step d), said integral star-shaped member is secured to the tubular portion only by discontinuous circular welds made on upper and lower edges of the rounded ridges resting on the tubular portion.

2. The method according to claim 1, wherein the recesses are formed as dihedral arrangements which are open over an angle of $2\pi/n$.

3. The method according to claim 2, wherein the stamped strip is folded so as to bring the lateral faces of two adjacent recesses into a substantially parallel mutual position.

4. The method according to claim 1, wherein the stamped strip is folded so as to bring the lateral faces of two adjacent recesses into a substantially parallel mutual position.

5. The method according to claim 1, wherein the number of recesses is four and wherein an angle α of opening of the dihedral arrangement formed by the recesses is about 90° , whereby the vertical scaffolding element consists of a tubular portion equipped with four said sockets placed substantially in a cross arrangement.

6. The method according to claim 1, wherein the rounded ridges are formed with a concavity thereof turned outwards, so that the rounded ridges are applied tightly against the tubular portion.

7. A vertical scaffolding element comprising four sockets defined by a metal strip folded in a cross arrangement with orthogonal branches and welded to a tubular portion, characterized in that said vertical scaffolding element is manufactured by implementing the method according to claim 1.

* * * * *