

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 November 2004 (25.11.2004)


PCT

(10) International Publication Number
WO 2004/102076 A2

- (51) International Patent Classification⁷: **F24D** Lane, Pacific, MO 63069 (US). **SMITH, Jason, E.** [US/US]; 7826 Garden Avenue, St. Louis, MO 63119 (US). **BLOCK, Daniel, J.** [US/US]; 5152 Cedar Saddle, Imperial, MO 63052 (US).
- (21) International Application Number: PCT/US2004/004251
- (22) International Filing Date: 13 February 2004 (13.02.2004) (74) Agents: **BURRIS, Kelly, K.** et al.; Harness, Dickey & Pierce, P.L.C., Suite 400, 7700 Bonhomme Avenue, St. Louis, MO 63105 (US).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/431,758 8 May 2003 (08.05.2003) US (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application: US 10/431,758 (CON) Filed on 8 May 2003 (08.05.2003)
- (71) Applicant (for all designated States except US): **WATLOW ELECTRIC MANUFACTURING CO.** [US/US]; 12001 Lackland Avenue, St. Louis, MO 63146 (US). (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LIN, Hongy** [US/US]; 14535 Amstel Court, Chesterfield, MO 63017 (US). **LASKOWSKI, Thomas** [US/US]; 3711 Laura

[Continued on next page]

(54) Title: MULTI-ZONE CERAMIC HEATING SYSTEM AND METHOD OF MANUFACTURE THEREOF

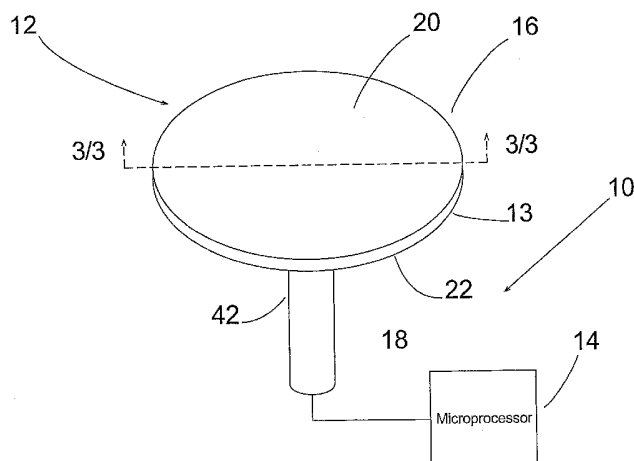

(57) Abstract: An improved heating system (10) for heating a semiconductor wafer during fabrication in a corrosive manufacturing environment is disclosed. The system (10) includes a novel ceramic heater (12) made of layered ceramic substrate (16) that has a plurality of heating elements (44) and temperature sensor arrangement (38) completely and directly embedded within the ceramic substrate (16) of the ceramic heater (12). The heating elements (44) and the temperature sensor arrangement (38) are constructed of a molybdenum and aluminum nitride composite that provides a low temperature coefficient of resistance which improves the operating efficiency of the ceramic heater (12). In operation, the temperature sensor arrangement (38) transmits temperature readings to a microprocessor (14) capable of controlling the heating elements (44) in such a manner as to provide a constant and uniform temperature distribution along the entire surface of the semiconductor wafer.



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**MULTI-ZONE CERAMIC HEATING SYSTEM AND METHOD OF MANUFACTURE
THEREOF**

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a heating system for use
< in a semiconductor processing such as in a Chemical Vapor
Deposition (CVD) and etching environment, and more
particularly to a heating system having a ceramic heater with
10 a plurality of individually controlled heating zones. More
specifically, the present invention relates to a ceramic
heater having heating elements operatively associated with one
or more sensors embedded in the ceramic substrate of the
ceramic heater.

15

2. Prior Art

During the process of manufacturing a semiconductor wafer
in a CVD and etching process it is important that the heating
system maintain a uniform temperature along the entire surface
20 of the semiconductor wafer. If a uniform temperature is not
maintained along the entire surface of the semiconductor
wafer, the manufacturing process is compromised and the
quality of the semiconductor wafer is diminished. However, a
CVD and etching environment is a harsh chemical environment
25 containing highly corrosive gases, such as oxygen, chlorine
and fluorine series gases, that may impact and cool only one
portion of the exterior surface of the semiconductor wafer,

therefore making it difficult to maintain a uniform temperature along the exterior surface of the wafer by the ceramic heater.

5 Because many ceramic heaters of the prior art normally include a single temperature sensor, such heaters cannot provide a constant and uniform heat distribution along the entire surface of the semiconductor wafer when cooler gas impact only a portion of the semiconductor wafer. Further, 10 the highly corrosive CVD and etching environment eventually degrades and corrodes temperature sensing arrangements having multiple temperature sensors and electrical leads located along the exterior surface of the ceramic heater in order to detect temperatures along multiple zones of the ceramic heater 15 surface. Other prior art devices teach a centrally located temperature sensor disposed inside a centralized hollow shaft of the ceramic heater in order to protect the leads and prevent corrosion of the sensor arrangement; however, this prevents accurate temperature readings along multiple portions 20 of the semiconductor wafer surface since a single sensor can only take readings from the center portion of the ceramic heater because of the centralized location of the sensor.

 Accordingly, ceramic heaters for use in the manufacture 25 of semiconductor wafers suffer from several principal

drawbacks. First, such heaters are unable to provide a sensor arrangement that can take temperature readings along the peripheral portions of the ceramic heater such that a uniform and constant temperature can be maintained along the entire surface of the semiconductor wafer because of the prolonged exposure of the temperature sensors to the corrosive gases contained in a CVD and etching environment seriously degrades the sensor's capabilities over time. Second, prior art ceramic heaters have heating elements that are manufactured from refractory metal materials make the heating element of the ceramic heater inefficient and costly to operate. This inefficiency is caused by a high Temperature Coefficient of Resistance ("TCR") exhibited by the prior art heating elements which can cause an undesirable high "rush in" current during start-up of the ceramic heater which makes power management more costly and inefficient.

For example, U.S. Patent 6,066,836 to Chen et al. discloses a prior art ceramic heater for use in a CVD and etching environment having one sensor to take temperature readings which are relayed to a microprocessor in order to adjust the temperature of various heating elements in the ceramic heater. Since only one sensor is utilized in the Chen et al. device it can only sense the temperature along the central portion of the semiconductor wafer and cannot maintain

a uniform heat distribution along the entire surface of the semiconductor wafer. Additionally, this type of ceramic heater includes a heating element that suffers from a high TCR which causes the ceramic heater to be inefficient when
5 operated.

U.S. Patent Application Publication No. 2002/0134775 to Ohashi discloses a ceramic heater with two distinct heating zones controlled by sensors located along the outer and
10 peripheral portions of the ceramic heater. The Ohashi sensors are located in aluminum nitride tube members formed through the ceramic substrate of the ceramic heater that still expose the sensors to the corrosive effects of gases in a CVD and etching environment. As noted above, prolonged exposure to
15 such gases eventually degrades the performance of the sensors and prevents the ceramic heater from achieving a uniform temperature along the entire surface of the semiconductor wafer. Furthermore, such a sensor arrangement may also cause a heat sink effect that compromises the temperature uniformity
20 of the heater due to heat loss through conduction. Also, this reference does not teach or suggest the incorporation of a heating element made from a material that exhibits a low TCR during operation.

Therefore, there appears a need in the art for a ceramic heater comprising a plurality of distinct and independently controlled heating zones operatively associated with sensors that are completely and directly embedded inside the ceramic substrate of the heater in order to protect the sensor elements from the corrosive effects of gases in a CVD and etching environment. Furthermore, there also appears a need in the art for a ceramic heater that has a heating element made of material which exhibits a low TCR that is efficient to operate.

15

20

OBJECTS AND SUMMARY OF THE INVENTION

Accordingly, the primary object of the present invention is to provide a heating system including a multi-zone ceramic heater that maintains a constant and uniform temperature along
5 the surface of a semiconductor wafer in a CVD and etching environment.

Another object of the present invention is to provide a ceramic heater having a heating element made of a ceramic
10 composite material consisting of molybdenum and aluminum nitride.

Another further object of the present invention is to provide a heating element that exhibits a low temperature
15 coefficient of resistance.

Yet another object of the present invention is to provide a ceramic heater having temperature sensors and heating elements that are completely and directly embedded in the
20 ceramic substrate of the heater.

Another object of the present invention is to provide a method of manufacturing a ceramic heater that completely encases the electrical components in the ceramic substrate of

the ceramic heater in order to prevent corrosion of such components in a corrosive working environment.

These and other objects of the present invention are realized in the preferred embodiment of the present invention, described by way of example and not by way of limitation, which provides for a heating system with a multi-zone ceramic heater having embedded sensor and heating element arrangements that protect these elements from the corrosive CVD and etching environment as well as provide a heating element that exhibits a low temperature coefficient of resistance.

In brief summary, the present invention overcomes and substantially alleviates the deficiencies in the prior art by providing a heating system with a ceramic heater having plurality of heating elements in operative association with at least one temperature sensor. Each temperature sensor is dedicated to one particular heating zone and is capable of sensing the temperature at a particular location of the heater and communicate such temperature readings to a microprocessor. The microprocessor adjusts the heat generated at a respective heating element in a particular heating zone in order to maintain a constant and uniform temperature along the wafer. For example, if one portion of the semiconductor wafer is too cool due to the impact of cool gases along a portion of the

semiconductor wafer the sensor in a particular heating zone detects the cooler temperature in the ceramic heater. The sensor then transmits a signal to the microprocessor for increasing the power to heating elements of that heating zone
5 for increasing the amount of heat applied to that particular portion of the semiconductor wafer until a uniform temperature pattern is achieved along the surface of the wafer. The multi-zone arrangement of sensors along the entire ceramic heater is made possible because the sensors and heating
10 elements are completely and directly embedded inside the ceramic substrate during manufacture without exposing any of the electrical components to the corrosive CVD and etching environment.

15 The ceramic heater according to the present invention is comprised of a ceramic substrate which is manufactured using a layering process wherein a series of ceramic layers are constructed from a composite material that is laminated and sintered. All of the ceramic layers are constructed of
20 aluminum nitride with two of the ceramic layers having additional composites of molybdenum and aluminum nitride to form the sensor and heating element arrangements of the invention.

The multi-zone heating element arrangement is manufactured by splicing a pre-formed resistor tape that is cut into a particular design that may be spliced into the tape made of aluminum nitride that produces the ceramic layer.

5 Preferably, these heating elements are constructed from a molybdenum and aluminum nitride composite. The inventors have discovered that the use of a molybdenum and aluminum nitride composite material for the manufacture of heating elements produces a heating element that exhibits a significantly lower
10 TCR than prior art heating elements. This lower TCR allows the heating elements to have a lower "rush in" current during start-up when power is first supplied to the ceramic heater, thereby increasing the heater's operational efficiency.

15 The heating elements of the present invention are controlled by a microprocessor which communicates with a plurality of sensor arrangements that are also embedded directly within the ceramic substrate of the ceramic heater during manufacture. Power is supplied to the sensor and
20 heating element arrangements through respective conductive pathways formed through the ceramic substrate of the ceramic heater that engage lead wires fed through the hollow shaft of the heater. The temperature sensors are preferably Resistive Temperature Detecting Devices that are applied directly on the
25 surface of the tape used to produce one of the ceramic layers

using a composite material that is constructed from molybdenum and aluminum nitride. Each temperature sensor is manufactured by applying a molybdenum and aluminum nitride ink to form a specifically designed pattern on the surface of one of the
5 ceramic layers. The ink is applied so that it communicates with a conductive pathway formed through the ceramic substrate to supply power and communicate temperature readings to the microprocessor.

10 Additional objects, advantages and novel features of the invention will be set forth in the description that follows, and will become apparent to those skilled in the art upon examination of the following more detail description and drawings in which like elements of the invention are similarly
15 numbered throughout.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of the heating system showing the ceramic heater and the microprocessor according to the present invention;

5

FIG. 2 is a side view of the ceramic heater according to the present invention;

FIG. 3 is a cross sectional view of the ceramic heater taken along line 3-3 of FIG. 1 according to the present invention;

FIG. 4 is a top view of one of the layers of tape that comprise the ceramic heater showing the heating elements spliced into the aluminum nitride composite according to the present invention;

FIG. 5 is a top view of the one of the layers of tape that comprise the ceramic heater showing the temperature sensors being applied to the layer of aluminum nitride composite according to the present invention;

FIG. 6 is an exploded view of the ceramic heater depicting the series of ceramic layers that comprise the ceramic substrate according to the present invention;

FIG. 7 is a table comparing the temperature coefficient of resistance of a prior art heating element against that of a heating element made of a molybdenum and aluminum nitride composite according to the present invention; and

FIG. 8 is a table which shows that resistance increases with rising temperature for an embedded sensor according to the present invention.

10

DETAILED DESCRIPTION OF THE INVENTION

Referring to the drawings, the preferred embodiment of the multi-zone heating system for use in a CVD and etching environment according to the present invention is illustrated and generally indicated as 10 in FIG. 1. Heating system 10 provides a means for maintaining a uniform and constant temperature along a surface of a semiconductor wafer (not shown), while protecting the electrical components of the heating system from the corrosive gases in the CVD and etching environment.

Referring to FIGS. 1 and 6, ceramic heater 12 comprises a ceramic body 16 having a generally disk-like configuration attached to a hollow shaft 18. Ceramic body 16 is made of a ceramic substrate constructed from a series of ceramic layers 26, 28, 30, 32, 34 and 36 made from an electrically conductive composite material having at least two or more heating elements 44 completely and directly embedded in the ceramic substrate with at least one temperature sensor 38 in operative association with one or more heating elements 44 through a microprocessor 14. Ceramic layers 26, 28, 30, 32, 34, and 36 are laminated and sintered together during manufacture which forms a ceramic body 16 that completely and directly embeds heating elements 44 and temperature sensors 38 in the ceramic

substrate of ceramic heater 12 as shall be explained in greater detail below.

Referring to FIG. 1, heating elements 44 are operably
5 controlled by a microprocessor 14. When temperature sensors 38 sense that one area of the heater is too cold due to a temperature drop in semiconductor wafer or too warm such that a variance in temperature has occurred, the microprocessor 14 will increase or decrease power to specific heating elements
10 44 in order to provide and maintain a uniform temperature distribution across the entire surface of the semiconductor wafer.

As illustrated in FIG. 4, maintaining a uniform
15 temperature along the semiconductor wafer is achieved by the grouping of the heating elements 44 within discrete heating zones 28A and 28B along the ceramic layer 28 of body 16. During manufacturing, heating elements 44 and temperature sensors 38 are completely embedded within the ceramic
20 substrate by application of heating elements 44 and temperature sensors 38 on respective ceramic layers that comprise ceramic body 16.

Referring to FIG. 6, the ceramic body is constructed of
25 ceramic layers 26, 28, 30, 32, 34, and 36 which are laminated

and then sintered together during manufacture. It should be noted that any number of ceramic layers could be used to construct ceramic heater 12 and still fall within the scope of the invention. In the preferred embodiment, thick tapes are
5 used to manufacture the ceramic layers 28 and 32 having heating elements 44 and temperature sensors 38 which are interposed between the other ceramic layers 26, 30, 34 and 36 formed from thick tapes.

10 The tapes used to make ceramic layers 26, 30, 34 and 36 are constructed from aluminum nitride, while the tapes for ceramic layers 28 and 32 are also formed from the same aluminum nitride, but are used to form the base for heating elements 44 and temperature sensors 38, respectively. Ceramic
15 layer 28 further includes an additional composite material spliced with the aluminum nitride of the thick tape to form at least two separate heating zones 28A and 28B made preferably from a molybdenum and aluminum nitride composite. Further, ceramic layer 32 includes a molybdenum and aluminum nitride
20 ink that is applied directly to the surface of the ceramic layer 32 which will form the temperature sensors 38.

As noted above, ceramic layer 28 forms a multi-zone heating element arrangement made by splicing a molybdenum and
25 aluminum nitride composite that will function as heating

elements 44 with a tape made from an aluminum nitride composite. Preferably, the volume percentage ratio of molybdenum to aluminum nitride in the composite material can be in a range of 20%-55% molybdenum to 80%-45% aluminum
5 nitride. This heating element composite is cut out from the composite tape to produce at least two separate heating elements 44 and spliced into the tape made from the aluminum nitride to form separate heating zones. As shown in FIG. 4, the splicing of the pre-formed cut-out into tape of ceramic
10 layer 28 results in layer 28 being divided into two separate heating zones, 28A and 28B. Each heating zone 28A and 28B includes at least one separate and distinct heating element 44 that may be operated to provide and maintain a uniform temperature along the surface of the semiconductor wafer.

15

The inventors have also discovered that the construction of heating elements 44 from a molybdenum and aluminum nitride composite allows such elements 44 to have a lower TCR (i.e. $0.0015/^{\circ}\text{C}$) than heating elements 44 made from refractory metal
20 such as molybdenum which has a higher TCR of $0.00435/^{\circ}\text{C}$. This lower TCR for heating elements 44 made from a molybdenum and aluminum nitrate composite produces a low "rush in" current when the ceramic heater 12 is first activated during start up, thereby making it more energy efficient to operate.

25

As noted above, heating elements 44 are operatively associated with at least one temperature sensor 38, respectively, which are located along ceramic layer 32 as shown in FIG. 5. Ceramic layer 32 is made from the same aluminum nitride composite that is utilized in ceramic layers 26, 30, 34, and 36 with the exception that a composite of molybdenum and aluminum nitride ink is applied to the surface of the aluminum nitride tape layer during manufacture to form temperature sensors 38. The ratio of molybdenum in temperature sensors 38 can be from 20%-100% molybdenum with the remainder being aluminum nitride. Most preferably, as noted above, this composite of molybdenum and aluminum nitride is in the form of a liquid ink mixture which is applied directly to the surface of the tape for ceramic layer 32 using methods known in the art. Therefore, when the ink is first applied to tape of ceramic layer 32 it will infiltrate a small portion of the aluminum nitride tape and the proportion of aluminum nitride in the ink will increase within the overall molybdenum and aluminum nitride composite that forms temperature sensor 38. Accordingly, even if 100% molybdenum is first applied, the temperature sensor will contain a small proportion of aluminum nitride derived from aluminum nitride infiltrating from the tape.

Referring to FIG. 3, temperature sensors 38 and heating elements 44 are connected to conductive pathways 40 and 41, respectively. Preferably, conductive pathways 40 and 41 are formed by boring axial pathways through ceramic body 16 that terminates adjacent to hollow shaft 18 for each heating element 44 and temperature sensor 38 of ceramic heater 12. The axial pathways 40 and 41 are then completely back filled with a slug or powder of conductive material made from a molybdenum and aluminum nitride composite. Preferably, the conductive material has a ratio of molybdenum to aluminum nitride that is equal to the same ratio of molybdenum and aluminum nitride used in the construction of heating elements 44.

Connected to each of the conductive pathways 40 and 41 at its terminal point are a pair of lead wires 42 which are operatively associated with microprocessor 14 and a power source (not shown). Preferably, microprocessor 14 provides a means for receiving signals from temperature sensors 38 which is then converted to temperature readings based on a predetermined resistance vs. temperature calibration curve and automatically adjusts the power applied to respective heating elements 44 in heating zones 28A and 28B in order to maintain a constant and uniform temperature along the semiconductor wafer.

As noted above, ceramic heater 12 is manufactured by the creation of a tape for each ceramic layer 26, 28, 30, 32, 34, and 36 and the modification of the tapes for ceramic layers 28 and 32 to include heating elements 44 and temperature sensors 38, respectively. The initial process to construct tapes for ceramic layers 26, 28, 30, 32, 34, and 36 is similar for each tape. An aluminum nitride powder is mixed with organic binders and solvents, such as acrylic and toluene, to form a slurry. The slurry is cast by a doctor blade over a plastic carrier to allow the slurry to dry and form a tape.

As further noted above, ceramic layer 28 is manufactured from two separate tapes being cut and then spliced together to form heating elements 44. The first tape is comprised of aluminum nitride which is manufactured in an identical manner to the tapes used to produce ceramic layers 26, 30, 32, 34, and 36. The second tape is made from a molybdenum and aluminum nitride composite material and serves as the heating element portion of the ceramic layer 28. The volume percentage ratio of molybdenum is 20%-45% with the remainder of the composite being comprised of aluminum nitride. Once the two tapes for ceramic heater 28 have been created they are spliced together to form one continuous tape. The heating element portion now spliced within tape of ceramic layer 28

may comprise two or more separate and distinct heating zones made from a molybdenum and aluminum nitride composite which form heating elements 44 of ceramic heater 12. Preferably, at least two distinct heating elements 44 are spliced into the
5 tape to allow for at least two individually controlled heating zones 28A and 28B, although the present invention contemplates that more than two heating zones may be produced.

The splicing process is achieved by removing a set
10 portion of the aluminum nitride from the tape and replacing it with an identical set portion cut from a tape containing a electrically conductive molybdenum and aluminum nitride composite that serves as heating element 44. Preferably, each respective tape may be cut by a laser, dye cut, or other known
15 methods in the art. After the two tapes are cut each set portion should have a shape that is converse to the other. As shown in FIG. 4 the shapes are generally circular in the preferred embodiment, however any suitable configuration, such as angular, square or any combination of the above, is felt to
20 fall within the scope of the present invention. When the set portions are spliced together each will interlock with one another to form a flat, continuous tape for ceramic layer 28 with heating elements 44 embedded within the ceramic substrate of ceramic heater 12. Referring to FIG. 7, heating elements 44
25 made in accordance with the present invention would have a

much lower TCR than has been found in heating elements constructed from traditional refractory metals of the prior art. For example, a heating element constructed from only Molybdenum has a TCR as indicated on FIG. 7 of $0.00435/^{\circ}\text{C}$,
5 while heating elements 44 made from a composite of molybdenum and aluminum nitride in accordance with the present invention have a TCR of $0.0001/^{\circ}\text{C}$ which is significantly lower than prior art devices.

10 The temperature sensors 38 applied to ceramic layer 32 are formed from an ink which is a liquid mixture of molybdenum combined with aluminum nitride. The molybdenum and aluminum nitride ink is applied to the tape of ceramic layer 32 with a specific pattern and allowed to dry, thereby creating at least
15 two temperature sensors 38. In the preferred embodiment, the number of temperature sensors 38 will be equal to at least the number of heating zones as each temperature sensor 38 will be operatively associated with at least one respective heating element 44 through microprocessor 14 as shall be explained in
20 greater detail below. Referring to FIG. 8, temperature sensors 38 are preferably Resistive Temperature Detecting (RTD) devices that exhibit a level of resistance that is dependent upon the temperature.

Once tape of ceramic layer 32 has the molybdenum and aluminum nitride ink applied thereto and the tape of ceramic layer 28 is fabricated with heating elements 44 spliced therein, the next step is to assemble the tapes of ceramic
5 layers 26, 28, 30, 32, 34, and 36 to form unitary ceramic body 16.

Referring to FIG. 6, the tapes of ceramic layers 26, 28, 30, 32, 34, and 36 are assembled with each tape being stacked
10 one on top of the other in successive order. After the tapes have been properly stacked conductive pathways 40 and 41 are formed for each heating element 44 and temperature sensor 38, respectively, as shown in FIG. 3, for providing power and permitting operative association between the heating elements
15 44 and temperature sensor 38 through microprocessor 14. Conductive pathway 40 is formed for each heating element 44 by making a hole through the tape of ceramic layers 26 and 28. After the hole has been formed it is back filled with either a plug or powder made from a molybdenum and aluminum nitride
20 composite similar to the composite used to make heating element 44. This backfill material forms conductive pathway 40 which links heating element 44 to lead wires 42 disposed inside hollow shaft 18. In similar fashion, conductive pathway 41 is formed by making a hole through the tape of
25 ceramic layers 26, 28, 30 and 32 for each temperature sensor

38 which is also backfilled with a molybdenum and aluminum
nitride composite material such that a conductive path is
established between each temperature sensor 38 and lead wires
42. The ratio of molybdenum to aluminum nitride for the
5 composite that forms conductive pathways 40 and 41 should be
equal to that used to form heating elements 44 in the
preferred embodiment of the invention.

After a suitable number of conductive pathways 40 and 41
10 are created, the tapes of ceramic layers 26, 28, 30, 32, 34,
and 36 are laminated and sintered to create ceramic body 16.
The lamination is accomplished by placing all of the stacked
tapes in a conventional mold and then applying traditional
lamination techniques to the surface of the tapes. Next, the
15 ceramic layers 26, 28, 30, 32, 34, and 36 are sintered
together at a temperature range of between 1700 to 1900
degrees centigrade under a pressure of between 100 to 3000
pounds per square inch. It should be noted that although
specific ranges are given, any range of temperatures and
20 pressures that would effectively sinter tapes together to form
a ceramic substrate would fall within the scope of the present
invention. Any known means of sintering the plates together,
such as a hot isostatic press, can be used and still fall
within the scope of the present invention.

25

After the sintering process is completed lead wires 42, preferably constructed of nickel, are brazed to each conductive pathway 40 and 41 and are then fed through hollow shaft 18 which is attached to ceramic body 16 by means well known in the art. The free ends of the lead wires 42 are then connected to microprocessor 14 which operatively associates the microprocessor 14 with heating elements 44 and temperature sensors 38 as well as a power source.

10 In operation, heating system 10 is capable of providing a constant and uniform temperature along the surface of the semiconductor wafer because of the multi-zone heating arrangement due to heating elements 44 and temperature sensors 38 being embedded along all portions of ceramic body 16. When
15 a semiconductor wafer is first placed upon ceramic heater 12 certain portions of the wafer may become cooler than other portions due to the impact of cooler gases upon only a portion of the semiconductor wafer.

20 To correct this temperature variance across the surface of the semiconductor wafer, microprocessor 14 receives temperature readings from various temperature sensors 38 through a specifically designed wafer (not shown) with a calibrated curve that transforms a resistance signal into a
25 temperature reading signal. The temperature sensor 38 then

transmits a signal through lead wire 42 to respective heating elements 44 located in zone 28A (or 28B). A respective heating element 44 would then have its power adjusted by microprocessor 14 so that more heat is provided to a

5 particular heating zone than was being applied to the other heating zone. This additional heating warms the area of the semiconductor wafer that was too cool due to the impact of cool gasses. Additional heat to that particular heating zone would continue until the temperature readings being

10 transmitted from both heating zones 28A and 28B were substantially equal. Due to this balancing of temperatures between heating zones 28A and 28B the entire surface of the semiconductor wafer would remain at a constant temperature. Moreover, since heating elements 44 and temperature sensors 38

15 are completely and directly embedded within the ceramic substrate of body 16 they would not be subject to the corrosive environment of a CVD and etching environment.

It should be understood from the foregoing that, while

20 particular embodiments of the invention have been illustrated and described, various modifications can be made thereto without departing from the spirit and scope of the invention. Therefore, it is not intended that the invention be limited by the specification; instead, the scope of the present invention

25 is intended to be limited only by the appended claims.

CLAIMS

What is claimed is:

1. A ceramic heater (12) comprising:
 - a) a ceramic substrate (16);
 - b) a heating element arrangement (44) directly embedded within said ceramic substrate (12); and
 - 5 c) a temperature sensor arrangement (38) operatively associated with said heating element arrangement (44), said temperature sensor arrangement (38) being directly embedded in said ceramic substrate (16).
2. The ceramic heater (12) according to claim 1, further comprising a hollow shaft (18) attached to said ceramic substrate (16).
3. The ceramic heater (12) of claim 1 wherein said ceramic substrate (16) is comprised of a plurality of layers of material (26, 28, 30, 32, 34, 36).
4. The ceramic heater (12) of claim 3 wherein said plurality of layers of material (26, 28, 30, 32, 34, 36) consist of an aluminum nitride ceramic composite.

5. The ceramic heater (12) of claim 1 wherein said heating element arrangement (44) consists of a molybdenum and aluminum nitride composite.

6. The ceramic heater (12) of claim 1 wherein said temperature sensor arrangement (38) consists of a molybdenum and aluminum nitride composite.

7. The ceramic heater (12) of claim 1 further comprising a conductive pathway (40, 41) which is connected to said heating element arrangement (44) and to said temperature sensing arrangement (38).

8. The ceramic heater (12) of claim 7 wherein said conductive pathway (40, 41) is comprised of a molybdenum and aluminum nitride composite.

9. The ceramic heater (12) of claim 7 further comprising a lead wire (42) connected to said conductive pathway (40, 41).

10. The ceramic heater (12) of claim 1 wherein said at temperature sensing arrangement (38) is operatively associated with said heating element arrangement (44) by a microprocessor (14).

11. The ceramic heater (12) of claim 9 where said lead wire (42) is constructed of nickel.

12. A ceramic heater (12) comprising:

a) a plurality of ceramic layers (26, 28, 30, 32, 34, 36);

b) a heating element arrangement (44) directly
5 embedded within said plurality of ceramic layers (26, 28, 30, 32, 34, 36) forming at least two individual and distinct heating zones (28A, 28B); and

c) a temperature sensor arrangement (38) directly
embedded between said plurality of ceramic layers (26, 28, 30,
10 32, 34, 36) which is operatively associated with said heating element arrangement (44).

13. The ceramic heater (12) of claim 12 wherein said heating element arrangement (44) is made from a material that exhibits a low temperature coefficient of resistance.

14. The ceramic heater (12) of claim 12 wherein said heating element arrangement (44) is made from a molybdenum and aluminum nitride composite.

15. The ceramic heater (12) of claim 12 wherein said temperature sensing arrangement (38) is comprised of a molybdenum and aluminum nitride composite.

16. The ceramic heater (12) of claim 12 further comprising a conductive pathway (40, 41) traversing through said plurality of ceramic layers (26, 28, 30, 32, 34, 36).

17. The ceramic heater (12) of claim 16 wherein said conductive pathway (40, 41) is comprised of a molybdenum and aluminum nitride composite.

18. The ceramic heater (12) of claim 16 further comprising a lead wire (42) connected to said conductive pathway (40, 41).

19. A heating system (10) for maintaining a uniform temperature along a semiconductor wafer comprising;

a) a ceramic heater (12) including:

i) a plurality of ceramic layers (26, 28, 30, 32, 34, 36) that form a ceramic substrate,

ii) a heating element arrangement (44) directly embedded inside said plurality of ceramic layers (26, 28, 30, 32, 34, 36), and

- 10 iii) a temperature sensing arrangement (38)
 directly embedded inside said plurality of
 ceramic layers (26, 28, 30, 32, 34, 36),
 said temperature sensing arrangement (38)
 being operatively associated with said
15 heating element arrangement (44); and

 b) a microprocessor (14) in operative association with
 said heating element arrangement (44) and said temperature
 sensing arrangement (38) for maintaining a uniform temperature
 distribution along the surface of the semiconductor wafer.

20

20. The heating system (10) of claim 19 wherein said heating
element arrangement (44) is made from a molybdenum and
aluminum nitride composite.

21. The heating system (10) of claim 19 wherein said
temperature sensing arrangement (38) is applied between two of
said plurality of ceramic layers (26, 28, 30, 32, 34, 36).

22. The heating system (10) of claim 19 where said heating
element arrangement (44) is interspliced within one of said
plurality of ceramic layers (26, 28, 30, 32, 34, 36).

23. A heating element (10) for use in a ceramic substrate
(16) that is comprised of a molybdenum and aluminum nitride

composite that exhibits a low temperature coefficient of resistance.

5

24. The heating element (10) of claim 23 wherein said heating element arrangement (44) experiences a low temperature coefficient of resistance of less than $0.0015/^{\circ}\text{C}$.

25. The heating element (10) of claim 23 wherein the percentage of molybdenum is in a range between 20% to 55% in relation to the percentage of aluminum nitride.

26. The heating element (10) of claim 23 wherein the percentage of aluminum nitride is in a range between 80% to 45% in relation to the percentage of molybdenum.

27. A method of manufacturing a ceramic heater (12) for heating a semiconductor wafer in a chemical vapor deposition and etching environment comprising the steps of:

- a) providing a plurality of layers (26, 28, 30, 32, 34, 5 36) of a tape comprised of an aluminum nitride composite;
- b) placing a heating element arrangement (44) within one of said plurality of layers of tape (28);
- c) applying a temperature sensing arrangement (38) to one of said plurality of layers of tape (32);

10 d) placing said plurality of layers of tape (26, 28, 30, 32, 34, 36) together; and

 e) forming a ceramic composite (16) from said plurality of layers of tape (26, 28, 30, 32, 34, 36).

28. The method of claim 27 further comprising the step of providing a conductive pathway (40, 41) within said ceramic composite (16) to said heating element arrangement (44) and to said temperature sensing arrangement (38).

29. The method of claim 28 further comprising the step of attaching a lead wire (42) to said conductive pathway (40, 41).

30. A method of applying a constant and uniform heat source to an article comprising the steps of:

 a) providing a ceramic heater (12) comprising;

5 i) a plurality of ceramic layers (26, 28, 30, 32, 34, 36),

 ii) a heating element arrangement (44) directly embedded within said plurality of ceramic layers (26, 28, 30, 32, 34, 36) forming at least two individual and distinct heating zones (28A, 28B), and

10


- iii) a temperature sensor arrangement (38) directly embedded within said plurality of ceramic layers (26, 28, 30, 32, 34, 36) which
15 are operatively associated with said heating element arrangement (44);
- b) placing said article in communication with said ceramic heater (12);
- c) allowing said temperature detecting arrangement (38)
20 to detect differing temperatures along the surface of said article; and
- d) adjusting said heating element arrangement (44) to eliminate said differing temperatures along said article.

31. The method of claim 31 wherein said article is a semiconductor wafer.

32. The method of claim 31 wherein said step of adjusting said heating element arrangement (44) is accomplished by a microprocessor (14) that is in operative control of said heating element arrangement (44).

5

33. The method of claim 30 wherein said step of eliminating said differing temperatures is accomplished by said heating element arrangement (44) providing more heat to cooler areas of said article and less heat to warmer areas of said article.

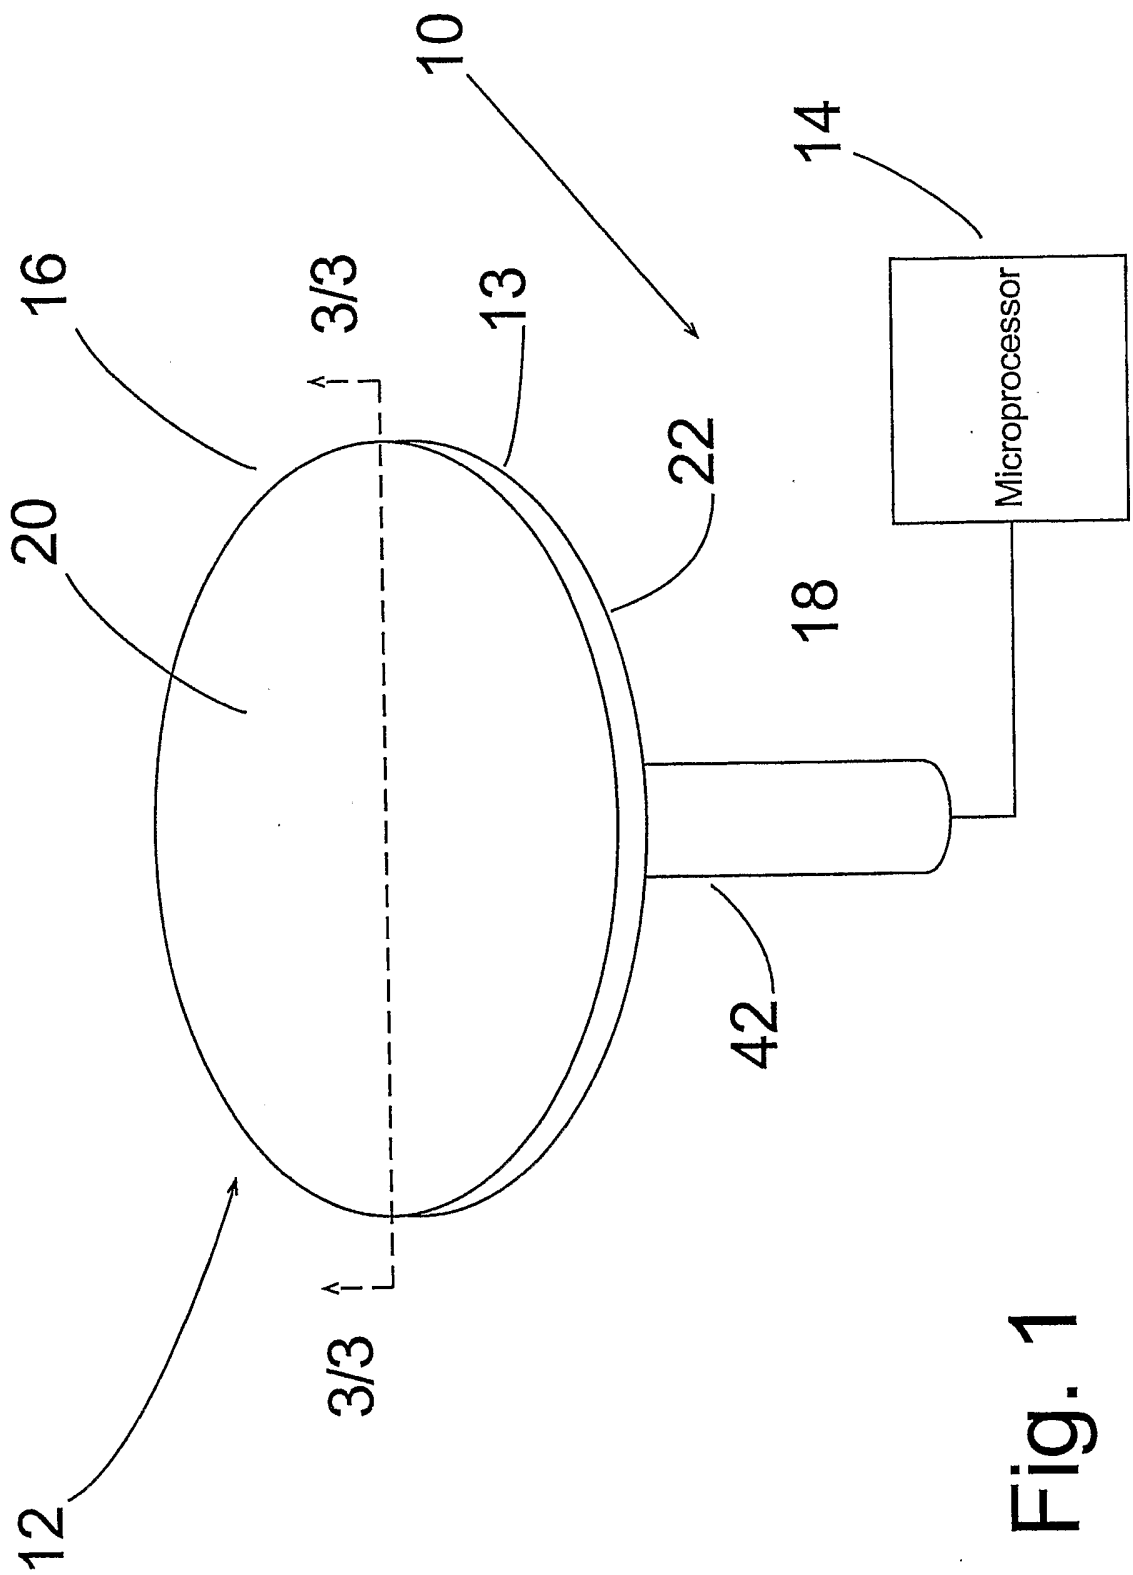

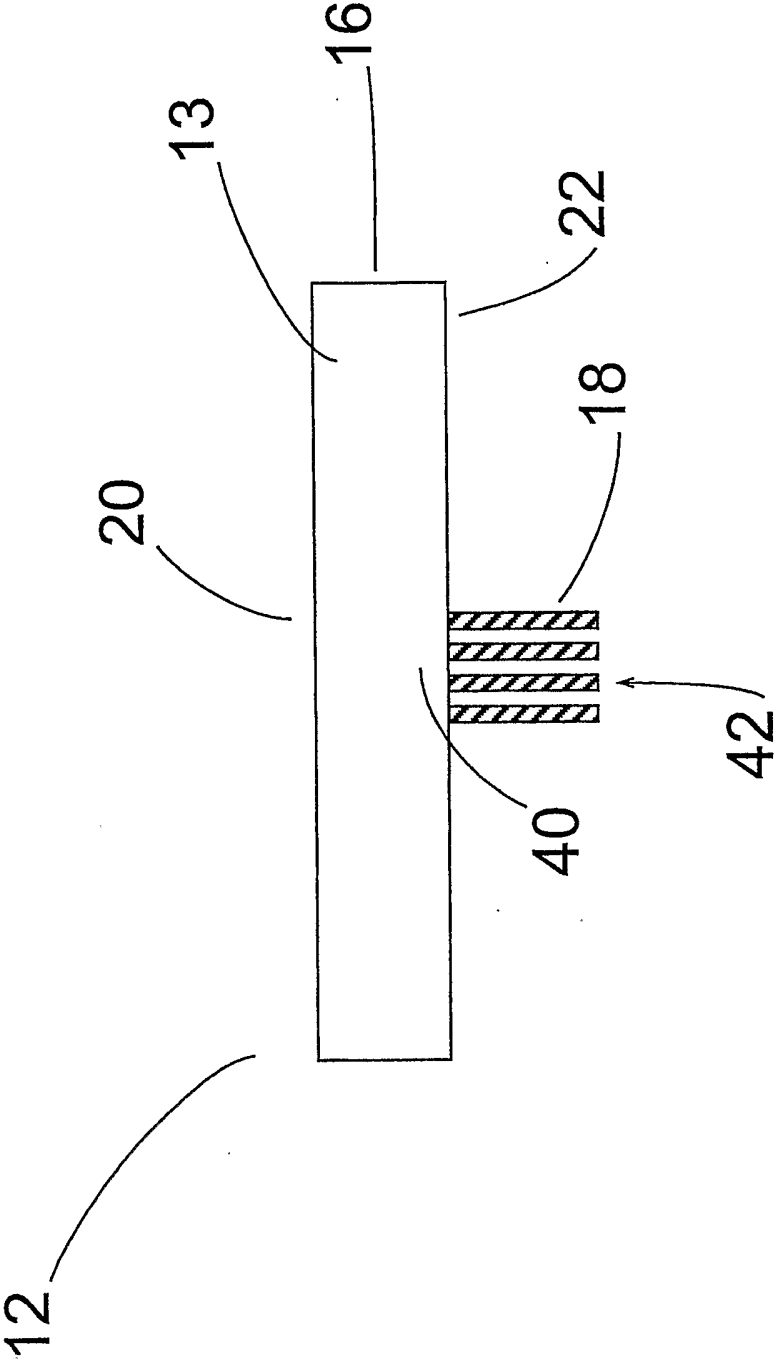


Fig. 2

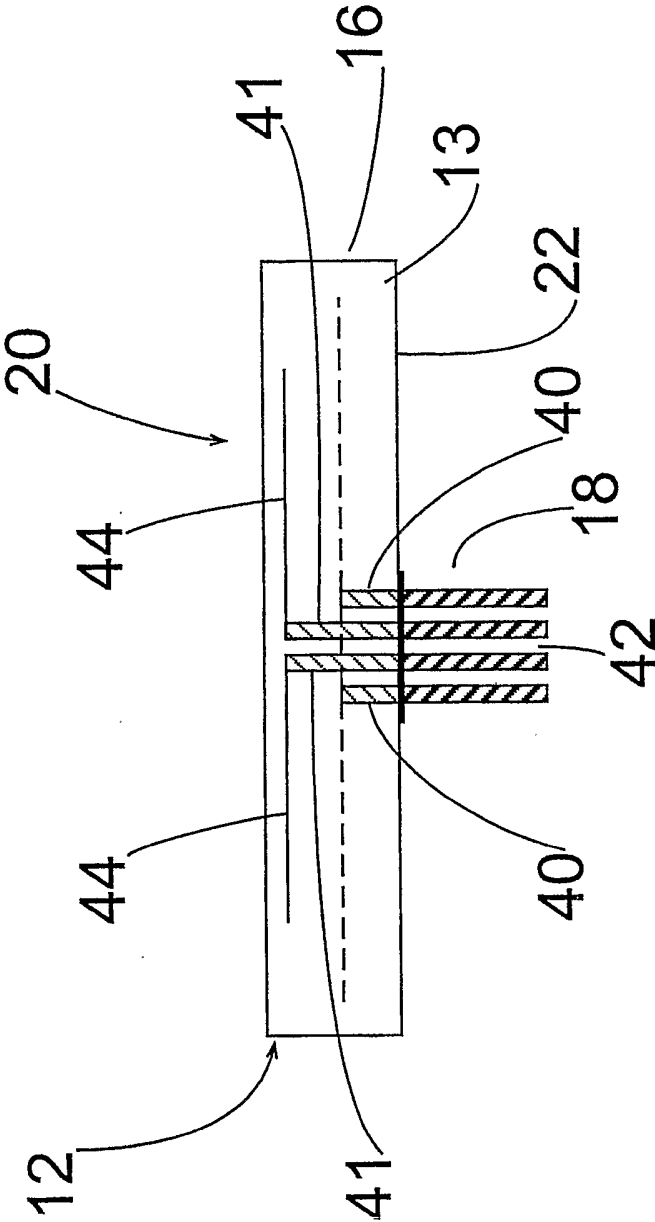


Fig. 3

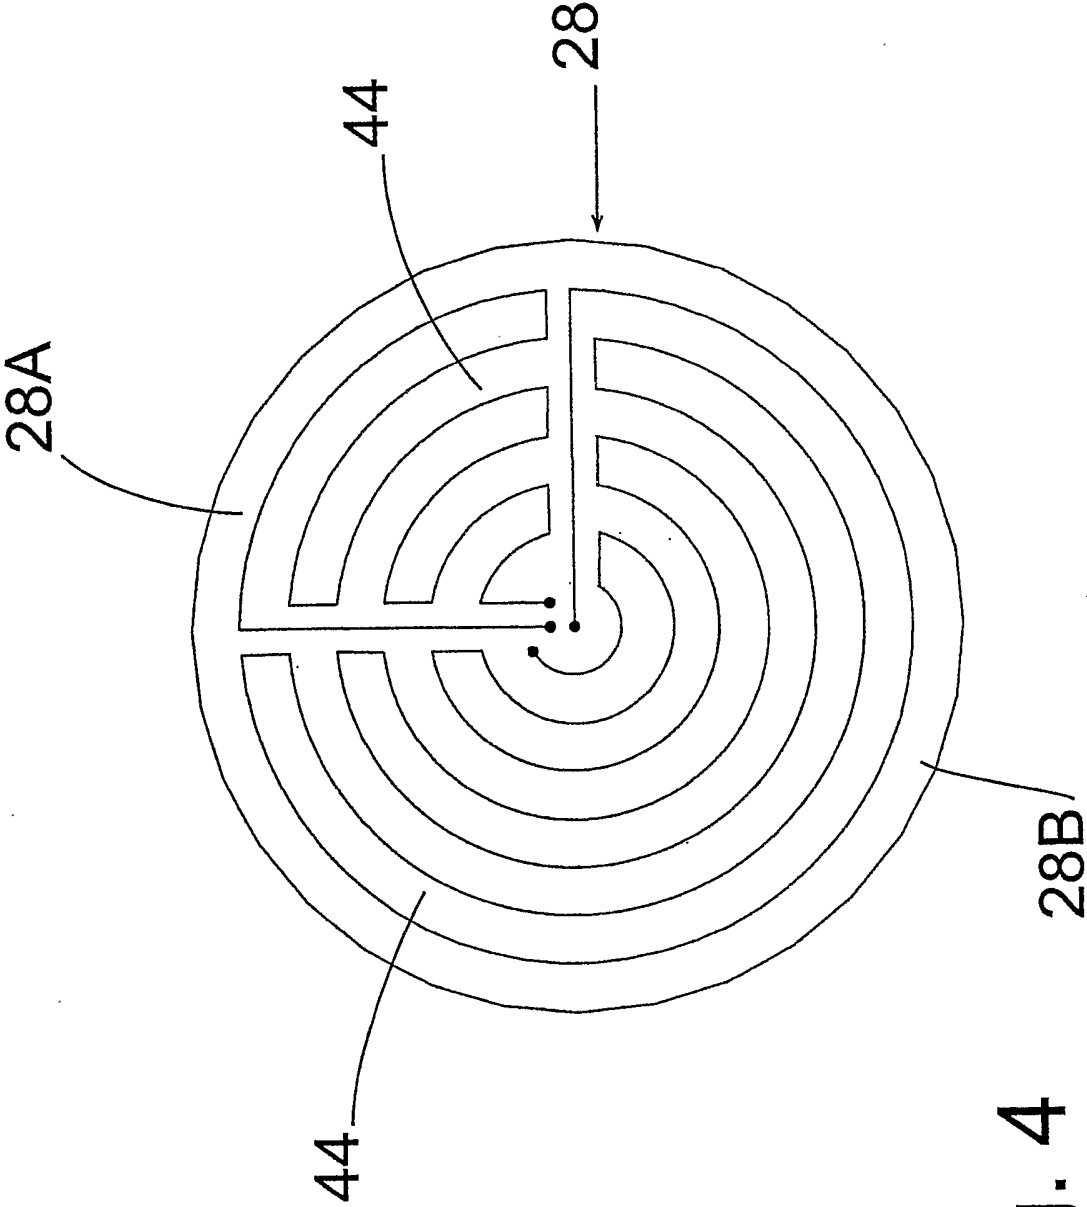


Fig. 4

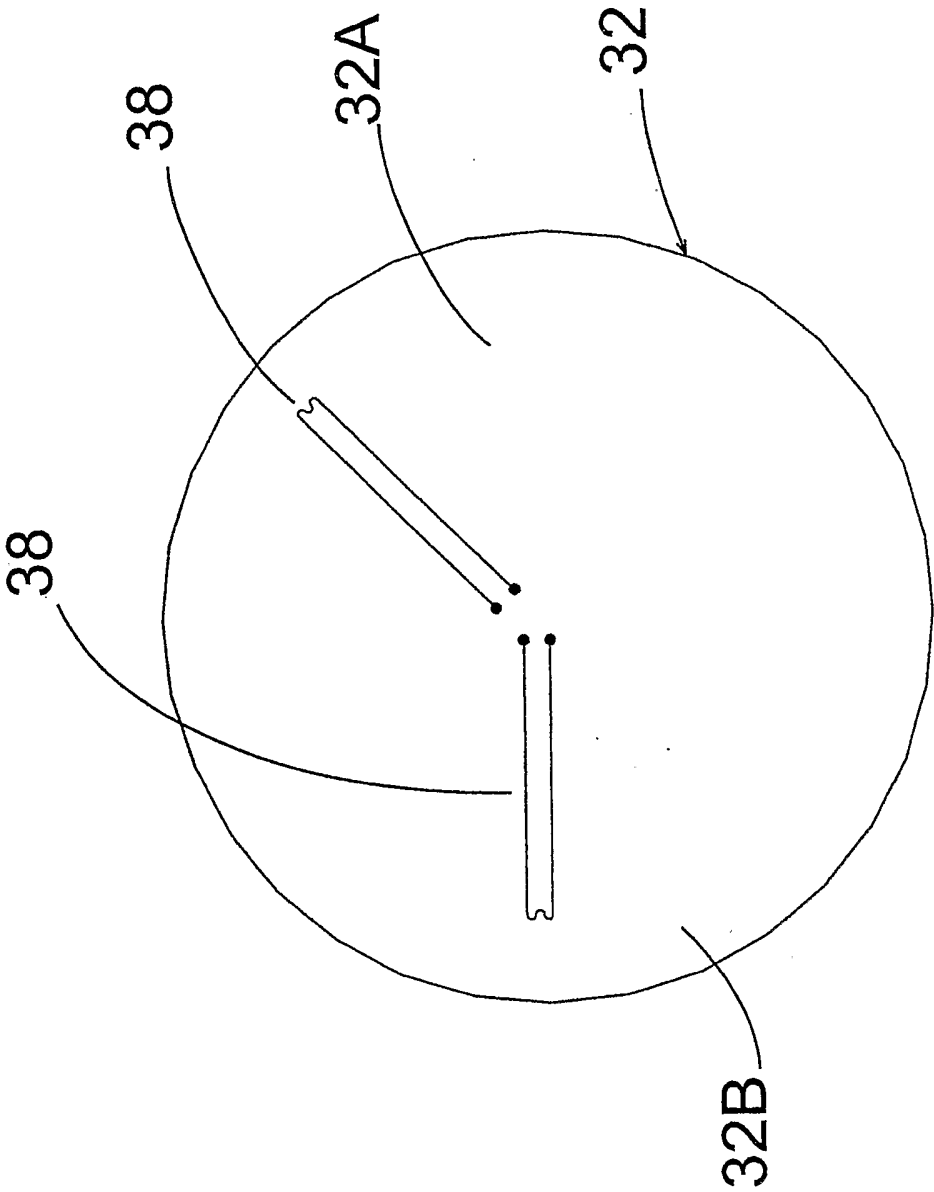


Fig. 5

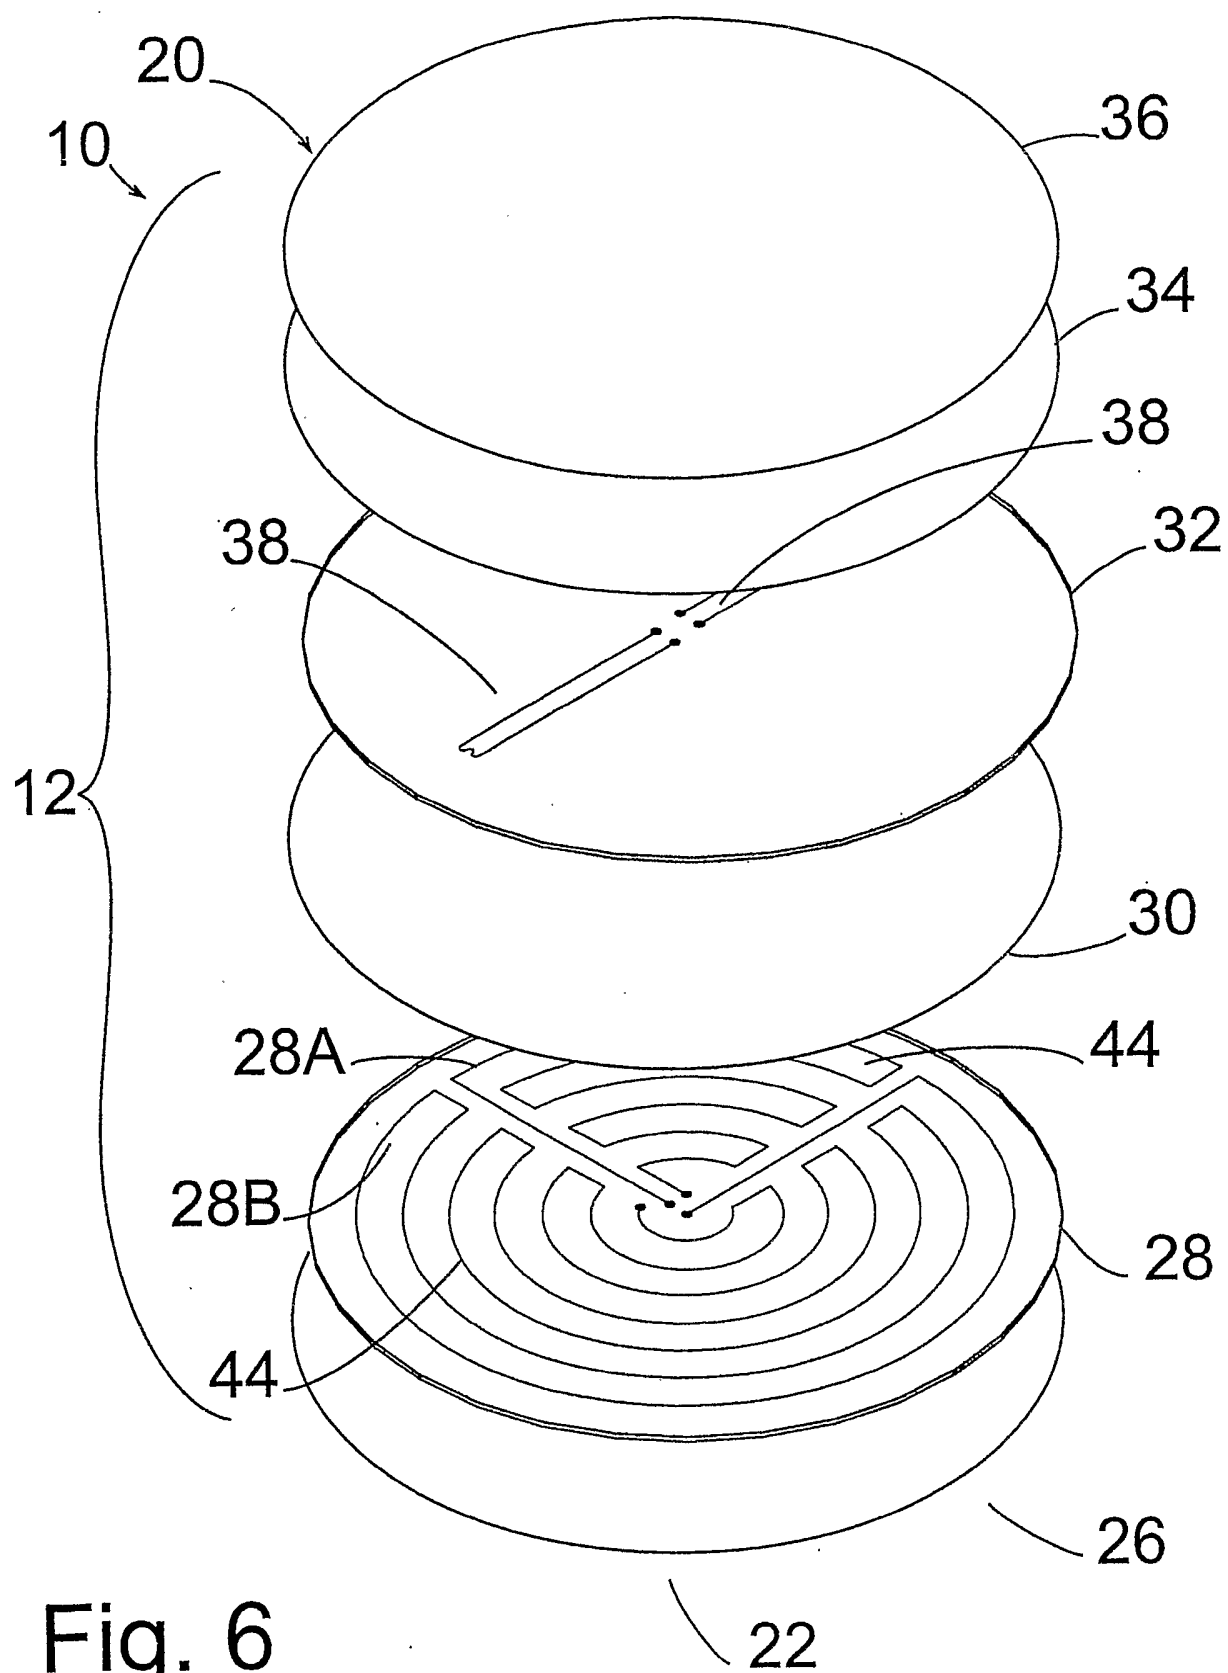


Fig. 6

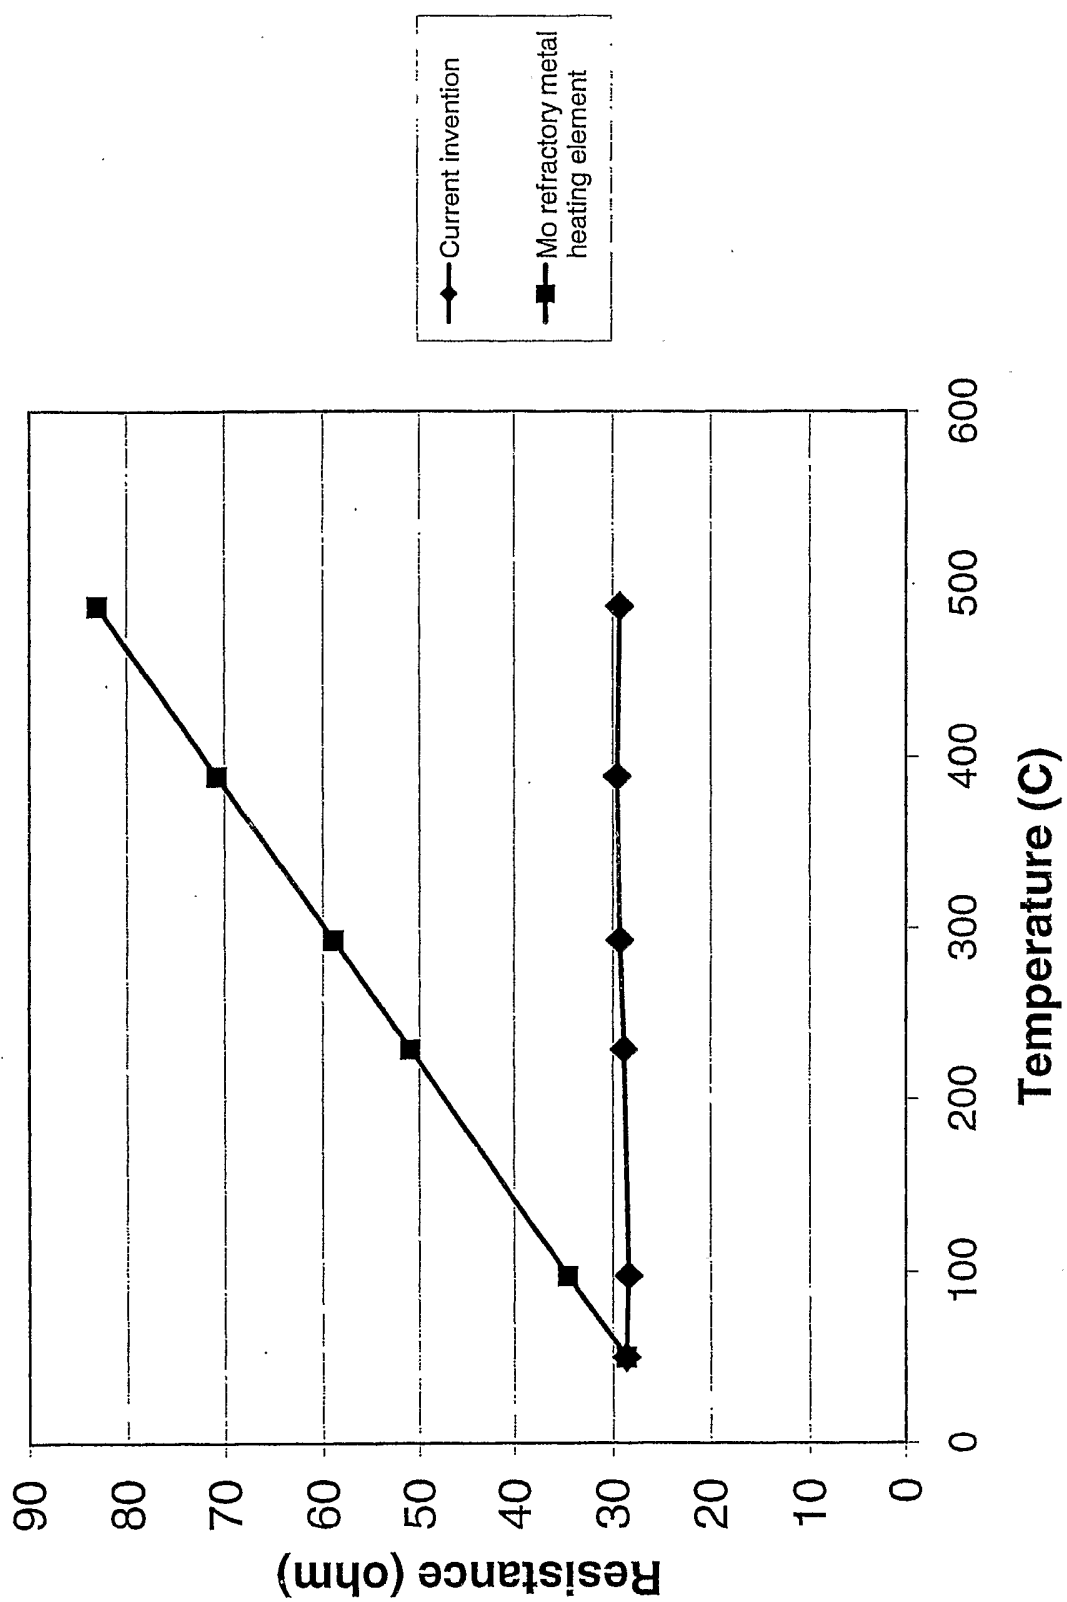


Fig. 7

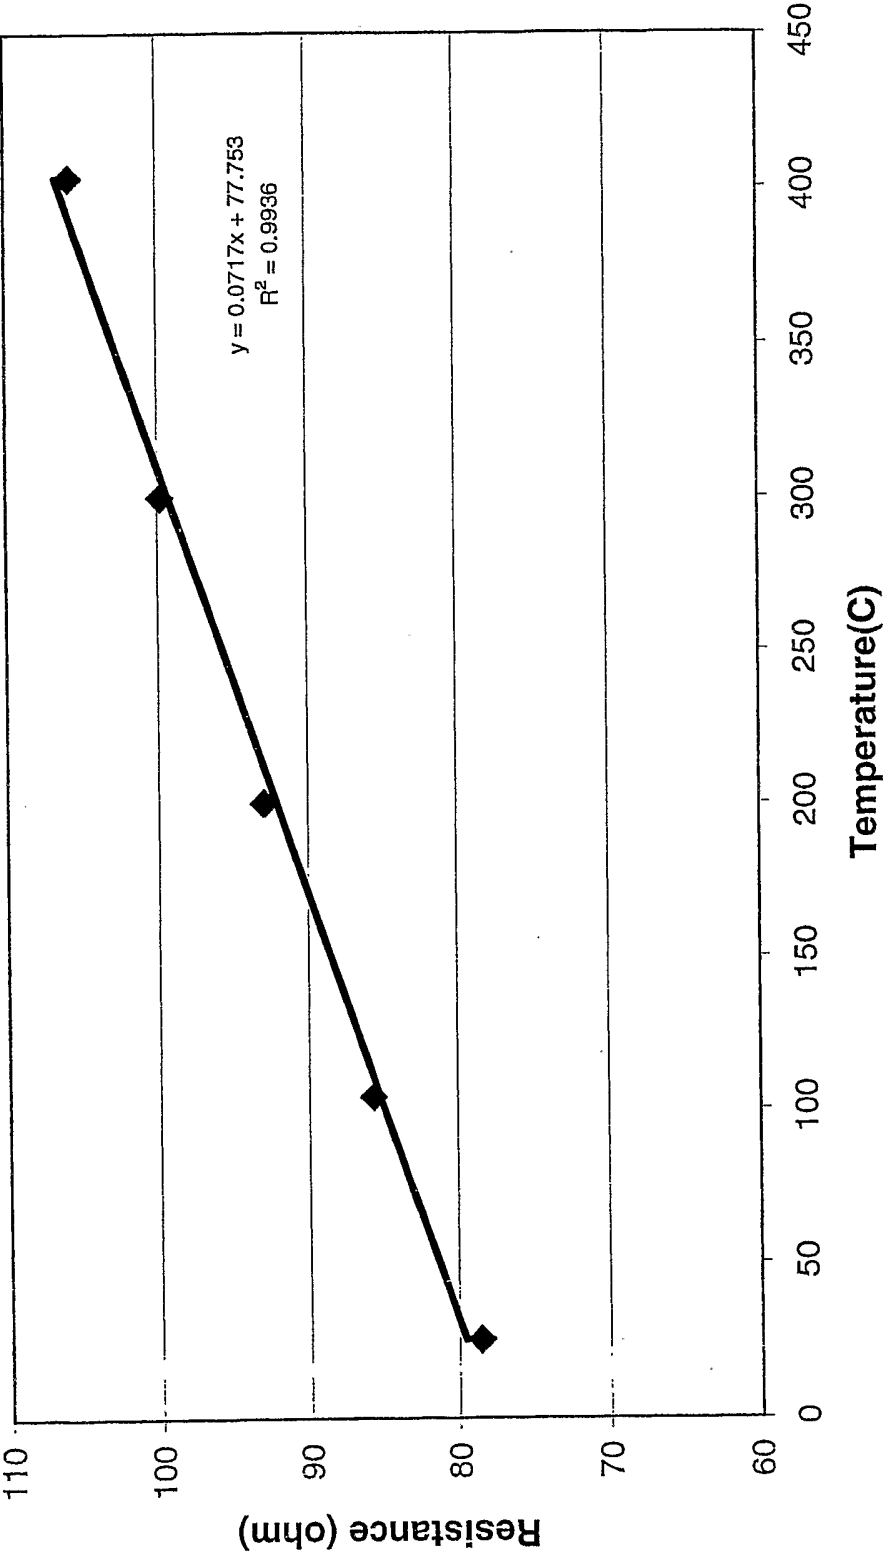


Fig. 8