



(22) Date de dépôt/Filing Date: 2005/07/18

(41) Mise à la disp. pub./Open to Public Insp.: 2006/01/29

(30) Priorité/Priority: 2004/07/29 (10/901,945) US

(51) Cl.Int./Int.Cl. *E05C 1/08* (2006.01)


(71) Demandeur/Applicant:
XU, XIANGUI X., CA

(72) Inventeur/Inventor:
XU, XIANGUI X., CA

(74) Agent: LONG, BRIAN M.


(54) Titre : DISPOSITIF DE VERROUILLAGE POUR ELEMENTS A FERMETURE COULISSANTS

(54) Title: LATCHING APPARATUS FOR SLIDING CLOSURE MEMBERS

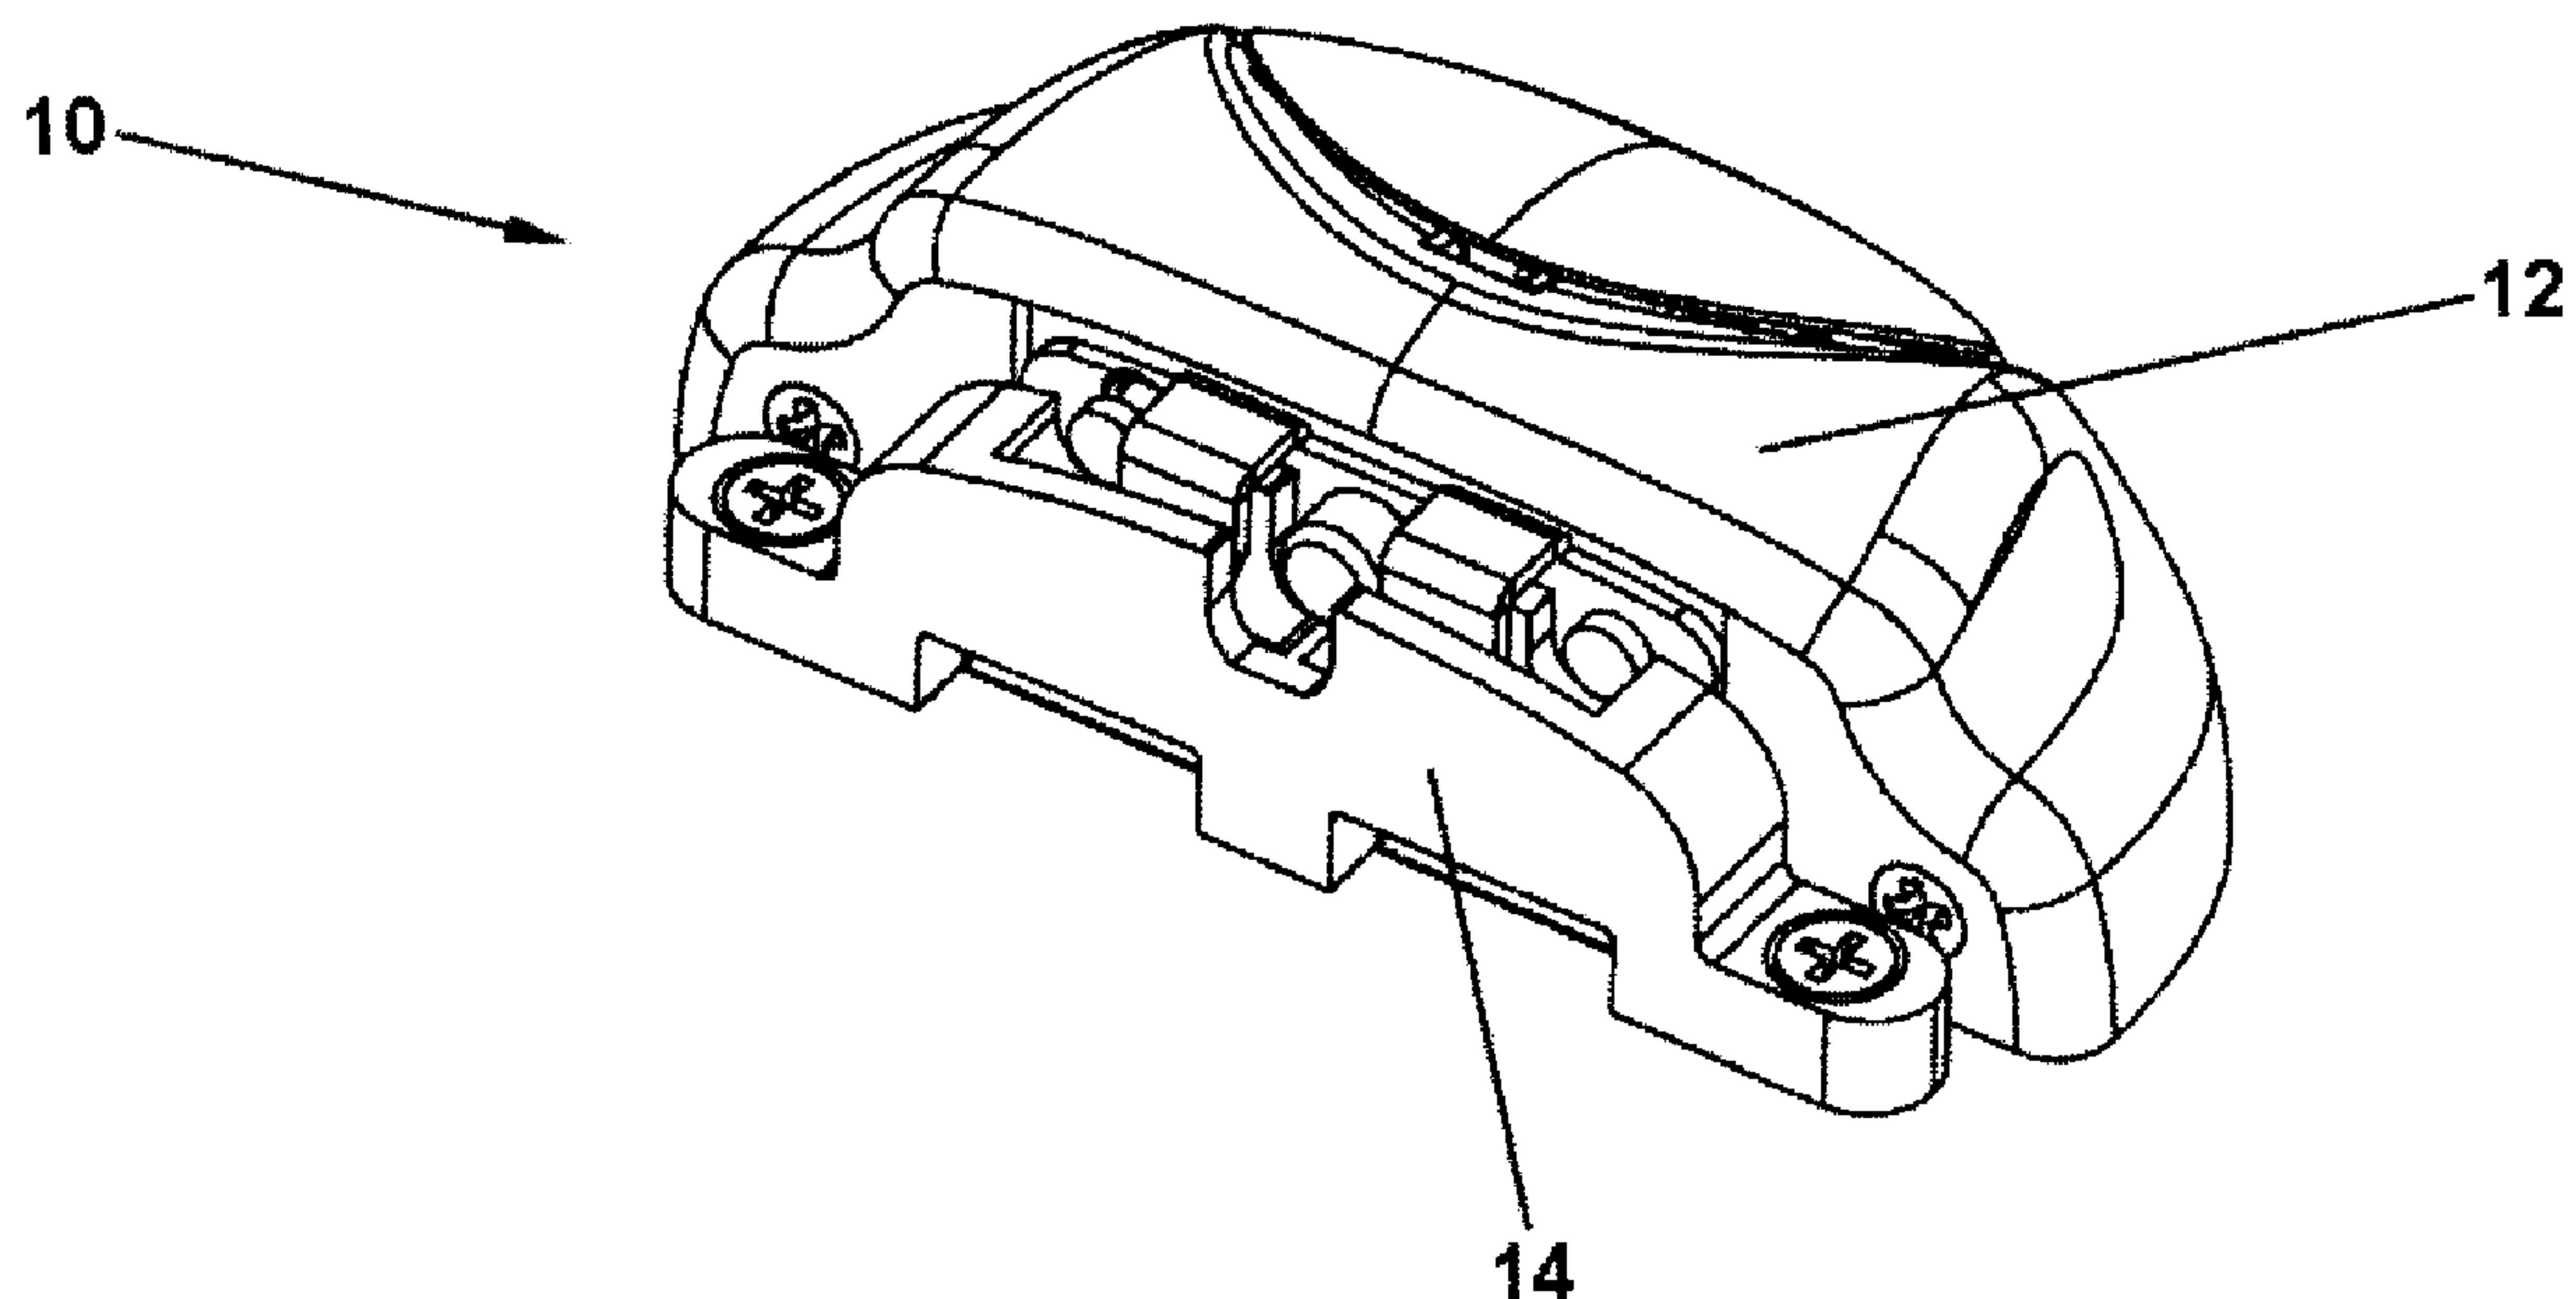

(57) **Abrégé/Abstract:**

A latching apparatus for sliding windows or doors, comprising a striker and a latch assembly. The latch assembly comprises a support, a spring biased latch member slideably retained on the support and movable between a latching position in which it engages the striker and a non-latching position, a spring biased retainer connected to the support and movable between a retaining position in which it retains the latch member in the non-latching position and a non-retaining position in which it releases the latch member to move to the latching position. The retainer includes an actuating portion that is externally engageable by the striker as the frames of the closure are slid closed to move the retainer to the non-retaining position. An actuator is connected to the latch member by for returning the latch member to the non-latching position thereby freeing the frames and the retainer.

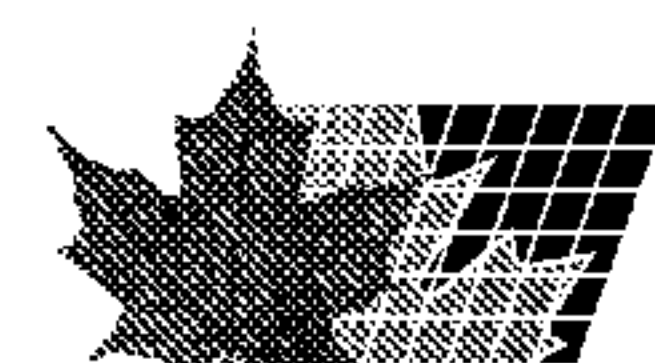

ABSTRACT

A latching apparatus for sliding windows or doors, comprising a striker and a latch assembly. The latch assembly comprises a support, a spring biased latch member slideably retained on the support and movable between a latching position in which it engages the striker and a non-latching position, a spring biased retainer connected to the support and movable between a retaining position in which it retains the latch member in the non-latching position and a non-retaining position in which it releases the latch member to move to the latching position. The retainer includes an actuating portion that is externally engageable by the striker as the frames of the closure are slid closed to move the retainer to the non-retaining position. An actuator is connected to the latch member by for returning the latch member to the non-latching position thereby freeing the frames and the retainer.

LATCHING APPARATUS FOR SLIDING CLOSURE MEMBERS

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention is generally related to latching devices for sliding closure members and, more particularly, to latching assemblies for sliding windows and doors. Although the invention is applicable to sliding closure members in general, including doors and windows, the invention will be described below primarily with reference to conventional sliding windows of extruded polyvinyl chloride (PVC) or aluminum frame construction.

[0003] 2. Description of the Prior Art

[0004] Sliding windows are commonly fitted with rotary cam style latching mechanisms mounted above or on the surface of the sash rails for latching the window. The latch commonly requires a rotary motion to actuate the mechanism. The rotary style actuator requires that part of the mechanism housing be visually exposed which can be aesthetically unpleasing, or that the rail be altered to allow the rotary cam to be inset into the top of the sash rail. In addition, rotary cam style latching mechanisms require that the user conscientiously remember to latch the window which could pose a security risk if the user forgets to latch the window.

[0005] Accordingly, it would be desirable to have a latching mechanism that secures the window automatically when the window is slid closed, and that is simple to install and requires virtually no alteration to the window frame so as to enable the latching mechanism to be used in conjunction with a variety of sliding window configurations. Furthermore, it would be desirable to have such latching mechanism include a visible

indicator which signals to the user when the window is unlatched, and/or when it is latched.

SUMMARY OF THE INVENTION

[0006] According to one aspect of the present invention there is provided a latching apparatus for a sliding closure member such as a sliding window or door having at least first and second frames, the apparatus comprising a strike member mountable to the first frame; and a latch assembly mountable to the second frame, the latch assembly comprising a support, a latch member slideably retained on the support and being movable between a latching position in which the latch member engages the strike member, and a non-latching position in which the latch member does not engage the strike member, the latch member being spring biased toward the latching position, a retainer member connected to the support and being movable between a retaining position in which the retainer member blocks the latch member to retain the latch member in the non-latching position and a non-retaining position in which the retainer member does not block the latch member thereby releasing the latch member to move to the latching position, the retainer member being spring biased toward the retaining position, and wherein the retainer member includes an actuating portion that is externally engageable by the strike member to enable the retainer member to be moved to the non-retaining position by the strike member as the first and second frames are brought into close proximity by a user in the act of closing the closure member, and an actuator connected to the latch member by which the user can move the latch member to the non-latching position thereby freeing the second frame and the retainer member to enable the retainer member to move to the retaining position upon separation of the first frame from the second frame by the user.

[0007] In another aspect of the present invention, the latch member in the latching position blocks the retainer member in the non-retaining position to maintain the retainer member in the non-retaining position, and wherein the latch member in the non-latching

position does not blocks the retainer member thereby releasing the retainer member to move to the retaining position.

[0008] In another aspect of the present invention, the support comprises a base member, a latch member housing connected to the base member, and a latch assembly housing connected to the base member. In some aspects, the latch member is slideably retained upon the base member by the latch member housing, the latch assembly housing includes a front wall facing the strike member, and the retainer member is mounted for sliding movement on the front wall. In some embodiments, the direction of movement of the retainer member is generally perpendicular to the direction of movement of the latch member

[0009] In another aspect of the present invention, the strike member includes a first receiving portion able to receive a part of the latch member when the latch member is in the latching configuration, thereby enabling the first and second frames to be latched. In some embodiments, the first receiving portion comprises at least one slot defined in the strike member.

[0010] In another aspect of the present invention, the retainer member further includes a hook portion and the strike member further includes a second receiving portion that is able to receive the hook portion and to be engaged thereby when the strike member contacts the retainer member, thereby reducing the chance of the strike member and the latch member being forced apart.

[0011] In another aspect of the present invention, the latch member is spring biased by compression springs that are longitudinally aligned with the latch member.

[0012] In other aspects of the present invention, the latching apparatus further includes visual indicators to alert a user when the closure member is not latched, and preferably, to also alert the user when the closure member is latched.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0013]** An example of the present invention will now be described with reference to the accompanying drawings, in which:
- [0014]** FIG. 1 is perspective view of an embodiment of the present invention showing a latch assembly in conjunction with a striker;
- [0015]** FIGS. 2a and 2b are perspective views of the embodiment in FIG. 1 shown mounted on respective closure frame members;
- [0016]** FIG. 3 is an exploded front perspective view of the latch assembly in FIG. 1;
- [0017]** FIG. 4 is an exploded front perspective view of a base plate, latch bar and latch bar housing;
- [0018]** FIG. 5 is a bottom perspective view of a latch bar in FIG. 4;
- [0019]** FIG. 6 is a front elevation view of the latch bar housing in FIG. 4;
- [0020]** FIG. 7 is a rear elevation view of the latch bar housing in FIG. 4;
- [0021]** FIG. 8 is a bottom perspective view of the latch bar housing in FIG. 4;
- [0022]** FIG. 9 is a top perspective view of a partially assembled latch assembly showing the relationship of the base plate, latch bar, latch bar housing, linkage and actuator of FIG. 3;
- [0023]** FIG. 10 is a bottom perspective view of the latch bar and latch bar housing;
- [0024]** FIG. 11 is a bottom plan view of the latch bar and latch bar housing of FIG. 10;
- [0025]** FIG. 12 is a frontal perspective view of the latch assembly housing of FIG. 3;
- [0026]** FIG. 13 is a rear perspective view of the latch assembly housing of FIG. 3;
- [0027]** FIG. 14 is a bottom plan view of the latch assembly housing of FIG. 3;
- [0028]**
- [0029]** FIG. 15 is a rear plan view of the block plate of FIG. 3;
- [0030]** FIG. 16 is a front perspective view of the block plate of FIG. 3;
- [0031]** FIG. 17 is a bottom perspective view of the latch assembly housing with the block plate mounted therein;
- [0032]** FIG. 18 is a bottom plan view of the latch assembly housing and the block plate of FIG. 17;

- [0033]** FIG. 19 is a front elevation view of the latch assembly housing and the block plate of FIG. 17 in the retaining position;
- [0034]** FIG. 20 is a front elevation view of the latch assembly housing and the block plate of FIG. 17 in the non-retaining position;
- [0035]** FIG. 21 is a perspective view of the striker of FIG. 1;
- [0036]** FIG. 22 is a side cross section view of the latch assembly along line A-A as shown in Fig.24 in a latched configuration;
- [0037]** FIG. 23 is a side cross section view of the latch assembly of FIG. 22 in an unlatched configuration;
- [0038]** FIG. 24 is a rear plan view of the latch assembly of FIG. 1 in a latched configuration; and
- [0039]** FIG. 25 is a rear perspective view of the latch assembly of FIG. 1 in an unlatched configuration.

DETAILED DESCRIPTION

[0040] Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings wherein like numerals indicate the same elements throughout the views. The invention disclosed herein may be practiced in embodiments in many different forms and it is understood that the present disclosure is an exemplification of the principles of the invention and does not limit the invention to the illustrated embodiments. Therefore, specific details disclosed herein are not to be interpreted as limiting, but rather as a basis for the claims and as a representative basis for teaching one skilled in the art to employ the present invention.

[0041] Referring to FIGS. 1 & 2, there is shown a preferred embodiment of the present invention. A latch device is generally indicated by reference numeral **10** and comprises a latch assembly **12** and a strike member such as striker **14**. In an operable configuration of the latch device, the striker **14** is mounted on one frame member **15** and the latch assembly **12** is mounted on another frame member **13** of a sliding closure system, such a sliding window or sliding door system, in such a way that when the

closure is closed, the striker **14** is brought into close proximity with the latch assembly **12** along a plane of motion that is generally perpendicular to the plane of the surface on which the latch assembly is mounted (see FIGS. 2a & 2b). While the closure (i.e. window) is open, the striker and latch assembly are apart, but as the closure is slid into a closed position, the striker actuates a latching mechanism in the latch assembly that engages the striker thereby securing the closure into a closed position. Regarding terms of spatial orientation and reference used herein, the latch assembly **12** in FIGS. 1 & 2 should be regarded as being oriented in relation to a horizontal plane or surface. Accordingly, terms such as 'up', 'upper' and 'top' refer to a direction or position away from the plane or surface; terms such as 'side' or 'lateral' pertain to a direction or position away from a midline of the latch assembly; and terms such as 'down', 'lower' or 'under' refer to a direction or position toward the surface. Terms such as 'forward' and 'fore' refer to a direction or position towards the part of the latch assembly that faces the striker **14** when the device is in the latched position. Such terms of orientation are used merely for convenience herein, and it is to be understood that the device of the present invention may be oriented in many planes. For example, the device may be mounted in a vertical plane on a horizontally sliding window frame.

[0042] FIG. 3 illustrates an exploded view of latch assembly **12**, which generally comprises a base member such as base plate **20**, a latch member such as latch bar **30** retained for sliding movement on the base plate **20** by a latch bar housing **40**, an actuator **50** mounted to the latch bar housing **40** and to the latch bar **30** by means of a linkage **60**, a latch assembly housing **70**, and a retainer member or block plate **80** mounted for sliding movement on the latch assembly housing **70**. Accordingly, the base plate, latch bar housing and latch assembly housing comprise a support upon which the latch bar is slideably retained and to which the block plate is moveably mounted.

[0043] As illustrated in FIG. 4, base plate **20** includes two parallel guide ridges **210**, holes **215**, and holes **220** for mounting the latch bar housing, latch bar and base plate to a

window frame. Flanges **230** are provided on the front surface of the base plate, each having a hole **235**.

[0044] Referring to FIGS. 4 & 5, latch bar **30** includes a main portion **310** having lugs **315** for connecting to linkage **60**, and projections **320** extending in a forward direction from the main portion **310** and defining a central slot **325** in the latch bar. The projections **320** include lateral extensions **330** that define shoulders **335** in relation to the main portion **310**. Preferably, the latch bar **30** is sized to fit within the latch assembly housing **70** so that the latch bar is concealed therein for aesthetics. On lower side **340** on the latch bar **30** are provided parallel grooves **345** that are complimentary in position to ridges **210** on the base plate, but are slightly shallower than the height of said ridges such that the ridges provide the only means of contact between the latch bar **30** and the base plate **20** thereby reducing the amount of sliding friction between the latch bar and base plate. The latch bar **30** is retained on the base plate for sliding movement in relation thereto and is retained in place by the latch bar housing **40** (as shown in FIG. 9). The ridges **210** on the base plate cooperate with the grooves **345** on the latch bar to guide the movement of the latch bar.

[0045] Referring to FIGS. 4, and 6-8, the latch bar housing **40** is shown to include a top surface **405**, an inside surface **407**, a front surface **409**, a rear surface **411** and a centrally located recessed rear surface portion **413**. The recessed portion **413** is dimensioned to expose the lugs **315** of the latch bar **30** when the latch bar housing **40** is positioned over the latch bar **30** upon assembly of the latch assembly **12**, and to enable the latch bar **30** to slide forward into a latched configuration of the latch assembly (see FIG. 9).

[0046] Located centrally on the top surface **405** of the latch bar housing and adjacent the front surface **409** are provided lugs **415** by which the actuator **50** is connected for articulated movement in relation to the latch bar housing by means of a rivet **450**. Located laterally on the latch bar housing are countersunk mounting holes **417**, which line up with holes **220** on the base plate **20** and are for mounting the latch bar housing

and the base plate to the window frame by means of screws **418**. Also included are holes **419** which line up with holes **215** on the base plate **20** and are for assembling the latch bar housing, latch bar and base plate by means of rivets **421**.

[0047] Referring to FIGS. **6 - 11** slots **420** are defined in the front surface **409** of the latch bar housing on each side of a central tab **424**. The slots **420** are slightly wider than the projections **320** of the latch bar so that the projections can be received within the slots **420**, and the central tab **424** is slightly narrower than the central slot **325** of the latch bar so that the central tab **424** can be received in the central slot **325**. Accordingly, the slots **420** and the central tab **424** of the latch bar housing serve to retain and guide the latch bar **30** during movement of the latch bar between a latched and unlatched configuration. On the inside surface **407** of the latch bar housing are provided semi-cylindrical channels **428**, each for receiving compression springs **432** in the assembled latch assembly so that the compression springs are longitudinally aligned with the latch bar. Each channel includes a terminal wall **434** against which an end of the compression spring abuts.

[0048] In FIGS. **10 & 11**, the latch bar **30** and latch bar housing **40** are shown from the bottom showing their cooperation. The latch bar and latch bar housing are dimensioned so that the latch bar is slideably received in the latch bar housing. In particular, the projections **320** on the latch bar fit into the slots **420** on the latch bar housing, the central tab **424** on the latch bar housing fits into the central slot **325** on the latch bar, and each lateral extension **330** of the projection **320** intrudes into the respective channel **428** of the latch bar housing such that each compression spring **432** within the channel **428** is able to abut the shoulder **335** of the latch bar, thereby urging the latch bar in a forward direction to provide the motive force to slide the latch bar into a latched position. Preferably, the length of each compression spring **432** is such that the compression spring is under compression forces throughout the range of motion of the latch bar **30** in the assembled device.

[0049] FIG. **9** shows a partially assembled latch assembly wherein the latch bar **30** is retained between the base plate **20** and latch bar housing **40** by means of rivets **421**, and

these are also mounted to a window frame **13** by means of screws **418**. The actuator **50** comprises a shaft **510** and a button **515** which is attached to one end of the shaft **510**. The end of the shaft remote from the button is connected to lugs **415** on the latch bar housing by rivet **450** that passes through the lugs and the shaft for articulated movement there between. With the base plate **20**, latch bar **30** and the latch bar housing **40** in place (so that the latch bar is sandwiched between the latch bar housing and base plate) the linkage **60** connects the actuator **50** to the lugs **315** on the latch bar by means of rivets **520** and **525**. The points of connection between the linkage **60** and shaft **510**, and the linkage **60** and lugs **315** are such that the rivet **520** is positioned forward relative to the rivet **525**, thereby enabling the linkage to transmit force applied by a user to the button **515** into rearward sliding motion of the latch bar, and to transmit forward force applied to the latch bar **30** by the compression springs **432** into upward movement of the button **515**.

[0050] Referring to FIGS. 12-20, there is shown the latch assembly housing **70** and the block plate **80**. The latch assembly housing **70** is generally hollow and is sized and shaped to encompass the mechanisms of the latch while providing an aesthetically pleasing exterior. The latch assembly housing **70** includes a generally oval aperture **710** having a slot **714**. Also included is a first visual indicator such as 'unlock' indicator **716** on portions of the latch assembly housing adjacent the slot **714** that are recessed inward from the rest of the latch assembly housing. The aperture **710** is shaped to be complimentary to the button **515** of the actuator **50** whereby the button **515** fits closely into the aperture **710**. The slot **714** provides clearance for the shaft **510** of the actuator **50**.

[0051] The latch assembly housing **70** also includes a front wall which is divided into side wall portions **724**, **726** and a central wall portion **728** by slots **730** and **732**. On each of the side wall portions (**724**, **726**) are provided countersunk mounting holes **740** which align with holes **235** on the base plate **20** for mounting the latch assembly housing to the base plate by screws **742**. The thickness of the central wall portion **728** is less than the side wall portions **724**, **726** such that a ledge **750** is defined at the juncture of the central wall with top wall **754**. The central wall portion **728** defines a central oval hole **760** and two side oval hole **762** and **764**. The lower side surfaces **770**, **772** of the central wall

portion **728** are raised in relation to the lower surface **775** of the latch assembly housing, thereby defining a tab **778** on the central wall portion. In the assembled latch assembly, the offset of the lower side surfaces **770,772** on the latch assembly housing provide clearance for the passage of the projections **320** of the latch bar **30** when it is moved into a latched configuration, wherein the tab **778** of the central wall portion **728** fits within the slot **325** of the latch bar.

[0052] Shown in FIGS. 15 & 16 is the block plate **80** having a hook portion such as hooks **810**, side tabs **814,816** that are offset from the plane of the block plate, a central threaded hole **820** and two side holes **822,824**. Each of the side tabs **814,816** includes a forward facing protuberance **818**. As shown in FIGS. 17-20, the side tabs **814,816** of the block plate **80** are received within the slots **730,732** of the latch assembly housing **70** for sliding movement therein, and each protuberance **818** abuts inside surface **739** of the front wall of the latch assembly housing thereby reducing the amount of sliding friction between the block plate **80** and the latch assembly housing **70**. The holes **820,822,824** on the block plate align with the oval holes **760,762,772** on the central wall portion **728** of the latch assembly housing. On the inside upper surface **736** of the latch assembly housing are provided spring clips **834** (FIGS. 17 & 18), one spring clip being adjacent side oval hole **762** and the other spring clip being adjacent later oval hole **764**. The block plate **80** is connected to the spring clips **834** by rivets **837** that pass through holes **822,824** and corresponding side oval holes **762,764** to connect with the spring clips. Each of the spring clips **834** is retained relative to the latch assembly housing **70** by protrusions **738**. Preferably, face **805** of the mounted block plate is flush with the side wall portions **724,726**. Accordingly, the block plate **80** is spring biased when mounted on the latch assembly housing **70** by means of the spring clips. The side oval holes **762,764** limit the travel of the block plate **80** and are accordingly sized to permit the block plate to travel between a retaining position in which the lower surface **840** of the block plate is almost flush with the lower surface **775** of the latch assembly housing (FIG. 19), and a non-retaining position in which the lower surface **840** of the block plate is flush with the lower side surfaces **770,772** of the central wall portion of the latch assembly housing (FIG. 20). The block plate **80** includes an actuating portion such as trigger screw **850**

mounted in the central threaded hole **820** of the block plate. The trigger screw cooperates with the striker when the window is closed (as will be explained shortly) to move the block plate **80** from the retaining position to the non-retaining position against the biasing force of the spring clips. It is important to note that the actuating portion of the block plate, such as the trigger screw **850**, is external to the latch assembly housing so that it is externally engageable by the striker **14**. By having the actuating portion externally engageable by the striker, the latch mechanism of the present invention can be readily mounted to many industry standard sliding window or door frames without necessitating modifications to the frame members.

[0053] FIG. 21 illustrates a preferred embodiment of the striker **14**. The striker is generally elongate having mounting flanges **905** at each end with a countersunk hole **907** through which the striker is secured to the window frame by screws. The striker includes a first receiving portion such as slots **914** defined in the lower surface **910**. The striker further includes a second receiving portion such as longitudinal channel **918** defined in the top surface **916**. The top surface further defines a central transverse notch **920**, and side transverse notches **922**, **923**. The central transverse notch **920** cooperates with the trigger screw **850** on the block plate **80** to move the block plate from the retaining position to the non-retaining position against the biasing force of the spring clips. The side transverse notches **922**, **923** provide clearance for the rivets **837**.

[0054] In FIGS. 22 & 24, the latch assembly **12** is shown in a latched configuration, and in FIGS. 23 & 25, it is shown in an unlatched configuration. In the unlatched configuration, the block plate **80** is in its retaining position whereby the lower surface **840** of the block plate is almost flush with the lower surface **775** of the latch assembly housing. In this position, the block plate **80** blocks the projections **320** on the latch bar **30** thereby retaining the latch bar in a non-latching position within the latch assembly housing against the biasing force of the compression springs **432**. Note that as a result of the linkage between the actuator **50**, the latch bar housing **40**, and the latch bar **30**, the button **515** is somewhat withdrawn into the oval aperture **710** of the latch assembly housing **70**.

[0055] As shown in FIGS. 1 & 2, when the window upon which the device is mounted is slid closed, the striker **14** engages the trigger screw **850** to displace the block plate **80** upward from the retaining position thereby freeing the latch bar **30**. As a result, the latch bar **30** is urged outward by the compression springs **432** into a latching position in which the projections **320** protrude from the latch assembly to slide into slots **914** on the striker thereby engaging the striker to latch the window frames together. The hooks **810** fit into the longitudinal channel **918** on the striker to prevent the striker being disengaged forced away from the grip of the latch bar. The movement of the latch bar is transmitted to the actuator **50** by the linkage **60** and causes the button **515** to be pushed outward so that it becomes generally flush with the latch assembly housing when the latch assembly is in the latched configuration. Referring to FIG. 24, when the button **515** is in this position, the unlock indicator **716** on the latch assembly housing **70** is obstructed from view and a second visual indicator such as 'lock' indicator **540** on the button **515** is visible, thereby providing a visible indication to a user as to the locked status of the window.

[0056] To disengage the latching mechanism so that the window frames to be slid apart, a user depresses the button **515** into the latch assembly housing **70** which, on account of the linkage **60**, causes the latch bar **30** to be withdrawn into the latch assembly housing against the biasing force of the compression springs. Once the latch bar is withdrawn from within the slots **914** of the striker, the window frames can be slid apart. As the projections **320** of the latch bar clear the lower surface **840** of the block plate **80**, and upon the window frames being slid apart by a user such that the striker **14** is disengaged from the trigger screw **850**, the biasing force of the spring clips **834** causes the block plate **80** to slide into the retaining position and thereby retain the latch bar within the housing when the user's depressing force is disengaged from the button **515**. An advantage to this configuration is that if a user depresses the button **515** to draw the latch bar into the latch assembly housing, but does not slide the window frames apart, then upon the user releasing the button, the latch bar will slide back into engagement with the striker to maintain the frames in a latched state. This reduces the chance of the

window frames being accidentally unlatched. On account of the linkage **60**, when the latch bar **30** is in the unlatched position, button **515** is partially withdrawn into the latch assembly housing **70**. Referring to FIG. 25, in this position, the unlock indicator **716** on the latch assembly housing **70** is visible, whereas the lock indicator **540** on the button **515** is obstructed from view, thereby providing a visible indication to a user as to the unlocked status of the window.

[0057] As will be apparent to those skilled in the art, various modifications and adaptations are possible in the practice of this invention without departing from the spirit or scope thereof. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

I CLAIM:

1. A latching apparatus for a closure comprising a first frame and a second frame, the latching apparatus comprising:
 - a strike member for mounting to the first frame; and
 - a latch assembly for mounting to the second frame, the latch assembly comprising:
 - a support;
 - a latch member slidably retained on the support and movable between a latching position in which the latch member engages the strike member, and a non-latching position in which the latch member does not engage the strike member, the first spring biasing the latch member toward the latching position;
 - a retainer member connected to the support and movable between a retaining position in which the retainer member blocks the latch member to retain the latch member in the non-latching position and a non-retaining position in which the retainer member does not block the latch member thereby releasing the latch member to move to the latching position, the second spring biasing the retainer member toward the retaining position, and wherein the retainer member includes an actuating portion that is externally engageable by the strike member for moving the retainer member to the non-retaining position as the first and second frames are brought into close proximity by a user in the act of closing the closure member; and
 - an actuator connected to the latch member by which the user can move the latch member to the non-latching position for freeing the second frame and the retainer member and enabling the retainer member to move to the retaining position upon separation of the first frame from the second frame by the user.
2. The apparatus as claimed in claim 1 wherein the latch member in the latching position blocks the retainer member in the non-retaining position and wherein the latch member in the non-latching position does not block the retainer member thereby allowing it to move to the retaining position.

3. The apparatus as claimed in claim 2 wherein the support comprises a base member, a latch member housing connected to the base member, and a latch assembly housing connected to the base member.
4. The apparatus as claimed in claim 3 wherein the latch member is slideably retained upon the base member by the latch member housing.
5. The apparatus as claimed in claim 4 wherein the latch assembly housing includes a front wall facing the strike member, and the retainer member is mounted for sliding movement on the front wall.
6. The apparatus as claimed in claim 5 wherein the direction of movement of the retainer member is generally perpendicular to the direction of movement of the latch member.
7. The apparatus as claimed in claim 6 wherein the base member includes an top surface facing the latch member and having at least one pair of parallel ridges aligned in the direction of movement of the latch member for reducing the sliding friction between the latch member and base member.
8. The apparatus as claimed in claim 7 wherein the latch member includes a bottom surface facing the base member and defining corresponding channels to said ridges, the channels being of shallower depth than the height of the ridges for guiding the movement of the latch member and reducing the sliding friction between the latch member and base member.
9. The apparatus as claimed in claim 5 wherein the strike member includes a first receiving portion for receiving a part of the latch member when the latch member is in the latching position, thereby latching the first and second frames.

10. The apparatus as claimed in claim 9 wherein the first receiving portion comprises at least one slot defined in the strike member.
11. The apparatus as claimed in claim 9 wherein the retainer member further includes a hook portion and the strike member further includes a second receiving portion for receiving the hook portion and being engaged thereby as the strike member contacts the retainer member, thereby reducing the chance of the strike member and latch member being forced apart.
12. The apparatus as claimed in claim 11 wherein the latch member is spring biased by compression springs that are longitudinally aligned with the latch member.
13. The apparatus as claimed in claim 12 wherein the actuator is further connected to the latch bar housing so that movement of the latch bar translates to movement of the actuator.
14. The apparatus as claimed in claim 13 further including a first visual indicator on the latch assembly housing that is obstructed from view by the actuator when the latch bar is in the latching position, and that is visible when the latch member is in the non-latching position, thereby alerting the user when the closure member is not latched.
15. The apparatus as claimed in claim 14 further including a second visual indicator on the actuator that is obstructed from view by the latch assembly housing when the latch bar is in the non-latching position, and that is visible when the latch member is in the latching position, thereby confirming the latched status of the closure member to the user.

Claim 16: A latching apparatus for a closure comprising a first frame and a second frame, the latching apparatus comprising:

a strike member for mounting to the first frame; and

a latch assembly for mounting to the second frame, the latch assembly comprising:

a support;

a latch member slidably retained on the support and movable between a latching position in which the latch member engages the strike member, and a non-latching position in which the latch member does not engage the strike member, a first spring biasing the latch member toward the latching position;

a retainer member connected to the support and movable between a retaining position in which the retainer member blocks the latch member to retain the latch member in the non-latching position and a non-retaining position in which the retainer member does not block the latch member thereby releasing the latch member to move to the latching position, a second spring biasing the retainer member toward the retaining position, the retainer member includes an actuating portion that is externally engageable by the strike member for moving the retainer member to the non-retaining position as the first and second frames are brought into close proximity by a user in the act of closing the closure member; and

an actuator movable into a first position, in which the actuator moves the latch member to the non-latching position for freeing the second frame and the retainer member, and into a second position for enabling the retainer member to move to the

retaining position upon separation of the first frame from the second frame by the user;

the latch assembly comprising a latch assembly housing and the actuator being substantially flush with the latch assembly housing in the first position of the actuator and recessed in the latch assembly housing in the second position of the actuator.

Claim 17: The latching apparatus as claimed in claim 16, wherein the support comprises a base member, a latch member housing connected to the base member, and a latch assembly housing connected to the base member.

Claim 18: The latching apparatus as claimed in claim 17, wherein the latch assembly housing includes a front wall facing the strike member, and the retainer member is mounted for sliding movement on the front wall.

Claim 19: The latching apparatus as claimed in claim 18, wherein the front wall has a surface and a recessed portion in the surface, and the retainer member is mounted for sliding movement within the recessed portion on the front wall, whereby the retainer member is flush with the surface of the front wall.

Claim 20: In combination, a closure for an opening, the closure comprising a first and second frames, the first frame being moveable relative to the second frame between open and closed positions, the first and second frames having first and second portions, respectively, which, on movement of the first frame into the closed position, are flush with one another, and a latching apparatus for releaseably retaining the first frame in the closed position, the latching apparatus comprising:

a strike member for mounting on the first portion of the first frame; and

a latch assembly for mounting to the second portion of the second frame, the latch assembly

comprising:

a latch member movable between a latching position in which the latch member engages the strike member, and a non-latching position in which the latch member does not engage the strike member;

a first spring biasing the latch member toward the latching position;

a retainer member movable between a retaining position, in which the retainer member blocks the latch member to retain the latch member in the non-latching position, and a non-retaining position, in which the retainer member does not block the latch member, thereby releasing the latch member to move to the latching position;

a second spring biasing the retainer member toward the retaining position;

the retainer member including an actuating portion that is externally engageable by the strike member for moving the retainer member to the non-retaining position as the first and second frames are brought into close proximity by a user on movement of the first frame into its closed position; and

an actuator connected to the latch member by which the user can move the latch member to the non-latching position for freeing the second frame and the retainer member and enabling the retainer member to move to the retaining position upon separation of the first frame from the second frame by the user.

1/7

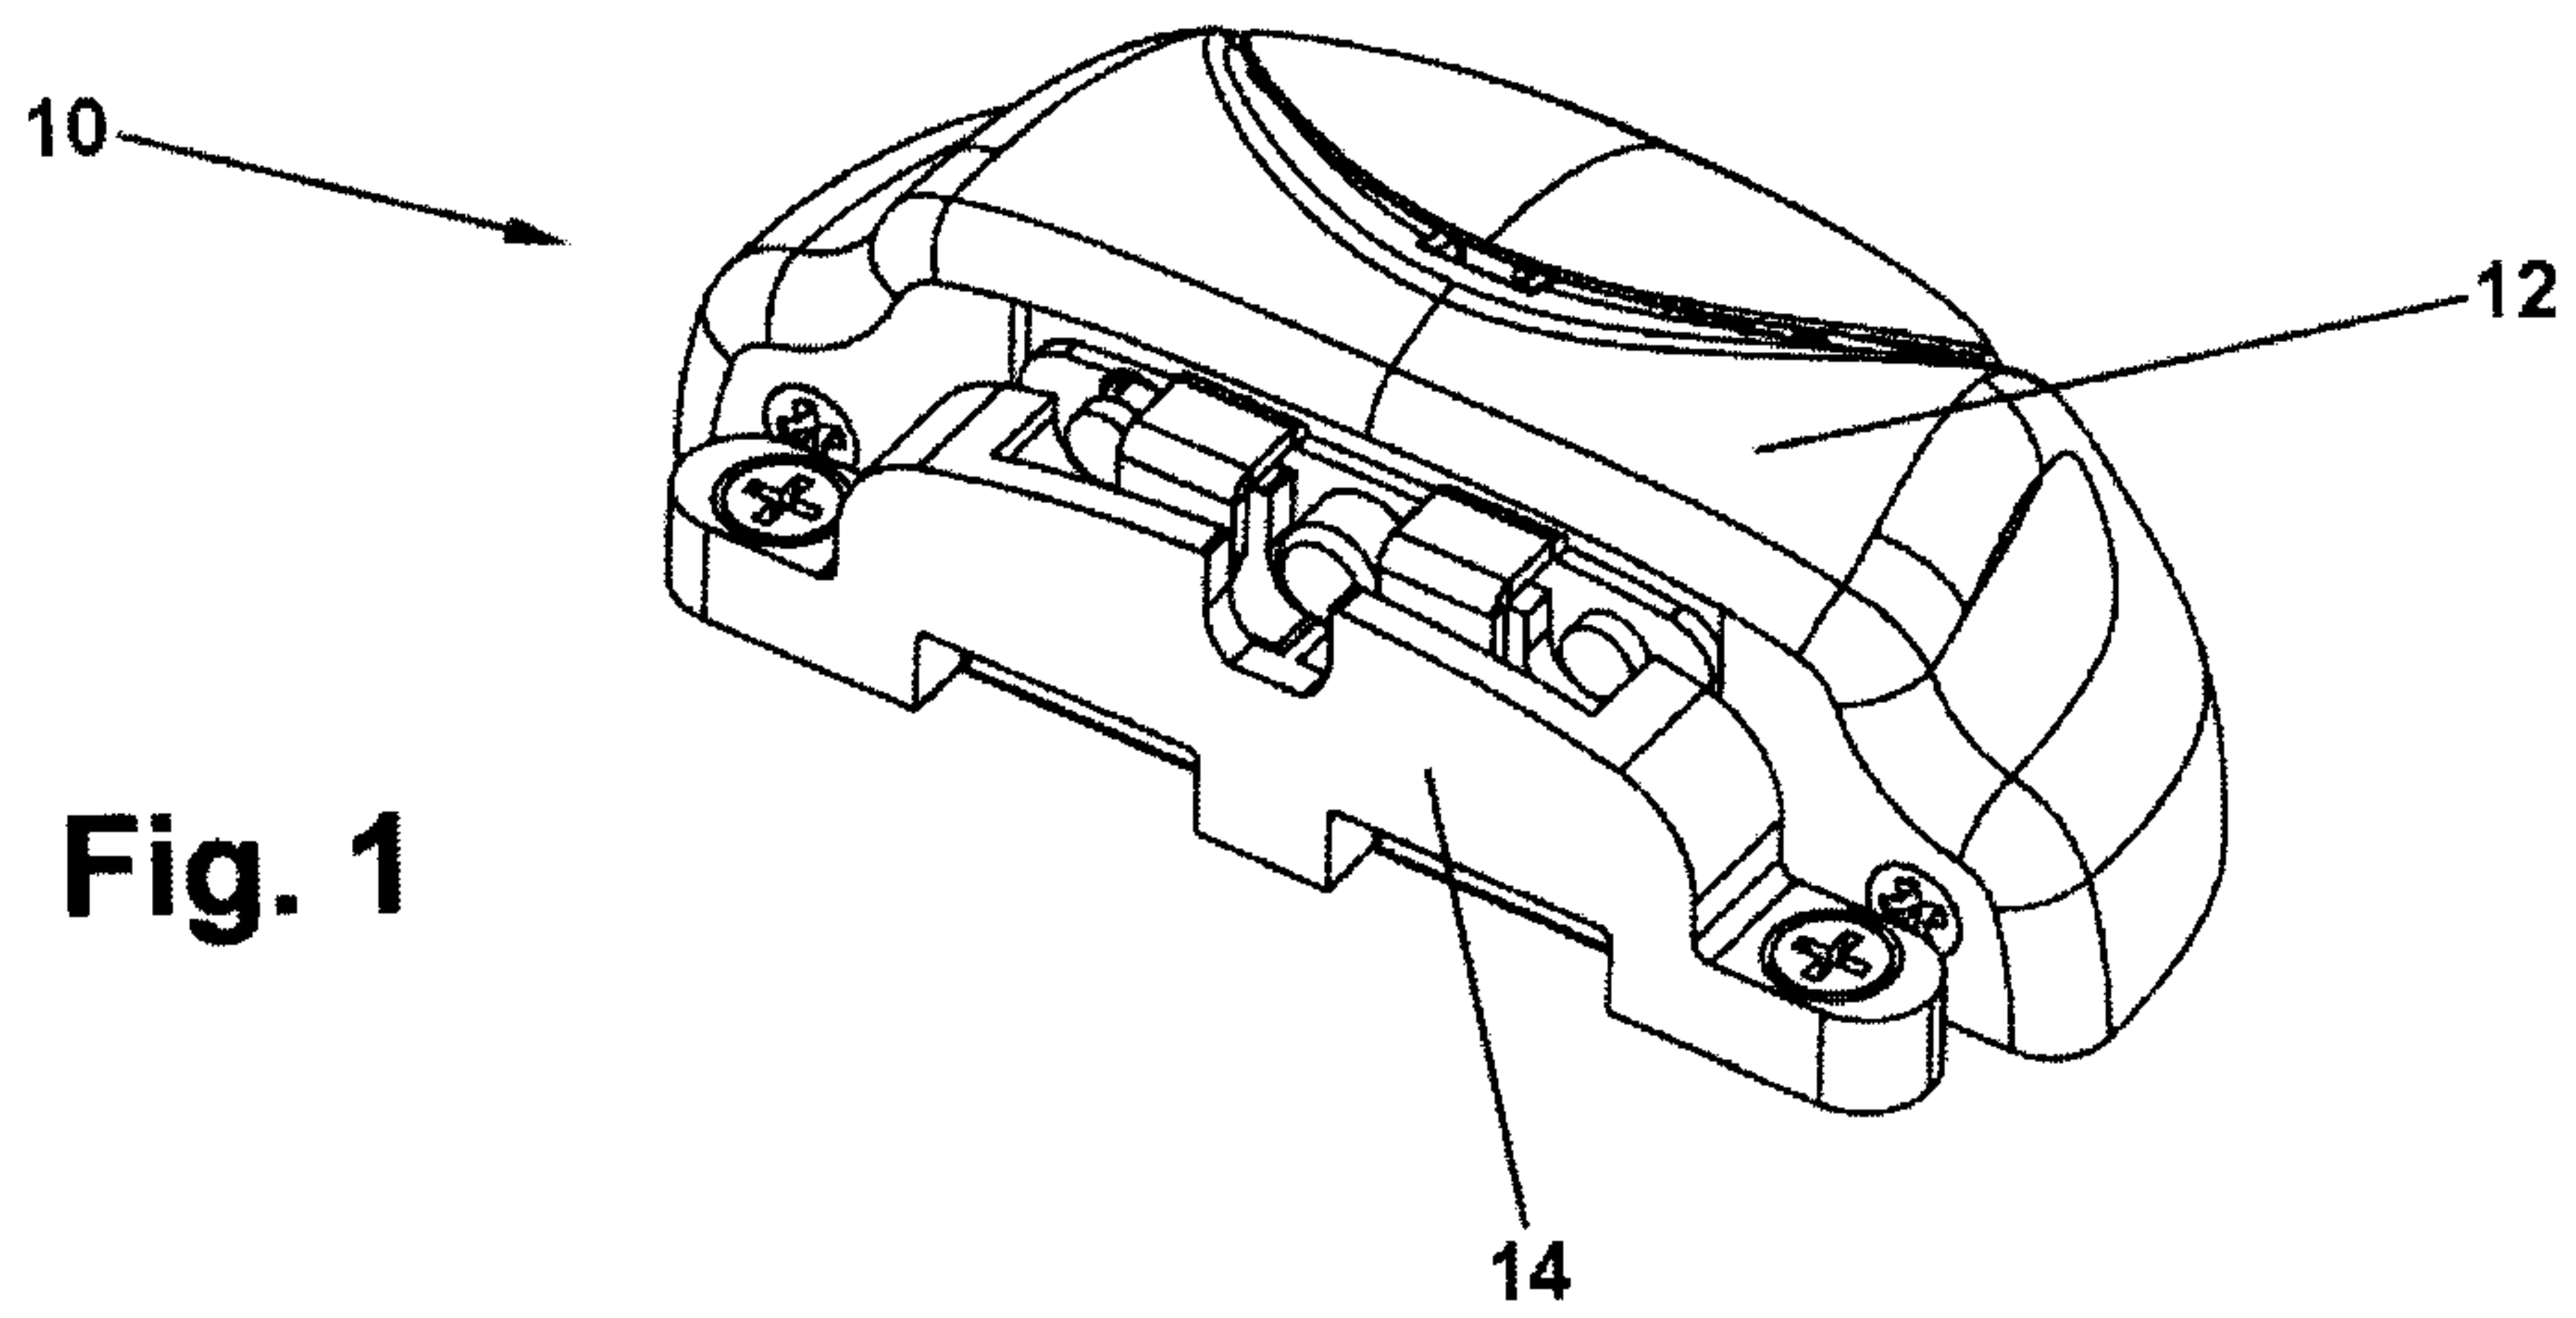


Fig. 1

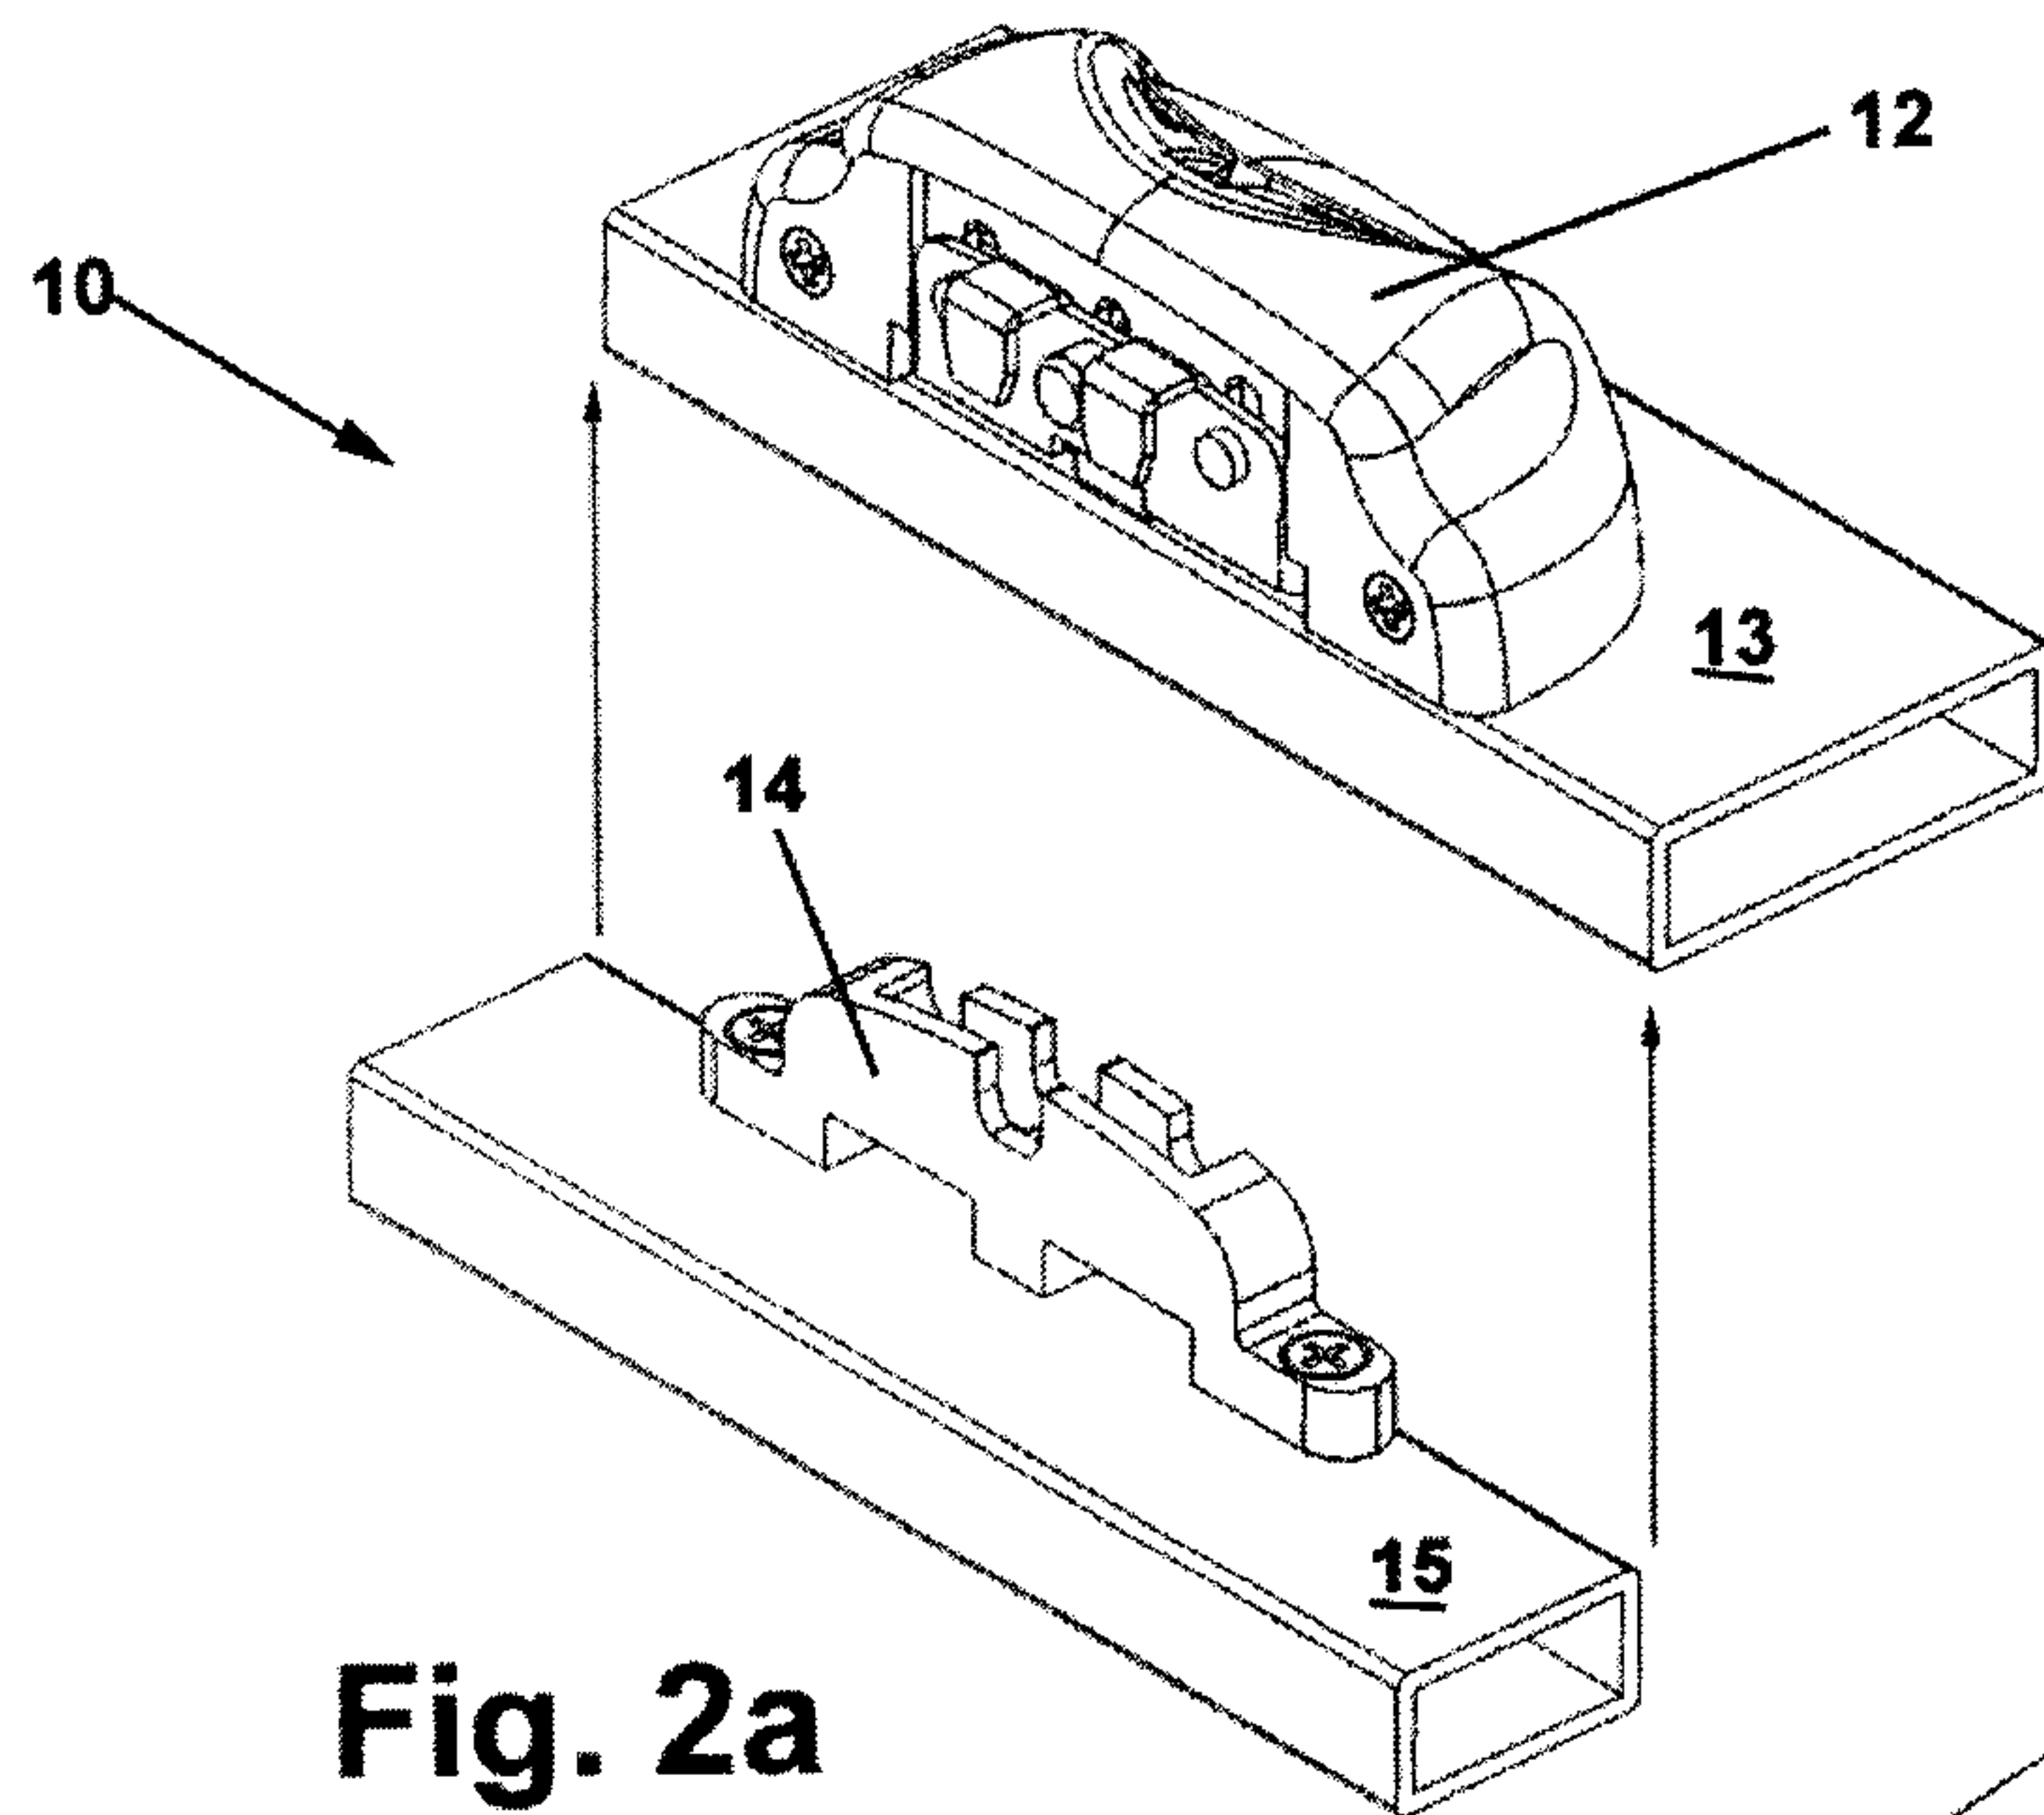


Fig. 2a

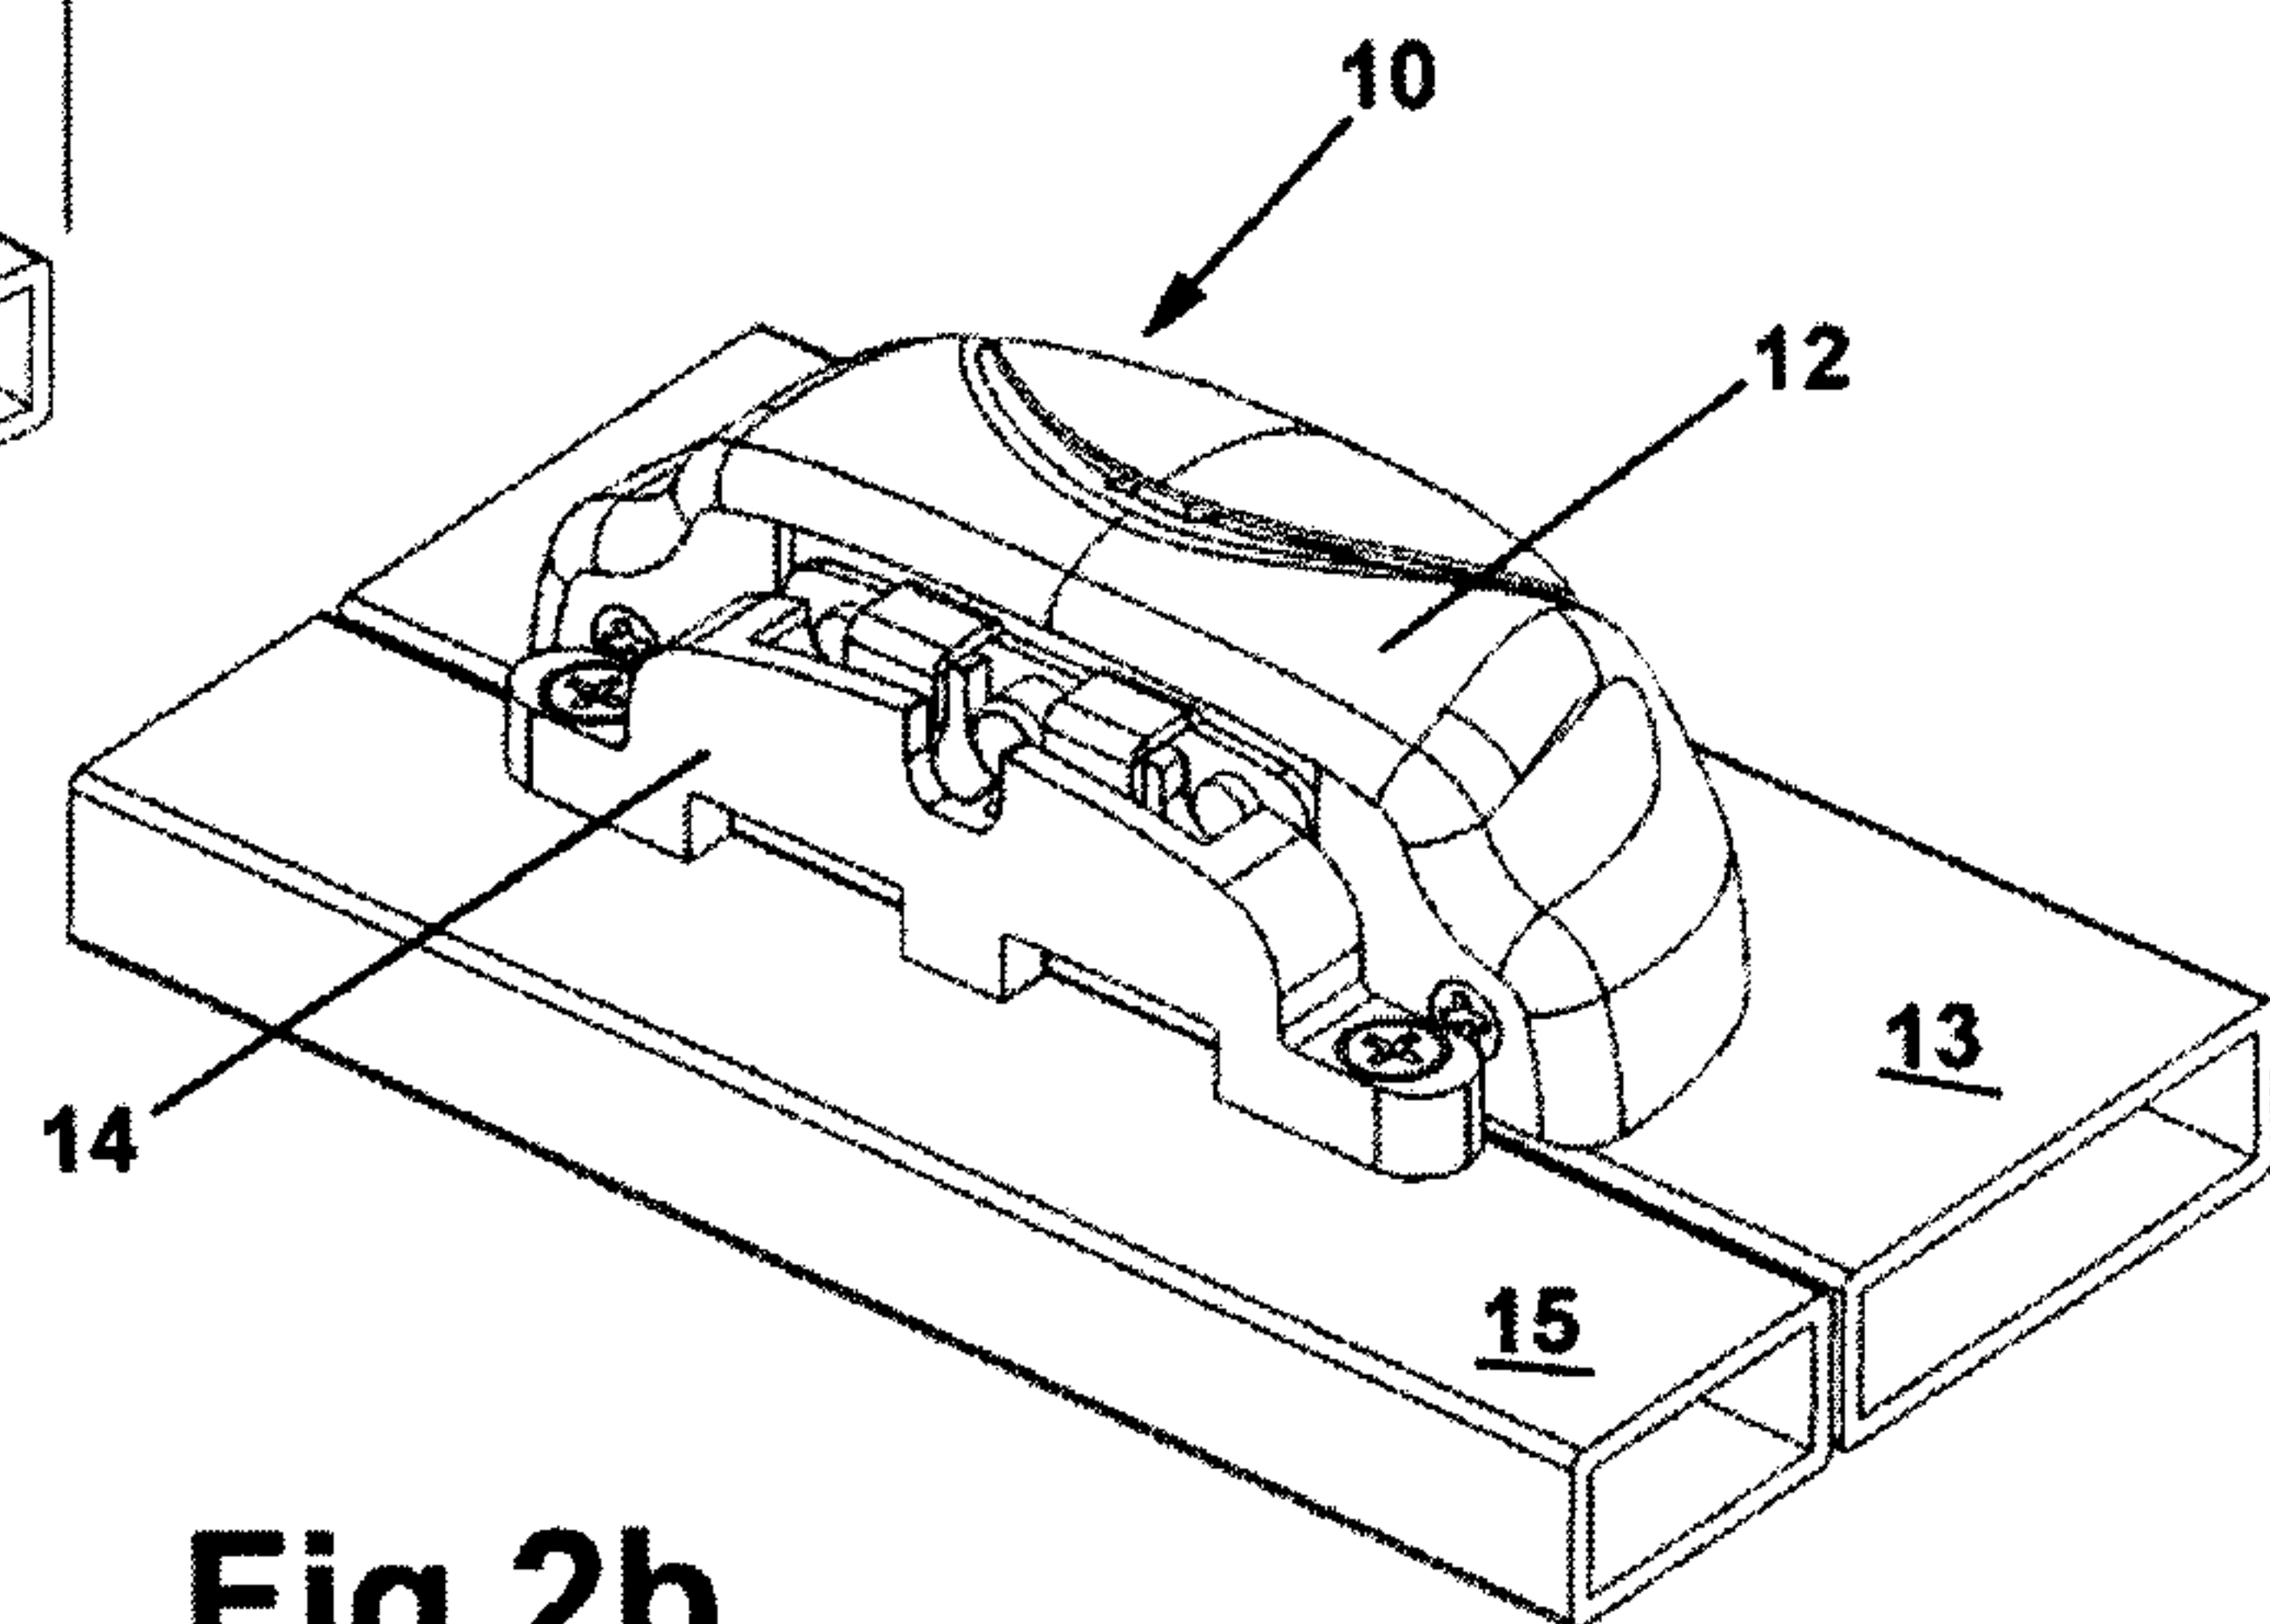


Fig. 2b

2/7

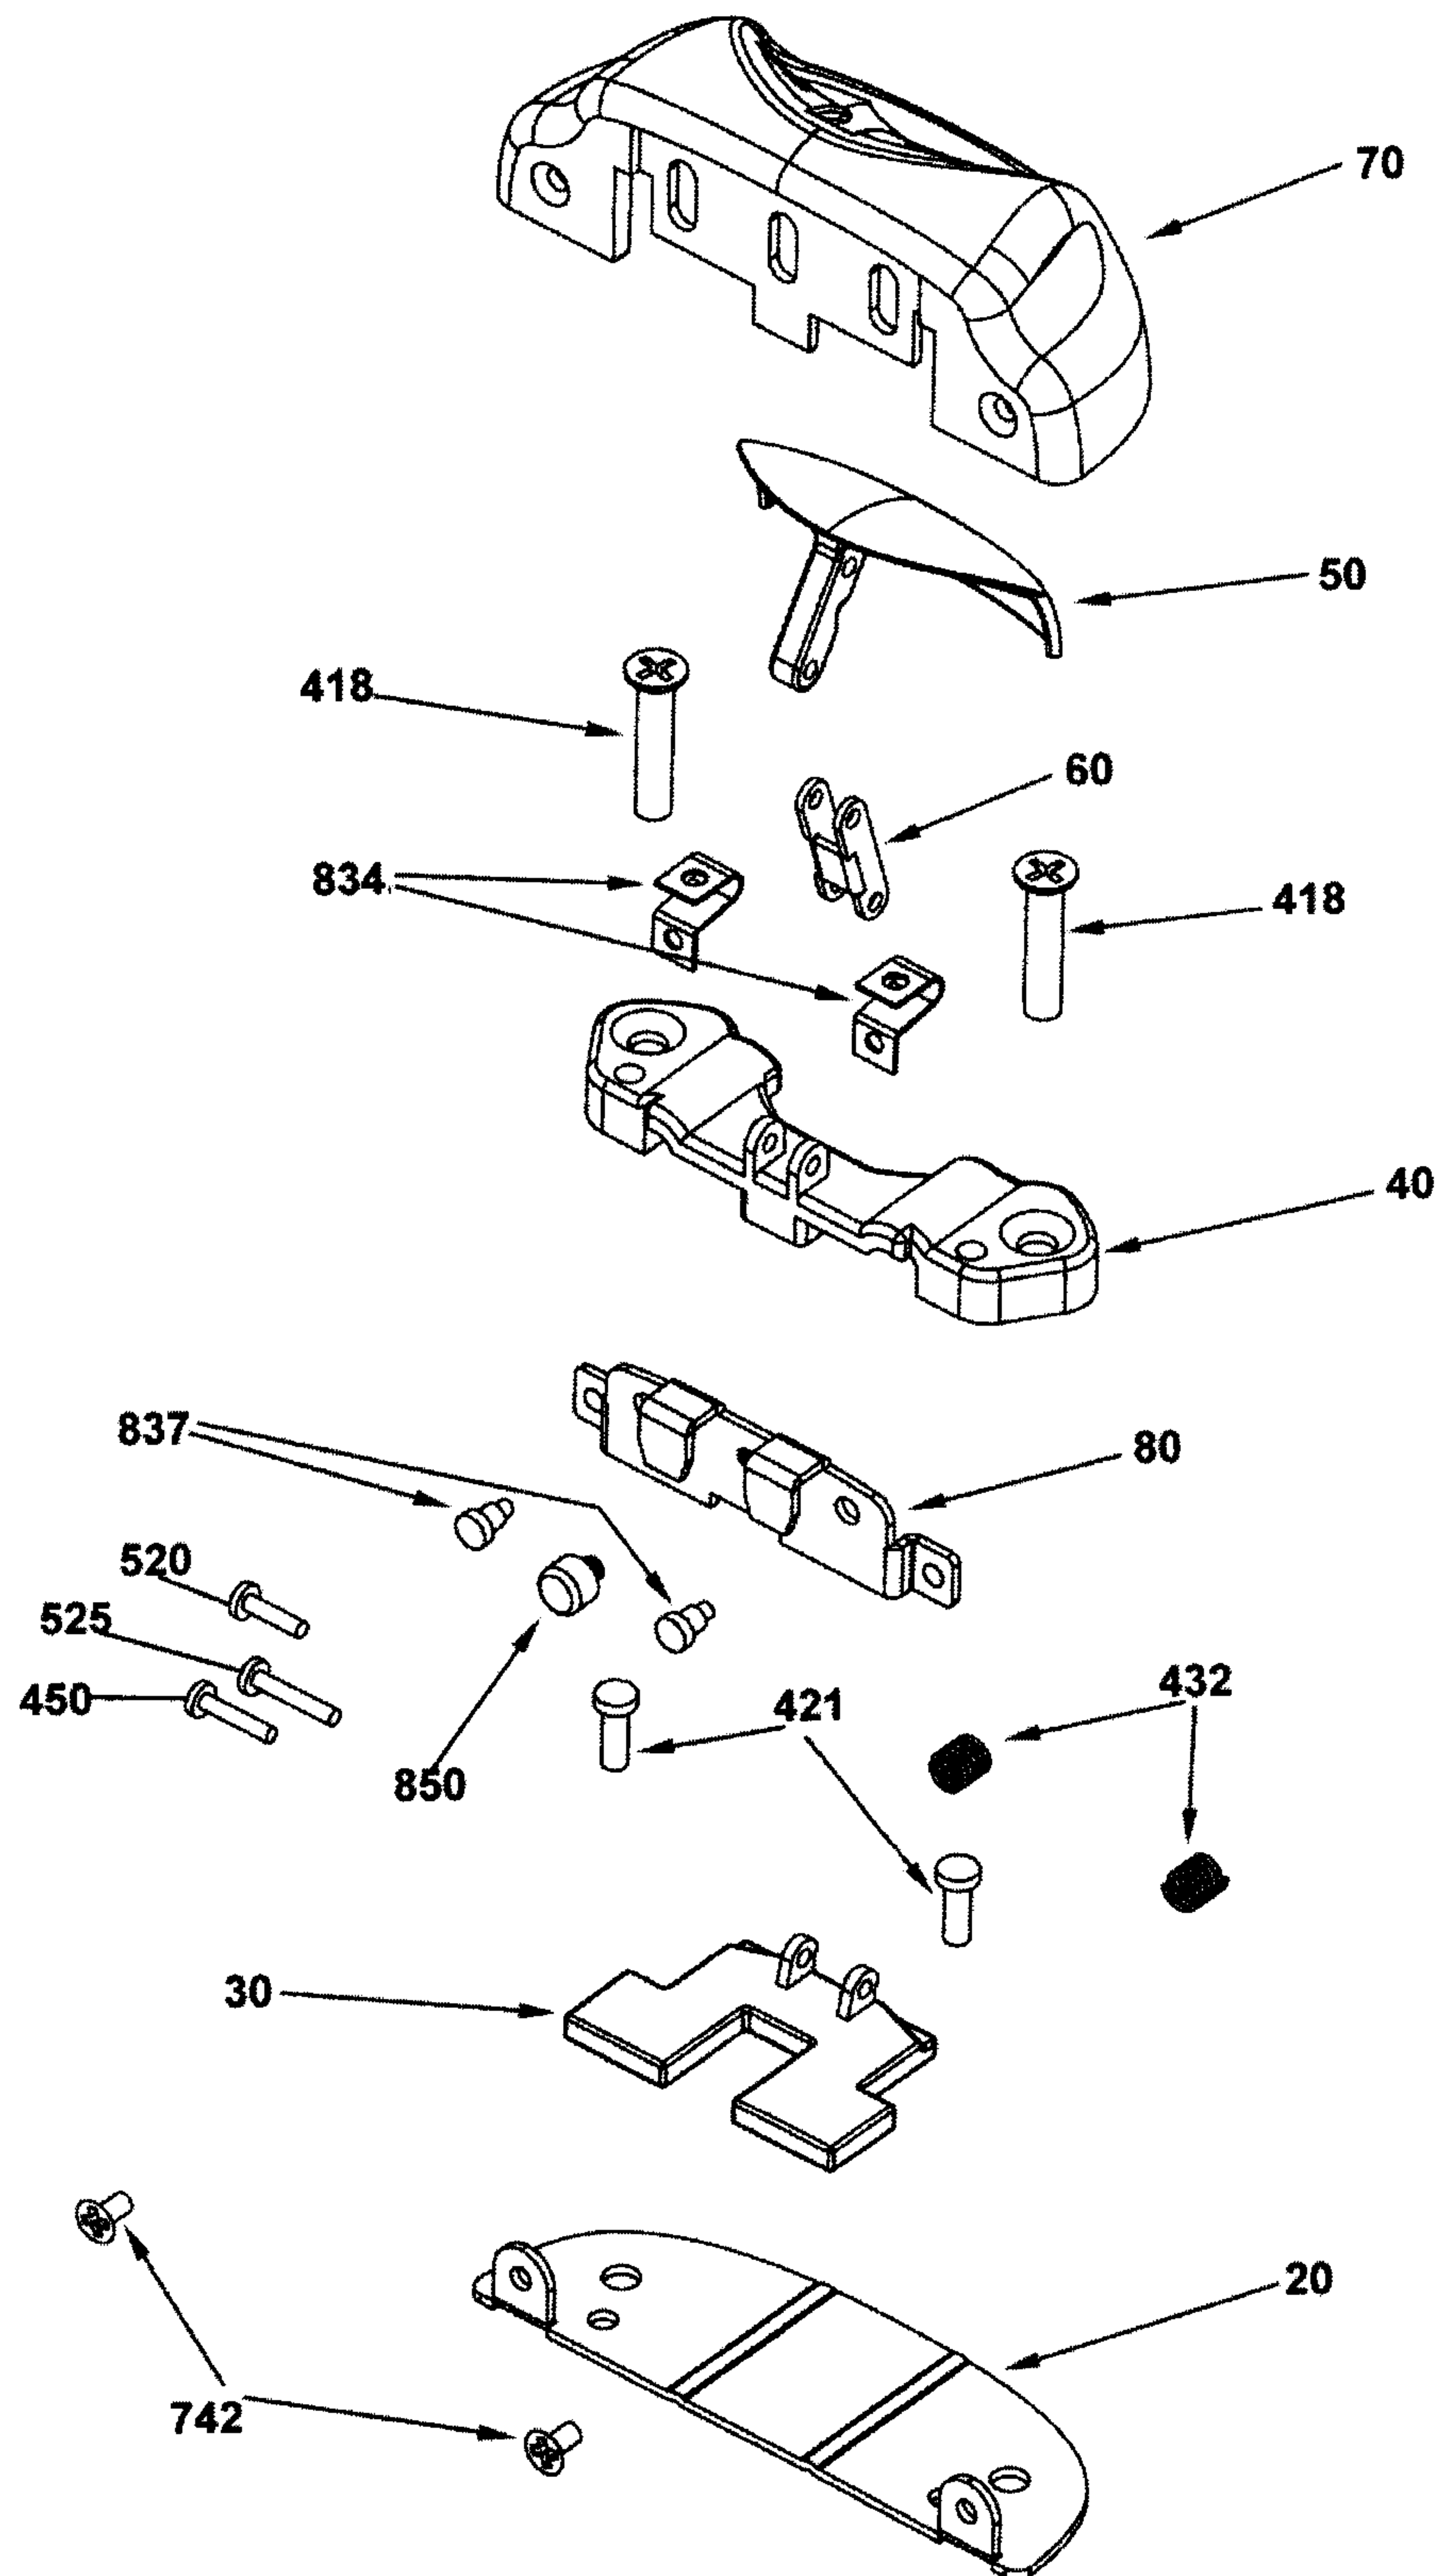


Fig. 3

3/7

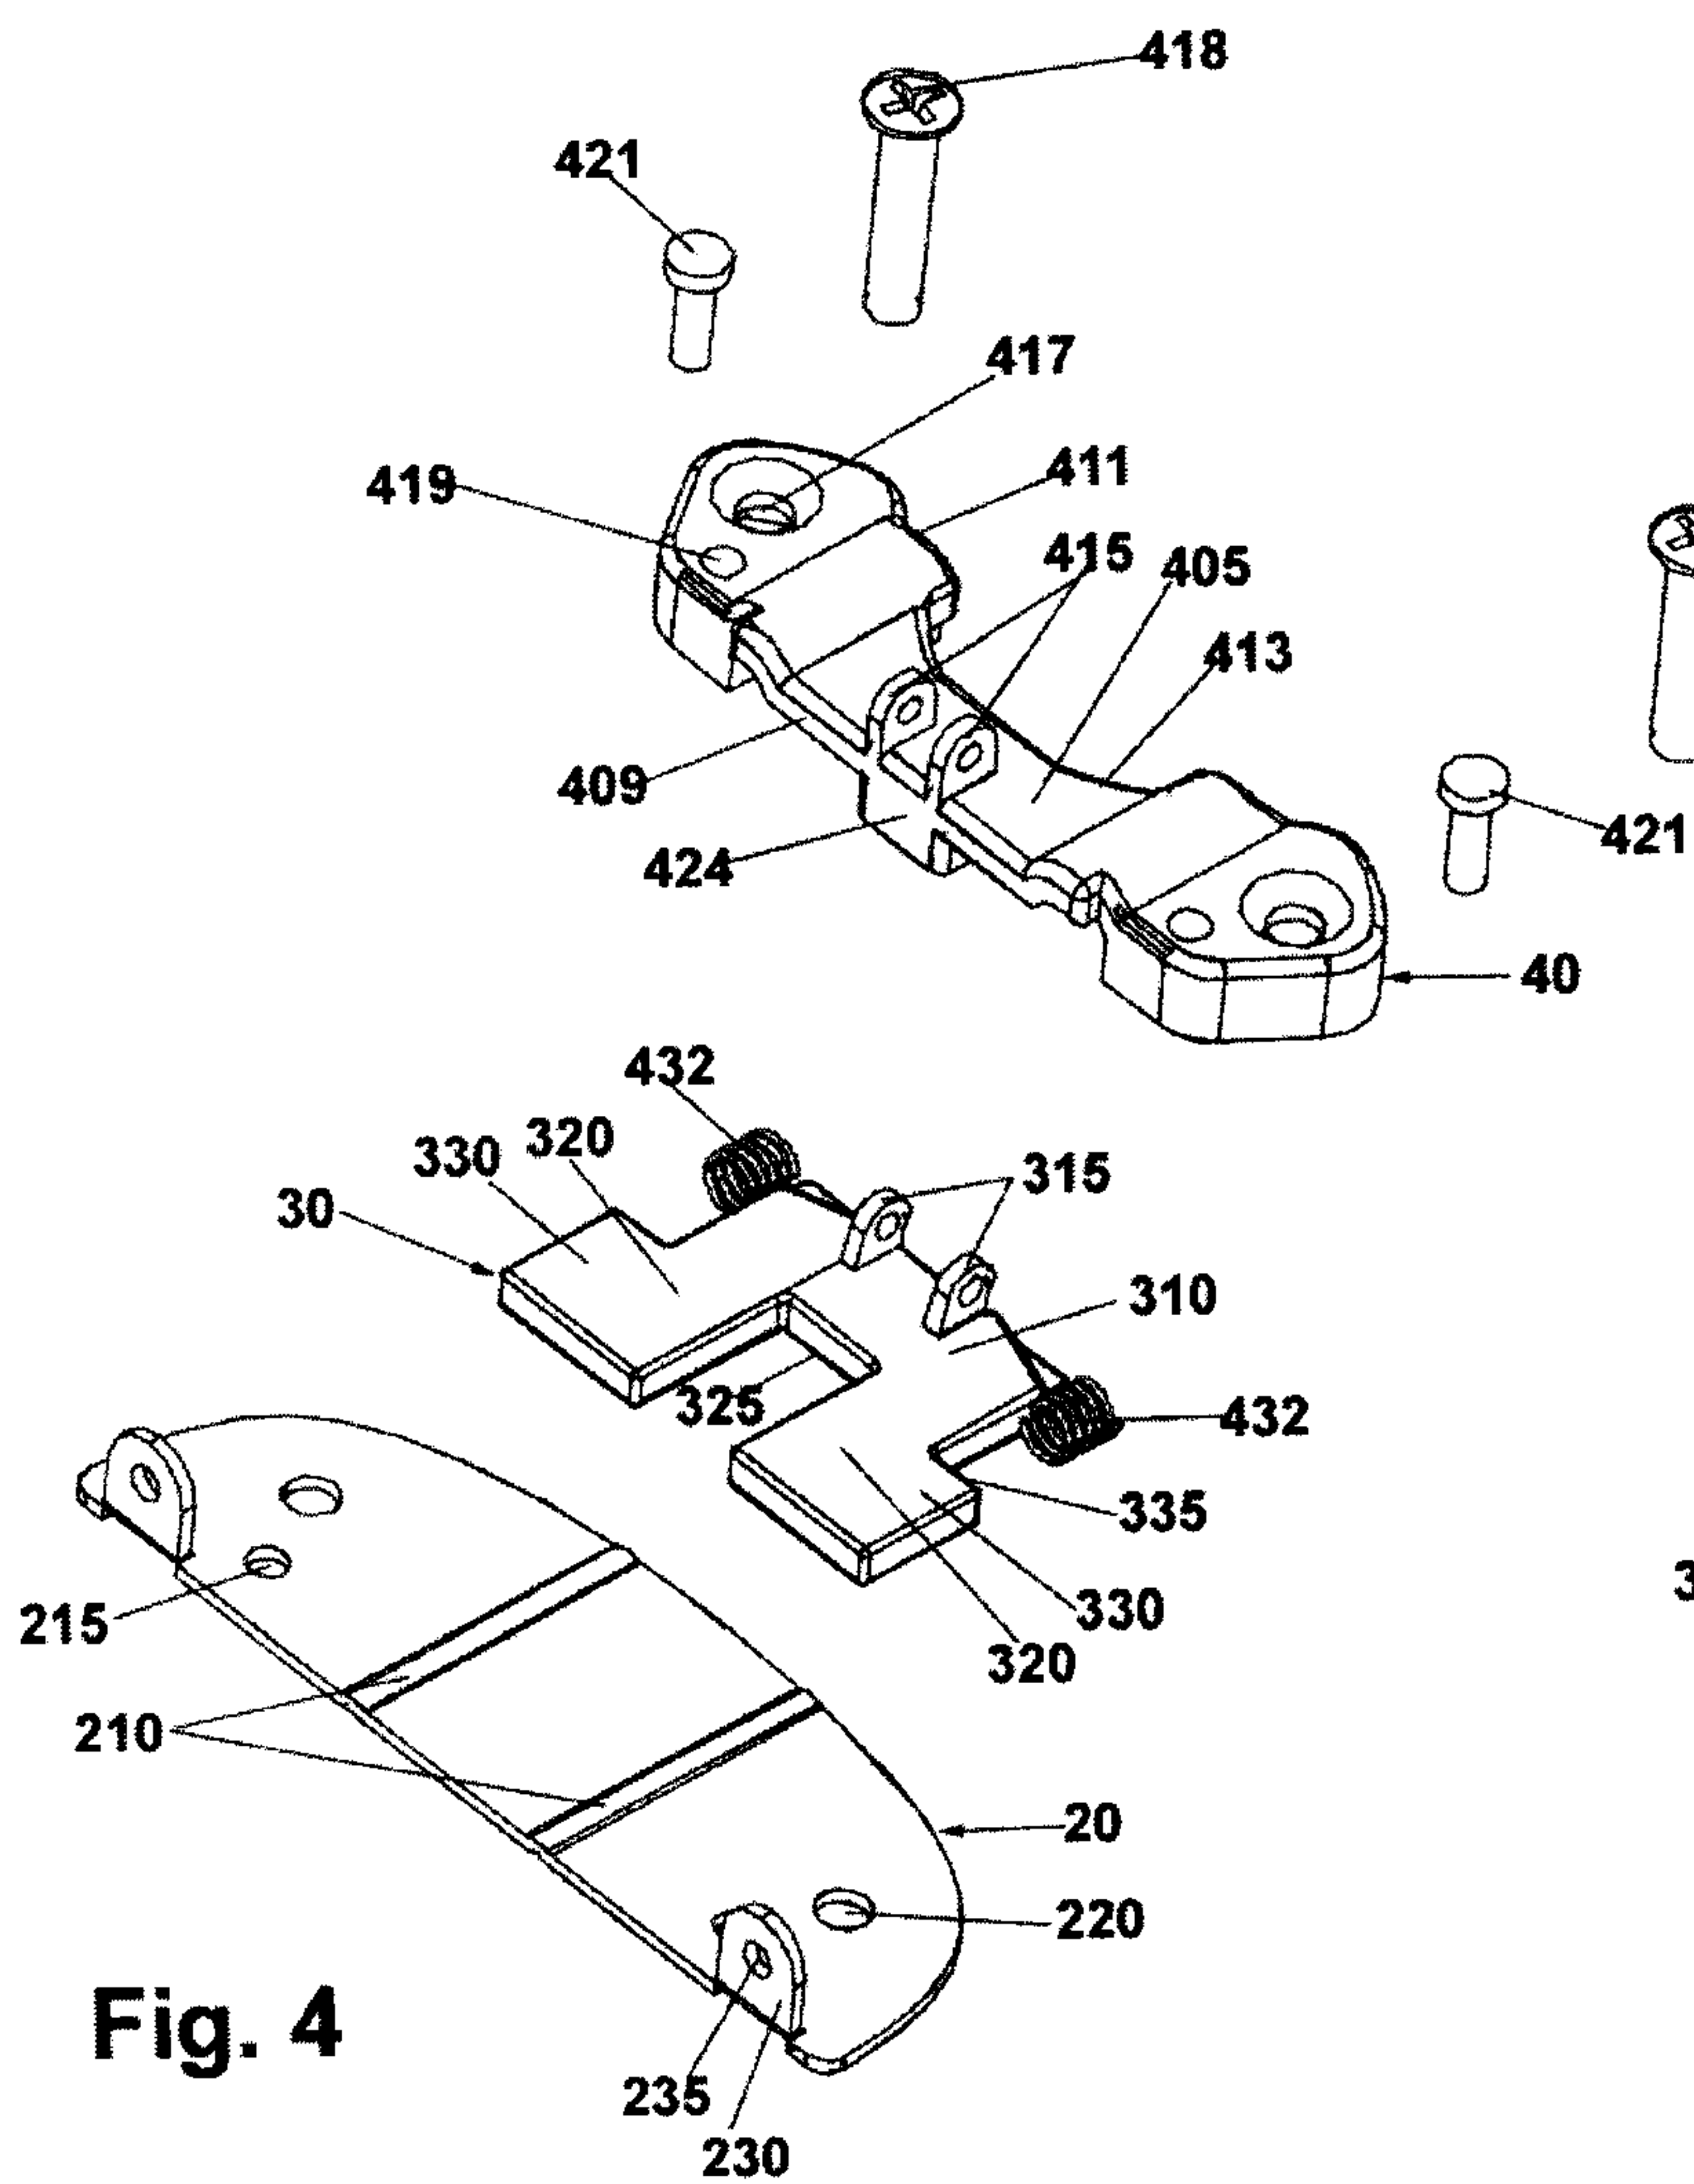


Fig. 4

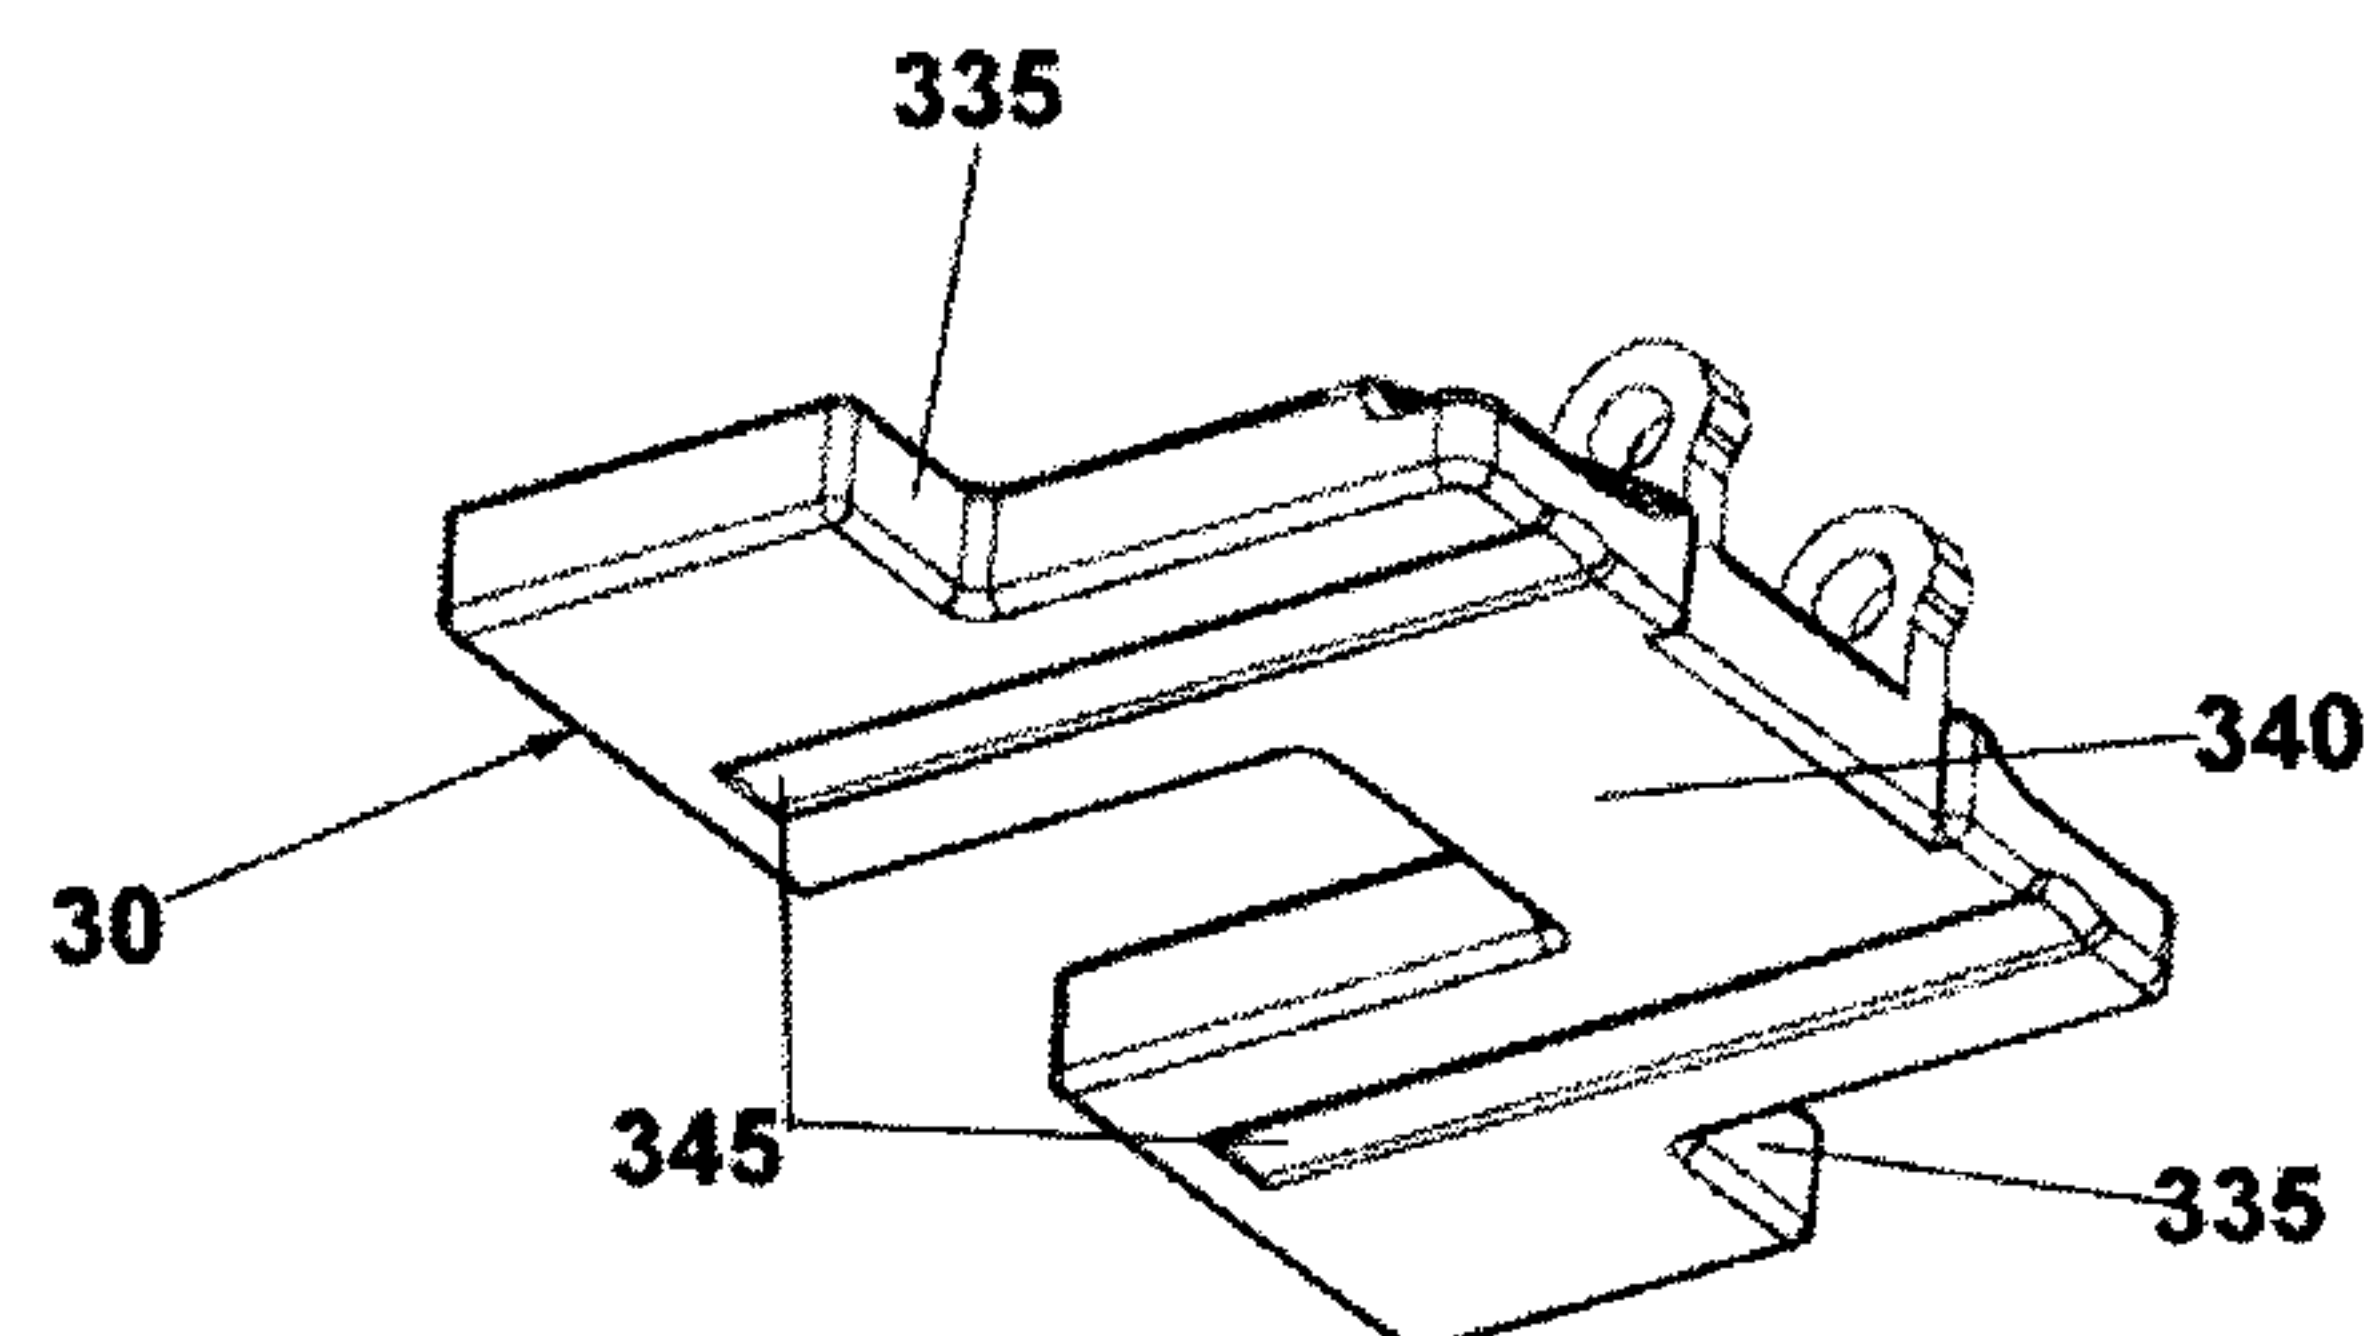


Fig. 5

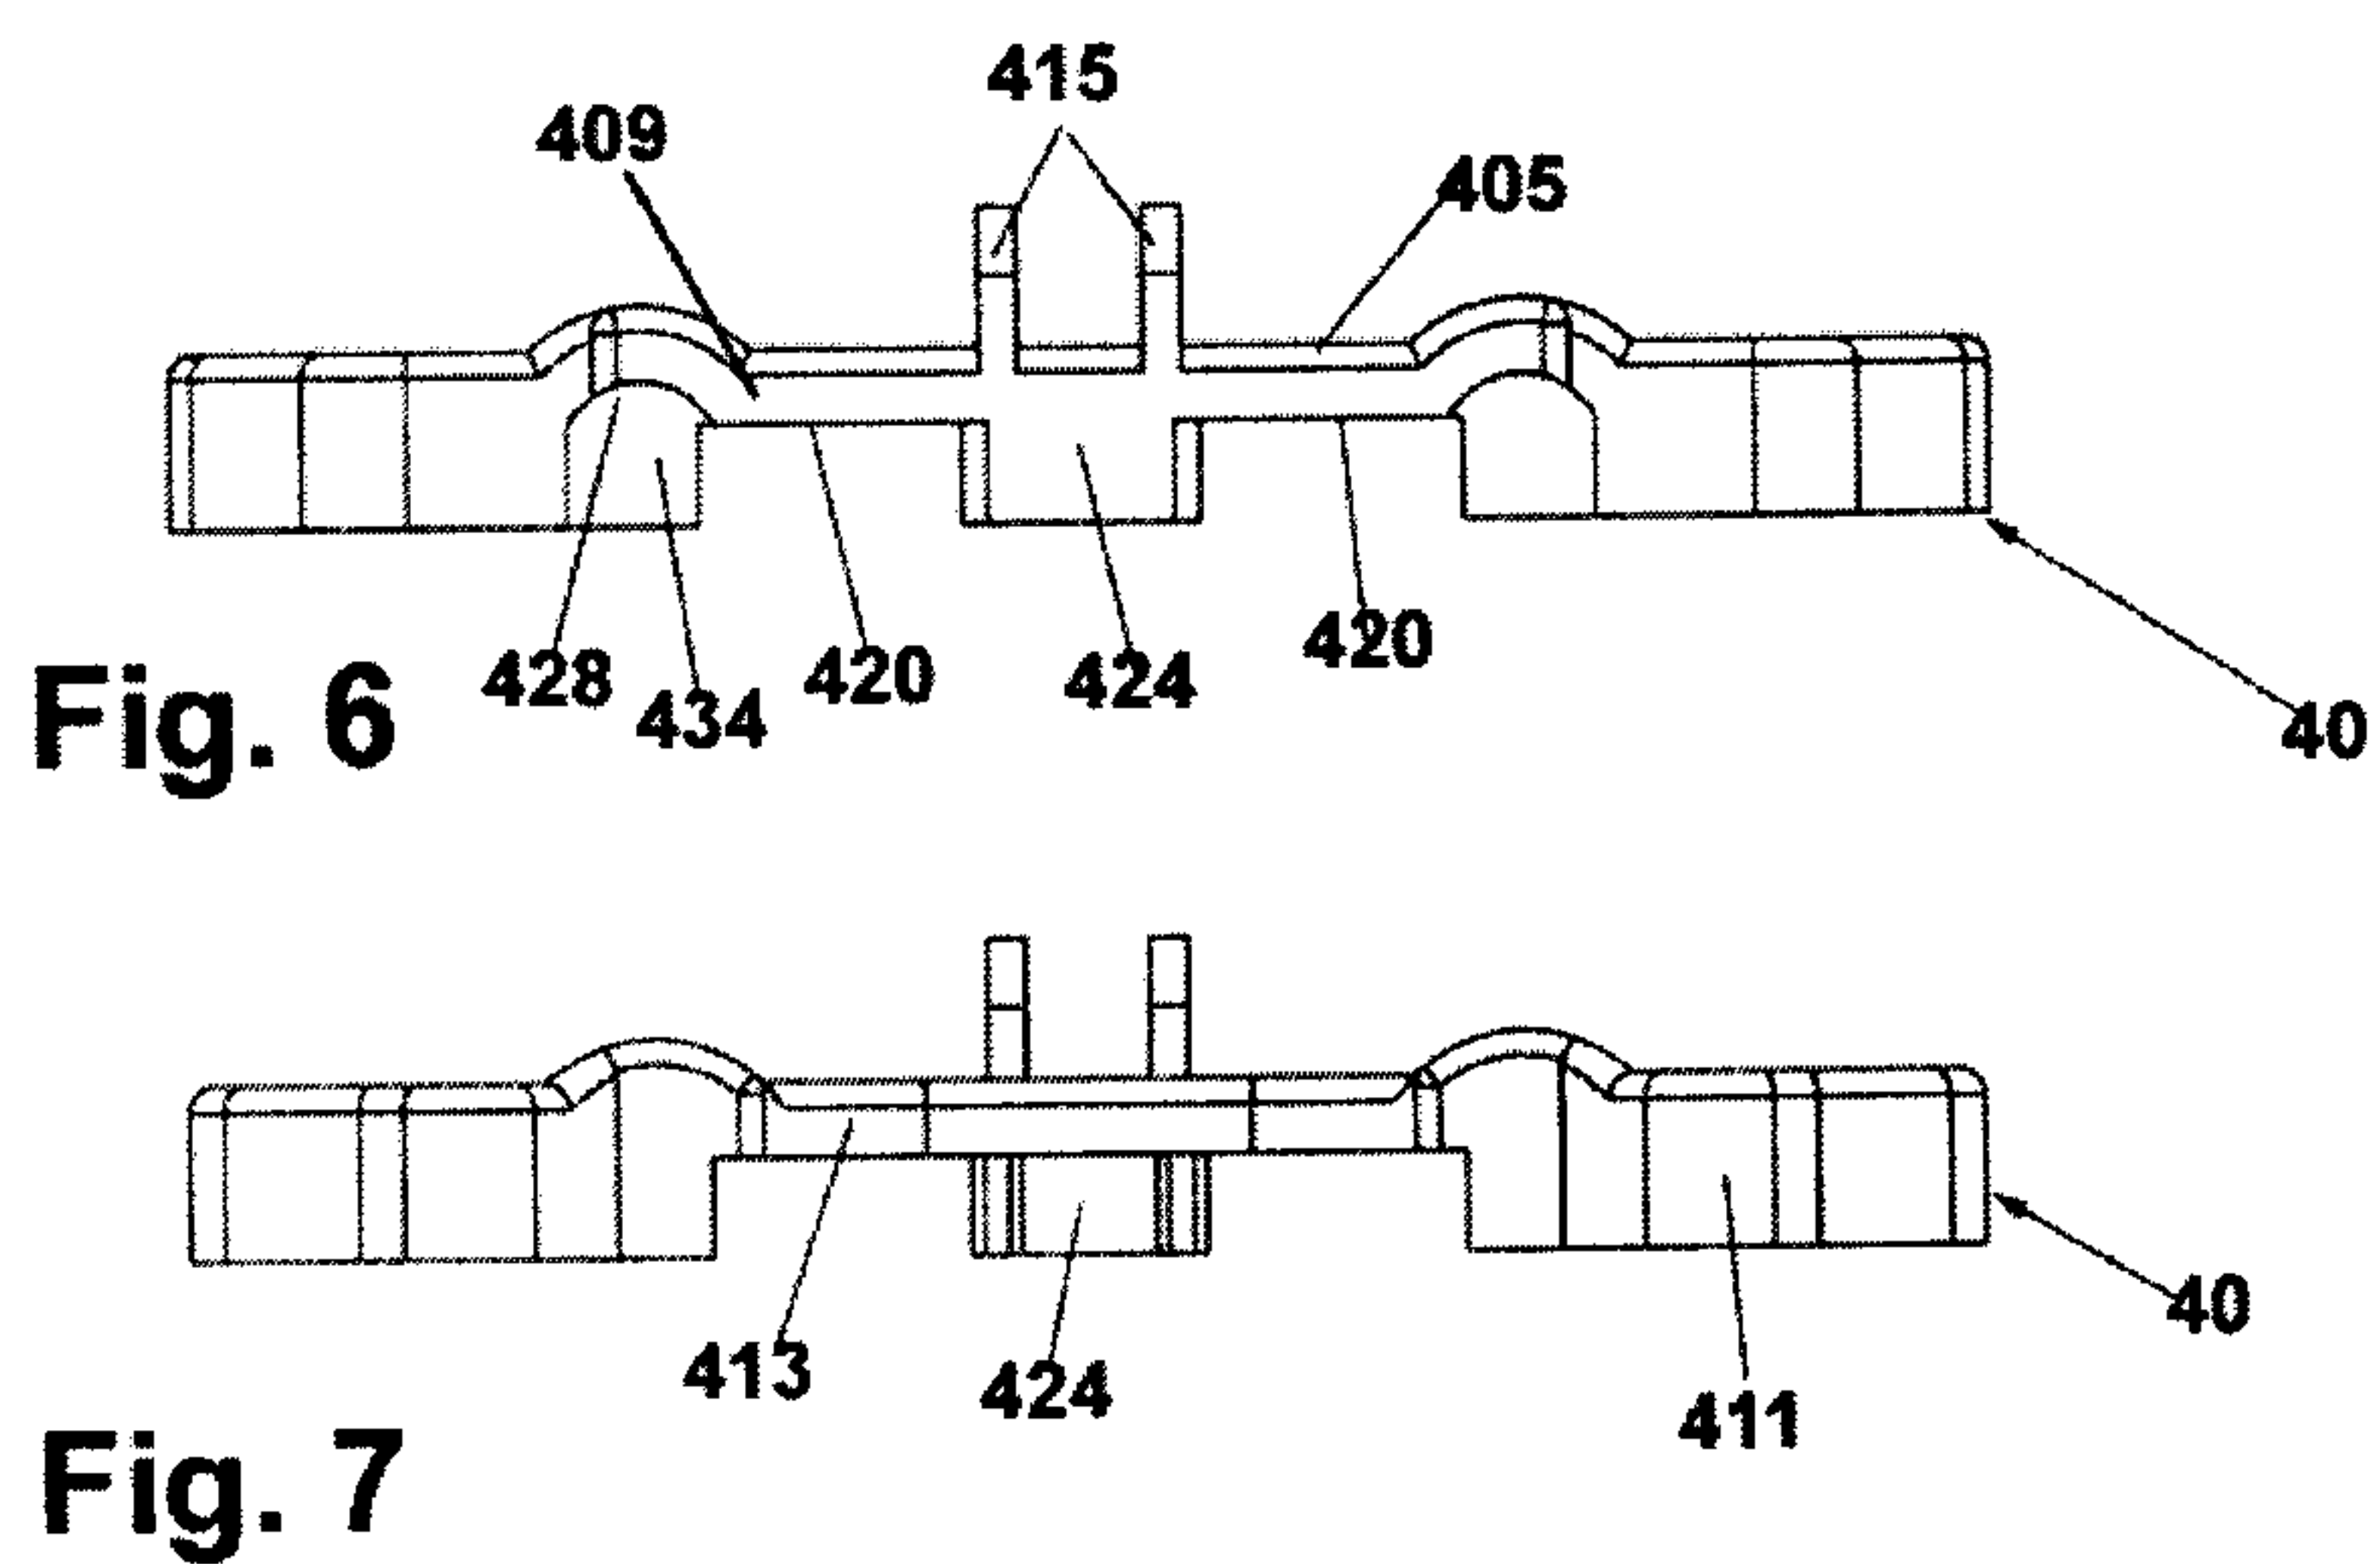


Fig. 6

Fig. 7




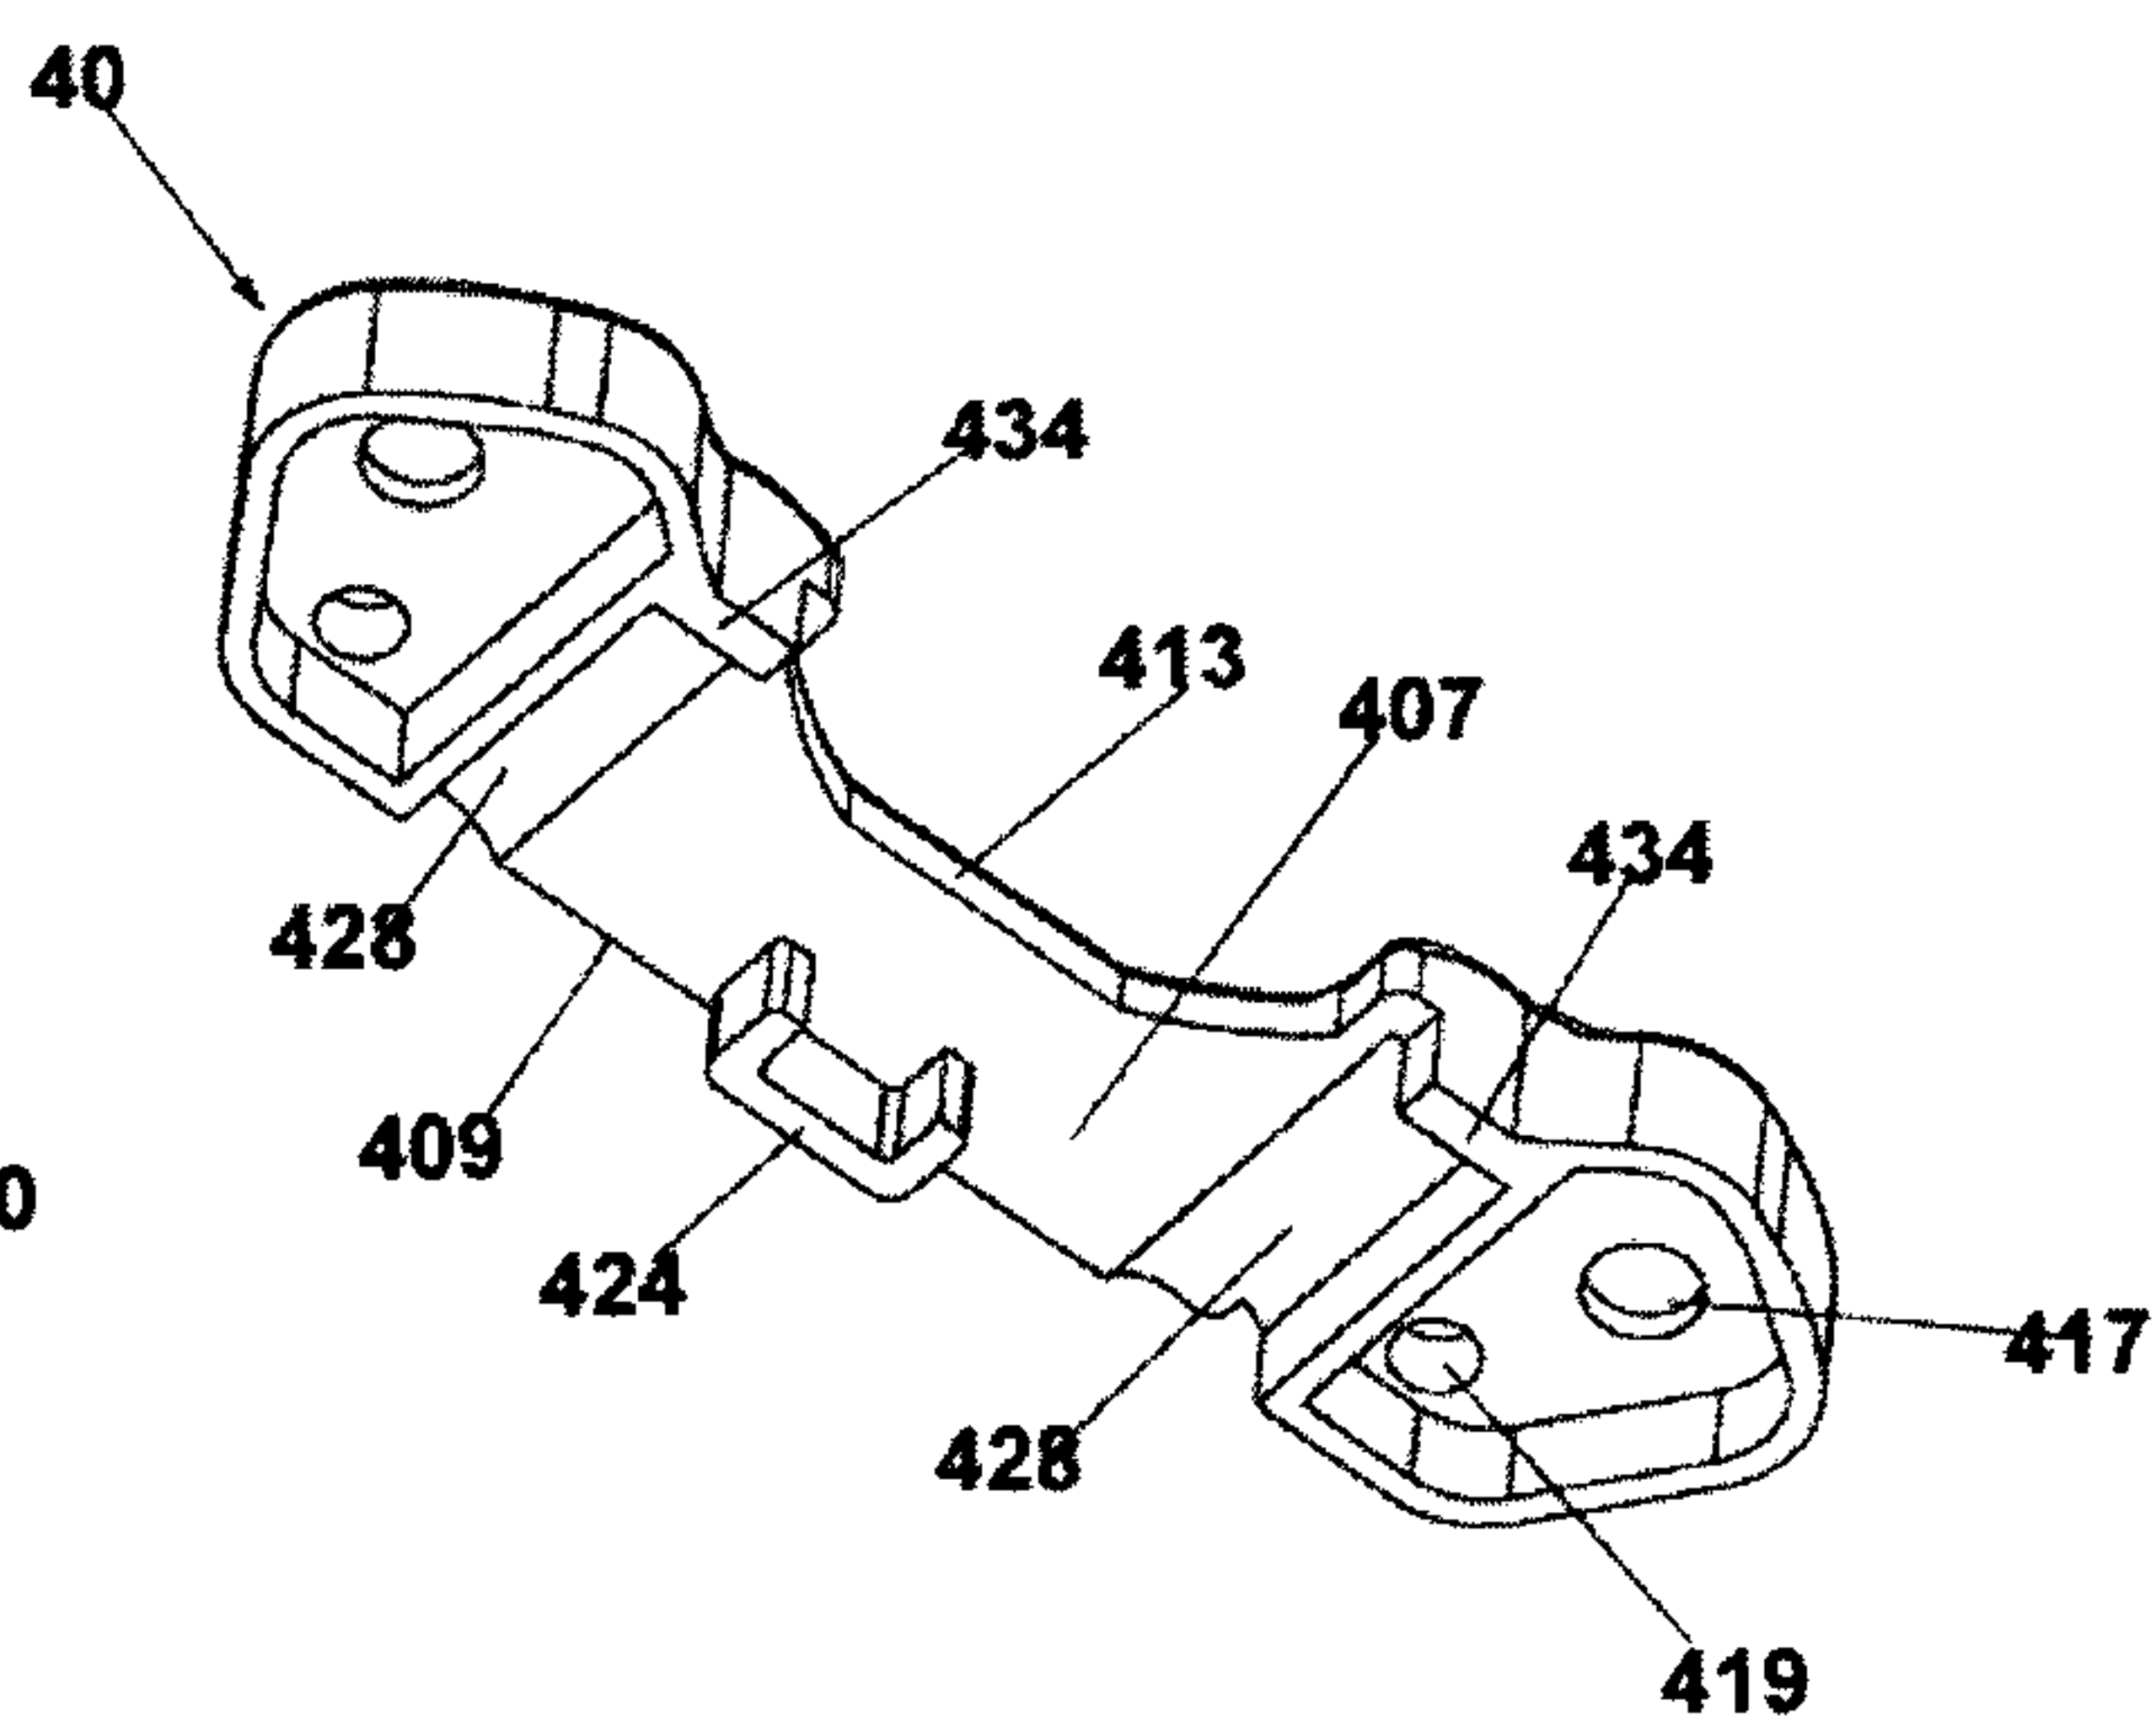


Fig. 8

4/7

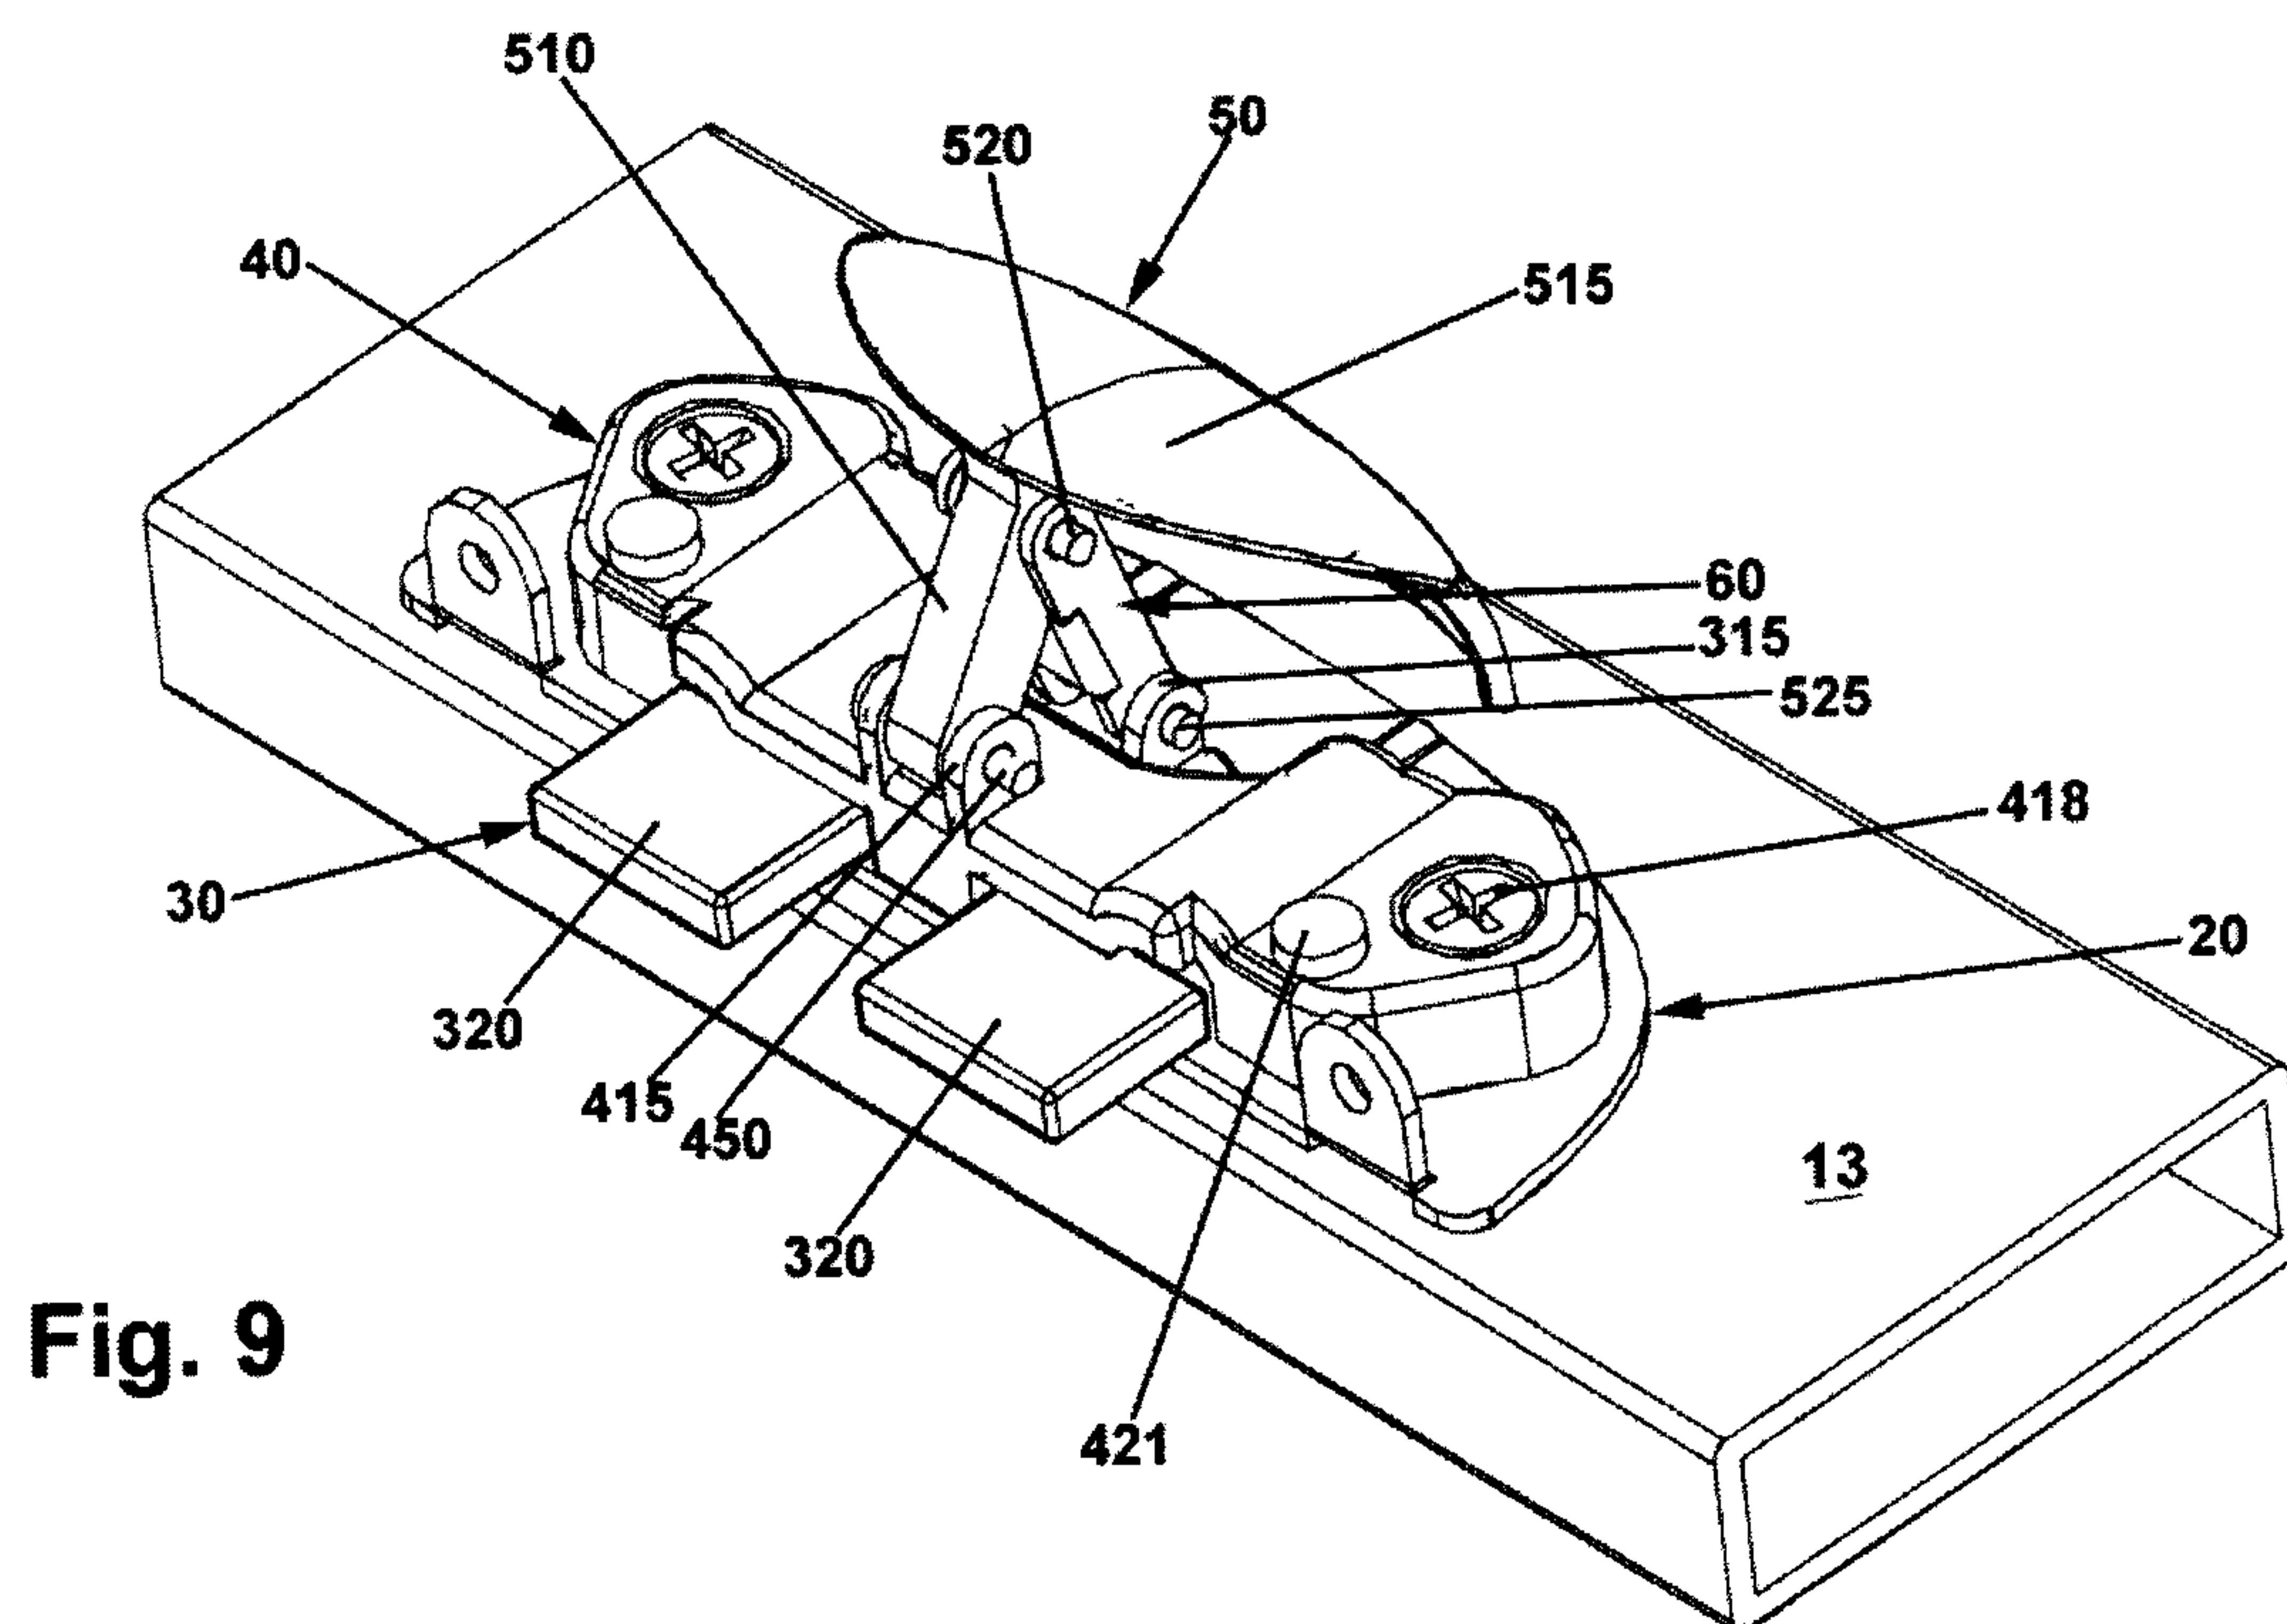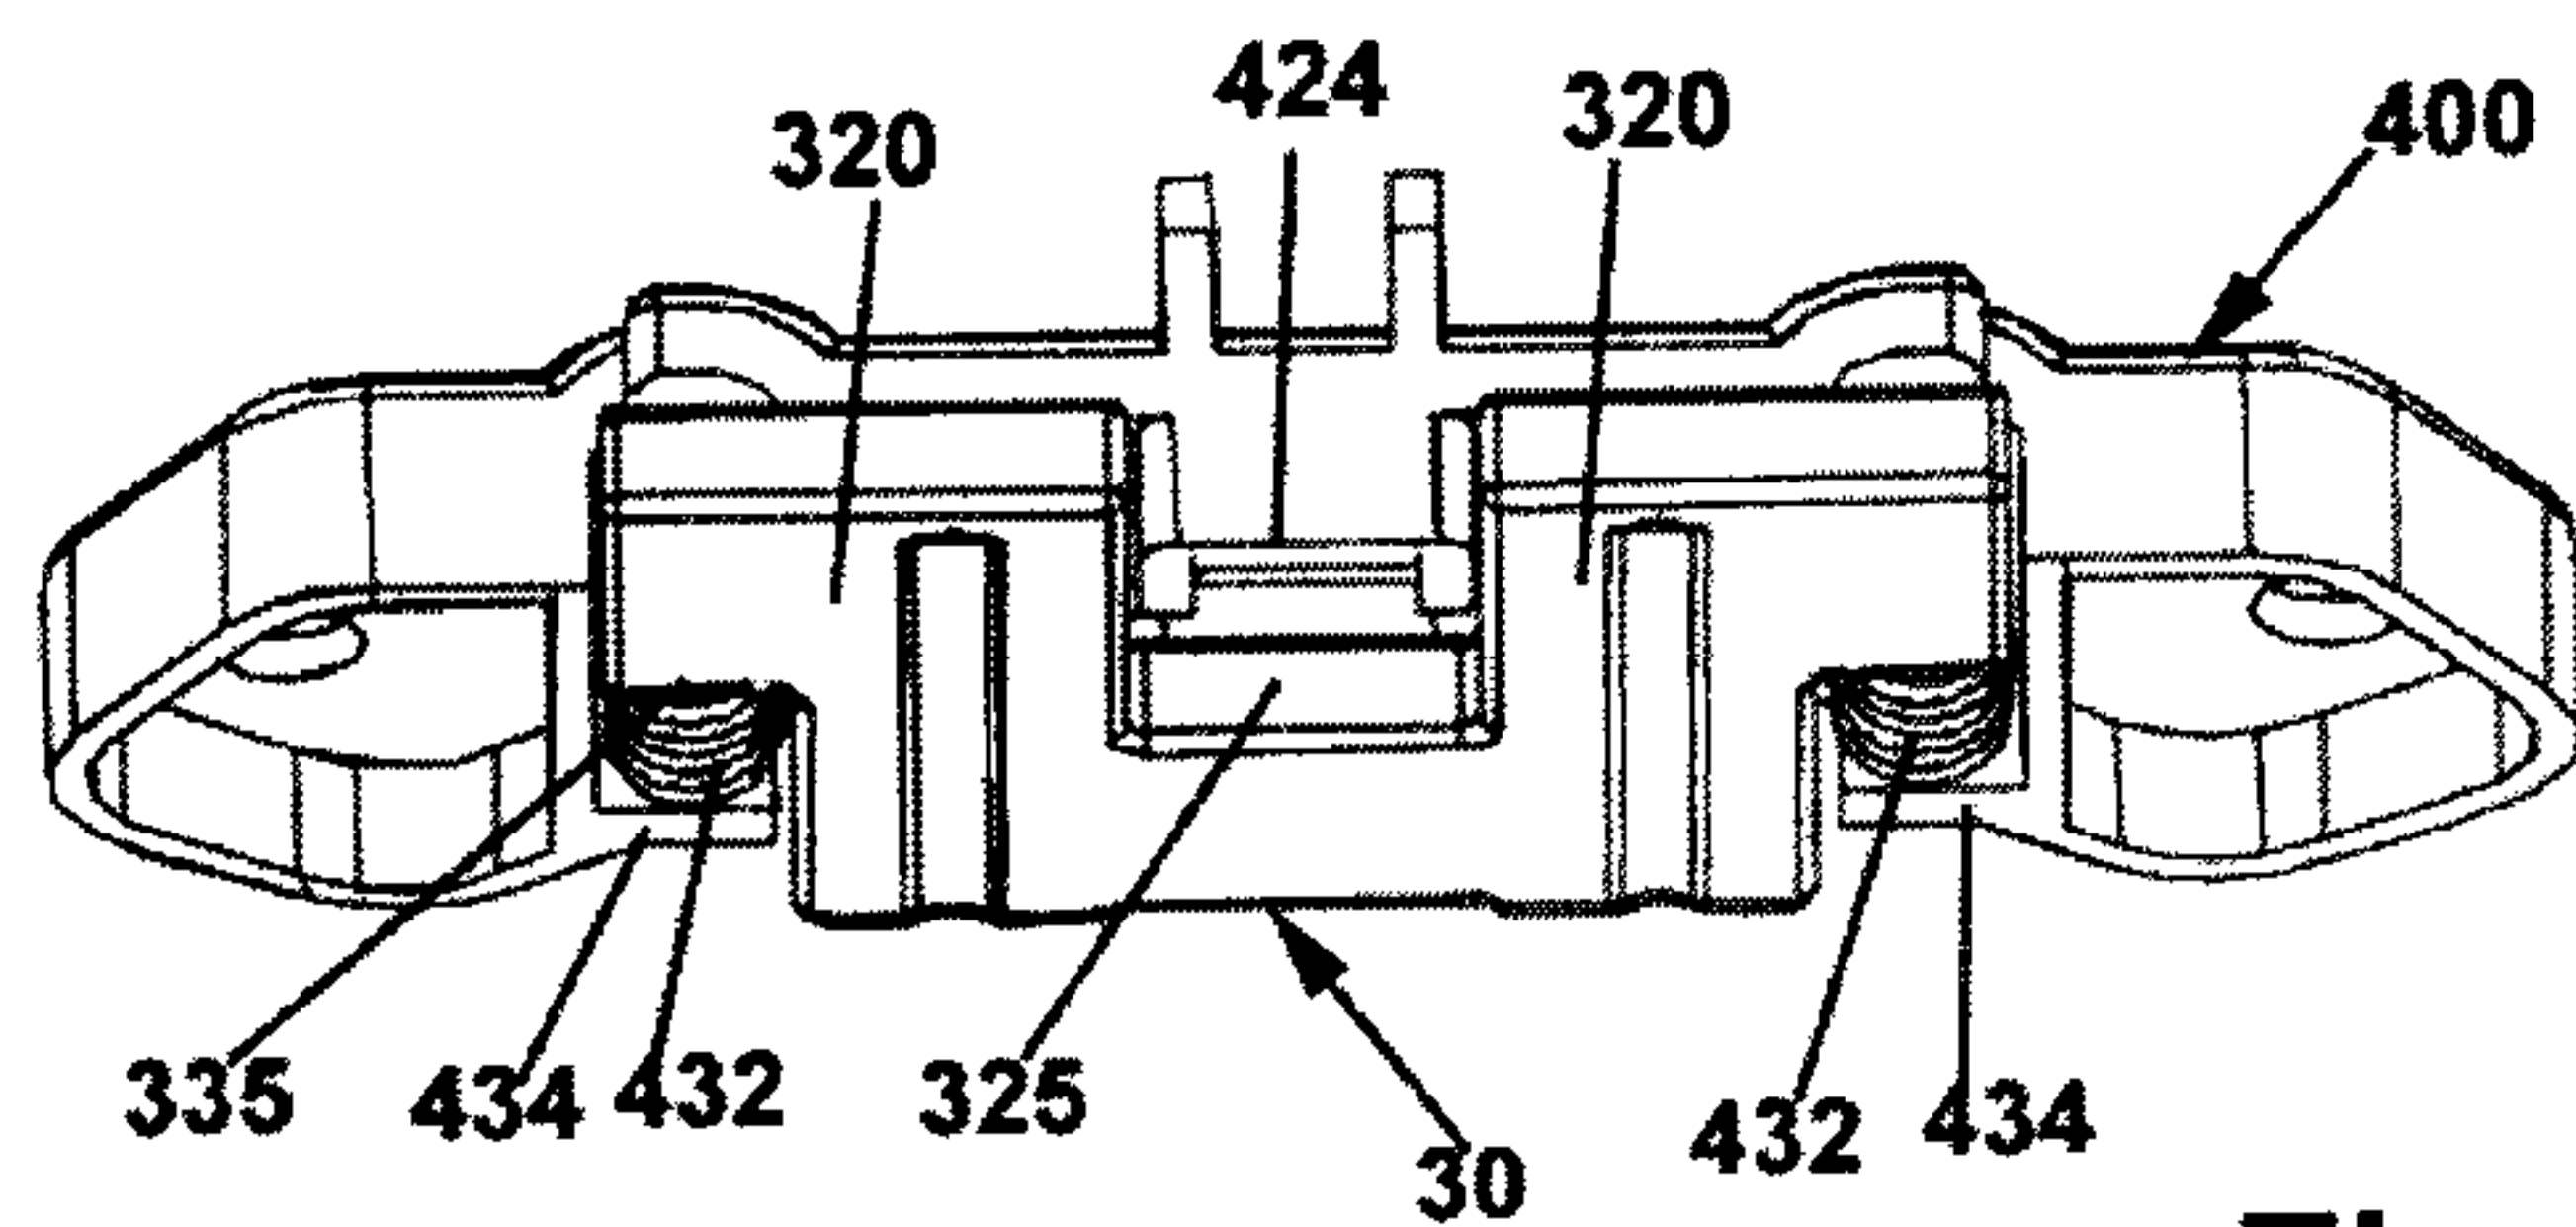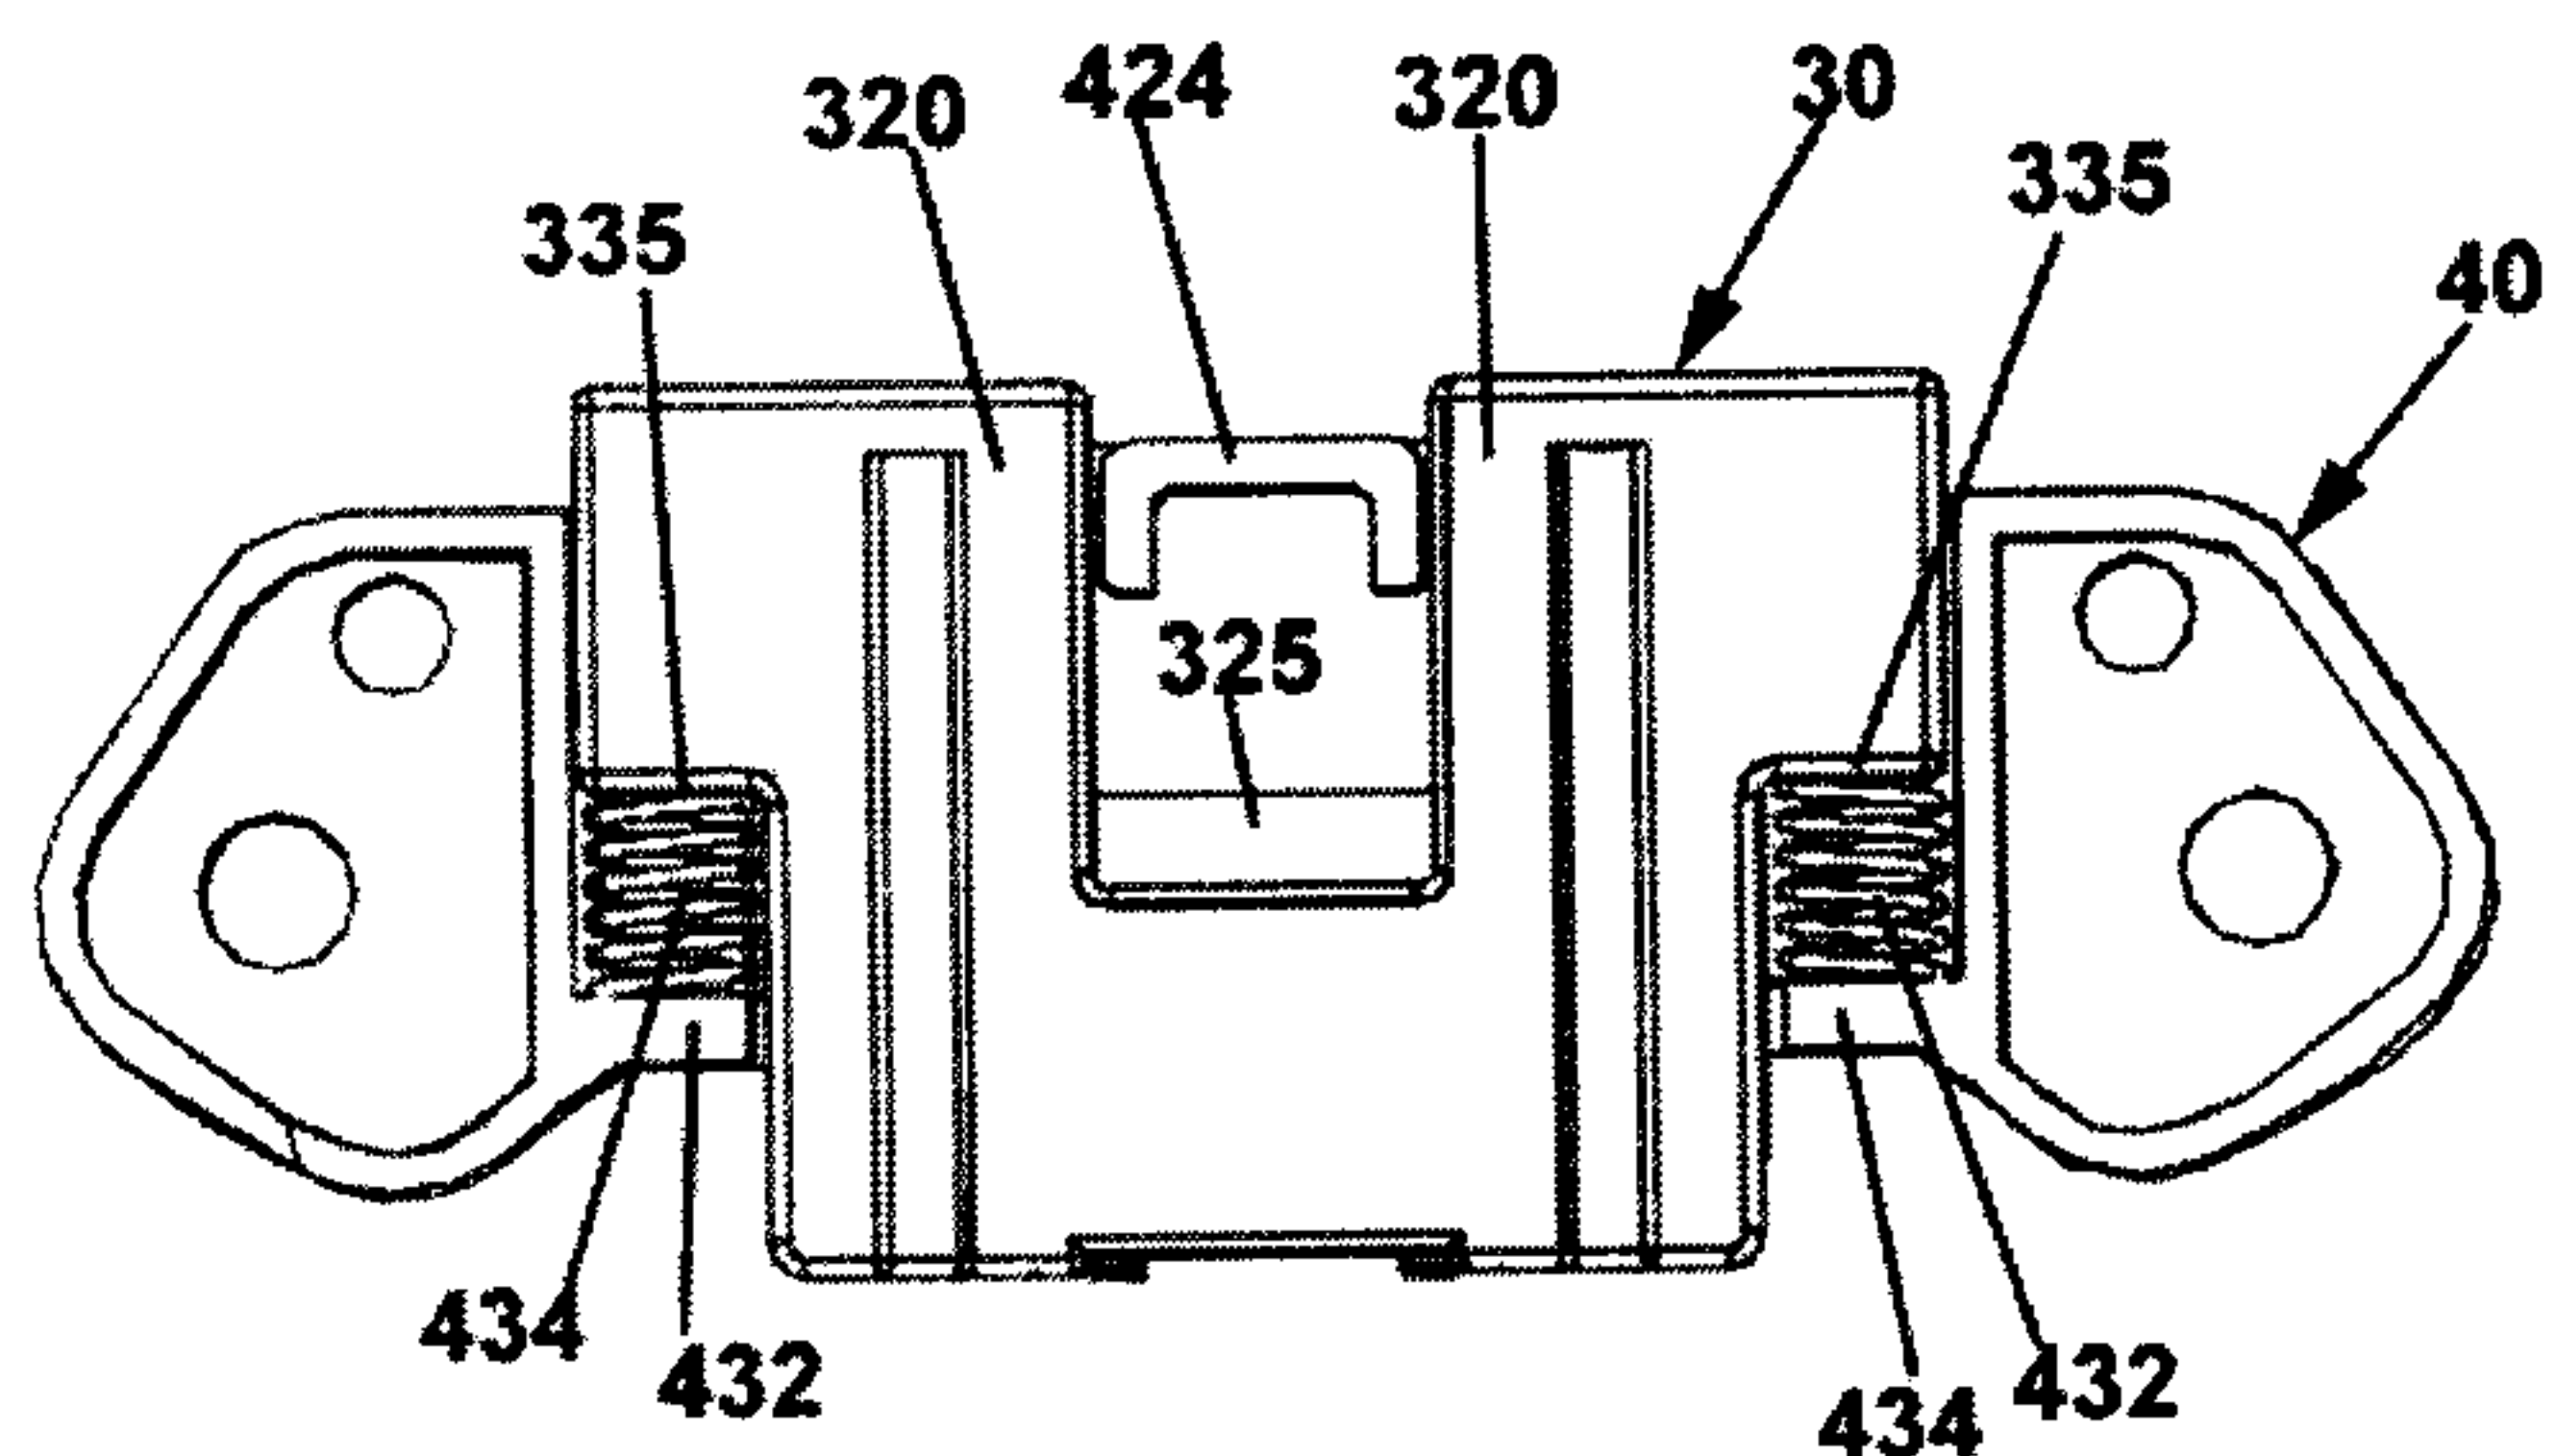

5/7

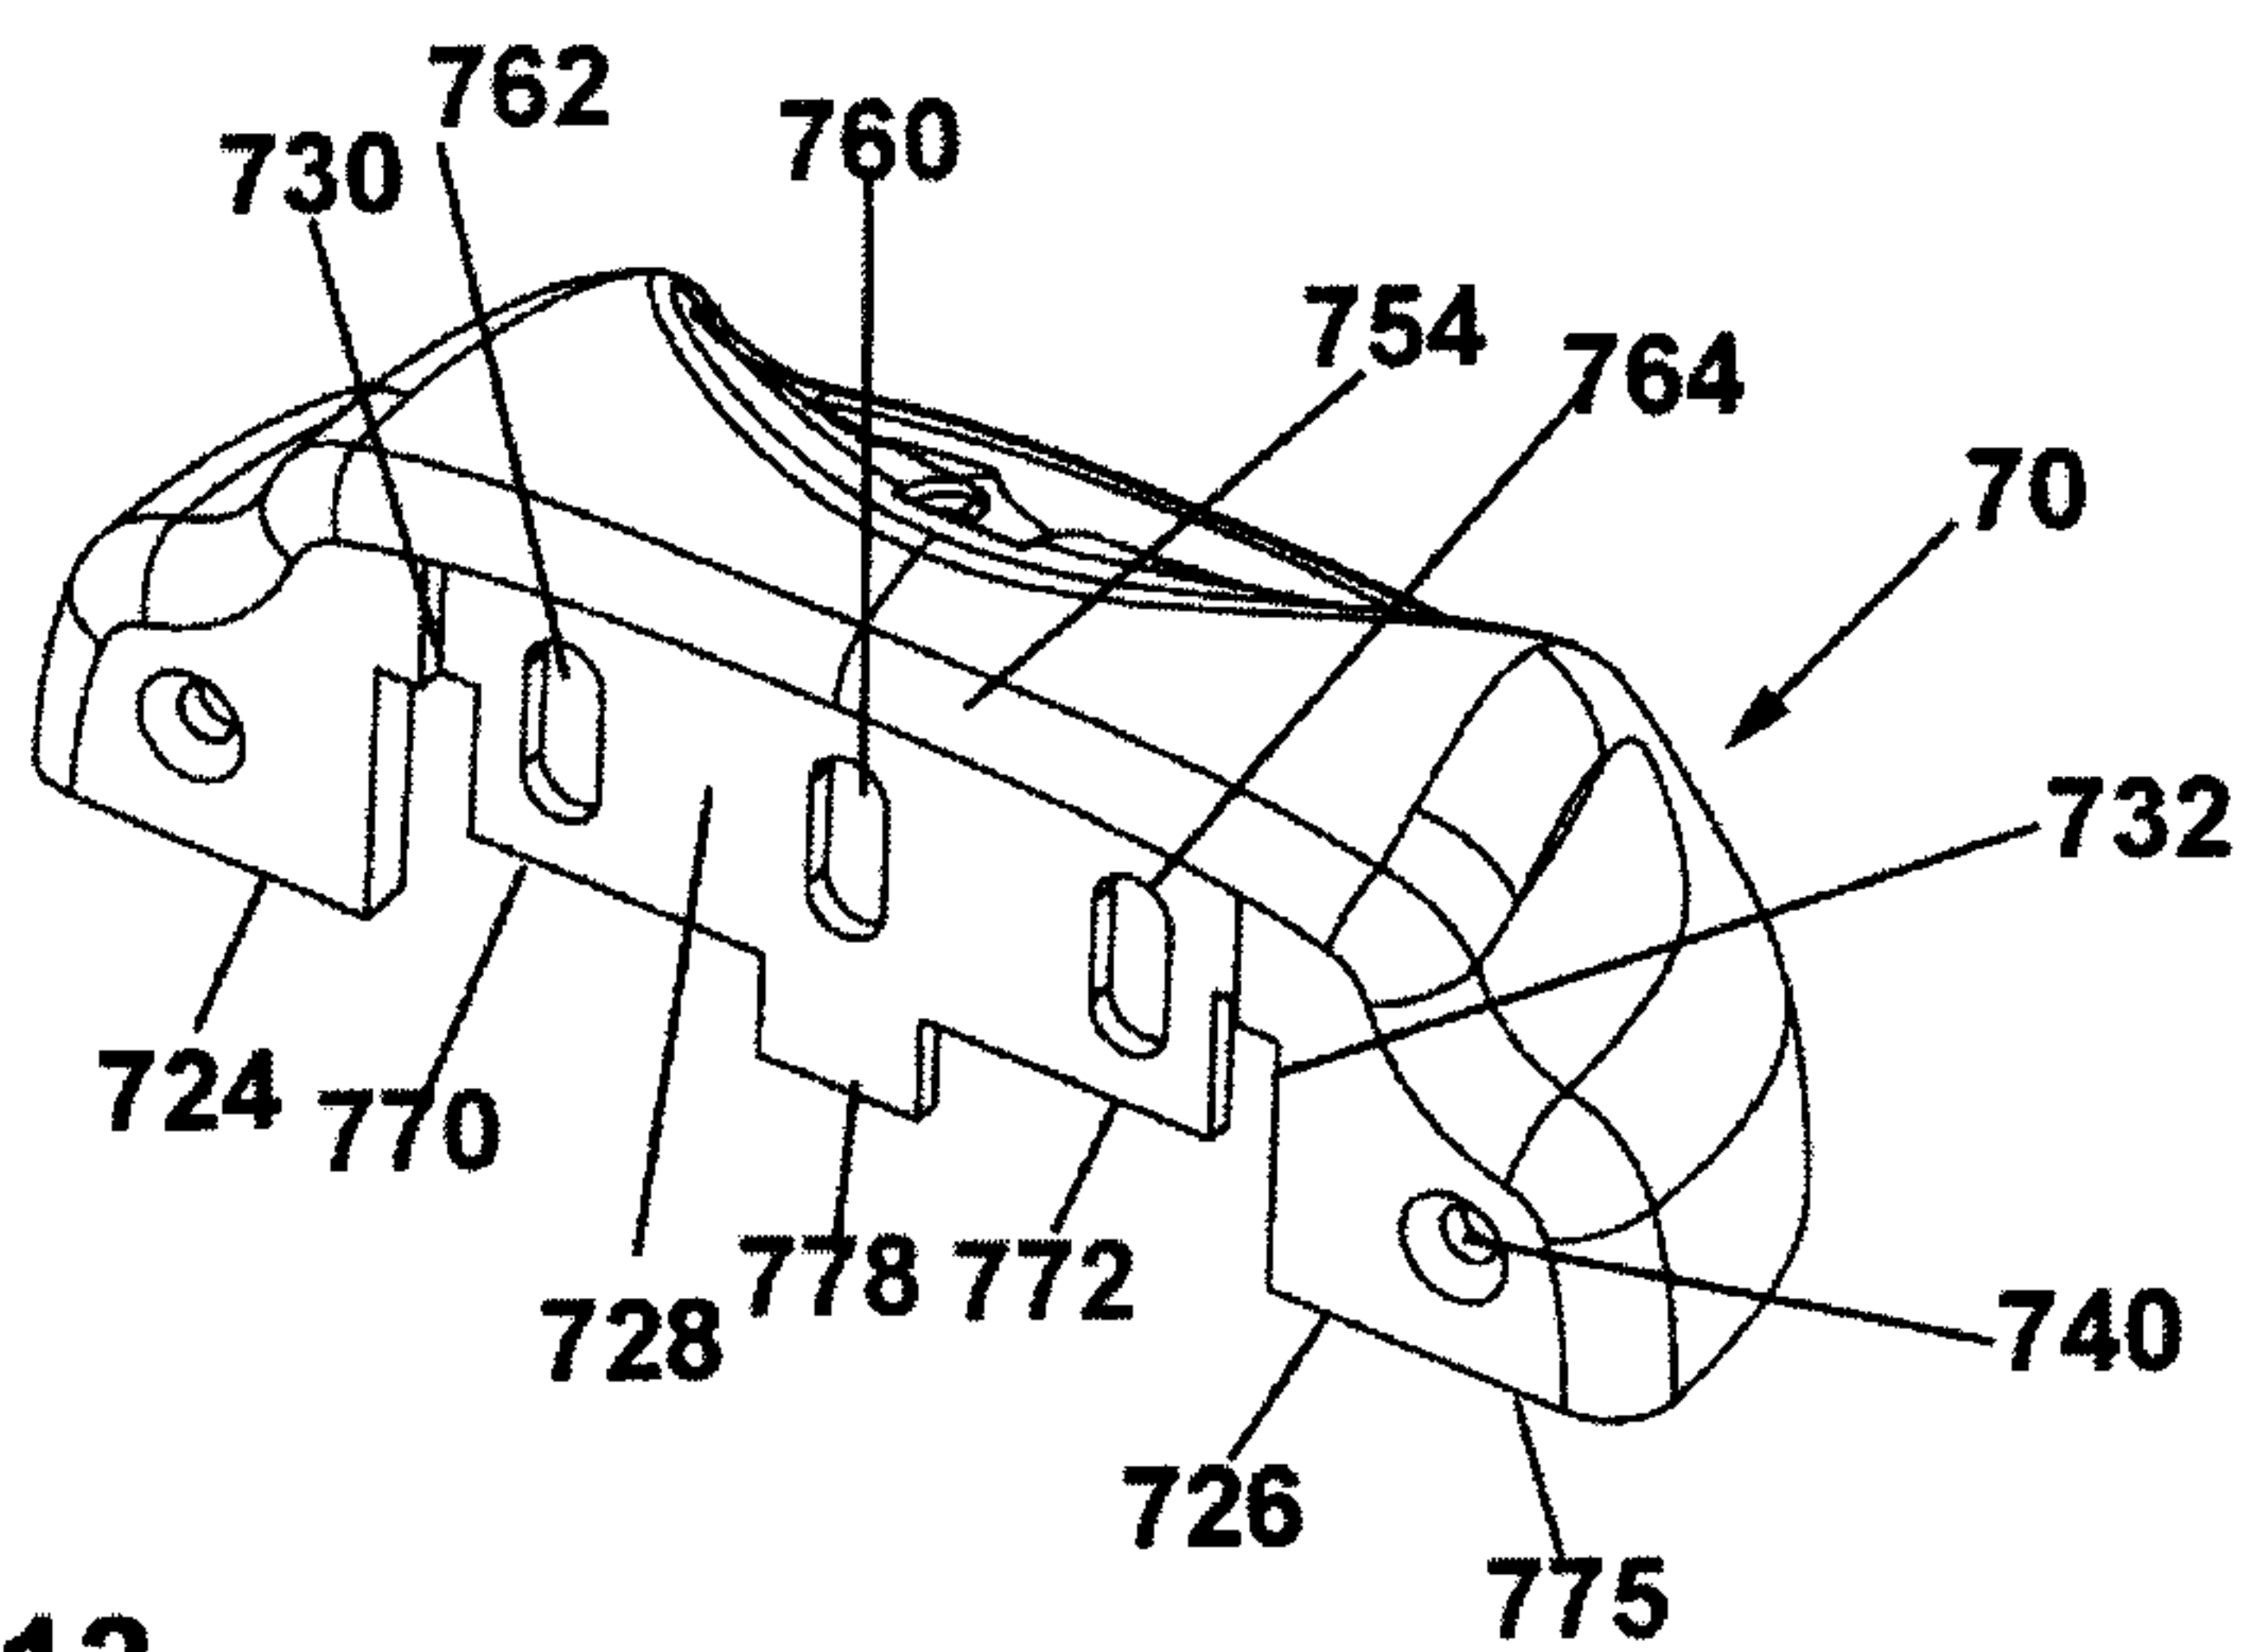


Fig. 12

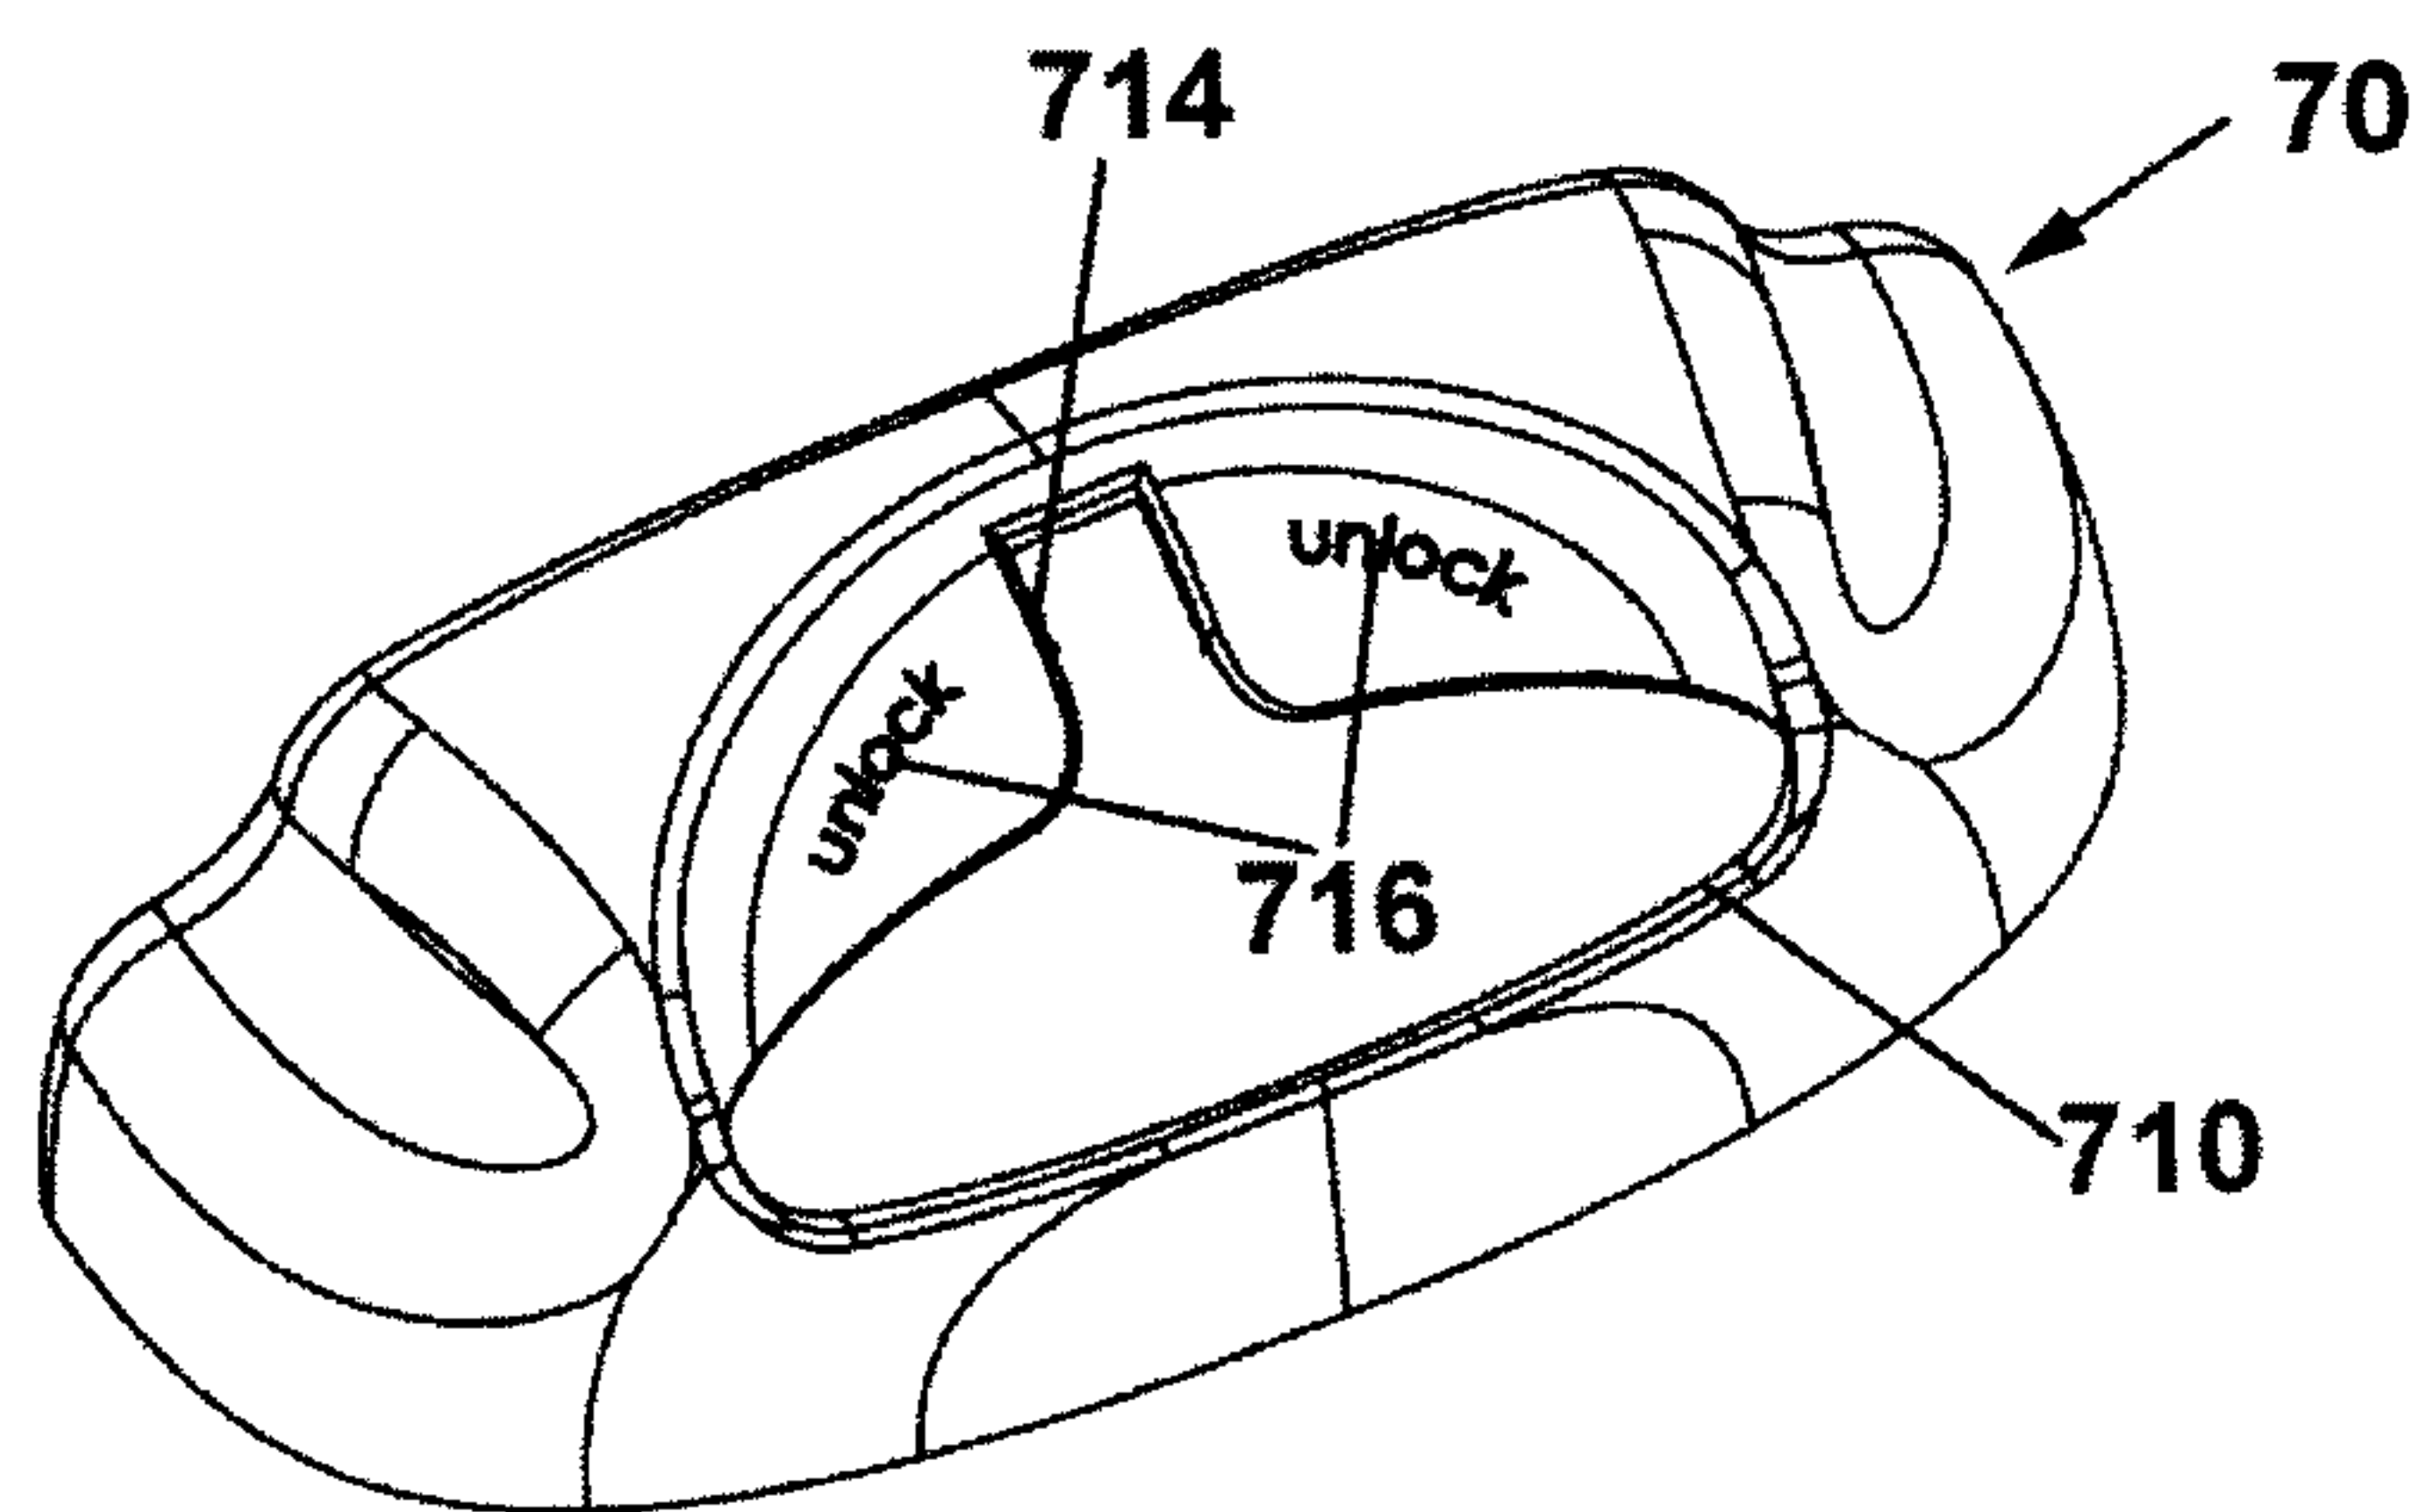


Fig. 13








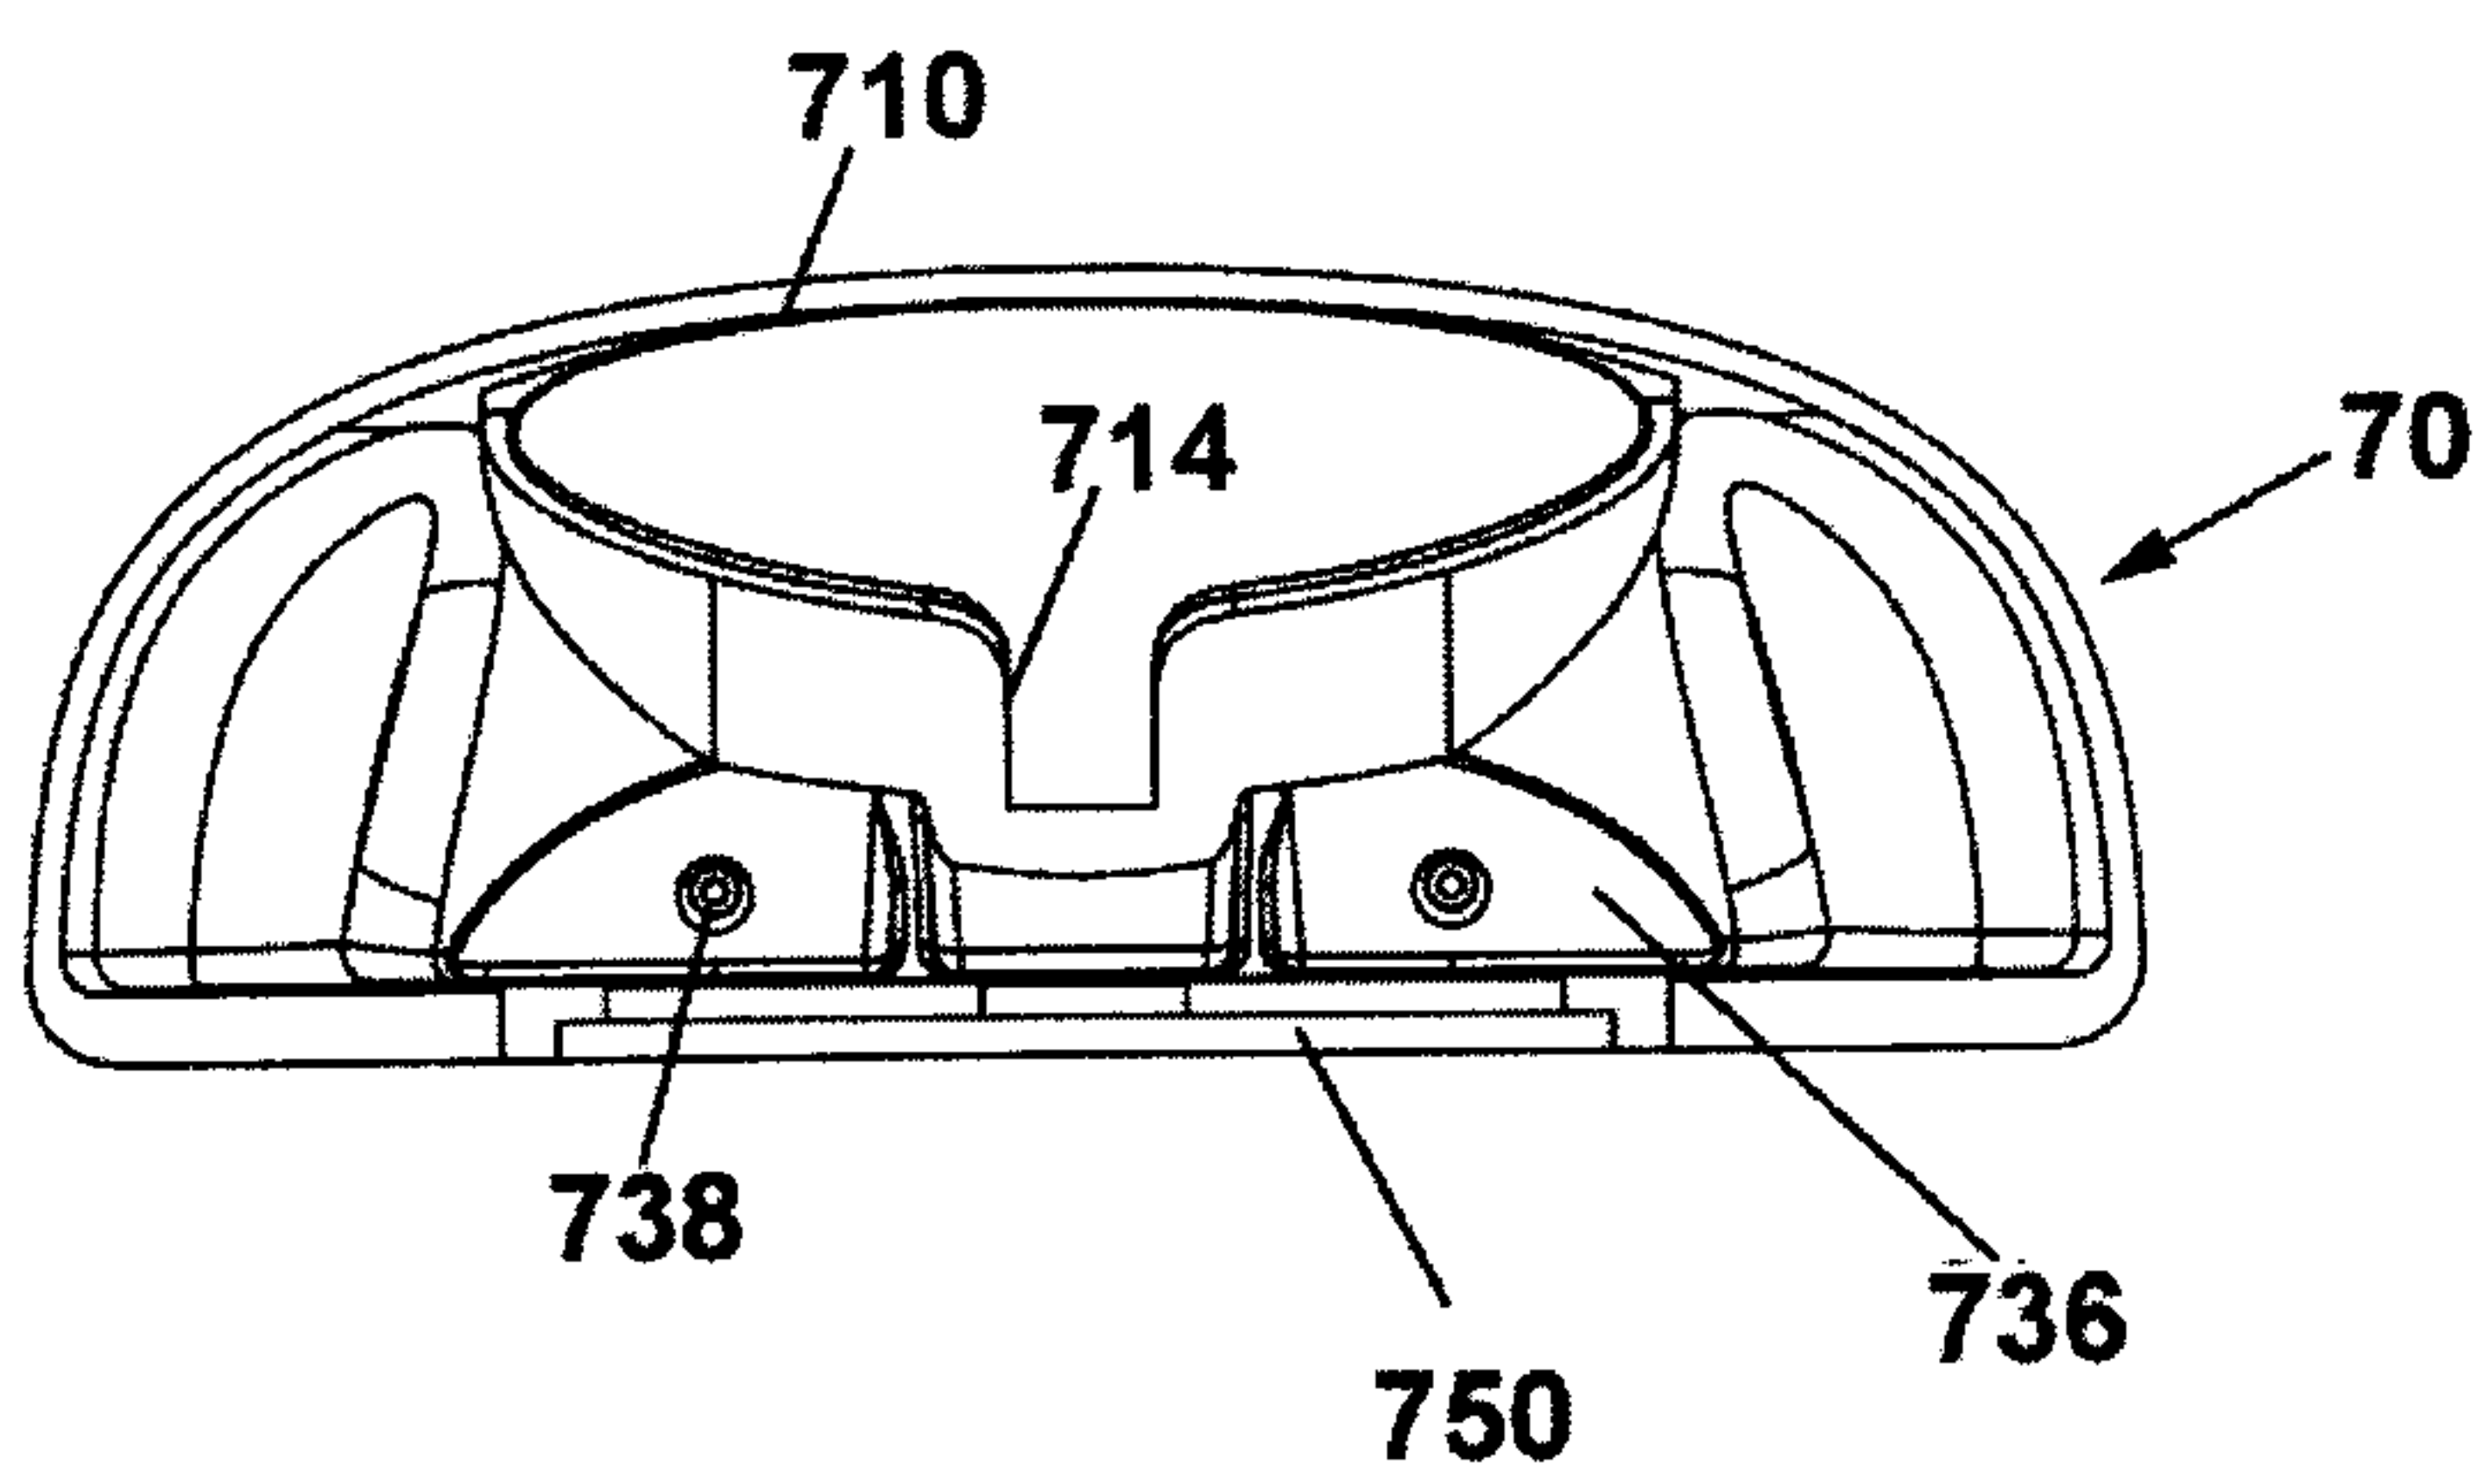


Fig. 14

6/7

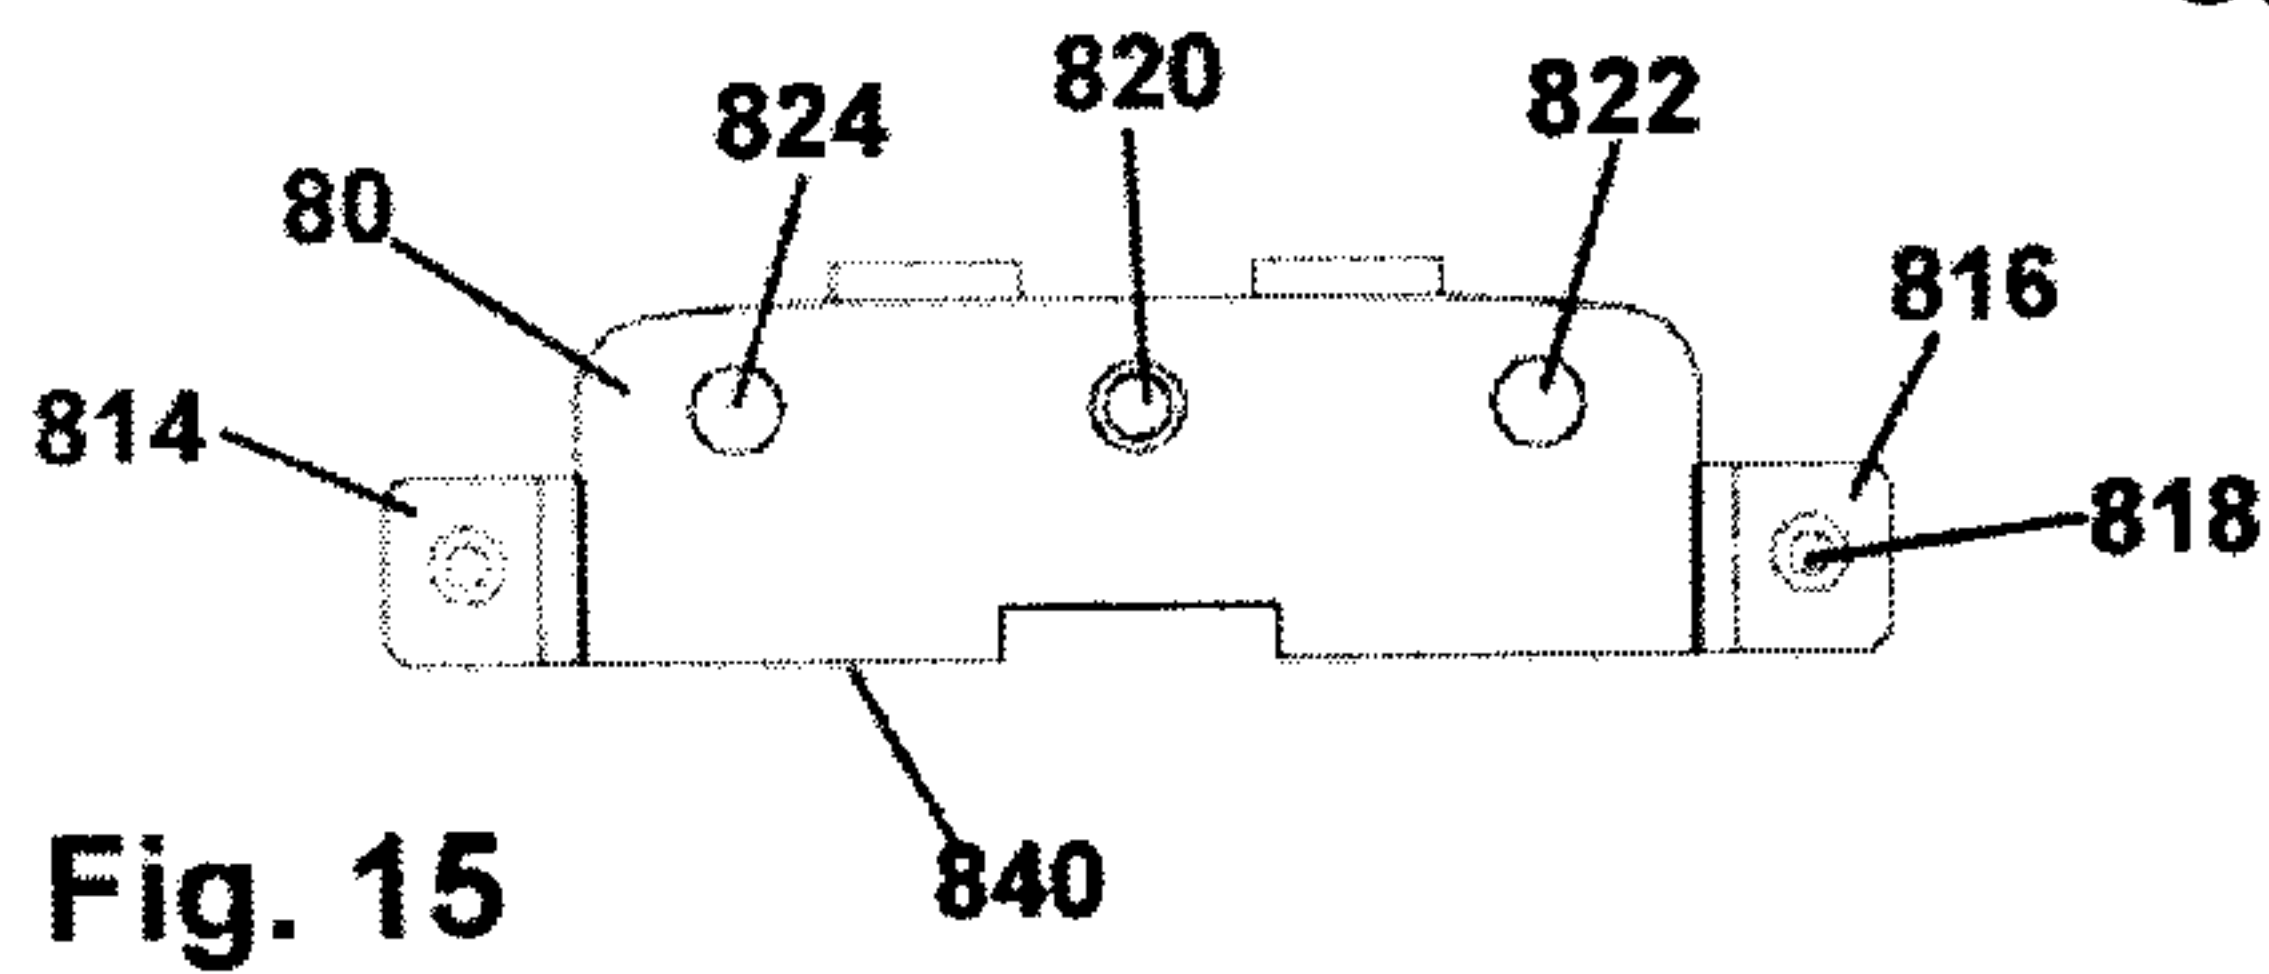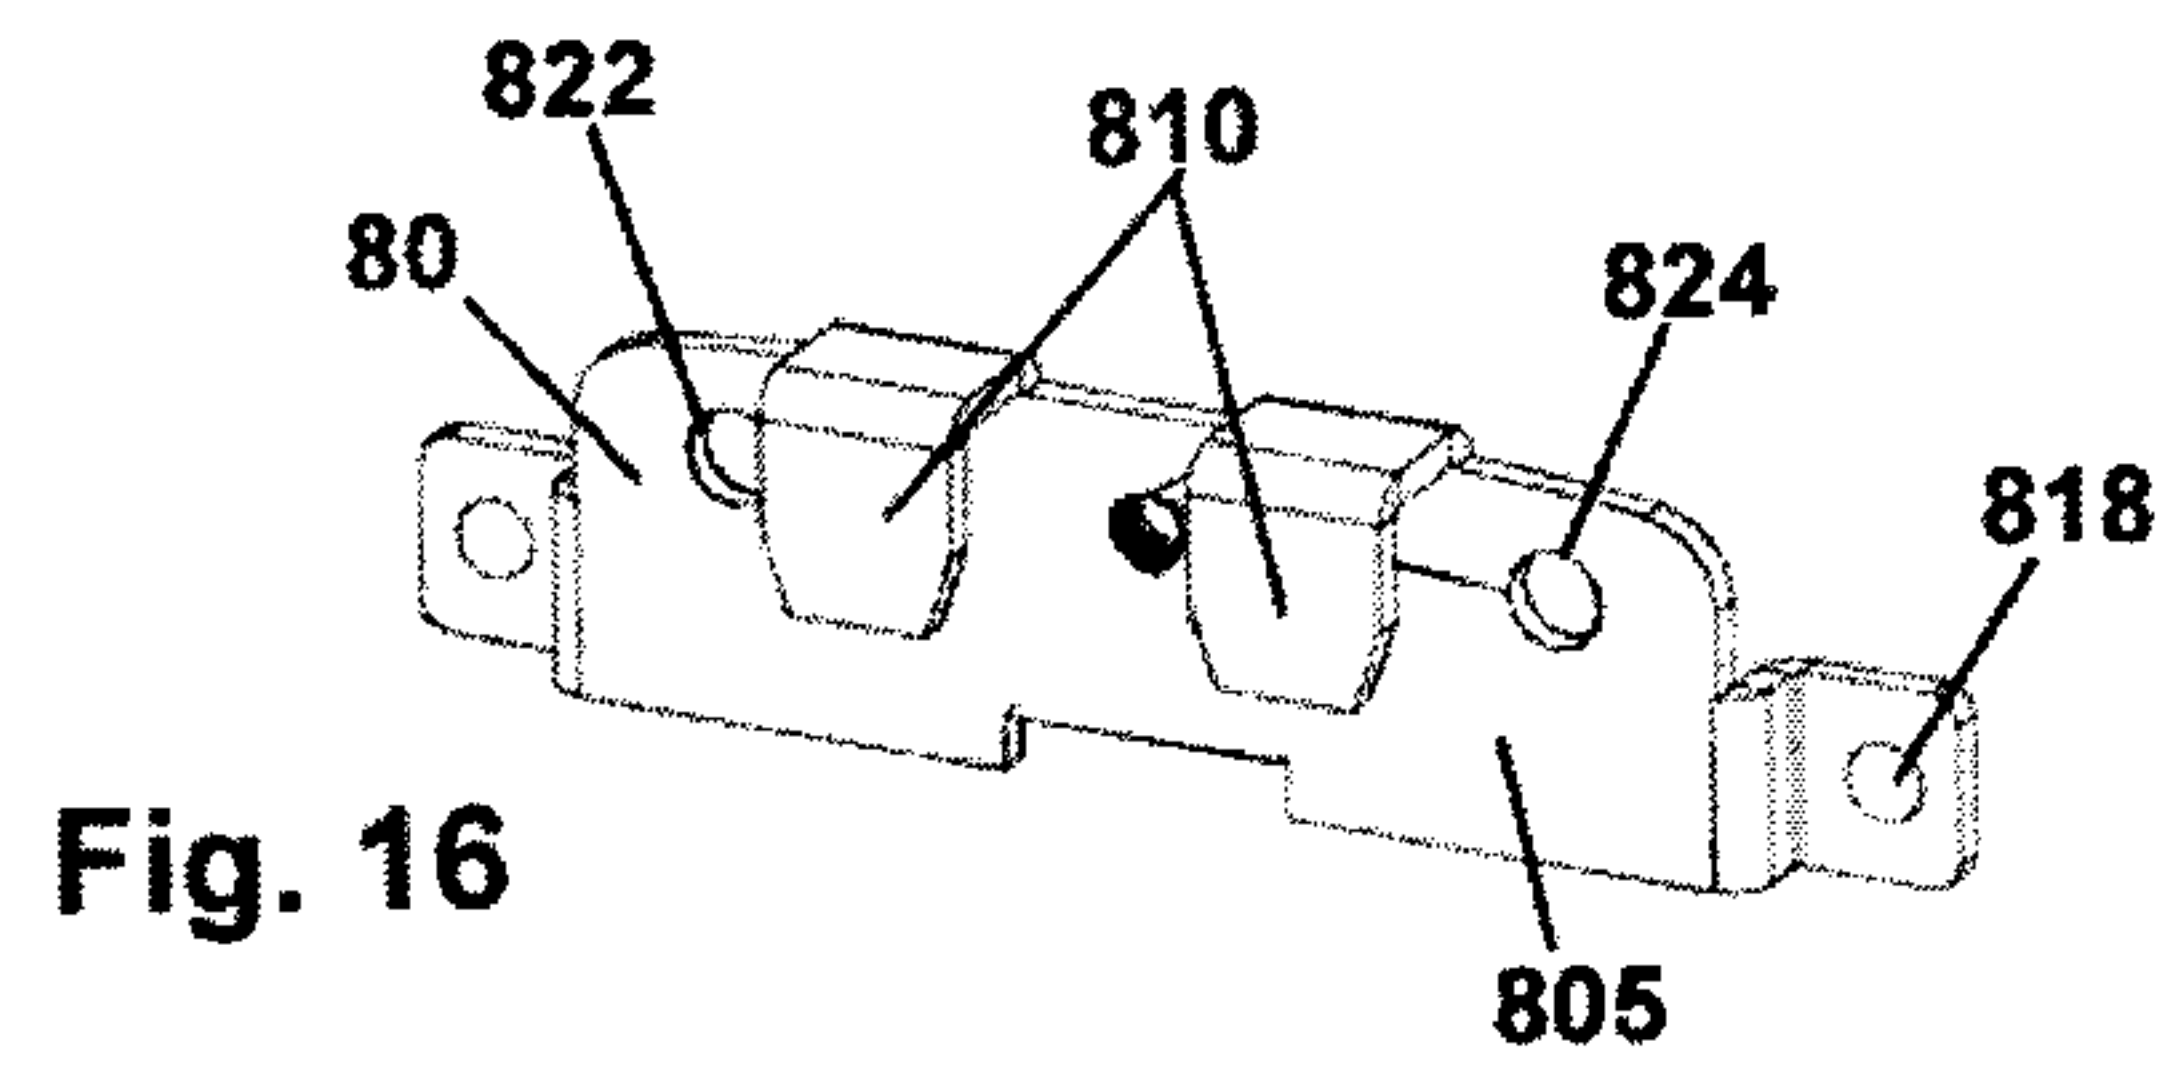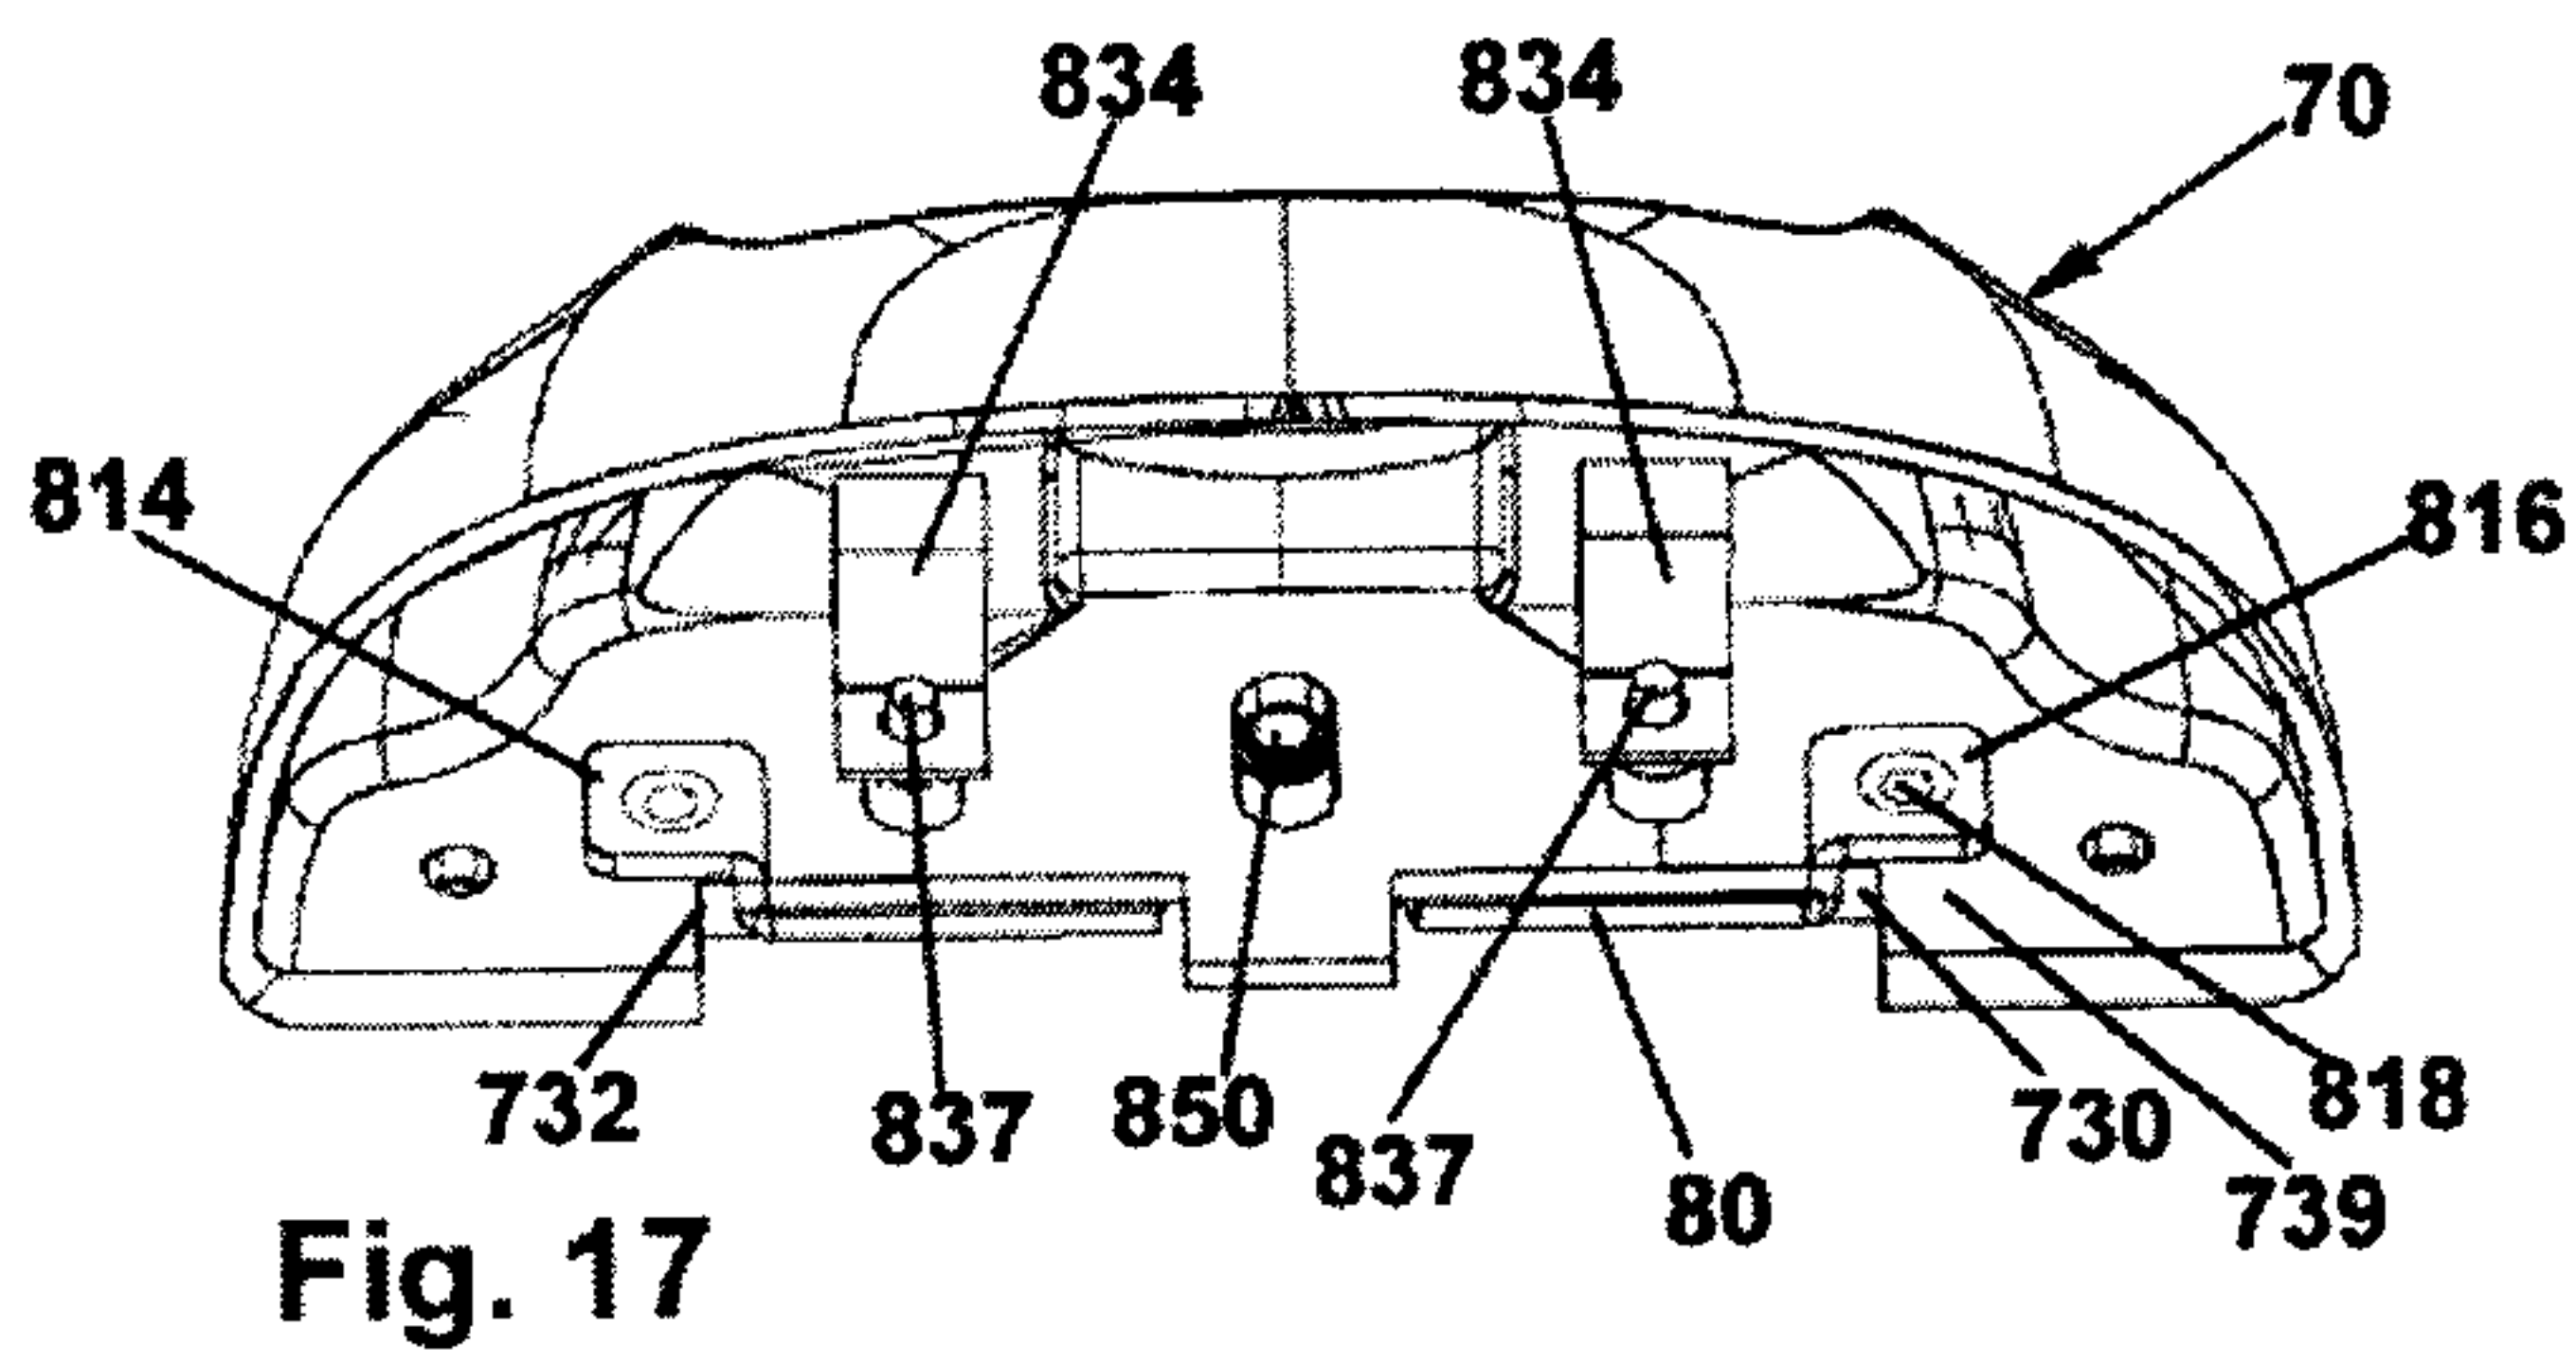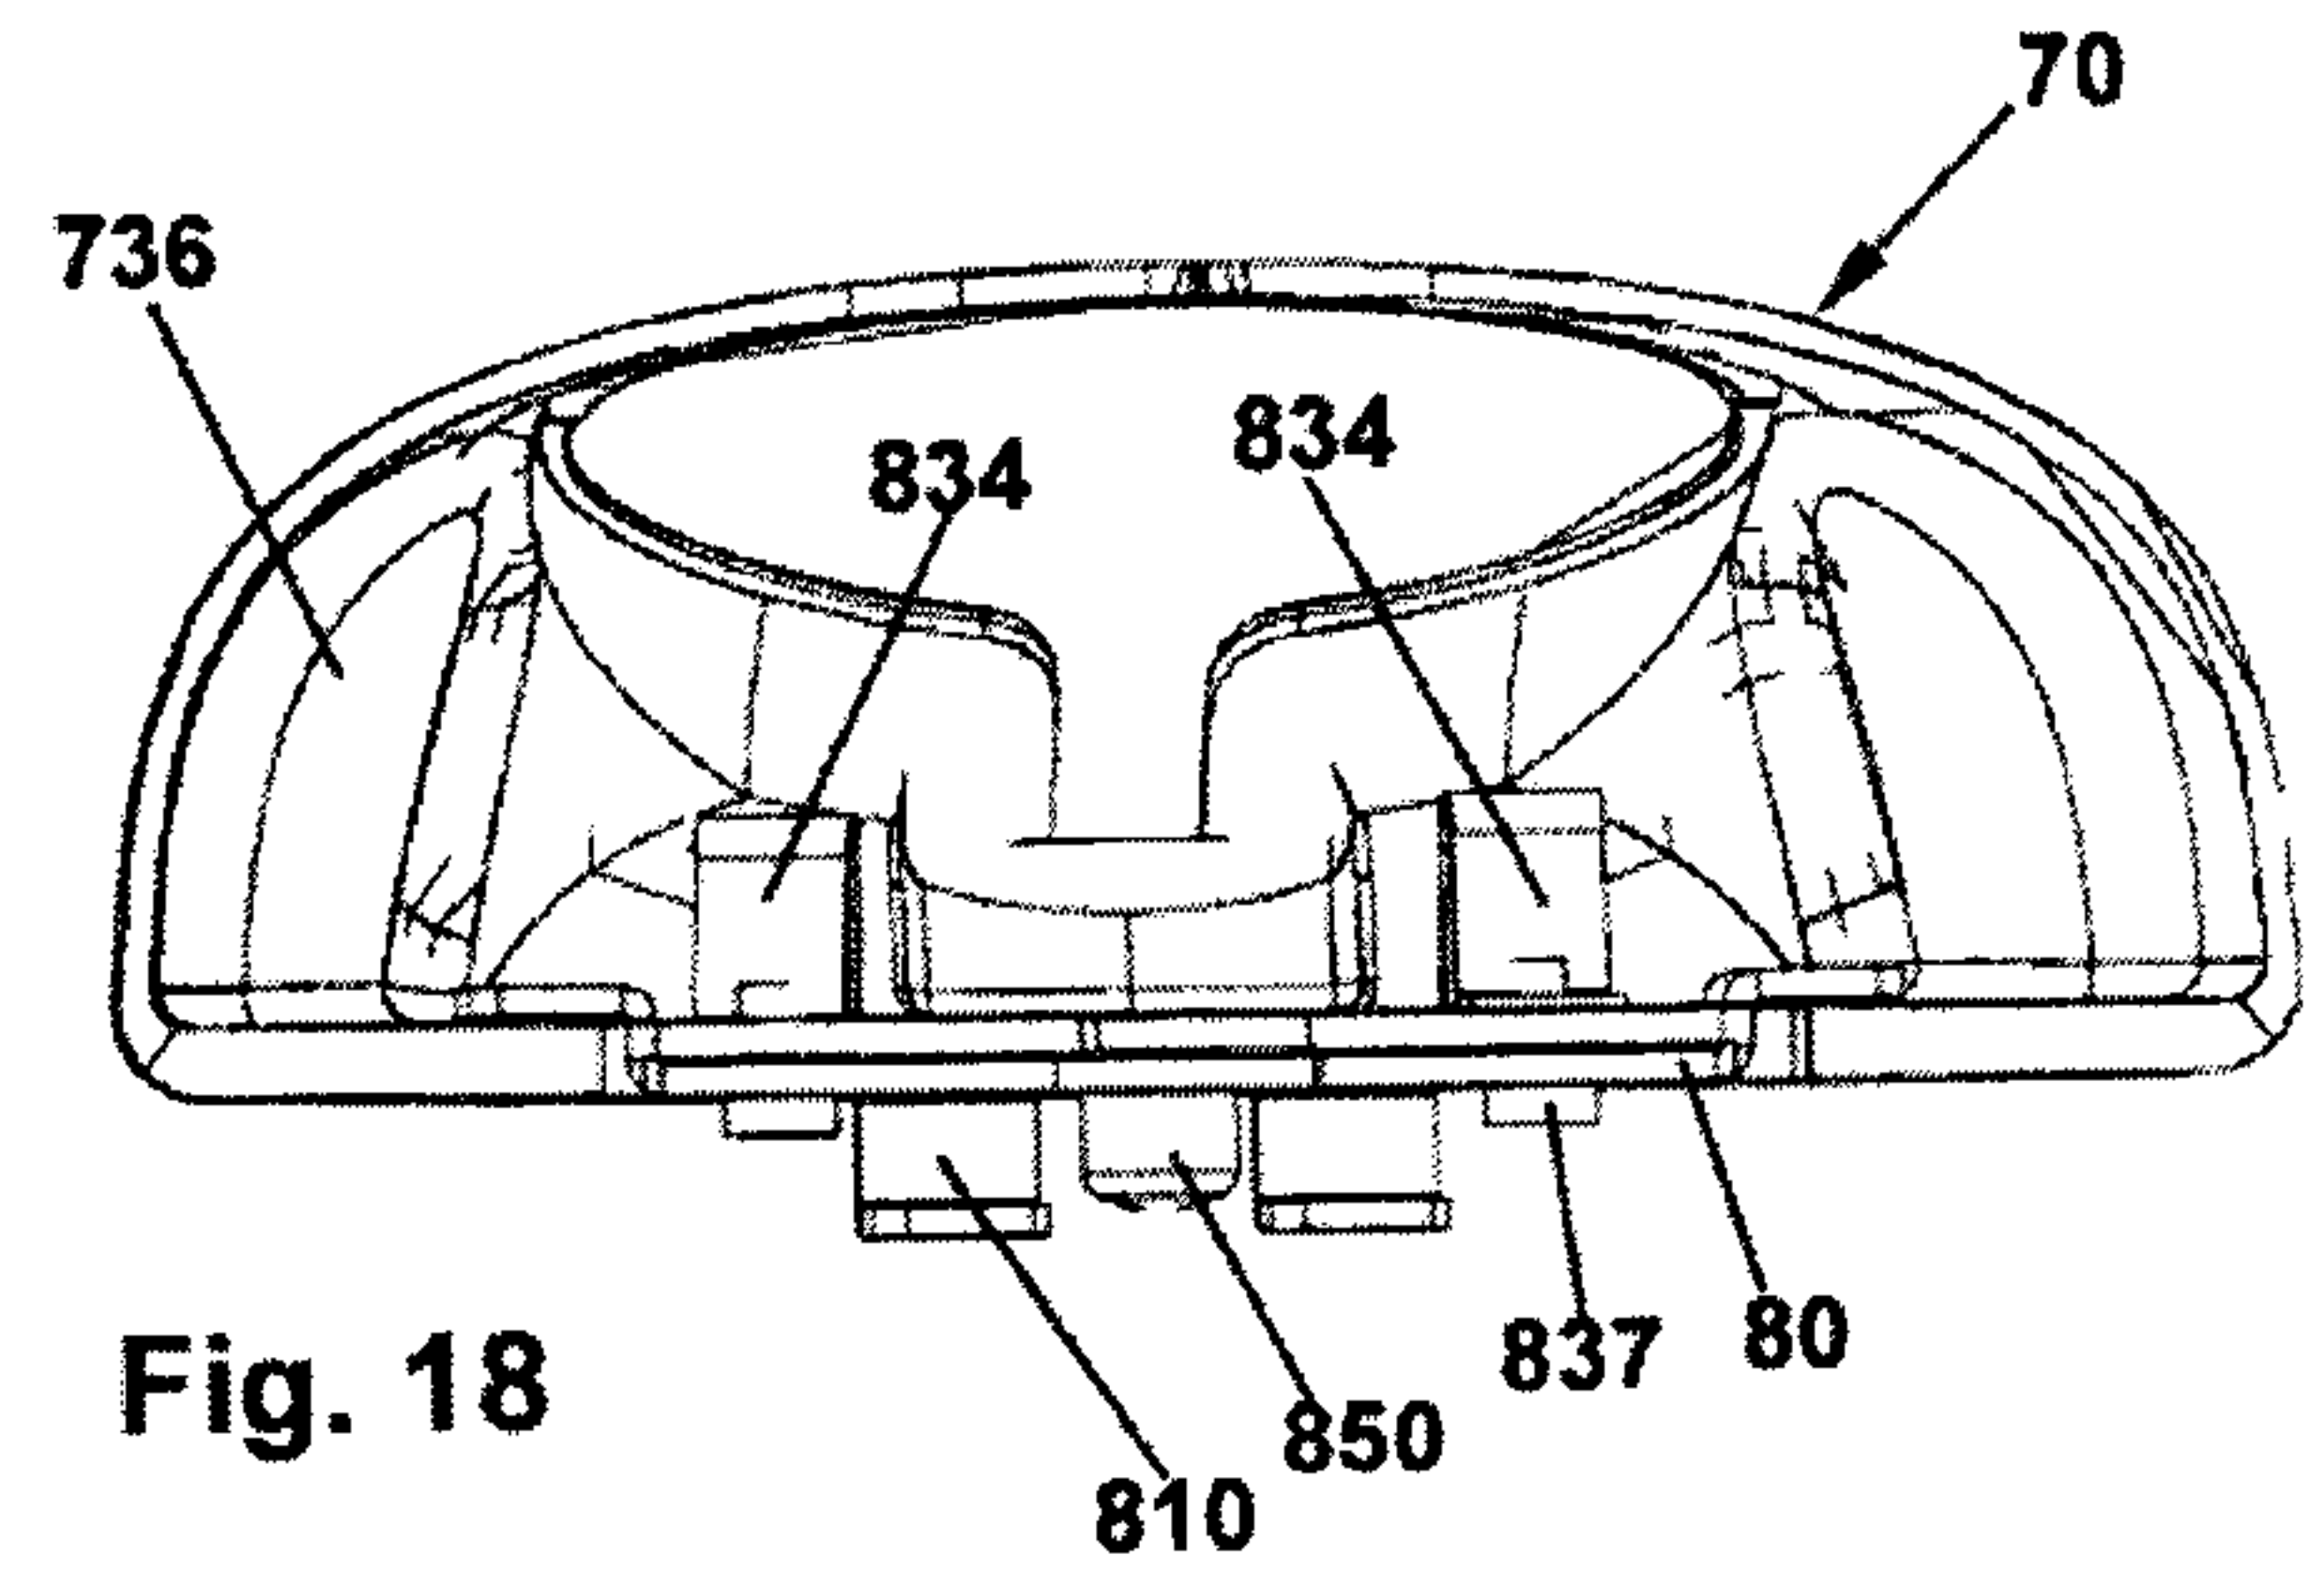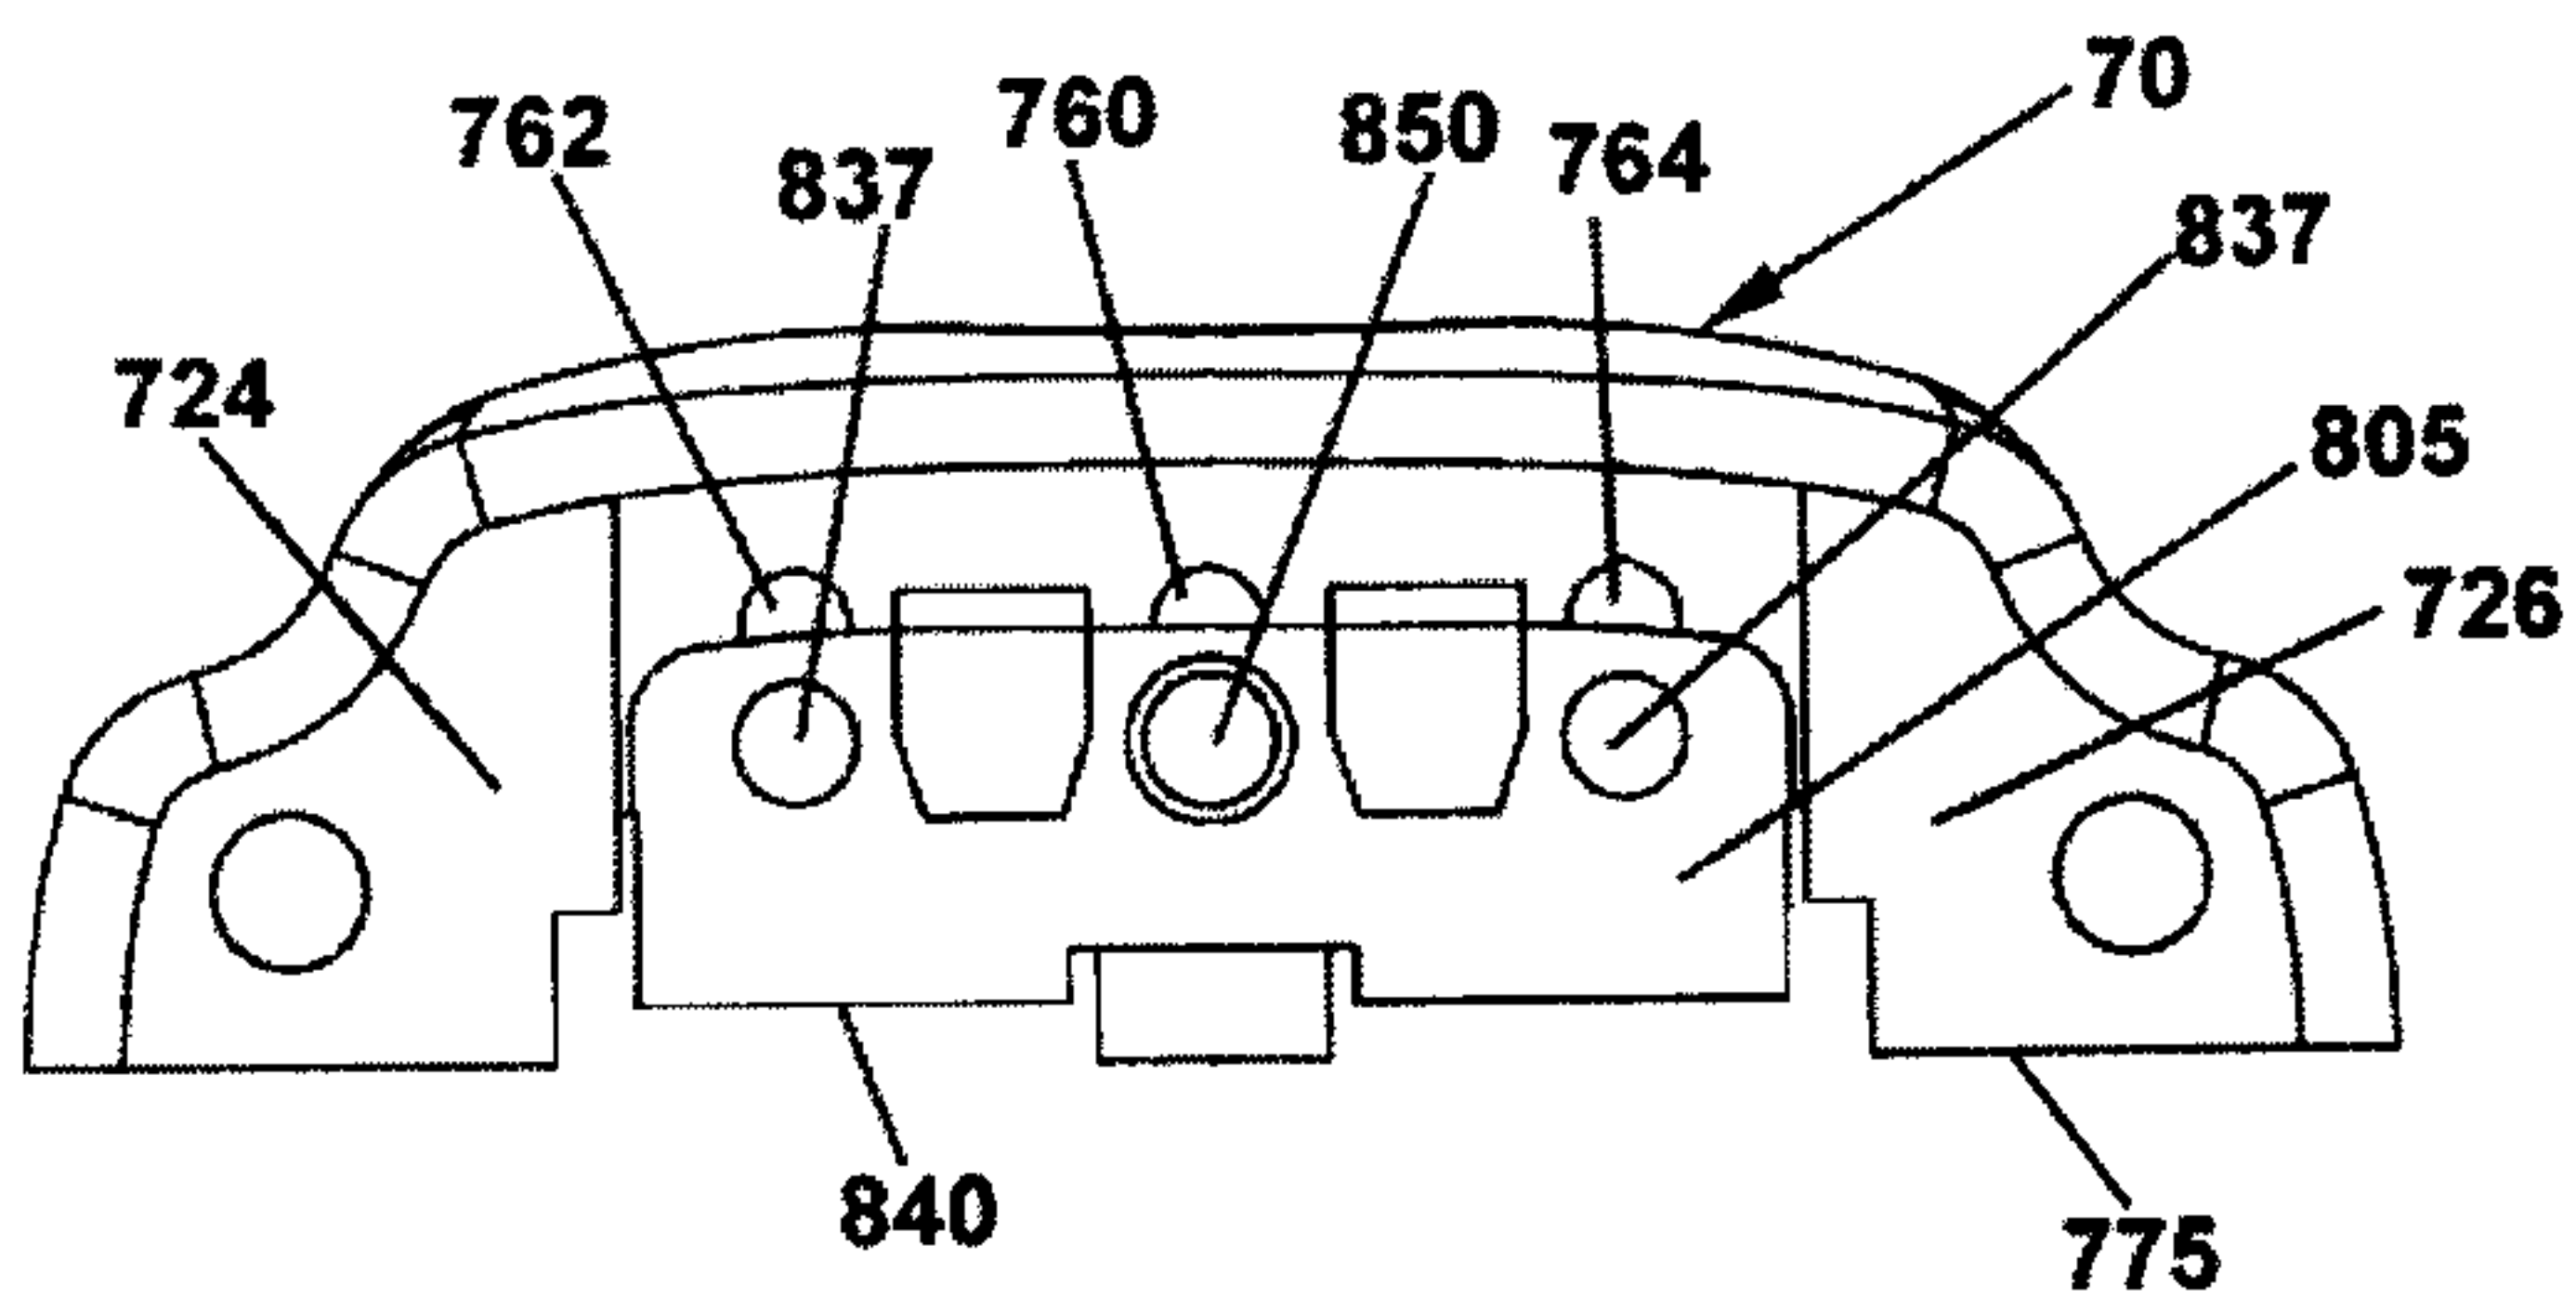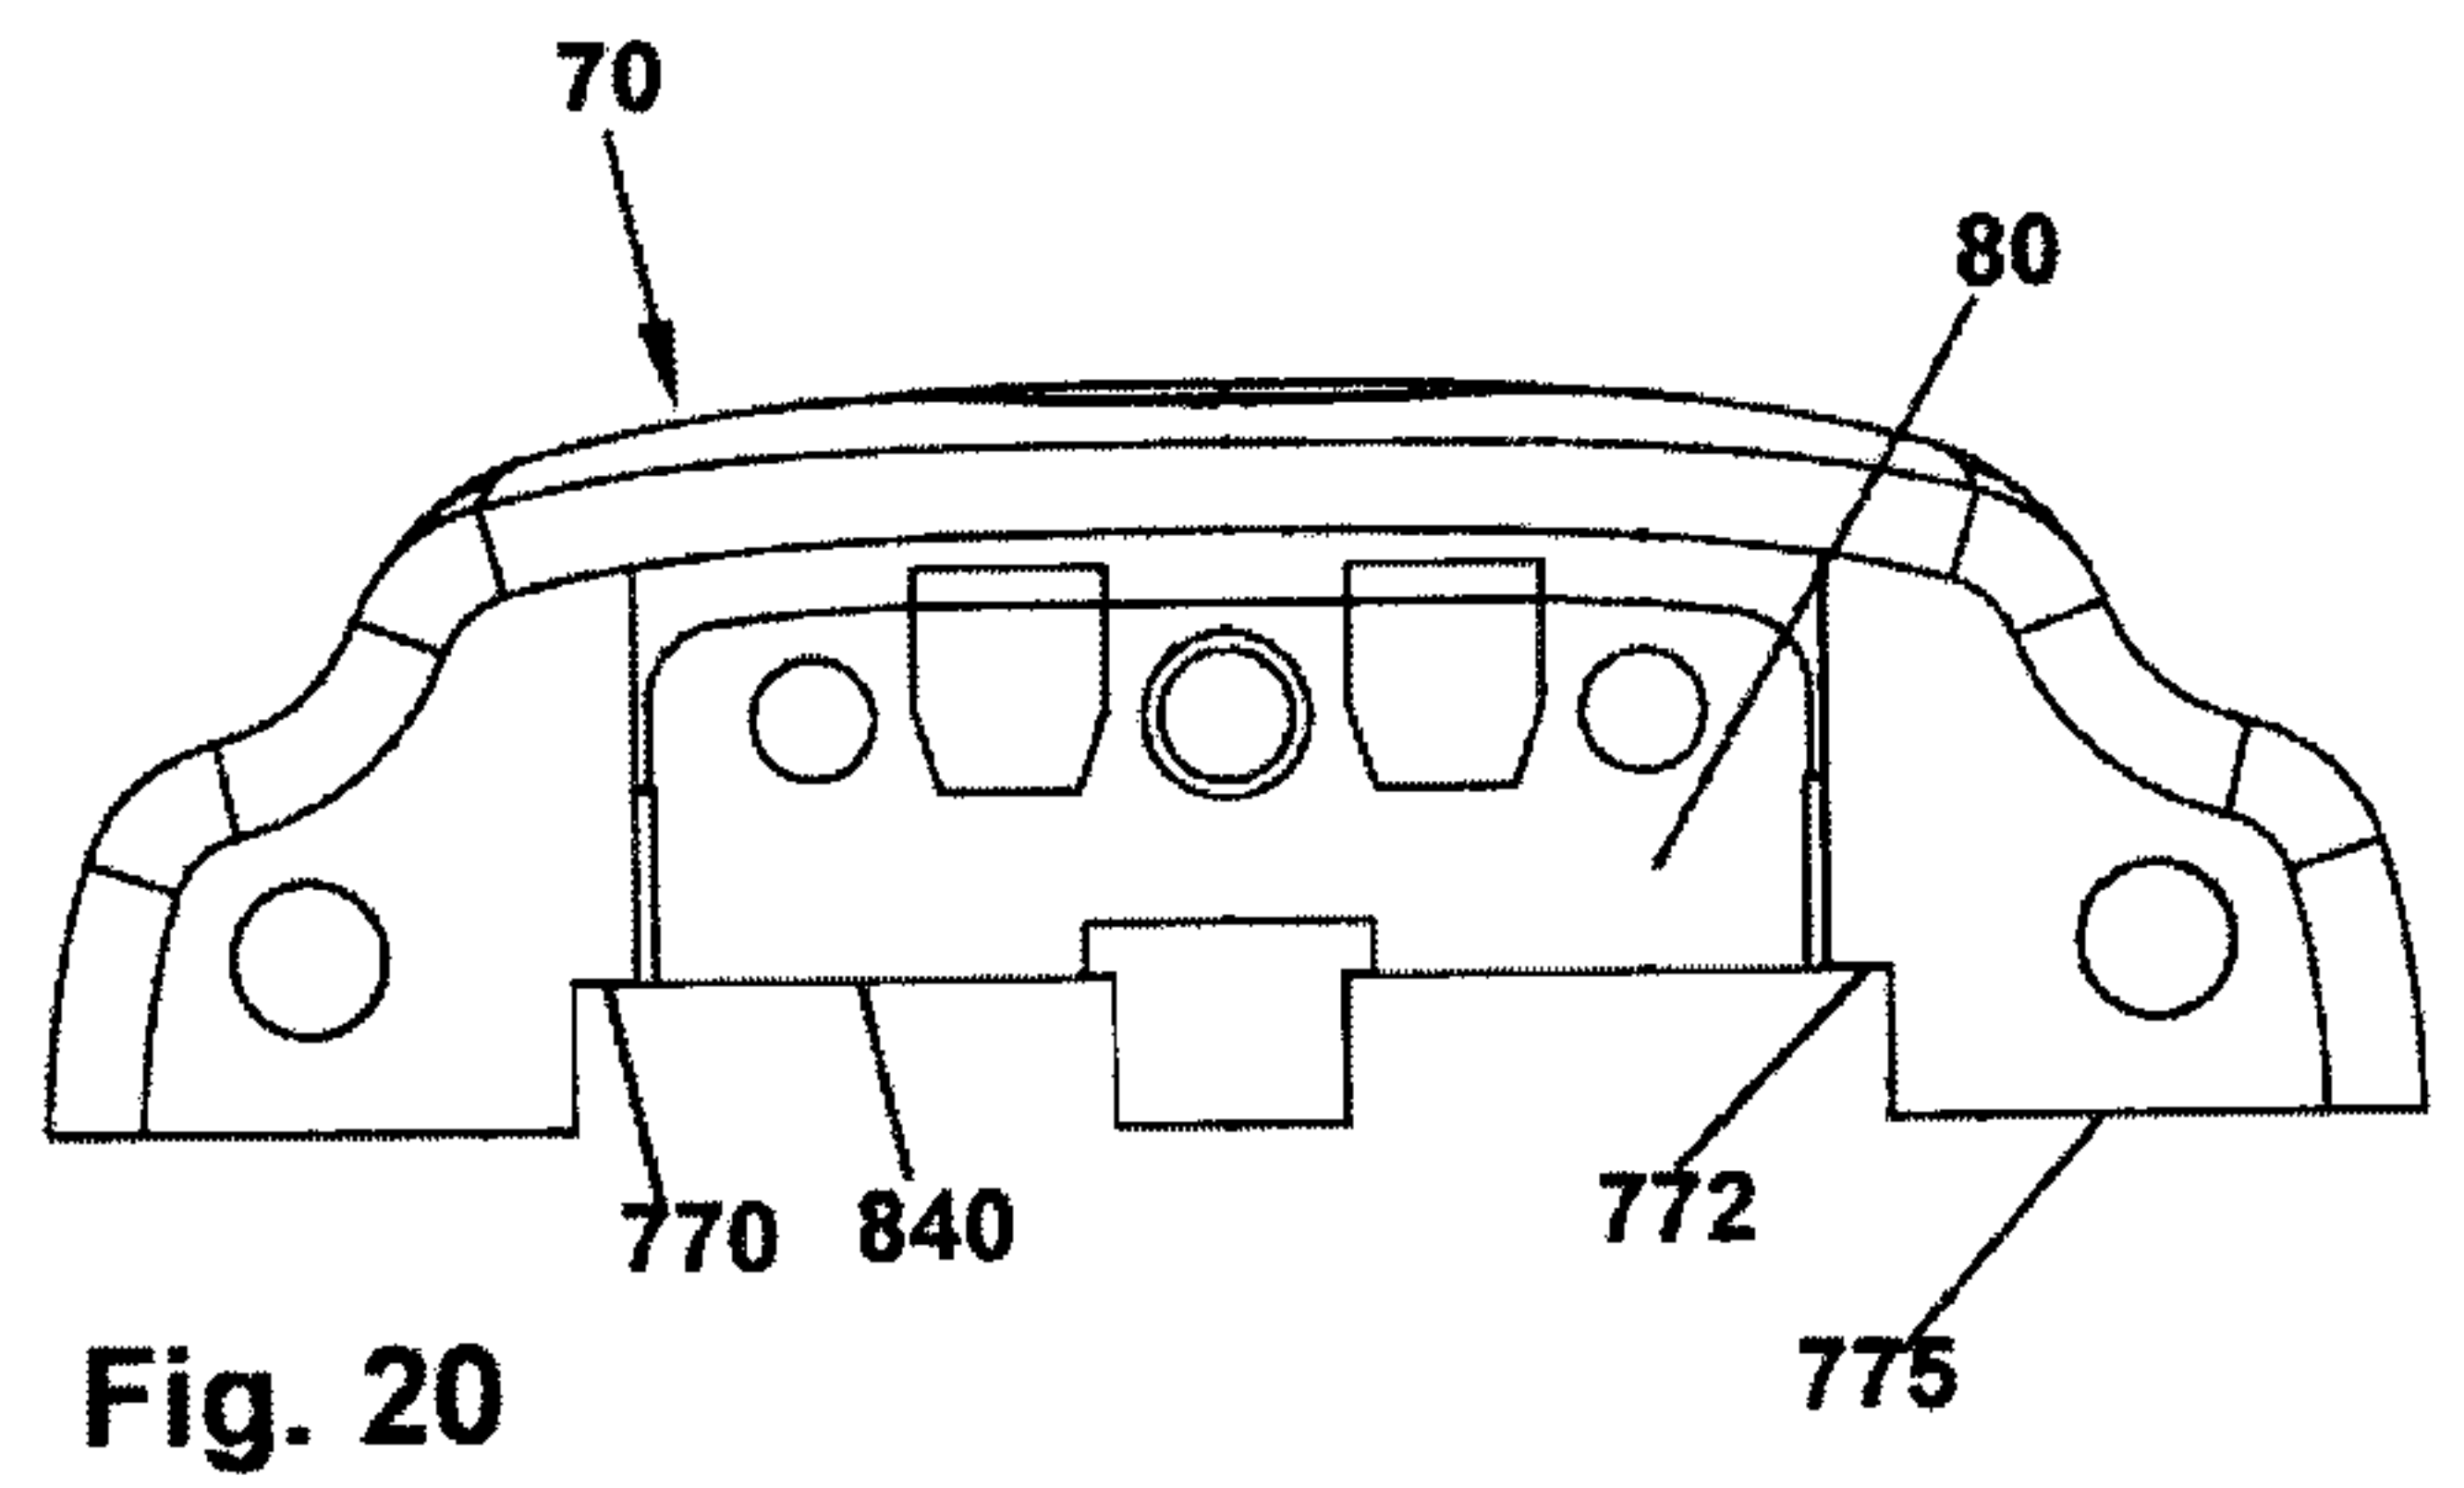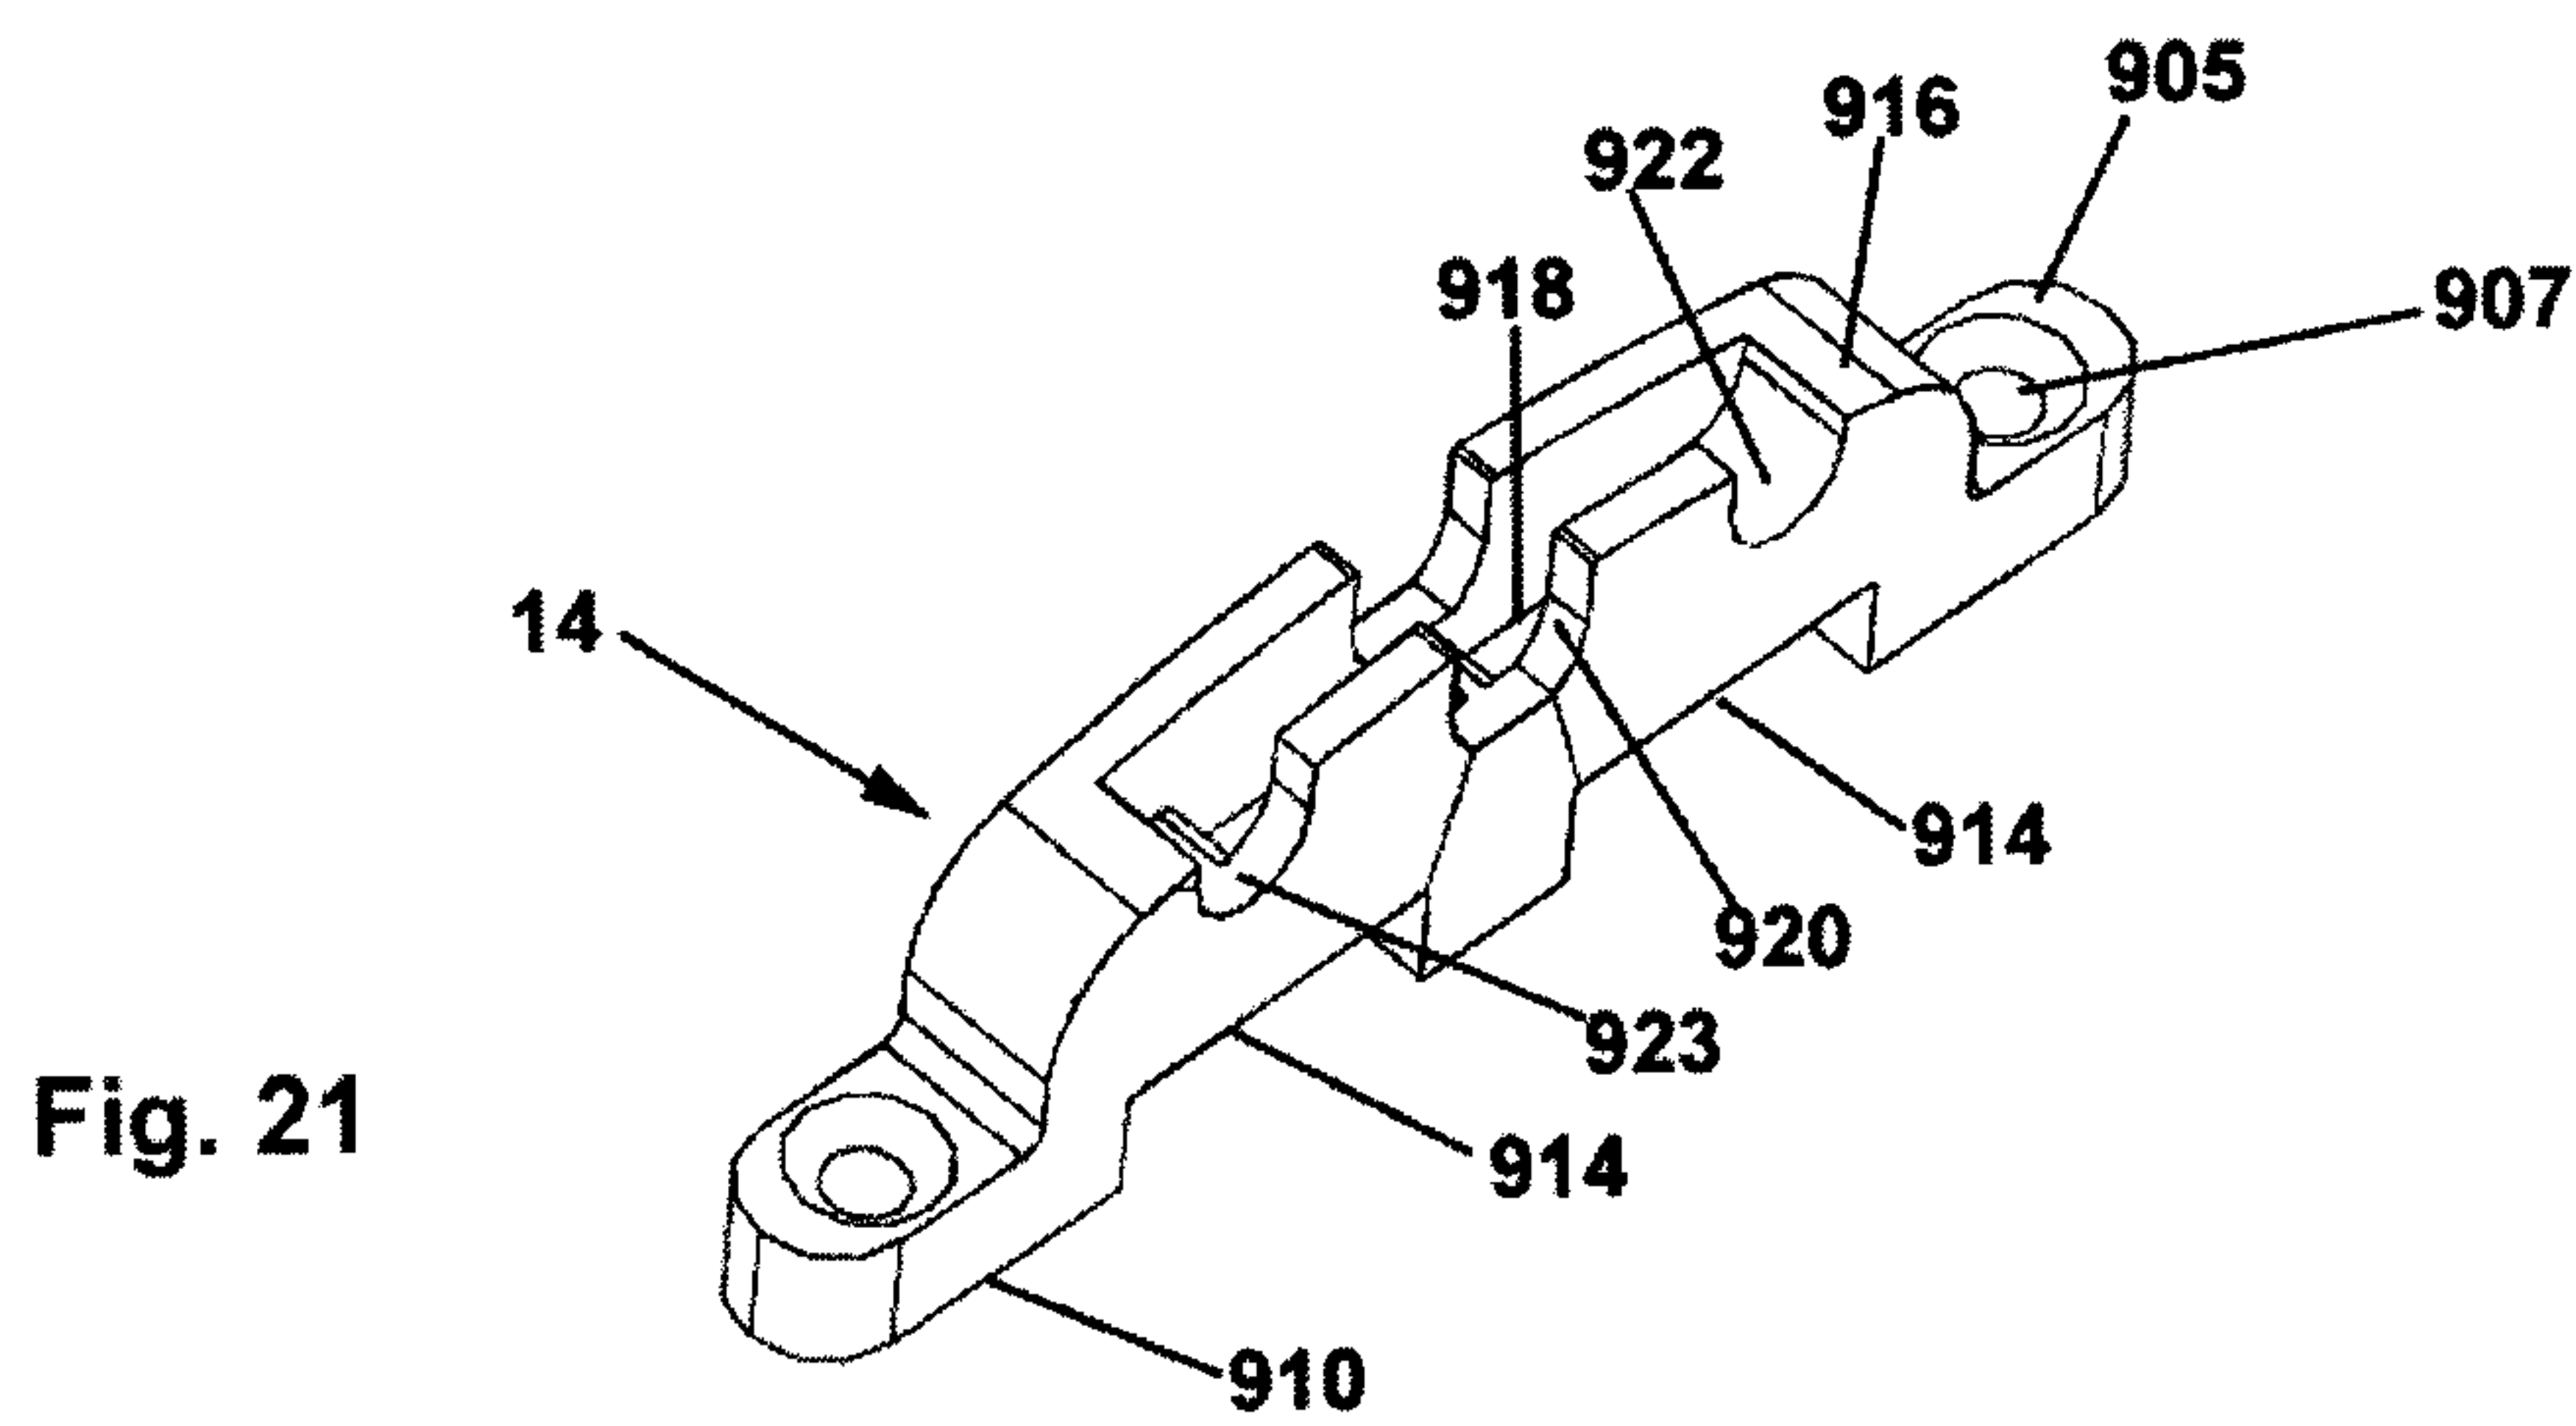

7/7

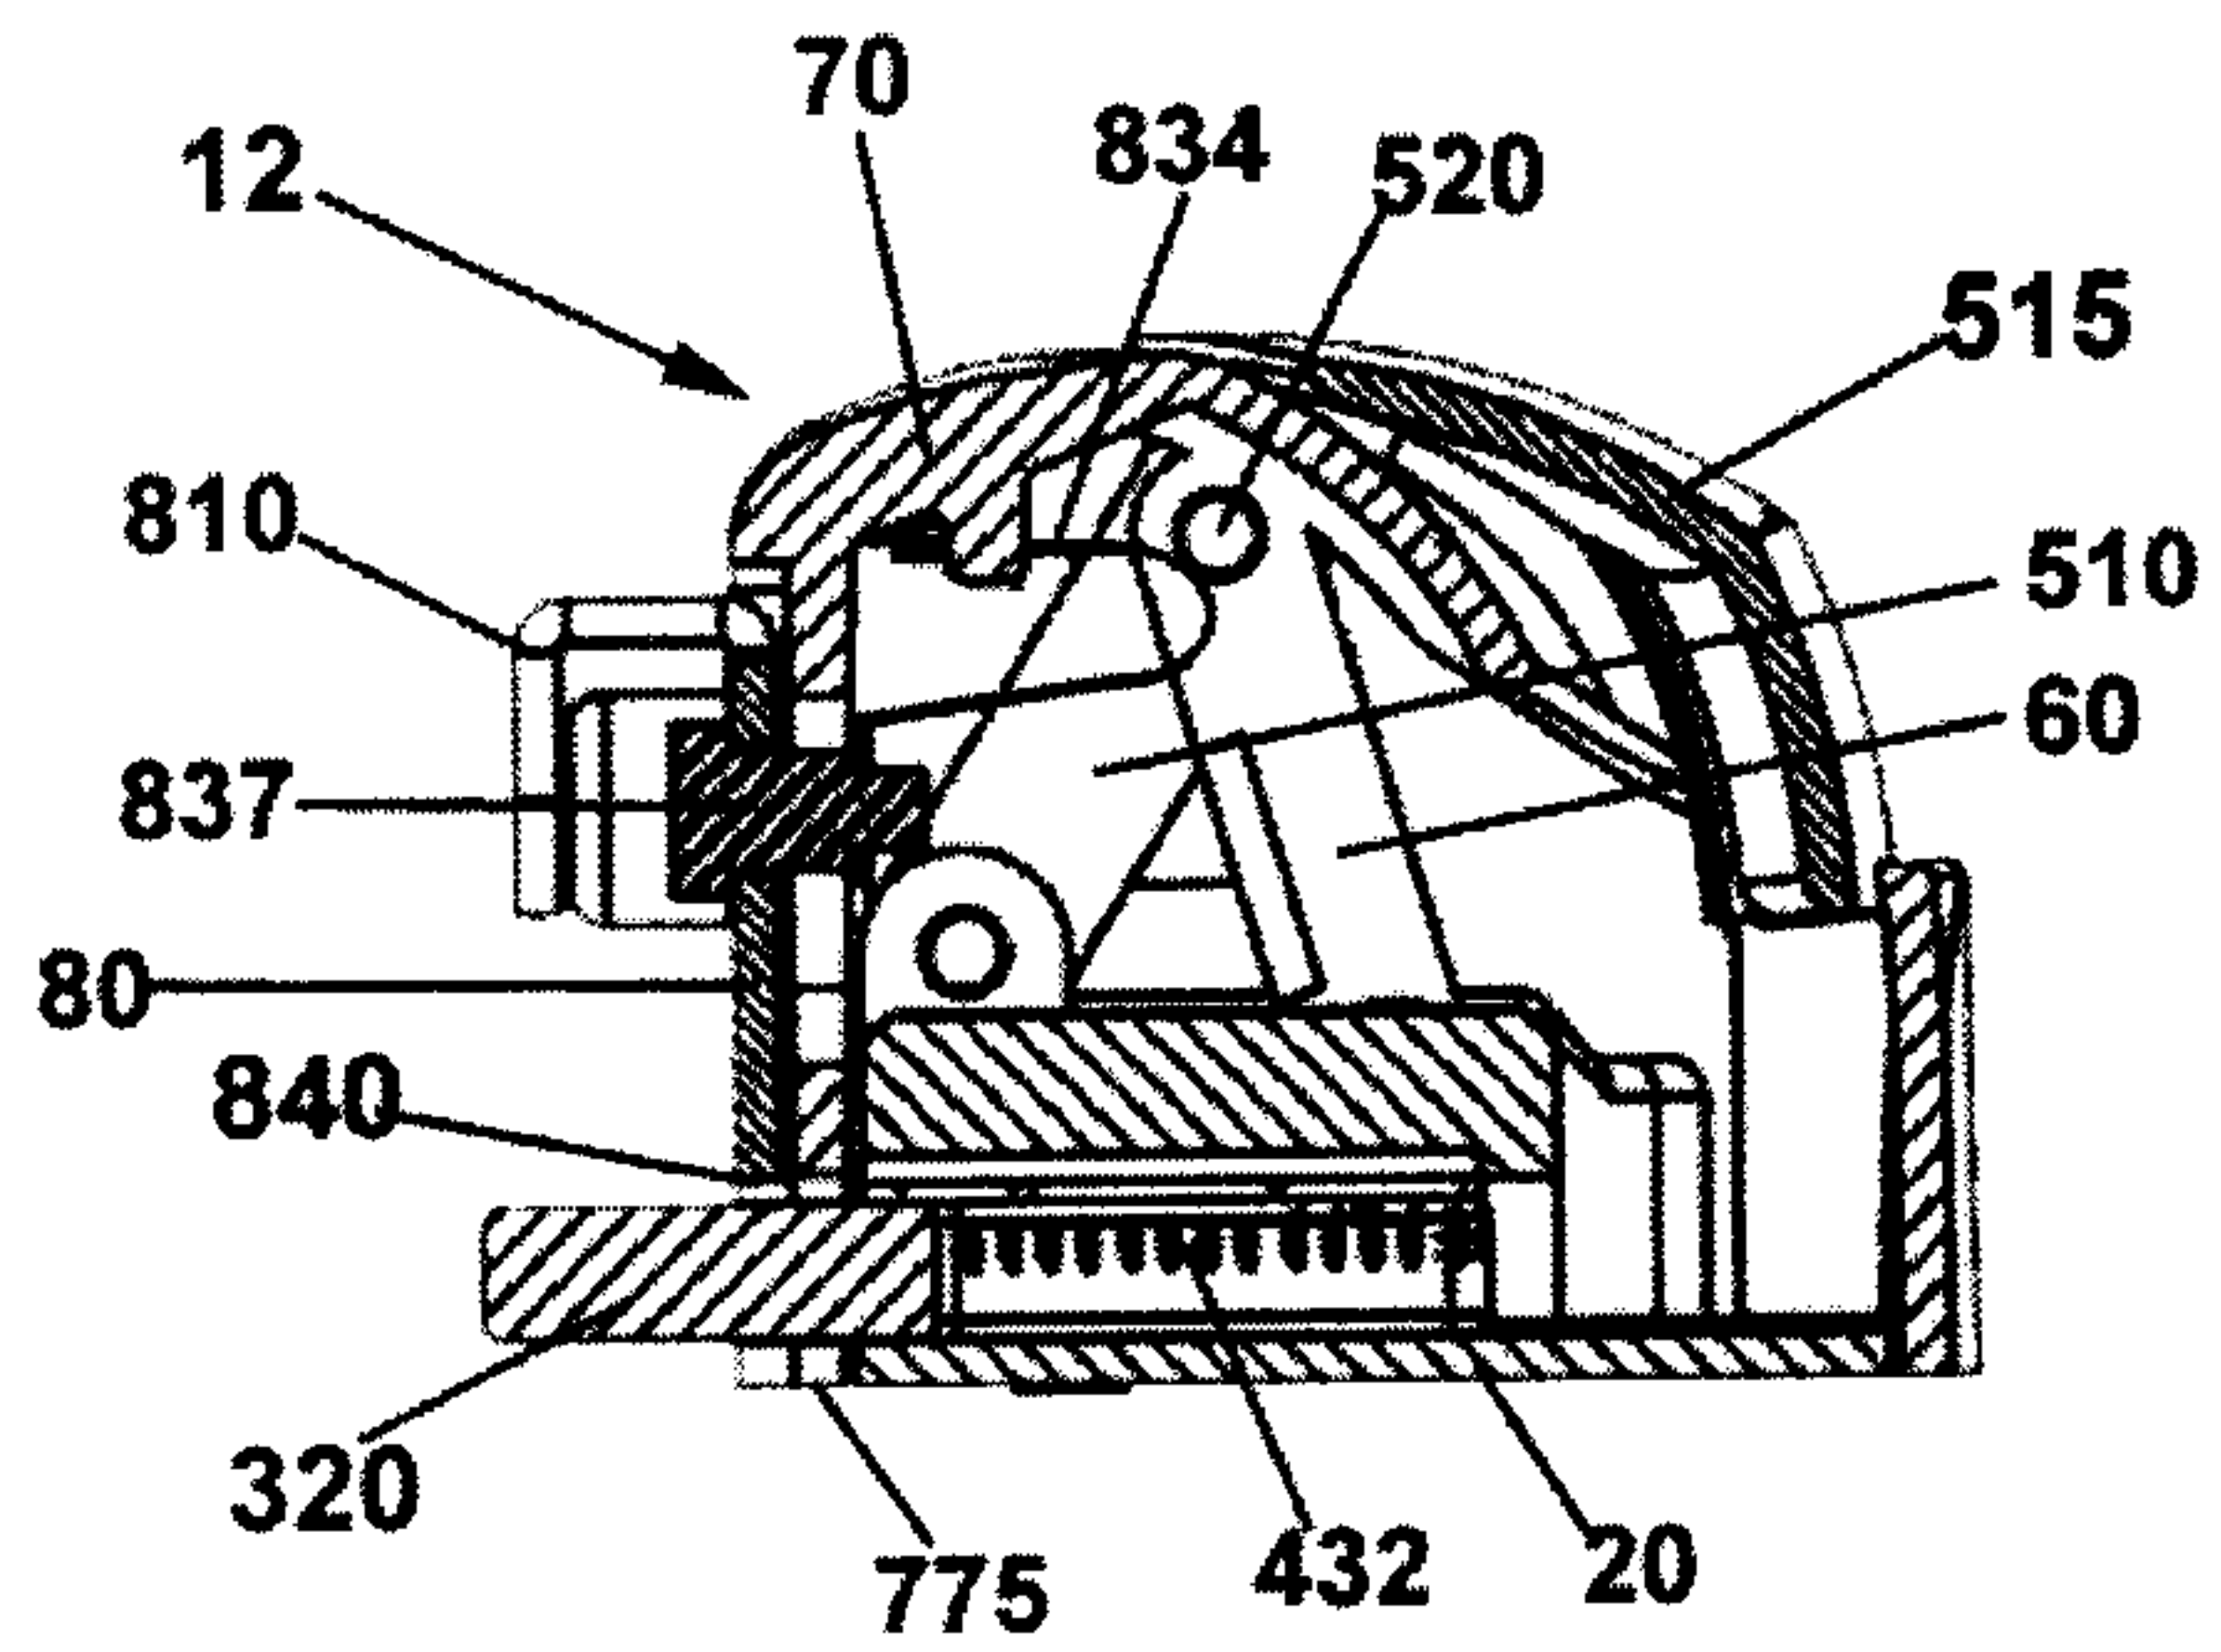


Fig. 22

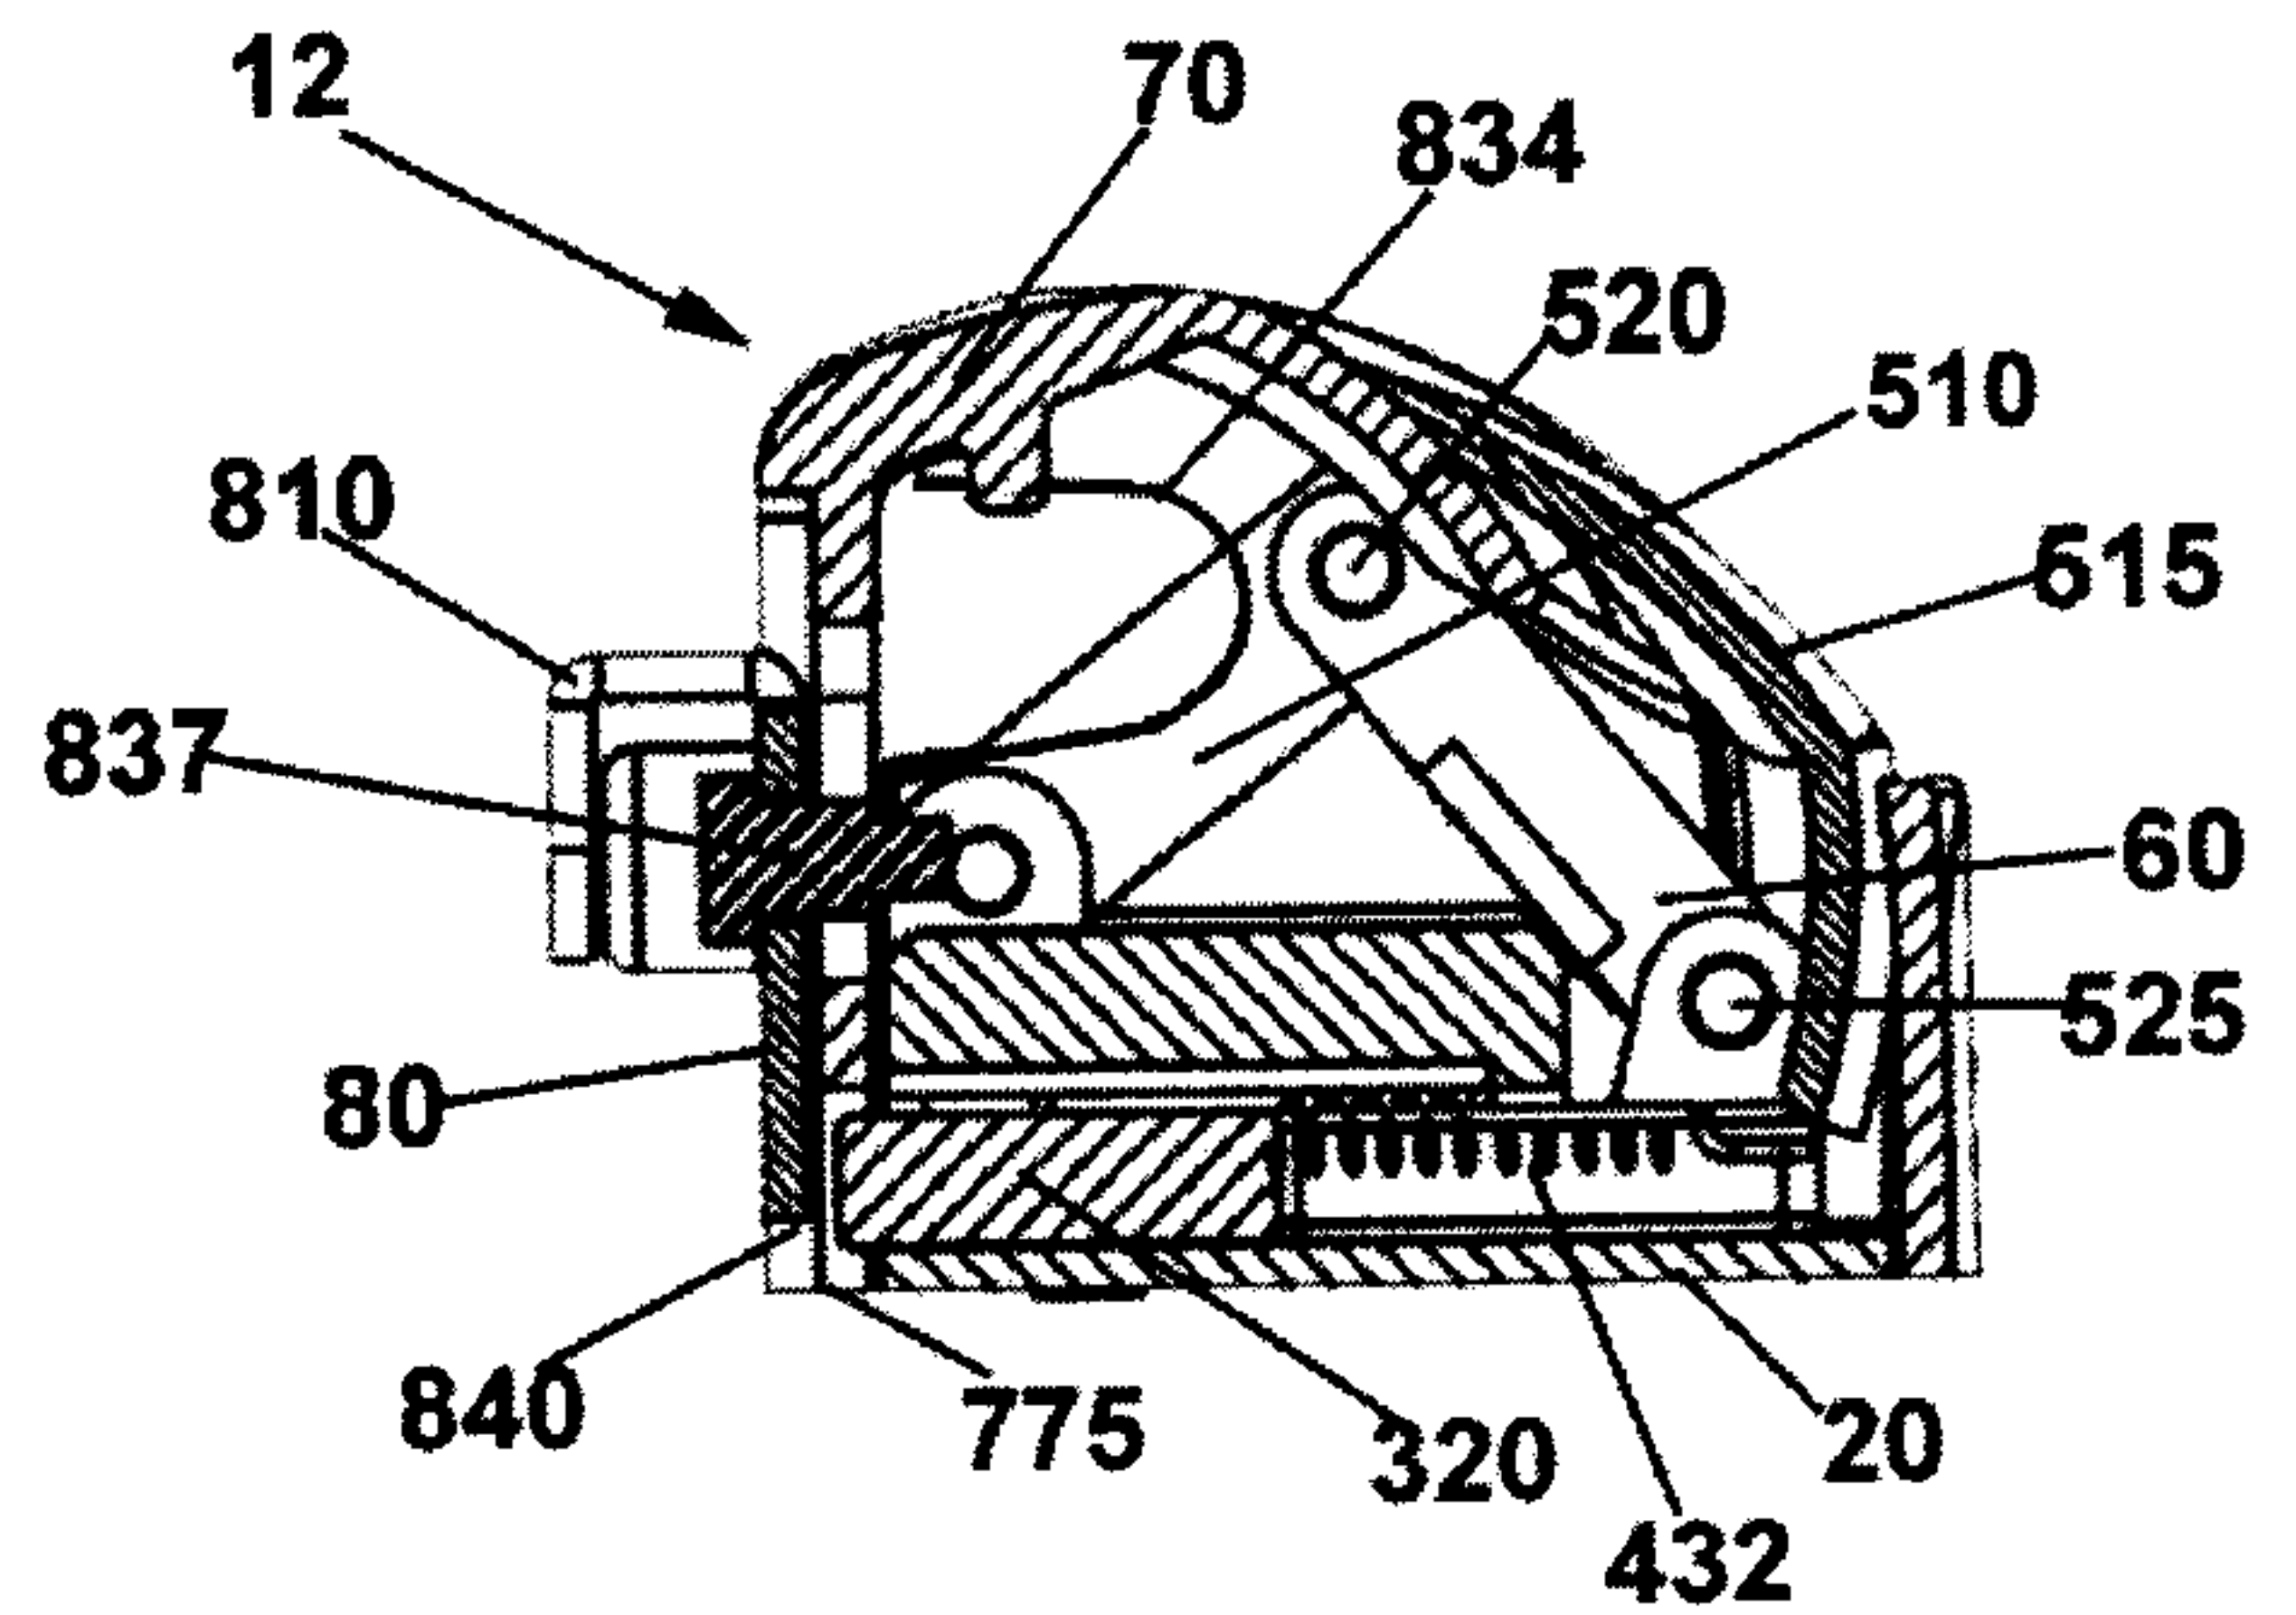


Fig. 23

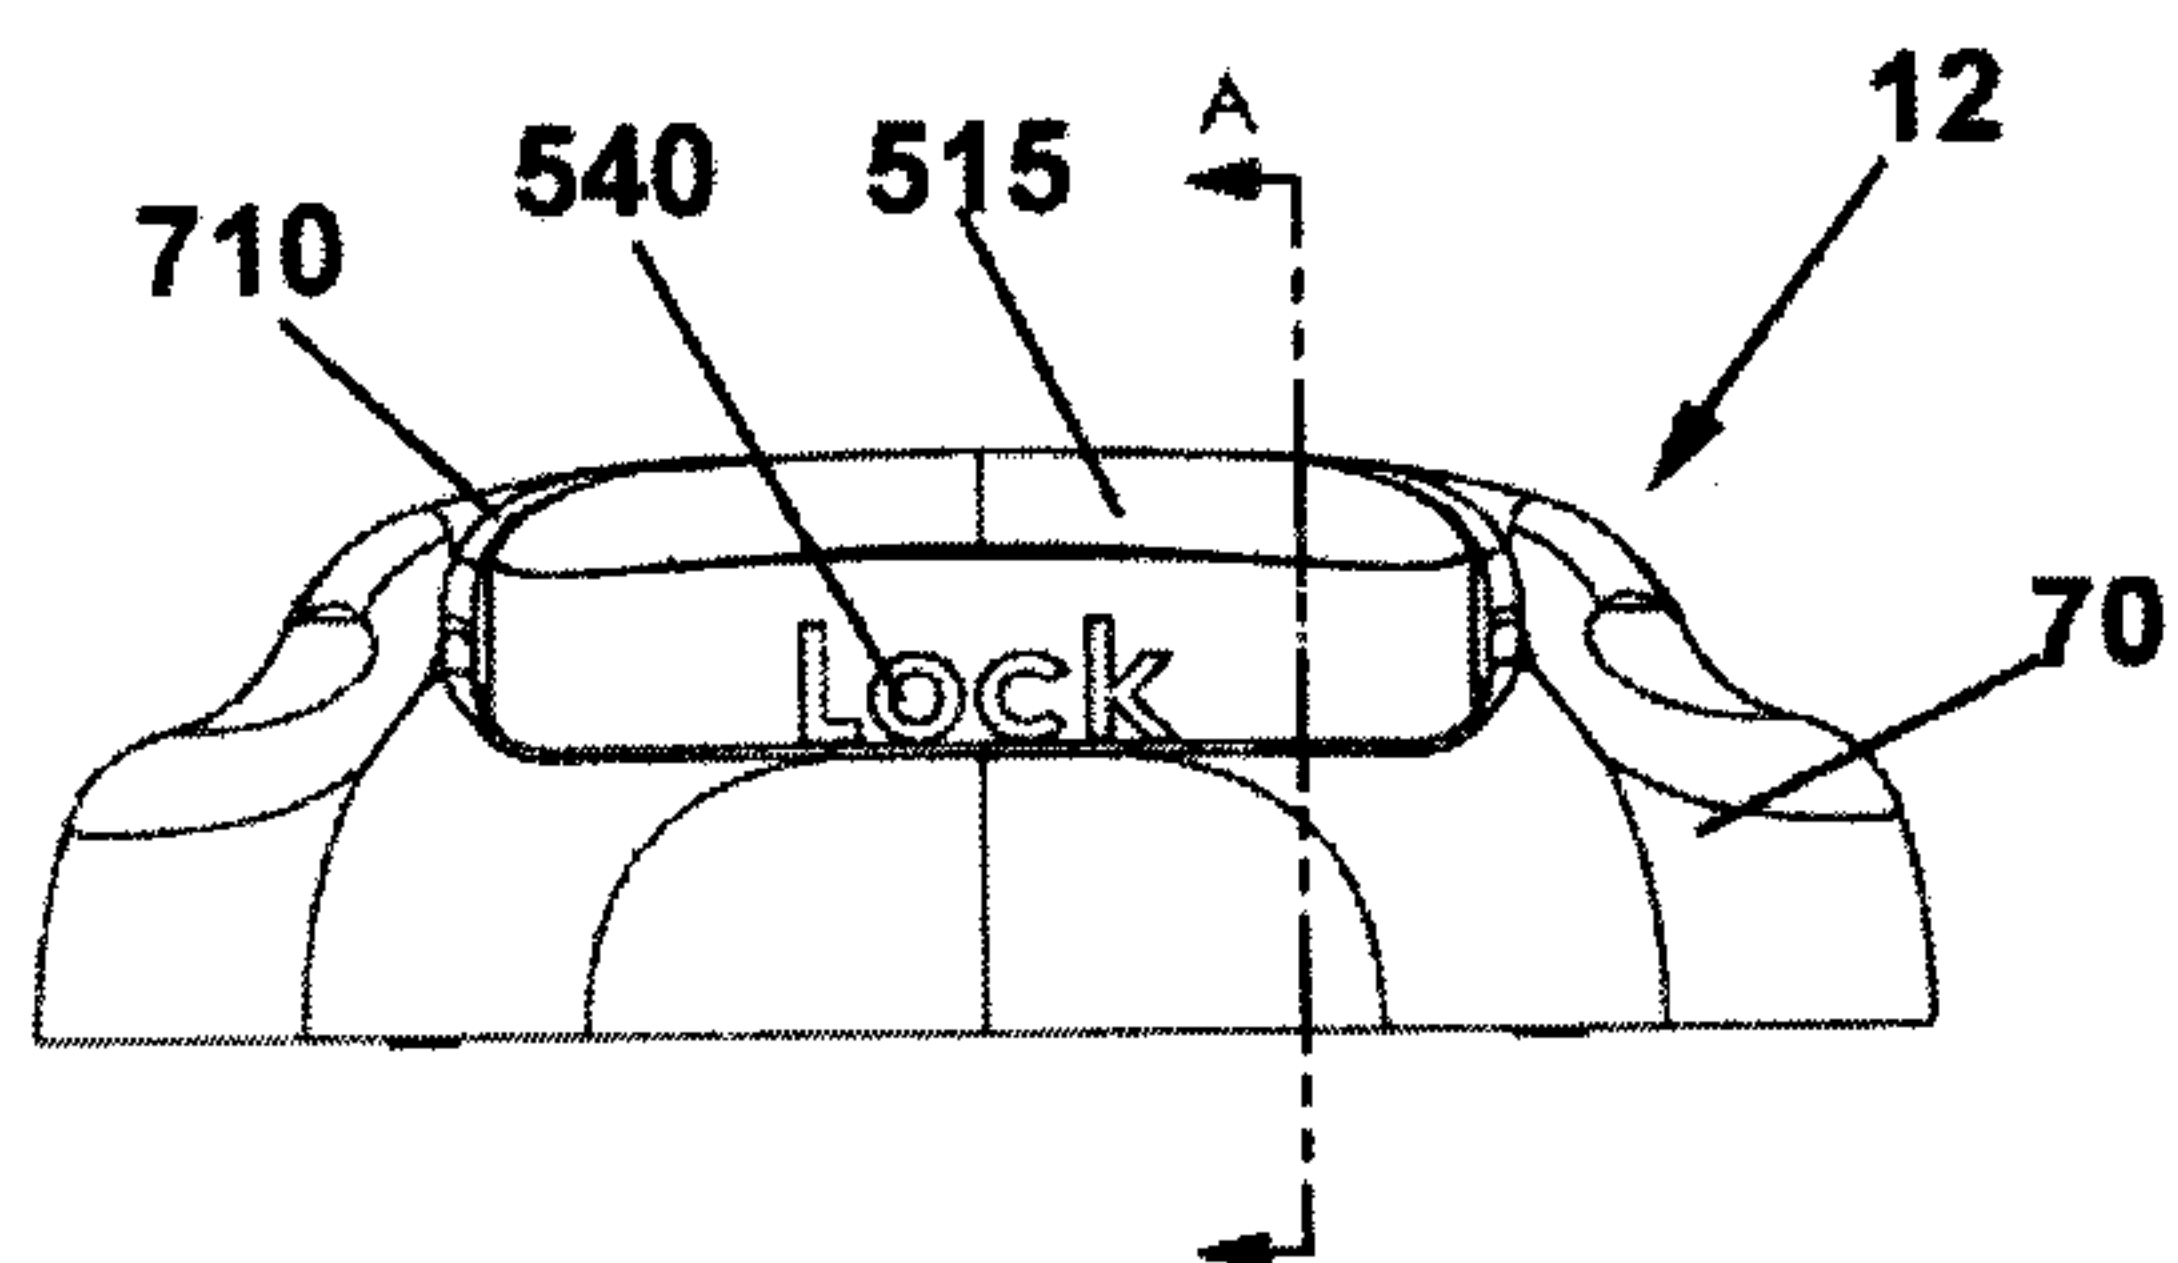


Fig. 24


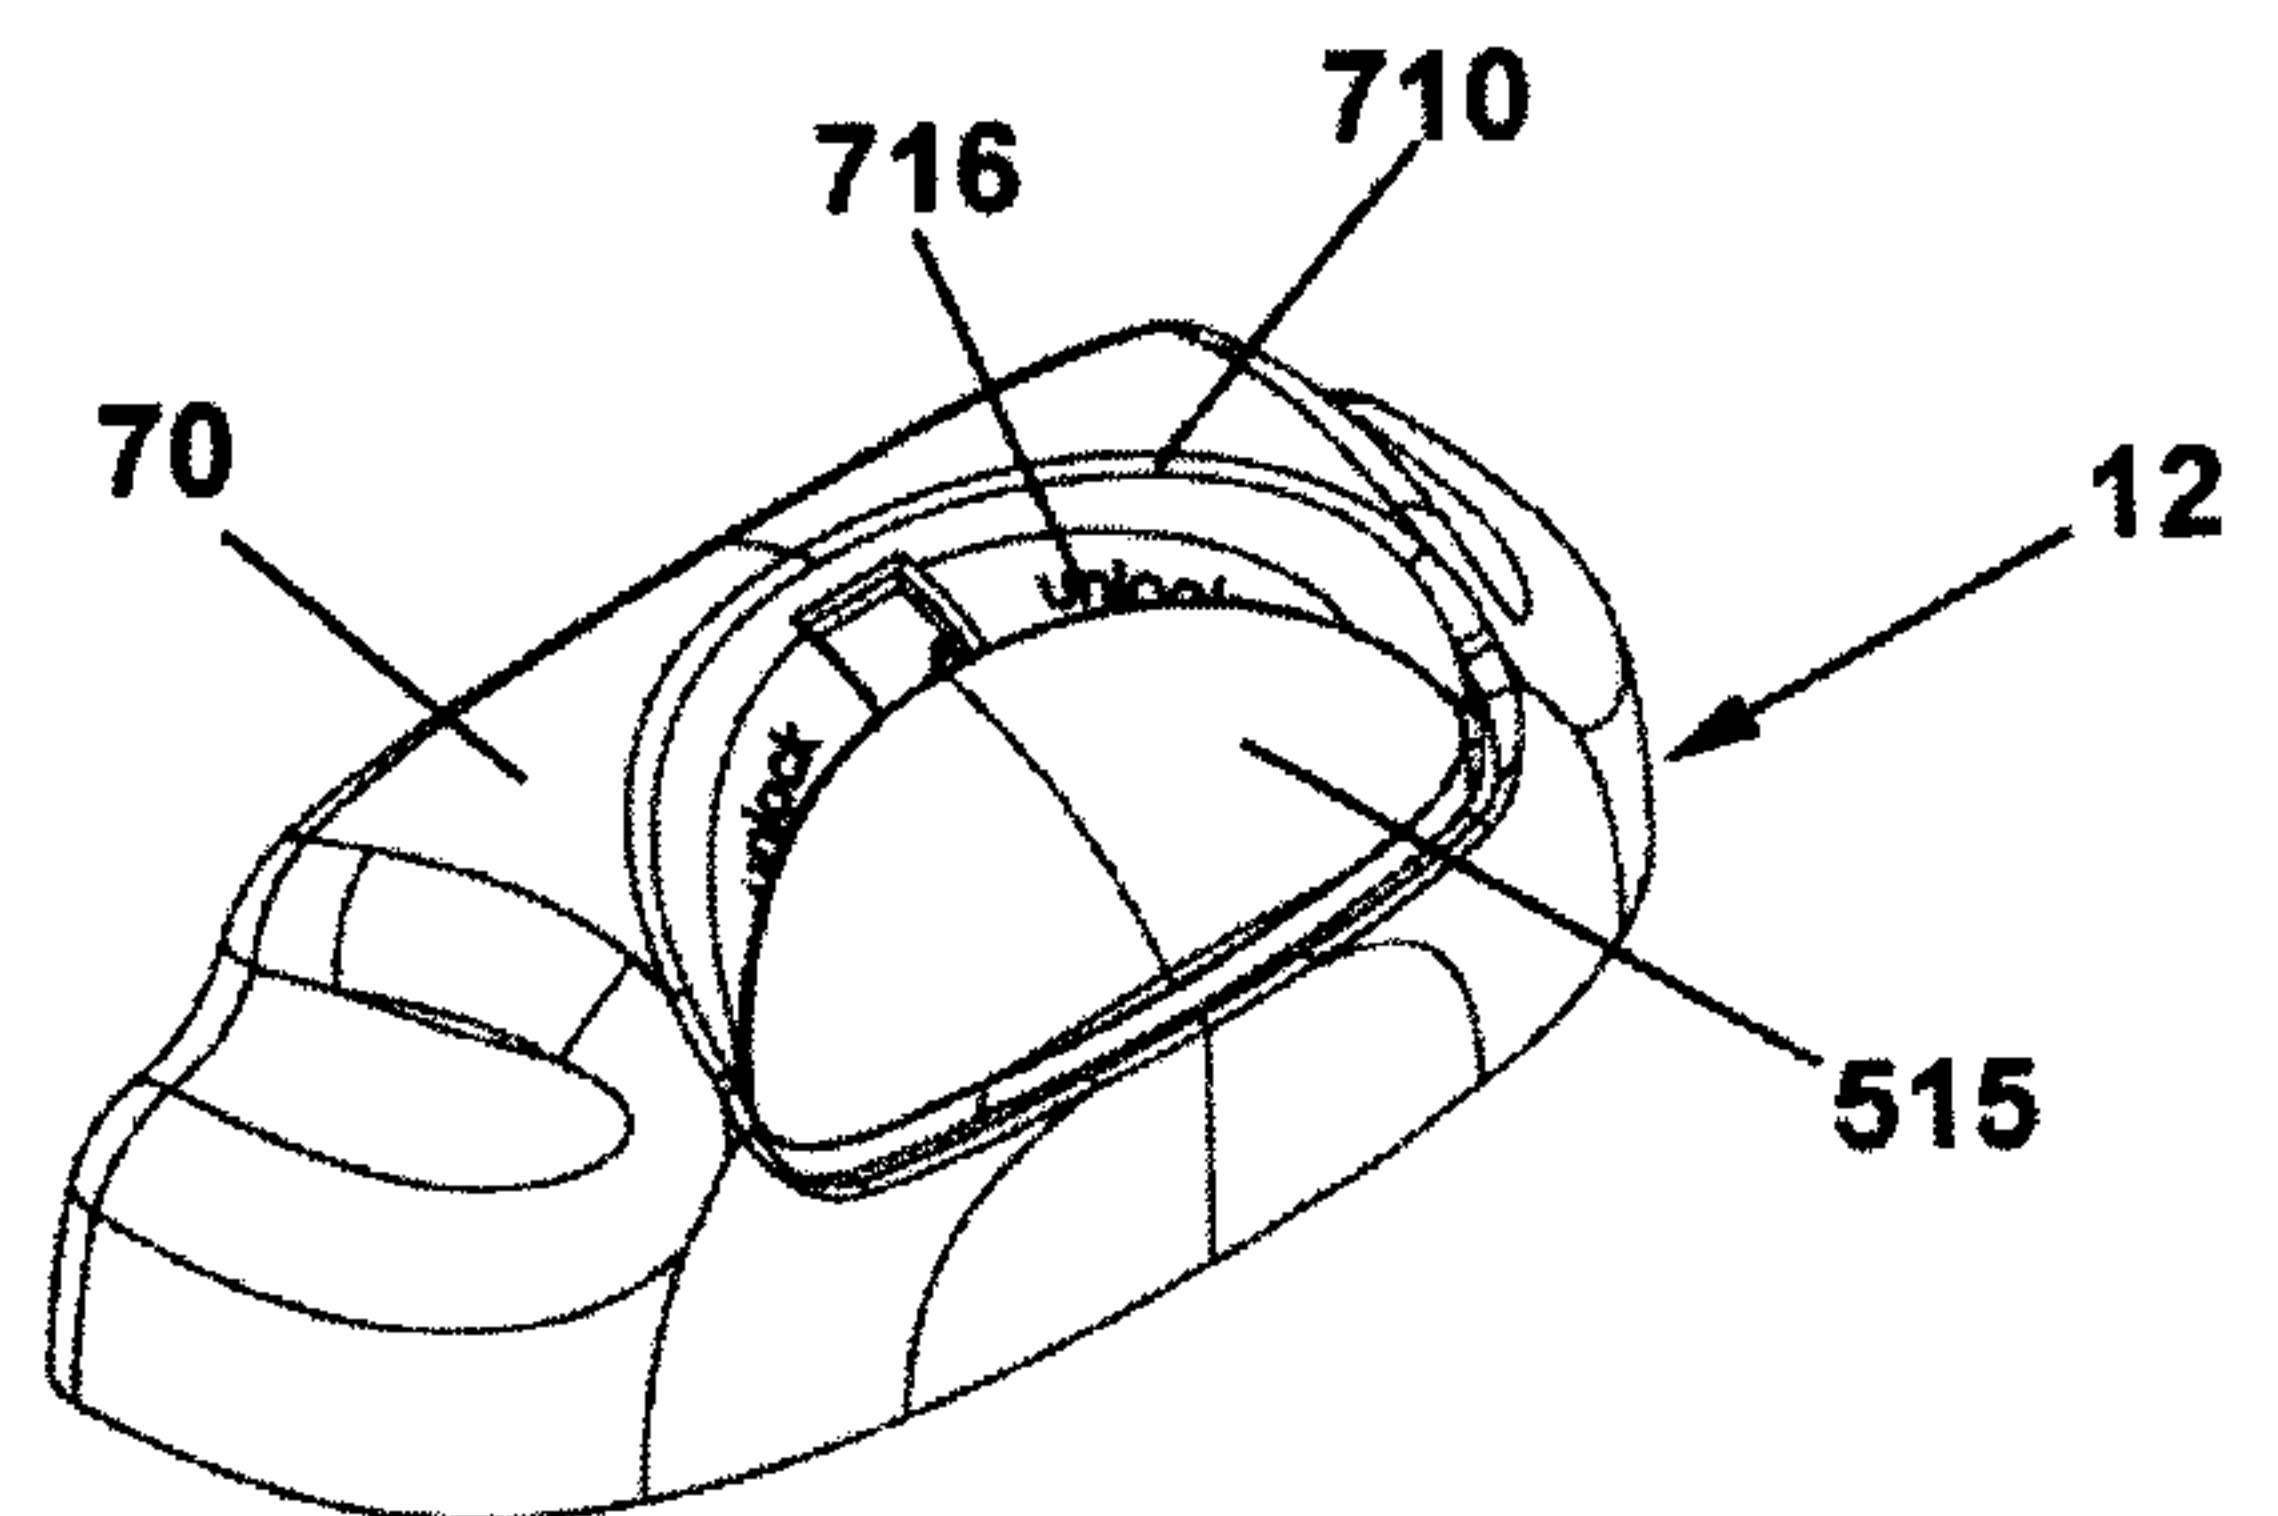


Fig. 25

10

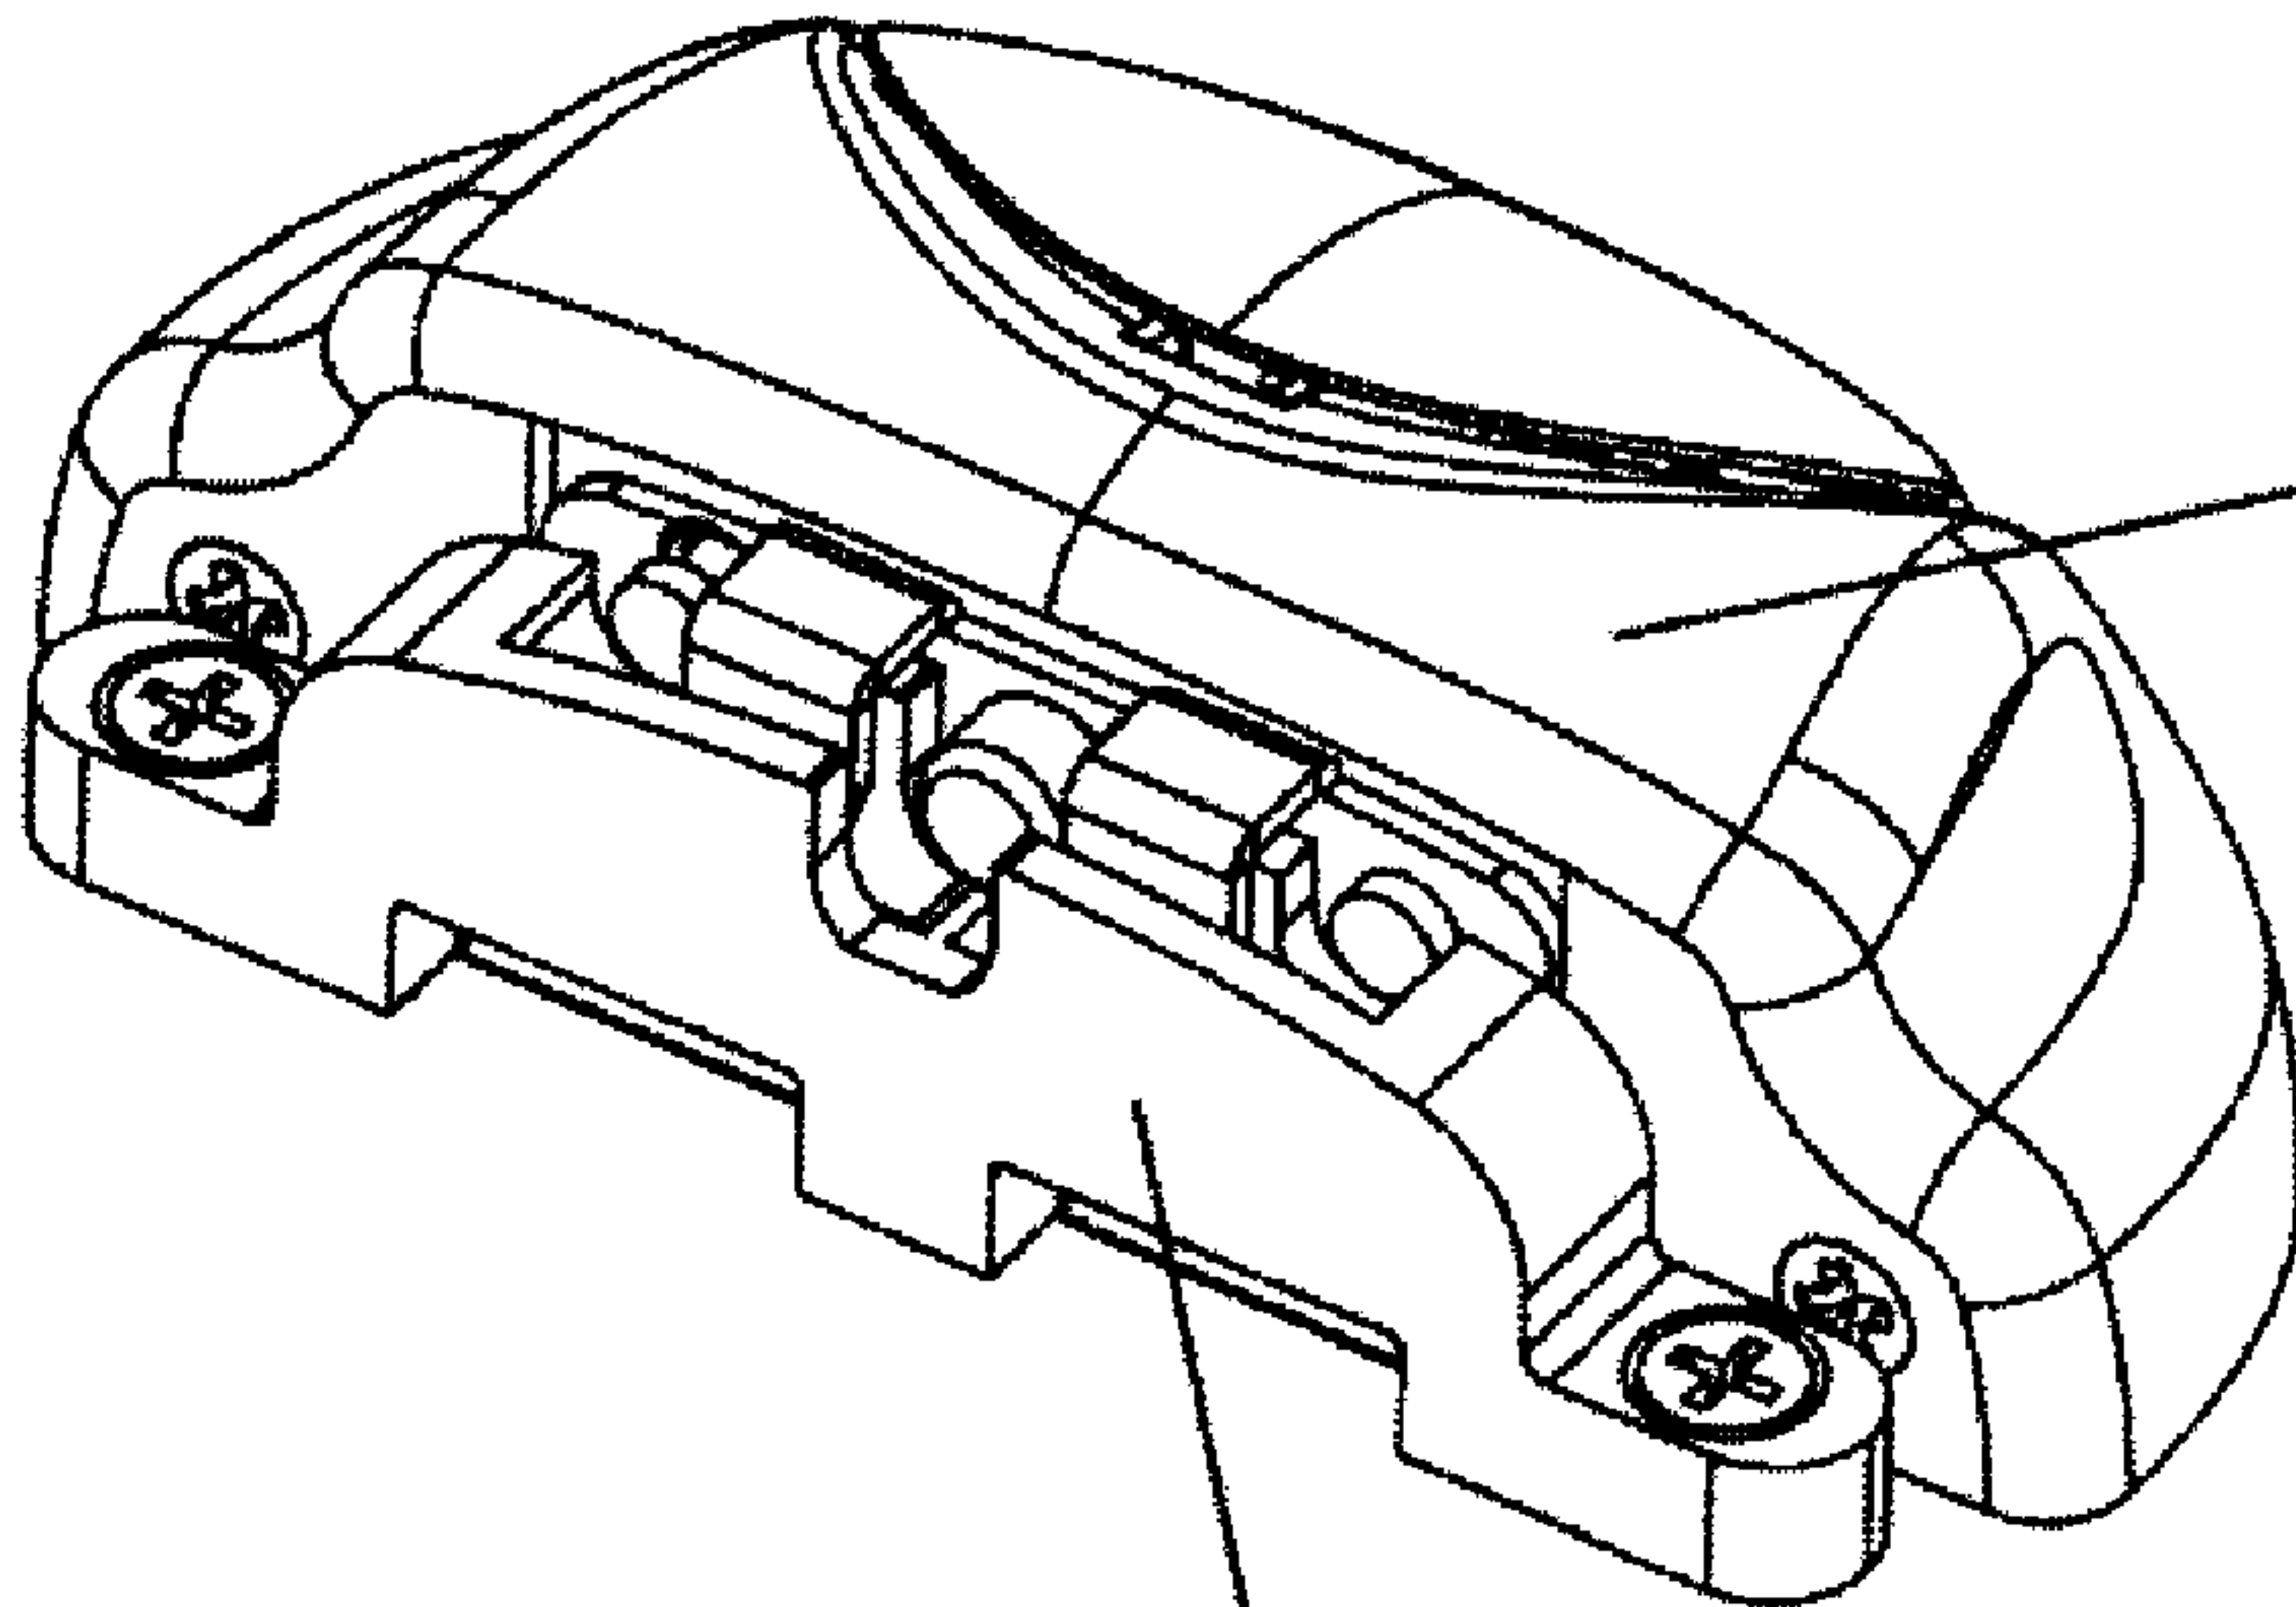

12

14