



US00RE40486E

(19) **United States**
(12) **Reissued Patent**
Lojek et al.

(10) **Patent Number:** **US RE40,486 E**
(45) **Date of Reissued Patent:** **Sep. 9, 2008**

(54) **SELF-ALIGNED NON-VOLATILE MEMORY CELL**

(75) Inventors: **Bohumil Lojek**, Colorado Springs, CO (US); **Alan L. Renninger**, Cupertino, CA (US)

(73) Assignee: **Atmel Corporation**, San Jose, CA (US)

(21) Appl. No.: **11/176,883**

(22) Filed: **Jul. 7, 2005**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **6,841,823**
Issued: **Jan. 11, 2005**
Appl. No.: **10/001,557**
Filed: **Oct. 24, 2001**

5,021,848 A	6/1991	Chiu	357/23.5
5,087,584 A	2/1992	Wada et al.	437/43
5,108,939 A	4/1992	Manley et al.	437/43
5,268,585 A	12/1993	Yamauchi	257/316
5,338,952 A *	8/1994	Yamauchi	365/185.15
5,402,374 A *	3/1995	Tsuruta et al.	365/185.06
5,477,068 A	12/1995	Ozawa	257/214
5,479,368 A *	12/1995	Keshbod	365/185.3
5,544,103 A	8/1996	Lambertson	365/185.15
5,614,747 A *	3/1997	Ahn et al.	257/316
5,616,941 A *	4/1997	Roth et al.	257/315
5,618,742 A	4/1997	Shone et al.	438/263
5,703,388 A	12/1997	Wang et al.	257/315
5,776,787 A	7/1998	Keshbod	437/43
5,786,612 A	7/1998	Otani et al.	257/316
5,789,297 A	8/1998	Wang et al.	438/267
5,793,079 A *	8/1998	Georgescu et al.	257/316
5,918,124 A	6/1999	Sung	438/258
5,963,806 A	10/1999	Sung et al.	438/266
5,972,752 A	10/1999	Hong	438/264

(Continued)

U.S. Applications:

(62) Division of application No. 09/727,571, filed on Nov. 30, 2000, now Pat. No. 6,479,351.

(51) **Int. Cl.**

H01L 29/788	(2006.01)
H01L 29/76	(2006.01)
H01L 29/94	(2006.01)
H01L 31/062	(2006.01)
H01L 31/113	(2006.01)

(52) **U.S. Cl.** **257/316; 257/317; 257/318; 257/319; 257/320; 257/321; 257/322; 257/327; 257/336; 257/344; 257/408; 257/900; 257/314; 257/315**

(58) **Field of Classification Search** **257/316-322, 257/327-346, 408, 900, 314-315; 438/257, 438/264, 266-267, 304**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,833,096 A 5/1989 Huang et al. 437/29

FOREIGN PATENT DOCUMENTS

JP	11-154712	6/1999
JP	11-186416	7/1999


Primary Examiner—Ida M. Soward

(74) *Attorney, Agent, or Firm*—Schneck & Schneck; Thomas Schneck

(57) **ABSTRACT**

Disclosed is a self-aligned non-volatile memory cell including a small sidewall spacer electrically coupled and being located next to a main floating gate region. Both the small sidewall spacer and the main floating gate region are formed on a substrate and both form the floating gate of the non-volatile memory cell. Both are isolated electrically from the substrate by an oxide layer which is thinner between the small sidewall spacer and the substrate; and is thicker between the main floating gate region and the substrate. The small sidewall spacer can be made small; therefore, the thin oxide layer area can also be made small to create a small pathway for electrons to tunnel into the floating gate.

6 Claims, 5 Drawing Sheets

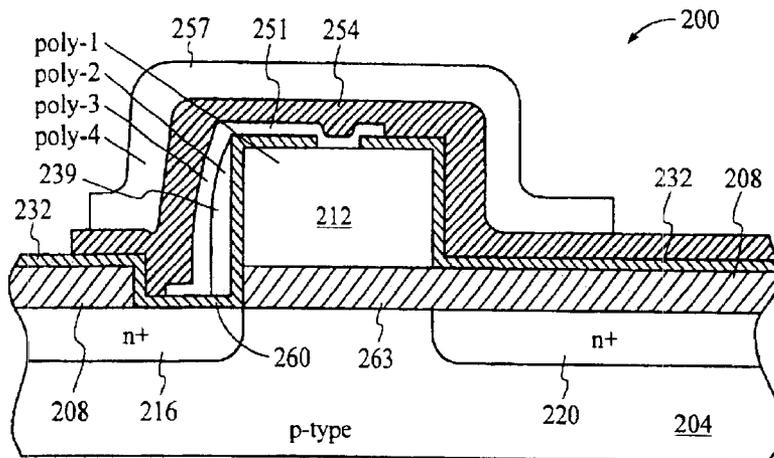

US RE40,486 E

Page 2

U.S. PATENT DOCUMENTS

6,031,264	A	*	2/2000	Chien et al.	257/315	6,207,507	B1	3/2001	Wang	438/267
6,043,530	A		3/2000	Chang	257/320	6,229,176	B1	* 5/2001	Hsieh et al.	257/316
6,060,766	A		5/2000	Mehta et al.	257/369	6,255,691	B1	7/2001	Hashimoto	257/321
6,074,914	A		6/2000	Ogura	438/257	6,392,267	B1	* 5/2002	Shrivastava et al.	257/316
6,091,101	A		7/2000	Wang	257/315	6,465,835	B1	* 10/2002	Pham et al.	257/315
6,124,170	A		9/2000	Lim et al.	438/267	6,476,440	B1	* 11/2002	Shin	257/320
6,159,797	A	*	12/2000	Lee	438/257	6,563,166	B1	* 5/2003	Ni	257/316
6,160,287	A	*	12/2000	Chang	257/321	2002/0000605	A1	* 1/2002	Liu et al.	257/316

* cited by examiner

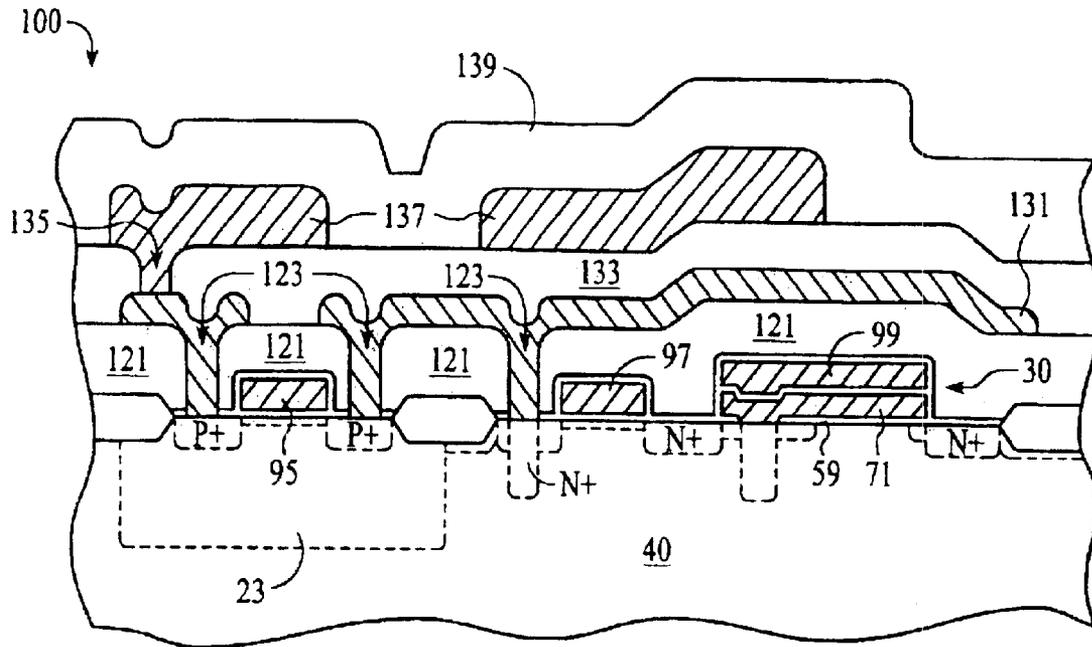


FIG. 1
(PRIOR ART)

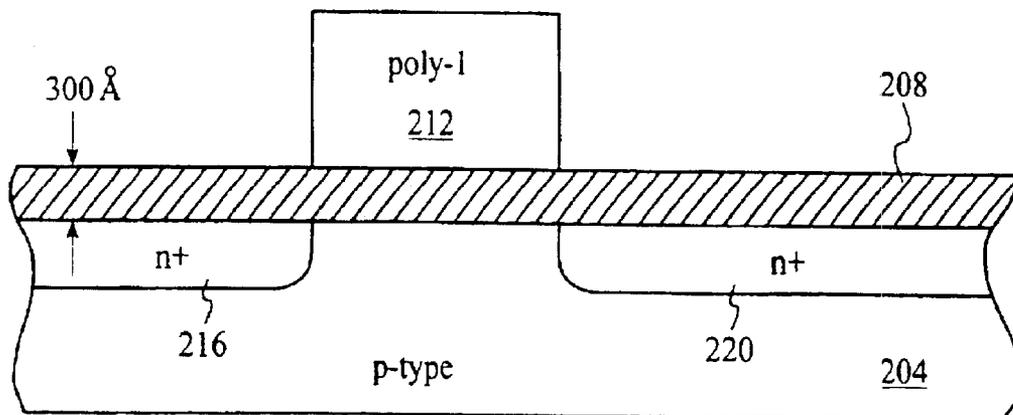


FIG. 2A

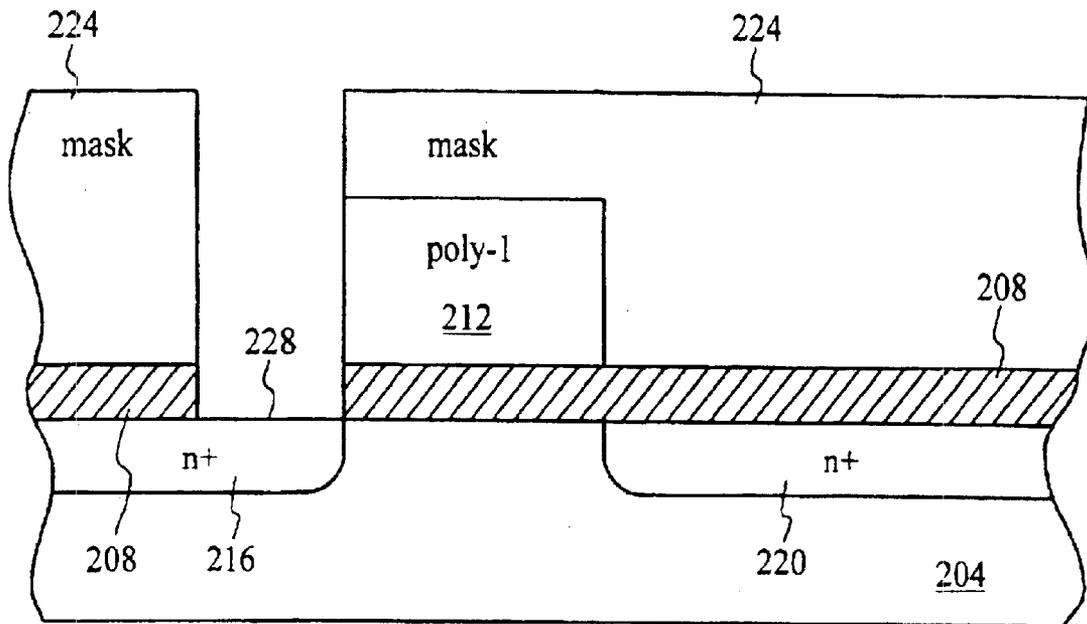


FIG. 2B

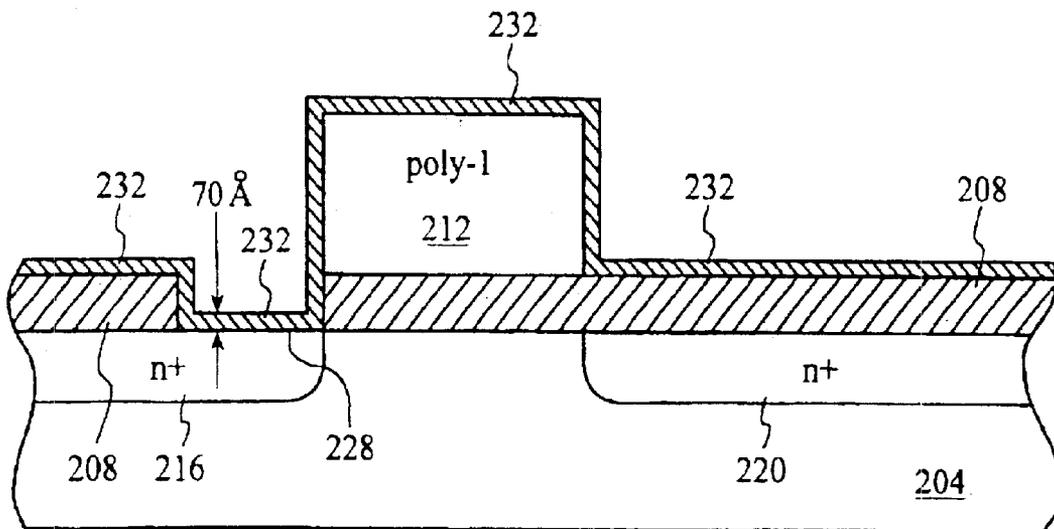


FIG. 2C

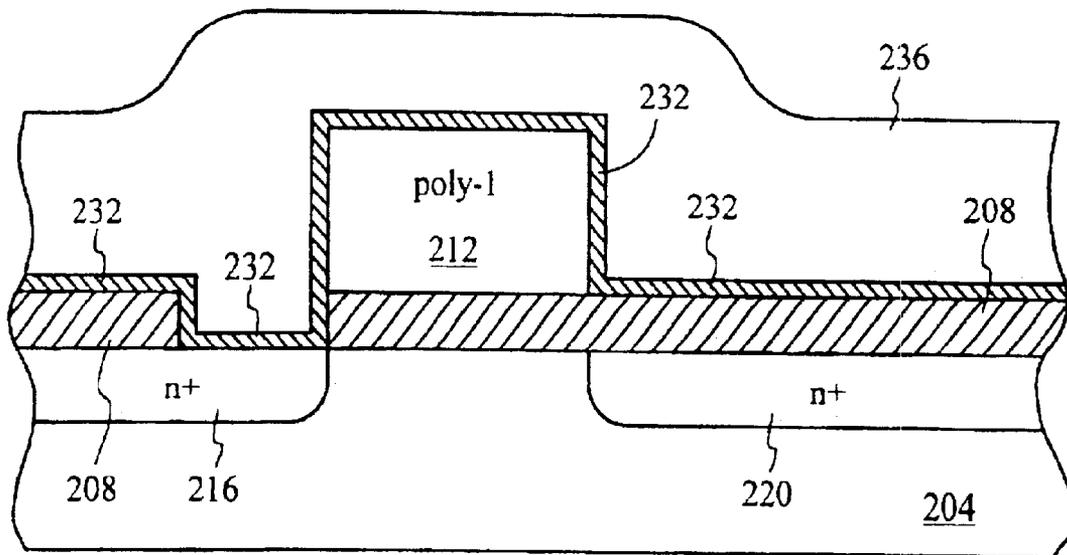


FIG. 2D

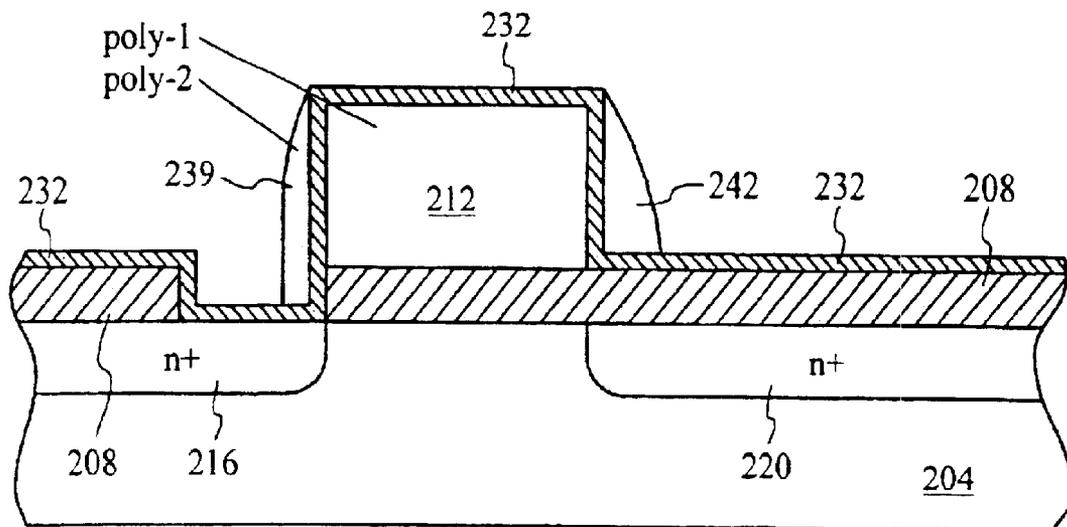


FIG. 2E

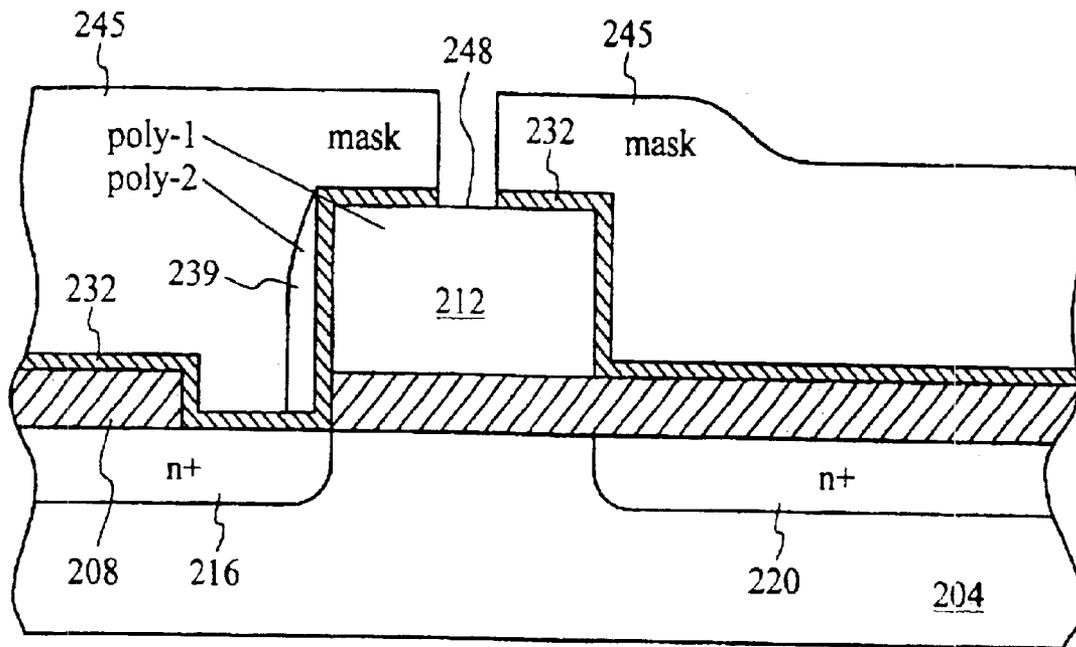


FIG. 2F

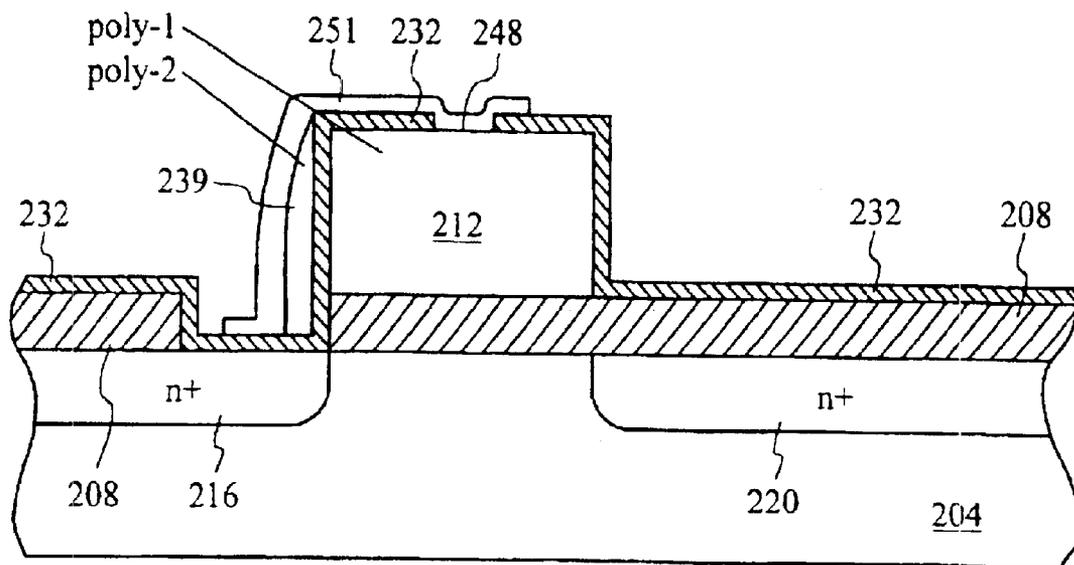


FIG. 2G

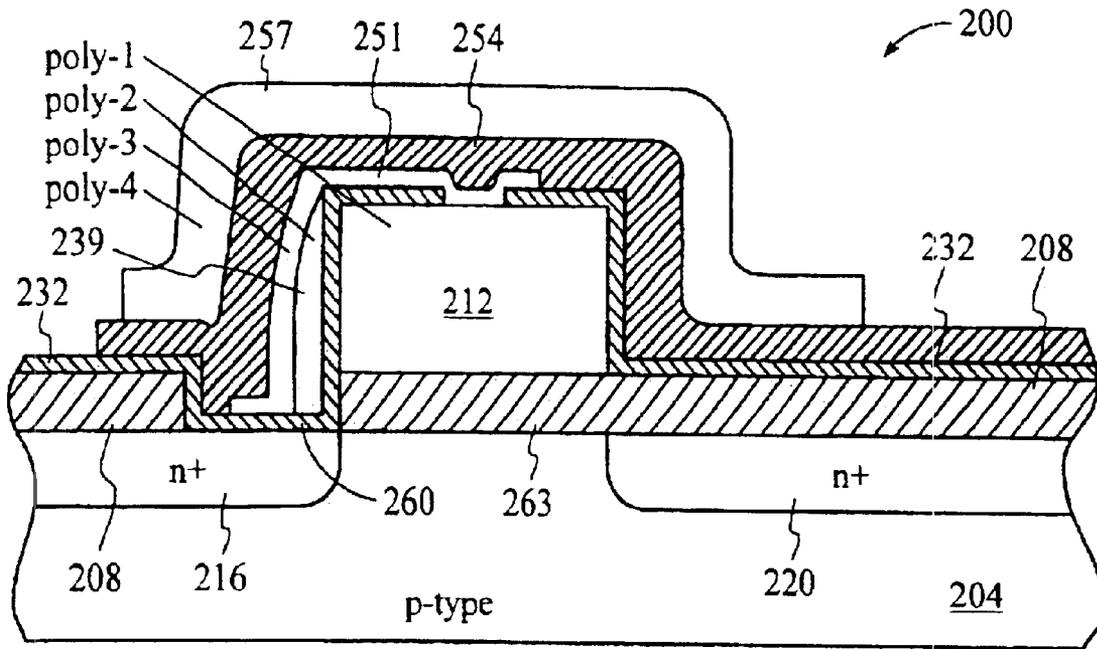


FIG. 2H

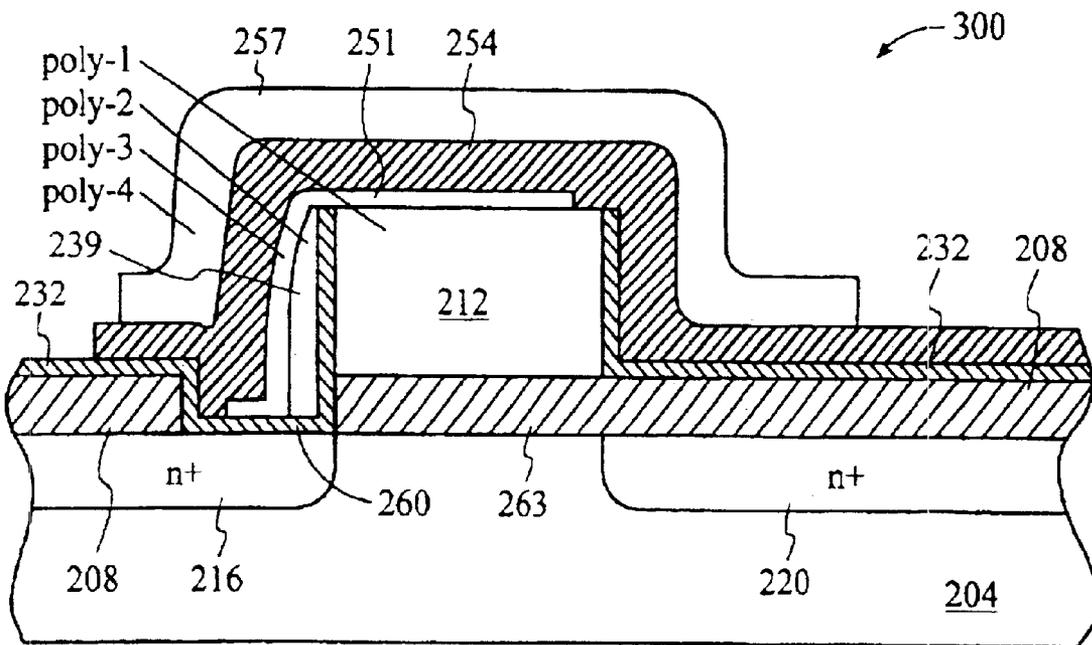


FIG. 3

SELF-ALIGNED NON-VOLATILE MEMORY CELL

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

CROSS-REFERENCE TO RELATED APPLICATION

This is a divisional of patent application Ser. No. 09/727, 571 filed Nov. 30, 2000 now U.S. Pat. No. 6,479,351.

TECHNICAL FIELD

The invention relates to self-aligned non-volatile memory cells, and more particularly to a self-aligned non-volatile memory cell that has a high capacitive coupling ratio and has a thin and small tunneling oxide region.

BACKGROUND ART

FIG. 1 shows a sectional view of an EEPROM 100 (Electrically Erasable Programmable Read Only Memory) as depicted in FIG. 18 of U.S. Pat. No. 4,833,096 which is assigned to the same assignee as the present invention. With reference to FIG. 1 of the present application, a deep n-well 23 is formed inside a p-type substrate 40, and N-channel and memory cell devices are defined. N-channel stages and field oxide are formed around the device areas. Channel stops and field oxide are formed by thermally growing a thin oxide layer, depositing a 1000–2500 Å thick nitride layer and removing the nitride from non-device areas, implanting boron ions around the N-well and N-channel device areas, then driving in the boron and thermally growing oxide in the non-device areas not covered by nitride.

The process continues by implanting a first species of N-type impurity in a portion of the memory cell device area, thermally growing a first oxide layer 59, defining a window therein over the impurity implant, implanting a second species of N-type impurity into the window hole, and regrowing a thick oxide layer in the window. Next, a 2500–3400 Å thick polycrystalline silicon (“polysilicon”) layer is deposited, and removed with the first oxide layer to form the floating gate 71. A second oxide layer is thermally grown at a temperature of 1000°–1050° C. which ensures that this second oxide layer has a substantially uniform thickness over both the polysilicon floating gate and the substrate. After adjusting the threshold of any enhancement devices, a second gate layer, of either polysilicon or a polysilicon/silicide sandwich, is deposited and selectively removed with the second oxide layer to define gates 95 and 97 for peripheral devices, as well as a second polysilicon gate 99 that, along with floating gate 71, forms a memory cell 30. Sources 105 and drains 107 are then formed using the polysilicon gates of the particular device as a self-aligning mask.

The process concludes by defining a double layer of conductive lines in the following manner. First, a boron/phosphorus-doped silica glass 121 covering is applied, contact holes 123 are etched, and the glass is heated to its flow temperature to round the corners of the contact holes. A first layer of conductive lines 131 is then defined. An insulative intermetal layer 133 is deposited, etched back and redeposited to form a substantially planar surface. Via holes 135 are wet/dry etched and the second layer of conductive lines 137 is then defined. A passivation layer 139 can be deposited over the second metal layer 137, or for single metal layer devices, over the first metal layer 131.

EEPROM 100 can program/erase faster if its coupling ratio can be made higher. Coupling ratio of memory cell 30 (and also of EEPROM 100) is the ratio of a first capacitance (not shown) formed between control gate 99 and floating gate 71 of cell 30 over a second capacitance (not shown) formed between floating gate 71 and p-substrate 40 of cell 30. The first and second capacitances are in series; therefore, when the coupling ratio of memory cell 30 increases, with other factors being the same, the voltage drop between floating gate 71 and p-substrate 40 of cell 30 also increases. As a result, it is easier for electrons to tunnel through thin tunnel oxide layer 59 into floating gate 71. In other words, programming cell 30 becomes faster.

There are at least two methods to increase the coupling ratio of memory cell 30. A first method is to increase the first capacitance formed between control gate 99 and floating gate 71 of cell 30. One way to do this is to increase the overlapping area between control gate 99 and floating gate 71 of cell 30.

A second method is to decrease the second capacitance formed between floating gate 71 and p-substrate 40 of cell 30. This can be done by reducing the overlapping area between floating gate 71 and p-substrate 40 of cell 30. It should be noted that although increasing the thickness of a dedicated tunnel oxide region 59 between floating gate 71 and p-substrate 40 of cell 30 would decrease the second capacitance and hence increase the coupling ratio, that would also make it much harder for electrons to tunnel through the tunnel oxide region 59. Therefore, as a compromise, the dedicated tunnel oxide layer 59 should be thinner at only a small portion of the tunnel oxide region 130 to serve as a pathway for electrons to tunnel from p-substrate 40 into floating gate 71 and should be thicker at the rest of tunnel oxide region 59.

However, there is still room for improvement using the second method mentioned above. It is the object of the present invention to improve upon the prior art method of decreasing the second capacitance formed between the floating gate and the p-well or p-substrate, by providing a method of forming a memory cell in which the tunnel oxide region is thinner at a small portion in order to create a pathway for electrons to tunnel into the floating gate, while having the tunnel oxide region remain thicker at other places.

SUMMARY OF THE INVENTION

The non-volatile memory cell of the present invention has a small sidewall spacer electrically coupled and being located next to a main floating gate region. Both the small sidewall spacer and the main floating gate region are formed on a substrate and both form the floating gate of the non-volatile memory cell. Both are isolated electrically from the substrate by an oxide layer which is thinner between the small sidewall spacer and the substrate; and is thicker between the main floating gate region and the substrate. The small sidewall spacer can be made narrow; therefore, the thin portion of the oxide layer can also be made small to create a small pathway for electrons to tunnel into the floating gate.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional view of a typical EEPROM (Electrically Erasable Programmable Read Only Memory) of prior art.

FIGS. 2A–2H illustrate the steps in manufacturing the self-aligned non-volatile memory cell of the present invention.

FIG. 3 is another preferred embodiment of the non-volatile memory cell of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

The final structure and operation of a non-volatile memory cell **200** of the present invention, as shown in FIG. 2H, can be well understood by going through the steps for fabricating the same. With reference to FIG. 2A, the fabrication process of the non-volatile memory cell of the present invention starts with, for illustrative purposes, a p-type semiconductor substrate **204**. A silicon oxide (SiO₂) layer **208**, about 300 Angstroms (1 Å=10⁻¹⁰m) thick, is formed on substrate **204**. In the next step, a first polysilicon (poly-1) layer **212** is deposited upon silicon oxide layer **208**. Then, excessive portion of poly-1 layer **212** is etched away leaving only poly-1 region **212** as seen in FIG. 2A, which later serves as part of a floating gate **212, 239, 251** of memory cell **200** in FIG. 2H. In the next step, n+ regions **216** and **220** are implanted by ion bombardments using poly-1 region **212** as a mask. In other words, n+ regions **216** and **220** are self-aligned with the two opposing sides of poly-1 region **212**.

With reference to FIG. 2B, photoresist masks **224** are used in wet-etching away a portion of silicon oxide layer **208** to expose surface **228** of n+ region **216**. Then, masks **224** are removed.

With reference to FIG. 2C, a thin silicon oxide layer **232**, about 70 Å thick, is formed upon the structure, and covers completely the structure, including surface **228**.

With reference to FIG. 2D, a second polysilicon (poly-2) layer **236** is deposited to blanket thin silicon oxide layer **232**. Poly-2 layer **236** is then dry-etched away leaving only poly-2 sidewall spacers **239** and **242** to the left and right of poly-1 region **212**, respectively, as seen in FIG. 2E. The etching operation can be carried out using an anisotropic etching method. Poly-2 sidewall spacer **242** to the right of poly-1 region **212** is not critical to the present invention, and therefore is not discussed in great detail in the following discussion. At this time, poly-2 sidewall spacer **239** and poly-1 region **212** are electrically separated by thin silicon oxide layer **232**.

With reference to FIG. 2F, photoresist masks **245** are used in wet-etching away a portion of thin silicon oxide layer **232** to expose a surface **248** on top of poly-1 region **212**. Then, masks **245** are removed.

With reference to FIG. 2G, a third polysilicon (poly-3) layer **251** is deposited to blanket the entire structure. This thin poly-3 layer **251** has electrical contact with poly-1 region **212** via surface **248**. Poly-3 layer **251** also has direct contact with poly-2 sidewall spacer **239**. The excessive portion of poly-3 layer **251** is then dry-etched away leaving only the necessary portion **251** as seen in FIG. 2G.

With reference to FIG. 2H, an insulating ONO (Oxide/Nitride/Oxide) layer **254** is deposited to blanket the structure. Then, masks are used to remove the excessive portion of insulating ONO layer **254** to the left. In the next step, a fourth polysilicon (poly-4) layer **257** is deposited to blanket the entire structure. Then, masks are used to remove excessive portion on both sides of the poly-4 layer **257** as seen in FIG. 2H. The structure of insulating ONO layer **254** and poly-4 layer **257** and the method of fabricating the same are well known in the art, and therefore are not discussed in detail here.

The final structure is a non-volatile memory cell **200**. Poly-1 region **212**, poly-2 sidewall spacer **239**, and poly-3 layer **251** form a floating gate **212, 239, 251** of memory cell

200. Poly-4 layer **257** forms a control gate **257** of memory cell **200**. Floating gate **212, 239, 251** and control gate **257**, separated from each other by insulating ONO layer **254** form a first parallel-plate capacitor (not shown). Floating gate **212, 239, 251** and substrate **204** forms a second parallel-plate capacitor (not shown). The first and second parallel-plate capacitors are in series. The insulating layer between the two parallel plates of the second parallel-plate capacitor has two insulating portions. A first insulating portion **260** is thin and is part of thin silicon oxide layer **232**. First insulating portion **260** extends from the leftmost edge of poly-3 layer **251** to the rightmost edge of poly-2 sidewall spacer **239**. A second insulating portion **263** is thicker and is part of silicon oxide layer **208** that lies under poly-1 region **212**.

At a first look, both insulating portions **260** and **263** should be thick to keep low the capacitance of the second parallel-plate capacitor so as to keep high the coupling ratio of cell **200**. However, such a high coupling ratio would not make programming the cell easier because although most of voltage difference between control gate **257** and drain **216** would appear between floating gate **212, 239, 251** and drain **216** due to the high coupling ratio, it would still be difficult for electrons to tunnel through the thick insulating portions **260** and **263**. Memory cell **200** of the present invention solves this problem by making insulating portion **260** thin and small. As a result, insulating portion **260** becomes a pathway (or tunneling oxide region) for electrons to tunnel from drain **216** into poly-2 sidewall spacer **239** which is part of floating gate **212, 239, 251** to program memory cell **200**. Making insulating portion **260** thin increases the capacitance of the second parallel-plate capacitor. However, because insulating portion **260** is small in area compared with insulating portion **263**, the increase of capacitance of the second parallel-plate capacitor is much less than if both insulating portions **260** & **263** are made thin to let electrons to tunnel into floating gate **212, 239, 251**. As a result, this makes it easier for electrons to tunnel from drain **216** through thin insulating portion **260** into poly-2 sidewall spacer **239** which is part of floating gate **212, 239, 251** so as to program memory cell **200**.

Programming memory cell **200** can be done by applying a high voltage (e.g., 12 V–15 V) to control gate **257**, a ground potential to drain **216** and source **220**. Electrons will tunnel through thin insulating portion **260** into poly-2 sidewall spacer **239** which is part of floating gate **212, 239, 251** under Fowler-Nordheim tunneling effect. The electrons trapped in floating gate **212, 239, 251** increases the threshold voltage of memory cell **200** such that there is no conducting channel between drain **216** and source **220** in read mode. In other words, a programmed cell **200** represents a logic 0.

An unprogrammed cell **200** having no trapped electrons in its floating gate **212, 239, 251** has a normal threshold voltage. In read mode, for an unprogrammed cell **200**, a conducting channel forms under insulating portion **263** between drain **216** and source **220**. In other words, an unprogrammed cell **200** represents a logic 1. During read mode, the voltage applying to control gate **257** of memory cell **200** with respect to source **220** must be higher than that normal threshold voltage of an unprogrammed cell but must be lower than the increased threshold voltage of a programmed cell. As a result, during read mode, selected programmed cells **200** do not conduct and selected unprogrammed cells **200** conducts.

Erasing a programmed memory cell **200** can be done by applying a high voltage (e.g., 12 V) to drain **216**, a ground potential to both control gate **257** and source **220**. Trapped electrons in floating gate **212, 239, 251** tunnels through thin insulating portion **260** to drain **216**. Thereby, the cell becomes unprogrammed.

5

With reference to FIG. 3, another embodiment is shown in which memory cell 300 is the same as memory cell 200 of FIG. 2H, except that thin silicon oxide layer 232 is removed completely from the top of poly-1 region 212 by using a chemical-mechanical polishing (CMP) process to expose surface 248 of poly-1 region 212. After that, poly-3 layer 251, insulating ONO layer 254, and poly-4 layer 257 are in turn formed on the structure as in the case of memory cell 200 of FIG. 2H.

The non-volatile memory cell of the present invention also comprises a select transistor which is well known in the art and therefore is not discussed in here.

What is claimed is:

1. A non-volatile memory cell comprising:

a semiconductor substrate, with a drain and a source in the substrate;

a conductive floating gate formed on the substrate between the source and drain with a first insulating layer separating said floating gate from said substrate, said floating gate including a main floating gate region and a small sidewall spacer, said first insulating layer including a first insulating portion separating said small sidewall spacer from the substrate and from the main floating gate region, [said] a second insulating portion separating said main floating gate region from said substrate, wherein the first insulating portion is thin tunnel oxide that is thinner than said second insulating portion, said small sidewall spacer having a first side contacting the thin tunnel oxide insulation and an opposite side that is electrically couple to the main floating

6

gate region by a conductive connecting layer extending over said opposite side of the sidewall spacer and extending past the thin tunnel oxide to contact the main floating gate region;

a control gate formed over the floating gate; and a second insulating layer separating said control gate and said floating gate.

2. The non-volatile memory cell of claim 1 wherein said connecting conductive layer extends along a side of said main floating gate region, the thin tunnel oxide insulation having a portion covering the main floating gate region except for an opening therein, with the connecting conductive layer making contact with the main floating gate region through said opening.

3. The non-volatile memory cell of claim 1 wherein said connecting conductive layer extends along a side of the small sidewall spacer and on top of said main floating gate region.

4. The non-volatile memory cell of claim 1, wherein said first insulating portion is over said drain.

5. The non-volatile memory cell of claim 4 wherein said first insulating portion extends continuously across the memory cell.

6. The non-volatile memory cell of claim 4 wherein said drain and source are self-aligned with the opposing sides of said main floating gate region.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : RE 40,486 E
APPLICATION NO. : 11/176883
DATED : September 9, 2008
INVENTOR(S) : Lojek et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In column 3, line 12, delete "SiO₂" and insert -- SiO₂ --, therefor.

In column 3, line 13, delete "Angstroms" and insert -- Angstrom --, therefor.

In column 4, line 33, after "much less" delete "that" and insert -- than --, therefor.

In column 4, line 57, after "higher than" delete "that" and insert -- the --, therefor.

In column 5, line 29, in Claim 1, before "insulation" delete "oxide".

In column 5, line 30, in Claim 1, after "electrically" delete "couple" and insert -- coupled --, therefor.

Signed and Sealed this

Sixteenth Day of December, 2008

A handwritten signature in black ink that reads "Jon W. Dudas". The signature is written in a cursive style with a large, stylized initial "J".

JON W. DUDAS
Director of the United States Patent and Trademark Office