




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G05G 9/00	A1	(11) International Publication Number: WO 95/02860 (43) International Publication Date: 26 January 1995 (26.01.95)
<p>(21) International Application Number: PCT/US93/06889</p> <p>(22) International Filing Date: 12 July 1993 (12.07.93)</p> <p>(71)(72) Applicant and Inventor: CHUANG, Keh-Shih [US/US]; 9012 8th Avenue, Inglewood, CA 90305 (US).</p> <p>(74) Agents: TYSON, Timothy, T. et al.; Freilich, Hornbaker & Rosen, Suite 1434, 10960 Wilshire Boulevard, Los Angeles, CA 90024 (US).</p>		<p>(81) Designated States: AU, BB, BG, BR, CA, FI, HU, JP, KP, KR, KZ, LK, MG, MN, MW, NO, PL, RO, RU, SD, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: VARIABLE EFFORT JOYSTICK

(57) Abstract

A variable resistance joystick (20) configured for computer control is provided. A stepper motor (34) turns threaded screws (30) to move a system of springs (26) up and down on the joystick thus varying the lever arm on which the springs impart force. Thus computer commands (113) to the stepper motor may change the force required by a user to move the joystick. A similar system controls the resistance to movement of a button (108) in the joystick handle (42).

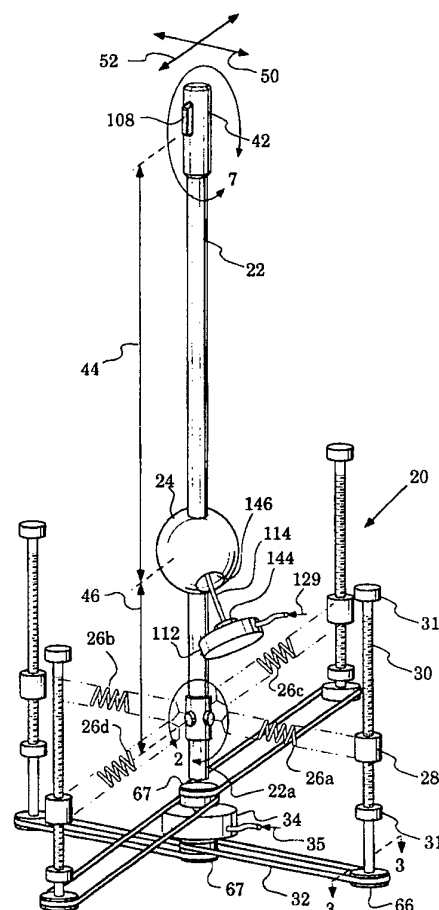

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

TITLE

Variable Effort Joystick

5

TECHNICAL FIELD

10

The present invention pertains to computer joysticks and, more particularly, to computer controlled variable effort joysticks.

BACKGROUND ART

15

Input devices allow a user to place information into a computer. The most common input devices are probably keyboards, mice, graphics tablets and joysticks. The joystick is particularly useful in activities requiring hand-eye coordination such as game playing and computer training
20 programs. Computer training programs are used to teach people to handle a variety of tasks such as flying airplanes, controlling satellites, operating ship loading equipment and performing surgical operations.

When many of these activities are performed in the actual situation there is a resistive feedback to the performer. For instance, in flying an
25 airplane the control stick may require more force to move when the stick is moved to extreme positions. Or in performing an operation it may require more force to cut through some tissues than it does for others.

Therefore, it may be useful to have a system in which the joystick has a variable resistance to movement with that resistance under computer
30 control. The computer can then cause the joystick to have a resistance to movement for each program activity that matches the resistance to be found in the real life activity.

The following U.S. Patents are of interest in the joystick art;
4,127,841, 4,156,130, 4,200,780, 4,216,467, 4,414,438, 4,491,325, 4,509,383,
35 4,533,899, 4,590,339, 4,685,678, 4,748,441, 4,766,423, 4,769,517, 4,800,721,
4,814,682, 4,820,162, 4,870,389 and 4,879,556.

DISCLOSURE OF INVENTION

The present invention is directed to apparatus enabling computer control of the resistance required to move a joystick or parts thereof.

5 Apparatus in accordance with the invention are characterized by the use of a computer controlled stepper motor to alter the lever arm available to springs for urging of the joystick and a button in the joystick handle. A user of the joystick and the button must overcome the applied spring force.

10

15

20

25

30

35

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is an isometric view of a joystick disposed with a preferred apparatus embodiment, in accordance with the present invention, for
5 converting it to a variable effort joystick;

FIG. 2 is an enlarged sectional view of the area enclosed by the line 2 in FIG. 1;

FIG. 3 is an enlarged view along the plane 3 - 3 of FIG. 1;

FIG. 4 is a plan view of a gear train for another preferred apparatus
10 embodiment;

FIG. 5 is a view similar to FIG. 1 illustrating another preferred embodiment of the present invention disposed with a joystick;

FIG. 6 is a view along the plane 6 - 6 of FIG. 5;

FIG. 7 is an enlarged sectional view of the area enclosed by the line 7
15 of FIG. 1;

FIG. 8 is a sectional view along the line 8 - 8 of FIG. 7; and

FIG. 9 is an enlarged sectional view of the area enclosed by the line 9 of FIG. 7.

20

25

30

35

MODES FOR CARRYING OUT THE INVENTION

FIG. 1 is an isometric view of a preferred apparatus embodiment 20 for converting a joystick 22 to a variable effort joystick. The joystick 22 rotates about a ball joint 24 (indicated schematically by a sphere). Springs 26 are movably attached at one end thereof to a portion 22a of the joystick 22 and, at another end thereof, to threaded nuts 28 engaged by threaded screws 30 which rotate within bearings 31. The screws 30 are disposed substantially parallel to the neutral position of the joystick 22 and are rotated by the use of belts 32 driven by a stepper motor 34 which is responsive to computer commands 35 in manners well known in the art.

Thus the springs 26 may be moved axially along the joystick portion 22a in response to computer commands 35. Since a user of the joystick 22 normally applies force to the handle 42 it is seen that the user has the advantage of a lever arm of distance 44 (to the ball joint 24) while the springs 26 urge the joystick 22 with a lever arm of distance 46 and the effort, therefore, required of the user to move the joystick is proportional to the ratio expressed by distance 46/distance 44. The movement of the nuts 28 parallel to the joystick axis (which changes the distance 46) is a linear function of the rotation of the stepper motor 34 and the effort required of the joystick user is, therefore, a linear function of the stepper motor 34 rotation.

It may be appreciated from FIG. 1 that the force of the springs 26a, 26b and the distances 44, 46 determine the user effort at the handle 42 along the direction 50 while the force of the springs 26c, 26d and the distances 44, 46 determine the effort along the direction 52. Efforts to move the handle 42 along directions which are a vectorial combination of the directions 50, 52 are determined by a corresponding vectorial combination of the force of the springs 26a, 26b and 26c, 26d. The springs 26 have been shown to engage a portion 22a of the joystick 22 separated by the ball joint 24 from the handle 42 but the apparatus may also be configured to have the springs engage the joystick 22 on the same side of the ball joint 24 as the handle 42.

FIG. 2 is an enlarged sectional view of the area enclosed by the line 2 in FIG. 1 and illustrates that the springs 26 are attached to a sleeve 54 whose movements along the portion 22a are facilitated by a set of roller bearings 56, 57 which roll thereon. The springs 26 are attached to cups 60

which rotate on circular bosses 62 of the sleeve 54. The cups 60 and bosses 62 accommodate movements of the portion 22a that are transverse to the plane that a spring is in prior to movement of the joystick 22. The attachment of the springs 26 to the cups 60 and to the nuts (28 in FIG. 1)

5 may be accomplished in various manners well known in the art.

The belts 32 are operatively connected between the stepper motor 36 and the screws 30 by sheaves 66, 67 (although they are not shown in the figures, such sheaves commonly have flanges for containment of a belt therewithin). As shown in FIG. 3, which is a view along the plane 3 - 3 of
10 FIG. 1, the belts 32 may have teeth 68 that mesh with corresponding teeth in the sheaves 66. Thus a rotational relationship may be maintained between the stepper motor 34 and the screws 30.

FIG. 4 is a plan view of a gear train 70 that may be substituted for the sheaves 66 and belts 32 of FIGS. 1 and 3 to operatively connect the stepper
15 motor 34 (through its axle 71) and the screws 28 in another preferred embodiment of the invention.

FIG. 5 is a view similar to FIG. 1 illustrating another preferred apparatus embodiment 80 which enables independent computer control of the variable effort along directions 50 and 52. A second stepper motor 82,
20 through a sheave 81 and belts 32 a, 32b controls the movement of springs 26a, 26b while the first stepper motor 34 controls, through a sheave 66 and belts 32 c, 32d, movement of springs 26c, 26d.

This independent movement is enabled, as shown in FIG. 6 which is a sectional view along the plane 6 - 6 of FIG. 5, by tracks 84 disposed axially
25 on the section 22a and wheels 86 which rotatably bear on the tracks 84. The wheels 86 rotate within yokes 88 which terminate in discs 90 which, in turn, rotate within cups 92. Thus, as seen in FIGS. 5, 6, a computer may independently control the effort required of a user of the joystick 22 along the directions 50, 52, by commanding stepper motors 34, 82 to adjust the
30 axial movement along the joystick section 22a of, respectively, springs 26c, 26d and springs 26a, 26b.

FIG. 7 is an enlarged sectional view of the area enclosed by the line 7 of FIG. 1 illustrating another preferred apparatus embodiment for converting the joystick 22 to one requiring variable effort from a user
35 thereof. A lever 102 is disposed about a pivot 104 mounted in a boss 106 and a button 108, disposed in an aperture 110 of the handle 42, abuts the lever 102 through a pointed boss 111. As seen in FIGS. 1 and 7, a stepper

motor 112 controls, through a flexible cable 114 the movement of a nut 116 along a threaded screw 118 which is substantially parallel to the lever 102.

FIG. 8 is an enlarged sectional view along the plane 8 - 8 of FIG. 7 showing a plunger 120 that moves within the nut 116 under urging of a spring 122. As seen in FIGS. 7, 8 the plunger 120 carries a pin 124 that is slidingly received within a slot 126 of the lever 102. The nut 116 slides within a track 128 mounted within the handle 42.

Therefore, in a manner similar to that described above relative to FIG. 1, the stepper motor 112 can, in response to computer commands 113, alter the lever arm distance 130 available to the plunger 116 while the button 108 always uses a lever arm distance 132. Thus the effort required by a user of the joystick to depress the button 108 may be varied by computer control.

FIG. 9 is an enlarged sectional view of the area enclosed by the line 9 of FIG. 7 illustrating that the cable 114 has an outer sleeve 134 and a coaxial inner core 136 that rotatably engages the screw 118 which rotates in bearings 119 disposed in the track 128. The cable is of a type well known in mechanical arts (e. g. automobile speedometer cables).

The button 108 is shown in FIG. 7 to slide by means of slots 138 received over bosses 140 of the handle 42. Small springs 142 urge the button against the lever 102 to secure the button 108 when not in use.

The stepper motor 112 shown in FIG. 5 may be operatively connected to the core 136 through structure 144 well known in the mechanical arts (e. g. gear train or belt). The ball joint 24 schematically illustrated in FIG. 1 by a sphere has an orifice 146 configured so that the ball joint 24 does not abut the cable 114 as the joystick 22 is moved. Since the ball joint 24 is shown schematically it should be understood that the orifice 146 is also a schematic representation indicating that an actual ball joint must be configured to allow flexing of the cable 114 without impinging upon it.

Thus it should be apparent that apparatus embodiments have been disclosed herein enabling computer control of the effort required to operate a joystick by a user thereof.

The embodiments depicted herein are exemplary and numerous modifications and rearrangements can be made with the equivalent result still embraced within the scope of the invention.

What is claimed is:

1. Apparatus, comprising:
a first stepper motor responsive to computer commands;
5 first exerting means, movably attached to a joystick which is operative about a ball joint, for exerting force transversely on said joystick; and first moving means, responsive to said stepper motor, for moving said first exerting means axially along said joystick;
whereby the effort required to move said joystick by a user thereof may be
10 varied by said computer commands.
2. Apparatus as defined in claim 1 wherein said first exerting means comprises a spring for generating said force.
- 15 3. Apparatus as defined in claim 1 wherein said first exerting means comprises a roller bearing disposed on said joystick to facilitate axial movement of said first exerting means thereon.
4. Apparatus as defined in claim 1 wherein said first exerting means
20 comprises:
a track disposed axially on said joystick; and
a wheel disposed on said track to facilitate movement of said first exerting means relative thereto.
- 25 5. Apparatus as defined in claim 1 wherein said first moving means comprises:
a belt operatively engaged by said stepper motor;
a threaded screw disposed substantially parallel to said joystick and operatively engaged by said belt for axial rotation of said screw; and
30 a threaded nut attached to said first exerting means and rotatably engaged by said screw.
6. Apparatus as defined in claim 5 wherein said belt defines a plurality of teeth facilitating maintenance of a rotational relationship between said
35 first stepper motor and said screw.
7. Apparatus as defined in claim 1 wherein said first moving means

comprises:

a threaded screw disposed substantially parallel to said joystick;

a gear train operatively disposed between said stepper motor and said threaded screw for axial rotation of said threaded screw; and

5 a threaded nut attached to said first exerting means and rotatably disposed on said threaded screw.

8. Apparatus as defined in claim 1 wherein said first exerting means is disposed to exert said force on a portion of said joystick separated by said
10 ball joint from the portion of said joystick upon which a user thereof exerts a force.

9. Apparatus as defined in claim 1 wherein said first exerting means is disposed to exert said force on a portion of said joystick on the same side of
15 said ball joint as the portion of said joystick upon which a user thereof exerts a force.

10. Apparatus as defined in claim 1, further comprising:
a second stepper motor responsive to computer commands;
20 a lever disposed within said joystick to be abutted by a button movably mounted in said joystick;
second exerting means, movably attached to said lever, for exerting a force transversely thereon; and
second moving means, responsive to said stepper motor, for moving said
25 second exerting means axially along said lever;
whereby the effort required to move said button by a user thereof may be varied by said computer commands.

11. Apparatus, comprising:
30 a stepper motor responsive to computer commands;
a lever disposed within a joystick to be abutted by a button movably mounted in said joystick;
exerting means, movably attached to said lever, for exerting a force transversely thereon; and
35 moving means, responsive to said stepper motor, for moving said exerting means axially along said lever;
whereby the effort required to move said button by a user thereof may be

varied by said computer commands.

12. Apparatus as defined in claim 11 wherein said exerting means comprises a spring for generating said force.

5

13. Apparatus as defined in claim 11 wherein said lever defines a slot therein and said exerting means comprises a pin disposed in said slot to facilitate movement therein.

10 14. Apparatus as defined in claim 11 wherein said moving means comprises:

a cable coaxial inner core operatively engaged by said stepper motor for axial rotation thereof;

15 a threaded screw disposed substantially parallel to said lever and operatively engaged by said cable coaxial inner core for axial rotation thereof; and

a nut attached to said exerting means and rotatably engaged by said threaded screw.

20 15. A method of exerting computer controlled variable forces upon a joystick, comprising the steps of:

providing a first stepper motor responsive to computer commands;

engaging said joystick at an engagement point thereon with a first spring to exert a force transversely on said joystick; and

25 moving, in response to said first stepper motor, said first spring and said engagement point on said joystick;

whereby the effort required to move said joystick by a user thereof may be varied by said computer commands.

30 16. A method as defined in claim 15 wherein said moving step comprises the steps of:

attaching said first spring to a threaded nut;

disposing a threaded rod responsive to said stepper motor substantially parallel to said joystick; and

35 engaging said threaded nut with said threaded rod.

17. A method as defined in claim 15 further comprising the steps of:

providing a second stepper motor responsive to computer commands;
abutting a button movably mounted in said joystick with a lever;
engaging said lever with a second spring to exert a force transversely
thereon; and

5 moving, in response to said second stepper motor, said second spring
axially along said lever;

whereby the effort required to move said button by a user thereof may be
varied by said computer commands.

10

15

20

25

30

35

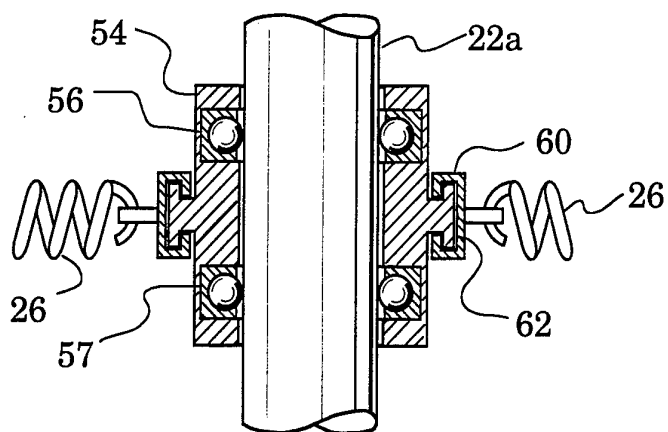


FIG. 2

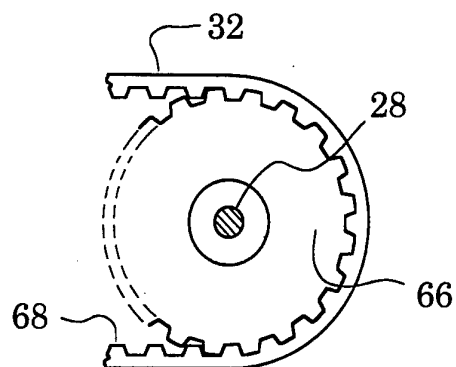


FIG. 3

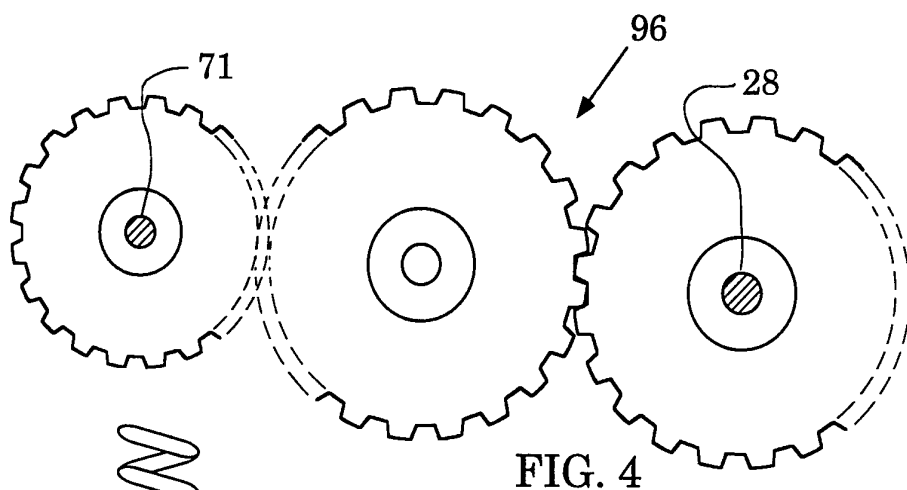


FIG. 4

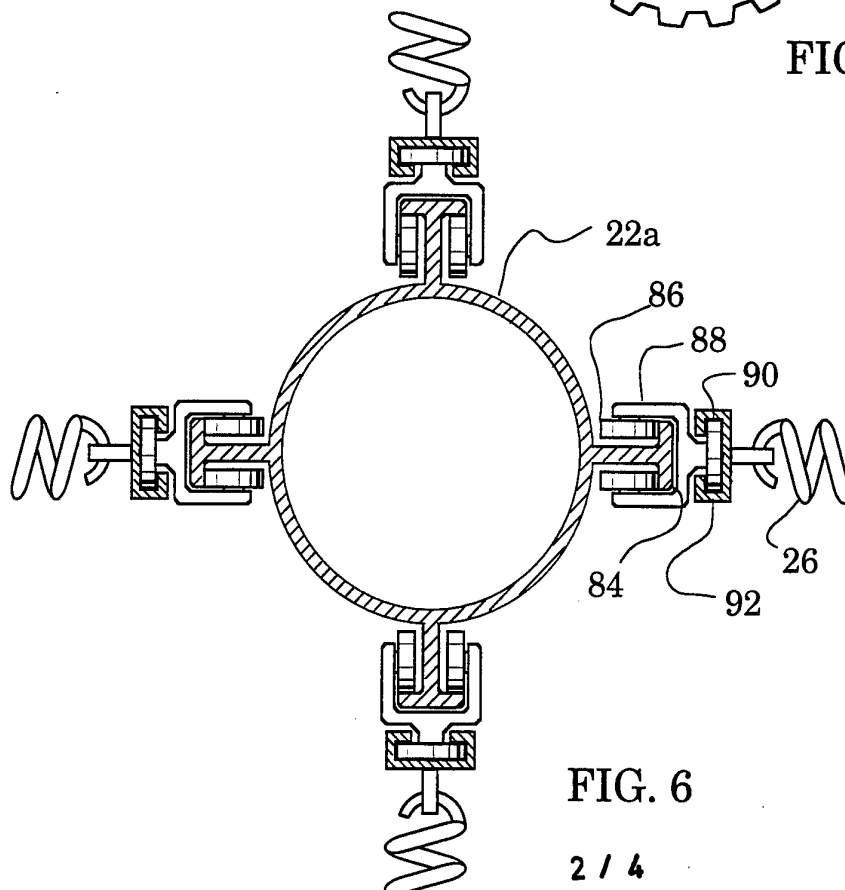


FIG. 6

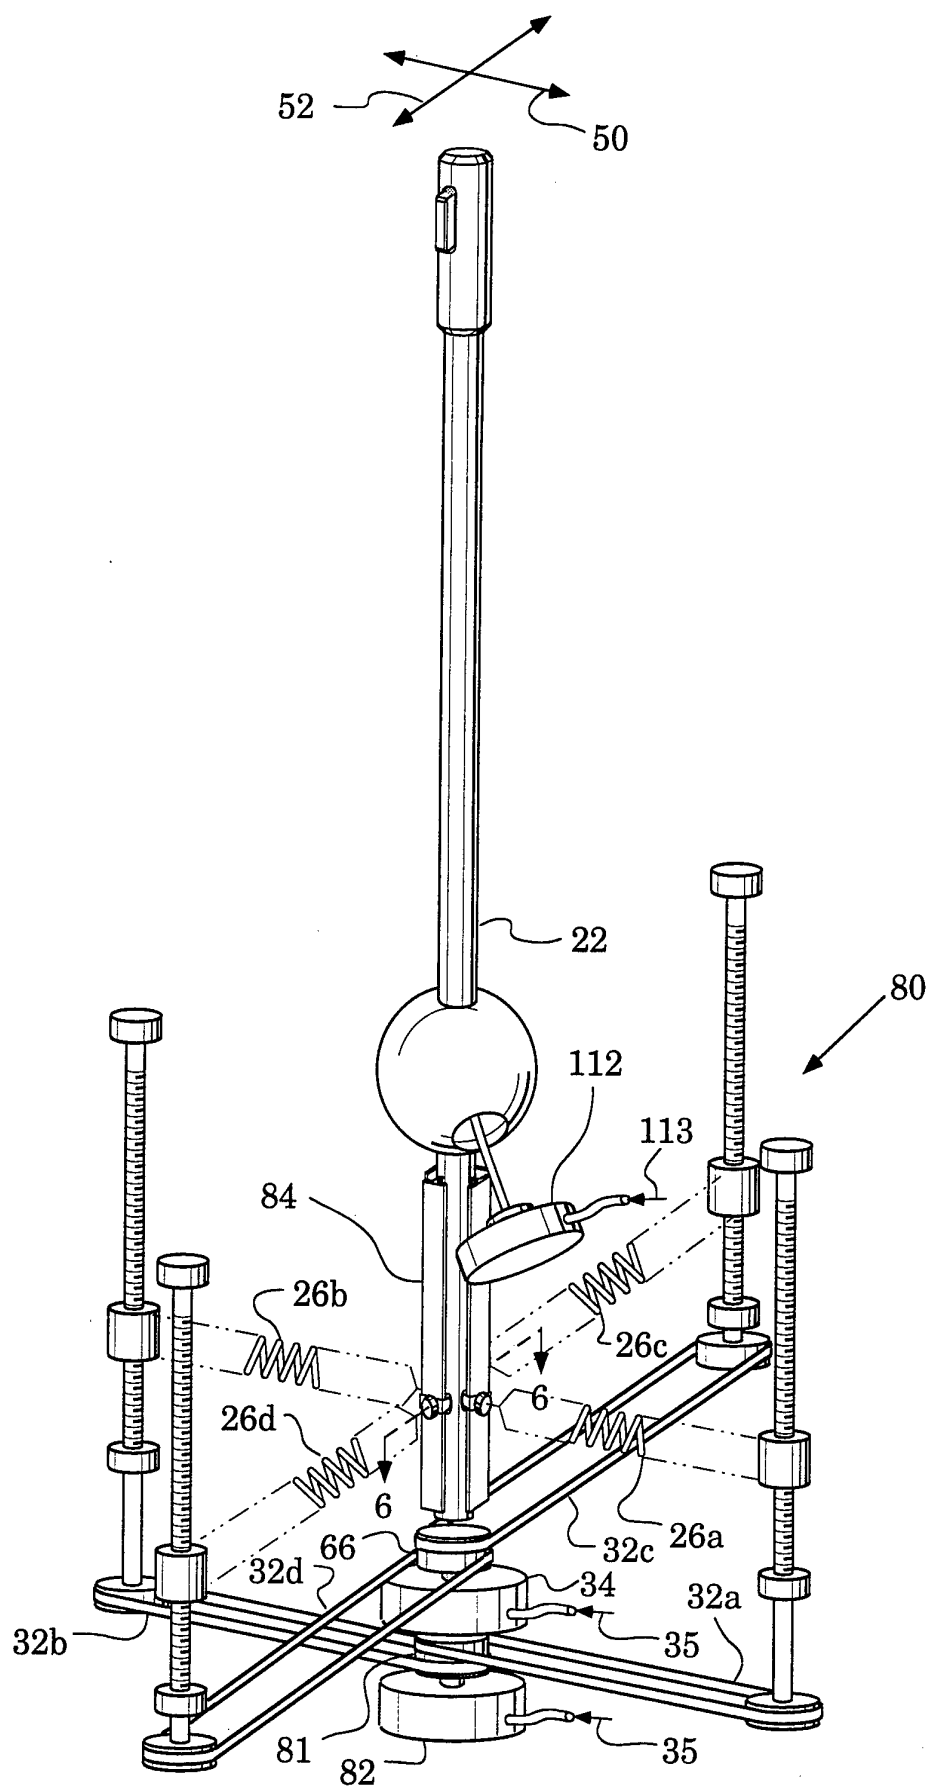


FIG. 5

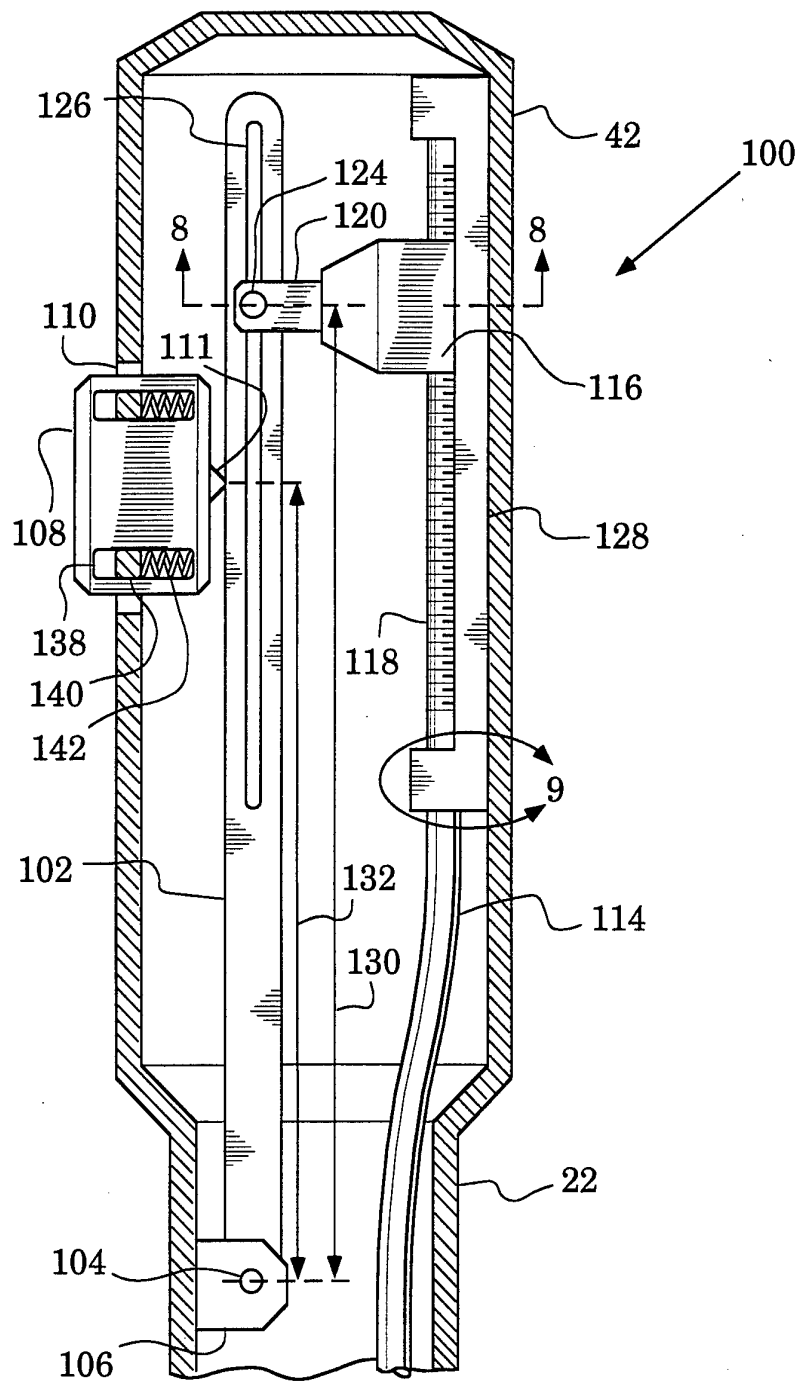


FIG. 7

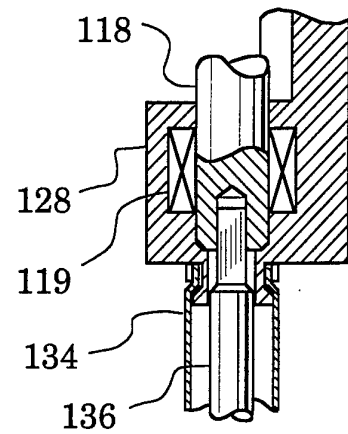


FIG. 9

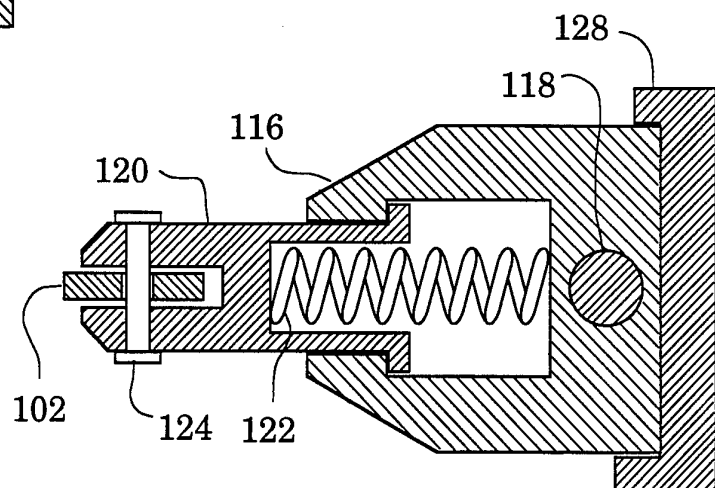


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/06889**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(5) : G05G-000

US CL : 74/471XY, 89.22; 200/6A; 273/148B; 340/709; 341/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 74/471XY, 89.22; 200/6A; 273/148B; 340/709; 341/20

74/89.21, 89.15, 483PB; 273/438; 364/482

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A 2,424,773 (RIEBER) 29 JULY 1947 (SEE ENTIRE DOCUMENT)	1-17
A	US, A 2,984,720 (FISHER) 16 MAY 1961 (SEE ENTIRE DOCUMENT)	1-17
A	US, A 3,091,130 (PAYERLE ET AL) 28 MAY 1963 (SEE ENTIRE DOCUMENT)	1-17
A	US, A 3,550,466 (HAM) 29 DECEMBER 1970 (SEE ENTIRE DOCUMENT)	1-17
A	US, A 3,707,093 (WORDEN) 26 DECEMBER 1972 (SEE ENTIRE DOCUMENT)	1-17
A	US, A 3,940,674 (GILL) 24 FEBRUARY 1976 (SEE ENTIRE DOCUMENT)	1-17

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 October 1993

Date of mailing of the international search report

OCT 13 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

LESLIE BRAUN

Facsimile No. NOT APPLICABLE

Telephone No. (703) 308-2168

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/06889

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A 4,127,841 (KATO ET AL) 28 NOVEMBER 1978 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,200,780 (ROMANO) 29 APRIL 1980 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,216,467 (COLSTON) 05 AUGUST 1980 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,414,438 (MAIER) 08 NOVEMBER 1983 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,419,325 (BERSHEIM) 01 JANUARY 1985 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,509,383 (YEH) 09 APRIL 1985 (ENTIRE DOCUMENT)	1-17
A	US,A 4,532,817 (CHAKI) 06 AUGUST 1985 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,533,899 (ISAKSSON) 06 AUGUST 1985 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,584,443 (YAEGER) 22 APRIL 1986 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,590,339 (SCOTT) 20 MAY 1986 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,660,828 (WEISS) 28 APRIL 1987 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,685,678 (FREDERIKESSEN) 11 AUGUST 1987 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,748,441 (BRZEZINSKI) 31 MAY 1988 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,766,423 (ONO) 23 AUGUST 1988 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,769,517 (SWINNEY) 06 SEPTEMBER 1988 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,800,721 (CEMENSKA) 31 JANUARY 1989 (SEE ENTIRE DOCUMENT)	1-17

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/06889

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A 4,814,682 (YAMADA) 21 MARCH 1989	1-17
A	US,A 4,820,162 (ROSS) 11 APRIL 1989 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,870,389 (ISHIWATA) 26 SEPTEMBER 1989 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,879,556 (DUI MEL) 07 NOVEMBER 1989 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 4,962,448 (DEMAIO ET AL) 09 OCTOBER 1990 (SEE ENTIRE DOCUMENT)	1-17
A	US,A 5,087,904 (DEVOLPI) 11 FEBRUARY 1992 (SEE ENTIRE DOCUMENT)	1-17
A,E	US,A 5,228,356 (CHUANG) 20 JULY 1993 (SEE ENTIRE DOCUMENT)	1-17