



(22) Date de dépôt/Filing Date: 1996/03/14

(41) Mise à la disp. pub./Open to Public Insp.: 1996/09/23

(45) Date de délivrance/Issue Date: 2002/02/19

(30) Priorité/Priority: 1995/03/22 (9505815.2) GB

(51) Cl.Int.⁶/Int.Cl.⁶ G01M 3/28


(72) Inventeur/Inventor:
Ashworth, Roger Philip, GB

(73) Propriétaire/Owner:
LATTICE INTELLECTUAL PROPERTY LIMITED, GB

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : METHODE DE DETECTION DES FUITES DANS UNE CANALISATION

(54) Title: METHOD OF TESTING PIPES FOR LEAKAGE

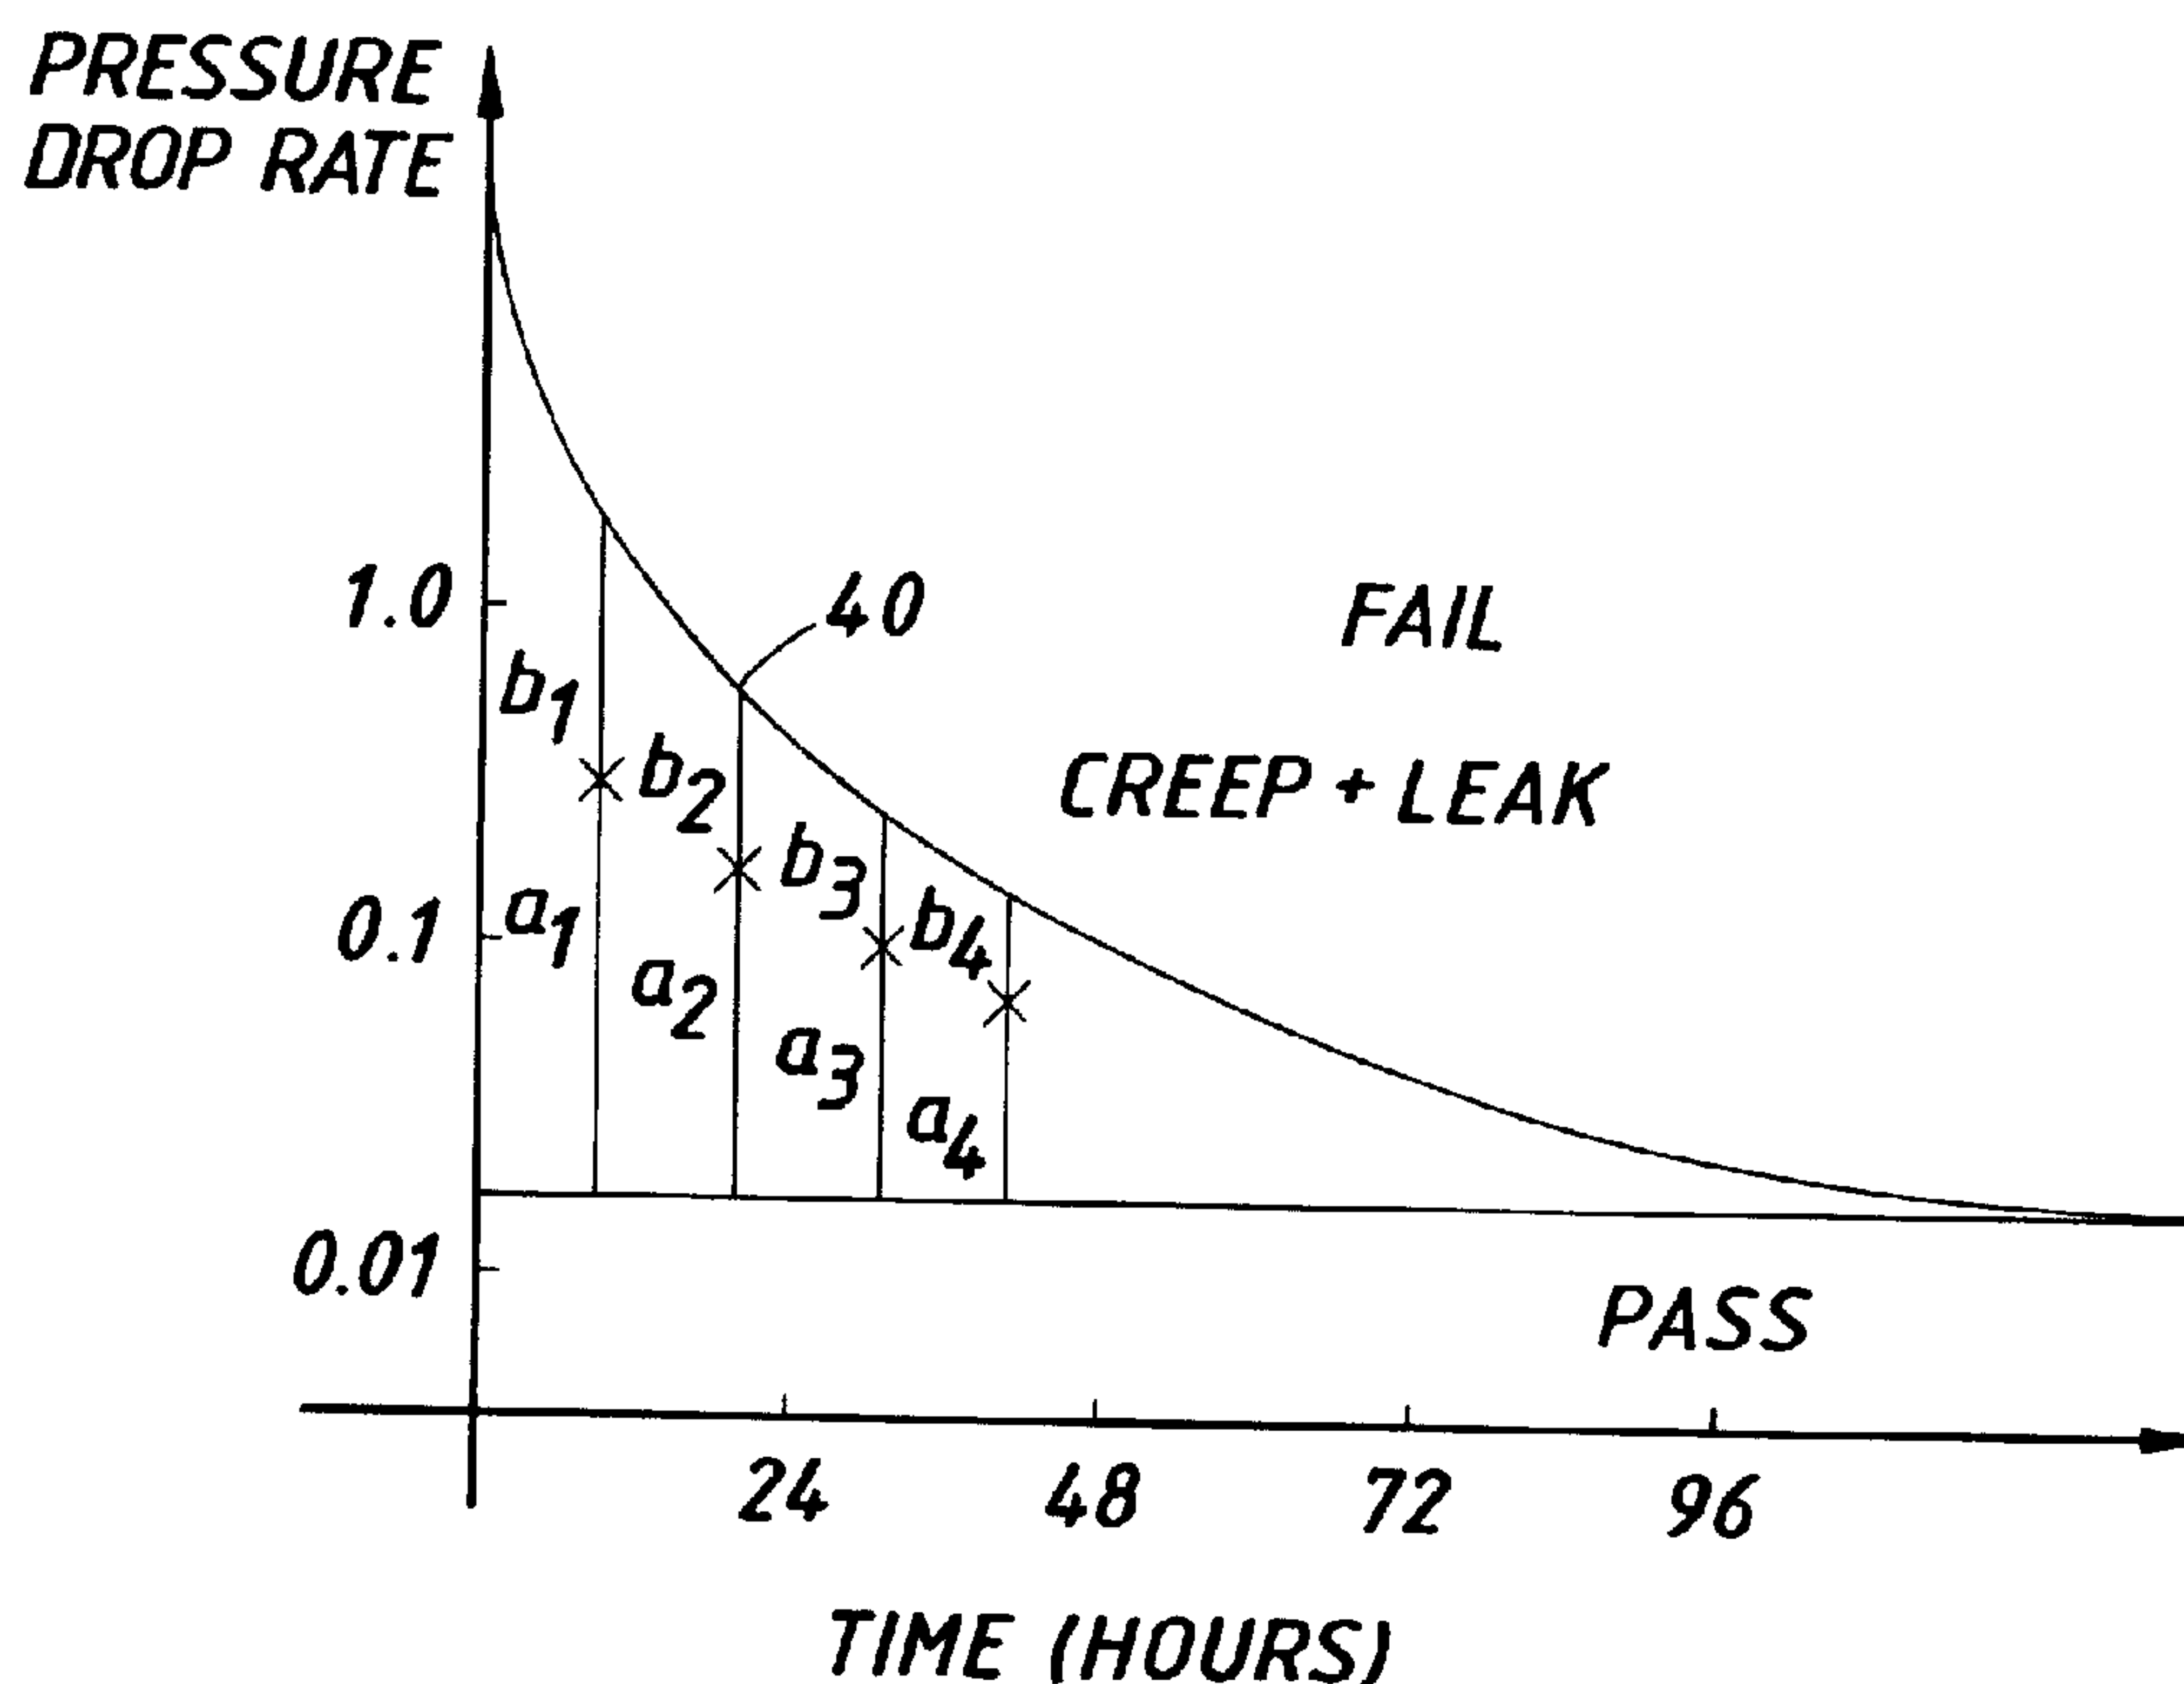

(57) Abrégé/Abstract:

Air is passed under pressure into a pipe under test and into a reference chamber connected to the pipe by a valve while recording at intervals of every few seconds the temperature in the reference chamber the temperature in the pipe and the absolute pressure in the reference chamber When the test pressure has been reached the valve is closed and the differential pressure between the pipe and the reference chamber is measured. The valve is opened to equalise the pressure and then closed again and the differential pressure drift rate is measured. This is repeated several times. A computer is used to calculate a creep prediction curve. A comparison is made to see whether the pressure drift rate due to creep and leak only in the pipe independent of any temperature change in the pipe is trending towards crossing the curve or not.



ABSTRACT

METHOD OF TESTING PIPES FOR LEAKAGE

Air is passed under pressure into a pipe under test and into a reference chamber connected to the pipe by a valve while recording at intervals of every few seconds the temperature in the reference chamber the temperature
5 in the pipe and the absolute pressure in the reference chamber When the test pressure has been reached the valve is closed and the differential pressure between the pipe and the reference chamber is measured. The valve is opened to equalise the pressure and then closed
10 again and the differential pressure drift rate is measured. This is repeated several times. A computer is used to calculate a creep prediction curve. A comparison is made to see whether the pressure drift rate due to creep and leak only in the pipe independent
15 of any temperature change in the pipe is trending towards crossing the curve or not.

METHOD OF TESTING PIPES FOR LEAKAGE

The invention relates to testing isolated buried thermoplastic pipes for leakage.

Leakage detection of distribution pipe is performed by measuring any pressure decay rate during a pneumatic pressure test. The installation is pressurised to 1.5 times its maximum working pressure (typically 3, 6 or 7 bargauge), and regular pressure readings are taken with time until the engineer is satisfied that there is no significant leak.

The pass/fail criterion applied within British Gas plc is that the significant leak is one that represents a leakage of 0.0028 standard cubic metres per hour of gas at the maximum working pressure of the main.

For constant temperature and internal volume, the pressure drop rate caused by a leak is proportional to the leak flowrate, and inversely proportional to the internal volume of the pipework under test. In large volumes very small drop rates have to be resolved. For example, in 100 cubic metres at a 6 bar test, the pass fail drop rate is 36 microbars per hour. Using conventional instrumentation, for example capable of the order of millibar resolution at 7 bar gauge, several days duration of test are required in order to register

such small drop rates.

During such extended test times, other influences such as changing ambient temperature have to be accounted for both from the instrumentation drift and test pressure
5 change viewpoints.

For modern polyethylene gas pipe systems, in addition to temperature change, the other major influence on pressure drop rate behaviour is the creep behaviour of the pipe when pressurised, which causes a time dependent
10 volume increase, in turn leading to a further pressure drop.

For a system with no leak and at constant temperature, the pressure drop behaviour caused by creep is independent of pipe volume, but depends upon the
15 material grade, the pressure (stress), the Standard Dimension Ratio (SDR) (which is the outside diameter of the pipe divided by the wall thickness) and the recent stress history of the pipe. The drop rate curve is exponential in nature, eventually settling to a constant
20 pressure as the volume changes become diminishingly small. Hence for small test volumes the drop rate due to the significant leak dominates over the drop rate due to creep, but in larger volumes the drop rate due to creep dominates in the early days of the test.

25 According to the invention a method of testing an

isolated thermoplastic buried pipe for leakage comprises
qualifying the leakage from the pipe against a pass/fail
leakage criterion by eliminating the effects of
temperature change and changes in the physical pipe
5 volume due to viscoelastic behaviour of the plastic
pipe.

Preferably, a computer and a differential pressure
transducer are used to measure the rate of pressure
change caused by the combination of leak from the pipe,
10 temperature change and physical pipe volume change.

Preferably, the method comprises:

- (i) passing air under pressure into the pipe and into
a reference chamber connected to the pipe by a
valve while recording at intervals of every few
15 seconds the temperature in the reference chamber,
the temperature in the pipe or in the ground
adjacent the pipe, and the absolute pressure in
the reference chamber;
- (ii) when the test pressure has been reached closing
20 said valve and repeatedly measuring the
differential pressure between the pipe and the
reference chamber;
- (iii) opening the valve to equalise the pressures in
the pipe and the reference chamber;

(iv) repeating steps (ii) and (iii) several times at intervals of less than half an hour; and

(v) using a computer to calculate:

5 (a) the predicted curve relating the pressure drop in the pipe (owing to creep and leakage owing to an allowable leak) to time;

and for each set of differential pressures measured at step (ii):

10 (b) the rate of change with respect to time of the differential pressure between the pipe and the reference chamber (the measured differential pressure drift rate);

15 (c) the rate of change with respect to time of the temperature of the pipe or the adjacent ground (the test temperature drift rate);

(d) the rate of change with respect to time of the temperature of the reference chamber (the reference temperature drift rate);

20 (e) the rates of change with respect to time of the pressure drift rates corresponding to (c) and (d) (the predicted test pressure

drift rate and the predicted reference
pressure drift rate, respectively);

5 (f) the difference between the pressure drift
rates calculated in step (e) to yield the
predicted differential pressure drift rate;

(g) the difference between (b) and (f) to yield
the pressure drift rate due to creep and
leak only in the pipe, independent of any
temperature change in the pipe;

10 and

(vi) comparing the results yielded by step (g) and
determining whether or not the results trend is
towards crossing a curve representing a creep
prediction model at the allowable leak.

15 The invention will now be further described by way of
example with reference to the accompanying drawings, in
which:

Fig 1 shows apparatus used in performing the method
20 according to the invention,

and

Fig 2 shows a graphical illustration of how results

obtained can be judged according to a predicted pressure drop rate curve.

The Apparatus

Fig 1 shows a typical excavation to expose one end of a
5 buried polyethylene gas pipe 10. The pipe 10 has been isolated and its end has been closed by a pressure-proof seal 12, as has the remote end (not shown).

The excavation contains the following items: a reference chamber 14; a valve 16 by which the reference chamber 14
10 can be connected to the pipe 10 or isolated therefrom when the valve 16 is closed; a differential pressure transducer 18 which is connected to measure the differential pressure between the pipe 10 and the reference chamber 14; an electronics unit 20 (which
15 contains a computer); and platinum resistance devices 22, 24 to continuously monitor temperature in the pipe 10 and the reference chamber 14. These devices 22, 24 are connected to the unit 20. Instead of measuring the temperature in the pipe 10, it may be more
20 convenient to measure the temperature of the adjacent soil, as shown at 26.

The unit 20 controls the opening and closing of the valve 16. The unit 20 also contains an absolute pressure transducer connected to the pipe 10. The
25 unit 20 also contains electronic circuitry which locally

conditions the temperature signals from the platinum resistance devices, performs an analogue to digital conversion and stores data.

5 The nominal absolute pressure is also measured by means not shown in Fig 1.

The operation of the equipment in the excavation is automatic and, when convenient and required, data is transferred through a non-contacting interface to an interrogating portable computer 30 located outside the
10 excavation. The excavation is closed by a layer 32 of temporary insulation.

The equipment measures pressure drop rates very accurately and in a relatively short time at pressures up to 7 bar gauge. The differential pressure
15 transducer 18 is a commercially available instrument having a full-scale deflection of + or - 0.1 millibar (+ or - 1 mm H₂O).

The pipe 10 is pressurised by passing air into it using a compressor (not shown) and depending on the size of
20 compressor used, and the volume of the pipe 10, pressurisation takes several hours. The reference chamber 14 is also pressurised.

The Method

Before pressurisation of the pipe 10, the equipment in the excavation is energised and during pressurisation the absolute temperature of the pipe 10 and the absolute pressure in the pipe 10 are continuously monitored.

5 Information will also have been passed to the computer regarding the length of the pipe 10 and its SDR. Logging of the absolute temperature and the absolute pressure of the pipe continues throughout pressurisation and the data obtained is used by the computer to create
10 a creep prediction model. This is the pressure drop in the pipe (test pressure drop) versus time curve 40 due to allowable leak of 0.0028 standard cubic meters per hour at the maximum working pressure of the main and creep of the pipe and is shown in Fig 2.

15 During pressurisation the equipment automatically closes and opens the valve 16, typically, every 20 minutes so that the reference chamber 14 is also pressurised to the same pressure as the pipe 10.

The equipment measures the temperature in the reference
20 chamber 14 by means of the device 24 once every 5 seconds. It also measures the temperature in the pipe 10 (or in the adjacent ground) by means of the device 22 (or the device 26) every 5 seconds. The absolute pressure in the reference chamber 14 is also
25 measured at the same rate.

The differential pressure between the pipe 10 and the

reference chamber 14 is measured by the transducer 18 every 5 seconds, however this is useful data only when the valve 16 is closed and is of no value during pressurisation.

- 5 When pressurisation is complete, a period of several hours is allowed to elapse which permits the temperature in the pipe 10 to revert to normal.

In what follows, it will be understood that the equipment in the excavation automatically obtains the
10 data each time the valve 16 is closed.

The interrogating computer 30 requests data from the unit 20 at, say, some 4 hours after the completion of pressurisation.

The unit 20 has been closing the valve 16 every
15 20 minutes and opening the valve 16 if the transducer produces a positive or negative full-scale output. Alternatively, the valve 16 is opened if it has remained closed for more than 5 minutes.

The data sent to the computer 30 is that corresponding
20 to the following operation of the valve 16 under the control of the unit 20:

Every 5 seconds data is collected as mentioned above. The interrogating computer 30 uses that data to find the

differential pressure drift rate.

The valve 16 is opened and the pressures in the pipe 10 and the reference chamber are equalised.

5 The valve 16 closes and the differential pressure is logged every 5 seconds. The valve 16 opens and the pressures in the pipe 10 and the reference chamber 14 are equalised. The valve 16 again closes and again the differential pressure is logged. This process is repeated several times.

10 All of the data logged during the period of those several closures of the valve 16 is transferred to the computer 30.

In each period during which the valve 16 is closed the computer 30 calculates:

- 15 (a) the measured differential pressure drift rate;
- (b) the rate of change with respect to time (all subsequent references to rate of change mean "with respect to time") of the temperature of the pipe 10 (or of the ground adjacent to the pipe 10). This is
- 20 called the test temperature drift rate;
- (c) the rate of change of the temperature of the reference chamber 14 (the reference temperature

drift rate);

(d) the rates of change of the pressures corresponding to (b) and (c) (the test pressure drift rate and the reference pressure drift rate, respectively);

5 (e) the difference between the test pressure drift rate and the reference pressure drift rate to yield the predicted differential pressure drift rate;

(f) the difference between (a) and (e) to yield the pressure drift rate due to creep and leak only in
10 the pipe 10 independent of any temperature change in the pipe 10;

(g) comparing or qualifying the results yielded by step (f) and determining whether or not the results trend is towards crossing the curve 40 representing
15 the creep prediction model at the allowable leak mentioned above at the outset of the description of the Method.

One way of carrying out step (g) is to plot the results with respect to the model 40 as shown in Fig 2. The
20 results are indicated by X's. Then, for each result, determine the height a_1 of the result above a nominal horizontal line drawn on the graph comprising the model 40, determine the depth b_1 of the result below the curve 40, and derive the quotient a_1/b_1 . The curve or

model 40 can represent a worst case prediction.

If the values of the quotients a_1/b_1 , a_2/b_2 , a_3/b_3 ---
is decreasing, the test shows that the pipe 10 has less
than the allowable leak and has "passed" the test. If
5 the values of the quotients is increasing the test shows
that the pipe 10 has more than the allowable leak and
has "failed".

The results plotted may be subject to disturbing
factors, such as noise, which make them very variable.
10 In such cases graphical methods may have to be applied
in order to derive the quotients just mentioned.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method of testing an isolated plastic pipe for leakage wherein the leakage from the pipe is qualified against a pass/fail leakage criterion by eliminating the effects of temperature change and changes in the physical pipe volume due to viscoelastic behavior of the plastic pipe, the method comprising:

(i) passing air under pressure into the pipe and into a reference chamber connected to the pipe by a valve while recording at intervals of every few seconds the temperature in the reference chamber, the temperature in the pipe or in the ground adjacent the pipe, and the absolute pressure in the reference chamber;

(ii) when a test pressure has been reached closing said valve and repeatedly measuring the differential pressure between the pipe and the reference chamber;

(iii) opening the valve to equalize the pressures in the pipe and the reference chamber;

(iv) repeating steps (ii) and (iii) several times at intervals of less than half an hour; and

(v) using a computer to calculate:

(a) the predicted curve relating the pressure drop in the pipe
(owing to creep and leakage owing to an allowable leak) to time;

for each set of differential pressures measured at step (ii):

(b) the rate of change with respect to time of the differential
pressure between the pipe and the reference chamber (the measured
differential pressure drift rate);

(c) the rate of change with respect to time of the temperature of the
pipe or the adjacent ground (the test temperature drift rate);

(d) the rate of change with respect to time of the temperature of the
reference chamber (the reference temperature drift rate);

(e) the rates of change with respect to time of the pressure drift
rates corresponding to (c) and (d) (the predicted test pressure drift rate
and the predicted reference pressure drift rate, respectively);

(f) the difference between the pressure drift rates calculated in step
(e) to yield the predicted differential pressure drift rate;

(g) the difference between (b) and (f) to yield the pressure drift rate due to creep and leak only in the pipe, independent of any temperature change in the pipe; and

(vi) comparing the results yielded by step (g) and determining whether or not the results trend is towards crossing a curve representing a creep prediction model at the allowable leak.

2. A method according to claim 1, in which a computer and a differential pressure transducer are used to measure the rate of pressure change caused by the combination of leak from the pipe, temperature change and physical pipe volume change.


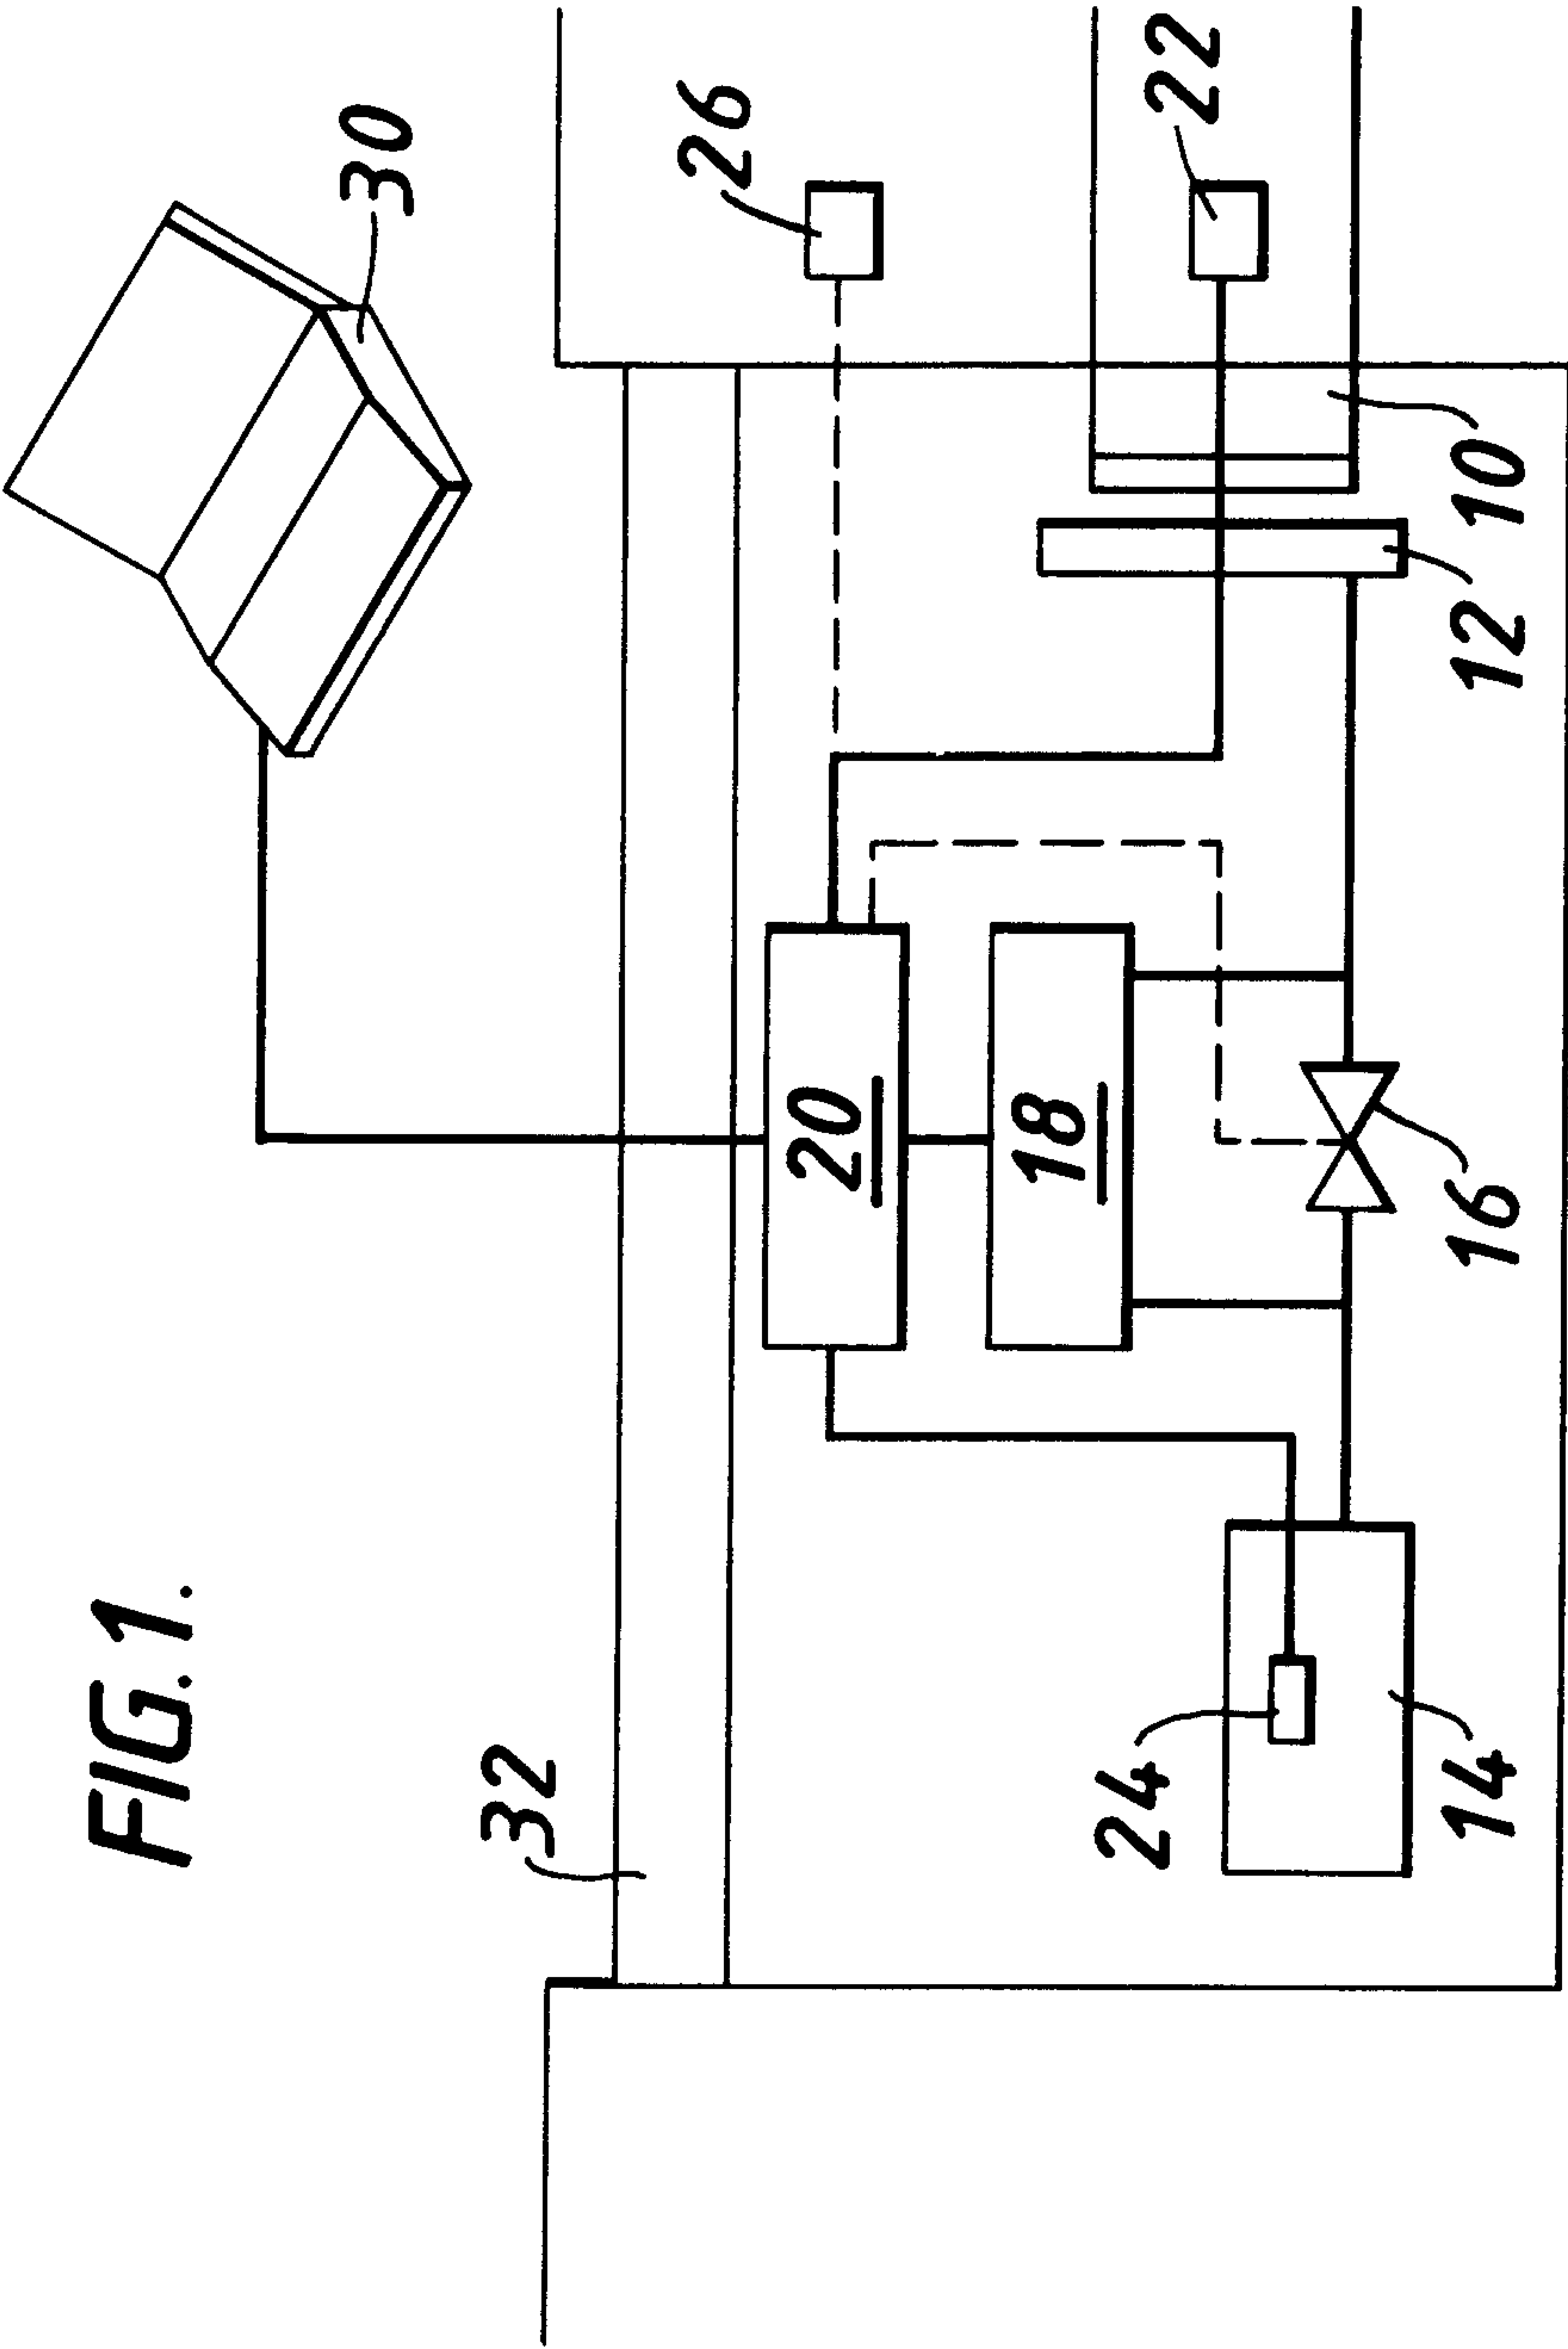


FIG. 1.



**PRESSURE
DROP RATE**

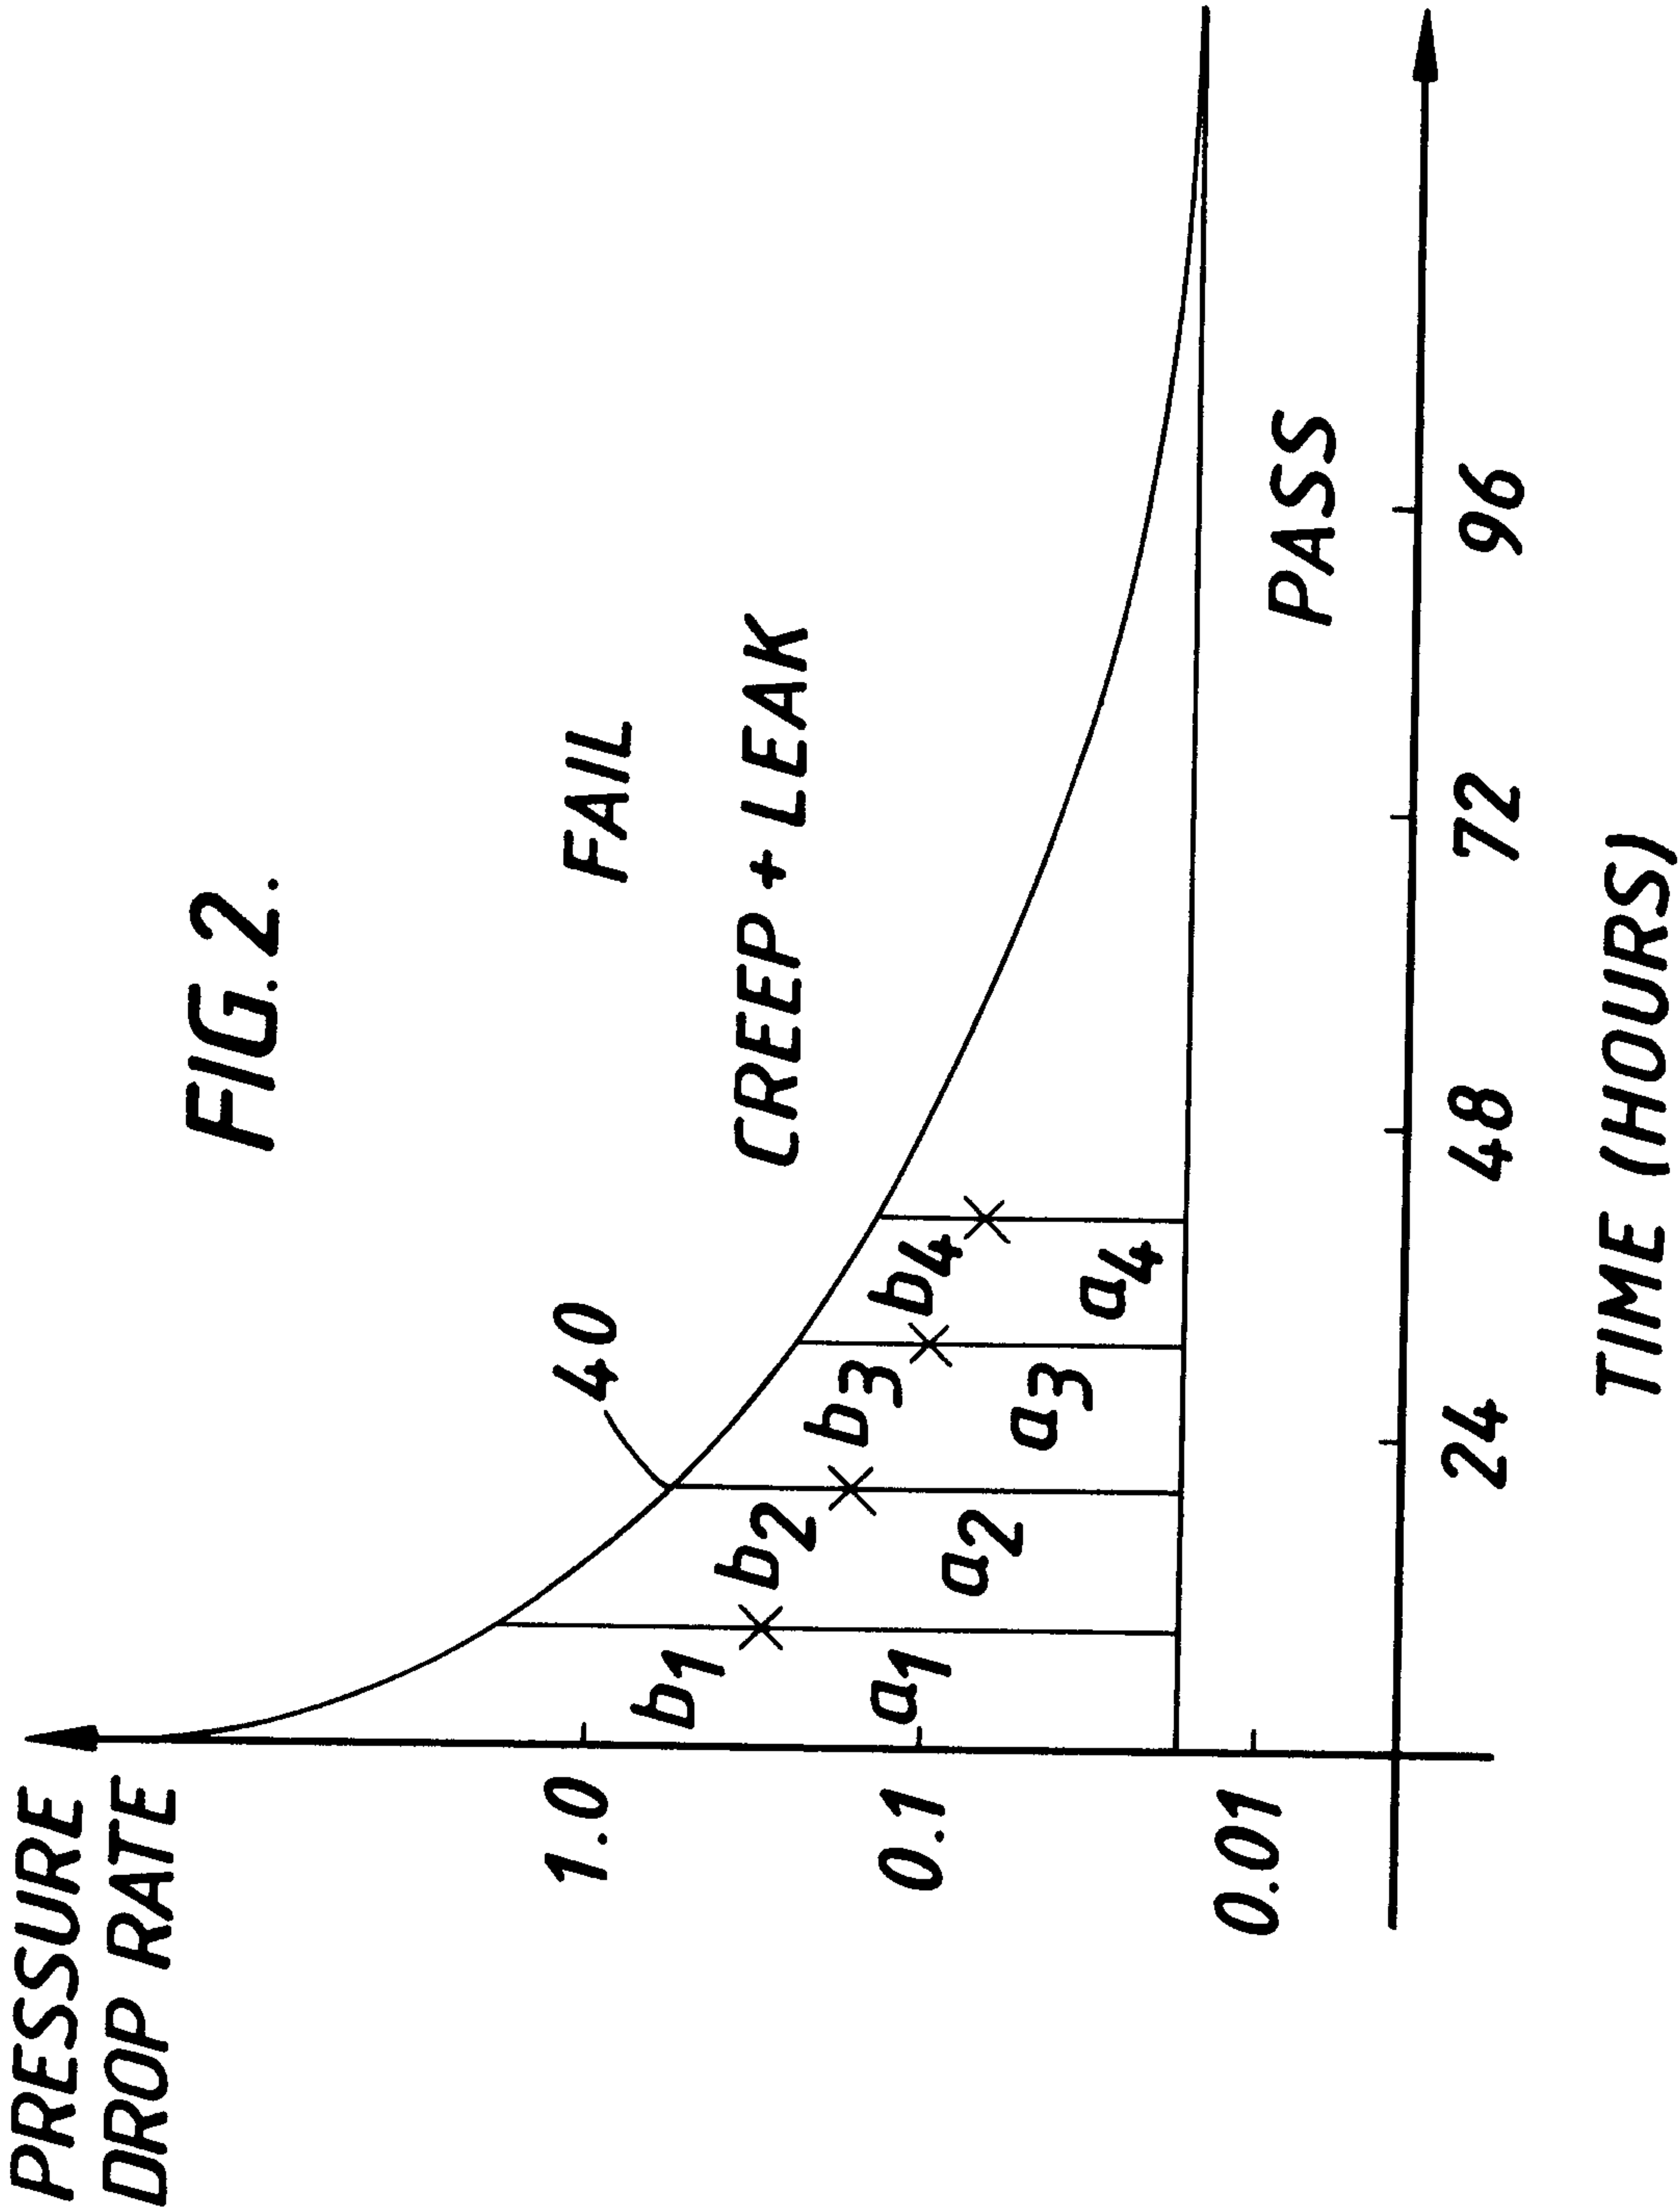