



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2021/05/07

(41) Mise à la disp. pub./Open to Public Insp.: 2021/11/07

(30) Priorité/Priority: 2020/05/07 (US16/869173)

(51) Cl.Int./Int.Cl. *F01D 5/18* (2006.01),
F01D 25/12 (2006.01), *F01D 5/08* (2006.01),
F01D 5/30 (2006.01)


(71) Demandeur/Applicant:
ROLLS-ROYCE CORPORATION, US

(72) Inventeur/Inventor:
CRENSHAW, CAMERON, US

(74) Agent: SMART & BIGGAR LLP

(54) Titre : PLAQUE D'ETANCHEITE BRASEE AVEC DISQUE AUBAGE DE TURBINE MUNIE DE
CARACTERISTIQUES DE RETENTION AXIALE ET DE MESURE DE DEBIT

(54) Title: TURBINE BLADED DISC BRAZED SEALING PLATE WITH FLOW METERING AND AXIAL RETENTION
FEATURES

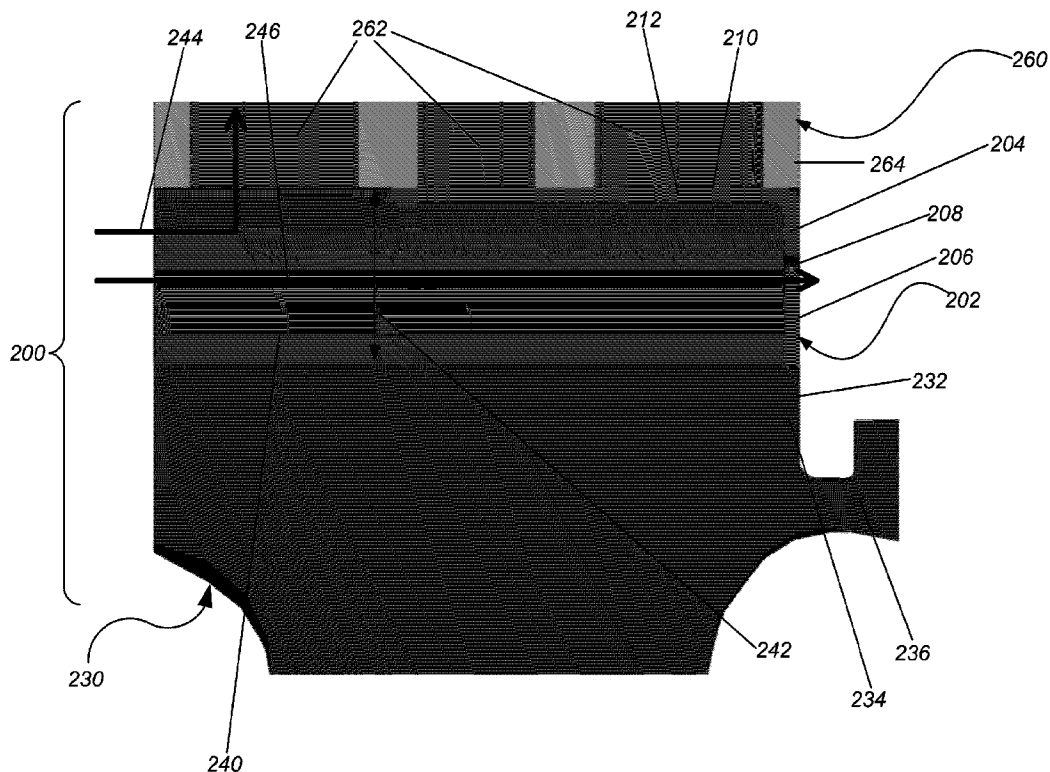

(57) **Abrégé/Abstract:**

A sealing plate for sealing cooling passages in a cooled turbine blade of a gas turbine engine and directing and controlling air flow through cooling passages is provided.



ABSTRACT

A sealing plate for sealing cooling passages in a cooled turbine blade of a gas turbine engine and directing and controlling air flow through cooling passages is provided.

Turbine Bladed Disc Brazed Sealing Plate With Flow Metering and Axial Retention Features

INVENTOR:

Cameron Crenshaw

TECHNICAL FIELD

[0001] This disclosure relates to radial cooling passages between gas turbine engine blades and discs, and, more specifically, to sealing plates brazed to cooled turbine blades to direct and/or control air flow through radial cooling passages.

BACKGROUND

[0002] Gas turbine engines may be used on vehicles such as airplanes and helicopters. These engines are internal combustion engines that operate to produce thrust by discharging a high velocity exhaust. Some gas turbine engines can also include fan blades to create thrust.

[0003] Gas turbine engines include one or more compressors, a combustor, and one or more turbines. Air is compressed in the compressor(s), mixed with fuel in the combustor, and ignited, such that exhaust gases are created and discharged through a turbine. The discharge gas rotates the turbine, which is typically used to turn a shaft and produce shaft work output, such as to drive the compressor or a gearbox. There can be one or more turbines and corresponding shafts producing shaft work output. Gas exhausting from the turbine may be further utilized to generate thrust. Systems within a gas turbine engine may use the shaft work output.

[0004] Some existing gas turbine engine blades and discs have various shortcomings, drawbacks, and disadvantages relative to certain applications. Accordingly, there remains a need for further contributions in this area of technology.

SUMMARY

[0005] According to an aspect of the present disclosure, there is provided a sealing plate, comprising: an aft tang comprising an aft tang aft surface, a forward surface, and a metering hole through the aft tang from the forward surface to the aft tang aft surface; an axial tang comprising an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang; and an interior corner between the forward surface and the axial tang inner radial surface; wherein the axial tang outer radial surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising a plurality of radial cooling passages extending radially outward from the blade inner radial surface; wherein the sealing plate seals each of the plurality of radial cooling passages except for a forward-most radial cooling passage of the plurality of radial cooling passages; and wherein when the cooled turbine blade is attached to a turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang.

[0006] According to another aspect of the present disclosure, there is provided a sealing plate, comprising: an aft tang, comprising an aft tang aft surface, a forward surface, a metering hole through the aft tang from the forward surface to the aft tang aft surface, radial outward axial retention features, and a radial inward axial retention feature; an axial tang, comprising an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang; and an interior corner between the forward surface and the axial tang inner radial surface; wherein the axial tang outer radial surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising a plurality of radial cooling passages extending radially outward from the blade inner radial surface; wherein the sealing plate seals each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages; wherein the radial outward axial retention features extend radially outward along a blade aft surface of the cooled turbine blade, the radial outward axial retention features retaining the cooled turbine blade axially; wherein the radial inward axial retention feature extends radially inward along an aft disc surface of a turbine disc; and wherein when the cooled turbine blade is attached to the turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang.

[0007] According to another aspect of the present disclosure, there is provided a sealing plate, comprising: a outer surface; and an inner surface; wherein the outer surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising: an aft surface; a forward surface; a plurality of radial cooling passages extending radially outward from the inner radial surface; and an aft tang extending radially inward along the aft surface, the aft tang comprising a metering hole; and wherein the sealing plate seals each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The present disclosure may be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale. Moreover, in the figures, like-referenced numerals designate corresponding parts throughout the different views.

[0009] FIG. 1 illustrates a cross-sectional view of an example of a gas turbine engine;

[0010] FIG. 2 illustrates a radial, forward-aft axial cross-sectional view of an example of a turbine blade-disc assembly through the circumferential center of the turbine blade-disc assembly including an example of a sealing plate;

[0011] FIG. 3 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 2;

[0012] FIG. 4 illustrates a radial, forward-aft axial cross-sectional view of another example of a turbine blade-disc assembly through the circumferential center of the turbine blade-disc assembly including another example of a sealing plate and a retaining clip;

[0013] FIG. 5 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate and a retaining clip of FIG. 4;

[0014] FIG. 6 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 4 with the retaining clip removed;

[0015] FIG. 7 illustrates a radial, forward-aft axial cross-sectional view of yet another example of a turbine blade-disc assembly through the circumferential center of the turbine blade-disc assembly including yet another example of a sealing plate;

[0016] FIG. 8 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 7;

[0017] FIG. 9 illustrates a forward perspective view of an example of turbine blade-plate assembly including the example of a cooled turbine blade and a sealing plate of FIG. 7 with the example of a disc removed;

[0018] FIG. 10 illustrates a radial, forward-aft cross-sectional view of yet another example of a turbine blade-disc assembly through the circumferential center of the turbine blade-disc assembly including yet another example of a sealing plate and a retaining clip;

[0019] FIG. 11 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate and a retaining clip of FIG. 10;

[0020] FIG. 12 illustrates a forward perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 10 with the disc and the retaining clip removed;

[0021] FIG. 13 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 10 with the retaining clip removed;

[0022] FIG. 14 illustrates a radial, forward-aft cross-sectional view of yet another example of a turbine blade-disc assembly through the circumferential center of the turbine blade-disc assembly including yet another example of a sealing plate;

[0023] FIG. 15 illustrates an aft perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 14; and

[0024] FIG. 16 illustrates a forward perspective view of the example of a turbine blade-disc assembly including the example of a sealing plate of FIG. 14 with the disc removed.

DETAILED DESCRIPTION

[0025] According to an example of the present disclosure, a sealing plate includes an aft tang including an aft tang aft surface, a forward surface, and a metering hole through the aft tang from the forward surface to the aft tang aft surface. The sealing plate further includes an axial tang including an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang. The sealing plate further includes an interior corner between the forward surface and the axial tang inner radial surface. The axial tang outer radial surface may be brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade including a plurality of radial cooling passages extending radially outward from the inner radial surface. The sealing plate may seal each of the plurality of radial cooling passages except for a forward-most radial cooling passage of the plurality of radial cooling passages. An aft end of a blade-to-disc gap may be sealed by the aft tang when the cooled turbine blade is attached to a turbine disc.

[0026] According to another example of the present disclosure, a sealing plate includes an aft tang, including an aft tang aft surface, a forward surface, a metering hole through the aft tang from the forward surface to the aft tang aft surface, radial outward axial retention features, and a radial inward axial retention feature. The sealing plate further includes an axial tang including an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang. The sealing plate further includes an interior corner between the forward surface and the axial tang inner radial surface. The axial tang outer radial surface may be brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade including a plurality of radial cooling passages extending radially outward from the blade inner radial surface. The sealing plate may seal each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling

passages. The radial outward axial retention features may extend radially outward along a blade aft surface of the cooled turbine blade, the radial outward axial retention features retaining the cooled turbine blade axially. The radial inward axial retention feature may extend radially inward along an aft disc surface of a turbine disc. An aft end of a blade-to-disc gap may be sealed by the aft tang when the cooled turbine blade is attached to a turbine disc.

[0027] According to yet another example of the present disclosure, a sealing plate includes an outer surface and an inner surface. The outer surface may be brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade including an aft surface, a forward surface, a plurality of radial cooling passages extending radially outward from the inner radial surface, and an aft tang extending radially inward along the aft surface, the aft tang including a metering hole. The sealing plate may seal each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages.

[0028] For purposes of promoting an understanding of the principles of the disclosure, reference will now be made to the examples illustrated in the drawings, and specific language may be used to describe the same. It will nonetheless be understood that no limitation of the scope of the disclosure is intended by the illustration and description of certain examples of the disclosure. In addition, any alterations and/or modifications of the illustrated and/or described example(s) are contemplated as being within the scope of the present disclosure. Further, any other applications of the principles of the disclosure, as illustrated and/or described herein, as would normally occur to one skilled in the art to which the disclosure pertains, are contemplated as being within the scope of the present disclosure.

[0029] As gas turbine engine speeds are gradually increasing in pursuit of more advantageous specific fuel consumption ("SFC"), conventional methods of sealing and retaining hollow turbine blades are becoming more difficult to implement. Cooling air typically flows from the forward face of a disc on which the hollow turbine blades are attached, to a cavity or cooling passage in each of the hollow turbine blades. Turbine blade and disc coverplates generally seal a gap between the turbine blades and the disc, while providing some amount of axial

retention to prevent unwanted blade movement. A greater seal in this location typically reduces secondary airflow leakage, which improves overall engine efficiency.

[0030] Without being bound by theory, conventional “segmented” coverplates, or conventional “full-hoop” coverplates are designed to seal as much of the gap between the blade and disc of a gas turbine as possible, allowing for separate secondary airflow to be used for disc cooling, cavity purge flow, and various other cooling applications within the gas turbine engines. A full-hoop coverplate is typically piloted onto the main turbine disc to seal the entirety of the disc rim at all blade locations. Full-hoop coverplates may include a forged ring, which may increase difficulty of manufacturing. Further, full-hoop coverplates typically must be retained or carried by the disc, which may result in significant issues with thermal stresses, higher centrifugal loads, and high-stress interference fits encountered during assembly.

[0031] As used herein, the term “segmented sealing plate,” unless stated otherwise, alone or in combination with other terms, refers to sealing plates that are positioned radially between a turbine blade and a turbine disc, may load into receivable slots in the aft surfaces of the turbine blade and the turbine disc, sealing the gaps between the blade fir tree root and the disc slot bottom. Multiple segmented coverplates may be loaded circumferentially around the disc, and are locked into place using a retaining feature. Segmented coverplates may alternatively move freely between the turbine blade and the turbine disc. While a segmented sealing plate may seal as much of the gap between a turbine blade and a turbine disc as possible, segmented sealing plates have been shown to disadvantageously move or “walk” around a circumference of a turbine disc due to not being held in place, resulting in loss of efficiency. Further, the centrifugal load caused by segmented coverplates must be carried through a blade, which may be weaker than the disc. At higher engine speeds, the centrifugal load may be too significant for the blade to carry. Additionally, a loading slot in a blade for a segmented coverplate introduces a stress concentration that complicates optimization of blade design.

[0032] The turbine blades to which the sealing plates of the present disclosure are brazed are known in the art as “cooled” turbine blades. As used

herein, the term “cooled turbine blade,” unless stated otherwise, alone or in combination with other terms, refers to turbine blades that operate at temperatures above their melting points. Without being bound by theory, in cooled turbine blades including multi-pass cooling schemes, it is also important to direct blade cooling air through the designated passage only, while sealing off all other radial cooling passages, often with a plate that is brazed onto the bottom surface of the blade at final assembly.

[0033] The terms “brazing,” “brazed,” and “braze,” unless stated otherwise, alone or in combination with other terms, refer to a metal-joining process known in the art in which two or more surfaces that are free of oxides are joined together by melting and flowing a filler metal into the joint, the filler metal having a lower melting point than the adjoining two or more surfaces. The process of “brazing” does not involve melting the two or more surfaces together, as in welding. Further, the process of “brazing” requires that the two more or more surfaces are much more closely fitted surfaces than in soldering. During the process of “brazing,” the filler metal flows into the gap between the closely fitting two or more surfaces by capillary action.

[0034] FIG. 1 illustrates a cross-sectional view of an example of a gas turbine engine **100**. In some examples, the gas turbine engine **100** may supply power to and/or provide propulsion of an aircraft. Examples of the aircraft may include a helicopter, an airplane, an unmanned space vehicle, a fixed wing vehicle, a variable wing vehicle, a rotary wing vehicle, an unmanned combat aerial vehicle, a tailless aircraft, a hover craft, and any other airborne and/or extraterrestrial (spacecraft) vehicle. Alternatively, or in addition, the gas turbine engine **100** may be utilized in a configuration unrelated to an aircraft such as, for example, an industrial application, an energy application, a power plant, a pumping set, a marine application (for example, for naval propulsion), a weapon system, a security system, a perimeter defense or security system.

[0035] As described herein, the gas turbine engine **100** may operate with a convertible configuration in either a turbofan mode or a turboshaft mode. The gas turbine engine **100** may take a variety of forms in various examples. Though depicted as an axial flow engine, in some examples, the gas turbine engine **100** may have multiple spools and/or may be a centrifugal or mixed centrifugal/axial

flow engine. In some examples, the gas turbine engine **100** may be a turbojet or turboprop engine with a convertible configuration. Furthermore, the gas turbine engine **100** may be an adaptive cycle and/or variable cycle engine. Other variations are also contemplated.

[0036] The gas turbine engine **100** may include a forward intake section **120**, a compressor section **160**, a combustion section **130**, a turbine section **110**, and an aft exhaust section **150**. As noted above, the hot, high pressure fluid passes through the turbine section **110** during operation of the gas turbine engine **100**. As the fluid flows through the turbine section **110**, the fluid passes between blades **112** of the turbine **114** causing the turbine **114** to rotate. The rotating turbine **114** may turn the shaft **118** such that the blades **112** may rotate around an axis of rotation, such as a centerline X of the turbine **114** and the centerline of the gas turbine engine **100** are the same. The blades **112** may extend radially outward from the centerline X of the turbine **114** and rotate circumferentially relative to the centerline X.

[0037] The term “aft,” as used herein, unless stated otherwise, alone or in combination with other terms, refers to an element, surface, or assembly being situated at, near, or toward a tail of an aircraft or other vehicle. The term “aft” may be distinguished from the term “forward,” which, as used herein, unless stated otherwise, alone or combination with other terms, refers to an element, surface, or assembly being situated at, near, or toward a front of an aircraft or other vehicle. The forward and aft directions may refer to opposite directions along an axis, which may be parallel to, or identical to, the centerline X of the turbine **114**. The terms “axial” and “axially,” as used herein, unless stated otherwise, alone or in combination with other terms, refers to elements, surfaces, and assemblies a along a common axis, which may be forward or aft relative to other elements, surfaces, and/or assemblies.

[0038] The terms “radially” and “radial” as used herein, unless stated otherwise, alone or in combination with other terms, refer to elements, surfaces, or assemblies relative to one another along a radius that may project perpendicularly from a centerline axis. The terms “inward” and “inwardly,” as used herein, unless stated otherwise, alone or combination with other terms, refer to an element, surface, or assembly being situated at, near, or toward the centerline axis along a

radius. The terms “outward” and “outwardly,” as used herein, unless stated otherwise, alone or in combination with other terms, refer to an element, surface, or assembly being situated at, or facing away from the centerline axis along a radius. The terms “inward” and “inwardly” and the terms “outward and “outwardly” may refer to opposite directions along a radius projecting perpendicularly from the centerline axis.

[0039] The terms “circumferential” and “circumferentially,” as used herein, unless stated otherwise, alone or in combination with other terms, refer to elements, surfaces, or assemblies relative to one another encircling a centerline axis at a radius.

[0040] FIG. 2 illustrates a radial, forward-aft axial cross-sectional view of an example of a turbine blade-disc assembly **200** through the circumferential center of the turbine blade-disc assembly **200** including an example of a sealing plate **202**. The sealing plate **202** includes an axial tang **212**, the axial tang **212** integral to the sealing plate **202**, and an aft tang **204**, the aft tang **204** integral to the sealing plate **202**. When the sealing plate **202** is brazed to the blade inner radial surface **268** (not shown in FIG. 2) of the cooled turbine blade **260**, and the cooled turbine blade **260** is attached to the disc **230**, the aft tang **204** extends in a radial direction across the radial distance **242** of the blade-to-disc gap **240** (not shown in FIG. 2) so as to advantageously seal most of the aft end of the vacant blade-to-disc gap **240**, and avoid waste or loss in flow. The aft tang **204** includes a metering hole **208**, such that purge cavity flow is advantageously controlled and directed aft of the turbine blade-disc assembly **200** through metering hole **208**. Metering hole **208** is configured to receive purge cavity flow. The path of purge cavity flow is indicated by arrow **246**. In other examples of the sealing plate **202**, the aft tang **204** may include more than one metering hole **208**. When the sealing plate **202** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260**, the aft tang **204** includes an aft tang aft surface **206** that may be flush with an aft disc surface **232** of an aft portion **234** of the disc **230**. Alternatively, or in addition, the aft tang aft surface **206** of the aft tang **204** may be flush with a blade aft surface **264** of the cooled turbine blade **260**. The axial tang **212** includes an axial tang outer radial surface **210**. The axial tang outer radial surface **210** of the axial tang **212** of the sealing plate **202** is brazed to the blade inner radial

surface **268** of the cooled turbine blade **260**, and the axial tang **212** is of such forward-aft dimension such that when the sealing plate **202** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260**, only the forward-most radial cooling passage **262** is open, and/or configured, to receive blade cooling flow, the path of which is illustrated by arrow **244**. Sealing plate **202** may be advantageously stamped and bent from a single piece of sheet metal or temperature-capable alloy.

[0041] FIG. **3** illustrates an aft perspective view of the example of a turbine blade-disc assembly **200** including the example of a sealing plate **202** of FIG. **2**. The aft tang **204** extends in a circumferential direction across the circumferential distance **248** of the blade-to-disc gap **240** so as to advantageously seal most of the aft end of the vacant blade-to-disc gap **240**. The aft tang **204** also extends in a radial direction across the radial distance **242** of the blade-to-disc gap **240** so as to advantageously seal most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **208** when sealing plate **202** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260**.

[0042] FIG. **4** illustrates a radial, forward-aft axial cross-sectional view of another example of a turbine blade-disc assembly **300** through the circumferential center of the turbine blade-disc assembly **300** including an example of a sealing plate **302**. The sealing plate **302** includes an aft tang **304**, the aft tang **304** integral to the sealing plate **302**, the aft tang **304** including radial outward axial retention feature(s) **310** and radial inward axial retention feature **312**, the radial outward axial retention feature(s) **310** and radial inward axial retention feature **312** integral to the aft tang **304**. Sealing plate **302** further includes an axial tang, the axial tang integral to the sealing plate **302**. The aft tang **304** includes an aft tang aft surface **306**, which extends further in the aft direction than the blade aft surface **264** of cooled turbine blade **260** and further in the aft direction than the aft disc surface **232** of disc **230**. Consequently, when sealing plate **302** is brazed to the blade inner radial surface **268** (not shown in FIG. **4**) of cooled turbine blade **260**, and cooled turbine blade **260** is attached to disc **230**, aft tang aft surface **306** may not be flush with either blade aft surface **264** of cooled turbine blade **260** or aft disc surface **232** of disc **230**. The radial distance **314** from the outer radial edge of radial outward axial retention feature(s) **310** to the inner radial edge of radial

inward axial retention feature **312** is greater than the radial distance **242** of the blade-to-disc gap **240** (not shown in FIG. **4**). Accordingly, when sealing plate **302** is brazed to the blade inner radial surface **268** of cooled turbine blade **260**, and cooled turbine blade **260** is attached to disc **230**, the aft tang **304** advantageously seals most of the aft end of the blade-to-disc gap **240**, and additionally retains cooled turbine blade **260** axially. The aft tang **304** includes a metering hole **308**. Alternatively, the aft tang **304** may include more than one metering hole **308**. Retaining clip **320** may be reversibly engaged on aft hanger arm **236** to confront radial inward axial retention feature **312** and retain aft tang **304** against aft disc surface **232** of disc **230**. Sealing plate **302** may be advantageously stamped and bent from a single piece of sheet metal or temperature-capable alloy.

[0043] FIG. **5** illustrates an aft perspective view of the example of a turbine blade-disc assembly **300** including the example of a sealing plate **302** and a retaining clip **320** of FIG. **4**. The aft tang aft surface **306** of aft tang **304** has a circumferential distance **316** that is greater than the circumferential distance **248** of the blade-to-disc gap **240**. Accordingly, the aft tang **304** advantageously seals most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **308** and additionally retains cooled turbine blade **260** axially when sealing plate **302** is brazed to the blade inner radial surface **268** of cooled turbine blade **260**, and cooled turbine blade **260** is attached to disc **230**.

[0044] FIG. **6** illustrates an aft perspective view of the example of a turbine blade-disc assembly **300** including the example of a sealing plate **302** of FIG. **4** with retaining clip **320** removed from aft hanger arm **236**. The aft surface radial distance **318** from the outer radial edge at the circumferential center to the inner radial edge of the radial inward axial retention feature **312** is greater than the radial distance **242** of the blade-to-disc gap **240**. Accordingly, the aft tang **304** advantageously seals most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **308** when sealing plate **302** is brazed to the blade inner radial surface **268** of cooled turbine blade **260**, and cooled turbine blade **260** is attached to disc **230**. The radial inward axial retention feature **312** may span the circumferential distance of the inner radial edge of aft tang aft surface **306**.

[0045] FIG. **7** illustrates a radial, forward-aft axial cross-sectional view of yet another example of a turbine blade-disc assembly **400** through the circumferential

center of the turbine blade-disc assembly **400** including yet another example of a sealing plate **402**. The sealing plate **402** includes an axial tang **412**, the axial tang **412** integral to the sealing plate **402**, and an aft tang **404**, the aft tang **404** integral to the sealing plate **402**. Additionally, sealing plate **402** includes profile reinforcement **414**, profile reinforcement **414** integral to the sealing plate **402**, which may allow the turbine blade-disc assembly **400** to advantageously resist the forces associated with high speed turbine operation and intense loads. Sealing plate **402** may be machined from a forging or casting, rather than being stamped and bent from a single piece of sheet metal. The aft tang **404** extends in a radial direction across the radial distance **242** of the blade-to-disc gap **240** so as to advantageously seal most of the aft end of the vacant blade-to-disc gap **240**, other than metering hole(s) **408**, and avoid waste or loss in flow, when sealing plate **402** is brazed to blade inner radial surface **268** of cooled turbine blade **260** and cooled turbine blade **260** is attached to disc **230**. The aft tang **204** includes a metering hole **408**, such that purge cavity flow is advantageously controlled and directed aft of the turbine blade-disc assembly **400** through metering hole **408**. Metering hole **408** is configured to receive purge cavity flow. In other examples of the sealing plate **402**, the aft tang **404** may include more than one metering hole **408**. The aft tang **404** includes an aft tang aft surface **406** that may be flush with the aft disc surface **232** of the aft portion **234** of the disc **230** when the sealing plate **402** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260** and the cooled turbine blade **260** is attached to disc **230**. Alternatively, or in addition, the aft tang aft surface **406** of the aft tang **404** may be flush with the blade aft surface **264** of the cooled turbine blade **260**. The axial tang **412** includes an axial tang outer radial surface **410**. The forward surface **416** (not shown in FIG. 7) of the aft tang **404** and an axial tang inner radial surface **418** of the axial tang **412** meet at an interior corner. Profile reinforcement **414** may be such that the interior corner has a fillet shape. The axial tang outer radial surface **410** of the axial tang **412** of the sealing plate **402** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260**, and the axial tang **412** is of such forward-aft dimension such that only the forward-most radial cooling passage **262** is open, and/or configured, to receive blade cooling flow. Sealing plate **402** may be

advantageously machined from a casting or forging, thereby providing similar tolerances to a fir-tree style turbine blade attachment.

[0046] FIG. 8 illustrates an aft perspective view of the example of a turbine blade-disc assembly **400** including the example of a sealing plate **402** of FIG. 7. The aft tang **404** extends in a circumferential direction across the circumferential distance **448** of the blade-to-disc gap **240** so as to advantageously seal most of the aft end of the vacant blade-to-disc gap **240** other than metering hole(s) **408** so as to advantageously control and direct purge cavity flow aft of the turbine blade-disc assembly **400**, as illustrated by arrow **246**. Metering hole(s) **408** are configured to receive purge cavity flow. The aft tang **404** also extends in a radial direction across the radial distance **442** of the blade-to-disc gap **240** so as to advantageously seal most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **408**.

[0047] FIG. 9 illustrates a forward perspective view of the example of turbine blade-plate assembly **450** including the example of a cooled turbine blade **260** and a sealing plate **402** of FIG. 7 with the example of a disc **230** removed. The axial tang outer radial surface **410** of the axial tang **412** of the sealing plate **402** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260** such that all but the forward-most radial cooling passage **262** is sealed by the sealing plate **402**. Profile reinforcement **414** may be at an interior corner of sealing plate **402** such that axial tang inner radial surface **418** of axial tang **412** may meet forward surface **416** of aft tang **404** at an interior corner with a fillet shape.

[0048] FIG. 10 illustrates a radial, forward-aft cross-sectional view of yet another example of a turbine blade-disc assembly **500** through the circumferential center of the turbine blade-disc assembly **500** including yet another example of a sealing plate **502** and a retaining clip **320**. The sealing plate **502** includes an aft tang **504**, the aft tang **504** integral to the sealing plate **502**, the aft tang **504** including radial outward axial retention feature(s) **510** and radial inward axial retention feature **512**, the radial outward axial retention feature(s) **510** and radial inward axial retention feature **512** integral to the sealing plate **502**. The aft tang **504** includes an aft tang aft surface **506**, which extends further in the aft direction than the blade aft surface **264** of cooled turbine blade **260** and further in the aft

direction than the aft disc surface **232** of disc **230**. Consequently, when sealing plate **502** is brazed to blade inner radial surface **268** of cooled turbine blade **260** and cooled turbine blade **260** is attached to disc **230**, aft tang aft surface **506** may not be flush with either blade aft surface **264** of cooled turbine blade **260** or aft disc surface **232** of disc **230**. The radial distance **514** from the outer radial edge of radial outward axial retention feature(s) **510** to the inner radial edge of radial inward axial retention feature **512** is greater than the radial distance **242** of the blade-to-disc gap **240**. Accordingly, the aft tang **504** advantageously seals most of the aft end of the blade-to-disc gap **240**, and additionally retains cooled turbine blade **260** axially when sealing plate **502** is brazed to blade inner radial surface **268** of cooled turbine blade **260** and cooled turbine blade **260** is attached to disc **230**. The aft tang **504** includes a metering hole **508**. Alternatively, the aft tang **504** may include more than one metering hole **508** (not shown). Sealing plate **502** includes axial tang **518**, the axial tang **518** integral to the sealing plate **502**, the axial tang **518** including axial tang outer radial surface **516**. Axial tang outer radial surface **516** of axial tang **518** of sealing plate **502** is brazed to blade inner radial surface **268** of cooled turbine blade **260** such that all but the forward-most radial cooling passage **262** is sealed by the sealing plate **502**. Sealing plate **502** further includes profile reinforcement **520**, the profile reinforcement **520** integral to the sealing plate **502**. Retaining clip **320** is reversibly engaged on aft hanger arm **236** to confront radial inward axial retention feature **512** and retain aft tang **504** against aft disc surface **232** of disc **230**. Sealing plate **502** may be advantageously machined from a casting or forging, thereby providing similar tolerances to a fir-tree style turbine blade attachment.

[0049] FIG. **11** illustrates an aft perspective view of the example of a turbine blade-disc assembly **500** including the example of a sealing plate **502** and a retaining clip **320** of FIG. **10**. The aft tang aft surface **506** of aft tang **504** has a circumferential distance **540** that is greater than the circumferential distance **248** of the blade-to-disc gap **240**. Accordingly, the aft tang **504** advantageously seals most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **508** and additionally retains cooled turbine blade **260**.

[0050] FIG. **12** illustrates a forward perspective view of the example of turbine blade-plate assembly **550** including the example of a cooled turbine blade

260 and a sealing plate **502** of FIG. **10** with the example of a disc **230** removed. The axial tang outer radial surface **516** of the axial tang **518** is brazed to the blade inner radial surface **268** of the cooled turbine blade **260** such that all but the forward-most radial cooling passage **262** is sealed by the sealing plate **502**. Profile reinforcement **520** may be at an interior corner of sealing plate **502** such that axial tang inner radial surface **522** of axial tang **518** may meet forward surface **526** of aft tang **504** at an interior corner with a fillet shape.

[0051] FIG. **13** illustrates an aft perspective view of the example of a turbine blade-disc assembly **500** including the example of a sealing plate **502** of FIG. **10** with retaining clip **320** removed from aft hanger arm **236**. The aft surface radial distance **524** from the outer radial edge at the circumferential center of aft tang aft surface **506** to the inner radial edge of the radial inward axial retention feature **512** is greater than the radial distance **242** of the blade-to-disc gap **240**. Accordingly, the aft tang **504** advantageously seals most of the aft end of the blade-to-disc gap **240** other than metering hole(s) **508** and additionally retains cooled turbine blade **260** axially when sealing plate **502** is brazed to the blade inner radial surface **268** of cooled turbine blade **260** and cooled turbine blade **260** is attached to disc **230**.

[0052] FIG. **14** illustrates a radial, forward-aft cross-sectional view of yet another example of a turbine blade-disc assembly **600** through the circumferential center of the turbine blade-disc assembly **600** including yet another example of a sealing plate **602**. Cooled turbine blade **650** includes aft tang **654**, the aft tang **654** integral to the cooled turbine blade **650**, the aft tang **654** extending radially inward relative to blade inner radial surface **660** to a radial distance **630** corresponding to the radial distance of the blade-to-disc gap **636** so as to seal the aft end of the blade-to-disc gap **636** when the cooled turbine blade **650** is attached to the disc **230** at aft tang **654**. Aft tang **654** includes a metering hole **656**. Alternatively, aft tang **654** may include more than one metering hole **656**. Once the cooled turbine blade **650** is attached to the disc **230**, the blade aft surface **652** of the cooled turbine blade **650** may be flush with the aft disc surface **232** of the disc **230**. Sealing plate **602** includes an outer radial surface **604** and an inner radial surface **606**. The outer radial surface **604** is brazed to the blade inner radial surface **660** and the sealing plate **602** is of such forward-aft dimension such that all radial cooling passages **658** except the forward-most radial cooling passage

658 are sealed off and only the forward-most radial cooling passage **658** is open, and/or configured, to receive blade cooling flow, the path of which is illustrated by arrow **632**. Purge cavity flow is advantageously controlled and directed aft of the turbine blade-disc assembly **600** through metering hole(s) **656**. Metering hole(s) **656** may be configured to receive purge cavity flow. The path of purge cavity flow is illustrated by arrow **634**. Cooled turbine blade **650** and sealing plate **602** may be particularly advantageous by permitting tighter machining tolerances during manufacturing, and requiring only minor casting modifications. Sealing plate **602** may be advantageously stamped from an alloy.

[0053] FIG. **15** illustrates an aft perspective view of the example of turbine blade-disc assembly **600** including the example of a sealing plate **602** of FIG. **14**. The aft tang **654** extends in a circumferential direction across the entire circumferential distance **638** of the blade-to-disc gap **636** so as to advantageously seal most of the aft end of the vacant blade-to-disc gap **636** other than metering hole(s) **656**. The aft tang **654** also extends in a radial direction across the radial distance **630** of the blade-to-disc gap **636** so as to advantageously seal most of the aft end of the blade-to-disc gap **636** other than metering hole(s) **656** when the cooled turbine blade **650** is attached to disc **230**.

[0054] FIG. **16** illustrates a forward perspective view of the example of a turbine blade-plate assembly **700** including the example of a cooled turbine blade **650** and a sealing plate **602** of FIG. **14** with the example of a disc **230** removed. The outer radial surface **604** of the sealing plate **602** is brazed to the blade inner radial surface **660** of the cooled turbine blade **650** such that all but the forward-most radial cooling passage **658** is sealed by the sealing plate **602**.

[0055] Without being bound by theory, the sealing plates of the present disclosure, by advantageously attaching to a cooled turbine blade, may be lighter than full-hoop coverplates, and may avoid the stress concentrations caused by segmented coverplates. Because sealing plates of the present disclosure are brazed directly to cooled turbine blades, it is expected that problematic issues associated with “walking” segmented coverplates will not apply. The sealing plates of the present disclosure advantageously supply a steady blade cooling flow and purge cavity flow such that the highest stress area of a turbine disc may be operated at a cooling temperature, potentially prolonging turbine disc life. The

sealing plates of the present disclosure may reduce stress on the cooled turbine blade relative to segmented coverplates. Each sealing plate may include additional or fewer components. In the context of the present disclosure, a first piece is said to be "integral" to a second piece if the first and second pieces are formed as a single piece. For example, if the first and second pieces are cast as a single metal or metal alloy piece, then the first piece is integral to the second piece.

[0056] To clarify the use of and to hereby provide notice to the public, the phrases "at least one of <A>, , ... and <N>" or "at least one of <A>, , ... <N>, or combinations thereof" or "<A>, , ... and/or <N>" are defined by the Applicant in the broadest sense, superseding any other implied definitions hereinbefore or hereinafter unless expressly asserted by the Applicant to the contrary, to mean one or more elements selected from the group comprising A, B, ... and N. In other words, the phrases mean any combination of one or more of the elements A, B, ... or N including any one element alone or the one element in combination with one or more of the other elements which may also include, in combination, additional elements not listed. Unless otherwise indicated or the context suggests otherwise, as used herein, "a" or "an" means "at least one" or "one or more." Unless otherwise indicated or the context suggests otherwise, as used herein, "plurality of" is defined by the Applicant in the broadest sense, superseding any other implied definitions or limitations hereinbefore or hereinafter unless expressly asserted by the Applicant to the contrary, to mean a quantity of more than one.

[0057] All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context.

[0058] While various examples have been described, it will be apparent to those of ordinary skill in the art that many more examples and implementations are possible. Accordingly, the examples described herein are not the only possible implementations.

[0059] The subject-matter of the disclosure may also relate, among others, to the following aspects:

[0060] A first aspect relates to a sealing plate comprising: an aft tang comprising an aft tang aft surface, a forward surface, and a metering hole through

the aft tang from the forward surface to the aft tang aft surface; an axial tang comprising an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang; and an interior corner between the forward surface and the axial tang inner radial surface; wherein the axial tang outer radial surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising a plurality of radial cooling passages extending radially outward from the blade inner radial surface; wherein the sealing plate seals each of the plurality of radial cooling passages except for a forward-most radial cooling passage of the plurality of radial cooling passages; and wherein when the cooled turbine blade is attached to a turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang.

[0061] A second aspect relates to the sealing plate of aspect 1, further comprising a profile reinforcement at the interior corner.

[0062] A third aspect relates to the sealing plate of any preceding aspect, wherein the forward-most radial cooling passage is configured to receive a blade cooling flow.

[0063] A fourth aspect relates to the sealing plate of any preceding aspect, wherein the metering hole is configured to receive a purge cavity flow.

[0064] A fifth aspect relates to the sealing plate of any preceding aspect, wherein the sealing plate is configured to reduce mechanical stress on the cooled turbine blade during turbine operation compared to a segmented coverplate.

[0065] A sixth aspect relates to the sealing plate of any preceding aspect, wherein the aft tang comprises more than one metering hole.

[0066] A seventh aspect relates to the sealing plate of aspect 1, wherein the aft tang further comprises radial outward axial retention features, the radial outward axial retention features extending radially outward along a blade aft surface of the cooled turbine blade, and wherein the radial outward axial retention features retain the cooled turbine blade axially.

[0067] An eighth aspect relates to the sealing plate of aspect 7, wherein the aft tang further comprises a radial inward axial retention feature, the radial inward axial retention feature extending radially inward along an aft disc surface of the turbine disc.

[0068] A ninth aspect relates to the sealing plate of aspect **8**, wherein a retainer clip disposed on an aft hanger arm of the turbine disc reversibly confronts the radial inward axial retention feature and retains the aft tang against the aft disc surface.

[0069] A tenth aspect relates to a sealing plate comprising: an outer surface; and an inner surface; wherein the outer surface is brazed to an inner radial surface of a cooled turbine blade, the cooled turbine blade comprising: an aft surface; a forward surface; a plurality of radial cooling passages extending radially outward from the inner radial surface; and an aft tang extending radially inward along the aft surface, the aft tang comprising a metering hole; and wherein the sealing plate seals each of the plurality of radial cooling passages at the inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages.

[0070] An eleventh aspect relates to the sealing plate of aspect **10**, wherein when the cooled turbine blade is attached to a turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang of the cooled turbine blade.

[0071] A twelfth aspect relates to the sealing plate of aspect **10**, wherein the forward-most radial cooling passage is configured to receive a blade cooling flow.

[0072] A thirteenth aspect relates to the sealing plate of aspect **10**, wherein the metering hole is configured to receive a purge cavity flow.

[0073] In addition to the features mentioned in each of the independent aspects enumerated above, some examples may show, alone or in combination, the optional features mentioned in the dependent aspects and/or as disclosed in the description above and shown in the figures.

CLAIMS:

1. A sealing plate, comprising:
 - an aft tang comprising an aft tang aft surface, a forward surface, and a metering hole through the aft tang from the forward surface to the aft tang aft surface;
 - an axial tang comprising an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang; and
 - an interior corner between the forward surface and the axial tang inner radial surface;wherein the axial tang outer radial surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising a plurality of radial cooling passages extending radially outward from the blade inner radial surface;
- wherein the sealing plate seals each of the plurality of radial cooling passages except for a forward-most radial cooling passage of the plurality of radial cooling passages; and
- wherein when the cooled turbine blade is attached to a turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang.
2. The sealing plate of claim 1, further comprising a profile reinforcement at the interior corner.
3. The sealing plate of claim 1 or 2, wherein the aft tang further comprises radial outward axial retention features, the radial outward axial retention features extending radially outward along a blade aft surface of the cooled turbine blade, and wherein the radial outward axial retention features retain the cooled turbine blade axially.
4. The sealing plate of any one of claims 1 to 3, wherein the aft tang further comprises a radial inward axial retention feature, the radial inward axial retention feature extending radially inward along an aft disc surface of the turbine disc.

5. The sealing plate of claim 4, wherein a retainer clip disposed on an aft hanger arm of the turbine disc reversibly confronts the radial inward axial retention feature and retains the aft tang against the aft disc surface.

6. The sealing plate of any one of claims 1 to 5, wherein the forward-most radial cooling passage is configured to receive a blade cooling flow.

7. The sealing plate of any one of claims 1 to 6, wherein the metering hole is configured to receive a purge cavity flow.

8. The sealing plate of any one of claims 1 to 7, wherein the sealing plate is configured to reduce mechanical stress on the cooled turbine blade during turbine operation compared to a segmented coverplate.

9. The sealing plate of any one of claims 1 to 8, wherein the aft tang comprises more than one metering hole.

10. A sealing plate, comprising:

an aft tang, comprising an aft tang aft surface, a forward surface, a metering hole through the aft tang from the forward surface to the aft tang aft surface, radial outward axial retention features, and a radial inward axial retention feature;

an axial tang, comprising an axial tang outer radial surface and an axial tang inner radial surface, the axial tang integral to the aft tang; and

an interior corner between the forward surface and the axial tang inner radial surface;

wherein the axial tang outer radial surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising a plurality of radial cooling passages extending radially outward from the blade inner radial surface;

wherein the sealing plate seals each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages;

wherein the radial outward axial retention features extend radially outward along a blade aft surface of the cooled turbine blade, the radial outward axial retention features retaining the cooled turbine blade axially;

wherein the radial inward axial retention feature extends radially inward along an aft disc surface of a turbine disc; and

wherein when the cooled turbine blade is attached to the turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang.

11. The sealing plate of claim 10, wherein a retainer clip disposed on an aft hanger arm of the turbine disc reversibly confronts the radial inward axial retention feature and retains the aft tang against the aft disc surface.

12. The sealing plate of claim 10 or 11, further comprising a profile reinforcement at the interior corner.

13. The sealing plate of any one of claims 10 to 12, wherein the forward-most radial cooling passage is configured to receive a blade cooling flow.

14. The sealing plate of any one of claims 10 to 13, wherein the metering hole is configured to receive a purge cavity flow.

15. The sealing plate of any one of claims 10 to 14, wherein the sealing plate is configured to reduce mechanical stress on the cooled turbine blade during turbine operation compared to a segmented coverplate.

16. The sealing plate of any one of claims 10 to 15, wherein the aft tang comprises more than one metering hole.

17. A sealing plate, comprising:
a outer surface; and

an inner surface;

wherein the outer surface is brazed to a blade inner radial surface of a cooled turbine blade, the cooled turbine blade comprising:

an aft surface;

a forward surface;

a plurality of radial cooling passages extending radially outward from the inner radial surface; and

an aft tang extending radially inward along the aft surface, the aft tang comprising a metering hole; and

wherein the sealing plate seals each of the plurality of radial cooling passages at the blade inner radial surface except for a forward-most radial cooling passage of the plurality of radial cooling passages.

18. The sealing plate of claim 17, wherein when the cooled turbine blade is attached to a turbine disc, an aft end of a blade-to-disc gap is sealed by the aft tang of the cooled turbine blade.

19. The sealing plate of claim 17 or 18, wherein the forward-most radial cooling passage is configured to receive a blade cooling flow.

20. The sealing plate of any one of claims 17 to 19, wherein the metering hole is configured to receive a purge cavity flow.

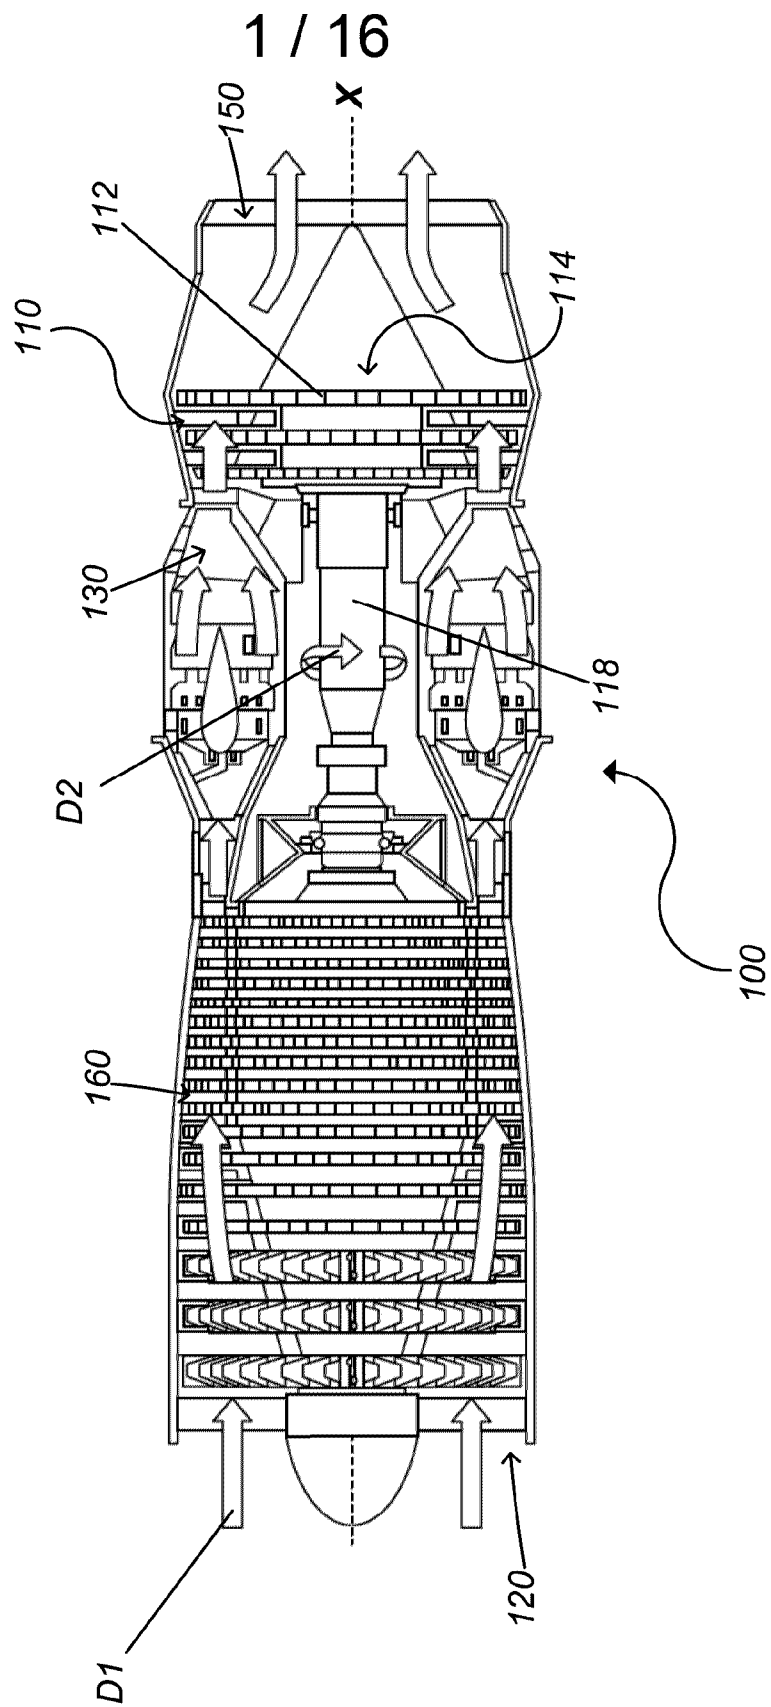


FIG. 1

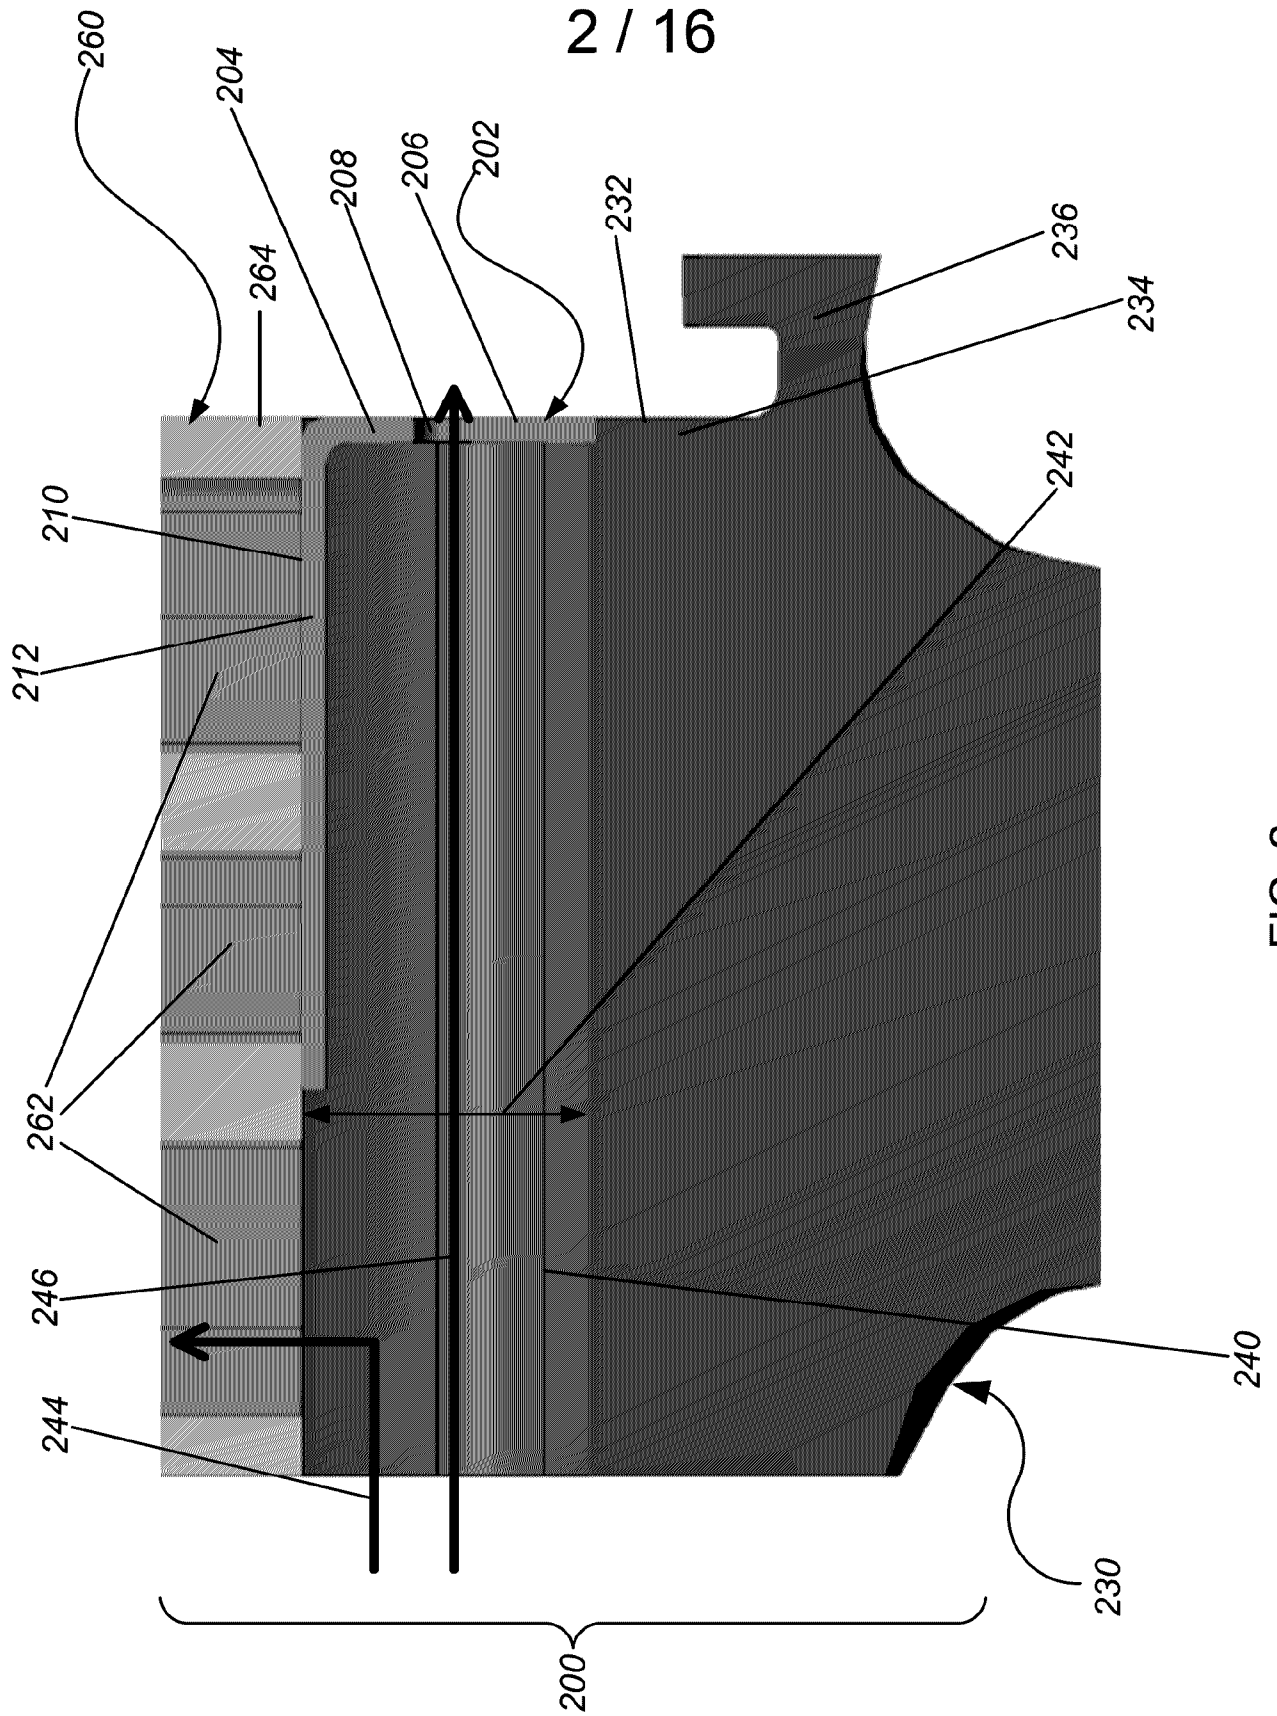


FIG. 2

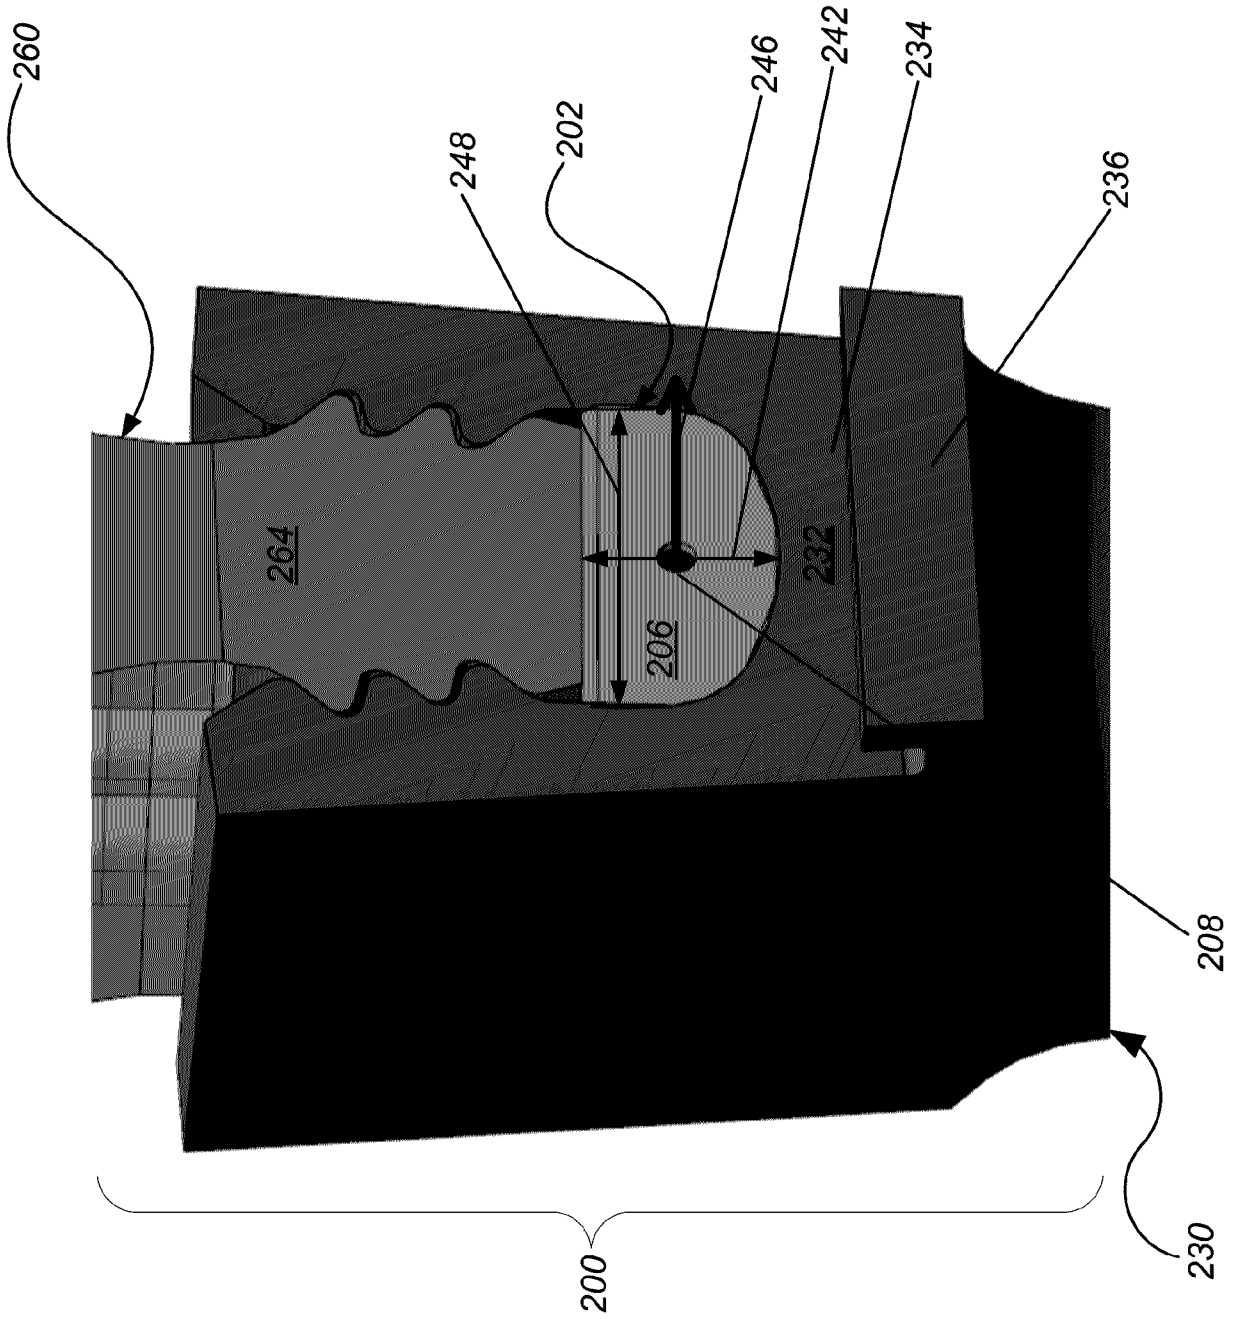


FIG. 3

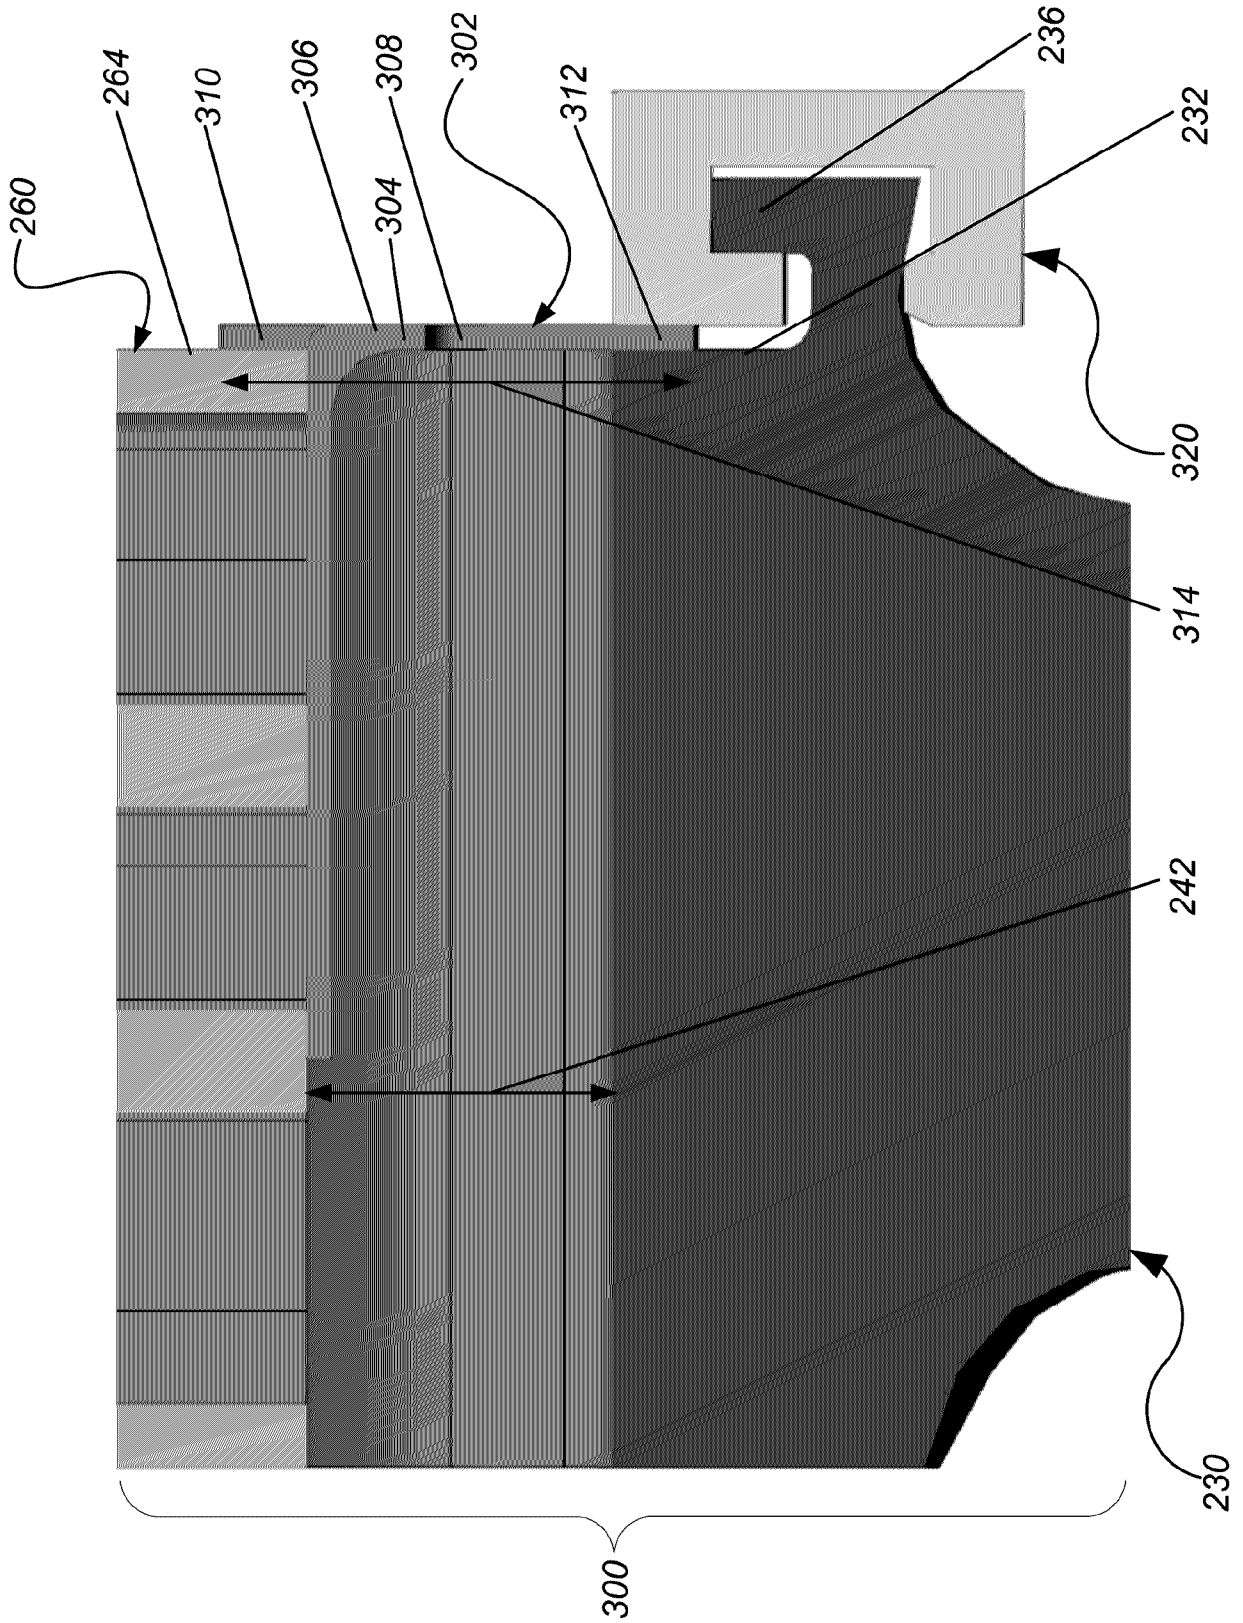


FIG. 4

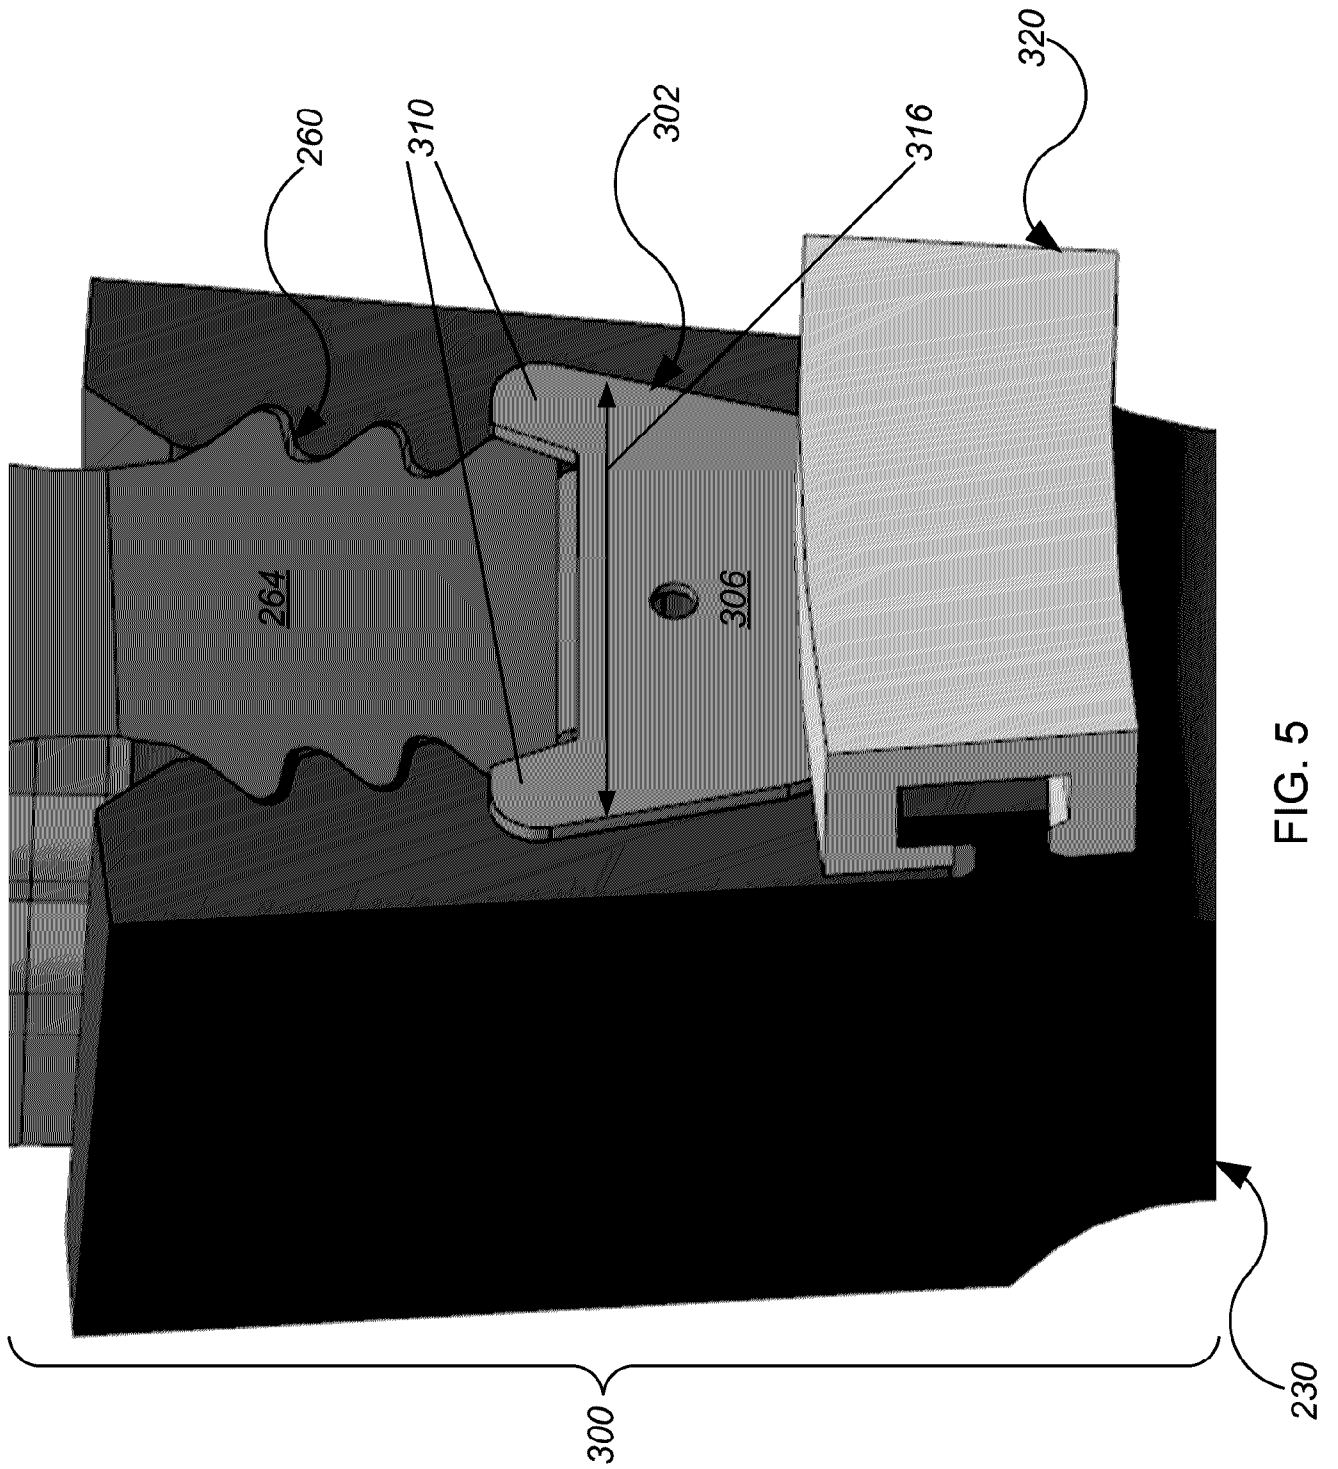


FIG. 5

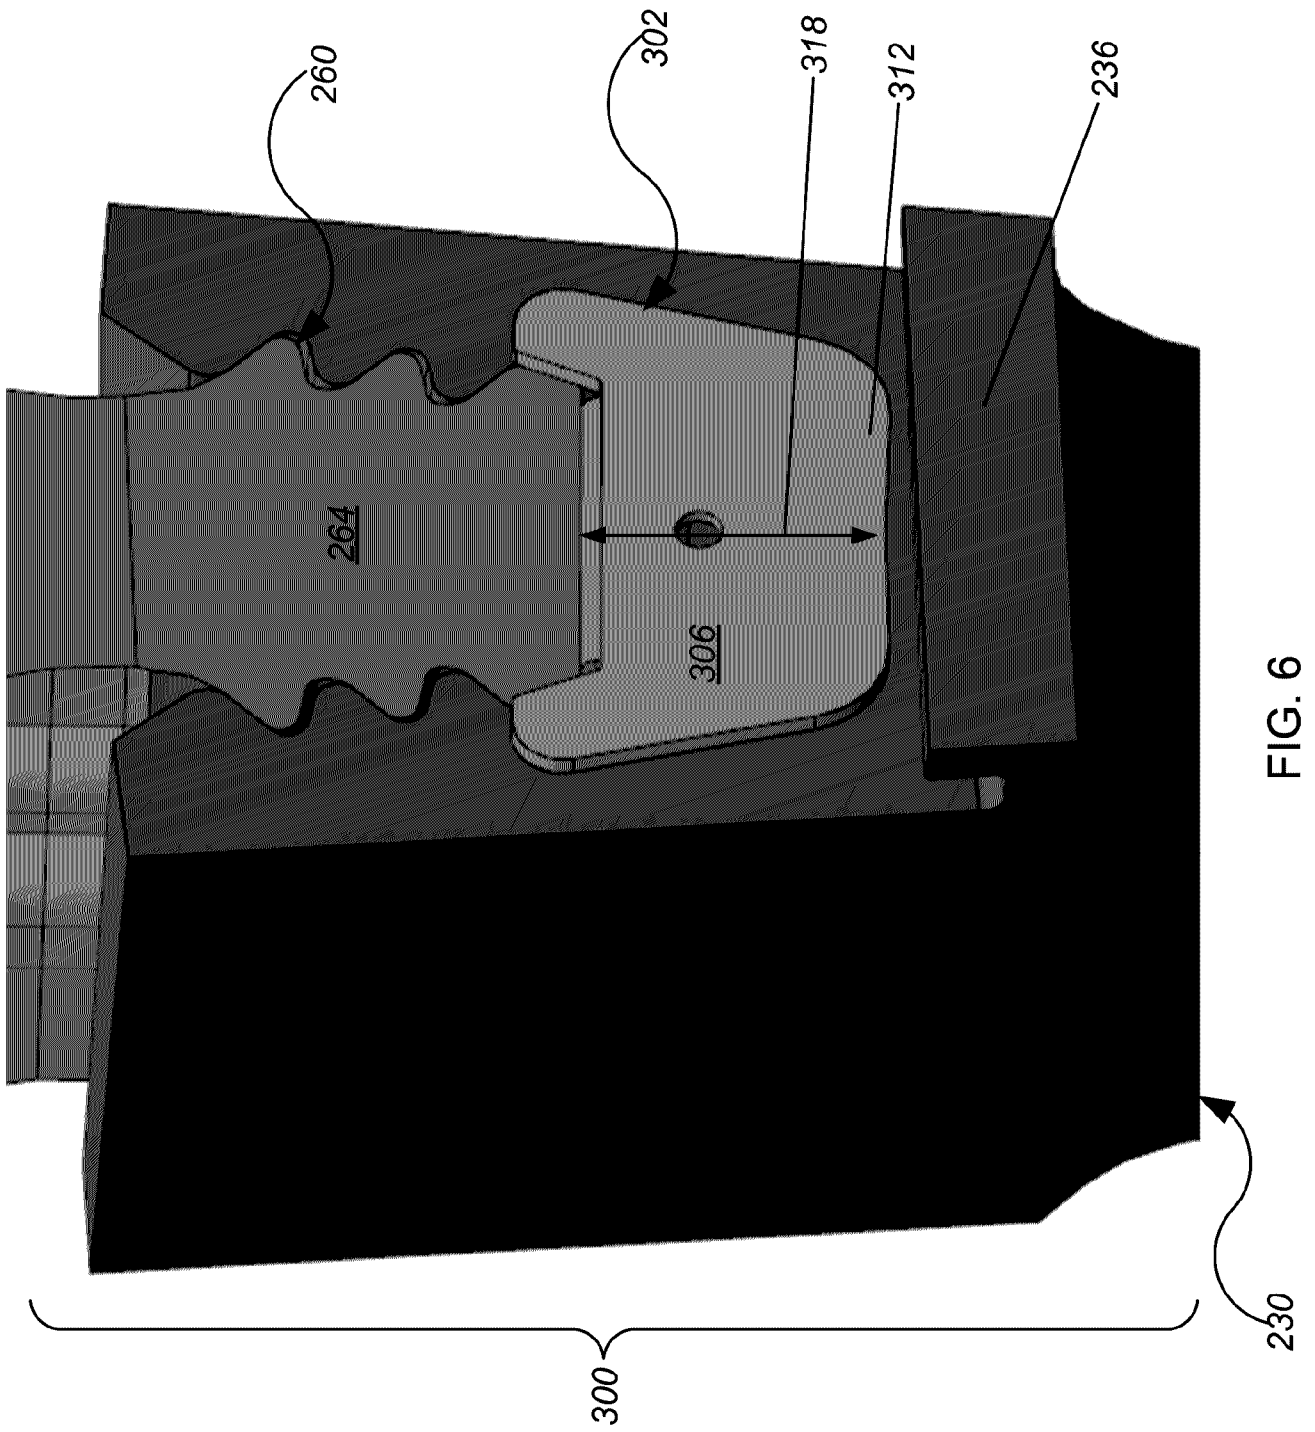


FIG. 6

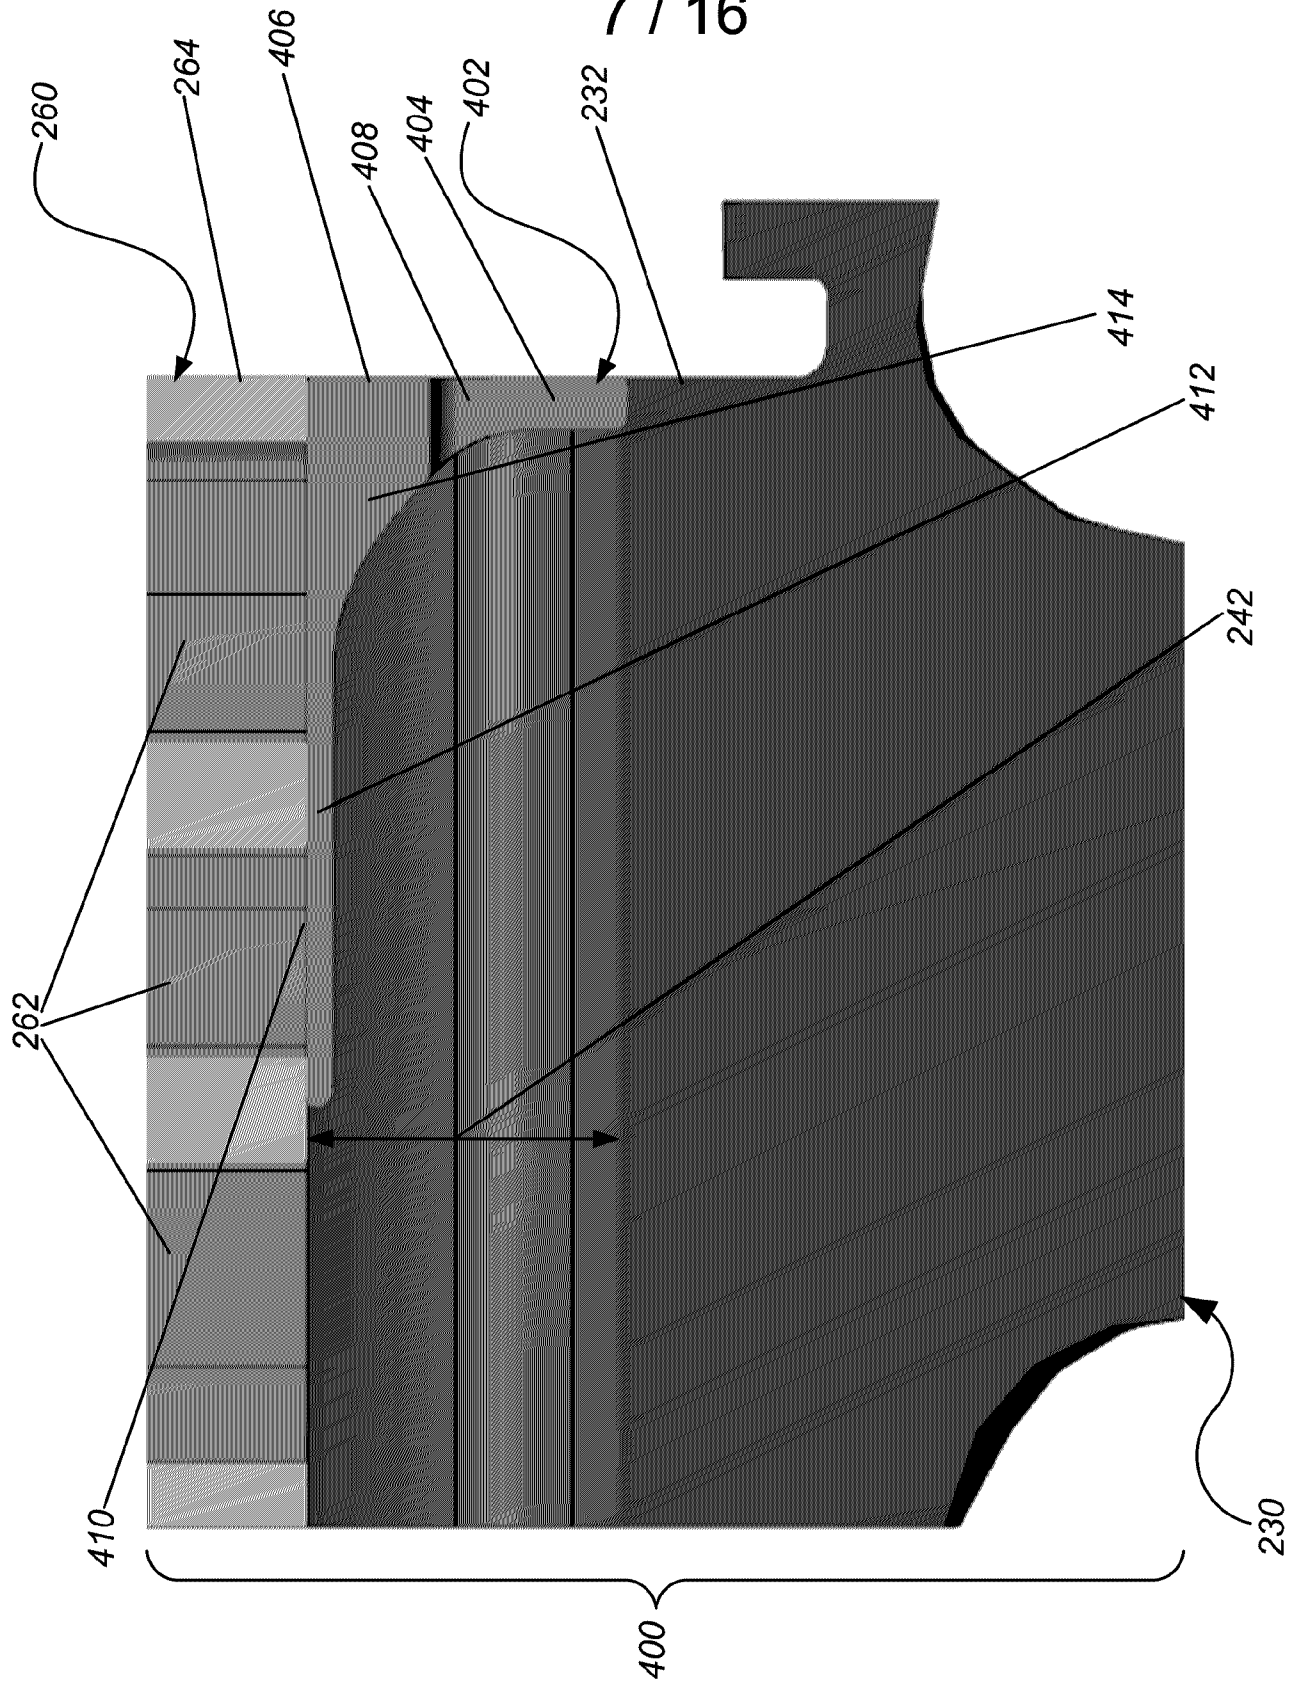


FIG. 7

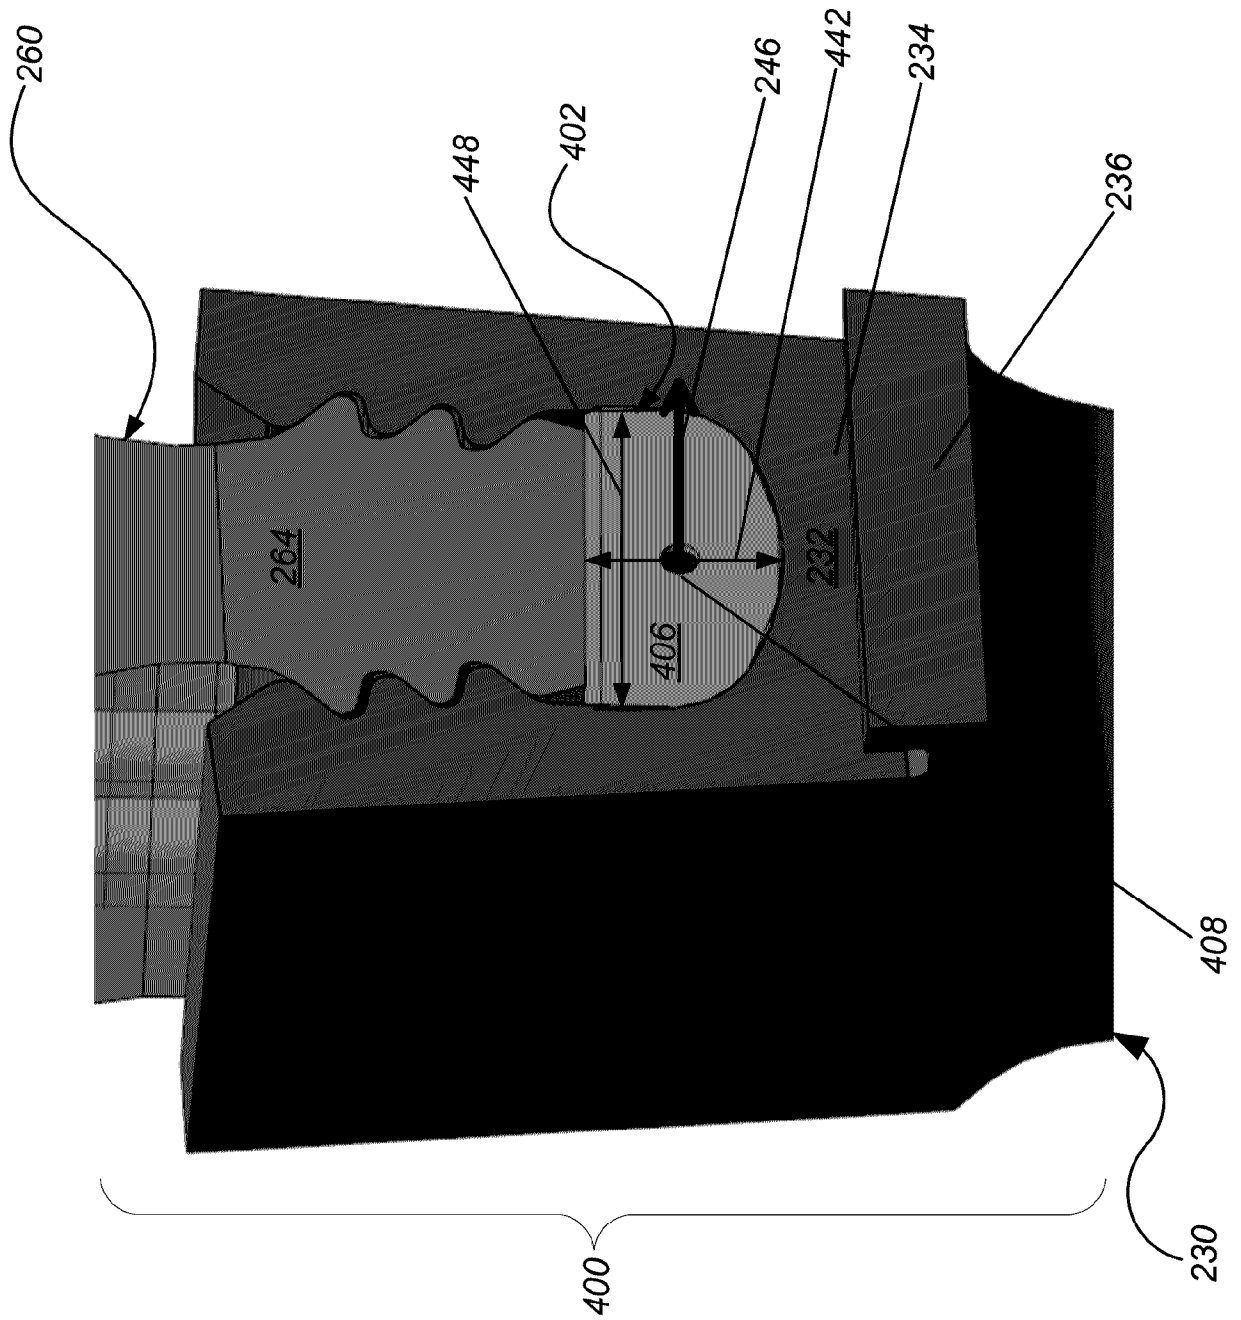


FIG. 8

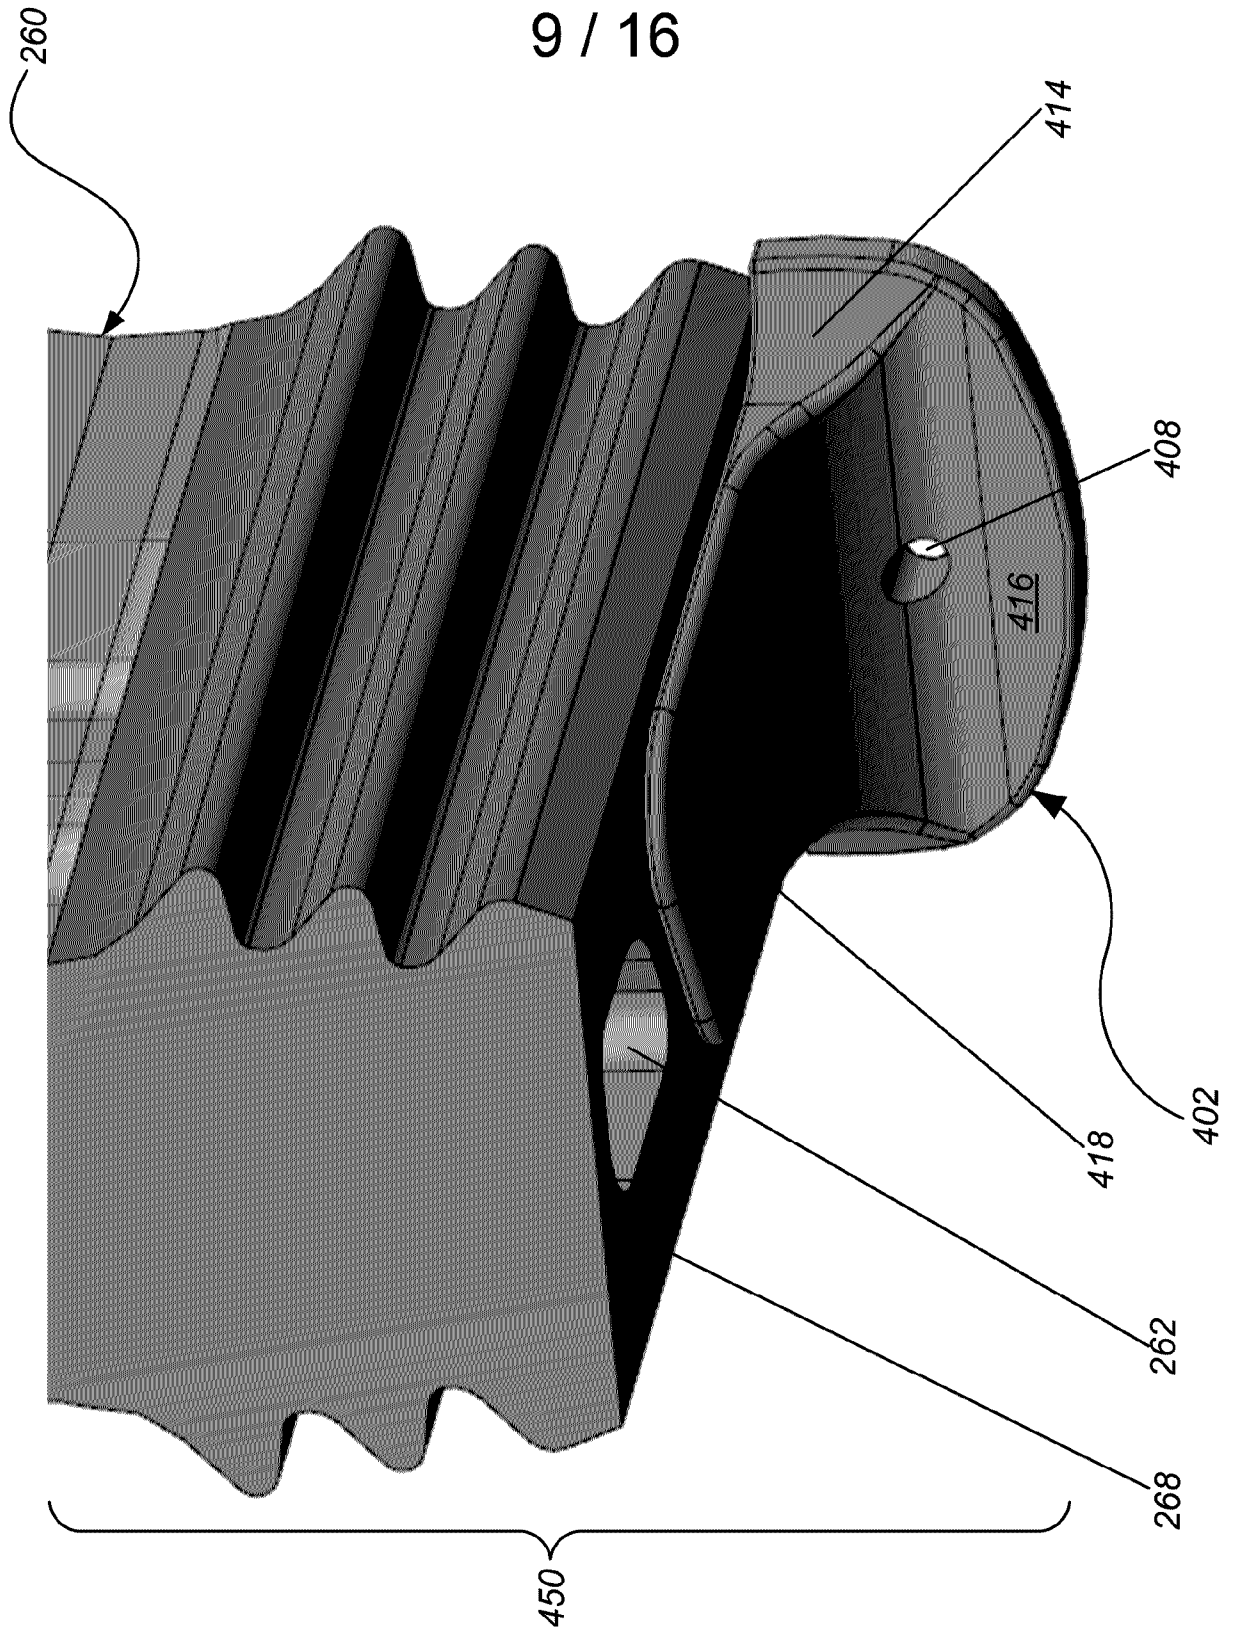
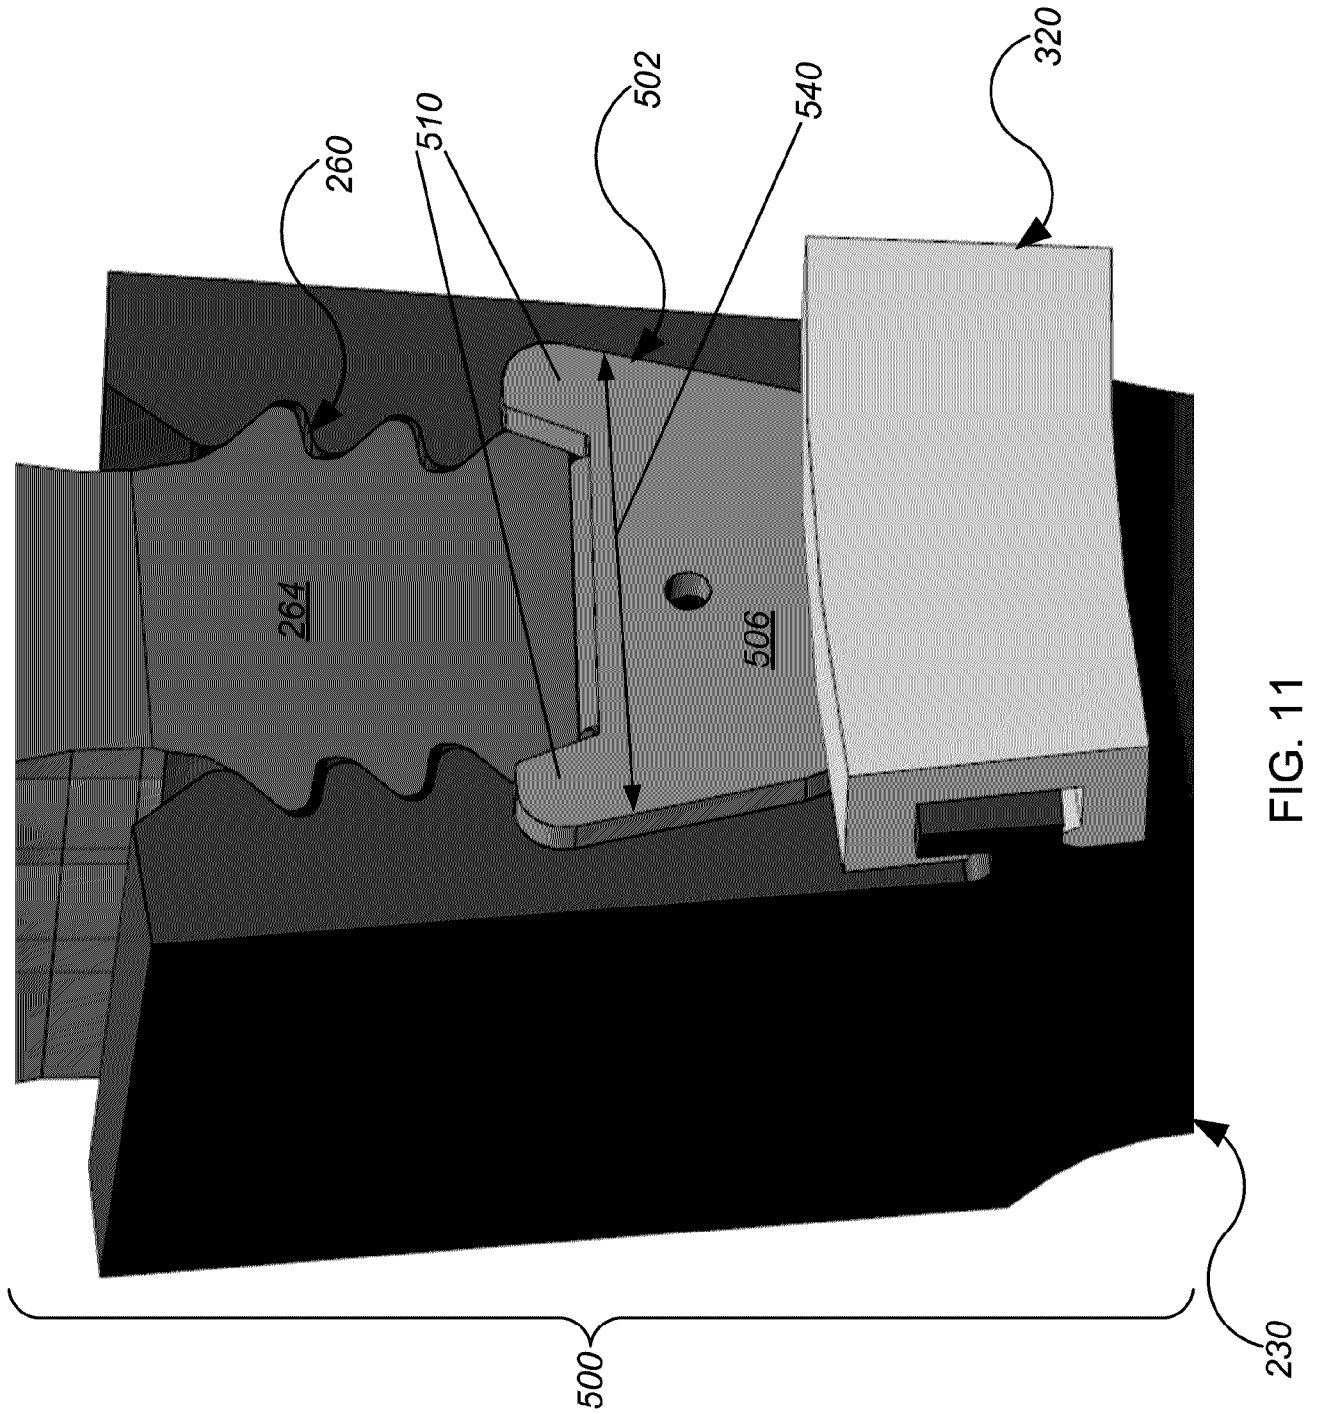


FIG. 9

FIG. 10



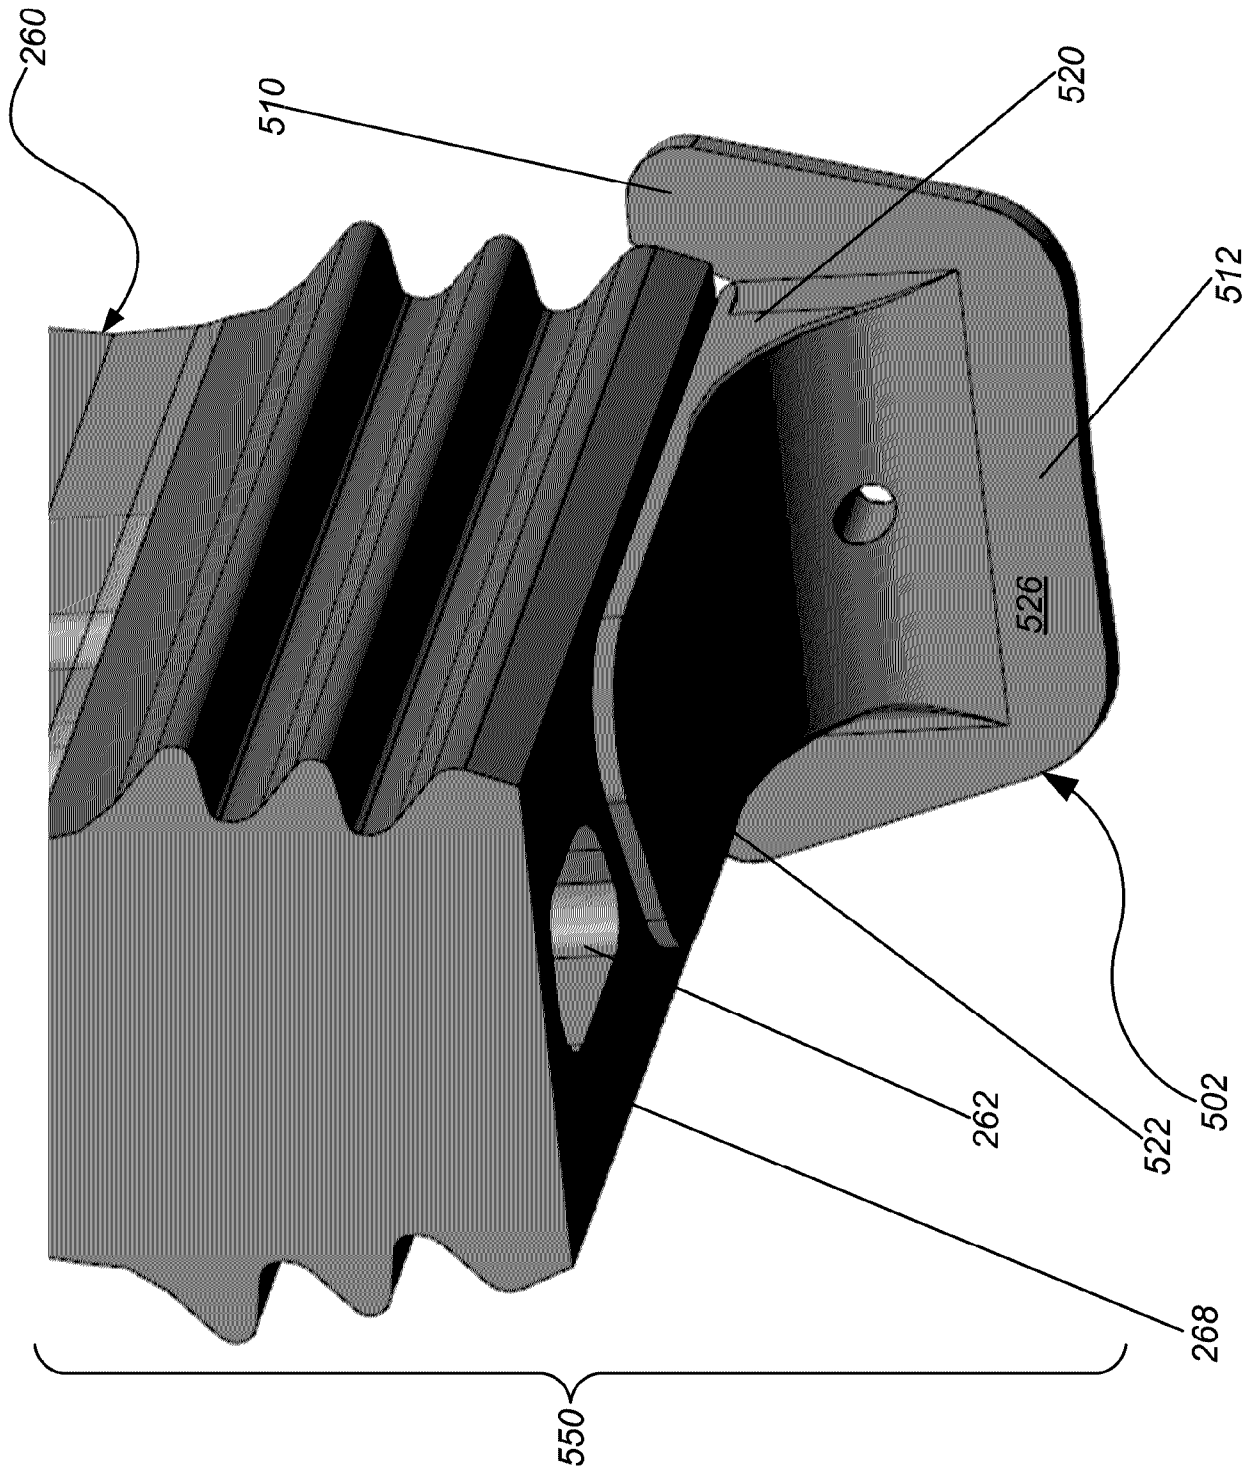
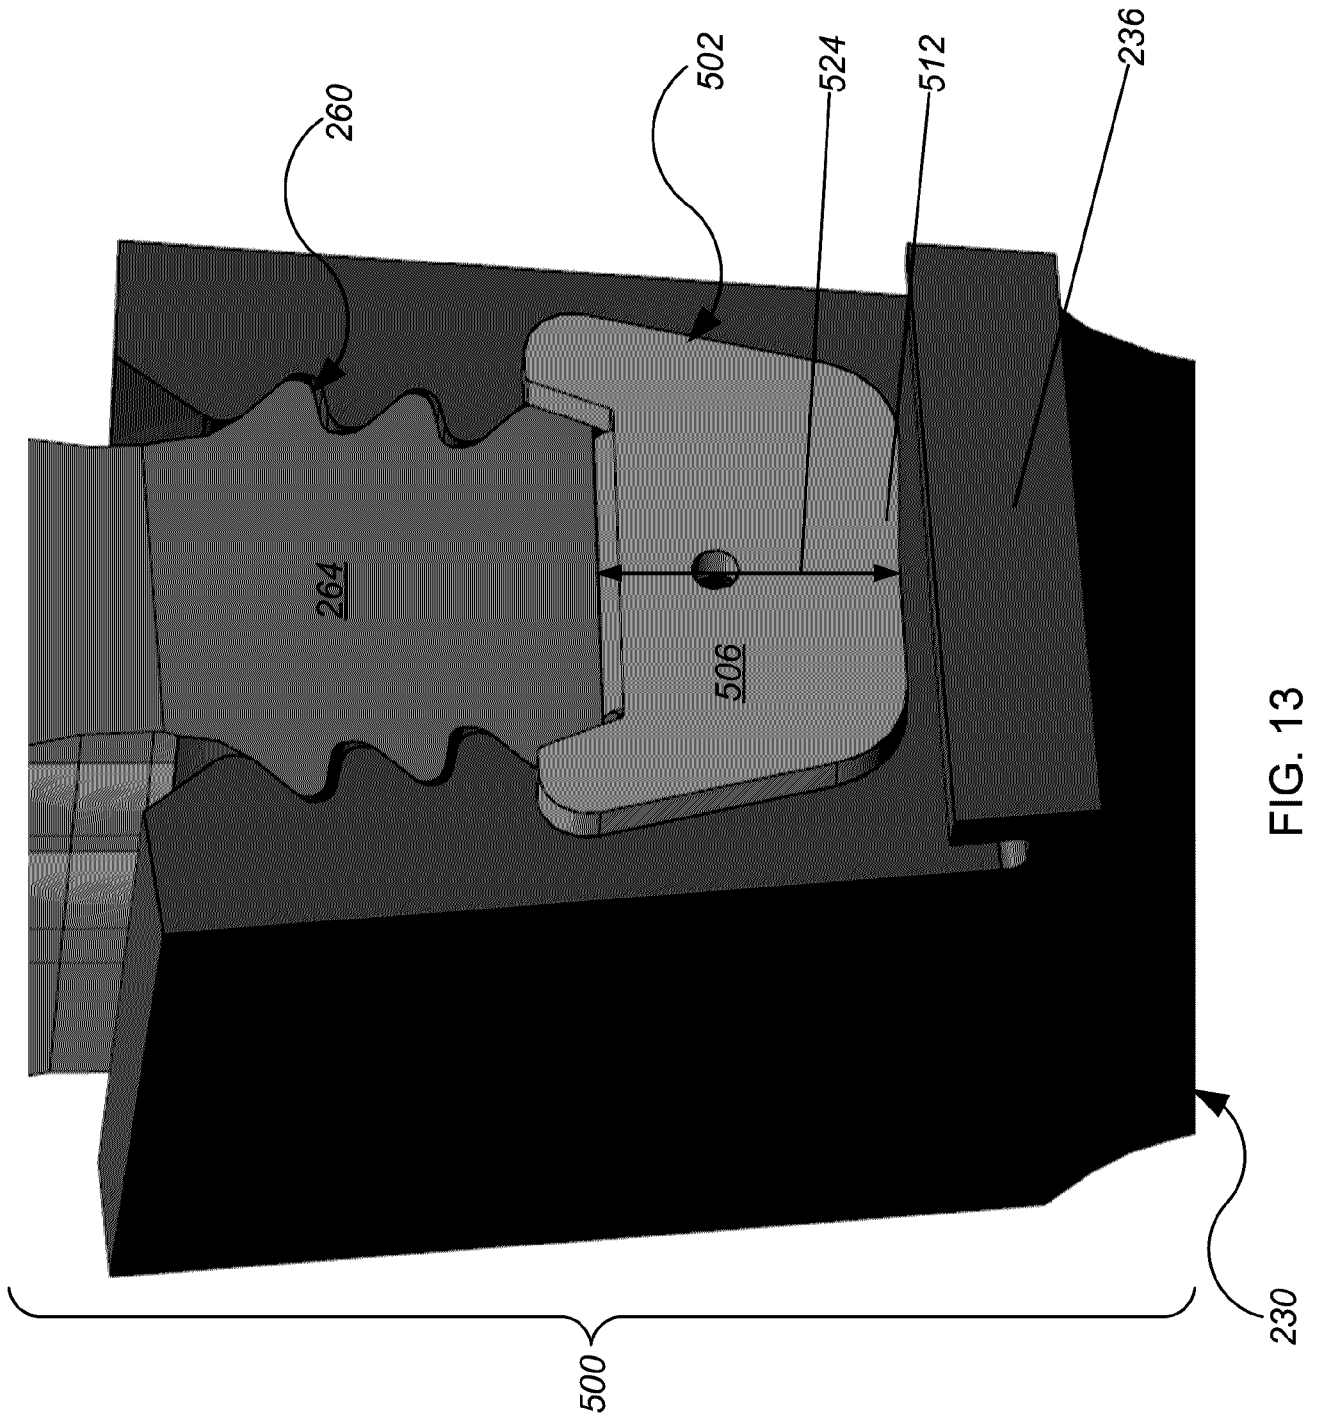



FIG. 12





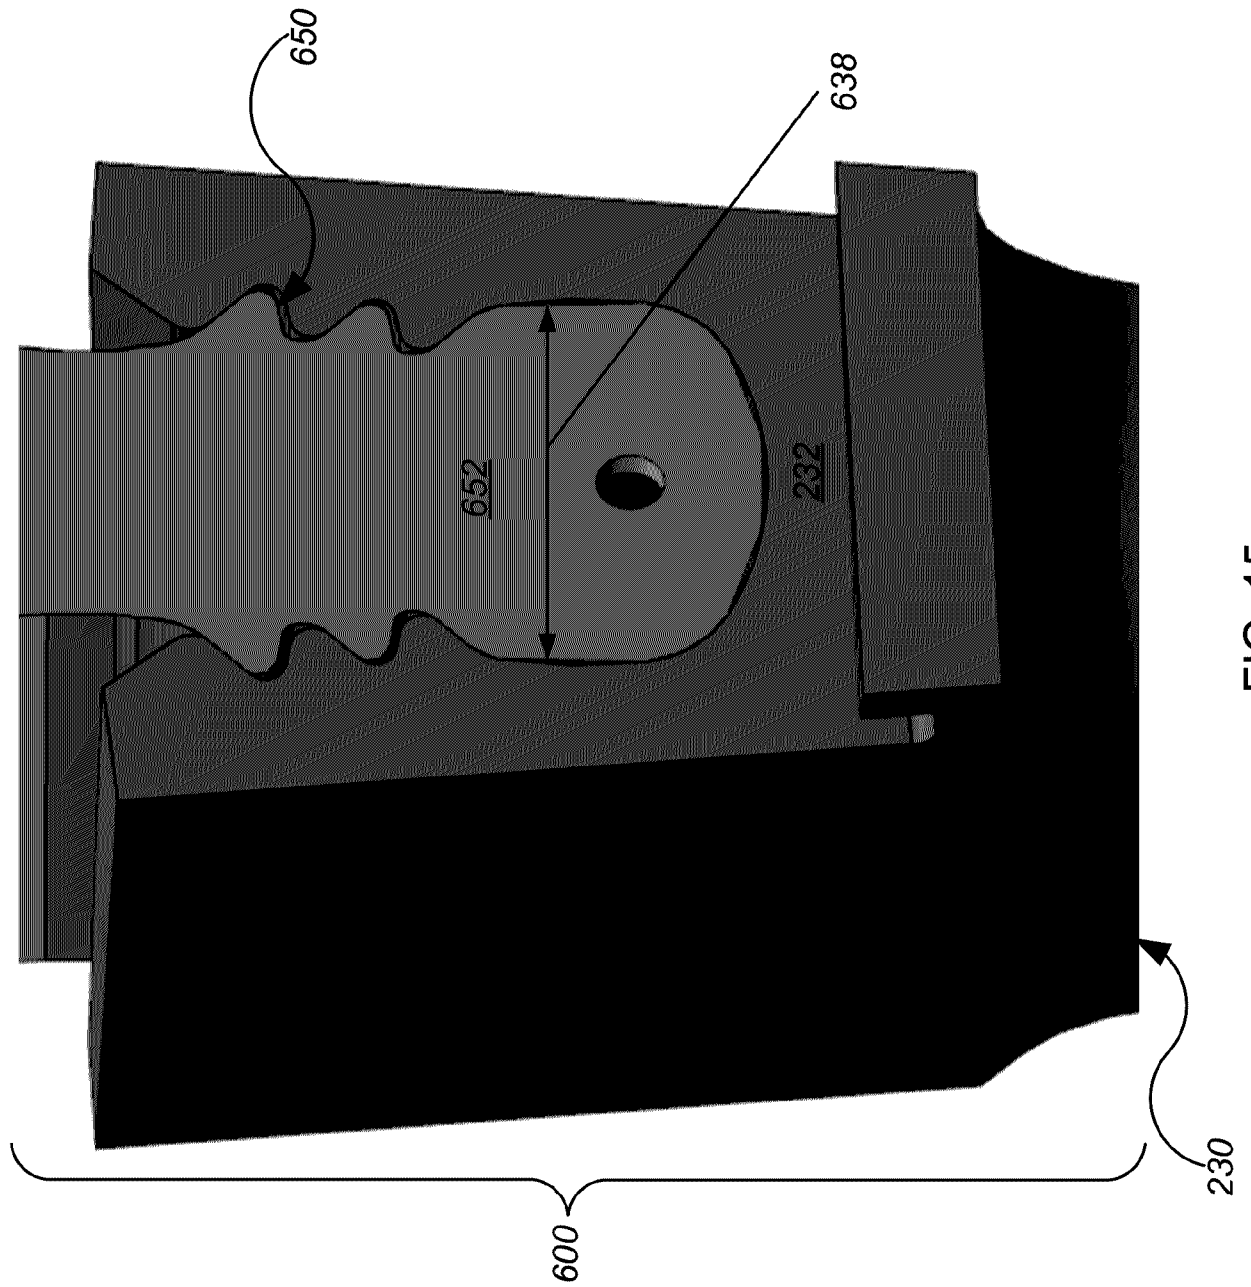


FIG. 15

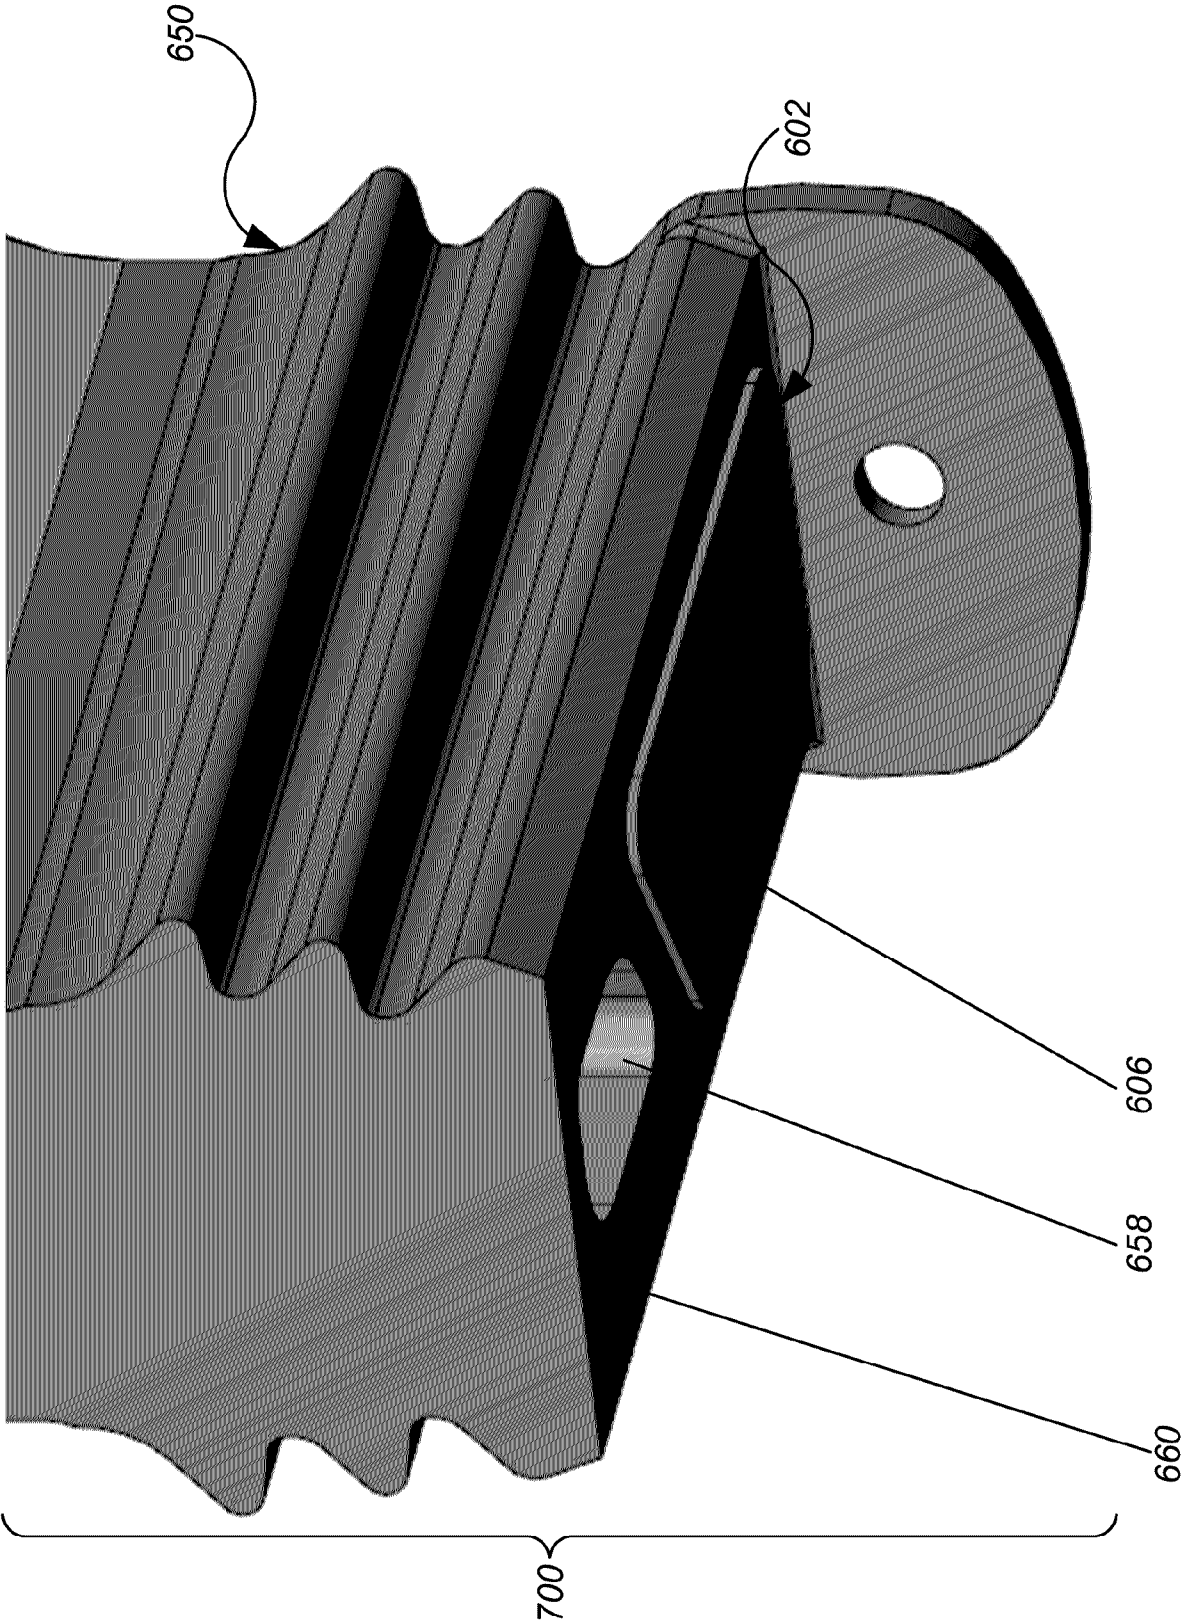


FIG. 16

