



(51) International Patent Classification:
G06F 1/26 (2006.01) **G06F 1/32** (2006.01)
G01R 21/06 (2006.01)

(74) Agent: **WONG, "Steven" Koon, Hon**; Hope Baldauff
Hartman, LLC, 1720 Peachtree Street, N.W., Suite 1010,
Atlanta, GA 30309 (US).

(21) International Application Number:
PCT/US2010/053110

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
19 October 2010 (19.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/582,301 20 October 2009 (20.10.2009) US

(71) Applicant (*for all designated States except US*): **EM-
PIRE TECHNOLOGY DEVELOPMENT LLC**
[US/US]; 2711 Centerville Road, Suite 400, Wilmington,
DE 19808 (US).

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **KRUGLICK,
Ezekiel, John, Joseph** [US/US]; 13842 Deergrass Court,
Poway, CA 92064 (US).

[Continued on next page]

(54) Title: POWER CHANNEL MONITOR FOR A MULTICORE PROCESSOR

(57) Abstract: Technologies are gener-
ally described for power channel moni-
toring in multicore processors. A power
management system can be configured
to monitor the power channels supply-
ing individual cores within a multicore
processor. A power channel monitor can
provide a direct measurement of power
consumption for each core. The power
consumption of individual cores can in-
dicate which cores are encountering
higher or lower usage. The usage deter-
mination can be made without sending
any data messages to, or from, the cores
being measured. The determined usage
load being serviced by each processor
core may be used to adjust power and/or
clock signals supplied to the cores.

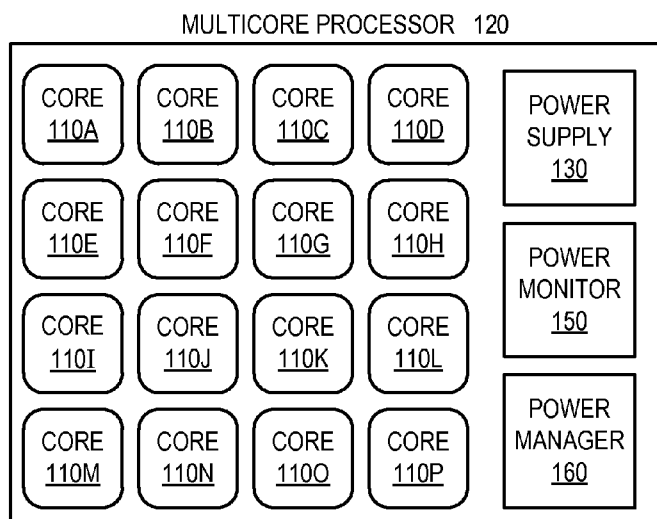


FIG. 1



Published:

— *with international search report (Art. 21(3))*

POWER CHANNEL MONITOR FOR A MULTICORE PROCESSOR

BACKGROUND

[0001] Unless otherwise indicated herein, the materials described in this section are not prior art to the claims in this application and are not admitted to be prior art by inclusion in this section.

[0002] Multicore processors are generally made up of multiple processor cores with interconnections between the individual cores. Some architectures for interconnecting individual cores support communication between neighboring cores with high efficiency. However, communications between nonadjacent cores within the multicore processor may incur delays due to passing messages between intermediate cores. As core counts within multicore processors increase, optimization of communication between cores becomes increasingly important. These communications may include messages querying the level load on the different cores within the multicore processor.

[0003] Dynamic voltage and frequency scaling (DVFS) is a power management technique where voltages and/or clock frequencies associated with a processor are adjusted to manage heat generation and power consumption. Dynamic voltage scaling can decrease the voltage applied to a processor in order to conserve power. This may be particularly useful in laptop computers and other types of battery powered mobile devices. Dynamic voltage scaling can increase the voltage applied to a processor in order to increase computer performance. Dynamic frequency scaling can decrease, or even pause, the clock frequency of the processor in order to decrease power consumption.

[0004] Attempts to apply DVFS to individual cores within a multicore processor may encounter a number of difficulties as the number of cores increases. For example, obtaining steady and up-to-date information on the computation load or power required by each core through message queries to the cores can scale into a performance limitation for the multicore processor.

BRIEF DESCRIPTION OF THE FIGURES

[0005] The foregoing and other features of this disclosure will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only several embodiments in accordance with the disclosure and are, therefore, not to be considered limiting of its scope, the disclosure will be described with additional specificity and detail through use of the accompanying drawings, in which:

FIG. 1 is a block diagram illustrating a multicore processor configured for power channel monitoring;

FIG. 2 is a schematic diagram illustrating a multicore processor with various power distribution architectures;

FIG. 3 is a schematic diagram illustrating a multicore processor having a multiplexed power monitor;

FIG. 4 is a schematic diagram illustrating a multicore processor having a multiplexed power monitor using current sensors;

FIG. 5 is a flow diagram illustrating a process for power channel monitoring in a multicore processor; and

FIG. 6 is a block diagram illustrating an example computing system, all arranged according to at least some embodiments presented herein.

DETAILED DESCRIPTION

[0006] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein. It will be readily understood that the present disclosure, as generally described herein, and illustrated in the figures can be arranged, substituted,

combined, separated, and designed in a wide variety of different configurations, all of which are explicitly contemplated herein.

[0007] This disclosure is generally drawn, inter alia, to methods, apparatus, and systems related to power channel monitoring in multicore processors. Techniques are described for a power management system that can be configured to monitor the power channels supplying individual cores within a multicore processor. The system may include a power monitor that provides a direct measurement of power consumption for each core. The power consumption of individual cores can indicate which cores are encountering higher or lower usage. The usage determination can be made without sending any data messages to, or from, the cores being measured. The determined usage load being serviced by each processor core may be used to adjust power and/or clock signals supplied to the cores. Reducing data communications between cores can improve system operation, particularly as the number of cores increases. Furthermore, determining usage without data communications may also reduce processor computation cycles associated with traditional usage measurements such as operation counting.

[0008] Power monitoring in the manner presented herein can measure power consumed by processor cores within a multicore processor. The measured power and other power management information may be provided to a power manager module. The power manager module may be configured to adjust one or more operational parameters of the processor cores based upon the measured power. In some example scenarios, the power manager module may adjust the current, voltage, power, clock signals, or any combination thereof provided to the corresponding processor cores. Example clock signal characteristics that can be adjusted may include a clock signal amplitude, frequency, voltage, pulse width, period, or duty cycle. Also, the power manager module may be configured to indirectly adjust the use of, or task allocation to, each of the processor cores by providing power consumption and usage information to a higher level power management operation.

[0009] Power monitoring in the manner presented herein can also provide more accurate processor core usage measurements than traditional temperature monitoring since temperature monitoring may be affected by the environment, the operation of neighboring cores, or other blocks within the integrated circuit supporting the processor. Power monitoring can be used with dynamic voltage and frequency scaling (DVFS) since the scaled voltages or switching frequencies will

manifest as reduced monitored power consumption. According to some embodiments, power monitoring may also serve as a watchdog monitor to identify when a processor core is locked in an infinite loop or some other error state. These states can often be associated with consistently high power consumption by an affected processor core.

[0010] FIG. 1 is a block diagram illustrating a multicore processor 120 configured for power channel monitoring according to one or more embodiments presented herein. The multicore processor 120 may comprise multiple cores 110A-110P. The multiple cores 110A-110P may be referred to collectively, or in general, as cores 110. A power supply 130 (e.g., a power supply circuit, a power supply module, etc.) associated with the multicore processor 120 can be configured to provide power supply channels to the cores 110. The power supply channels may also be referred to as power rails. Power for each core, or group of cores, may be supplied by a separate power channel.

[0011] A power monitor 150 (e.g., a power monitor circuit, a power monitor module, etc.) associated with the multicore processor can be configured to monitor each of the power channels to determine the amount of power supplied from the power supply 130 to each of the cores 110. A power manager 160 (e.g., a power manager circuit, a power manager module, etc.) associated with the multicore processor 120 can be configured to cooperatively operate with the power supply 130 and the power monitor 150 to provide power management and thermal management for the multiprocessor 120.

[0012] According to some embodiments, the power manager 160 can be configured to control the power supply 130 in response to measurements from the power monitor 150. According to some other embodiments, the power manager 160 can be configured to control clock signals supplied to one or more of the cores 110 in response to measurements from the power monitor module 150. According to yet some other embodiments, the power manager 160 can be configured to provide an interface to the cores 110 or other components of the multicore processor 120 or associated computing device. The provided interface may be adapted to read status information related to the power manager 160, such as power channel measurements obtained from the power monitor 150. The interface may also be adapted to write to the power manager 160 to set configurations, controls or other variables associated

with one or more of the power manager 160, the power monitor 150, and/or the power supply 130.

[0013] One example of dynamic thermal management that may be employed by the power manager 160 can be referred to as clock gating. Global clock gating can be adapted to turn off all, or substantially all, clock signals to halt processor operation of multicore processor 120. Local clock gating can be adapted to turn off individual clock signals to cores 110 or other blocks of the multicore processor 120. The gating off of clocks can temporarily reduce power consumption and may be used when there is an over-temperature condition or when an over-temperature condition is being avoided. While clocks are gated off, processor states such as registers, branch predictor tables, and local caches may be maintained. As such, clock gating can act as a suspend, or sleep, mode for processor cores 110 within the multicore processor 120 rather than an off-switch.

[0014] In addition to gating clock signals to temporarily stop one or more of the cores 110, the power manager 160 may also be configured to adjust the clock frequency (e.g., decrease the frequency to slow operational speed, or increase the frequency to increase operational speed) supplied to one or more of the cores 110. Alternatively, the clock may be run at a constant speed during the on-state of a duty cycle and gated off during the off-state of the duty cycle. As such, a clock duty cycle may be adjusted by the power manager 160 to provide a periodic gating of the clock to reduce power consumption at the corresponding core 110. In addition to clock frequency and duty cycle, additional characteristics of the clock signal can be adjusted such as signal amplitude (either single ended or differential), voltage or current level, pulse width, period, etc. Adjusting of one or more characteristics associated with clock signals may be controlled by the power manager 160 such that the power consumption associated with each of the individual cores 110 within the multicore processor 120 may be controlled.

[0015] By providing a status and control interface, the power manager 160 may also be arranged to support higher level power management techniques. For example, policy-based thread migration techniques can be configured to relocate processes or threads between the cores 110 to manage power consumption and thermal characteristics of multicore processor 120. These higher level power management techniques may also be combined with physical approaches such as DVFS. Empirical tests can demonstrate that a multicore processor 120 having two

cores 110 using thread relocation management along with basic voltage and frequency management can, in some examples, yield approximately 250% improvement in available resources or in equivalent reduction in power consumption.

[0016] According to another higher level, or hybrid, power management approach, a compiler or runtime environment may be configured to set optimization parameters used to compile or execute code according to the power management condition of a processor or core 110. The compiler can also be configured to suggest DVFS settings for the processor or core 110 according to computational needs.

[0017] It should be appreciated that the power channel monitoring techniques presented herein may be applied not only to processor cores 110, but also to any other blocks or functional units within the multicore processor 120. For example, memories, caches, input/output drivers, controllers, other blocks, or other functional units within the multicore processor 120 may be supported by the power channel monitoring techniques presented herein. Furthermore, the techniques may be applied to any blocks, cores, modules, circuits or other subdivisions within any integrated circuit, chip, system on chip (SOC), multichip array, application specific integrated circuits (ASICs), field programmable gate arrays (FPGAs), other programmable logic, memories, controllers, or so forth where such subdivisions may have individual, or partially isolated, power supply channels.

[0018] It should be appreciated that functions of the power monitor 150 and the power manager 160 may be provided within other modules. For example, such functionality may be integrated into the power supply 130 or other control, management, or supervisor modules. Similarly, the functions of the power monitor 150 and the power manager 160 may be combined into a single module.

[0019] Turning now to FIG. 2, a schematic diagram illustrates a multicore processor 120 with various power distribution architectures arranged according to one or more embodiments presented herein. The power supply 130 can be configured to supply power to the cores 110 of the multicore processor. Power for each core, or group of cores, may be supplied by a separate power channel. For example, power channel 210A may supply power from the power supply 130 to the processor core 110A while power channel 210B may supply power from the power supply 130 to both of the processor cores 110B and 110C. Similarly, power channel 210C may supply power from the power supply 130 to the three processor cores 110D, 110E, and 110F. According to some embodiments, power may be supplied to each core, or

group of cores, with two or more power channels. For example, the power channel 210D may be configured to supply power at 5VDC (volts direct current) to the processor core 110G while a second power channel may be configured to supply power at 3.3VDC to the same processor core 110G. Various other levels of power supply voltage or current may also be supported according to various embodiments.

[0020] Turning now to FIG. 3, a schematic diagram illustrates a multicore processor 120 having a multiplexed power monitor arranged according to one or more embodiments presented herein. The power supply 130 can be configured to supply power to the cores 110 of the multicore processor. In this example, power can be supplied to core 110A over power channel 210A, to core 110B over power channel 210B, and to core 110C over power channel 210C. The power channels 210A-210C may be referred to collectively, or in general, as power channels 210. While three cores 110 are illustrated along with three power channels 210, it should be appreciated that any number of cores 110 and power channels 210 may be present within the multicore processor. The number of cores 110 and power channels 210 may be the same, or the number may differ as more than one core 110 may be supplied by a single power channel 210 and a core 110 may be supplied by more than one power channel 210.

[0021] The power delivered over each of the power channels 210 may be measured by the power monitor 150. According to some embodiments, an analog-to-digital converter (ADC) 230 may be adapted to measure the analog state of a power channel 210 and provide digital information that corresponds to the measured analog state. In one example, the ADC 230 may be configured to directly, or indirectly, measure the voltage of a power channel 210. In another example, the ADC 230 may be configured to measure the current of a power channel 210 as further detailed with respect to FIG. 4.

[0022] A multiplexer 220 may be configured to select which, of several, power channels 210 is currently being sampled by the ADC 230. One or more control inputs 240 associated with the multiplexer 220 may be used to select the current power channel 210 for monitoring. The control inputs 240 may be provided by the power monitor 150, the power manager 160, a counter, a state machine, or other circuit or module associated with the power management of the multicore processor 120. It should be appreciated that the multiplexer 220 and/or the ADC 230 may be integrated into the power monitor 150 according to embodiments.

[0023] The current and/or voltage associated with the power channels 210 may be measured by the power monitor 150. According to various embodiments, the voltage may be substantially fixed while the current may vary according to the power demand of the core 110. Alternatively, the current may be substantially fixed while the voltage varies according to the power demand of the core 110. Depending upon which of the current or voltage are varying, the power monitor 150 can measure the varying current and/or the varying voltage. The substantially fixed current or voltage can be a known, or specified, value. The power may then be computed according to the relationship that power equals current multiplied by voltage. For example, power (in Watts) may be determined by multiplying the current (in Amperes) by the voltage (in Volts). Voltage may also be referred to as potential, electrical potential, potential difference, or electromotive force. Current may be viewed as a time rate of charge flow. Also, power may be considered a capacity for doing work in a given period of time, where work may be viewed as applying a force over a distance, such as when moving a charge against a field.

[0024] The current and/or voltage of the power channels 210 may be measured by the power monitor 150 without substantial modification of the power delivery system within the multicore processor 120. As discussed above, direct measurement of the power supplied to cores 110 and other blocks of the multicore processor 120 can provide information about a computational load, or a usage level, associated with each core 110 without loading any data buses with message queries.

[0025] Measuring the power consumption of the cores 110 with the power monitor 150 may inform thermal modeling, thermal load balancing, load planning, and other system management functions related to power and thermal management. According to some embodiments, the power manager 160 may use the power consumption information associated with the processor cores 110 to adjust settings for the supplied voltages or clock frequencies of the associated cores 110. For example, if a particular processor core 110 is consuming a reduced amount of power, the power manager 160 may determine that the core 110 is handling a reduced computation load and thus lower the voltage supplied to that core 110, or reduce the clock frequency supplied to that core 110.

[0026] In FIG. 4, a schematic diagram illustrates a multicore processor 120 having a multiplexed power monitor using current sensors 310A-310C arranged according to one or more embodiments presented herein. A current sensor 310A may

be placed inline with power channel 210A supplying power to core 110A. Similarly, current sensor 310B may be placed inline with power channel 210B supplying power to core 110B and current sensor 310C may be placed inline with power channel 210C supplying power to core 110C. The current sensors 310A-310C may be referred to collectively, or in general, as current sensors 310. According to some embodiments, the power monitor 150 may be configured to measure a current associated with the supply channels 210. These current measurements may be performed using current sensors 310. A signal representative of the measured current may be a voltage (as discussed below) or a current and may be converted into a digital, or numerical, value using ADC 230.

[0027] An example current sensor 310 may involve measuring a drop in potential, or voltage, over a known load (or resistance) that is placed inline with the power channel 210 for which current being measured. However, it may be undesirable, from a thermal and power loss perspective, to drop an entire supply current through a known load. Thus, a scaled current mirror may be used as a current sensor 310 where a scaled representation of the current in the supply channel 210 may be provided by the current mirror for measurement. Alternatively, a feedback voltage signal within the current mirror may be measured directly. A current mirror can be any circuit designed to copy a current supplied through one component of the circuit by adjusting a current within another component of the circuit.

[0028] Referring now to FIG. 5, additional details will be provided regarding the embodiments presented herein for power channel monitoring of core usage within a multicore processor. In particular, FIG. 5 is a flow diagram illustrating a process 400 for power channel monitoring in a multicore processor arranged according to at least some embodiments presented herein.

[0029] It should be appreciated that the operations described herein are implemented as a sequence of operational or manufacturing acts, as a sequence of computer implemented acts or program modules running on a computing system, or as interconnected machine logic circuits or circuit modules within the computing system. The implementation is a matter of choice dependent on the performance and other requirements of the various embodiments. Some of the logical operations described herein are referred to variously as state operations, functions, actions, structural devices, or modules. These operations, functions, actions, structural devices, and/or modules may be implemented in software, in firmware, in special

purpose digital logic, and any combination thereof. It should also be appreciated that more or fewer operations may be performed than shown in the figures and described herein. These operations may also be performed sequentially, in parallel, or in a different order than those described herein.

[0030] Process 400 may include various operations, functions or actions as illustrated by one or more of blocks 410, 420, 430, 440, 450, 460, and/or 470. The process 400 may begin at block 410 (Monitor Power Channels Supplying Each Core of a Multicore Processor), where the power monitor 150 can be configured to measure the current and/or voltage on each of the respective power channels 210 supplying the processor cores 110. In some examples, the current and/or voltage on multiple power channels 210 may be measured using an ADC 230 and a multiplexer for 220 adapted to select which of the power channels 210 is currently being sampled by the ADC 230 for reading by the power monitor 150. Block 410 may be followed by block 420.

[0031] At block 420 (Measure Power Delivered to Each Core over the Power Channels), the power monitor 150 may be configured to determine the power supplied by each of the respective power channels 210 to the processor cores 110. The current or voltage of each respective power channel 210, as measured at block 410, may be used to determine the power consumed by the core 110 associated with each power channel 110. As discussed above, a measured current and/or voltage may be used to compute the power consumed using the relationship of power equals current multiplied by voltage. Block 420 may be followed by block 430.

[0032] At block 430 (Determine a Load Associated with Each Core from the Measured Power), the power manager 160 and/or the power monitor 150 may be configured to determine a computational load associated with each of the cores 110 of the multicore processor 120. The computation load being serviced by a core 110 may be determined from the power being consumed by the core 110 as determined at block 420. The power consumed by a core 110 may largely be used by switching transistors within the logic, gates, registers, and other memories associated with the core 110. The power consumption may be highly correlated to the activity of these elements within the core 110 and thus may be used as a proxy for determining the load being serviced by the core 110. A measure of the computational load may also be referred to as an activity level associated with each core 110. Block 430 may be followed by block 440.

[0033] At block 440 (Adjust the Power Supplied to a Core Based upon the Load Associated with the Core), the power manager 160 may be configured to adjust the power being supplied from the power supply 130 to each of the cores 110 within the multicore processor 120. The power delivered to a core 110 may be adjusted by scaling the voltage and/or current driven to the power channel 210 feeding the core 110 by the power supply 130. Block 440 may be followed by block 450.

[0034] At block 450 (Adjust the Clock Signal to a Core Based upon the Load Associated with the Core), the power manager 160 may be configured to adjust the respective clocks being supplied to each of the core 110 within the multicore processor 120. The power consumed by a core 110 may be adjusted by gating, scaling, or duty cycling the clock signal used by the core 110. Furthermore, the clock signal may be adjusted according to its amplitude (either single ended or differential), voltage or current level, frequency, voltage, pulse width, or period. Block 450 may be followed by block 460.

[0035] At block 460 (Provide Power Management Information to the Multicore Processor), the power manager 160 may be configured to provide information related to power management to the multicore processor 120. The information may include the voltage and/or current supplied to each core 110 as measured at block 410, the power supplied to each core 110 as determined at block 420, the load at each block as determined at block 430, or any other power management information that may be used to control, measure, or manage operation of the multicore processor 120. The information may be supplied by the power manager 160 in the form of readable data registers. The interface for reading the registers may be internal to the multicore processor 120 or may be supplied as input/output on any data buses, low pin count buses, or other interfaces to the power manager 160. Block 460 may be followed by block 470.

[0036] At block 470 (Expose a Power Management Control Interface to the Multicore Processor), the power manager 160 may be configured to provide an interface for controlling parameters related to power management on the multicore processor 120. The parameters may include specifying the voltage and/or current supplied to each core 110, the power and clock adjustments to be made in response to the measured load at each core 110 as determined at block 430, or any other power management parameters used to control, measure, and/or manage operation of the multicore processor 120. The interface may be provided within the power manager

160 in the form of writable data registers. The interface for writing to the registers may be internal to the multicore processor 120 or may be supplied as input/output on any data buses, low pin count buses, or other interfaces to the power manager 160. After block 470, the process 400 may either repeat (e.g., periodically, continuously, or on demand as needed) or terminate.

[0037] With reference to FIG. 6, an example computing system is illustrated for implementing various embodiments described herein. The computing system can support embodiments for implementing power channel monitoring for multicore processors. For example, the computing system illustrated in FIG. 6 might include a multicore processor 120 configured to support power channel monitoring. Various embodiments may include computers, dedicated hardware, or embedded computing systems.

[0038] The computing system includes a computer 10. The computer 10 can include the multicore processor 120, a memory 12 and one or more drives 13. The drives 13 and their associated computer storage media can provide storage of computer readable instructions, data structures, program modules 23 and other data for the computer 10. The computer 10 may be implemented as a conventional computer system, an embedded control computer, a laptop, or a server computer, a mobile device, a set-top box, a kiosk, a vehicular information system, a mobile telephone, a customized machine, or other hardware platform. According to various embodiments, the multicore processor 120 may be a general purpose processor, a processor core, a multiprocessor, a multicore processing unit, a graphics processor, a digital signal processing (DSP) processor, a customized computing device implemented within an application specific integrated circuit (ASIC), a customized computing device implemented within a field programmable gate array (FPGA), a customized computing device implemented within any type of programmable logic, a state machine, a reconfigurable processor, any other processing unit, or any combination or multiplicity thereof. The multicore processor 120 may feature a power monitor 150 and/or a power manager 160 as discussed herein.

[0039] The drives 13, other storage devices, or their associated computer-readable storage media may store an operating system 21, application programs 22, and program modules 23. The program modules 23 may include power management software 24 for implementing power monitoring and power management functionality as discussed herein. It should be appreciated that the power management software 24

may also be part of the operating system 21, the application programs 22, the ROM, or any other component for providing executable instructions to the computer 10. The computer 10 may include user input devices 15 through which a user may enter commands and data. Input devices may include an electronic digitizer, a microphone, a keyboard, a pointing device, or any combination thereof. Examples of pointing devices may include a mouse, trackball, light pen, touch screen, or touch pad. Other input devices to the computer 10 may include a joystick, game pad, satellite dish, scanner, or the like. Input devices may be connected to the multicore processor 120 through a user input interface that is coupled to a system bus. The input devices may also be connected by other interface and bus structures, such as a parallel port, game port or a universal serial bus (USB). Computers such as computer 10 may also include other peripheral output devices such as speakers, which may be connected through an output peripheral interface 19 or similar interface.

[0040] The computer 10 may operate in a networked environment using logical connections to one or more computers, such as a remote computer connected to network interface 16. The remote computer may be a personal computer, a server, a router, a network PC, a peer device, or other common network node. The remote computer may include many or all of the elements described herein relative to the computer 10. Networking environments may include networks (WAN), local area networks (LAN), intranets, the Internet, or combinations thereof.

[0041] When used in a LAN or wireless LAN (WLAN) networking environment, the computer 10 may be connected to the LAN through a network interface 16 or a network adapter. When used in a WAN networking environment, the computer 10 may include a modem or other mechanism for establishing communications over the WAN. The WAN may include the Internet, the illustrated network 18, various other networks, or any combination thereof. It should be appreciated that other mechanisms of establishing a communications link, ring, mesh, bus, cloud, or network between computers may be used.

[0042] The computer 10 may include one or more instances of a physical computer-readable storage medium or media associated with drives 13 or other storage devices. The system bus may enable the multicore processor 120 to read code and/or data to/from the computer-readable storage media. The media may represent an apparatus in the form of storage elements that are implemented using any suitable technology, including but not limited to semiconductors, magnetic materials, optical

media, electrical storage, electrochemical storage, or any other such storage technology. The media may represent components associated with memory 12, whether characterized as RAM, ROM, flash, or other types of volatile or nonvolatile memory technology. The media may also represent secondary storage, whether implemented as the storage drives 13 or otherwise. Hard drive implementations may be characterized as solid state, or may include rotating media storing magnetically-encoded information.

[0043] The storage media may include one or more program modules. The program modules 23 may include software instructions that, when loaded into the multicore processor 120 and executed, transform a general-purpose computing system into a special-purpose computing system customized to facilitate all, or part of, the power monitoring and power management techniques disclosed herein. As detailed throughout this description, the program modules 23 may provide various tools or techniques by which the computer 10 may participate within the overall systems or operating environments using the components, logic flows, and/or data structures discussed herein.

[0044] According to some embodiments, the storage media may be implemented using magnetic or optical technology such as drives 13. In such implementations, the program modules 23 may transform the physical state of magnetic or optical media, when the software is encoded therein. These transformations may include altering the magnetic characteristics of particular locations within given magnetic media. These transformations may also include altering the physical features or characteristics of particular locations within given optical media, to change the optical characteristics of those locations. It should be appreciated that various other transformations of physical media are possible without departing from the scope and spirit of the present description.

[0045] The present disclosure is not to be limited in terms of the particular embodiments described in this application, which are intended as illustrations of various aspects. Many modifications and variations can be made without departing from its spirit and scope, as will be apparent to those skilled in the art. Functionally equivalent methods and apparatuses within the scope of the disclosure, in addition to those enumerated herein, will be apparent to those skilled in the art from the foregoing descriptions. Such modifications and variations are intended to fall within the scope of the appended claims. The present disclosure is to be limited only by the

terms of the appended claims, along with the full scope of equivalents to which such claims are entitled. It is to be understood that this disclosure is not limited to particular methods, components, elements, apparatuses, or systems, which can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting.

[0046] With respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0047] It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as “open” terms (e.g., the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” etc.).

[0048] It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (e.g., “a” and/or “an” should be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should be interpreted to mean at least the recited number (e.g., the bare recitation of “two recitations,” without other modifiers, means at least two recitations, or two or more recitations).

[0049] In instances where a convention analogous to “at least one of A, B, and C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., “a system having at least one of A, B, and C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). In those instances where a convention analogous to “at least one of A, B, or C, etc.” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., “a system having at least one of A, B, or C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase “A or B” will be understood to include the possibilities of “A” or “B” or “A and B.”

[0050] In addition, where features or aspects of the disclosure are described in terms of Markush groups, those skilled in the art will recognize that the disclosure is also thereby described in terms of any individual member or subgroup of members of the Markush group.

[0051] As will be understood by one skilled in the art, for any and all purposes, such as in terms of providing a written description, all ranges disclosed herein also encompass any and all possible subranges and combinations of subranges thereof. Any listed range can be easily recognized as sufficiently describing and enabling the same range being broken down into at least equal halves, thirds, quarters, fifths, tenths, etc. As a non-limiting example, each range discussed herein can be readily broken down into a lower third, middle third and upper third, etc. As will also be understood by one skilled in the art all language such as “up to,” “at least,” “greater than,” “less than,” and the like include the number recited and refer to ranges which can be subsequently broken down into subranges as discussed above. Finally, as will be understood by one skilled in the art, a range includes each individual member. Thus, for example, a group having 1-3 elements refers to groups having 1, 2, or 3 elements. Similarly, a group having 1-5 elements refers to groups having 1, 2, 3, 4, or 5 elements, and so forth.

[0052] While various aspects and examples have been disclosed herein, other aspects and examples will be apparent to those skilled in the art. The various aspects and examples disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

CLAIMS

What is claimed is:

1. An integrated circuit adapted to monitor power supply channels within multicore processors, the integrated circuit comprising:
 - a plurality of processor cores;
 - a plurality of power channels configured to supply power to each of the plurality of processor cores;
 - a power monitor configured to measure power supplied over each of the power channels to each of the plurality of processor cores; and
 - a power manager configured to adjust an operational parameter of one or more of the plurality of processor cores based upon the measured power.
2. The integrated circuit of claim 1, wherein one of the plurality of power channels supplies power to two or more of the plurality of processor cores.
3. The integrated circuit of claim 1, wherein two or more of the plurality of power channels supply power to a same one of the plurality of processor cores.
4. The integrated circuit of claim 1, wherein the operational parameter comprises one or more characteristics of a clock signal that is provided to the one or more of the plurality of processor cores.
5. The integrated circuit of claim 4, wherein the one or more characteristics of the clock signal comprises one or more of a frequency, a period, pulse width, a duty cycle, a signal amplitude, a voltage, and/or a current.
6. The integrated circuit of claim 1, wherein the power monitor module comprises an analog-to-digital converter (ADC) that is coupled to one or more of the plurality of power channels.
7. The integrated circuit of claim 6, wherein the power monitor module further comprises a multiplexer configured to select the power channel being measured by the ADC.

8. The integrated circuit of claim 1, wherein the power monitor module is coupled to one or more of a voltage sensor and/or one or more of a current sensor that is coupled to one or more of the plurality of power channels.

9. The integrated circuit of claim 1, wherein the power monitor module further comprises a current sensor that is coupled in series with one or more of the plurality of power channels, wherein the current sensor comprises one or more of a known load that is placed inline with the corresponding one of the power channels, or a current mirror.

10. A method for monitoring power supply channels within a multicore processor having a plurality of processor cores, the method comprising:

monitoring a plurality of power supply channels within the multicore processor, wherein each of the plurality of power supply channels provides power to one or more of the plurality of processor cores within the multicore processor;

determining a power usage associated with each processor core based upon a result of monitoring each of the plurality of power supply channels; and

adjusting an operational parameter of one or more of the plurality of processor cores based upon the determined power usage.

11. The method of claim 10, wherein monitoring comprises measuring one or more of a voltage level associated with one or more of the plurality of power supply channels, and/or a current level associated with one or more of the plurality of power supply channels.

12. The method of claim 10, wherein monitoring comprises sampling one of plurality of power supply channels using an analog-to-digital converter (ADC).

13. The method of claim 12, wherein sampling further comprises selecting one of the plurality of power supply channels using a multiplexer.

14. The method of claim 10, further comprising determining an activity level associated with one or more of the processor cores based upon the determined power usage associated with the respective processor core.

15. The method of claim 10, further comprising one or more of adjusting the power supplied to one or more of the processor cores in response to the determined power usage associated with the respective processor core, and/or adjusting the clock signal supplied to one or more of the processor cores in response to the determined power usage associated with the respective processor core.

16. The method of claim 10, further comprising providing the multicore processor with power management information associated with the determined power usage.

17. The method of claim 10, further comprising providing an interface to the multicore processor for configuring power management operations associated with the processor cores.

18. A multicore processor including power supply channels adapted for power supply monitoring, the multicore processor comprising:

a plurality of processor cores;

a power supply configured to provide a plurality of power supply channels to the plurality of processor cores, wherein each of the plurality of power supply channels is associated with one or more of the plurality of processor cores;

a power monitor configured to measure power supplied over each of the plurality of power supply channels; and

a power manager configured to determine activity levels associated with one or more of the plurality of processor cores based upon the measured power supplied over each of the plurality of power supply channels, and adjust power levels associated with one or more of the plurality of power supply channels in response to the determined activity levels associated with one or more of the plurality of processor cores.

19. The multicore processor of claim 18, wherein the power monitor comprises an analog-to-digital converter (ADC) that is coupled to one or more of the plurality of power channels.

20. The multicore processor of claim 19, wherein the power monitor further comprises a multiplexer configured to select the power channel being measured by the ADC.

21. The multicore processor of claim 18, wherein the power monitor comprises one or more of a voltage sensor and/or one or more of a current sensor that is coupled to one or more of the plurality of power channels.

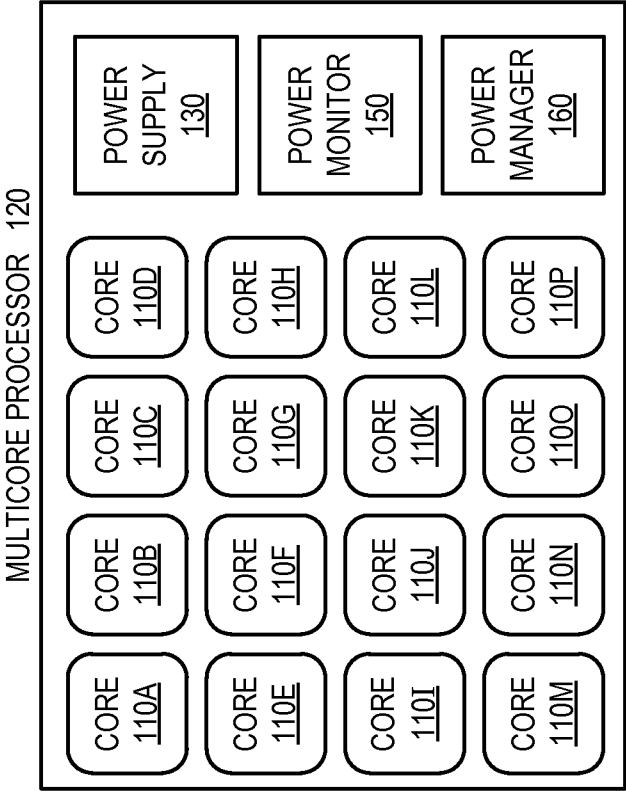


FIG. 1

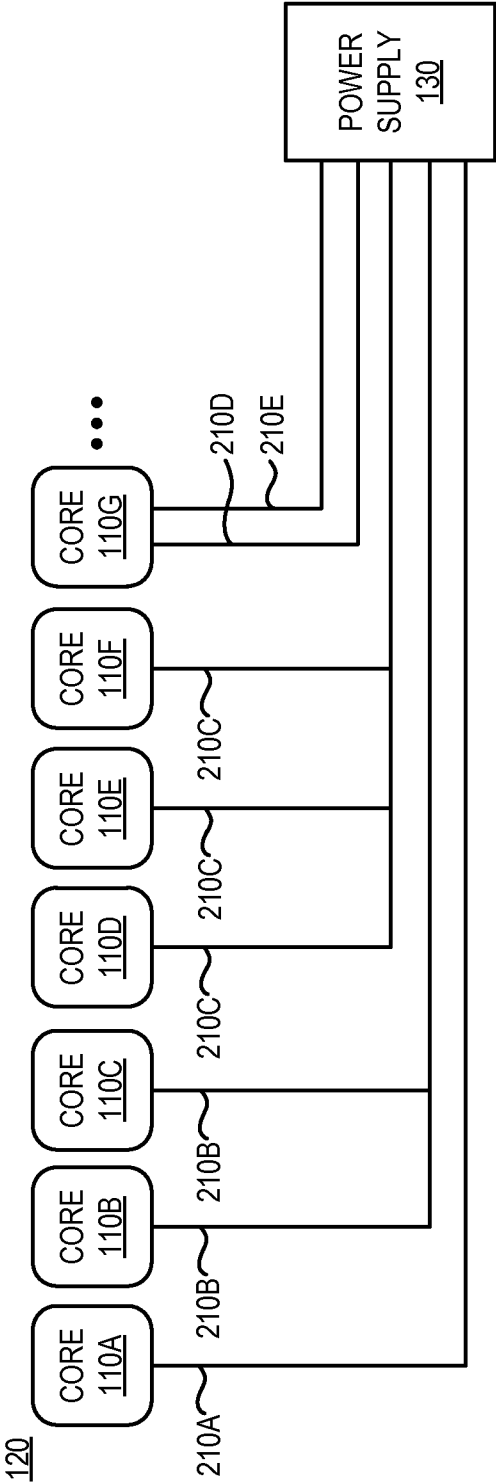


FIG. 2

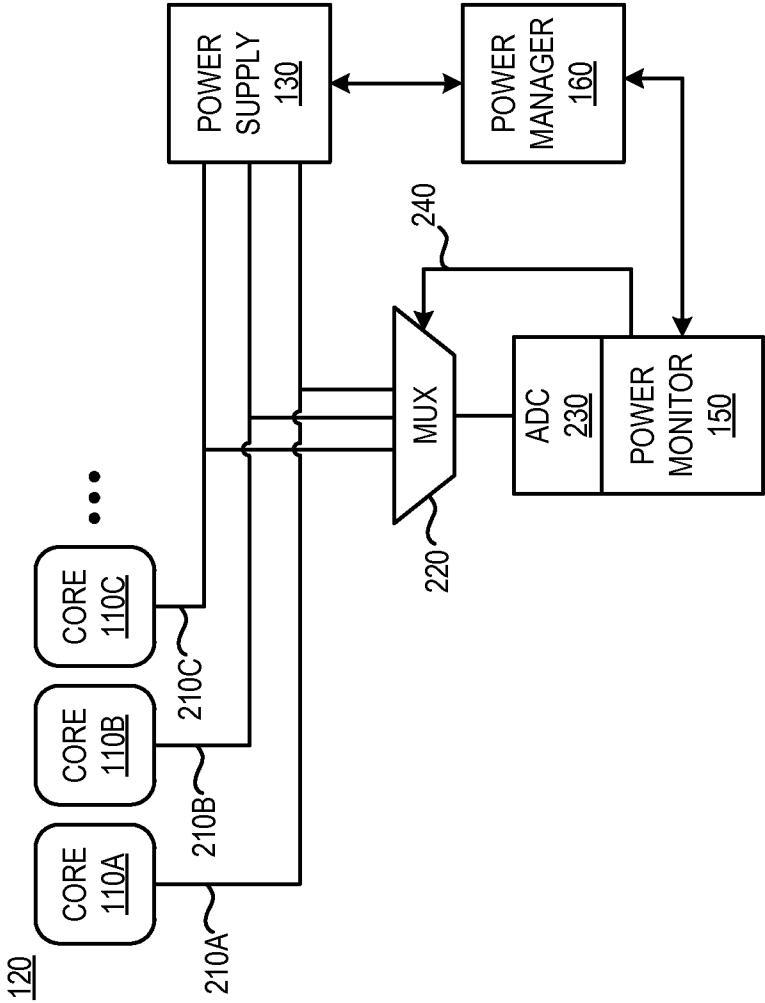
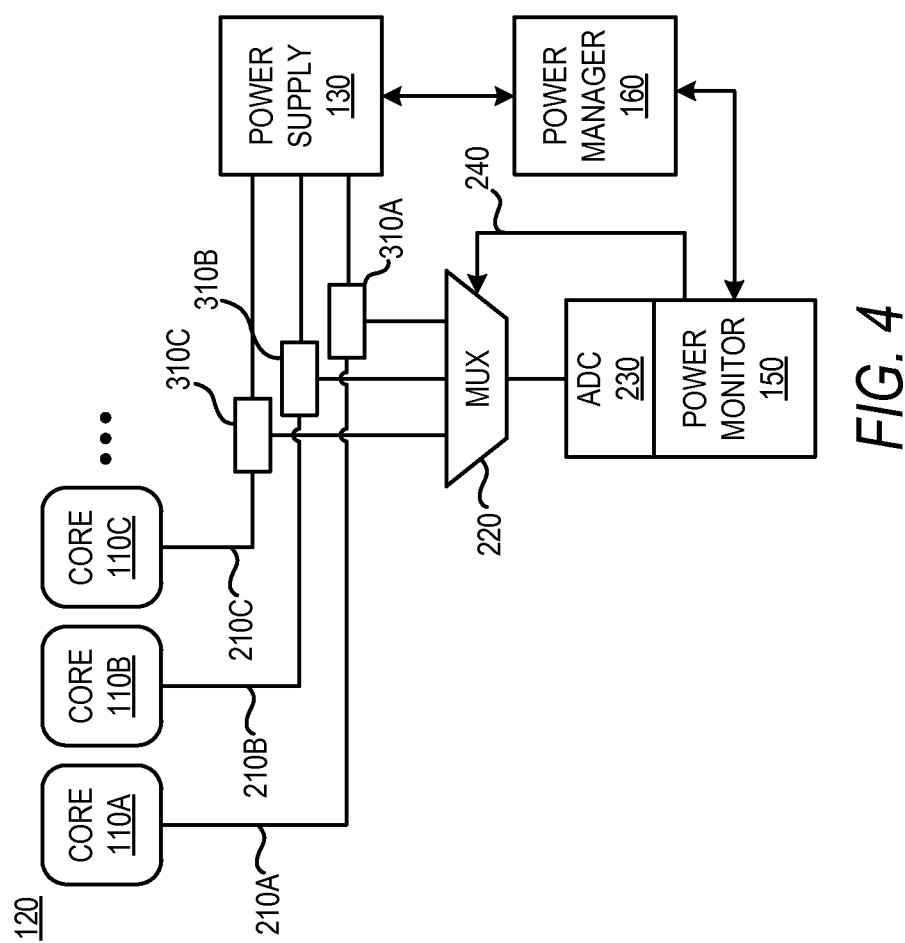


FIG. 3



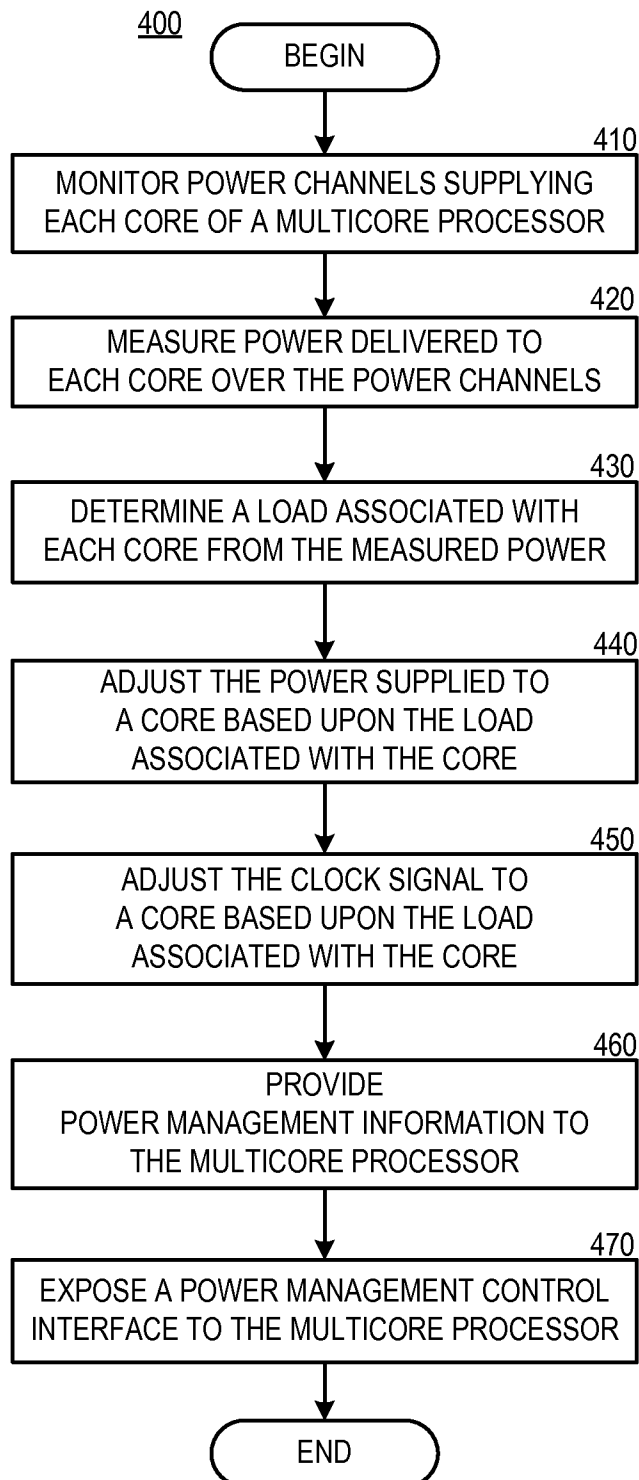


FIG. 5

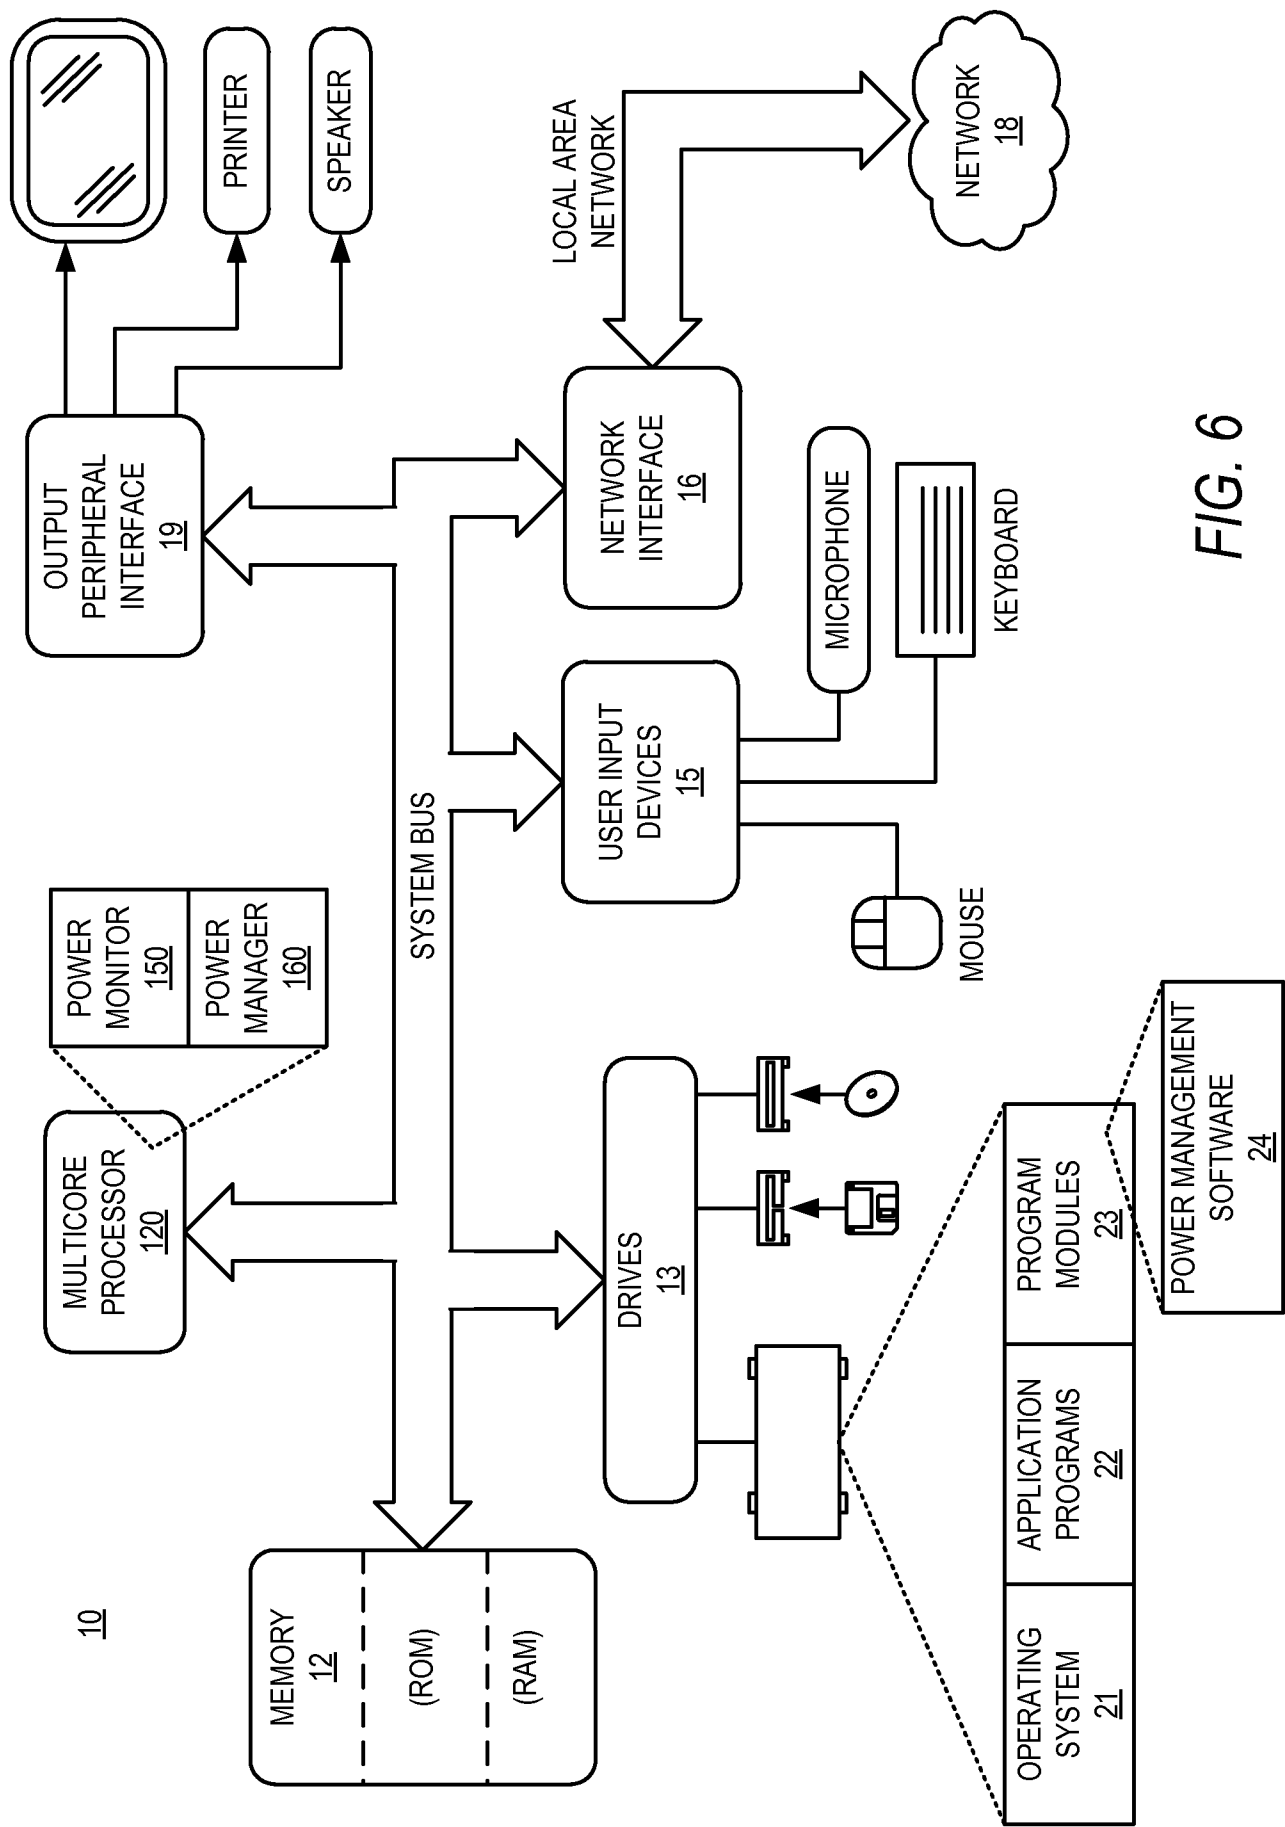


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2010/053110

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl.

G06F 1/26 (2006.01)

G01R 21/06 (2006.01)

G06F 1/32 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC & Google Patents: Processor, monitor, manage, control, power, multicore, dualcore, IC, integrated circuit, plurality, multi, change, adjust, clock signal, adc and like terms.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1736851 A2 (LG Electronics Inc.) 27 December 2006 (Paragraphs 0023, 0032, 0034, 0037, Fig 9)	1-5, 9, 10
Y		6-8, 11-21
Y	US 7363523 B2 (KURTS et al.) 22 April 2008 (Col 9, Lines 5-28; Figs 4 & 8)	6-8, 11-21



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 January 2010

Date of mailing of the international search report

- 3 FEB 2011

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustalia.gov.au
Facsimile No. +61 2 6283 7999

Authorized officer

DEVANAND NAGARAJAN
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No : +61 2 6283 2698

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2010/053110

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
EP	1736851	CN	1877492	KR	20060128469
		US	7664971	US	2006282692
US	7363523	CN	101002159	US	2006047986
				WO	2006025999
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					