




(86) **Date de dépôt PCT/PCT Filing Date:** 2016/12/05
 (87) **Date publication PCT/PCT Publication Date:** 2017/06/15
 (45) **Date de délivrance/Issue Date:** 2023/10/03
 (85) **Entrée phase nationale/National Entry:** 2019/05/21
 (86) **N° demande PCT/PCT Application No.:** CA 2016/051425
 (87) **N° publication PCT/PCT Publication No.:** 2017/096471
 (30) **Priorité/Priority:** 2015/12/08 (US62/264,588)

(51) **Cl.Int./Int.Cl. A47L 13/11** (2006.01)
 (72) **Inventeur/Inventor:**
MITCHELL, JACK A., CA
 (73) **Propriétaire/Owner:**
PRO PAINT GEAR INC., CA
 (74) **Agent:** HILL & SCHUMACHER

(54) **Titre : RACLETTE DE SOL**
 (54) **Title: FLOOR SQUEEGEE**

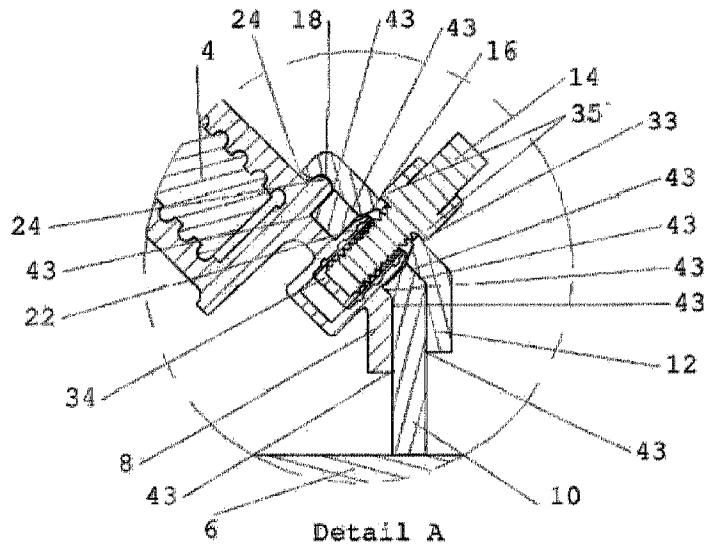

(57) **Abrégé/Abstract:**

ABSTRACT There is disclosed a floor squeegee for spreading resin on floors or removing liquid spills or debris from floors and other flat surfaces. The squeegee includes a frame section, a handle connected to the frame section such that the frame section is generally perpendicular to handle, the frame section including a preset number of internally threaded locater bosses. A flexible squeegee blade section includes a preset number of boss holes extending therethrough to receive the preset number of internally threaded locater bosses. The flexible squeegee blade section has a first section and a second section being integrally formed with the first elongate section and being inclined at an angle with respect to the first section in a range from about 0 to about 90°. The squeegee includes a clamp section having a preset number of boss holes extending therethrough to receive the preset number of internally threaded locater bosses, and a preset number of threaded nuts with the preset number of threaded nuts being threaded to be threadably received in the internally threaded locater bosses. When assembled the second blade section contacts a floor or other surface when in operation.

ABSTRACT

There is disclosed a floor squeegee for spreading resin on floors or removing liquid spills or debris from floors and other flat surfaces. The squeegee includes a frame section, a handle connected to the frame section such that the frame section is generally perpendicular to handle, the frame section including a preset number of internally threaded locater bosses. A flexible squeegee blade section includes a preset number of boss holes extending therethrough to receive the preset number of internally threaded locater bosses. The flexible squeegee blade section has a first section and a second section being integrally formed with the first elongate section and being inclined at an angle with respect to the first section in a range from about 0 to about 90°. The squeegee includes a clamp section having a preset number of boss holes extending therethrough to receive the preset number of internally threaded locater bosses, and a preset number of threaded nuts with the preset number of threaded nuts being threaded to be threadably received in the internally threaded locater bosses. When assembled the second blade section contacts a floor or other surface when in operation.

FLOOR SQUEEGEE

FIELD

The present disclosure relates to a floor squeegee for spreading resin on
5 floors or removing liquid spills or debris from floors and other flat surfaces.

BACKGROUND

Floor squeegees currently in use for spreading resin suffer from several
drawbacks. These include the resinous materials hardening on the exposed
fasteners, the ends of the fastener nuts holding the squeegee components
10 together which in turn makes it very difficult to remove and/or change the
blades of the flexible squeegee section. Further, having the angle in the
squeegee frame as oppose to the squeegee blade, which is typical with current
floor squeegees, puts the fastener nuts in closer proximity to the resinous
materials being applied. In addition, current floor squeegee frames do not have
15 boss holes for easy alignment of the flexible squeegee blade.

SUMMARY

The present disclosure provides a floor squeegee, comprising an
elongate frame section, an elongate handle connected to the elongate frame
section such that the elongate frame section is generally perpendicular to said
20 elongate handle, the elongate frame section including a preset number of
internally threaded blind locator holes each having a raised boss. The
squeegee includes an elongate flexible squeegee blade section including a first
elongate section and a preset number of locator holes each extending
therethrough to receive a corresponding raised boss of the elongate frame

section. The elongate flexible squeegee blade section includes a second elongate section protruding from and being integrally formed with the first elongate section and inclined at an angle with respect to the first elongate section in a range from greater than 0° to less than 90°. The squeegee includes
5 an elongate clamp section having a preset number of locator holes each extending therethrough to receive a corresponding raised boss of the elongate frame section and further comprising a raised lip disposed around each of said preset number of locator holes and a preset number of threaded fasteners, each of the preset number of threaded fasteners being threaded to be
10 threadably received in an associated internally threaded blind locator hole and each threaded fastener including a flange section configured to contact said raised lip. Threaded sections of each of the threaded fasteners are sealed internally in an associated internally threaded blind locator hole and are not exposed when the squeegee is assembled. When assembled the second
15 elongate section contacts a floor or other surface when in operation.

The preset number of internally threaded blind locator holes, the preset number of locator holes in the elongate flexible squeegee blade section and the preset number of locator holes in the elongate clamp section are two or more, and wherein. When assembled, the flexible squeegee blade section is
20 sandwiched between the elongate frame section and the elongate clamp section with the two or more internally threaded locator boss being received through said two or more boss holes in the flexible squeegee blade section and two or more boss hole in the elongate clamp section.

The first elongate section and the second elongate section may be
25 inclined at an angle with respect to each in a range from 30 to 60°.

The first elongate section and the second elongate section may be inclined at an angle with respect to each of 45°.

The squeegee according to claim 1 wherein said elongate frame section and said elongate clamp section are made from a plastic material. The plastic material may be polypropylene.

The edges and corners on the elongate frame section and the elongate clamp section may be radiused or rounded making it easier for the removal of cured coatings or debris.

The elongate flexible squeegee blade section may be made from any one or combination of neoprene, silicone, urethanes and ethylene propylene diene monomer (M-class) rubber (EPDM rubber).

The elongate flexible squeegee blade section may be made from any one or combination of one or more materials having different hardness.

Each flange section of each fastener has an outer diameter which is greater than an outer diameter of the raised lip of the elongate clamp section that the flange section is in contact with.

The elongate frame section and the elongate clamp section may be made from a flexible material making it easier for the removal of cured coatings or debris.

A further understanding of the functional and advantageous aspects of the disclosure can be realized by reference to the following detailed description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments will now be described, by way of example only, with reference to the drawings, in which:

Figure 1 is a perspective view of the present squeegee device disassembled;

5 **Figure 2** is an elevation view of the squeegee looking from the front of the squeegee;

Figure 3 is a sectional view of the squeegee of **Figure 2** taken along the line **A-A**;

Figure 4 is a blow-up of the circled section **A** in **Figure 3**.

10

DETAILED DESCRIPTION

Various embodiments and aspects of the disclosure will be described with reference to details discussed below. The following description and drawings are illustrative of the disclosure and are not to be construed as limiting the disclosure. Numerous specific details are described to provide a thorough understanding of various embodiments of the present disclosure. However, in certain instances, well-known or conventional details are not described in order to provide a concise discussion of embodiments of the present disclosure.

15
20 As used herein, the terms, “comprises” and “comprising” are to be construed as being inclusive and open ended, and not exclusive. Specifically, when used in the specification and claims, the terms, “comprises” and “comprising” and variations thereof mean the specified features, steps or components are included. These terms are not to be interpreted to exclude the presence of other features, steps or components.

As used herein, the term “exemplary” means “serving as an example, instance, or illustration,” and should not be construed as preferred or advantageous over other configurations disclosed herein.

As used herein, the terms “about” and “approximately”, when used in conjunction with ranges of dimensions of particles, compositions of mixtures or other physical properties or characteristics, are meant to cover slight variations that may exist in the upper and lower limits of the ranges of dimensions so as to not exclude embodiments where on average most of the dimensions are satisfied but where statistically dimensions may exist outside this region. It is not the intention to exclude embodiments such as these from the present disclosure.

Figure 1 is a perspective view of the present squeegee device shown generally at **30** located above a floor surface **6** which is shown disassembled and which includes an elongate handle **2** having a threaded end portion **4**. Elongate handle **2** may be a wooden, metal or plastic handle. Squeegee **30** includes an elongate frame **8** which includes a threaded receptacle **5** to receive therein threaded end portion **4** of handle **2**. Elongate frame **8** includes at least one internally threaded locator boss **22**, with five (5) internally threaded locator bosses **22** being shown in **Figure 1**, which are spaced along the length of elongate frame **8** and project outwardly from the frame **8**. An elongate, flexible rubber squeegee blade **10** having the same approximate length as elongate frame **8** includes at least one hole **20**, with five (5) holes **20** shown in **Figure 1** having a diameter large enough to receive the locator bosses **22** when squeegee blade **10** is assembled with frame **8**. Frame **8** and clamp **12** may be made from polypropylene or a variation of other plastic materials, which in turn

makes it difficult for any cured floor coatings to bond to the frame **8** or clamp **12**.
In addition, all edges and corners on the frame **8** and clamp **12** are radiused or rounded thereby making it easier for the removal of cured coatings or debris.
Rubber squeegee **10** is produced with two sections **10a** and **10b** at an angle of
5 about 45°. However, it will be appreciated that the angle between sections **10a** and **10b** may vary in a range from about 0 to about 90°.

Rubber squeegee blade **10** may be made from different rubbers including EPDM, neoprene, silicone or urethanes or any combination thereof.
The squeegee blade **10** may also be comprised of different durometers or a
10 combination of different durometers in the same squeegee blade **10**.

Squeegee **30** includes a clamp member **12** which includes at least one locator hole **16**, with five (5) locator holes **16** shown in **Figure 1** which are designed to align with holes **20** in rubber squeegee **10** and locator bosses **22** on frame **8** when the squeegee **30** is assembled. At least one thumb screw **14**,
15 with five thumb screws **14** being shown in **Figure 1**, are spaced along clamp section **12** and when assembled the thumb screws **14** are passed through holes **16** in clamp section **12** and through holes **20** in the rubber squeegee **10** and then threaded into threaded boss holes **22** when the squeegee device **30** is assembled.

20 **Figure 2** is an elevation view of the squeegee looking from the front of the squeegee, and **Figure 3** is a sectional view of the squeegee of **Figure 2** taken along the line **A-A**. **Figure 4** is a blow-up of the circled section **A** in **Figure 3** and as can be seen, clamp section **12** includes a curved peripheral edge **18** which mates with the curved surface **24** on the peripheral edge on

frame **8**. The threaded ends of nuts **14** are totally enclosed within the threaded bosses **22**.

Figures 1, 3 and 4 show a raised lip **33** peripherally disposed around locator hole **16** which is included to prevent material from potentially bonding fastener **14** to clamp **12**. **Figure 4** shows a non-threaded end of the threaded fastener or nut **14**, where a flange **35** of the non-threaded end of the threaded nut **14** contacts the raised lip **33** when fully threaded into the boss holes **22** and has an outer diameter which is greater than an outer diameter of the raised lip **33**. The greater outer diameter of the flange **35** compared to the threaded nut **14** is advantageous as it prevents seepage of the liquid being spread by the squeegee into the internally threaded locator boss **22**.

The present squeegee may be produced with different lengths of the frame **8**, flexible squeegee section **10** and clamp section **12**, depending on the application for which the squeegee is intended. For example a hand held version may be produced which may be a few inches long for use in restricted spaces, or longer versions of a couple of feet long may be used for applications where large surface areas are being coated.

The squeegee disclosed herein is very advantageous over conventional squeegees for the following reasons. Since the threaded ends of the fastening nuts are sealed inside the frame **8**, the resinous materials be spread by the squeegee will not hinder the fastening nuts **14** as they are internal threads and blind holes with no exposure to the resinous materials. In addition, in the case of an angle greater than 0° between the squeegee sections **10a** and **10b**, the flexible squeegee blade has been angled as opposes to the squeegee frame having a built in angle which keeps the fasteners **14** further away and at an

upward angle from the resinous materials. Further, the present squeegee **30** has internally threaded bosses **22** and corresponding holes **22** in the flexible squeegee and corresponding holes in flexible squeegee section **10** so that all the components are forced into perfect when the squeegee is assembled.

5 The specific embodiments described above have been shown by way of example, and it should be understood that these embodiments may be susceptible to various modifications and alternative forms. It should be further understood that the claims are not intended to be limited to the particular forms disclosed, but rather to cover all modifications, equivalents, and alternatives
10 falling within the spirit and scope of this disclosure.

WHAT IS CLAIMED IS:

1. A squeegee, comprising:

an elongate frame section, an elongate handle connected to said elongate frame section such that said elongate frame section is generally perpendicular to said elongate handle, said elongate frame section including a preset number of internally threaded blind locator holes each having a raised boss;

an elongate flexible squeegee blade section including a first elongate section and a preset number of locator holes each extending therethrough to receive a corresponding raised boss of said elongate frame section, said elongate flexible squeegee blade section including a second elongate section protruding from and being integrally formed with said first elongate section and inclined at an angle with respect to said first elongate section in a range from greater than 0° to less than 90°;

an elongate clamp section having a preset number of locator holes each extending therethrough to receive a corresponding raised boss of said elongate frame section and further comprising a raised lip disposed around each of said preset number of locator holes and a preset number of threaded fasteners, each of said preset number of threaded fasteners being threaded to be threadably received in an associated internally threaded blind locator hole and each threaded fastener including a flange section configured to contact said raised lip;

wherein threaded sections of each of said threaded fasteners are sealed internally in an associated internally threaded blind locator hole and are not exposed when the squeegee is assembled; and

wherein when assembled said second elongate section contacts a floor or other surface when in operation.

2. The squeegee according to claim 1 wherein said preset number of internally threaded blind locator holes, said preset number of locator holes in said elongate flexible squeegee blade section and said preset number of locator holes in said elongate clamp section are two or more, and wherein, when assembled, said flexible squeegee blade section is sandwiched between said elongate frame section and said elongate clamp section with said two or more internally threaded locator boss being received through said two or more boss holes in said flexible squeegee blade section and two or more boss hole in said elongate clamp section.

3. The squeegee according to claim 1 wherein said first elongate section and said second elongate section are inclined at an angle with respect to each in a range from 30 to 60°.

4. The squeegee according to claim 1 wherein said first elongate section and said second elongate section are inclined at an angle with respect to each of 45°.

5. The squeegee according to claim 1 wherein said elongate frame section and said elongate clamp section are made from a plastic material.

6. The squeegee according to claim 5 wherein said plastic material is polypropylene.

7. The squeegee according to claim 1 wherein all edges and corners on said elongate frame section and said elongate clamp section are radiused or rounded making it easier for the removal of cured coatings or debris.

8. The squeegee according to claim 1 wherein said elongate flexible squeegee blade section is made from any one or combination of neoprene, silicone, urethanes and ethylene propylene diene monomer (M-class) rubber (EPDM rubber).

9. The squeegee according to claim 1 wherein said elongate flexible squeegee blade section is made from any one or combination of one or more materials having different hardness.

10. The squeegee according to claim 1 wherein each flange section of each fastener has an outer diameter which is greater than an outer diameter of the raised lip of the elongate clamp section that the flange section is in contact with.

11. The squeegee according to claim 1 wherein said elongate frame section and said elongate clamp section are made from a flexible material making it easier for the removal of cured coatings or debris.


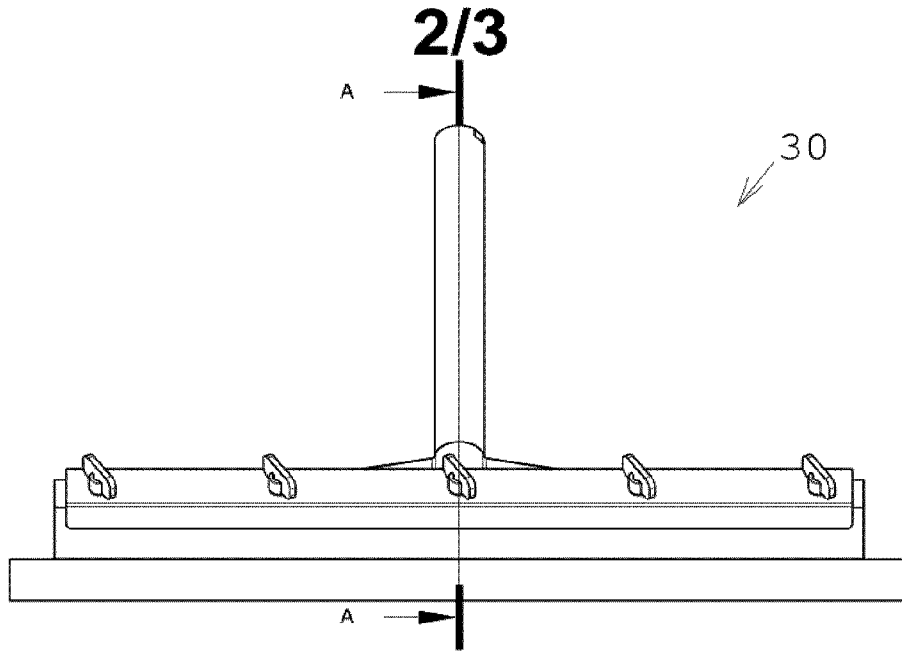


Figure 2

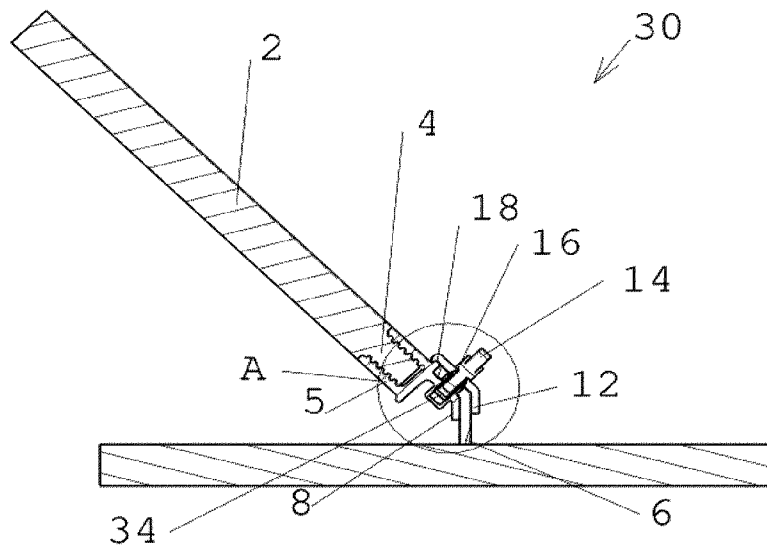

Section A-A

Figure 3

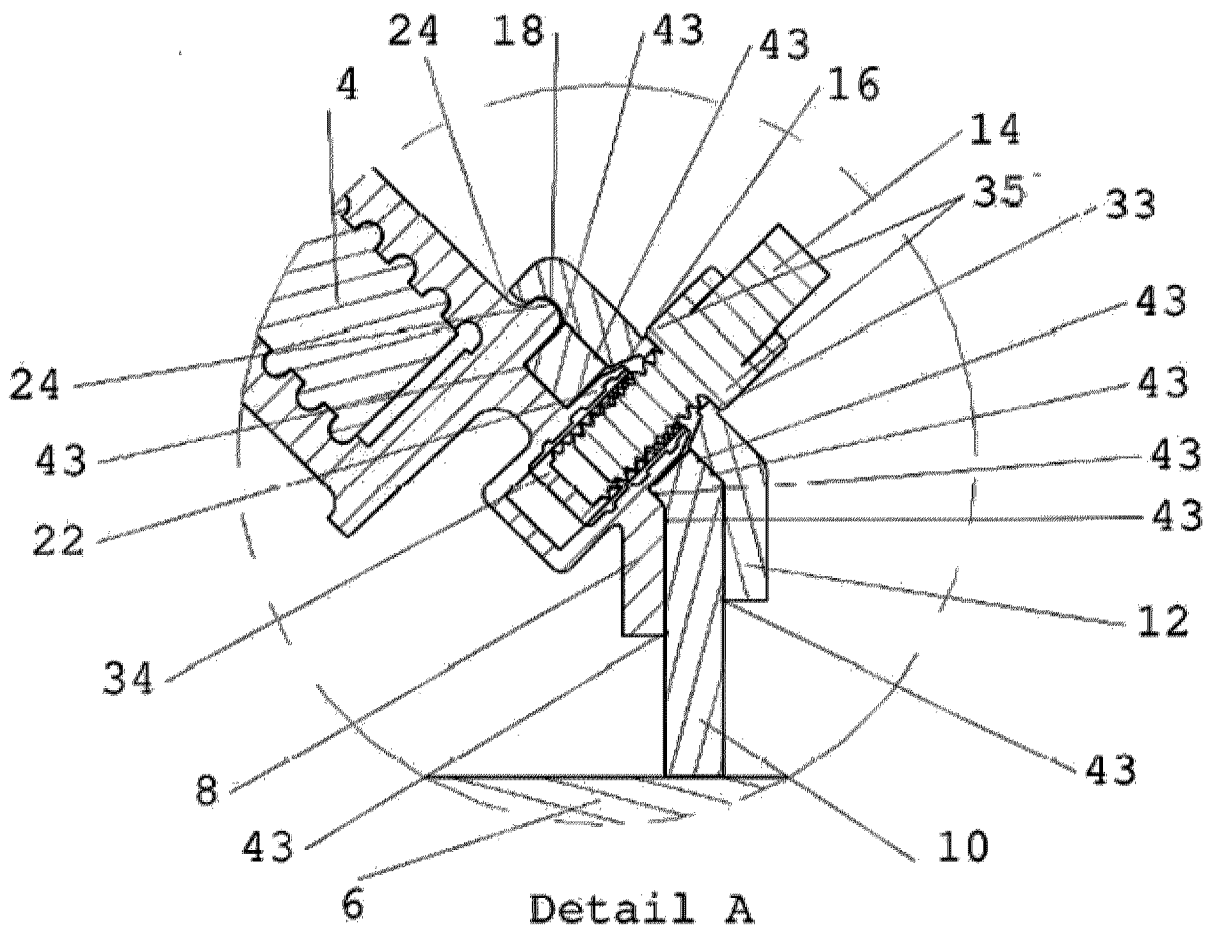


Figure 4

