

(19)



(11)

EP 3 633 142 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
22.03.2023 Bulletin 2023/12

(21) Application number: **18805598.2**

(22) Date of filing: **11.04.2018**

(51) International Patent Classification (IPC):
E21F 7/00^(2006.01)

(52) Cooperative Patent Classification (CPC):
E21F 7/00; E21F 16/00; E21F 17/103

(86) International application number:
PCT/CN2018/082635

(87) International publication number:
WO 2018/214659 (29.11.2018 Gazette 2018/48)

(54) **NOVEL PROCESS FOR CONTROLLING DOWNHOLE GAS IN ABANDONED MINE**

NEUARTIGES VERFAHREN ZUR KONTROLLE VON BOHRLOCHGAS IN STILLGELEGTEN MINEN
NOUVEAU PROCÉDÉ DE COMMANDE DE GAZ DE FOND DE TROU DANS UNE MINE
ABANDONNÉE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **26.05.2017 CN 201710383542**

(43) Date of publication of application:
08.04.2020 Bulletin 2020/15

(73) Proprietor: **Cecep Ningxia New Energy Resources
Joint Stock Co., Ltd.
Ningxia 750002 (CN)**

(72) Inventors:
• **YU, Zhijun**
Yinchuan, Ningxia 750002 (CN)
• **LIU, Shuanglin**
Yinchuan, Ningxia 750002 (CN)
• **ZHAO, Yan**
Yinchuan, Ningxia 750002 (CN)
• **Qi, Ming**
Yinchuan, Ningxia 750002 (CN)
• **XIANG, Qizhi**
Yinchuan, Ningxia 750002 (CN)

- **BAI, Liang**
Yinchuan, Ningxia 750002 (CN)
- **YANG, Zhibin**
Yinchuan, Ningxia 750002 (CN)
- **WANG, Wei**
Yinchuan, Ningxia 750002 (CN)
- **DONG, Wenjun**
Yinchuan, Ningxia 750002 (CN)
- **MA, Yuxiang**
Yinchuan, Ningxia 750002 (CN)
- **CHEN, Guangsheng**
Yinchuan, Ningxia 750002 (CN)

(74) Representative: **Vitina, Maruta et al**
Agency TRIA ROBIT
P.O. Box 22
1010 Riga (LV)

(56) References cited:
WO-A1-2016/019427 CN-A- 101 476 483
CN-A- 103 670 497 CN-A- 104 196 558
CN-A- 105 715 293 CN-A- 107 035 401
GB-A- 2 278 379 RU-A- 2012 150 991

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 633 142 B1

Description

TECHNICAL FIELD

[0001] The present invention belongs to the field of control of gas in mines, and particularly relates to a novel process for controlling gas in an abandoned mine.

BACKGROUND OF THE PRESENT INVENTION

[0002] Gas in abandoned mines means methane, which is in an adsorbed or free state, residual in remaining coal seams, surrounding rocks and downhole confined spaces in mines that are closed according to relevant provisions of the state due to the depletion of coal resources or other reasons such as inconformity to requirements and policies on safe production. The utilization of gas in abandoned mines means that gas is extracted and utilized by the existing gas pumping system on the ground, by taking certain blocking measures, before the mines are closed. In China, no successful experience and projects can be found in the field of control of abandoned mines, in spite of some theoretical studies. Although the pumping of gas by ground drilling has already been done in some mines, the real comprehensive control and utilization of gas in abandoned mines is blank yet. With the development of structural reform of the coal industry and elimination of backward production capacity in China, the number of the closed mines is increasing year by year. The hazards of gas escape, mine collapse, contamination of dirt and accumulated downhole water in abandoned mines are increasingly obvious. The ecological environment will be seriously threatened without scientific control. Meanwhile, these closed mines are rich in gas. It was reported that there may be a trillion cubic feet of gas resources in these abandoned mines in China. The popularization and industrial application of the process of the present invention all over the country will facilitate the development and utilization of unconventional natural gas resources during the China's "13th Five-Year Plan", and also the transformation of coal enterprises, the creation of new jobs and the reuse of abandoned resources, and more importantly, will solve the safety and environmental protection problems of abandoned mines and protect the ecological environment. It is of great social significance. A PCT application No. WO 2016/019427 discloses a well system comprising at least one gas well extending from a ground surface into the ground, a water production well extending from a surface into the ground and a water drainage well fluidly connecting the at least one gas well to the water production well. Whereas, a CN application No. 104196558A discloses a fast and safe gas emission method of a coal mine closed roadway. When a roadway building of a coal mine is closed and sealed, a gas drainage pipe for the gas emission and an air inlet pipe are reserved on a closed wall. The air inlet pipe is connected into the closed roadway and is hung and fixed through hanging hooks, the air inlet

pipe is built and grounded in the closed roadway, the situation that gas accumulated in the closed roadway is denoted by discharge sparks generated by static electricity on the air inlet pipe after the roadway is closed is avoided, and the head-on distance between of a pipe opening, on one side of the closed roadway, of the air inlet pipe and the closed roadway is smaller than the effective range of input air flow of the air inlet pipe and is generally smaller than 5 m. When the closed roadway is unsealed, the high-concentration gas accumulated in the closed roadway is replaced with fresh air flow in advance and is pumped out by connecting the gas drainage pipe and a coal mine extraction system. While, a GB application No. 2278379A discloses a mine pollution control unit for assisting the environment after mine closure has means for data collection and means for extracting pollutant, gas and water. The unit may be used to control water pressure in the mine and to inject water or bacteria/chemicals, the latter assisting pollution separation.

SUMMARY OF THE PRESENT INVENTION

[0003] In view of existing shortcomings in controlling downhole gas in abandoned mines, an objective of the present invention is to provide a novel process for controlling downhole gas in abandoned mines, by blocking downhole drifts in an abandoned mine, forming holes, connecting and reconstructing the gas pumping pipe system, reconstructing the water drainage system, pumping downhole gas by a pumping device on the ground, in order to achieve the purposes of comprehensive control and utilization of gas in an abandoned mine.

[0004] For this purpose, the technical solution comprises the following steps.

1) Before closing an abandoned mine, branched drifts with high downhole gas overflow are blocked at their joints with a main drift by squared stone walls, and pipes are embedded to extract gas and to pump inflowing water:

a: Blockage of downhole drifts: before closing an abandoned mine, at joints of branched downhole drifts in the mining area and goaf with a main drift, an internal wall with a thickness of 0.8m to 1m and an external wall with a thickness of 0.8m to 1m are built with squared stones, with loess filled between the walls. During the whole building process of the blocking walls, a pipe is embedded to enable the interior of the drift to communicate with the exterior. A removable enclosure is formed outside the communication pipe, so that a gas detector can be put into the enclosed drifts for detection. If a drift with high gas content is detected, this pipe is directly connected to the downhole gas main pipe. Also, water drainage holes are to be formed in lower portions of the blocking walls, to drain inflowing wa-

ter from the drifts. The existing gas pumping pipe system is, after being reconstructed, kept in connection to the pumping system on the ground, to realize the pumping of downhole gas in the abandoned mine.

b: Pumping of inflowing downhole water: normally, downhole water always inflows to the goaf, and during the normal production of mines, the pumping of inflowing downhole water is also an important one of routine tasks in production of mines. However, after a mine is shut down and closed, if the inflowing downhole water is not drained in time, the accumulated inflowing downhole water will flood drifts in the goaf in the mine. Consequently, there is no space for the downhole gas to escape out, and as a result, it is unable to extract and utilize the downhole gas. In the present invention, after a mine is shut down and closed, an inflowing downhole water control and pumping system is redesigned, by which, by operating on the ground, the inflowing downhole water can be pumped to the ground without any operator in the mine. In this way, a space is reserved for the downhole gas to escape out and the accumulation of water in the mine is avoided. Meanwhile, the purpose of controlling gas in abandoned mines is realized.

In the present invention, when building squared stone blocking walls for drifts, an overflow tank with a water seal is formed in the lower portion of the internal squared stone wall. The inflowing water in the drifts flows into the overflow tank and overflows out of the blocking wall through the water seal when the level of water reaches a certain height, while gas of a high concentration accumulated within the square stone walls will not flow out of the blocking wall through the overflow tank. The inflowing water overflow from the overflow tank with a water seal flows into the drainage ditch for the main drift. A water reservoir is formed somewhere lowest on the bottom of the mine. The water reservoir is usually built with squared stones, cement and sand. The volume of the water reservoir depends upon the amount of the inflowing water in the mine. The water in the drainage ditch for the main drift flows into the water reservoir. On the ground, by precisely positioning, a water drainage wellbore is formed, which runs to the water reservoir. On the ground, a water drainage pump and a connection pipe are mounted in the wellbore and the water drainage pump is put into about 2/3 of the depth of the water reservoir. When the level of water in the water reservoir reaches the inlet of the water drainage pump, the pump starts pumping water, in order to pump water in the water reservoir to the ground for reusing. In this way, the inflowing downhole water can be pumped to the ground after

the mine is closed, to ensure an enough downhole space to release the stored gas. The purposes of comprehensive control and utilization of downhole gas in abandoned mines are achieved.

2) The pipes embedded in the squared stone walls are connected with a downhole gas pumping pipe to form a downhole gas pumping pipe system, and then the accumulated downhole gas in an abandoned mine is pumped by the existing gas pumping system device on the ground:

A firm steel-reinforced concrete cover plate, which is bigger than the cross section of the wellbore, is cast on the entrance of a vertical shaft. During the casting, two steel pipes are embedded in the steel-reinforced concrete cover plate. An end of the steel pipe running into the inner side of the wellbore is open, to communicate with the downhole space. A blind flange is mounted on the outer side of the wellbore, and connected by bolts. For an inclined shaft and an adit inclined shaft, a brick, stone or concrete wall, which has a thickness of not less than 0.6m and must be firm and reliable, should be built at 20m inside the entrance. Then, soil is filled up to the entrance. And then, another brick, stone or concrete wall is built. After the mine is closed, the blind flange outside the embedded pipe is removed, and a gas detector or sampling device is put into the mine to detect the concentration of gas in the mine. If gas in the mine can be utilized, the pipe is connected to the gas pumping pipe on the ground. In this way, the pumping and utilization of accumulated downhole gas is achieved after the mine is closed.

3) The blocked drift drainage water is communicated with main drift drainage water, a water reservoir is constructed somewhere low on the bottom of the mine, a water drainage wellbore is formed from the ground to the water reservoir, and a water drainage pump and a water pipe are mounted to pump inflowing downhole water to the ground, in order to achieve normal pumping of inflowing downhole water after the mine is closed; an inlet of the water drainage pump is put into 2/3 of a depth of the water reservoir; a water outlet for the branched drift is formed in a lower side of the squared stone wall; the water outlet is in form of an overflow water seal; a water tank is constructed inside the branched drift close to the squared stone wall; the inflowing water in the branched drift flows into the water tank, when a level of accumulated water reaches an overflow height, the inflowing water flows out of the branched drift from the water tank; while gas in the branched drift will not escape from the water outlet; the inflowing water over flown from each branched drift flows into the water reservoir by a drainage ditch arranged in the main drift.

4) after finishing the above operations, for an adit inclined shaft, an entrance of the adit inclined shaft is closed by building internal and external walls with squared stones, cement and sand, with loess and clay filled between the walls, and steel pipes that run into the mine are embedded in an upper portion of the entrance of the adit inclined shaft; and for a vertical shaft, the entire entrance of the vertical shaft is blocked with steel-reinforced concrete cover plates, and steel pipes are embedded in the center of the steel-reinforced concrete cover plates to enable the interior to communicate with the exterior; and the connection with the existing gas pumping system device on the ground achieves the pumping, control and utilization of gas in an abandoned mine.

5) The existing gas pumping system device on the surface is connected with a downhole gas pumping main pipe to pump gas, thereby achieving the purposes of comprehensive control and utilization of downhole gas in an abandoned mine.

[0005] The present invention has the following beneficial effects. By compressive gas control measures, such as blocking downhole drifts in an abandoned mines, reconstructing the downhole gas pipe, reconstructing the pumping of inflowing downhole water, and closing the entrance of the abandoned mine, disasters caused by the accumulation and escape of downhole gas in the abandoned mine and the accumulation of downhole water are avoided. Meanwhile, the gas in the abandoned mine can be reused. Great economic, environmental and social benefits can be realized.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006]

Fig. 1 shows a downhole gas pipe system used in the process of the present invention;

Fig. 2 is an inflowing downhole water drainage system according to the present invention;

Fig. 3 is a schematic view of closing the entrance of a vertical shaft in an abandoned mine, according to the present invention; and

Fig. 4 is a schematic view of blocking an inclined shaft in an abandoned mine, and a gas pumping pipe, according to the present invention.

[0007] Reference numerals:

1: branched downhole drift #1; 2: branched downhole drift #2; 3: branched downhole drift #3; 4: blocking wall for the branched downhole drift; 5: embedded pipe; 6: pipe flange; 7: downhole gas pumping main pipe; 8: main downhole drift; 9: water outlet for a branched downhole

drift; 10: drainage ditch for the main downhole drift; 11: downhole water reservoir; 12: water drainage pump; 13: water drainage wellbore; 14: main entrance of the abandoned mine; 15: cover plate for blocking the entrance; 16: reserved gas pumping pipe; 17: main inclined shaft in the abandoned mine; 18: pipe embedded in the blocking wall; 19: internal squared stone blocking wall; 20: loess or sand filled section; 21: external squared stone blocking wall; and 22: gas pumping main pipe on the ground.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[0008] As shown in Fig. 1, a novel process for comprehensively controlling downhole gas in an abandoned mine is provided. Before an abandoned mine is closed, a blocking wall 4 is built, respectively, at a position about 8m from the adit entrance of the branched drifts #1, #2 and #3 in the downhole mining area and goaf in the abandoned mine. Specifically, at a position 8m from the entrance of a branched drift, a blocking wall having a thickness of about 0.8m to 1m is built with squared stones, cement and sand to block the branched drift, and an external blocking wall having a thickness of about 0.8m to 1m is built with squared stones, cement and sand, with a layer of loess having a thickness of 5m filled between the walls. During the whole building process of the blocking walls, one embedded pipe 5 that is DN100-DN200 thick is embedded in the blocking walls at a position 0.2-0.3m from the top of the adit. By this embedded pipe 5, the branched drifts are communicated with the main drift 8. A pipe flange 6 is used outside the embedded pipe to close it. If gas reaches a concentration that can be utilized, the pipe can be directly connected to a downhole gas pumping main pipe 7 by the flange, and then the downhole gas is pumped and utilized by the existing gas pumping device on the ground.

[0009] Referring to Fig. 2, a system for pumping inflowing downhole water in an abandoned mine is shown. Before an abandoned mine is closed, when building blocking walls for the branched downhole drift #1, a water outlet 9 for a branched downhole drift is formed in the lower side of the blocking walls. The water outlet is in form of an overflow water seal. A water tank, which is plastered with cement mortar, is constructed inside the branched drift close to the blocking walls. The volume of the water tank depends upon the amount of inflowing water in the branched drift. The inflowing water in the branched drift flows into the water tank. When the level of the accumulated water reaches the overflow height, water flows out of the branched drift from the overflow tank in the lower portion of the blocking walls for the branched drift. In this way, the inflowing water in the branched drift can be drained, while gas in the branched drift will not escape from the water outlet 9 which is in form of an overflow water seal. The inflowing water overflowed from each branched drift flows into a drainage ditch 10, which is arranged in the main drift and plastered with cement mor-

tar. A water reservoir 11 is formed somewhere low on the bottom of the mine. The water reservoir is an adit dug somewhere lowest on the bottom of the mine. The water reservoir is plastered with cement mortar. The length, width and depth of the water reservoir depend upon the size of the downhole drift, the capacity of the pumping system, and the amount of inflowing water. Usually, the water reservoir consists of two water reservoirs connected in series, which are 20m long, 3m wide and 3m deep. A water drainage wellbore 13 is formed on the ground right above the water reservoir, so that the water reservoir is communicated with the ground by the water drainage wellbore 13. A water drainage pump 12 is mounted in the water drainage wellbore. An outlet of the water drainage pump 12 is connected to a water treatment device on the ground. By the water drainage pump, the inflowing downhole water accumulated in the water reservoir is drained, to ensure an enough downhole space to release the stored gas. In this way, the purposes of comprehensive control and utilization of downhole gas in abandoned mines are achieved.

[0010] As shown in Fig. 3, in the process of the present invention, at the main entrance 14 of the abandoned mine, a steel-reinforced concrete cover plate 15 is arranged to block the entrance. The distance from the upper surface of the cover plate to the ground, the thickness of the steel-reinforced concrete cover plate, the size of the used steel, the grade of concrete, and the proportion of steel and concrete depend upon the size of the entrance, and will be designed by professional structure design organizations. During the construction according to the design document, when the steel-reinforced concrete cover plate is prepared, one or two steel pipes 3 having a diameter of DN300-500mm are embedded in the steel-reinforced concrete cover plate. One end of the embedded pipe extends into the entrance by a length of greater than 15m, and the pipe orifice inside the entrance is open. The other end of the embedded pipe remains on the steel-reinforced concrete cover plate. A pipe flange is welded at 0.5m to 1m from the ground, and the blind flange and the flange are connected by bolts to block the pipe orifice. After removing the blind flange, a sampling device is put into the pipe to sample and analyze the concentration of downhole gas. If gas reaches a concentration that can be utilized, the pipe is connected to the gas pumping system pipe on the ground to pump and utilize the accumulated downhole gas. In this way, the purpose of comprehensively controlling gas in abandoned mines is achieved.

[0011] As shown in Fig. 4, in the process of the present invention, there is mainly an inclined shaft in an abandoned mine. In this case, when blocking the entrance of the main inclined shaft 17, at a depth more than 25m from the entrance, a squared stone sealing wall 3 having a thickness of not less than 1m is built with squared stones, cement and sand; then, loess or clay is filled in the loess or clay filling section 20 having a thickness of greater than 20m, up to the adit entrance of the inclined

shaft; and then, a squared stone blocking wall 19 having a thickness of not less than 1m is built with squared stones, cement and sand. During the whole blocking process, one or two steel pipes 2 having a diameter of DN300-500mm are embedded in the upper portion of the adit entrance. One end of the embedded pipe 18 extends into the entrance 1 by a length of greater than 20m and is supported by a rack, and the pipe orifice inside the entrance is open. The other end of the embedded pipe remains outside the squared stone blocking wall 19 at the entrance of the inclined shaft. A pipe flange is welded at 0.5m to 1m from the blocking wall, and the blind flange and the flange are connected by bolts to block the pipe orifice. After removing the blind flange, a sampling device is put into the pipe to sample and analyze the concentration of downhole gas. If gas reaches a concentration that can be utilized, the pipe is connected to the existing gas pumping main pipe 22 on the ground to pump and utilize the accumulated downhole gas. In this way, the purpose of comprehensively controlling gas in abandoned mines is achieved.

Claims

1. A process for controlling downhole gas in an abandoned mine, wherein the process comprises steps of:

- 1) before closing an abandoned mine, blocking branched drifts (1, 2, 3) with high downhole gas overflow at their joints with a main drift by squared stone walls (4) and embedding pipes (5) to extract gas and to pump inflowing water;
- 2) connecting the pipes embedded in the squared stone walls (4) to extract gas with a downhole gas pumping pipe (7) to form a downhole gas pumping pipe system, and then pumping accumulated downhole gas in an abandoned mine by an existing gas pumping system device on the ground;
- 3) communicating the blocked drift drainage water with main drift drainage water, constructing a water reservoir (11) somewhere low on the bottom of the mine, forming a water drainage well bore (13) from the ground to the water reservoir, and mounting a water drainage pump (12) and a water pipe to pump inflowing downhole water to the ground, in order to achieve normal pumping of inflowing downhole water after the mine is closed; an inlet of the water drainage pump is put into 2/3 of a depth of the water reservoir; a water outlet (9) for the branched drift (1, 2, 3) is formed in a lower side of the squared stone wall; the water outlet is in form of an overflow water seal; a water tank is constructed inside the branched drift close to the squared stone wall; the inflowing water in the branched

drift flows into the water tank, when a level of accumulated water reaches an overflow height, the inflowing water flows out of the branched drift from the water tank; while gas in the branched drift will not escape from the water outlet; the inflowing water over flown from each branched drift flows into the water reservoir (11) by a drainage ditch (10) arranged in the main drift;

4) after finishing the above operations, for an adit inclined shaft, closing an entrance of the adit inclined shaft (17) by building internal and external walls (19,21) with squared stones, cement and sand, with loess and clay (20) filled between the walls, and embedding steel pipes (18) that run into the mine in an upper portion of the entrance of the adit inclined shaft; and for a vertical shaft, blocking an entire entrance of the vertical shaft (14) with steel-reinforced concrete cover plates (15), and embedding steel pipes (16) in the center of the steel-reinforced concrete cover plates to enable the interior to communicate with the exterior; and the connection with the existing gas pumping system device on the ground achieves the pumping, control and utilization of gas in an abandoned mine; and 5) connecting the existing gas pumping system device on the ground with a downhole gas pumping main pipe to pump gas, thereby achieving the purposes of comprehensive control and utilization of downhole gas in an abandoned mine.

Patentansprüche

1. Verfahren zum Steuern von Gas im Bohrloch einer stillgelegten Mine, wobei das Verfahren die folgenden Schritte umfasst:

1) vor dem Schließen einer stillgelegten Mine, Blockieren von verzweigten Stollen (1, 2, 3) mit hohem Gasüberlauf an ihren Verbindungsstellen mit einem Hauptstollen durch quadratische Steinwänden (4) und Einbetten von Rohren (5), um Gas zu extrahieren und einströmendes Wasser zu pumpen;

2) Verbinden der in den quadratischen Steinwänden (4) eingebetteten Rohre zum Extrahieren von Gas mit einem Gaspumprohr (7) im Bohrloch, um ein Gaspumprohrsystem im Bohrloch zu bilden, und anschließendes Pumpen von angesammeltem Gas im Bohrloch in einem stillgelegten Bergwerk durch eine vorhandene Gaspumpvorrichtung am Boden;

3) Verbinden des verstopften Stollendrainagewassers mit dem Hauptstollendrainagewasser, Bauen eines Wasserreservoirs (11) irgendwo

tief am Boden der Mine, Bilden eines Wasserdrainagebrunnens (13) vom Boden zum Wasserreservoir und Montieren einer Wasserablaufpumpe (12) und einer Wasserleitung zum Pumpen von einströmendem Bohrlochwasser zum Boden, um ein normales Pumpen von einströmendem Bohrlochwasser zu erreichen, nachdem die Mine geschlossen ist, wobei ein Einlass der Entwässerungspumpe in 2/3 der Tiefe des Wasserreservoirs eingebracht wird; wobei ein Wasserauslass (9) für den verzweigten Stollen (1, 2, 3) in einer unteren Seite der quadratischen Steinwand ausgebildet ist; wobei der Wasserauslass die Form eines Überlaufwasserverschlusses hat; wobei ein Wassertank innerhalb des verzweigten Stollens nahe der quadratischen Steinwand konstruiert ist; wobei das einfließende Wasser in dem verzweigten Stollen in den Wassertank fließt, wenn ein Pegel von angesammeltem Wasser eine Überlaufhöhe erreicht, fließt das einfließende Wasser aus dem verzweigten Stollen aus dem Wassertank heraus; während Gas in dem verzweigten Stollen nicht aus dem Wasserauslass entweicht; das einfließende Wasser, das von jedem verzweigten Stollen überströmt wird, fließt durch einen Entwässerungsgraben (10), der in dem Hauptstollen angeordnet ist, in das Wasserreservoir (11);

4) nach Beendigung der oben genannten Arbeiten, für einen Stollen schräg schacht, Verschließen eines Eingangs des Stollenschrägschachtes (17) durch Errichten von Innen- und Außenwänden (19, 21) aus Quadersteinen, Zement und Sand, wobei zwischen den Wänden Löss und Ton (20) eingefüllt werden, und Einbetten von Stahlrohren (18), die in die Grube führen, in einem oberen Teil des Eingangs des Stollenschrägschachtes; und bei einem Vertikal-schacht einen gesamten Eingang des Vertikal-schachtes (14) mit stahlbewehrten Betonabdeckplatten (15) verschließt und Stahlrohre (16) in der Mitte der stahlbewehrten Betonabdeckplatten einbettet, um eine Verbindung des Innenraums mit dem Außenraum zu ermöglichen; und die Verbindung mit dem bestehenden Gaspumpensystem am Boden, um das Pumpen, die Kontrolle und die Nutzung von Gas in einem stillgelegten Bergwerk zu erreichen; und 5) Verbindung des bestehenden Gaspumpensystems am Boden mit einem Gaspumphauptrohr im Bohrloch, um Gas zu pumpen, wodurch eine umfassende Kontrolle und Nutzung von Gas im Bohrloch in einem stillgelegten Bergwerk erreicht wird.

Revendications

1. Procédé de contrôle du gaz de fond dans une mine abandonnée, le procédé comprenant les étapes consistant à :
 - 1) avant la fermeture d'une mine désaffectée, bloquer les galeries ramifiées (1, 2, 3) avec trop-plein de gaz de fond élevé à leurs jonctions avec une galerie principale par des murs en pierre équarris (4) et des tuyaux d'encastrement (5) pour extraire le gaz et pomper l'eau entrante; 5
 - 2) connecter lesdits tuyaux encastrés dans lesdits murs en pierre équarris (4) pour extraire du gaz avec un tuyau de pompage de gaz de fond (7) pour former un système de tuyaux de pompage de gaz de fond, puis pomper le gaz de fond accumulé dans une mine abandonnée par un dispositif de système de pompage de gaz existant au sol; 10
 - 3) faire communiquer ladite eau de drainage de la galerie bloquée avec l'eau de drainage de la galerie principale, construire un réservoir d'eau (11) quelque part bas au fond de ladite mine, former un forage de puits de drainage d'eau (13) dudit sol vers ledit réservoir d'eau, et monter une pompe de drainage d'eau (12) et une conduite d'eau pour pomper l'eau du fond entrante vers ledit sol, afin d'obtenir un pompage normal de l'eau de fond entrante après la fermeture de ladite mine; une entrée de ladite pompe de drainage d'eau est placée aux 2/3 d'une profondeur dudit réservoir d'eau; 15
 - une sortie d'eau (9) pour ladite galerie ramifiée (1, 2, 3) est formée dans un côté inférieur dudit mur en pierre équarrie; ladite sortie d'eau se présente sous la forme d'un joint d'eau de trop-plein; un réservoir d'eau est construit à l'intérieur de ladite galerie ramifiée à proximité dudit mur en pierre équarrie; ladite eau entrant dans ladite galerie ramifiée s'écoule dans ledit réservoir d'eau, lorsqu'un niveau d'eau accumulée atteint une hauteur de débordement, ladite eau entrante s'écoule hors de ladite galerie ramifiée depuis ledit réservoir d'eau; tandis que le gaz dans ladite galerie ramifiée ne s'échappera pas de ladite sortie d'eau; ladite eau entrante survolée depuis chaque galerie ramifiée s'écoule dans ledit réservoir d'eau (11) par un fossé de drainage (10) agencé dans ladite galerie principale; 20
 - 4) après avoir terminé les opérations ci-dessus, pour un puits incliné de galerie, fermer une entrée dudit puits incliné de galerie (17) en construisant des murs intérieurs et extérieurs (19, 21) avec des pierres équarries, du ciment et du sable, avec du loess et de l'argile (20) remplie entre lesdites murs, et encastrer des tuyaux en acier (18) qui se jettent dans ladite mine dans 25

une partie supérieure de ladite entrée dudit puits incliné de galerie; et pour un puits vertical, bloquer une entrée entière dudit puits vertical (14) avec des plaques de couverture en béton armé d'acier (15), et encastrer des tuyaux en acier (16) au centre desdites plaques de couverture en béton armé d'acier pour permettre à l'intérieur de communiquer avec l'extérieur; et la connexion avec ledit dispositif de système de pompage de gaz existant au sol réalise le pompage, le contrôle et l'utilisation de gaz dans une mine abandonnée; et 30

5) connecter ledit dispositif de système de pompage de gaz existant au sol avec un tuyau principal de pompage de gaz de fond pour pomper du gaz, réalisant ainsi les objectifs de contrôle et d'utilisation complets du gaz de fond dans une mine abandonnée. 35

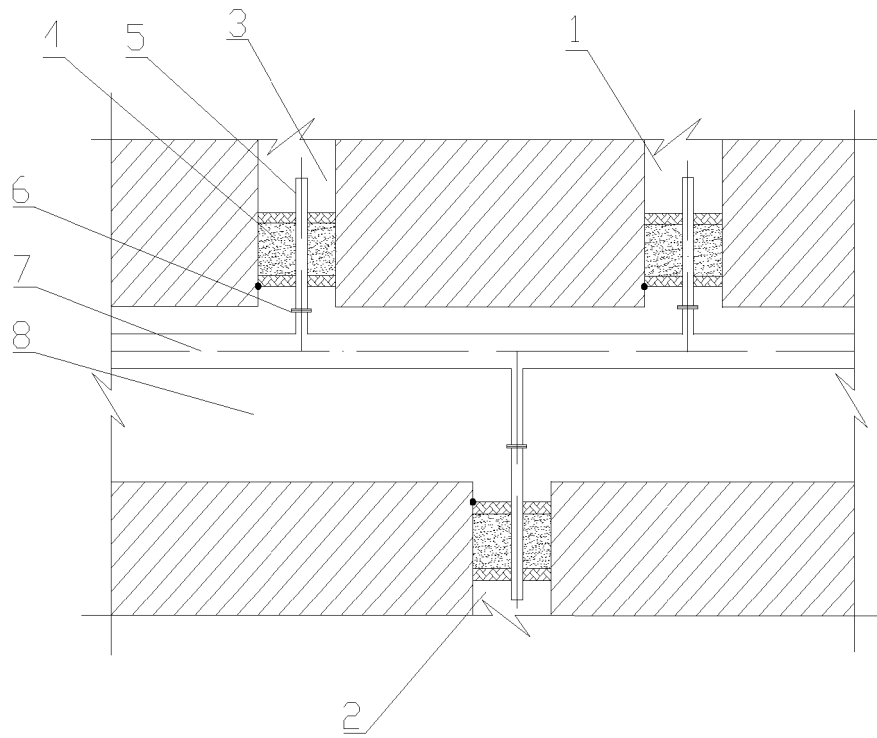


Fig. 1

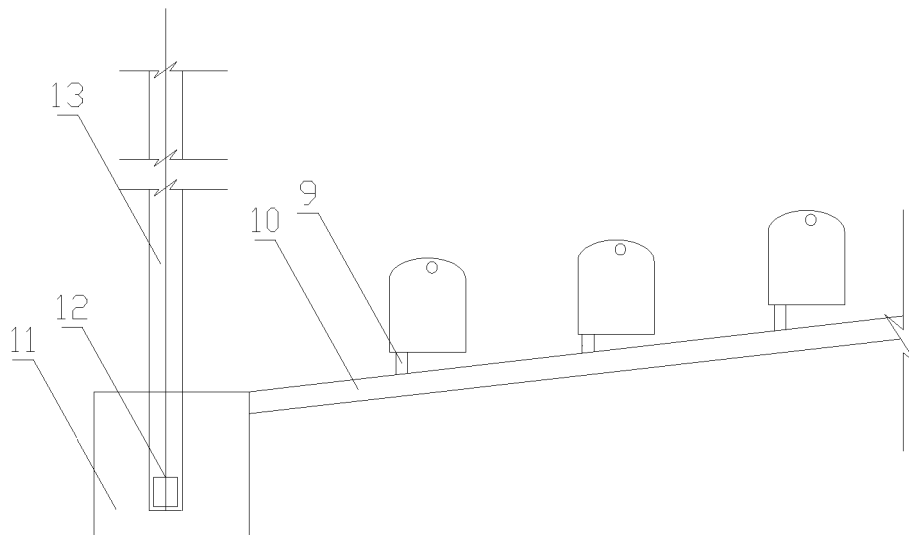


Fig. 2

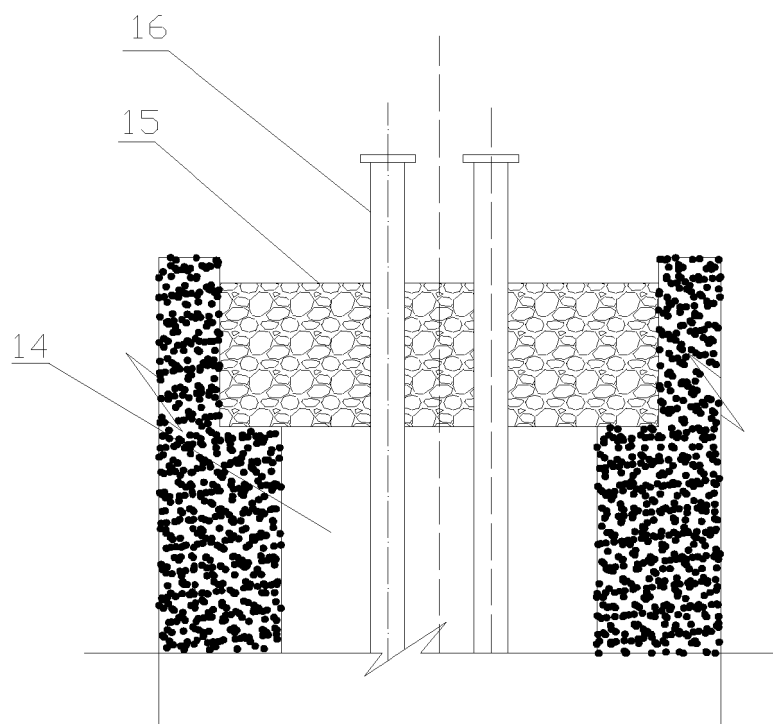


Fig. 3

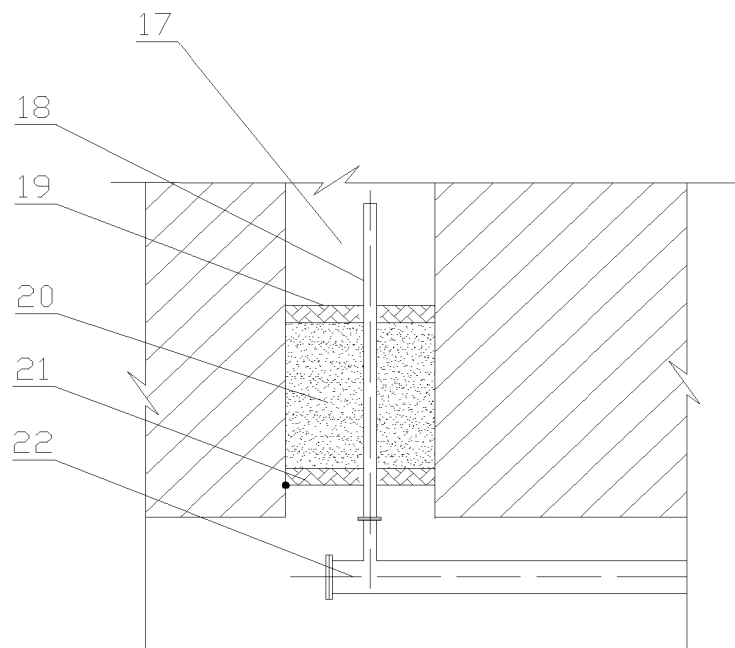


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2016019427 A [0002]
- CN 104196558 A [0002]
- GB 2278379 A [0002]