

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 August 2006 (17.08.2006)

PCT

(10) International Publication Number
WO 2006/084384 A1

(51) International Patent Classification:
H04Q 7/38 (2006.01) *H04L 12/56* (2006.01)
H04Q 7/32 (2006.01)

(21) International Application Number:
PCT/CA2006/000209

(22) International Filing Date:
13 February 2006 (13.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
05101046.0 11 February 2005 (11.02.2005) EP

(71) Applicant (for all designated States except US): **RE-SEARCH IN MOTION LIMITED** [CA/CA]; 295 Phillip Street, Waterloo, Ontario N2L 3W8 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ISLAM, M. Khaledul** [CA/CA]; 88 Broughton Street, Ottawa, Ontario K2K 3N4 (CA). **CHAUDRY, Shahid R.** [CA/CA]; 12 Brechin Crescent, Kanata, Ontario K2W 1E4 (CA). **WILLEY, William Daniel** [US/US]; c/o Research In Motion Limited, 1200 Gough Street #22e, San Francisco, California 94109 (US).

(74) Agent: **SMART & BIGGAR**; P.O. Box 2999, Station D, 900 - 55 Metcalfe Street, Ottawa, Ontario K1P 5Y6 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR REGISTRATION AND PACKET DATA RECONNECT

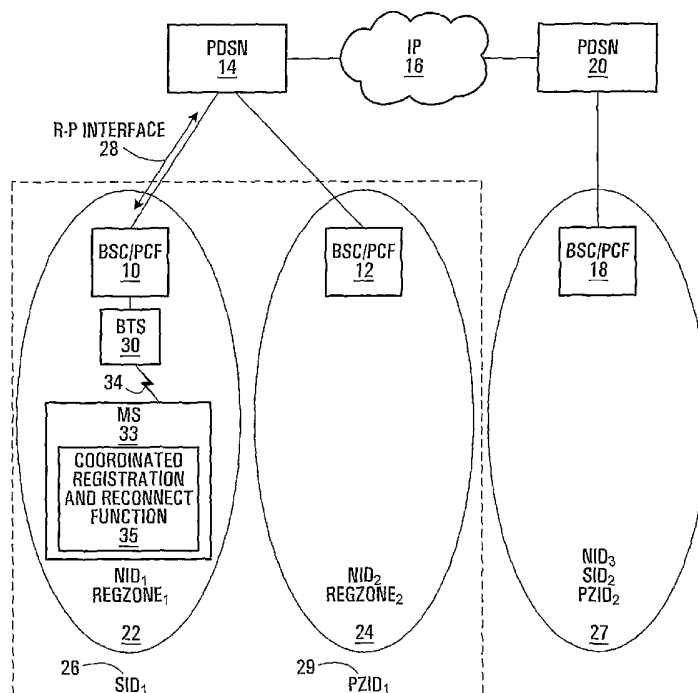

(57) Abstract: Methods, mobile stations and networks are provided that cause a packet data service reconnect to be performed automatically after the occurrence of an event triggering registration, even in some circumstances where such a data service reconnect would not normally occur. This avoids complications that can arise due to the packet data service being discontinued upon registration and the resulting inability to reach the mobile station.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM AND METHOD FOR REGISTRATION AND PACKET DATA RECONNECT

Field of the Application

The application relates to registration and packet data connect in wireless systems.

5 Background

To comply with the 3GPP2 CDMA packet data services standard "3GPP2 C.S0017-012-A v1.0: Data Service Options for Spread Spectrum Systems: Service Options 33 and 66" (also known as TIA-707.12-B), a mobile station with a dormant packet data session is required to "reconnect" its packet data service whenever it detects a change in System ID (SID), Network ID (NID) or Packet Zone ID (PZID) parameter associated with the wireless network. The reconnect process is required to maintain PPP (point-to-point protocol) connectivity in case the wireless network needs to move the so-called "R-P" interface (also known as A10 and A11) between the Radio Access Network (RAN) and the Packet Data Servicing Node (PDSN) associated with the packet data service or in some cases needs to assign a new IP address to the mobile station. The reconnect process requires the mobile station to send an Origination message with Packet Data Service option and Data Ready to Send (DRS) bit set to 0. The wireless network may assign a traffic channel to the mobile station when the reconnect process takes place. A feature called "packet zone hysteresis" is included in 3GPP2 C.S0017-012-A v1.0 in order to minimize the number of reconnect attempts when the mobile station moves back and forth between two systems (such a SID/NID/PZID boundary). To implement the hysteresis feature, a mobile station keeps track of visited systems in a list which is called "Packet Zone List" in 3GPP2 C.S0017-012-A - each entry except the most recently added entry has an expiry timer. If a mobile station revisits a system whose timer has not expired yet and it does not have any data

to send, then it refrains from reconnecting its data service until the hysteresis timer has expired.

To comply with the CDMA air-interface standard "3GPP2 C.S0005-Upper Layer (Layer 3) Signaling Standard for cdma2000 Spread Spectrum Systems" (also known as TIA2000.5) a mobile station may be required to perform different types of access network registration. There are multiple revisions of 3GPP2 C.S0005 - the first one being 3GPP2 C.S0005-0 and the most recent one being 3GPP2 C.S0005-D. An example of a registration method which is common to all revisions of 3GPP2 C.S0005 is called "zone-based registration" in which the mobile station performs registration whenever it enters a zone that is not in the mobile station's zone list. Zones are uniquely identified by a zone number (REG_ZONE) in addition to the SID and NID of the zone.

Summary

One broad aspect provides a method in a mobile station comprising: upon occurrence of an event triggering access network registration, performing an equivalent to an access network registration and packet data service reconnect if any one of at least one circumstance is satisfied, the at least one circumstance comprising one or more circumstances that on their own would not trigger packet data service reconnect; if none of the at least one circumstance is satisfied, performing an access network registration.

In some embodiments, the method involves categorizing the event into one of three categories; for a first of the three categories performing an access network registration; for a second of the three categories performing the equivalent of an access network registration and a packet data reconnect by performing a data service reconnect with an implicit access network registration; for a third of the three categories

performing the equivalent of an access network registration and a packet data reconnect by performing a packet data service reconnect and an access network registration.

In some embodiments, performing the equivalent of an access network registration and packet data service reconnect
5 comprises performing an access network registration using at least one additional parameter to indicate that a packet data service reconnect should also be performed.

In some embodiments, performing the equivalent of an access network registration and packet data service reconnect
10 comprises performing a packet data service reconnect with an implicit access network registration.

In some embodiments, performing the equivalent of an access network registration and packet data service reconnect
15 comprises performing a packet data service reconnect, with an implicit access network registration, and using at least one additional parameter for use in the implicit access network registration.

Further embodiments provide a mobile station adapted
20 to implement one of the above-summarized methods.

Further embodiments provide a computer readable medium having instructions stored thereon for implementing one of the above-summarized methods.

Another broad aspect provides a method in a network
25 comprising: maintaining information for each mobile station indicating whether the mobile station is an always-on mobile station; receiving a registration message from a mobile station; checking the information maintained for the mobile station to see if the mobile station is an always-on mobile
30 station; if the mobile station is an always-on mobile station,

performing at least one of: a) refraining from removing an existing packet data interface, and b) moving the packet data interface to a new zone.

Further embodiments provide one or more network
5 components adapted to implement the above-summarized method in a network.

Brief Description of the Drawings

Preferred embodiments will now be described with reference to the attached drawings in which:

10 Figure 1 is block diagram of a system in which both packet data service reconnect and access network registration must be performed; Figure 2 is a block diagram of a system featuring a mobile station adapted to perform reconnect and registration in a co-ordinated manner;

15 Figures 3 through 5 are flowcharts of methods of performing registration and reconnect in a co-ordinated manner provided by embodiments of the application;

Figure 6 is an example of a table of a packet zone list;

20 Figure 7 is a flowchart of a method implemented by a network for performing co-ordinated reconnect and registration; and

Figure 8 is a flowchart of another method of performing registration and reconnect in a co-ordinated manner
25 provided by an embodiment of the application.

Detailed Description of the Preferred Embodiments

The CDMA packet data service reconnect and the CDMA air-interface standard registration are not implemented co-

operatively to produce an increased likelihood that a mobile station will be reachable in a given instant. For example, a CDMA air-interface standard registration zone boundary may also coincide with a SID/NID/PZID boundary. In such a case, it is possible that the mobile station will perform a zone-based registration after moving from a first registration zone to a second registration zone, but that the mobile station will not initiate packet data reconnect due to the fact that the new SID/NID/PZID was visited earlier and the associated hysteresis timer has not yet expired. Some networks may even terminate the existing R-P interface after the reception of the registration message in the new registration zone in order to handle potential dangling R-P resource issues. The removal of the R-P interface prior to establishment of the new R-P interface due to the lack of co-ordination between the registration process and the packet data service reconnect process may result in making the mobile station unreachable from the packet data perspective until the mobile station re-establishes the packet data connectivity. However, the mobile station may not be aware of the fact that the network has torn down an existing R-P interface. More particularly, if the mobile moves from the first zone to the second zone, a packet data reconnect will not occur until at least the hysteresis timer of the second zone expires. If the mobile station returns to the first zone before expiry of the hysteresis timer of the second zone, and the hysteresis timer for the first zone has not expired, a new R-P interface will not be established until the first zone hysteresis timer is expired. If there had not been a registration that resulted in the R-P interface in the first zone being torn down, the mobile station would have again been reachable after it returned to the first zone. Extended periods of time during which the mobile station is not reachable result in packet data for the mobile station being

accumulated and then sent in a clumped manner to the always-on mobile station after it does become available.

The network shows a first PDSN (packet data service node) connected to two BSCs (base station controllers) 10,12.

5 For some embodiments, it is assumed that a Packet Control Function (PCF) is collocated with BSC or resident with BSC functionality. Each BSC supports a respective wireless network. The details of this are not shown with the exception of a single BTS (base station transceiver) 30 shown under the

10 control of BSC 10. The coverage area of BSC 10 has network identifier NID₁; the coverage area served by BSC 12 has network identifier NID₂. In the illustrated example, the coverage area of BSC 10 also has registration zone ID REGZONE₁ and the coverage area of BSC 12 has REGZONE₂. The overall area 29

15 through which packet service is provided by PDSN 14 has packet zone ID PZID₁. In the illustrated example, this area also has system ID SID₁ 26.

In the illustrated example, the network ID happens to be mapped one-to-one to the BSCs, but this may not necessarily

20 be the case. There may be multiple BSCs having a single NID. Furthermore, in the illustrated example, the PZID₁ is one-to-one with the SID₁. More generally, this is not necessarily the case. A system ID will usually relate to multiple network IDs and the packet zone IDs will be independently mapped.

25 Also shown is a second PDSN 20 connected to a BSC 18 that operates within coverage areas having network ID NID₃, system ID SID₂ and packet zone ID PZID₂ 27.

A single mobile station MOBILE STATION 32 is shown within the coverage area of BTS 30. This mobile station has

30 mobility and can move within different coverage areas and zones.

For mobile station 32, the relevant R-P interface is shown at 28 between PDSN 14 and BSC/PCF 10. The R-P interface transports user packet data from/to the mobile station and carries signalling messages. For example, it enables the mobile station 32 to be paged while it has a dormant packet data service.

To reiterate the problems with the behaviour resulting from the current standards, with C.S0005 zone-based registration, a mobile station will automatically register when it changes registration zones, for example when mobile station 32 moves from REGZONE₁ to REGZONE₂. If the change in registration zone coincides with a change in a SID/NID/PZID, then the change in registration zone will trigger the access network registration (i.e. the mobile station sends the C.S0005 Registration Message), and the change in the SID/NID/PZID will trigger a packet data service reconnect (i.e. the mobile station initiates the packet data reconnect by sending the C.S0005 Origination Message with the DRS field set to '0'), assuming that there is not an outstanding hysteresis timer for the new SID/NID/PZID. With this sequence of events, the mobile station is always reachable. This is the case for the movement of mobile station 32 from REGZONE₁ to REGZONE₂ because the network identifier also changes from NID₁ to NID₂.

If, on the other hand the mobile station moves to a second registration zone that is not on the registration zone list, but there is no change in the SID/NID/PZID, then an access network registration will occur which may tear down the existing R-P interface, but no reconnect process will occur because there has been no change in the SID/NID/PZID. With such a scenario, the mobile station will not be reachable until it instigates a data transmission. This would be the case in Figure 1 where the area defined by REGZONE₂ to have the same network identifier as REGZONE₁.

A second problem is created due to the 3GPP2 C.S0017-012-A packet zone hysteresis. When a mobile station moves from the first registration zone REGZONE₁ to a second registration zone REGZONE₂ that is not on the registration zone list and simultaneously from a first SID/NID/PZID to a second SID/NID/PZID, an access network registration may be triggered that will tear down the R-P interface 28 within the first SID/NID/PZID. Assuming the mobile station has the new SID/NID/PZID in its packet zone list and it does not have any data to send, the mobile station will wait until the expiry of the hysteresis timer associated with the new SID/NID/PZID before issuing a packet data service reconnect by sending the C.S0005 Origination Message with the DRS field set to '0'. If, before the expiry of that hysteresis timer, the mobile station returns to the original SID/NID/PZID, then until the expiry of the hysteresis timer for that SID/NID/PZID, there will not be a packet data service reconnect. Note that in the absence of an access network registration when the mobile station moved from the first SID/NID/PZID to the second SID/NID/PZID, the R-P interface for the first SID/NID/PZID would not have been torn down, and when the mobile station returned to the first SID/NID/PZID it would have again immediately been reachable.

An embodiment of the application will now be described with reference to an example network depicted in Figure 1. With the embodiment of Figure 2, the network is the same as that shown in Figure 1. However, shown is a mobile station 33 equipped with a co-ordinated registration and reconnect function 35. The behaviour of the co-ordinated registration and reconnect function 35 will be described in detail below with various examples. This function can be implemented as part of the software residing on the mobile station 33; it can be implemented in hardware or firmware; alternatively it can be implemented as an appropriate

combination of software, hardware and firmware. Also, while shown is a discrete functional element 35, it is to be understood that it can also be implemented by making a series of modifications to software that is compliant with existing standards. For example, existing mobile stations have the capability to comply with 3GPP2 C.S0005 for the air-interface and 3GPP2 C.S0017-012-A for packet data services. The coordinated registration and reconnect function 35 can be embodied through of series of one or more changes to the otherwise standard compliant functionality.

It is to be very clearly understood that the network depicted in Figure 2 is for the purpose of example and explanation only. An arbitrary arrangement of components is contemplated. Furthermore, the BSC/PCF, BTS hierarchy within a given network is but one example of a method of providing the air-interface through to a mobile station. Other hierarchies may alternatively be implemented. For different implementations, there still will be a registration interface, through the BTS and BSC in the illustrated example for the CDMA air-interface, and there is an R-P interface 28 for the CDMA packet data service or equivalent shown between the PDSN 14 and BSC/PCF 10 in the example.

In a first embodiment, whenever any event triggers an access network registration (see for example 2.6.5.1 of 3GPP2 C.S0005-D) of the following types (timer-based, zone-based, parameter-change, distance-based, or user zone-based) the mobile station will check to see if there is a system entry in its packet zone list with an unexpired hysteresis timer that matches the SID/NID/PZID of the current zone.

If there is one, the mobile station performs a reconnect procedure instead of registration and resets the associated hysteresis timer. The reconnect process constitutes

sending an Origination Message which is considered as an "implicit" registration as per the 3GPP2 C.S0005 standard. In the event the mobile station is required to register and reconnect (e.g. entry to a new zone that is not on mobile station's zone list or packet zone list), the mobile station only performs the reconnect procedure.

It is noted that it is preferred for the mobile station to perform the reconnect procedure instead of the registration. However, in 3GPP2 C.S0005-D for two types of access network registrations using the Registration Message, the associated necessary fields are currently missing from the Origination Message, thus creating a problem for these two types of registrations. For the encryption re-sync required Registration, there is a registration type (REG_TYPE) field in the 3GPP2 C.S0005-D Registration Message which tells the base station that the mobile is registering due to encryption re-sync being required; no equivalent field exists in the Origination Message. Similarly, for Broadcast Multicast (BCMC) Registration, when the mobile needs to change the BCMC frequency, it includes the following fields in the Registration Message to indicate the new BCMC frequency: BCMC frequency information included indicator (BCMC_FREQ_INFO_INCL), BCMC Band Class (BCMC_BAND_CLASS), and BCMC Frequency (BCMC_CDMA_FREQ); no equivalent fields exist in the Origination Message. Since fields are missing from the Origination Message, for an encryption re-sync required Registration and for a BCMC Registration including a frequency change, it will be necessary to send both the Registration message and the Origination Message used for packet data reconnect. Alternatively, if the Origination Message were modified to include a field to indicate to the base station that the mobile station requires an encryption re-sync (this could be by adding the REG_TYPE field to the Origination Message or could be by adding another

field such as a one-bit indicator field), the mobile could send only the Origination Message used for packet data reconnect when the registration is an encryption re-sync required registration. Similarly, if the Origination Message were
5 modified to include fields for the new BCMC frequency (BCMC frequency information included indicator, BCMC Band Class, and BCMC Frequency, or their equivalents) the mobile could send only the Origination Message used for packet data reconnect when the registration is a BCMC frequency change registration.
10 It should also be noted that three types of registrations present special cases for which packet data reconnect is not required at all. If the registration is either a power-up registration, power-down registration, or an ordered registration, packet data reconnect will not be needed and the
15 mobile station can just send the Registration Message.

There are many ways to achieve this result. In a first example, shown in the flowchart of Figure 3, the new behaviour is shown from the perspective of registration with the assumption that a conventional packet zone hysteresis-based
20 reconnect is running in the background. At step 3-1, an event triggering registration occurs. At step 3-2, a check is made to see if the registration is a power-up registration, a power-down registration, or an ordered registration. If the registration was any of these types, yes path step 3-2, then at
25 step 3-5, an access network registration is performed by sending a Registration Message. Alternatively, if the registration is not one of these types, no path step 3-2, processing continues at step 3-4. At step 3-4, a check is made to see if there is an active hysteresis timer for the current
30 SID/NID/PZID. If there is not an active hysteresis timer for the current SID/NID/PZID, no path step 3-4, then at step 3-5 an access network registration is performed by sending a Registration Message. Alternatively, if there is an active

hysteresis timer for the current SID/NID/PZID, yes path step 3-4, then at step 3-3, the mobile station causes the equivalent of an access network registration and a packet data service registration to be performed. This can take the form of an explicit registration (i.e. the mobile station sends a Registration Message) followed by a packet data reconnect; a packet data reconnect only with an implicit registration, or a registration modified to include an indication that a reconnect is also to be performed. At step 3-3, the choice of whether to send only the Origination Message used for packet data reconnect or to send both the Registration Message and the Origination Message used for packet data reconnect can be based upon the Registration type. For example if the registration type is either encryption re-sync registration or BCMC registration then both the Registration Message and the Origination Message used for packet data reconnect are sent; otherwise only the Origination Message used for packet data reconnect is sent. At step 3-3, packet zone list maintenance functions are also performed consisting of cancelling the hysteresis timer for the current SID/NID/PZID, removing the current SID/NID/PZID from the packet zone list, and adding the current SID/NID/PZID as the newest entry in the packet zone list without a timer.

In another embodiment, the new behaviour can be shown from the perspective of the entries in the Packet Zone list when hysteresis is active. This is shown in Figure 4. At step 4-1, an event triggering registration occurs. At step 4-2, a check is made to see if the registration is a power-up registration, a power-down registration, or an ordered registration. If the registration was any of these types, yes path step 4-2, then at step 4-6, an access network registration is performed by sending a Registration Message. Alternatively, if the registration is not one of these types, no path step 4-

2, processing continues at step 4-3. At step 4-3, a check is made to see if the current SID/NID/PZID corresponds to the most recent entry on the packet zone list. If the current SID/NID/PZID corresponds to the most recent entry on the packet zone list, yes path step 4-3, this means that the mobile station already has a packet data connection for the current SID/NID/PZID and thus packet reconnect is not required, so processing continues at step 4-6 where an access network registration is performed by sending a Registration Message.

10 If the current SID/NID/PZID does not correspond to the most recent entry on the packet zone list, no path step 4-3, processing continues at step 4-4. At step 4-4, a check is made to see if the current SID/NID/PZID is on the packet zone list. If the current SID/NID/PZID is not on the packet zone list, no path step 4-4, then at step 4-6 an access network registration is performed by sending a Registration Message. Alternatively, if the current SID/NID/PZID is on the packet zone list, yes path step 4-4, then at step 4-5, the mobile station causes the equivalent of an access network registration and a packet data service registration to be performed. This can take the form of an explicit registration (i.e. the mobile station sends a Registration Message) followed by a packet data reconnect; a packet data reconnect only with an implicit registration, or a registration modified to include an indication that a reconnect is also to be performed. At step 4-5, the choice of whether to send only the Origination Message used for packet data reconnect or to send both the Registration Message and the Origination Message used for packet data reconnect can be based upon the Registration type. For example if the registration type is either encryption re-sync registration or BCMC registration then both the Registration Message and the Origination Message used for packet data reconnect are sent; otherwise only the Origination Message used for packet data reconnect is sent. At step 4-5, packet zone list maintenance

functions are also performed consisting of cancelling the hysteresis timer for the current SID/NID/PZID, removing the current SID/NID/PZID from the packet zone list, and adding the current SID/NID/PZID as the newest entry in the packet zone
5 list without a timer.

Figure 5 is a flowchart of a new integrated reconnect/registration method. The method starts with one of three events, namely an event triggering one registration in step 5-2, a change in SID/NID/PZID not requiring registration
10 in step 5-9, or the expiry of a hysteresis timer in step 5-13.

If it is an event triggering registration step 5-2, processing continues at step 5-3 where a check is made to see if the registration is a power-up registration, a power-down registration, or an ordered registration. If the registration
15 was any of these types, yes path step 5-3, then at step 5-7, a registration is performed by sending a Registration Message. Alternatively, if the registration is not one of these types, no path step 5-3, processing continues at step 5-4. At step 5-4, a check is made to see if the current SID/NID/PZID
20 corresponds to the most recent entry on the packet zone list. If the current SID/NID/PZID corresponds to the most recent entry on the packet zone list, yes path step 5-4, this means that the mobile station already has a packet data connection for the current SID/NID/PZID and thus packet reconnect is not
25 required, so processing continues at step 5-7 where a registration is performed by sending a Registration Message. If the current SID/NID/PZID does not correspond to the most recent entry on the packet zone list, no path step 5-4, processing continues at step 5-5. At step 5-5, a check is made
30 to see if the current SID/NID/PZID is on the packet zone list. If the current SID/NID/PZID is not on the packet zone list, no path step 5-5, then at step 5-7 a reconnect is performed (consistent with normal packet zone reconnection behaviour

since there has been a change in SID/NID/PZID) and a registration is performed at step 5-8 by sending a Registration Message. Alternatively, if the current SID/NID/PZID is on the packet zone list, yes path step 5-5, then processing continues at step 5-6. At step 5-6 the hysteresis timer for the current SID/NID/PZID is cancelled, the current SID/NID/PZID is removed from the packet zone list, and the current SID/NID/PZID is added as a new entry to the packet zone list. It should be noted that before adding a new entry to the packet zone list the mobile station sets the packet zone hysteresis timer for the most recently added entry in the list as described in C.S0017-012-A v1.0 section 2.2.5. Continuing step 5-6, the mobile station causes the equivalent of an access network registration and a packet data service registration to be performed. This can take the form of an explicit registration (i.e. the mobile station sends a Registration Message) followed by a packet data reconnect; a packet data reconnect only with an implicit registration, or a registration modified to include an indication that a reconnect is also to be performed. At step 5-6, the choice of whether to send only the Origination Message used for packet data reconnect or to send both the Registration Message and the Origination Message used for packet data reconnect can be based upon the Registration type. For example if the registration type is either encryption re-sync registration or BCMC registration then both the Registration Message and the Origination Message used for packet data reconnect are sent; otherwise only the Origination Message used for packet data reconnect is sent.

In another embodiment, steps 5-7 and 5-8 can be combined in any manner that results in the equivalent of both a registration and a reconnect being performed. As outlined previously, this might consist of a reconnect with implicit registration.

On the other hand, if the initial event was a change in SID/NID/PZID not requiring registration, step 5-9, then packet zone list processing continues at step 5-11. At step 5-11, if the new SID/NID/PZID is on the packet zone list, yes
5 path step 5-11, then nothing is done as either the mobile station is already connected to the current SID/NID/PZID (i.e. the current SID/NID/PZID is the most recent entry on the list) or the hysteresis timer is being counted down for that SID/NID/PZID and a reconnect will not occur until that timer
10 expires. On the other hand, if the new SID/NID/PZID is not on the packet zone list, no path step 5-11, then at step 5-12, the packet zone hysteresis timer for the most recently added entry in the packet zone list is activated as described in C.S0017-012-A v1.0 section 2.2.5, the new SID/NID/PZID is added to the
15 packet zone list, and reconnect is performed at step 5-12.

Finally, if the initial event was the expiry of a hysteresis timer, then the SID/NID/PZID is removed from the packet zone list at step 5-13. A reconnect is performed at step 5-14 if the timer of the current SID/NID/PZID expired. An
20 example of a packet zone list used when hysteresis is active is shown in Figure 6 where various SID/NID/PZID entries are shown with respective hysteresis timers $T_1, \dots, T_N$. The entries in the list are ordered from the newest on the top to the oldest on the bottom. The newest entry in the packet zone list (the
25 topmost entry) does not have an active hysteresis timer. Before a new entry is added to the packet zone list, a hysteresis timer is activated for the newest entry currently in the list and then the new entry is added without an active hysteresis timer. It is to be clearly understood that the list
30 shown is a very specific example. The point of hysteresis is to not immediately reconnect after changing packet zones to a zone that was previously visited within some time interval. There are many logically equivalent ways of achieving this

function without necessarily implementing a list, or implementing timers.

For all of the above methods, as discussed previously, wherever the equivalent of both a registration and a reconnect are to be performed, any of the four previously introduced behaviours can be executed. These include performing a registration and then a reconnect; performing a reconnect and also an implicit registration; performing a registration using a new version of the registration message that includes one or more parameters that indicate reconnect is to also be performed; performing a reconnect that includes one or more parameters for use in registration. For some of these options, a change will also need to be implemented on the network side. In particular, in the event a new registration message is employed that indicates one or more parameters which indicates reconnect is also to be performed, the base station controller will need to be modified to understand this message and act accordingly. Similarly, for an embodiment featuring the use of a reconnect message that includes one or more parameters for use in registration, the base station controller will also need to be modified to understand the new parameters and to act accordingly.

Referring now to Figure 7, shown is another embodiment that achieves a similar effect, but does not necessarily require changes to be made to the mobile station. In this embodiment, a change is made in the behaviour of the network side in processing registration messages. At step 7-1, the network (for example a BSC or BTS) receives a registration message. The network then checks to see if the message was received from an always-on mobile station at step 7-2. For example, an attribute may be retrieved from the AAA and maintained in the radio access network, for example in the BSC/PCF, for each mobile station to indicate whether or not it

is an always-on mobile station. If it is not an always-on mobile station, no path step 7-2, then step 7-3 is performed which consists of performing a normal registration and this may involve tearing down the existing R-P interface. On the other hand, if the mobile station is an always-on mobile station, yes path step 7-2, then step 7-4 is executed. This consists of performing registration, but in so doing not tearing down the existing R-P interface. In a variant of this, step 7-5 can be performed. This consists of performing registration and moving the R-P interface to the new zone if the IP connectivity is the same. The functionality of Figure 7 is preferably implemented in software in the base station controller. However, other implementations such as hardware, software, firmware are also contemplated. Also, this functionality could be implemented in a component other than a base station controller.

The detailed examples presented above assume that packet data service reconnect occurs across changes in SID/NID/PZID. More generally, reconnect is considered to occur across changes in packet data service reconnect zone. The reconnect zone does not have to be an actual parameter. In the particular examples given, any time any one of SID/NID/PZID changes, the reconnect zone changes. Other reconnect triggers are contemplated.

Referring now to Figure 8, in another embodiment, a method implemented in the mobile station involves first the occurrence of an event triggering registration at step 8-1. The event is categorized at step 8-2. Three different categorizations are shown, these including a first category for which only registration is performed at step 8-3; a second category for which registration and reconnect are performed at step 8-4, and a third category for which reconnect with implicit registration is performed. For the third category, in

some embodiments the reconnect is performed with additional parameters to support particular registration types.

In a specific implementation, if the mobile station determines that a registration is required to a base station for which a packet zone hysteresis timer is active, the mobile station cancels the packet zone hysteresis timer, removes the entry from the packet zone list, adds the entry as a new entry in the packet zone list, and initiates a packet zone based reconnection by sending an Origination Message (preferably with DRS=0) if the required registration is of any of a set of defined types. In one embodiment the types are: timer-based, zone-based, parameter-change, distance-based, or user zone-based. Furthermore, in some embodiments, if the mobile station determines that a registration is required to a base station for which a packet zone hysteresis timer is active, the mobile station performs the registration, cancels the packet zone hysteresis timer, removes the entry from the packet zone list, adds the entry as a new entry in the packet zone list, and initiates a packet zone based reconnection by sending an Origination Message (preferably with DRS=0) if the required registration is of any of a set of defined types. In one embodiment, the types are: encryption re-sync required, or BCMC Registration.

In the above, it may not be necessary to explicitly cancel the hysteresis timer given that the entry has been removed from the packet zone list. This is an implementation decision.

Numerous modifications and variations of the present application are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the application may be practiced otherwise than as specifically described herein.

WE CLAIM:

1. A method in a mobile station comprising:

upon occurrence of an event triggering access network
registration, performing an equivalent to an access network
5 registration and packet data service reconnect if any one of at
least one circumstance is satisfied, the at least one
circumstance comprising one or more circumstances that on their
own would not trigger packet data service reconnect;

if none of the at least one circumstance is
10 satisfied, performing an access network registration.

2. The method of claim 1 wherein the at least one
circumstance comprises one or more of:

a change in packet data service reconnect zone;

no change in packet data service reconnect zone and a
15 current packet data service reconnect zone was previously
visited within a defined period of time.

3. The method of claim 1 or claim 2 wherein performing
an equivalent to an access network registration and reconnect
comprises:

20 performing an access network registration; and
performing a packet data service reconnect.

4. The method of any one of claims 1 to 3 comprising:
categorizing the event into one of three categories;

for a first of the three categories performing an
25 access network registration;

for a second of the three categories performing the equivalent of an access network registration and a packet data reconnect by performing a data service reconnect with an implicit access network registration; and

5 for a third of the three categories performing the equivalent of an access network registration and a packet data reconnect by performing a packet data service reconnect and an access network registration.

5. The method of any one of claims 1 to 4 further
10 comprising:

if the access network registration is of any one of a first set of defined types, and if the mobile station

determines that an access network registration is required to a base station for which a packet zone hysteresis
15 timer is active in a packet zone list:

removing the entry from the packet zone list;

adding the entry as a new entry in the packet zone list; and

initiating a packet zone based reconnection by
20 sending an Origination Message.

6. The method of claim 5 further comprising:

cancelling the packet zone hysteresis timer.

7. The method of claim 5 or claim 6 further comprising:

if the access network registration is of any one of a
25 second set of defined types, and if the mobile station determines that an access network registration is required to a

base station for which a packet zone hysteresis timer is active in the packet zone list:

performing the access network registration;

removing the entry from the packet zone list;

5 adding the entry as a new entry in the packet zone list; and

initiating a packet zone based reconnection by sending an Origination Message.

8. The method of any one of claims 5 to 7 wherein the
10 first set of defined types comprises at least one of timerbased, zone-based, parameter-change, distance-based, and user zone-based.

9. The method of claim 7 wherein the first set of defined types comprises at least one of timer-based, zonebased,
15 parameter-change, distance-based, and user zone-based and the second set of defined types comprises at least one of encryption re-sync required, or BCMC Registration.

10. The method of any one of claims 1 to 9 wherein performing an equivalent to an access network registration and
20 packet data service reconnect comprises:

performing an access network registration using at least one additional parameter to indicate that a packet data service reconnect should also be performed.

11. The method of any one of claims 1 to 9 wherein
25 performing an equivalent to an access network registration and packet data service reconnect comprises:

performing a packet data service reconnect with an implicit access network registration.

12. The method of any one of claims 1 to 9 wherein performing an equivalent to an access network registration and packet data service reconnect comprises:

performing a packet data service reconnect, with an
5 implicit access network registration, and using at least one additional parameter for use in the implicit access network registration.

13. The method of any one of claims 1 to 12 wherein packet data service reconnect zones are each represented by a
10 respective SID/NID/PZID, the method further comprising:

upon occurrence of an event triggering access network registration:

if a reconnect zone having the SID/NID/PZID was previously visited within a respective defined time period,
15 performing a reconnect with implicit access network registration;

if a reconnect zone having the SID/NID/PZID was not previously visited within the defined time period, and there is no change in SID/NID/PZID, performing a access network
20 registration;

if a reconnect zone having the SID/NID/PZID was not previously visited within the defined time period, and there is a change in SID/NID/PZID, performing a reconnect and performing a access network registration.

25 14. The method of any one of claims 1 to 12 wherein packet data service reconnect zones are each represented by a respective SID/NID/PZID, the method further comprising:

upon occurrence of an event triggering access network registration:

if a reconnect zone having the SID/NID/PZID was previously visited within a respective defined time period, performing a reconnect with implicit access network registration;

5 if a reconnect zone having the SID/NID/PZID was 10 not previously visited within the defined time period, and there is no change in SID/NID/PZID, performing an access network registration;

10 if a reconnect zone having the SID/NID/PZID was not previously visited within the defined time period, and there is a change in SID/NID/PZID, performing a reconnect with implicit access network registration.

15. A mobile station adapted to implement the method of any one of claims 1 to 14.

15 16. The mobile station of claim 12 comprising a coordinated registration and reconnect function.

17. A computer readable medium having program instructions means stored thereon for implementing a method according to any one of claims 1 to 15.

20 18. A method in a network comprising:

maintaining information for each mobile station indicating whether the mobile station is an always-on mobile station;

25 receiving a registration message from a mobile station;

checking the information maintained for the mobile station to see if the mobile station is an always-on mobile station;

if the mobile station is an always-on mobile station, performing at least one of:

refraining from removing an existing packet data interface, and

5 moving the packet data interface to a new zone.

19. One or more network components adapted to implement the method of claim 18.

20. The method of claim 1 wherein:

10 if the mobile station is required to perform a timer-based registration, distance-based registration, zone-based registration, parameter change registration, or user zone registration, and if a packet zone list contains an entry with an active hysteresis timer for a current packet zone, the mobile station removes the entry from the packet zone list.

15 21. The method of claim 1 wherein:

if the mobile station is required to perform a timer-based registration, distance-based registration, zone-based registration, parameter change registration, or user zone registration, and if a packet zone list contains an entry with
20 an active hysteresis timer for a current packet zone, the mobile station cancels the active packet zone hysteresis timer of the entry and removes the entry from the packet zone list.

22. The method of claim 20 or claim 21 wherein:

removing the entry from the packet zone list triggers
25 the mobile station to send an Origination Message, which serves as an implicit registration.

23. The method of claim 22 wherein:

sending the Origination Message is in lieu of a
Registration Message being sent.

AMENDED CLAIMS
received by the International Bureau on 11 July 2006 (11.07.2006)

WE CLAIM:

1. A method in a mobile station comprising:

upon occurrence of an event triggering access network registration:

5 choosing between performing an equivalent to an access network registration and packet data service reconnect and performing an access network registration based on at least whether or not a current packet data service reconnect zone was previously visited within a defined period of time;

10 wherein if the access network registration is of any one of a first set of defined types, and if the mobile station determines that an access network registration is required to a base station for which a packet zone hysteresis timer is active in a packet zone list:

15 removing the entry from the packet zone list; and
initiating a packet zone based reconnection by sending an Origination Message.

2. The method of claim 1 wherein:

the mobile station determines that the current packet
20 data service reconnect zone was previously visited within the defined period of time if a packet zone list contains an entry with an active hysteresis timer for the current packet data service reconnect zone.

3. The method of claim 1 or claim 2 wherein performing
25 an equivalent to an access network registration and reconnect comprises:

performing an access network registration; and

performing a packet data service reconnect.

4. The method of any one of claims 1 to 3 comprising:

categorizing the event into one of three categories;

for a first of the three categories performing an

5 access network registration;

for a second of the three categories performing the equivalent of an access network registration and a packet data reconnect by performing a data service reconnect with an implicit access network registration; and

10 for a third of the three categories performing the equivalent of an access network registration and a packet data reconnect by performing a packet data service reconnect and an access network registration.

5. The method of any one of claims 1 to 4 further

15 comprising:

if the access network registration is of any one of the first set of defined types, and if the mobile station determines that the access network registration is required to the base station for which the packet zone hysteresis timer is active in the

20 packet zone list:

adding the entry as a new entry in the packet zone list.

6. The method of claim 5 further comprising:

cancelling the packet zone hysteresis timer of the entry that has been removed.

25 7. The method of claim 5 or claim 6 further comprising:

if the access network registration is of any one of a second set of defined types, and if the mobile station

determines that an access network registration is required to a base station for which a packet zone hysteresis timer is active in the packet zone list:

performing the access network registration;

5 removing the entry from the packet zone list;

adding the entry as a new entry in the packet zone list; and

initiating a packet zone based reconnection by sending an Origination Message.

10 8. The method of any one of claims 5 to 7 wherein the first set of defined types comprises at least one of timerbased, zone-based, parameter-change, distance-based, and user zone-based.

9. The method of claim 7 wherein the first set of
15 defined types comprises at least one of timer-based, zonebased, parameter-change, distance-based, and user zone-based and the second set of defined types comprises at least one of encryption re-sync required, or BCMC Registration.

10. The method of any one of claims 1 to 9 wherein
20 performing an equivalent to an access network registration and packet data service reconnect comprises:

performing an access network registration using at least one additional parameter to indicate that a packet data service reconnect should also be performed.

25 11. The method of any one of claims 1 to 9 wherein performing an equivalent to an access network registration and packet data service reconnect comprises:

performing a packet data service reconnect with an implicit access network registration.

12. The method of any one of claims 1 to 9 wherein performing an equivalent to an access network registration and
5 packet data service reconnect comprises:

performing a packet data service reconnect, with an implicit access network registration, and using at least one additional parameter for use in the implicit access network registration.

10 13. The method of any one of claims 1 to 12 wherein packet data service reconnect zones are each represented by a respective SID/NID/PZID, the method further comprising:

upon occurrence of an event triggering access network registration:

15 if a reconnect zone having the SID/NID/PZID was previously visited within a respective defined time period, performing a reconnect with implicit access network registration;

if a reconnect zone having the SID/NID/PZID was not
20 previously visited within the defined time period, and there is no change in SID/NID/PZID, performing a access network registration;

if a reconnect zone having the SID/NID/PZID was not previously visited within the defined time period, and there is
25 a change in SID/NID/PZID, performing a reconnect and performing a access network registration.

14. The method of any one of claims 1 to 12 wherein packet data service reconnect zones are each represented by a respective SID/NID/PZID, the method further comprising:

upon occurrence of an event triggering access network registration:

if a reconnect zone having the SID/NID/PZID was previously visited within a respective defined time period,
5 performing a reconnect with implicit access network registration;

if a reconnect zone having the SID/NID/PZID was 10 not previously visited within the defined time period, and there is no change in SID/NID/PZID, performing an access
10 network registration;

if a reconnect zone having the SID/NID/PZID was not previously visited within the defined time period, and there is a change in SID/NID/PZID, performing a reconnect with implicit access network registration.

15 15. The method of claim 1 wherein:

if the mobile station is required to perform a timer-based registration, distance-based registration, zone-based registration, parameter change registration, or user zone registration, and if a packet zone list contains an entry with
20 an active hysteresis timer for a current packet zone, the mobile station removes the entry from the packet zone list.

16. The method of claim 1 wherein:

if the mobile station is required to perform a timer-based registration, distance-based registration, zone-based
25 registration, parameter change registration, or user zone registration, and if a packet zone list contains an entry with an active hysteresis timer for a current packet zone, the mobile station cancels the active packet zone hysteresis timer of the entry and removes the entry from the packet zone list.

17. The method of claim 15 or claim 16 wherein:

removing the entry from the packet zone list triggers the mobile station to send an Origination Message, which serves as an implicit registration.

5 18. The method of claim 17 wherein:


sending the Origination Message is in lieu of a Registration Message being sent.

19. A mobile station adapted to implement the method of any one of claims 1 to 18.

10 20. The mobile station of claim 19 comprising a coordinated registration and reconnect function.

21. A computer readable medium having program instructions means stored thereon for implementing a method according to any one of claims 1 to 18.

1/7

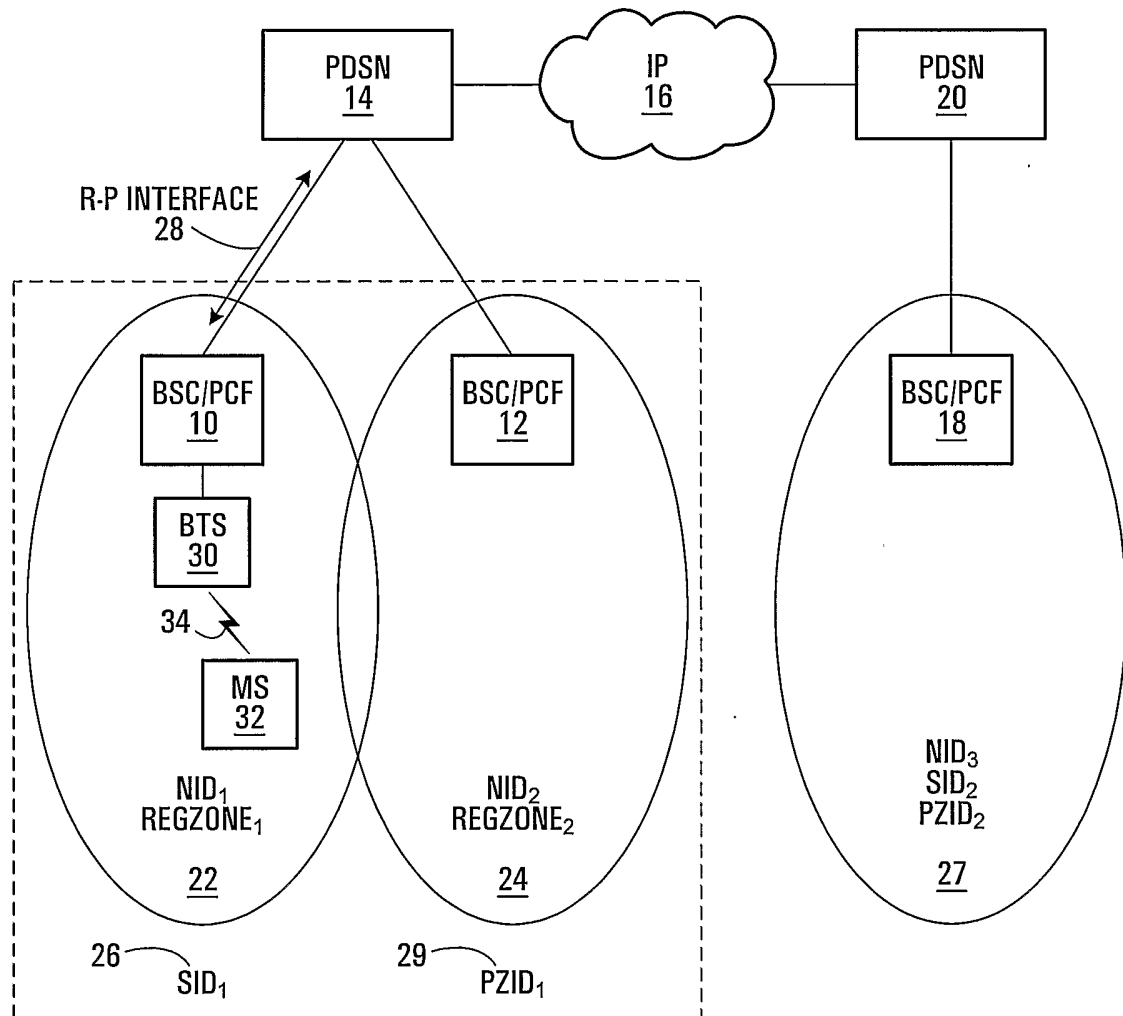**FIG. 1**

2/7

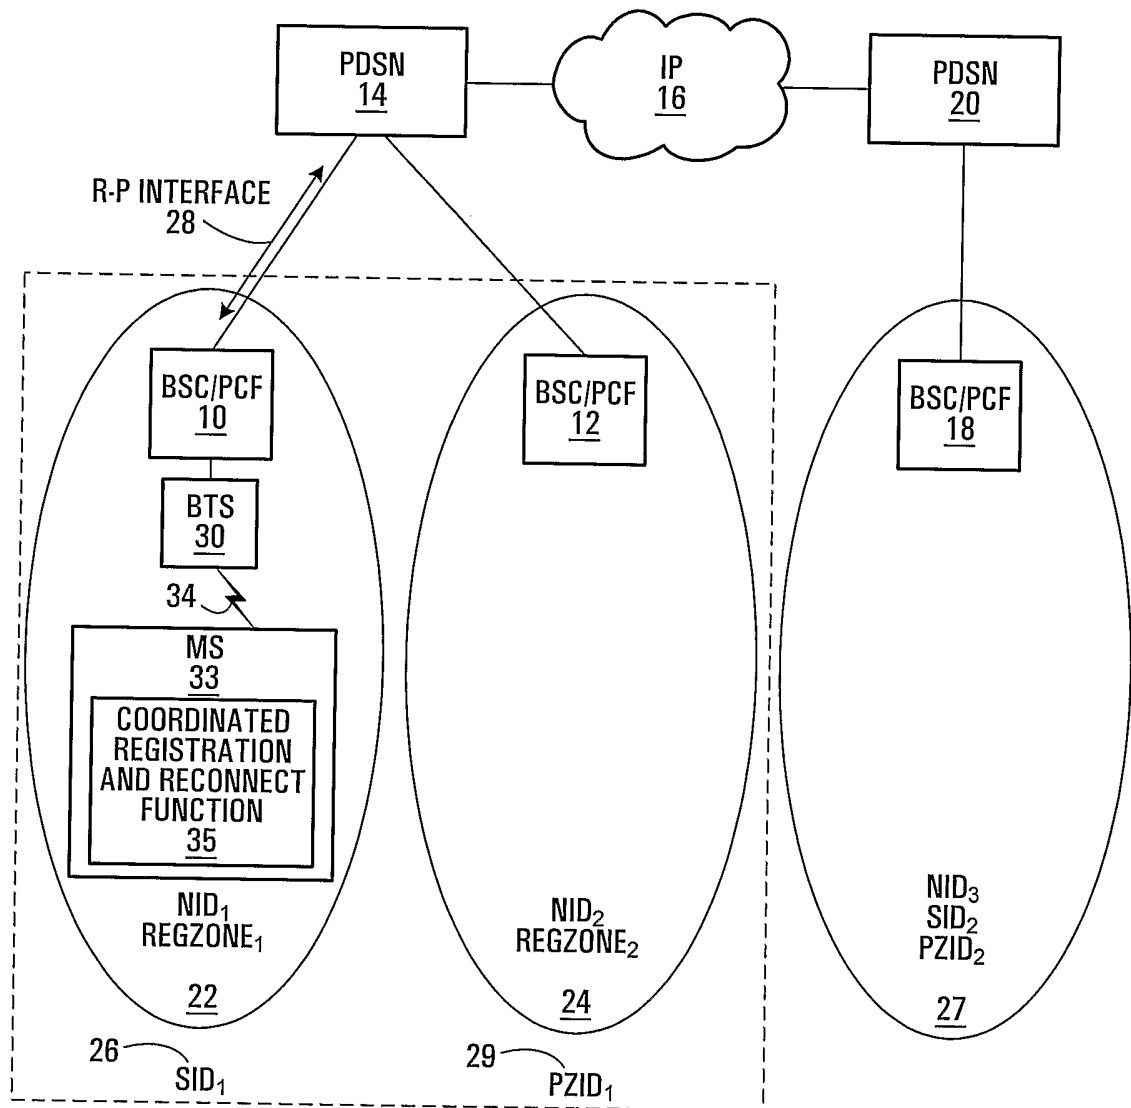
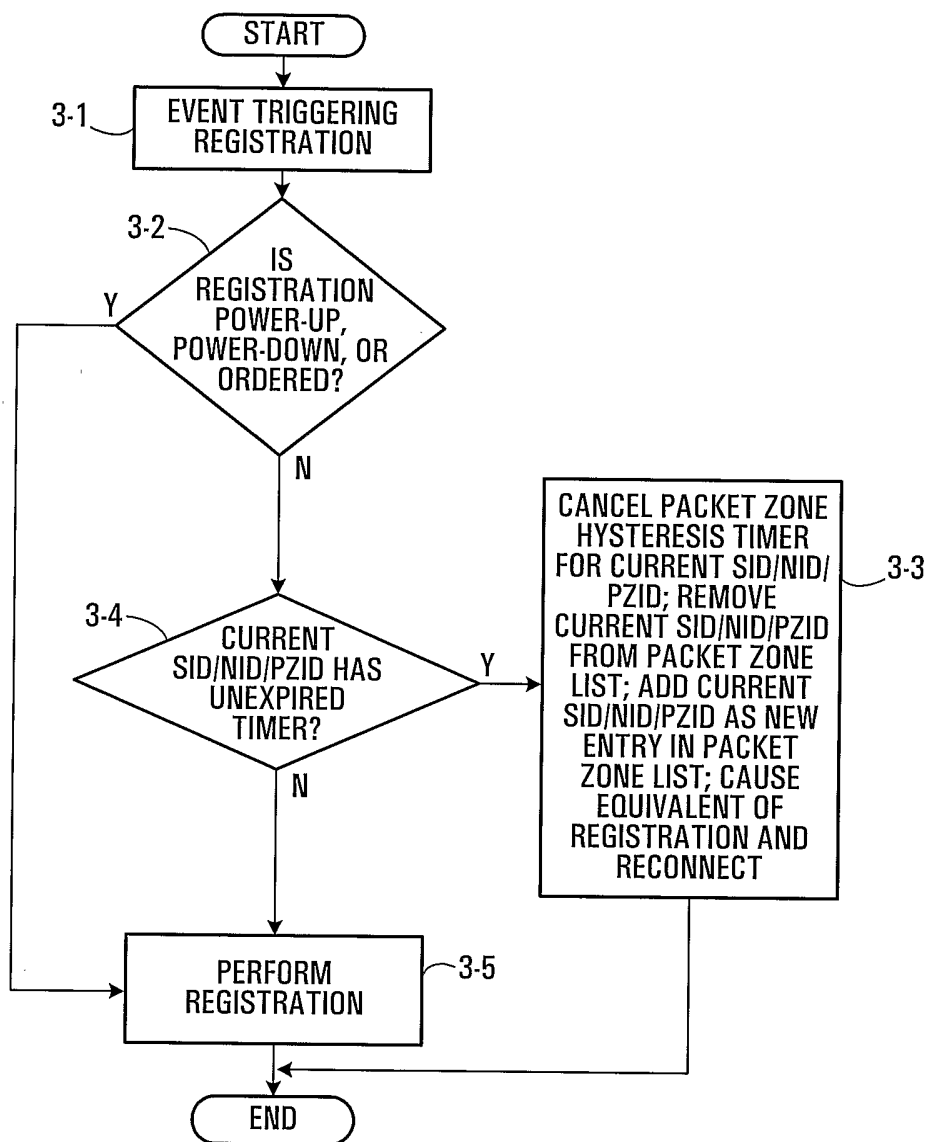
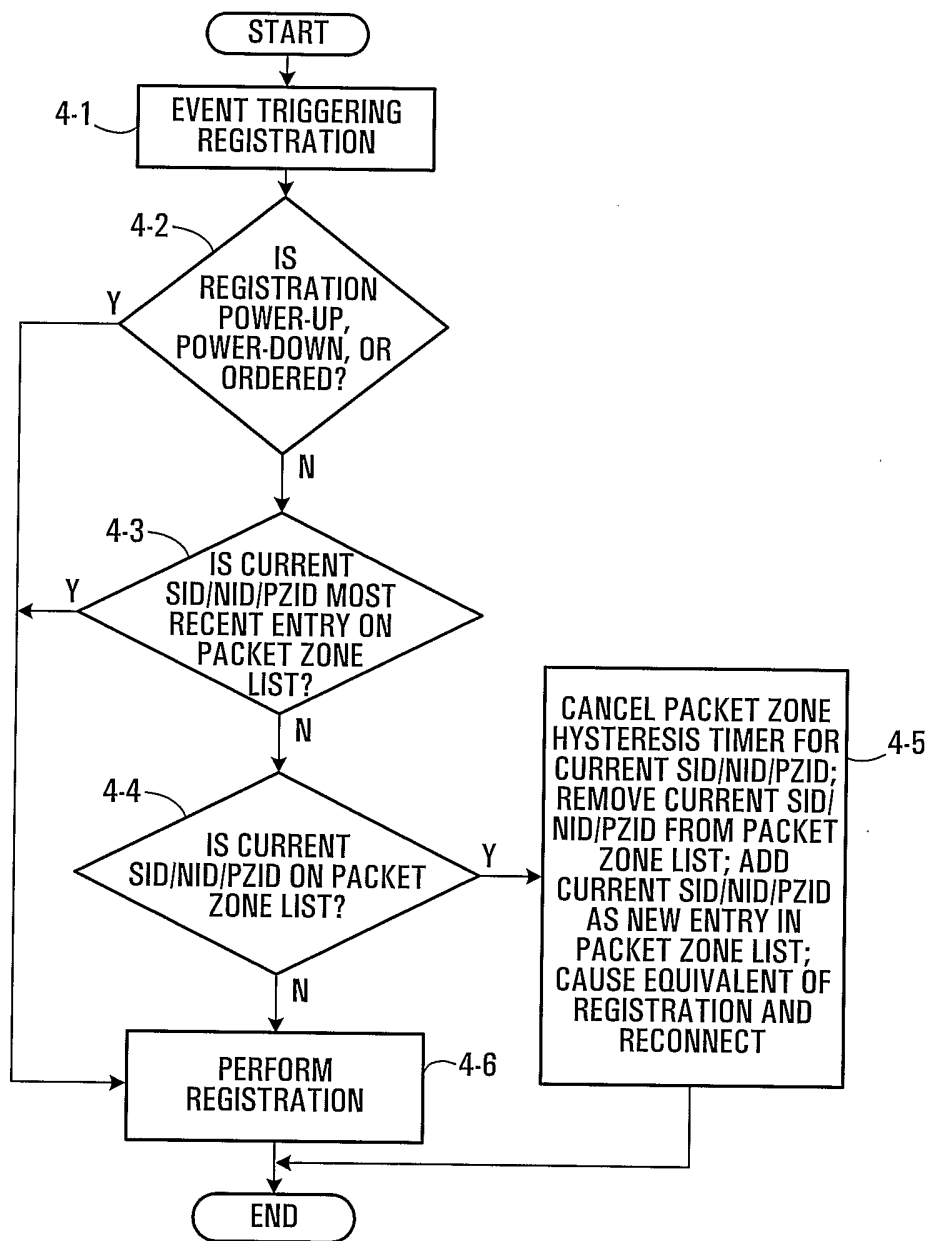



FIG. 2

3/7

**FIG. 3**

4/7

**FIG. 4**

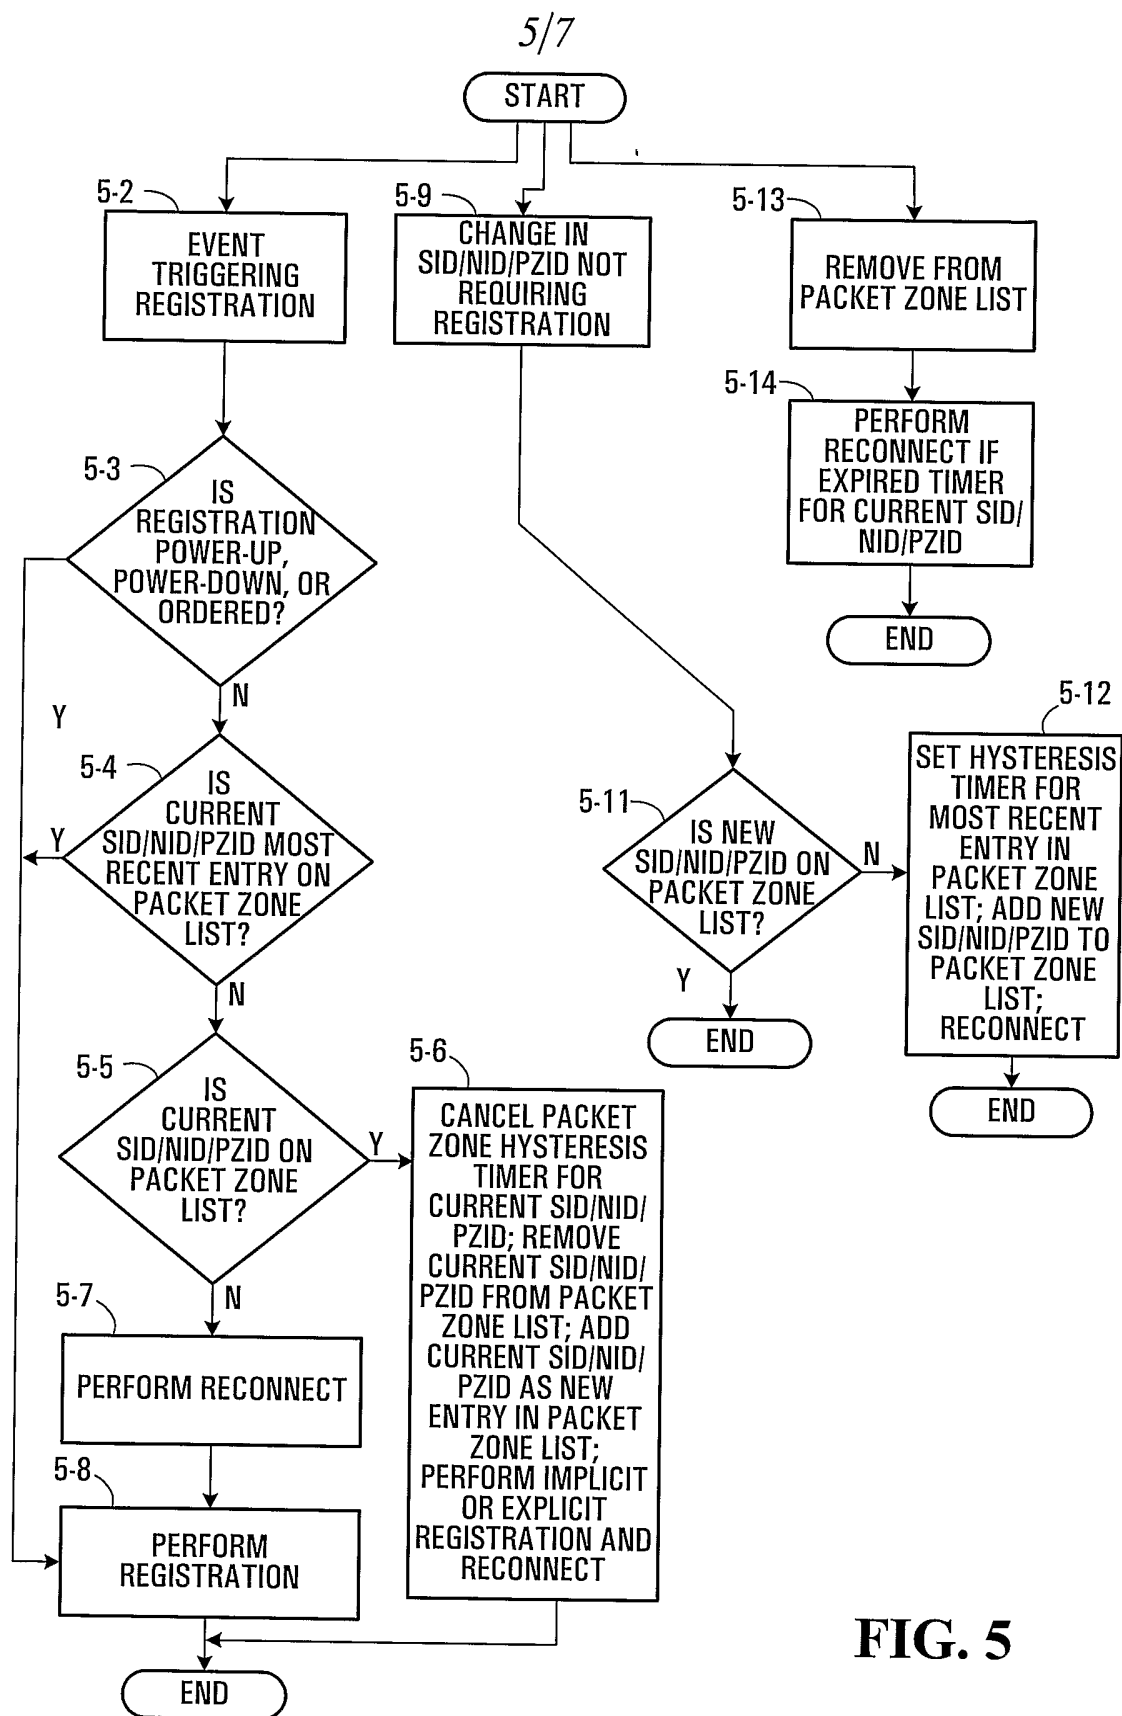

6/7

PACKET ZONE LIST	
SID/NID/PZID	T_1 $\vdots$ T_N
SID/NID/PZID	
$\vdots$	
SID/NID/PZID	

FIG. 6

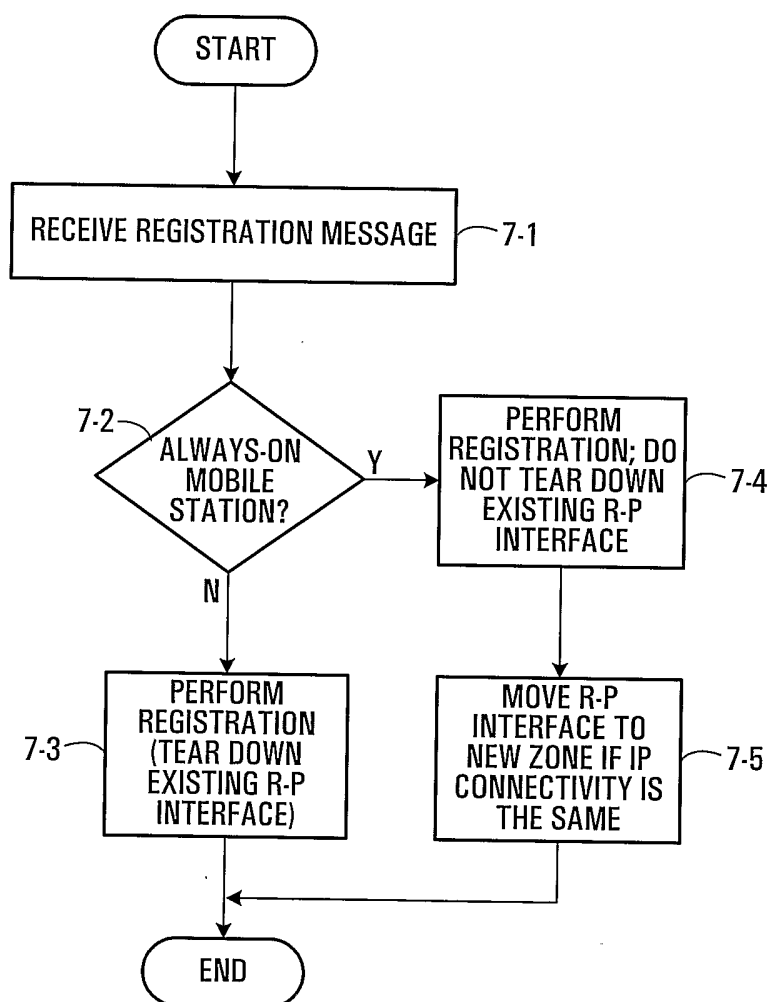
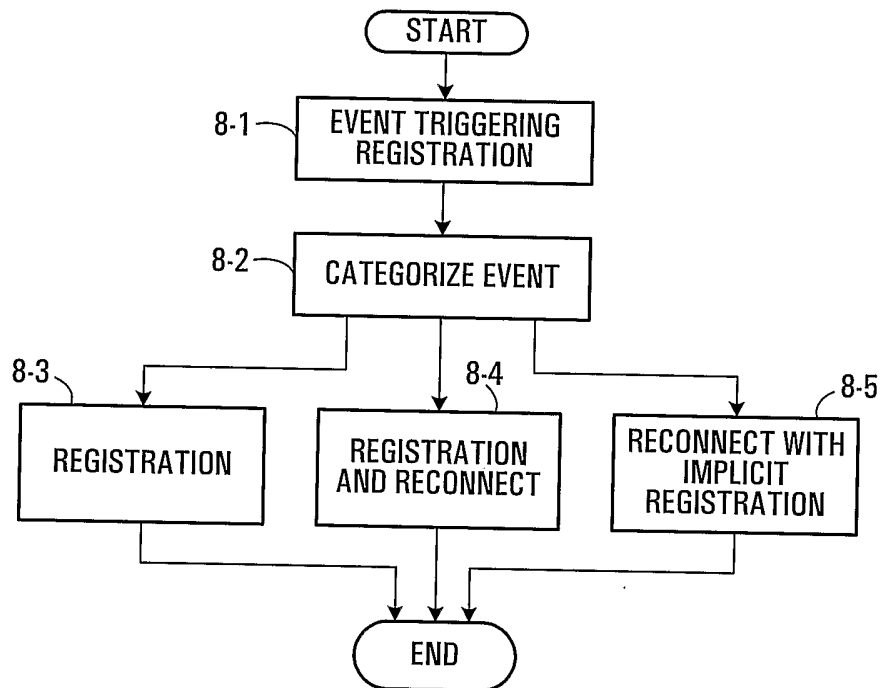


FIG. 7

7/7

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2006/000209

A. CLASSIFICATION OF SUBJECT MATTER IPC: H04Q 7/38 (2006.01) , H04Q 7/32 (2006.01) , H04L 12/56 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC																	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC H04Q 7/38 (2006.01), H04Q 7/32 (2006.01), H04L 12/56 (2006.01). Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Database: Questel-Orbit QWEB; Delphion full text search; USPTO; Canadian Patent Database; IEEE. Keywords: registration/reconnect/packet zone; always on/always connected.																	
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>US 2002/0141361 (MADOUR et al.) 3 October 2003 (03.10.2002) abstract; paragraphs [0007] to [0011], [0018] to [0022]</td> <td>1-4, 15, 17</td> </tr> <tr> <td>Y</td> <td>abstract; paragraphs [0007] to [0011], [0018] to [0022]</td> <td>5-17, 20-23</td> </tr> <tr> <td>Y</td> <td>WO 2004/084494 A1 (ABROL et al.) 30 September 2004 (30.09.2004) abstract; paragraphs [1046] to [1048]; figure 6; claims 21 and 22</td> <td>5-17, 20-23</td> </tr> <tr> <td>X</td> <td>US 2004/0266450 A1 (CHOWDHURY) 30 December 2004 (30.12.2004) abstract; paragraphs [0008] to [0038]</td> <td>18, 19</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2002/0141361 (MADOUR et al.) 3 October 2003 (03.10.2002) abstract; paragraphs [0007] to [0011], [0018] to [0022]	1-4, 15, 17	Y	abstract; paragraphs [0007] to [0011], [0018] to [0022]	5-17, 20-23	Y	WO 2004/084494 A1 (ABROL et al.) 30 September 2004 (30.09.2004) abstract; paragraphs [1046] to [1048]; figure 6; claims 21 and 22	5-17, 20-23	X	US 2004/0266450 A1 (CHOWDHURY) 30 December 2004 (30.12.2004) abstract; paragraphs [0008] to [0038]	18, 19
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
X	US 2002/0141361 (MADOUR et al.) 3 October 2003 (03.10.2002) abstract; paragraphs [0007] to [0011], [0018] to [0022]	1-4, 15, 17															
Y	abstract; paragraphs [0007] to [0011], [0018] to [0022]	5-17, 20-23															
Y	WO 2004/084494 A1 (ABROL et al.) 30 September 2004 (30.09.2004) abstract; paragraphs [1046] to [1048]; figure 6; claims 21 and 22	5-17, 20-23															
X	US 2004/0266450 A1 (CHOWDHURY) 30 December 2004 (30.12.2004) abstract; paragraphs [0008] to [0038]	18, 19															
[X] Further documents are listed in the continuation of Box C. [X] See patent family annex. <table border="1"> <tbody> <tr> <td>* Special categories of cited documents :</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </tbody> </table>			* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed				
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family																
"O" document referring to an oral disclosure, use, exhibition or other means																	
"P" document published prior to the international filing date but later than the priority date claimed																	
Date of the actual completion of the international search 25 April 2006 (26-04-2006)		Date of mailing of the international search report 11 May 2006 (11-05-2006)															
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001(819)953-2476		Authorized officer Xiaoyun Hu (819) 934-7569															

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2006/000209

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons :

1. ☐ Claim Nos. :
because they relate to subject matter not required to be searched by this Authority, namely :
2. ☐ Claim Nos. :
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically :
3. ☐ Claim Nos. :
because they are dependant claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows :

Group A: Claims 1-17 and 20-23

Methods, mobile stations and networks for performing a packet data reconnect after the occurrence of an event triggering registration.

Group B: Claims 18-19

Method for maintaining a packet data interface for an always-on mobile station.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos. :
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos. :

Remark on Protest ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2006/000209

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/0071112 A1 (HSU et al.) 15 April 2004 (15.04.2004) entire document	1-17, 20-23
A	WO 2004/064292 A2 (CHENG et al.) 29 July 2004 (29.07.2004) entire document	6-17, 20-23
A	US 2004/0258022 A1 (JULKA et al.) 23 December 2004 (23.12.2004) entire document	1-17, 20-23
P,A	US 2005/0169249 A1 (SHIROTA et al.) 4 August 2005 (4.08.2005) paragraphs [0040] to [0045].	18, 19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/CA2006/000209

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2002141361		CA2346597 A1 MXPA01004669 A US6907016 B2	03-10-2002 10-09-2004 14-06-2005
WO2004084494	30-09-2004	US2004184436 A1	23-09-2004
US2004266450	30-12-2004	NONE	
US2004071112	15-04-2004	AU2003284104 A1 BR0315174 A CA2499410 A1 CN1703926 A EP1550339 A1 JP2006502674T T MXPA05003788 A RU2005114360 A US2005094601 A1 WO2004034728 A1	04-05-2004 23-08-2005 22-04-2004 30-11-2005 06-07-2005 19-01-2006 08-06-2005 10-10-2005 05-05-2005 22-04-2004
WO2004064292	29-07-2004	AU2004204902 A1 BR0405235 A CA2488989 A1 CN1698388 A EP1535480 A2 MXPA05000124 A RU2005101758 A US6934272 B2	29-07-2004 04-10-2005 29-09-2004 16-11-2005 01-06-2005 08-04-2005 27-06-2005 23-08-2005
US2004258022	23-12-2004	WO2005002273 A1	06-01-2005
US2005169249	04-08-2005	WO2005043860 A1	12-05-2005