United States Patent [19]

Bianchetta et al.

[11] **3,906,840**

[45] **Sept. 23, 1975**

[54] **HYDRAULIC CONTROL SYSTEM FOR LOAD SUPPORTING HYDRAULIC MOTORS**

[75] Inventors: **Donald L. Bianchetta**, Coal City; **Kenneth R. Lohbauer**, Joliet; **Sammy J. Rhodes**, Aurora, all of Ill.

[73] Assignee: **Caterpillar Tractor Company**, Peoria, Ill.

[22] Filed: **Jan. 28, 1974**

[21] Appl. No.: **437,383**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 244,822, April 17, 1972, Pat. No. 3,805,678.

[52] **U.S. Cl.** **91/445**; 91/447; 91/453; 91/461; 137/596.2

[51] **Int. Cl.²** **F15B 11/08**; F15B 13/042

[58] **Field of Search** 91/445, 447, 461, 304; 137/596.2

[56] **References Cited**

UNITED STATES PATENTS

3,049,101	8/1962	Ruhl	91/447 X
3,068,596	12/1962	Hein et al.	91/445 X
3,127,688	4/1964	Hein et al.	91/445 X
3,557,829	1/1971	Finley	91/461 X
3,768,518	10/1973	Roth et al.	251/325 X

Primary Examiner—Irwin C. Cohen
Attorney, Agent, or Firm—Phillips, Moore, Weissenberger Lempio & Strabala

[57] **ABSTRACT**

A load supporting hydraulic system having a pilot operated main control valve is provided with pilot controlled load check valve operative to permit free flow of fluid from said control valve toward the load supporting means of the system in response to pilot pressure and to block fluid flow from the load supporting means toward the control valve. The system includes vent valve means operative with the main control valve to permit the load check valve to be opened by fluid pressure in the load supporting means to allow fluid flow therefrom to the reservoir.

5 Claims, 4 Drawing Figures

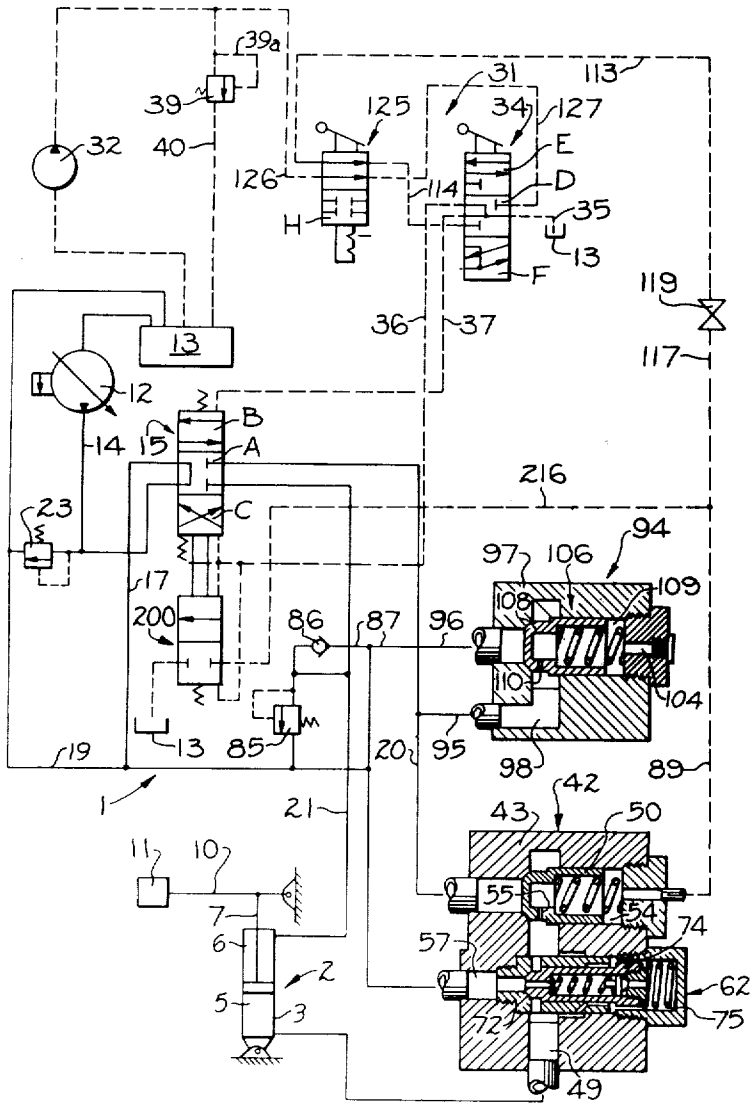


Fig. 1

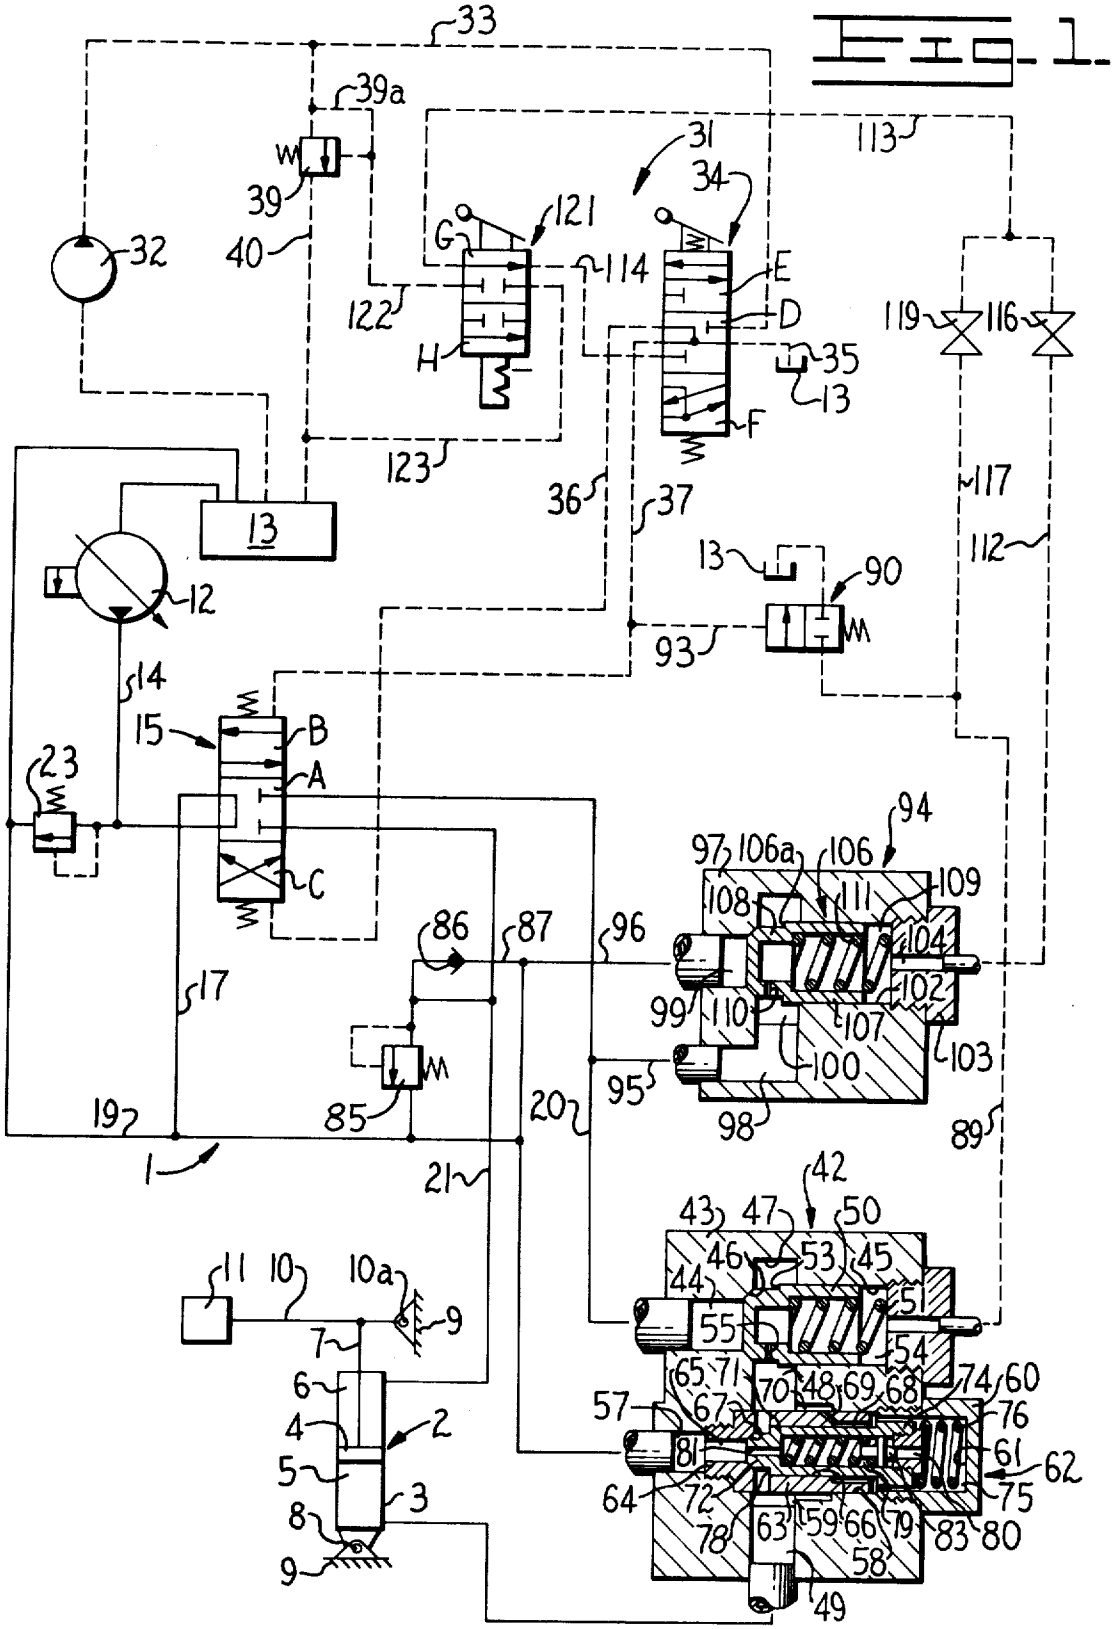

33
39a
39
40
32
31
34
121
G
H
122
114
E
D
F
35
13
113
119
116
123
36
37
117
112
13
90
93
12
14
15
B
A
C
23
94
97
106a
106
108
111
109
104
102
107
103
100
99
110
98
95
86
87
96
85
17
19
20
89
1
21
42
43
47
50
46
53
45
44
51
55
54
65
71
70
48
69
68
74
60
57
67
76
81
61
62
64
72
75
78
63
59
66
79
83
80
58
49
11
10
10a
9
7
6
4
5
8
2
3

Fig. 2

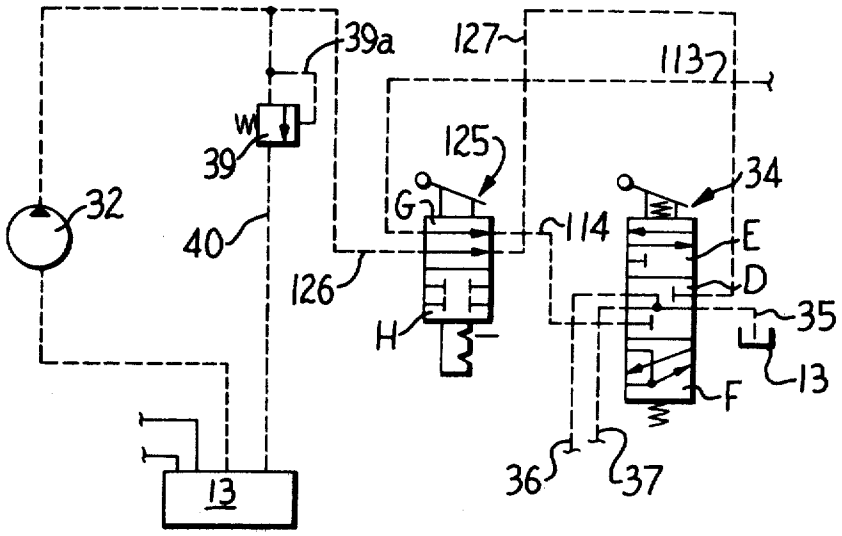


Fig. 3

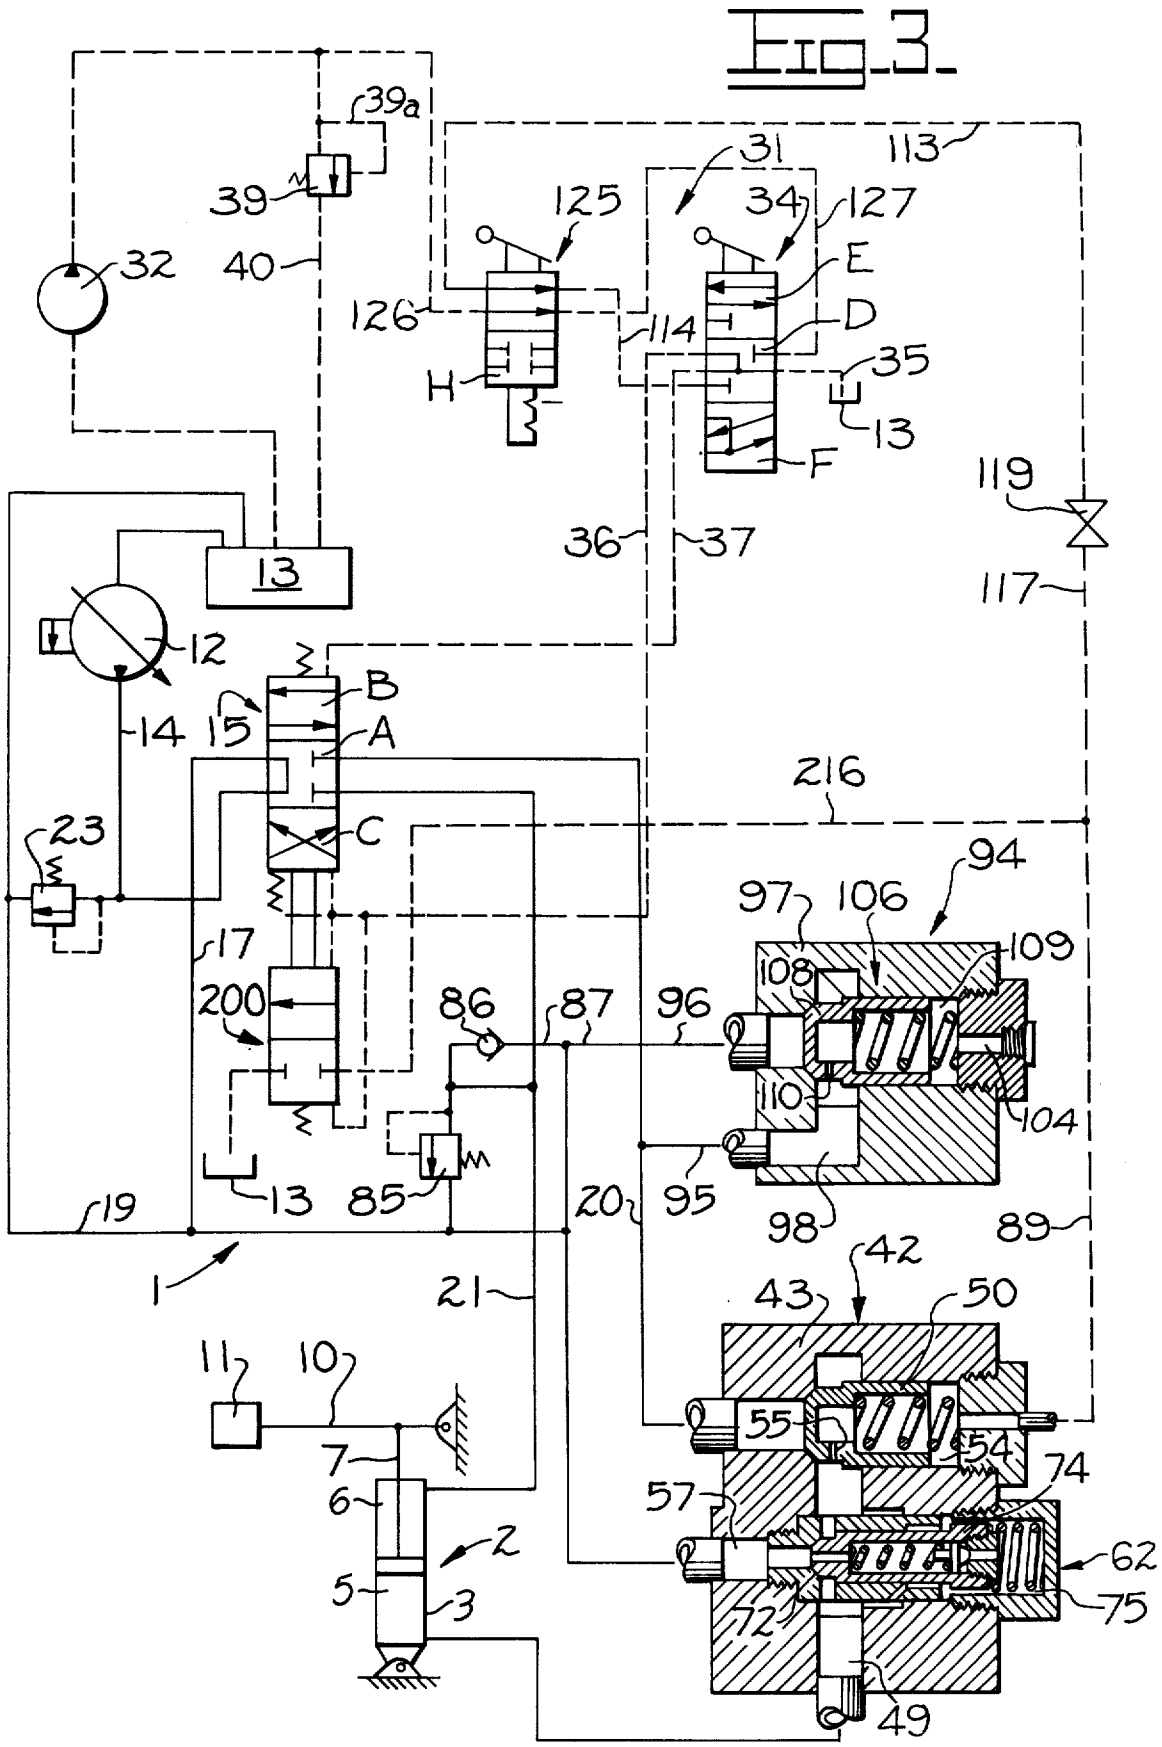
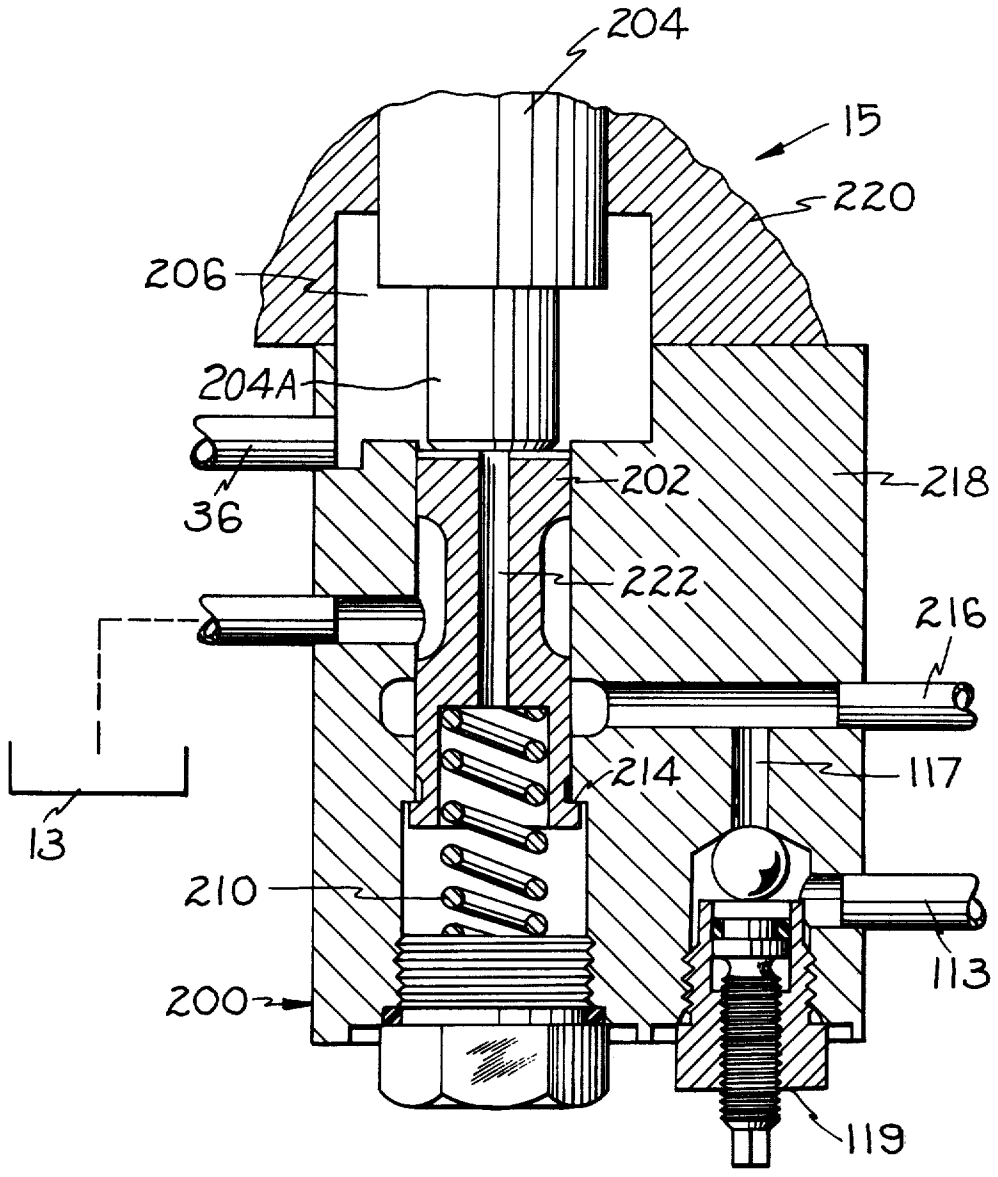

39a
39
32
40
125
31
34
127
113
126
114
E
D
H
35
13
F
119
36
37
117
13
12
B
14
15
A
216
23
C
94
97
106
109
17
108
200
86
87
96
110
104
13
85
20
95
98
89
19
1
42
21
43
50
11
10
55
54
74
7
57
6
62
2
5
3
72
75
49

Fig 4



HYDRAULIC CONTROL SYSTEM FOR LOAD SUPPORTING HYDRAULIC MOTORS

REFERENCE TO RELATED APPLICATION

This application is a Continuation-in-Part of our co-pending application, Ser. No. 244,822 filed Apr. 17, 1972, entitled Hydraulic Control System for Load Supporting Hydraulic Motors, now U.S. Pat. No. 3,805,678, issued Apr. 23, 1974, of common assignment herewith.

BACKGROUND OF THE INVENTION

Hydraulic and other similar fluid control circuits are commonly used in applications wherein a fluid motor is utilized for substantially vertical elevational adjustment of relatively large loads and is at times required to support the load in an elevated position. This type of application results in several problems with respect to the desired function under all conditions as well as safety to the equipment, operator, and service personnel.

For example, most such systems use a sliding spool directional control valve in which the spool must have a radial operating clearance with a bore in the valve body to permit relatively free movement of the spool. When the motor is required to support the load in an elevated position, the annular clearance between the spool and the valve bore provides a leakage path which can result in downward drifting of the load. One solution to this leakage problem is to interpose a poppet type load check valve between the load supporting end of the fluid motor and the control valve to isolate the load supporting pressure from the control valve as disclosed in U.S. Pat. No. 3,127,688 to Hein, et al. When it is desired to lower the load, it is necessary to permit the load check valve to open so that fluid may be displaced from the load supporting end of the motor. This is accomplished in Hein, et al by venting the load check valve across the directional control valve spool when the control spool is actuated to a load lowering position. This has the disadvantages of increasing the overall length of a rather large, expensive control valve and further requires precise machining therein to provide the proper timing relationship of the vent ports in the valve body to the vent grooves in the control spool to insure that the load check is vented only when it is desired to lower the load.

It is also necessary to permit opening of the load check valve when it is necessary to lower the load in the absence of fluid pressure in the system due to a stalled engine or a failure in the control circuit. Although the Hein, et al system has this capability with a manually actuated control spool as depicted therein, such system would not be operative in a control system utilizing a pilot actuated control spool. In pilot actuated control systems, when pilot pressure fails it is necessary to bypass the main control spool for returning fluid from the load supporting end of the motor to the reservoir, since pilot pressure will not be available for shifting the control spool to the load lowering position.

Another serious problem attendant to pilot actuated systems, when pressure is available in the pilot control circuit, is inadvertent actuation of the pilot valve to an operative position, which can result in unwanted movement of the load. Such inadvertent actuation of the control system could result in damage to the mechanism being actuated by the fluid motor or serious injury to any persons in the area of the equipment.

SUMMARY OF THE INVENTION

Accordingly, it is an object of this invention to provide control system for load supporting fluid motors that overcomes the above problems of the prior art.

Another object of this invention is to provide an improved fluid control system for load supporting fluid motors having positive leakage control and yet provide safe functional control of the load under both operative and inoperative conditions.

Another object of this invention is to provide an improved fluid control system for load supporting fluid motors so as to achieve the desired operational characteristics in both operative and inoperative conditions of the circuit in a manner which is safe for the vehicle and personnel in the immediate area with a minimum of expense and without undue complication of the main control valve.

Other objects and advantages of the present invention will become more readily apparent upon reference to the accompanying drawings and following description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a fluid control circuit embodying the principles of the present invention with certain valves depicted in longitudinal cross-section.

FIG. 2 is a schematic of a modified pilot circuit for the system of FIG. 1;

FIG. 3 is a schematic diagram of an alternate embodiment of the invention; and,

FIG. 4 is a detailed view in section of a valve of the circuit of FIG. 3.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, and more particularly to FIG. 1, there is schematically illustrated a fluid control system embodying the principles of the present invention, generally indicated by the reference numeral 1, operatively connected to control a load supporting fluid motor 2. The motor includes a cylinder 3 having a piston 4 reciprocally mounted therein to define a head end chamber 5 and a rod end chamber 6. A rod 7 has its inner end secured to the piston and extends outwardly of the cylinder. The head end of the motor is pivotally supported as indicated at 8 to a base or vehicle 9 with the outer end of the rod connected intermediate the ends of a load supporting arm 10. A load 11 which may be representative of an implement mounted on a vehicle is mounted at the outer end of the load supporting arm 10 which has its other end pivotally supported at 10a to the base or vehicle 9. The system of the present invention is particularly adapted for machines such as hydraulic loaders and excavators.

The control system includes a pump 12 which draws fluid from a reservoir 13 for supply through a line 14 to a pilot operated main control valve 15 which is selectively positionable between a neutral or hold position A and either one of two operative positions B and C. The control valve 15 communicates with the reservoir 13 by way of a line 17 and a main return line 19. The control valve further communicates with a load supporting or head end of the motor 2 by way of a line 20

and with an opposite or rod end of the motor by way of a line **21**. A relief valve **23** selectively controls communication between the pump output line **14** and return line **19** to limit the maximum pressure in the control system.

A pilot control system indicated generally at **31** for operation of valve **15** includes a pump **32** which draws fluid from reservoir **13** for supply through a line **33** to a pilot control valve indicated generally at **34**. The pilot control valve communicates with the reservoir by way of a line **35** and further communicates with the opposite ends of the main control valve by way of the pilot lines **36** and **37**.

The pilot control valve **34** has a neutral position designated D at which the pilot lines **36** and **37** are in communication with the reservoir and the pump output line **33** is blocked. The pilot valve **34** also has two operative positions designated E and F which are effective to alternately communicate the pump to one end of the valve **15** while communicating the opposite end of that valve with the reservoir for actuation of the main control valve to either of its operative positions B or C. A pressure responsive relief valve **39**, pilot operated by a control line **39***a*, controls communication between the pump output line **33** and the reservoir by way of a line **40** to limit the maximum pressure in the pilot system to a predetermined level.

When the load **11** is stopped in an elevated position such that it must be supported by the motor **2**, fluid pressure in the head end of the motor must be positively retained to avoid downward drift of the load due to leakage. Most control valves such as that schematically depicted at **15** are of the sliding spool type which necessarily include an annular clearance between the valve spool and the body to permit relatively free movement of the spool. This annular clearance permits leakage which is unacceptable in load supporting situations of this type, in that it permits downward drifting of the load as such leakage occurs.

In order to provide positive leakage control for the load supporting end of the motor, a load check valve indicated generally at **42** is disposed in line **20** intermediate the head end of the motor and the main control valve **15**. The load check valve includes a body **43** having a port **44** which communicates with a valve bore **45**. The port **44** terminates at its inner end with a chamfered seat **46**. An annular groove **47** is interposed the inner ends of the port **44** and the bore **45** for communication therewith and communicates through a passage **48** with a port **49**. The port **44** is in communication with the main control valve **15**, whereas port **49** communicates directly to the load supporting end of the motor **2**.

The load check valve **42** comprises a valve member **50** disposed in the valve bore **45** and is resiliently biased by a spring **51** toward the port **44** for a sealing seated engagement with the seat **46**. When the check valve is seated as illustrated, it blocks communication between the ports **44** and **49** to isolate the load supporting pressure in the motor from the control valve to prevent leakage from the motor therethrough. The check valve **50** further includes a stepped outer diameter providing a sholder **53** which is exposed to the load supporting pressure in the annular groove **47**. The load supporting pressure acting on the shoulder generates a valve opening force opposing the bias of the spring **51** and urges the check valve away from the chamfered seat. Restricted communication between the annular groove **47** and the valve bore **45** behind the check valve which portion constitutes a control chamber **54**, is provided by an orifice **55** in the check valve. The orifice is in constant registry or communication with the annular groove **47**. This permits the load supporting pressure in the head end of the motor to assist spring **51** in urging the check valve toward a closed position since the area of the check valve exposed to the pressure in chamber **54** is greater than that of the shoulder **53**. When the pressure is relieved from chamber **54**, the higher pressure acting on shoulder **53** overcomes the sping pressure, forcing valve element away from its seat **46**, as will be explained below.

The valve body **43** further includes a return port **57** and a valve bore **58** disposed in coaxial relation to the return port. An annular groove **59** is formed in the body in encircling relation to the valve bore and is further disposed in communicating relation between the passage **47** and the port **49**. A threaded plug **60** threadably engages the outer end of the bore **58** and includes an inwardly facing recess **61**. Since the motor **2** is subject to external forces acting thereon which may result in excessive pressure in the head end of the motor, a relief valve indicated generally at **62** is disposed in the body **43** between the load check valve **50** and the load supporting end of the motor.

The relief valve **62** includes a cartridge **63** having an inner end **64** threadably secured to the body. The cartridge includes a passage **65** communicating between the return port **57** and a valve bore **66** with the intersection therebetween being defined by a conical seat **67**. The valve bore **66** terminates at the opposite end of the cartridge with a counterbore **68**, which is communicated by an orifice **69** with the annular groove **59** by way of an annular relief **70** in the bore **58**. A relief dump spool **71** is slidably mounted in bore **66** and includes a seating end **72** for selective sealing engagement with seat **67**.

An outer biasing end of the spool **71** forms, with the recess **61** in the plug, a control chamber **75**. A spring **76** is disposed in the control chamber in biasing relation to the biasing end **74** of the spool to urge the spool into sealing contact with the seat **67** normally to block communication between the return port and the annular groove **59**.

The seating end **72** of the spool **71** is of relatively smaller diameter than the body of the spool, thus forming a shoulder **78** exposed to fluid pressure in the annular groove **59**. The spool **71** further includes a central chamber **79** which communicates through a passage **80** with the control chamber **75**. The chamber **79** also communicates through a passage **81** with the return port **57** by way of the passage **65**. The passages **80** and **81** are relatively larger than the orifice **69** so that fluid flow therethrough will result in a differential pressure across the orifice. A spring biased poppet **83** is disposed in the chamber **79** and is urged into closing relation with the passage **80** normally to block communication between the chamber **75** and the return port.

A motor line relief valve **85** is substantially identical to the relief valve **62** and is disposed in pressure limiting relationship between the motor line **21** and the return line **19** to limit the maximum pressure in the rod end of the motor and the associated motor line. An anti-cavitation check valve **86** is disposed in a line **87** communicating between the return line and the motor

line to allow make up fluid flow to the motor line at any time the pressure in motor line is lower than the pressure in the return line.

When the main control valve **15** is actuated to position B to communicate fluid pressure to the rod end of motor **2**, it is necessary that the check valve **50** be opened to allow fluid displaced from the head end of the motor to return to the reservoir. For this purpose, a vent line **89** provides communication between the control chamber **54** and a normally closed vent valve indicated schematically at **90**. The valve **90** is normally biased to the position shown to block communication between the line **89** and the reservoir **13**. Pilot line **37** communicates with the valve **90** by way of a line **93** such that pressure in the pilot line is effective to urge the valve toward an open position. This communicates the vent line and the control chamber to the reservoir.

An anti-cavitation valve **94** is disposed in fluid communication controlling relation between the motor line **20** and the return line **19**. A line **95** communicates between the valve **94** and the motor line **20** with a line **96** communicating between the anti-cavitation valve and the return line. The anti-cavitation valve includes a body **97** with means defining an outlet port **98** and an inlet port **99** which are interconnected by an annular groove **100**. The valve body further defines a valve bore **102** coaxially aligned with port **99** and separated therefrom by the annular groove. The valve bore has an open outer end which is closed by a threaded plug **103** which includes a vent port **104**. A check valve member **106** is reciprocally disposed in the valve bore and includes a body portion **107** and a valving portion **108** of relatively smaller diameter which is adapted to seat in the end of an inlet port **99**. The check valve, plug **103**, and valve bore **102** cooperate to define a control chamber **109** opposite the valving portion **108**. An orifice **110** in the check valve provides restricted communication between the groove **100** and the control chamber. a spring **111** is disposed in the control chamber in biasing relation to the check valve to urge it into sealing engagement with the inner end of the inlet port to block communication between the inlet port and the outlet port.

Control chamber **109** is communicated through a line **112**, a line **113**, a line **114**, and return line **35** to reservoir **13**. In order to control communication between the control chamber and the reservoir, a manually actuated normally closed valve **116** is disposed in the line **112** and may be selectively opened to vent the control chamber to the reservoir. In like manner, the line **89** communicating with control chamber **54** of valve **42** is communicable with the reservoir **13** by way of a line **117** and lines **113**, **114** and **35**. A manually controlled normally closed valve **119** is disposed in the line **117** for selectively controlling communication between control chamber **54** and the reservoir.

Means to prevent inadvertent actuation of the control valve, such as when the operator is mounting or dismounting the vehicle, is desirable since this unwanted movement could result in damage to the load or implement or injury to personnel in the area. For this purpose, a manually actuated safety valve **121** is disposed in fluid controlling relation between a line **122** communicating with the pilot control line **39***a* and a line **123** communicating with the reservoir. When the pilot system is operative, the safety valve is detented to a closed position G, as shown, to block communication between the lines **122** and **123** so as to render pilot relief valve **39** functional to maintain pressure in the pilot system.

When it is desired to disable the pilot system, such as when the operator is dismounting the machine, the safety valve is actuated to a position H. This is effective to establish communication between the lines **122** and **123** to vent the relief valve and permit it to open at a relatively low pressure and direct the output of pump **32** to the reservoir by way of the line **40**. The pressure required to open the relief valve under these conditions is not sufficient to actuate the valve element of main control valve **15** and the pilot system is rendered inoperative. Inadvertent operation of the motor **2** and resultant movement of load **11** is thus prevented.

Since the manually controlled valves **116** and **119** would normally be located remote from the operator station, it is desirable to provide additional control for venting of the control chambers **54** and **109**. For this purpose, line **113** communicates with safety valve **121** such that the safety valve controls communication between the lines **113** and **114**. When the safety valve **121** is in the position shown, the line **113** is communicated to the line **114** whereas movement of the safety valve to position H blocks communication between the lines. Line **114** is further connected to pilot valve **34** and is blocked from communication with return line **35** and the reservoir when the pilot valve is in the netural D position shown.

Referring now to FIG. **2**, there is illustrated an alternate embodiment of a pilot system for the system of the present invention. The pilot system of FIG. **2** differs from that of FIG. **1** in that the safety valve is operative to cut off entirely the supply of fluid to the pilot system. The pilot system of FIG. **1**, on the other hand, is operative to vent the pilot fluid to tank and thereby reduce the pilot pressure to an inoperative level. In either case, the safety valve functions to render the pilot system inoperative.

Identical elements in the FIG. **2** embodiment are identified by the same reference numerals, as in the previous embodiment. A comparison of the embodiments of FIG. **1** and FIG. **2** will disclose that the pilot supply line **33** (FIG. **1**) is now controlled by new safety valve **125** (FIG. **2**) and becomes new supply lines **126** and **127**. The safety valve **125** operates in the G position to provide communication of pilot fluid by way of lines **126** and **127** to the pilot control valve **34**. Communication is also established between lines **113** and **114** in this position (G) as in the previous embodiment.

When the safety valve **125** is positioned in the H position, communication between lines **126** and **127** is blocked so that the supply of pilot fluid to the pilot system is entirely cut off. This renders the pilot system inoperative so that inadvertent movement of valve **34** will not result in movement of the load supporting implement. When the system is in this condition, pilot fluid is returned by way of relief valve **39** to sump **13**. In all other respects the entire system remains the same.

OPERATION

While the operation of the present invention is believed apparent from the foregoing description, further amplification will be made in the following summary. With respect to the FIG. **1** embodiment, with the vehicle engine running, such that fluid pressure is available in pilot circuit **31** and motor control circuit **1**, the oper-

ator mounts the vehicle and shifts the safety valve **121** to the position shown. This blocks communication between lines **122** and **123** such that the relief valve **39** is functional to establish pilot pressure in the supply line **33** to make the pilot system operational.

When the operator desires to adjust the elevational position of load **11** upward, he shifts pilot valve **34** to its operative position E to communicate pilot supply line **33** to the lower end of control valve **15** by way of pilot line **36.** This moves the control valve to position C to communicate the pump **12** with the head end of the motor **2** by way of the motor line **20** and the load check valve **50.** As the motor is extended, the fluid displaced from the rod end **6** is returned to the reservoir by way of the motor line **21,** control valve **15,** line **17** and the return line **19.**

Lowering of the load by retraction of the motor is accomplished by moving the pilot valve to its position F for communicating the output of the pilot pump **32** through the pilot line **37** to the upper end of the valve **15** as viewed in the drawing. This moves the main control valve to its B position to communicate the output of pump **12** with the rod end of the motor to lower the load **11.** Since the load check valve element **50** normally blocks flow from the head end of the motor toward the main control valve, it is necessary to permit that check valve to open so that fluid displaced from the head end of the motor may return to the reservoir. For this purpose, the pilot pressure in pilot line **37** is communicated through line **93** to shift the valve **90** to establish communication between the control chamber **54** by way of vent line **89** and the reservoir **13.** Since fluid is permitted to flow out of the control chamber **54** at a faster rate than the fluid entering the control chamber by way of the orifice **55,** a pressure differential is generated across the orifice. The higher pressure in the annular groove **47** acts on the shoulder **53** of the check valve to urge it toward an open position in opposition to the bias of the spring **51.** This establishes communication between the head end of the motor and the port **44** such that fluid displaced from the motor may return to the reservoir by way of the motor line **20** and the return lines **17** and **19.**

Should stalling of the vehicle engine or other failure in the control circuits result in the loss of pressure for actuating the motor with the load in an elevated position, it is desirable to lower the load to the ground to permit servicing of the system. Under these conditions, the operator moves the safety valve **121** to position H to vent the pilot system and block communication between lines **113** and **114** as previously described. The operator will then manually open valves **116** and **119** to establish communication between the line **113** and the lines **112** and **117** respectively. The safety valve is then returned to the position shown to establish communication between the line **113** and the line **114.**

After the above conditioning has been accomplished, the operator may now control lowering of the load with the pilot control valve **34.** This is accomplished by moving the pilot valve to position F which communicates the line **114** with the reservoir by way of the line **35.** This permits flow out of the control chambers **54** and **109** so as to generate a pressure differential across the orifices **55** and **110.** With the control chamber **54** vented, the load supporting pressure in annular groove **47** acts on the shoulder **53** to urge the valve **50** toward an open position. This communicates the load supporting pressure to the motor line **20,** the line **95,** the port **98,** and the annular groove **100.** This pressure in the annular groove acts on the shoulder **106a** to urge the check valve **106** toward an open position to communicate the load supporting end of the motor with the port **99** and hence to the return line **19** by way of line **96.**

This permits the load **11** to move downward by displacing fluid from the head end of the motor through the flow path just described. Since the motor is contracting, the rod end chamber **15** will be expanding and the displaced fluid returning toward the reservoir through the line **96** is available through the line **87** and the anti-cavitation valve **86** to fill the rod end of the jack and thus avoid cavitation. Once the load **11** is safely lowered, the manually controlled valve **116** and **119** may be moved to the closed position to restore the circuit for normal operation once the failure has been repaired.

When the operator is required to dismount the vehicle with the engine running, he moves safety valve **121** to position H. This establishes communication between the line **122** and the line **123** to vent the control line **39*a*** for the relief valve **39.** The relief valve may now open at a relatively low pressure to return the output of pump **32** to reservoir **13** by way of line **40.** Under these conditions, should the pilot valve **34** be inadvertently moved to one of its operative positions, the pressure in the pilot system will not be sufficient to actuate the main control valve **15.** This prevents inadvertent movement of the motor and the load **11** to avoid damage to the equipment or injury to personnel. When the operator mounts the vehicle, he returns the safety valve to the position shown to again render the pilot system operative by blocking communication between the lines **122** and **123.**

ALTERNATE EMBODIMENT

An alternate embodiment is illustrated in FIG. **3** wherein identical elements are identified with the same reference numerals as in previous embodiments. As shown in FIG. **3** the function of boom vent valve **90** of FIG. **1,** is replaced in the circuit by boom vent valve **200,** shown in detail in FIG. **4.** Vent valve **200** is affixed via suitable fastening means to control valve body **220** of control valve **15** to provide mechanical actuation of spool **202** by main control valve stem **204.** The stem **204** includes an extension **204a** for engaging and actuating vent valve spool **202.** Pilot pressure conduit **36** is attached to vent valve body **218** and communicates fluid with one end of valve stem **204** and both ends of vent valve spool **202.** The main control valve stem **204** and vent valve spool **202** adjacent ends are exposed to a common pilot cavity **206.** The biased end of vent valve spool **202** receives pilot pressure from an axially drilled hole **222** in spool **202** which communicates with cavity **206** via suitable means such as radial slots as indicated to balance the spool.

Spring **210** positions vent valve spool in body **218** and maintains physical spool contact with either main valve stem **204** or stop **214,** whichever occurs first. Pilot conduit **216,** a branch of pilot conduit **89** physically connects load check valve **50** with vent valve **200.** With vent valve **200** in the open position, fluid in lines **89** and **216** is permitted to flow to tank **13.** Manual shut off valve **119** is contained in vent valve body **218** and blocks communication between conduit **216** and **113,** a pilot return line for safety valve **125.** Safety valve

125, a dual two position, two-way valve, is normally open via conduits 114 and 127 to pilot control valve 34, via conduit 126 with pump 32 and via conduit 113 with valve 119.

OPERATION OF ALTERNATE EMBODIMENT

To lower the load 11 on arm 10, which may be an excavator boom, the following conditions are established as viewed in FIG. 3. Pilot control valve 34 is manually moved to position F causing pilot pressure from pump 32 via conduit 126 through safety valve 125 and conduit 127 in line 37 to force stem 204 of valve 15 to open (position B) causing pressurized fluid from pump 12 to communicate with chamber 6 of cylinder 3 via conduits 14 and 21. The movement of stem 204 downward causes mechanical shifting of spool 202 downward, opening communication between conduits 89, 216 and tank 13. This permits the discharge fluid from chamber 5 of cylinder 3 to pass through check valve 42 and back to tank 13 via conduits 20 and 19. The drop in pressure caused by venting line 89 to tank 13 permits check valve 42 to open.

To raise the excavator boom the following conditions are established. Pilot control valve 34 is manually moved to position E. Pilot fluid from pump 32 passes through conduit 126, safety valve 125, and conduit 127. Pilot control valve 34 directs the flow through conduit 36 to control valve 15 and vent valve 200. This shifts spool 204 of control valve 15 to position C. In this condition vent valve 200 remains closed as spool 202 is held closed against stop 214 srping 210. Pilot pressure communicating with the spring biased end of spool 202 offsets the pressure in chamber 206 allowing the spring force to hold the spool 202 against the stop 214 causing trapped fluid in chamber 206 to move spool 204. Flow from pump 12 passed through control valve 15 and conduit 20 to load check valve 42 unseating spool 50 and allowing flow to pass to cylinder 3, chamber 5. Discharge flow from chamber 6 of cylinder 3 passes through conduit 21, control valve 15 and conduits 17 and 19 to tank 13. Anti-cavitation valve 94 further satisfies circuit requirements by allowing a portion of discharge fluid from chamber 6 to enter line 20. With vent port 104 plugged, anti-cavitation valve 94 now serves a single purpose of providing make-up fluid to chamber 3 in cylinder 6 when the discharge of fluid from chamber 6 is greater than the pump input to chamber 3. The pressure differential, caused by a vacuum created in chamber 3, between control chamber 109 and inlet port 99 allows spool 106 to unseat and discharge flow to pass through conduit 96, 95 and enter conduit 20.

To lower the boom when a condition of no pump pilot pressure exists such as, for example, a dead engine, the operator moves safety valve 125 to position H to block communication between conduits 126 and 127, and conduits 113 and 114. The operator will then manually open valve 119 to establish communication between conduit 113 and 117. The safety valve is then returned to the position shown to establish communication between conduits 126 and 127 and conduits 113 and 114.

After the above operations have been performed the operator may now control lowering of the load by moving pilot control valve 34 to position F which communicates line 114 with tank 13 via line 35. This permits flow from chamber 5 of cylinder 3 through port 49, orifice 55, chamber 54 and conduit 89 and to tank 13 via the flow path previously described. This permits the load 11 to move downward. Once the load 11 is safely lowered, manual valve 119 may be closed to restore the circuit to normal operation.

In view of the foregoing, it is readily apparent that the structure of the present invention provides an improved fluid control system for load supporting fluid motors having positive leakage control. This is accomplished while still retaining safe functional control of the load under both operative and inoperative conditions of the control circuit. This functional desiderata is further achieved with a minimum of cost and without undue complication of the relatively large main control valve.

While the invention has been described and shown with reference to particular embodiments, it will be apparent that variations might be possible that would fall within the scope of the present invention, which is not intended to be limited except as defined in the following claims.

What is claimed is:

1. A load supporting fluid system comprising:
load supporting means including a fluid motor for raising and supporting a load, said motor having a load supporting end including a fluid chamber;
a source of pressurized fluid for operating said motor;
means including a pilot operated directional control valve for selectively communicating pressurized fluid between said source and motor for raising, lowering and positioning said load supporting means;
said directional control valve comprising a housing, an elongated valve spool reciprocably mounted in a bore in said housing for communicating with inlet and outlet ports for defining raise, lower, and hold positions;
load check valve means disposed between said control valve and said motor for permitting free flow of fluid from said control valve to said motor and for normally blocking flow of fluid from said motor to said control valve;
said check valve means having a control chamber including restriction means communicating with said load supporting chamber, and said check valve means being responsive to fluid pressure in said load supporting chamber to bias said valve means to said fluid blocking position; and
vent valve means including a valve spool mounted in a bore coaxially with said directional control valve spool at one end thereof and engageable by abutment thereby upon shifting of said directional control valve spool to said lower position to vent said control chamber to effect opening of said check valve to permit flow of fluid from said load supporting chamber to effect lowering of said load supporting means, said vent valve means comprises a separate housing, means detachably securing said vent valve housing to said control valve housing, and said vent valve spool comprises a spring biased closed cylindrical spool having an annular groove for communicating between a first port in communication with said control chamber and a second port in communication with a sump.

2. The control system of claim 1 wherein said directional control valve spool includes an extension for engaging said vent valve spool.

3. The control system of claim 1 wherein:

said directional control valve spool is normally biased to a central position defining said hold position, moved away from said vent valve spool to said raise position, and is moved toward said vent valve spool to said lower position; and

said vent valve spool includes stop means preventing movement thereof with said control valve spool toward said raise position.

4. The control system of claim 3 wherein said vent valve means includes further valve means for bypassing said vent valve spool.

5. The control system of claim 4 including:

a pilot control valve for shifting said directional control valve and said vent valve spool;

said pilot control valve including vent passages; and

said further valve means is operative to commnicate said control chamber to said pilot control valve for venting said control chamber via said vent passages to a sump.

* * * * *