



HU000025685T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 025 685**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

- (21) Magyar ügyszám: **E 12 191334**
(22) A bejelentés napja: **2004. 11. 17.**
(96) Az európai bejelentés bejelentési száma:
EP 20040191334
(97) Az európai bejelentés közzétételi adatai:
EP 2578610 A1 **2013. 04. 10.**
(97) Az európai szabadalom megadásának meghirdetési adatai:
EP 2578610 B1 **2015. 03. 04.**

- (51) Int. Cl.: **C08G 8/24** (2006.01)
C08L 7/00 (2006.01)
C08L 61/06 (2006.01)
C08L 61/12 (2006.01)

(30) Elsőbbségi adatok: 523333 P 2003. 11. 20. US	(73) Jogosult(ak): SI Group, Inc., Schenectady, NY 12309 (US)
(72) Feltaláló(k): Howard, Scott, L., Ballston Spa, NY 12020 (US) Aube, Todd, M, Schenectady, NY 12305 (US) BANACH, Timothy, Edward, Scotia, NY 12302 (US) LAMB, James, J., Duanesburg, NY 12056 (US)	(74) Képviselő: Derzsi Katalin, SBGK Szabadalmi Ügyvivői Iroda, Budapest

- (54) **Novolak gyanták, és az azt tartalmazó gumi kompozíciók**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 578 610 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
04.03.2015 Bulletin 2015/10

(51) Int Cl.:
C08G 8/24 ^(2006.01) **C08L 7/00** ^(2006.01)
C08L 61/06 ^(2006.01) **C08L 61/12** ^(2006.01)

(21) Application number: **12191334.7**

(22) Date of filing: **17.11.2004**

(54) **Novolak resins and rubber compositions comprising the same**

Novolakharze und diese enthaltende Kautschukzusammensetzungen

Resines novolaques et compositions de caoutchouc les contenant

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **20.11.2003 US 523333 P**

(43) Date of publication of application:
10.04.2013 Bulletin 2013/15

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
04811267.6 / 1 699 838

(73) Proprietor: **SI Group, Inc.**
Schenectady, NY 12309 (US)

(72) Inventors:
• **Howard, Scott, L.**
Ballston Spa, NY 12020 (US)
• **Aube, Todd, M**
Schenectady, NY 12305 (US)

• **Banach, Timothy, Edward**
Scotia, NY 12302 (US)
• **Lamb, James, J.**
Duanesburg, NY 12056 (US)

(74) Representative: **Goddard, Christopher Robert**
Dehns
St Bride's House
10 Salisbury Square
London
EC4Y 8JD (GB)

(56) References cited:
DE-A1- 4 016 827

• **LARSEN BORVE K ET AL: "Preparation of high
viscosity thermoplastic phenol formaldehyde
polymers for application in reactive extrusion",
POLYMER, ELSEVIER SCIENCE PUBLISHERS
B.V, GB, vol. 39, no. 26, December 1998 (1998-12),
pages 6921-6927, XP004138383, ISSN: 0032-3861**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 578 610 B1

Description

[0001] The present invention relates to novolak resins prepared with, *inter alia*, one or more alkylphenols. The invention further relates to compositions comprising the novolak resins, such as rubber compositions, and to products obtained therewith. Also, the present invention relates to a process for preparing a rubber composition.

BACKGROUND OF THE INVENTION

[0002] Resorcinol and resorcinol-formaldehyde resins have been used in the rubber industry in rubber compositions and adhesives. However, one of the problems associated with resorcinol and conventional resorcinol-formaldehyde based resins is the high fuming of these resins during rubber compounding. Accordingly, the art has seen several attempts to address this problem. See, e.g., U.S. Patent Nos. 5,936,056 and 5,945,500. However, the need remains for a resin that has acceptable or no fuming levels yet still satisfactorily offers advantages that are provided by the conventional (fuming) resins.

[0003] Resorcinol resins and/or rubber compositions are mentioned in U.S. Patent Nos. 4,031,288; 4,167,540; 4,889,891; 5,030,692; 5,206,289; 5,238,991; 5,922,797; 5,936,056; 5,945,500; 6,448,318; and 6,472,457.

SUMMARY OF THE INVENTION

[0004] The present invention provides novolak resins comprising phenolic monomers, wherein 1-40 wt% of phenolic monomers are alkylphenols having a C₈-C₆₀ alkyl group wherein one or more of the alkyl groups in the alkylphenols is a C₂₀-C₃₀ alkyl group.

[0005] The present invention provides novolak resins as claimed in claim 1 which may be prepared by reacting:

- (a) 1-30 wt% of one or more alkylphenols;
- (b) 1-25 wt% of resorcinol;
- (c) 45-98 wt% of phenol; and
- (d) one or more aldehydes;

wherein said wt% are relative to the total weight of components (a), (b), and (e).

[0006] Also, the present invention provides rubber compositions as claimed in claim 11 comprising the present novolak resins.

[0007] The claimed rubber compositions may be prepared by a process which includes:

- (a) mixing one or more oils and one or more novolak resins to provide a novolak-oil composition; and
- (b) mixing the novolak-oil composition with one or more rubber compounds.

[0008] Additional aspects, advantages and features of the present invention are set forth in this specification.

DETAILED DESCRIPTION

[0009] The present invention provides novolak resins comprising, relative to the total weight of phenolic monomers, 1-40 wt% of alkylphenols, e.g. 1-30 wt%, 1-20 wt%, or 5-20 wt%.

[0010] The claimed novolak resins may be prepared by reacting:

- (a) 1-30 wt% of one or more alkylphenols (e.g. 1-25 wt%, 1-20 wt%, 5-20 wt%, or 5-15 25 wt%);
- (b) 1-25 wt% of resorcinol (e.g. 1-20 wt%, 5-20 wt%, or 5-15 wt%);
- (c) 45-98 wt% of phenol (e.g. 50-90 wt%, 60-90 wt%, 65-90 wt%, or 70-85 wt%); and
- (d) one or more aldehydes;

wherein said wt% are relative to the total weight of components (a), (b), and (c).

[0011] Alkylphenols are phenols having one or more alkyl group. Alkylphenols may have alkyl groups in the ortho, meta, and/or para positions of the phenol. In one embodiment, the alkylphenols include those having one alkyl group ("mono-alkylphenols"). In another embodiment, the alkylphenols include those having two alkyl groups ("di-alkylphenols").

[0012] In one embodiment, the alkyl groups of the alkylphenols have at least, 20, or at least 24 carbon atoms. The alkyl groups will comprise less than 30, or 28 or less carbon atoms.

[0013] Examples of the one or more aldehydes include formaldehyde, methylformcel, butylformcel, acetaldehyde, propionaldehyde, butyraldehyde, crotonaldehyde, benzaldehyde, and fural. In one embodiment, the one or more alde-

hydes include formaldehyde.

[0014] The claimed novolak resins may be prepared in any suitable manner. For instance, in one embodiment, non-resorcinol phenols are reacted first with one or more aldehydes in the presence of a catalyst (e.g. an acid catalyst, for instance a sulfonic acid catalyst such as p-toluene sulfonic acid or dodecylbenzenesulfonic acid) to form a first resin. Resorcinol and optionally additional non-resorcinol phenols may then be added to the first resin, followed by the addition of additional aldehyde.

[0015] In one embodiment, the present novolak resins comprise less than 5wt% free resorcinol, e.g. less than 3wt%, less than 1wt%, less than 0.5 wt%, or about 0 wt%.

[0016] In one embodiment, the present novolak resins are used in rubber compositions, i.e. compositions comprising one or more rubber compounds. Preferably, the rubber compositions are vulcanizable rubber compositions.

[0017] Examples of rubber compounds include both synthetic and natural rubbers. Representative synthetic rubbery polymers include the butadiene polymers. Butadiene polymers include those polymers having rubber-like properties which are prepared by polymerizing butadiene alone or with one or more other polymerizable ethylenically unsaturated compounds, such as styrene, methylstyrene, methyl isopropenyl ketone and acrylonitrile. Further examples of synthetic rubbers include neoprene rubbers. Isobutylene rubber (butyl) and ethylenepropylene rubber (EPDM) may also be employed.

[0018] In one embodiment, the weight ratio of the one or more rubber compounds to the novolak resin is in the range of 99:1 to 90:10, e.g. in the range of 99:1 to 95:5.

[0019] Also, the rubber composition may comprise a methylene donor. Suitable methylene donors include, for instance, hexamethylenetetramine (HMTA), di-, tri-, tetra-, penta-, or hexa-N-methylol-melamine or their partially or completely etherified or esterified derivatives, for example hexamethoxymethylmelamine (HMMM), oxazolidine or N-methyl-1,3,5-dioxazine.

[0020] The rubber composition of this invention may also include one or more additives, for instance additives selected from the group consisting of sulfur, carbon black, zinc oxide, silica, 5 anti-oxidant, stearates, accelerators, a cobalt, and adhesion promoters. In one embodiment the rubber composition is absent cobalt.

[0021] In one embodiment, the rubber composition further comprises a reinforcing material. Examples of reinforcing materials include nylon, rayon, polyester, aramid, glass, steel (brass, zinc or bronze plated) or other organic and inorganic compositions. These reinforcing materials may be in the form of, for instance, filaments, fibers, cords or fabrics.

[0022] In one embodiment, the rubber composition comprises one or more oils. Suitable oils, include for instance mineral oils and naturally derived oils. Examples of naturally derived oils include, for instance, tall oil, linseed oil, and/or twig oil. Commercial examples of tall oil include, e.g., SYLFAT FA1 from Arizona Chemicals and PAMAK C40S from Hercules Canada. In one embodiment, the rubber composition comprises, relative to the total weight of rubber compounds in the composition, less than 5 wt% of one or more oils, such as less than 2 wt%, less than 1 wt%, less than 0.6 wt%, less than 0.4 wt%, less than 0.3 wt%, or less than 0.2 wt%. In one embodiment, the rubber composition comprises, relative to the total weight of rubber compounds in the composition, at least 0.01 wt% of one or more oils, e.g. at least 0.05 wt% or at least 0.1 wt%. The presence of an oil in the rubber composition may aid in providing improved flexibility of the rubber composition after vulcanization.

[0023] One process of forming the rubber composition claimed herein comprises mixing one or more novolak resins (e.g., the above described novolak resins) with one or more oils (e.g., the above described oils, such as the above-described naturally derived oils) to form a novolak resin-oil mixture, and mixing the novolak resin-oil mixture with one or more rubber compounds (e.g., one or more of the above-described rubber compounds). Pre-mixing the novolak resin and oil before combining them with the rubber compounds may result in better flexibility of the rubber composition after vulcanization and/or in a reduction of oil that needs to be used.

[0024] In one embodiment, the novolak resin-oil composition comprises, relative to the total weight of the composition, 0.5-20wt% of one or more oils, e.g. 1-15wt% or 2-10wt%.

[0025] In one embodiment, the weight ratio of the one or more rubber compounds in the rubber composition to the novolak-oil composition is 99:1 to 80:20, e.g. 98:2 to 90:10.

[0026] The present rubber compositions are useful to make (parts of) a wide variety of products, including, e.g., tires, hoses, power belts, conveyor belts, printing rolls, rubber shoe heels, rubber shoe soles, rubber wringers, automobile floor mats, mud flaps for trucks, ball mill liners, and weather strips. In one embodiment, the compositions are used to make wire belt skim coats.

[0027] In a preferred embodiment, the invention relates to a tire comprising a novolak resin that contains phenolic monomers, wherein 1-40 wt% of the phenolic monomers in the resin are alkylphenols having a C₂₀-C₃₀ alkyl group. The novolak resin may contain (a) 1-30 wt% alkylphenols; (b) 1-25 wt% resorcinol; (c) 45-98 wt% phenol; and (d) one or more aldehydes; wherein the weight percentages are based on the total weight of components (a), (b), and (c). The alkyl groups in the alkylphenols may be one or more C₂₀-C₃₀ alkyl groups or one or more C₂₄-C₂₈ alkyl groups.

EXAMPLES

[0028] The following examples are given as particular embodiments of the invention and to demonstrate the practice and advantages thereof. It is to be understood that the examples are given by way of illustration and are not intended to limit the specification or the claims that follow in any manner.

Glossary

Abbreviation	Ingredient (Supplier)
Rubber	natural rubber "SIR 10" (Astlett Rubber).
N-326	carbon black (Degussa).
TMQ	trimethylquinone para phenylene antioxidant (Uniroyal).
6PDP	diamine andoxidant (Vanderbilt).
Cobalt	manobond680Cobalt (OM Group).
Crystex Sulfur	sulfur vulcanizing agent (Flexsys).
DCBS	dicyclobenothiazole sulfonamide (Flexsys).
HMMM	hexamethylmethoxyamine "Cyrez 963" (Cytec).
Tall oil	"Sylfat FA1" (Arizona Chemicals).

RESIN 1

[0029] 355g of a mixture of alkylphenols having alkyl groups in the range of about 24-28 carbon atoms (LCAP24-28 from Schenectady International), 974g of phenol, and 14g dodecylbenzene sulfonic acid (catalyst) were loaded in a flask and mixed while heating the flask to 90°C. 410g of formaldehyde (50% aqueous solution) was then slowly added to the flask while keeping the temperature in the in the range of 90-100°C. After completion of the ensuing reaction., 355g resorcinol and 1862g phenol were added to the flask (90°C). 520g formaldehyde was then added slowly while maintaining the flask at 90°C. After completion of the ensuing reaction, 1,8 diazabicyclo (5,4,0) undecene-7 ("DBU") was added to neutralize the mixture in the flask. The water and unreacted phenol in the mixture were distilled off first at 170°C and atmospheric pressure and then at 180°C at 74 torr.

[0030] In the monomer feedstock, the weight percentages of the phenolic monomers in the monomer feedstock are approximately 10% LCAP24-28, 10% resorcinol, and 80% phenol, based on the total weight of the phenolic monomers. For the final product, the weight percentages of the phenolic monomers are approximately 20% LCAP24-28, 20% resorcinol, and 60% phenol, based on the total weight of the phenolic monomers.

RESIN 2 (not claimed)

[0031] 600g of para-t-butyl phenol ("pTBP"), 729g of phenol, and 12g dodecylbenzene sulfonic acid (catalyst) were loaded in a flask and mixed while heating the flask to 90°C. 441g of formaldehyde (50% aqueous solution) was then slowly added to the flask while keeping the temperature in the in the range of 90-100°C. After completion of the ensuing reaction, 300g resorcinol and 1380g phenol were added to the flask (90°C). 560g formaldehyde was then added slowly while maintaining the flask at 90°C. After completion of the ensuing reaction, 6g DBU was added to neutralize the mixture in the flask. The water and unreacted phenol in the mixture were distilled off first at 170°C and atmospheric pressure and then at 180°C at 74 torr.

[0032] The novolak resin obtained by this procedure was then melt-blended with 65g Tall oil at a temperature in the range of 140°C-160°C.

RESIN 3 (not claimed)

[0033] 526g of para-dodecyl phenol ("pDDP"), 1125g of phenol, and 4g dodecylbenzene sulfonic acid (catalyst) were loaded in a flask and mixed while heating the flask to 90°C. 450g of formaldehyde (50% aqueous solution) was then slowly added to the flask while keeping the temperature in the in the range of 90-100°C. After completion of the ensuing reaction, 373g resorcinol and 1687g phenol were added to the flask (90°C). 795g formaldehyde was then added slowly while maintaining the flask at 90°C. After completion of the ensuing reaction, 2g DBU was added to neutralize the mixture in the flask. The water and unreacted phenol in the mixture were distilled off first at 170°C and atmospheric pressure

EP 2 578 610 B1

and then at 180°C at 74 torr.

[0034] The novolak resin obtained by this procedure was then melt-blended with 50g Tall oil at a temperature in the range of 140°C-160°C.

RESIN 4 (not claimed)

[0035] The preparation of Resin 3 was repeated except that 373g pDDP was used instead of 15 526g pDDP.

RESIN 5

[0036] The preparation of Resin 1 was repeated. The thus obtained novolak resin was then melt-blended with 125g Tall oil at a temperature in the range of 140°C-160°C.

RESIN 6 (not claimed)

[0037] The preparation of Resin 3 was repeated except that 750g pDDP was used instead of 526g pDDP.

RESIN 7

[0038] The preparation of Resin 1 was repeated. The thus obtained novolak resin was then melt-blended with 65g Tall oil at a temperature in the range of 140°C-160°C.

RESIN 8

[0039] The preparation of Resin 1 was repeated except that the amount of resorcinol and LCAP24-28 monomers were altered so that the weight percentage of the phenolic monomers in the monomer feedstock are 15% LCAP24-28, 5% resorcinol, and 80% phenol, based on the total weight of the phenolic monomers.

RESIN A

[0040] Resin A is a commercial resorcinol-formaldehyde resin containing about 20-25% free resorcinol ("B18S" from Indspec). The resin is produced by reacting formaldehyde with resorcinol and distilling off the water.

RESIN B

[0041] Resin B is a commercial phenol/formaldehyde novolak resin with cashew nut oil reacted onto the backbone ("HRI-11995" from Schenectady International).

RESIN C

[0042] Resin C is a commercial resorcinol-formaldehyde resin similar to Resin A, but containing between 10-16% free resorcinol ("B19S" from Indspec).

RESIN D

[0043] Resin D is a commercial resorcinol-formaldehyde resin containing low amounts of free resorcinol ("MOS" from Indspec). When making Resin D, styrene is reacted into the resin to scavenge free monomers.

[0044] Rubber compositions were prepared for each of Resins 3-8 and A-D by compounding the following components:

Ingredient	Amount (pbw)
One of Resins 3-8, A-D	3
Rubber	100
N-326	55
Zinc Oxide	8
Stearic Acid	1

EP 2 578 610 B1

(continued)

Ingredient	Amount (pbw)
TMQ	1
6DDP	2
Cobalt	0.5
Crystex Sulfur	5
DCBS	0.8
HMMM	3

[0045] The rubber compositions in the following tables are numbered in accordance with the Resin they comprise (e.g., "Comp. 3" or "Composition 3" refers to the rubber composition comprising Resin 3).

[0046] The first set of data tests Compositions 3-7 against Comparative Compositions A and B (see infra for test methods), with the results set forth in the following Table.

	Comp. 3	Comp. 4	Comp. 5	Comp. 6	Comp. 7	Comp. A	Comp. B
Mooney Viscosity initial at 4 min.	95.4 75.1	88.3 67.4	88.5 67.8	91.4 75.4	83.4 67.5	85.5 69.4	89.8 69.1
ODR Cure t1 t90	2.4 7.7	2.8 8.7	2.9 8.8	2.5 7.8	2.8 8.8	2.8 8.3	2.8 8.8
Wire Adhesion Peak load original Peak load aged humidity aged (21 days) salt bath aged (96 hrs)	154 165 154 130	156 150 137 128	143 152 140 111	158 165 154 127	150 154 129 104	154 155 132 118	148 143 144 118
Hardness Shore A Room Temp. Shore A 100°C.	85 89	80 84	78 82	87 91	80 83	17 80	80 83
Rubber to Rubber Adhesion	61	127	170	56	208	138	158

TEST METHODS:

Mooney viscosity

[0047] The Mooney viscosity was determined in accordance with ASTM D 1646-00.

ODR Cure

[0048] ODR cure data was determined in accordance with ASTM 2085-01. t1 = "time to cure for 1%" of the cure (minutes). t90 is "time to cure for 90%" of the cure (minutes).

Wire Adhesion

[0049] Wire adhesion data was determined in accordance with ASTM D2229-99.

Hardness


[0050] Hardness data was determined in accordance with ASTM D412-98a & D2240-02.

Rubber to Rubber Adhesion

[0051] Rubber to rubber adhesion data was determined in accordance with ASTM D413-98.


[0052] Next, Resins 1, 5, and 8 (as Compositions 1, 5, and 8) were tested against Resins A, C, and D (as Compositions A, C, and D) in the following tests: cure rate, hardness, tensile strength, elongation, elasticity, adhesion, flexibility, resistance, and viscosity. A "blank" composition, which contains all the components of the composition except for the resin, was also included with each of these tests. As known by those of skill in the art, a composition without a resin component will deteriorate at high temperatures, and is therefore unacceptable for use in products under high-temperature conditions, such as commercial-grade tires. The blank was used in these examples as a reference.

[0053] The following tests were performed by Akron Rubber Development Laboratory, Inc. of 2887 Gilchrist Road, Akron, Ohio.

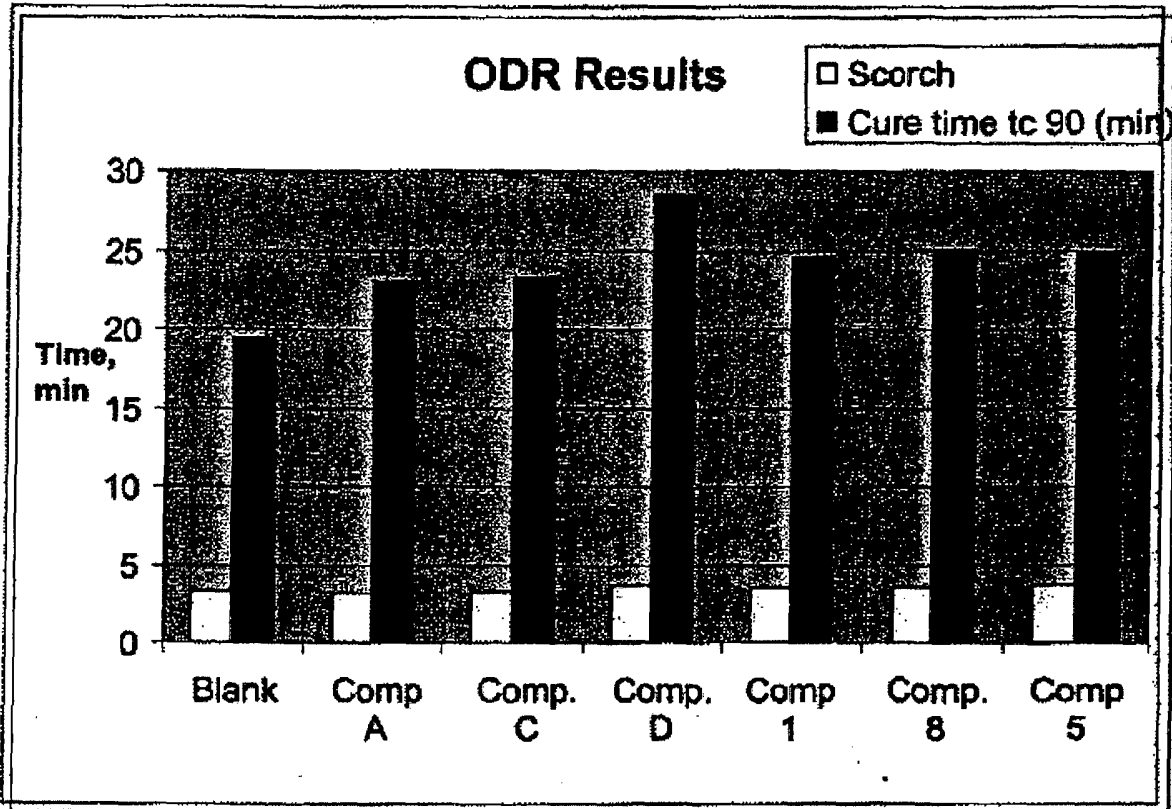


[0054] The first test parameter is ODR (Oscillating Disk Rheometry). This is a cure rate test with two different rates, cure and scorch. Cure is the total cure time to a specified cure state, and scorch is a measure of through cure, which relates to the cure rate between the center of the composition and the outside of the composition. The cure rates are tested in accordance with ASTM D 2084-01 using a Tech Pro rheoTECH ODR. at 148.9° C (300° F), 3° arc, 11.3 Nm (100 inch lbs) (torque range), 60 minute chart, and 1.7 Hz.


[0055] The data above shows that Compositions 1, 5, and 8 all have faster cures than Comparative Composition D. As the difference between 23 and 25 minutes is not that significant in the field of tire manufacturing, Compositions 1, 5, and 8 all have acceptable cure rates. All the compositions also have acceptable scorch numbers.

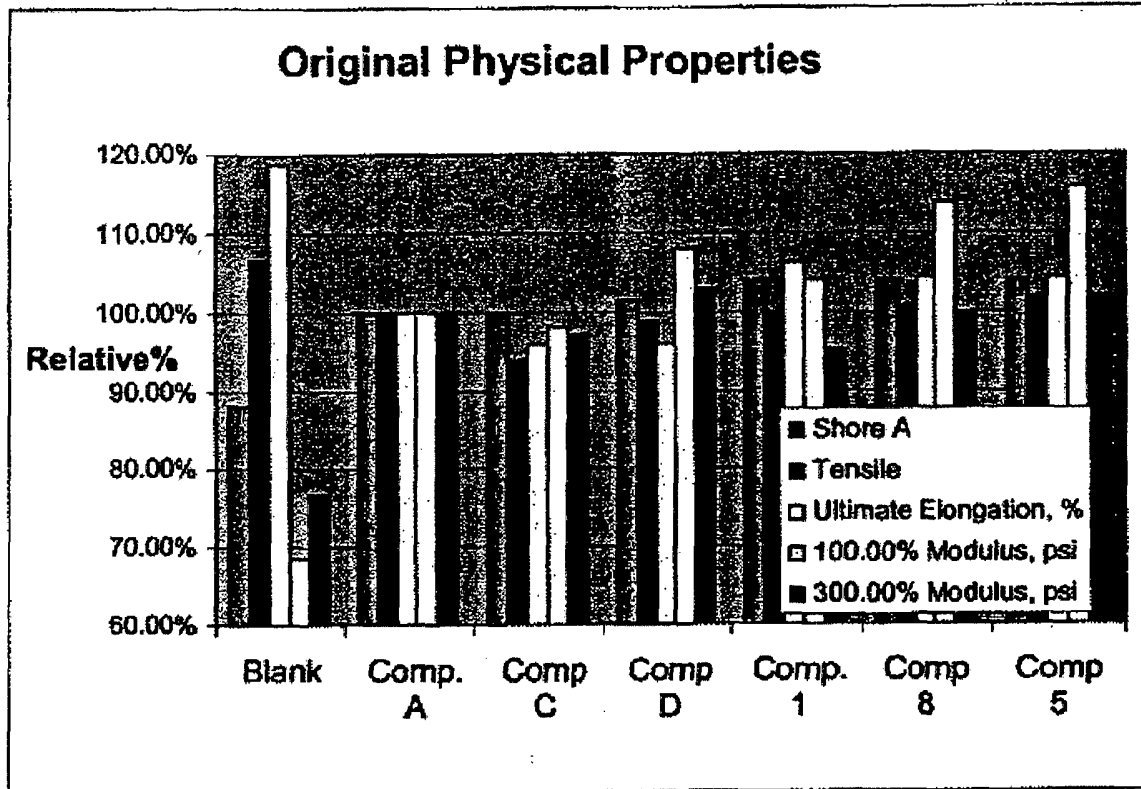

[0056] In the original physical properties chart, the shore A durometer, tensile strength, ultimate elongation, 100% modulus, and 300% modulus were measured for the seven compositions. The properties were tested on a cured piece of rubber to characterize the strength of the cure. The physical properties are measured in accordance with ASTM D 412-98a(02) and D 2240-02b, with the Die C dumbbells tested at 20 in/min. The measurements for Composition A are normalized to 100%, and the values for the other compositions are adjusted accordingly. This chart shows that Compositions 1, 5, and 8 generally perform better (higher tensile strength, better elongation, and better stress) than Comparative Compositions A, C, and D.

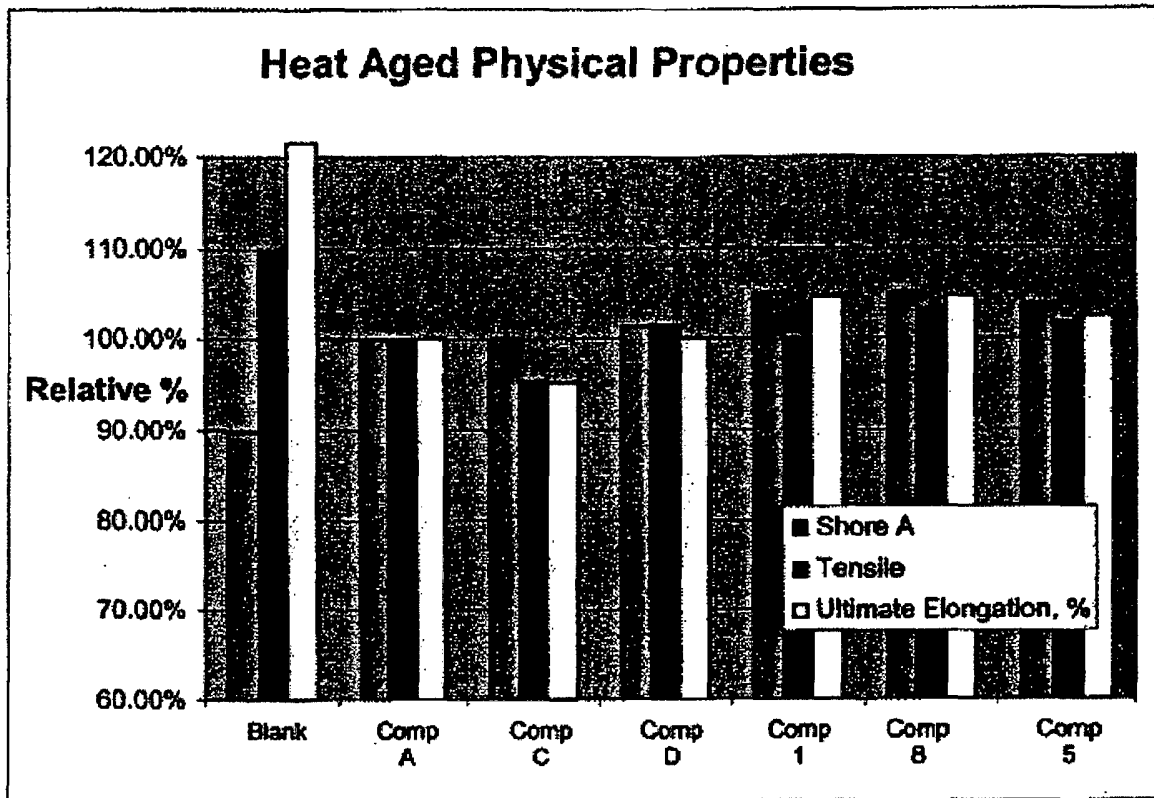


[0057] The heat aged test measures shore A durometer, tensile strength, and elongation under heat aged conditions. This test was measured in accordance with ASTM D 573-99, with specimens aged 572 hours at 70°C (158° F) in a forced air oven. The measurements for Composition A are normalized to 100%, and the values for the other compositions are adjusted accordingly. As seen from the above chart, Compositions 1, 5, and 8 performed better than Comparative Compositions A, C, and D.

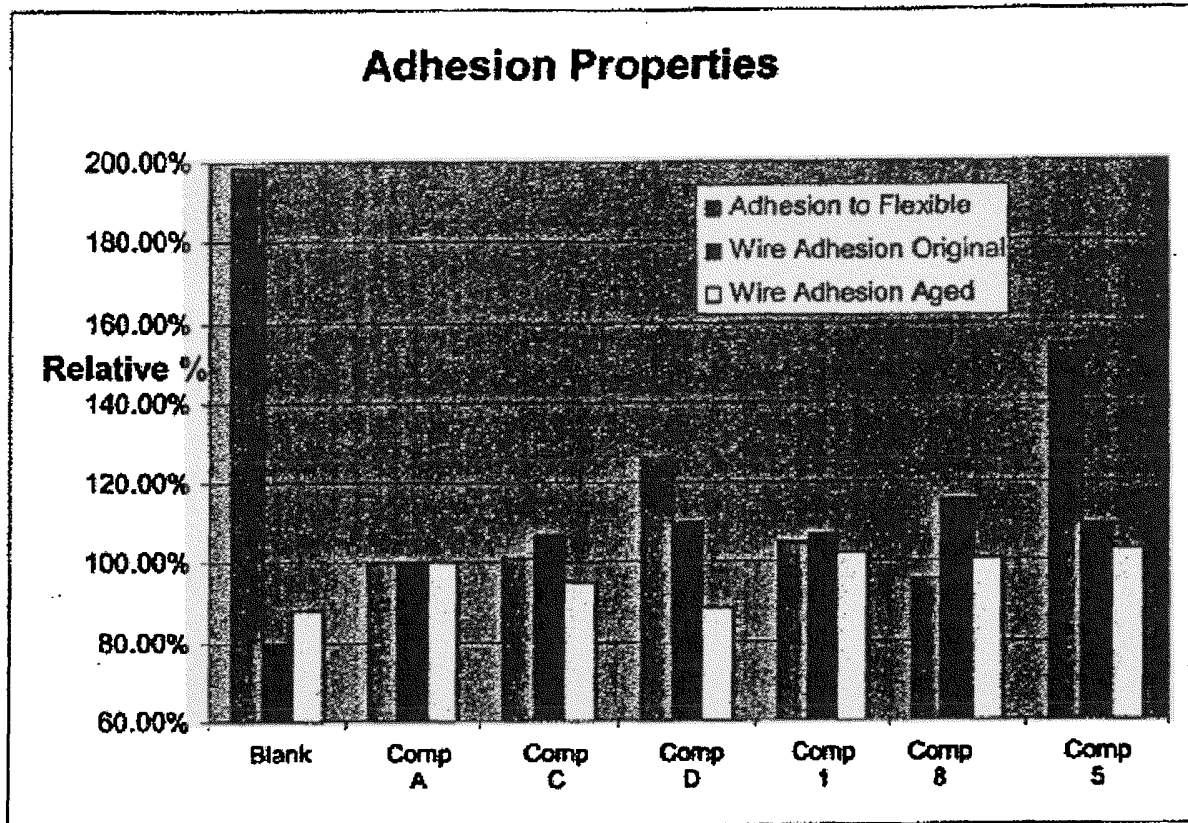


[0058] Adhesion is an indicator of how well the resin in the composition will assist the rubber in binding to steel belts in a tire. Adhesion may be measured as adhesion to a flexible substrate or as wire adhesion, either at room temperature (24.4°C, 76° F) (wire adhesion original) or 21 days at 80°C (176° F), 98% RH (wire adhesion aged). Adhesion to a flexible substrate is measured in accordance with ASTM D 413-98(02), with 6.35mm (0.25-inch) wide specimens tested at 5.08 cm/min (2 in/min). The average of the peaks was reported. Both wire adhesion tests were measured in accordance with ASTM D 2229-02, with specimens tested at 50.8 mm/min (2 in/min) and pulled from a 12.7 mm (0.5-inch) block of rubber. The average of 15 specimens was reported. For all three tests, the measurements for Composition A are normalized to 100%, and the values for the other compositions are adjusted accordingly.


[0059] The graph above shows that the flexible adhesion of Composition 5 is far superior to Comparative Compositions A, C, and D. The wire adhesions of Compositions 1, 5, and 8 are on par or better than those of Comparative Compositions A, C, and D.

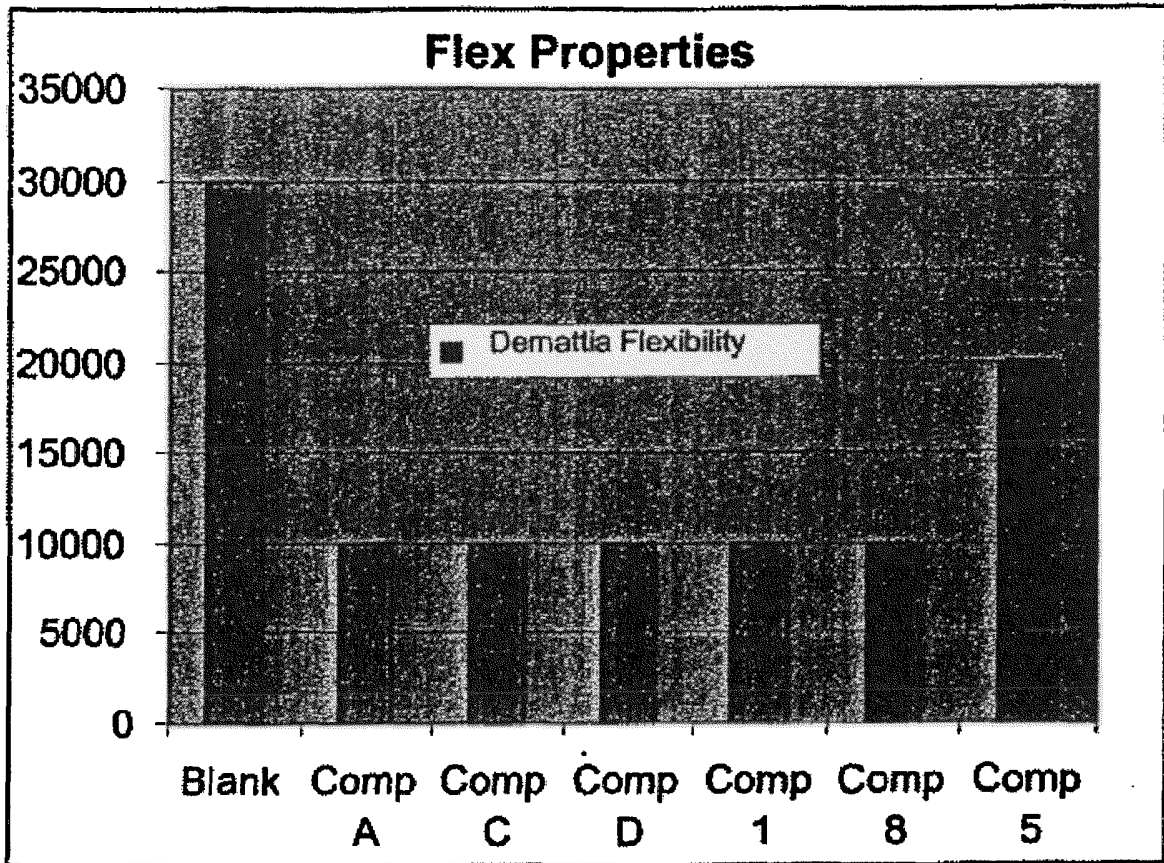

[0060] Demattia flexibility is an indication of rubber stiffness/flexibility in the cure. The Demattia flexibility test attempts to imitate the impact a tire receives upon hitting a bump in the road. The tests were measured in accordance with ASTM D 813-95(00), with pierced specimens tested at 300 cpm. As shown in the above chart, Compositions 1 and 8 performed equal to Comparative Compositions A, C, and D, while Composition 5 outperformed Comparative Compositions A, C, and D.

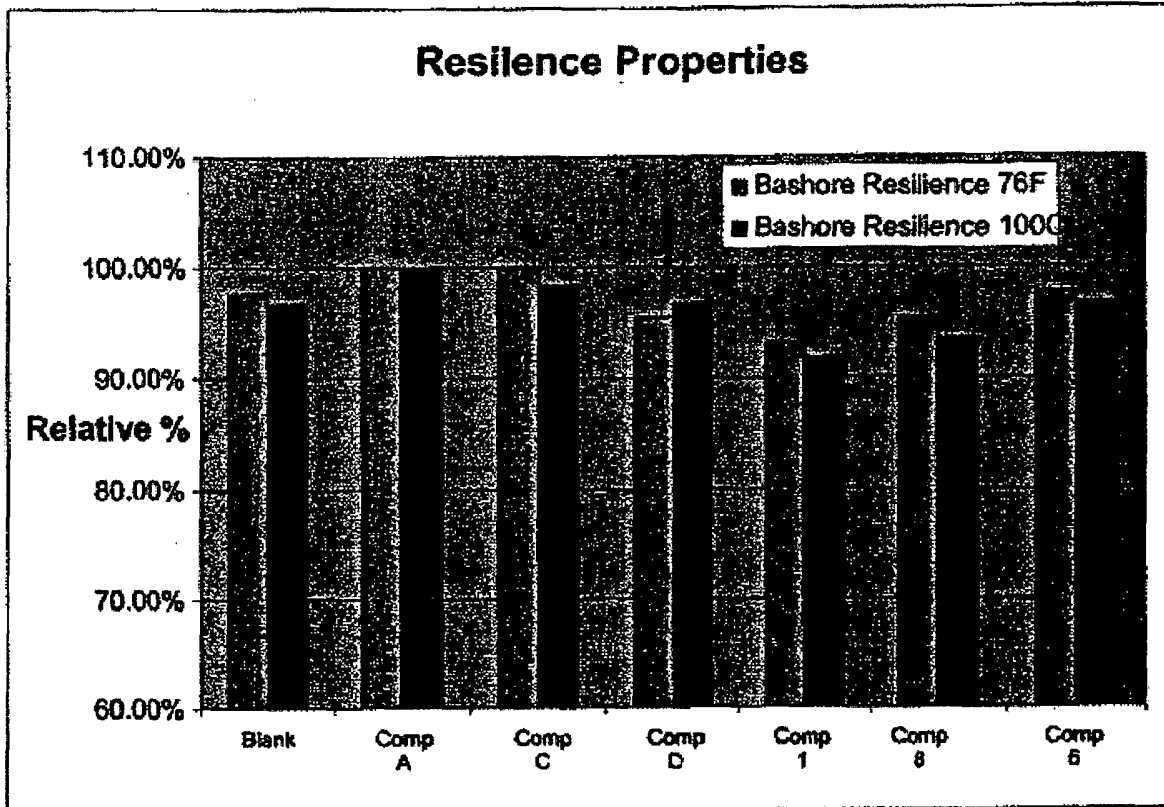

[0061] Resilience to rebound measures a composition's ability to absorb energy and release the energy as heat. The higher a resilience percentage, the better a composition is able to absorb and release the energy. Bashore resilience is measured at room temperature (24.4°C, 76° F) and room temperature immediately after 30 minutes conditioning at 212° F (100° C). Both tests are run in accordance with ASTM D 2632-88, with a 16-inch drop height. The measurements for Composition A are normalized to 100%, and the values for the other compositions are adjusted accordingly. The above chart shows that Composition 5 has a better resilience to rebound than Comparative Composition D, while Compositions 1 and 8 are on par with Comparative Composition D.

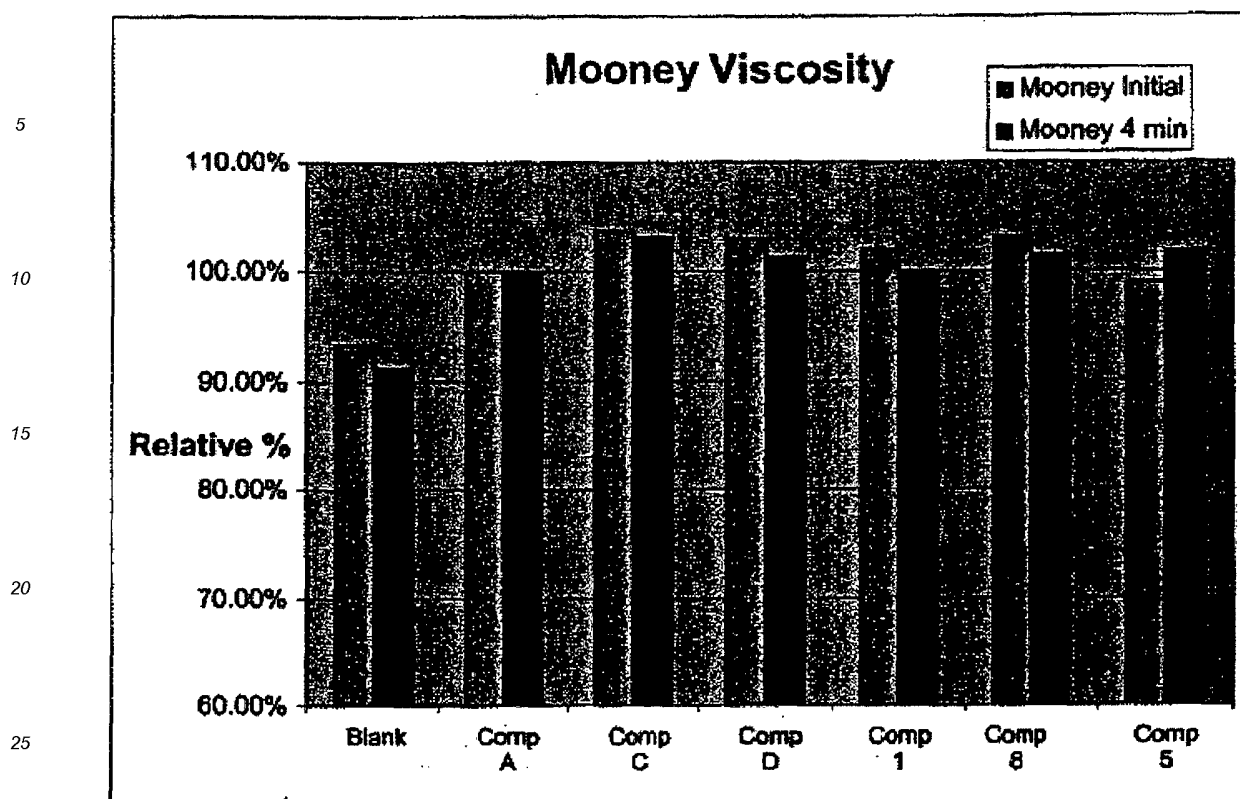

30 [0062] Mooney viscosity attempts to measure the ability of a rubber composition to be processed by, for example, a manufacturer. The lower the viscosity of the composition, the easier that compositions is to process. Mooney viscosity is measured in accordance with ASTM D 1646-00 with an Alpha Technologies MV2000 viscometer, with CML 1+4 at 100° C (212° F). Measurements were taken initially and at four minutes. The measurements for Composition A are normalized to 100%, and the values for the other compositions are adjusted accordingly. The graph above shows that Compositions 1, 5, and 8 are very similar in processing viscosity as compared to Comparative Compositions A, C, and D.

35 [0063] In conclusion, the cumulative data confirm that Compositions 1, 5, and 8 (made from Resins 1, 5, and 8) are viable alternatives for the current commercial embodiments shown in Compositions A, C, and D (made from Resins A, C, and D), performing as well or better in the tests associated with evaluating the performance of resorcinol and resorcinol resins.

40 Claims

1. A novolak resin comprising phenolic monomers, wherein 1-40 wt % of the phenolic monomers are alkylphenols having a C₂₀-C₃₀ alkyl group.
2. The novolak resin of claim 1, wherein said phenolic monomers include resorcinol.
3. The novolak resin of claim 1, wherein said phenolic monomers include phenol.
4. A tire comprising a novolak resin that contains phenolic monomers, wherein 1-40 wt % of the phenolic monomers in the resin are alkylphenols having a C₂₀-C₃₀ alkyl group.
5. The novolak resin of claim 1, wherein the alkylphenols have a C₂₄-C₂₈ alkyl group.
6. The novolak resin of claim 1, further comprising one or more aldehydes.
7. The novolak resin of claim 6, wherein one or more of the aldehydes is formaldehyde.

8. The novolak resin of claim 1, wherein the resin comprises:

- (a) 1-30 wt % alkylphenols;
- (b) 1-20 wt % resorcinol;
- (c) 45-98 wt % phenol; and
- (d) one or more aldehydes;

or:

- (a) 5-20 wt % alkylphenols;
- (b) 5-20 wt % of resorcinol;
- (c) 65-90 wt % of phenol; and
- (d) one or more aldehydes;

or:

- (a) 5-15 wt% alkylphenols;
- (b) 5-15 wt % resorcinol;
- (c) 70-90 wt % phenol; and
- (d) formaldehyde;

wherein the weight percentages are based on the total weight of components (a), (b), and (c).

9. A composition comprising one or more rubber compounds and the novolak resin according to claim 1.

10. The composition of claim 9, wherein the weight ratio of said one or more rubber compounds to said novolak resin ranges from about 99:1 to about 9:1.

11. A product prepared at least in part by vulcanizing the composition of claim 9.

12. The product of claim 11, wherein said product is selected from the group consisting of tires, hoses, power belts, conveyor belts, printing rolls, rubber shoe heels, rubber shoe soles, rubber wringers, automobile floor mats, mud flaps for trucks, ball mill liners, and weather strips, preferably a wire belt skim coat.

13. The tire of claim 4, wherein one or more of the alkyl groups in the alkylphenols is a C₂₄-C₂₈ alkyl group.

14. The tire of claim 4, wherein the resin comprises:

- (a) 1-30 wt% alkylphenols;
- (b) 1-25 wt % resorcinol;
- (c) 45-98 wt% phenol; and
- (d) one or more aldehydes;

or:

- (a) 5-20 wt % alkylphenols;
- (b) 5-20 wt % of resorcinol;
- (c) 65-90 wt % of phenol; and
- (d) one or more aldehydes;

or:

- (a) 5-15 wt % alkylphenols;
- (b) 5-15 wt % resorcinol;
- (c) 70-90 wt % phenol; and
- (d) formaldehyde;

wherein the weight percentages are based on the total weight of components (a), (b), and (c).

Patentansprüche

1. Novolak-Harz, umfassend Phenolmonomere, wobei 1 bis 40 Gew.-% der Phenolmonomere Alkylphenole mit einer C₂₀-C₃₀-Alkylgruppe sind.
2. Novolak-Harz nach Anspruch 1, wobei die Phenolmonomere Resorcinol aufweisen.
3. Novolak-Harz nach Anspruch 1, wobei die Phenolmonomere Phenol aufweisen.
4. Reifen, umfassend ein Novolak-Harz, das Phenolmonomere enthält, wobei 1 bis 40 Gew.-% der Phenolmonomere in dem Harz Alkylphenole mit einer C₂₀-C₃₀-Alkylgruppe sind.
5. Novolak-Harz nach Anspruch 1, wobei die Alkylphenole eine C₂₄-C₂₈-Alkylgruppe aufweisen.
6. Novolak-Harz nach Anspruch 1, ferner umfassend ein oder mehrere Aldehyde.
7. Novolak-Harz nach Anspruch 6, wobei ein oder mehrere der Aldehyde Formaldehyd sind.
8. Novolak-Harz nach Anspruch 1, wobei das Harz Folgendes umfasst:
 - (a) 1 bis 30 Gew.-% Alkylphenole;
 - (b) 1 bis 20 Gew.-% Resorcinol;
 - (c) 45 bis 98 Gew.-% Phenol; und
 - (d) ein oder mehrere Aldehyde; oder:
 - (a) 5 bis 20 Gew.-% Alkylphenole;
 - (b) 5 bis 20 Gew.-% Resorcinol;
 - (c) 65 bis 90 Gew.-% Phenol; und
 - (d) ein oder mehrere Aldehyde;oder:
 - (a) 5 bis 15 Gew.-% Alkylphenole;
 - (b) 5 bis 15 Gew.-% Resorcinol;
 - (c) 70 bis 90 Gew.-% Phenol; und
 - (d) Formaldehyd;wobei die Gewichtsanteile auf dem Gesamtgewicht der Bestandteile (a), (b) und (c) basieren.
9. Zusammensetzung, umfassend ein oder mehrere Kautschukverbindungen und das Novolak-Harz nach Anspruch 1.
10. Zusammensetzung nach Anspruch 9, wobei das Gewichtsverhältnis der einen oder mehreren Kautschukverbindungen zu dem Novolak-Harz im Bereich von etwa 99:1 bis etwa 9:1 liegt.
11. Produkt, das mindestens teilweise durch Vulkanisieren der Zusammensetzung nach Anspruch 9 hergestellt wird.
12. Produkt nach Anspruch 11, wobei das Produkt ausgewählt ist aus der Gruppe bestehend aus Reifen, Schläuchen, Kraftriemen, Förderbändern, Druckwalzen, Kautschukschuhabsätzen, Kautschukschuhsohlen, Kautschukwringmaschinen, Automobilfußmatten, Schmutzfängern für Lkw, Kugelmühlenauskleidungen und Regenleisten, vorzugsweise einem Drahtriemen-Flächenspachtel.
13. Reifen nach Anspruch 4, wobei eine oder mehrere der Alkylgruppen in den Alkylphenolen eine C₂₄-C₂₈-Alkylgruppe ist.
14. Reifen nach Anspruch 4, wobei das Harz Folgendes umfasst:
 - (a) 1 bis 30 Gew.-% Alkylphenole;
 - (b) 1 bis 25 Gew.-% Resorcinol;
 - (c) 45 bis 98 Gew.-% Phenol; und

(d) ein oder mehrere Aldehyde; oder:

- (a) 5 bis 20 Gew.-% Alkylphenole;
- (b) 5 bis 20 Gew.-% Resorcinol;
- (c) 65 bis 90 Gew.-% Phenol; und
- (d) ein oder mehrere Aldehyde; oder:

- (a) 5 bis 15 Gew.-% Alkylphenole;
- (b) 5 bis 15 Gew.-% Resorcinol;
- (c) 70 bis 90 Gew.-% Phenol; und
- (d) Formaldehyd;

wobei die Gewichtsanteile auf dem Gesamtgewicht der Bestandteile (a), (b) und (c) basieren.

Revendications

1. Résine novolaque comprenant des monomères phénoliques, dans laquelle de 1 à 40% en poids des monomères phénoliques sont des alkylphénols ayant un groupe alkyle en C_{20} - C_{30} .
2. Résine novolaque de la revendication 1, dans laquelle lesdits monomères phénoliques comprennent du résorcinol.
3. Résine novolaque de la revendication 1, dans laquelle lesdits monomères phénoliques comprennent du phénol.
4. Pneumatique comprenant une résine novolaque qui contient des monomères phénoliques, dans lequel de 1 à 40% en poids des monomères phénoliques dans la résine sont des alkylphénols ayant un groupe alkyle en C_{20} - C_{30} .
5. Résine novolaque selon la revendication 1, dans laquelle les alkylphénols sont un groupe alkyle en C_{24} - C_{28} .
6. Résine novolaque selon la revendication 1, comprenant en outre un ou plusieurs aldéhydes.
7. Résine novolaque selon la revendication 6, dans laquelle une ou plusieurs des aldéhydes est du formaldéhyde.
8. Résine novolaque de la revendication 1, dans laquelle la résine comprend:
 - (a) de 1 à 30% en poids d'alkylphénols;
 - (b) de 1 à 20% en poids de résorcinol;
 - (c) de 45 à 98% en poids de phénol; et
 - (d) un ou plusieurs aldéhydes;
 ou:
 - (a) de 5 à 20% en poids d'alkylphénols;
 - (b) de 5 à 20% en poids de résorcinol;
 - (c) de 65 à 90% en poids de phénol; et
 - (d) un ou plusieurs aldéhydes;
 ou:
 - (a) de 5 à 15% en poids d'alkylphénols;
 - (b) de 5 à 15% en poids de résorcinol;
 - (c) de 70 à 90% en poids de phénol; et
 - (d) du formaldéhyde;
 dans lequel les pourcentages en poids sont basés sur le poids total des composants (a), (b) et (c).
9. Composition comprenant un ou plusieurs composés de caoutchouc et de résine novolaque selon la revendication 1.

10. Composition selon la revendication 9, dans laquelle le rapport en poids desdits un ou plusieurs composés de caoutchouc de ladite résine novolaque est dans une plage d'environ 99:1 à environ 9:1.

11. Produit préparé au moins en partie par vulcanisation de la composition de la revendication 9.

12. Produit de la revendication 11, dans lequel ledit produit est choisi dans le groupe constitué de pneus, de tuyaux, de courroies de transmission, de bandes transporteuses, de rouleaux d'impression, de talons de chaussures en caoutchouc, de semelles de chaussures en caoutchouc, d'essoreuses de caoutchouc, de tapis de sol pour automobiles, de bavettes garde-boue pour camions, de doublures de broyeurs à boulets et de bourrelets de calfeutrage, de préférence un enduit pour câbles métalliques.

13. Pneumatique de la revendication 4, dans lequel un ou plusieurs des groupes alkydes dans les alkylphénols est un groupe alkyle en C₂₄-C₂₅.

14. Pneumatique de la revendication 4, dans lequel la résine comprend:

- (a) de 1 à 30% en poids d'alkylphénols;
- (b) 1-25% en poids de résorcinol;
- (c) de 45 à 98% en poids de phénol; et
- (d) un ou plusieurs aldéhydes;

ou:

- (a) de 5 à 20% en poids d'alkylphénols;
- (b) de 5 à 20% en poids de résorcinol;
- (c) de 65 à 90% en poids de phénol; et
- (d) un ou plusieurs aldéhydes;

ou:

- (a) de 5 à 15% en poids d'alkylphénols;
- (b) de 5 à 15% en poids de résorcinol;
- (c) de 70 à 90% en poids de phénol; et
- (d) du formaldéhyde;

dans lequel les pourcentages en poids sont basés sur le poids total des composants (a), (b) et (c).

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5936056 A [0002] [0003]
- US 5945500 A [0002] [0003]
- US 4031288 A [0003]
- US 4167540 A [0003]
- US 4889891 A [0003]
- US 5030692 A [0003]
- US 5206289 A [0003]
- US 5238991 A [0003]
- US 5922797 A [0003]
- US 6448318 A [0003]
- US 6472457 A [0003]

Novolak gyanták, és az azt tartalmazó gumi kompozíciók

SZABADALMI IGÉNYONTOK

SBGK
Szabadalmi
Ügyvédi Iroda

1. Fenol-tartalmú monomereket tartalmazó novolak gyanta, ahol a fenol-tartalmú monomerek 1-40 tömeg%-a 20-30 szénatomos alkilcsoportot tartalmazó alkilfenolok.

2. Az 1. igénypont szerinti novolak gyanta, ahol az említett fenol-tartalmú monomerek rezorcint tartalmaznak.

3. Az 1. igénypont szerinti novolak gyanta, ahol az említett fenol monomerek fenolt tartalmaznak.

4. Abroncs, mely fenol-tartalmú monomereket tartalmazó novolakot tartalmaz, ahol a fenol-tartalmú monomerek 1-40 tömeg%-a 20-30 szénatomos alkilcsoportot tartalmazó alkilfenolok.

5. Az 1. igénypont szerinti novolak gyanta, ahol az alkilfenolok 24-28 szénatomos alkilcsoportot tartalmaznak.

6. Az 1. igénypont szerinti novolak gyanta, mely egy vagy több aldehidet is tartalmaz.

7. A 6. igénypont szerinti novolak gyanta, ahol egy vagy több aldehid formaldehid.

8. Az 1. igénypont szerinti novolak gyanta, ahol a gyanta tartalmaz:

(a) 1-30 tömeg% mennyiségben alkilfenolokat;

(b) 1-20 tömeg% mennyiségben rezorcint,

(c) 45-98 tömeg% mennyiségben fenolt; és

(d) egy vagy több aldehidet;

vagy:

(a) 5-20 tömeg% mennyiségben alkilfenolokat;

(b) 5-20 tömeg% mennyiségben rezorcint,

(c) 65-90 tömeg% mennyiségben fenolt; és

(d) egy vagy több aldehidet;

vagy:

(a) 5-15 tömeg% mennyiségben alkilfenolokat;

- (b) 5-15 tömeg% mennyiségben rezorcint,
- (c) 70-90 tömeg% mennyiségben fenolt; és
- (d) formaldehidet;

ahol a tömegszázalékos értékek az (a), (b), és (c) komponensek teljes tömegére vannak vonatkoztatva.

9. Egy kompozíció, mely egy vagy több kaucsuk vegyületet és az 1. igénypont szerinti novolak gyantát tartalmaz.

10. A 9. igénypont szerinti kompozíció, ahol az említett egy vagy több kaucsuk vegyület aránya az említett novolak gyantához körülbelül 99:1 – körülbelül 9:1.

11. Egy, legalább részben a 9. igénypont szerinti kompozíció vulkanizálásával előállított termék.

12. A 11. igénypont szerinti termék, ahol az említett termék az abroncsok, tömlők, hajtószíjak, szállítószalagok, nyomógörgők, gumi cipősarkak, gumi cipőtálpak, gumi mángorló hengerek, gépkocsi szőnyegek, teherautó sárfogó gumik, örlőmalom bélések, és tömítő csíkok, különösen drót szalag lapos bevonat csoportból van kiválasztva.

13. A 4. igénypont szerinti abroncs, ahol az alkilfenolokban egy vagy több alkilcsoport 24-28 szénatomos alkilcsoport.

14. A 4. igénypont szerinti abroncs, ahol a gyanta tartalmaz:

- (a) 1-30 tömeg% mennyiségben alkilfenolokat;
- (b) 1-25 tömeg% mennyiségben rezorcint,
- (c) 45-98 tömeg% mennyiségben fenolt; és
- (d) egy vagy több aldehidet;

vagy:

- (a) 5-20 tömeg% mennyiségben alkilfenolokat;
- (b) 5-20 tömeg% mennyiségben rezorcint,
- (c) 65-90 tömeg% mennyiségben fenolt; és
- (d) egy vagy több aldehidet;


vagy:

- (a) 5-15 tömeg% mennyiségben alkilfenolokat;
- (b) 5-15 tömeg% mennyiségben rezorcint,
- (c) 70-90 tömeg% mennyiségben fenolt; és

(d) formaldehidet;

ahol a tömegszázalékos értékek az (a), (b), és (c) komponensek teljes tömegére vannak vonatkoztatva.

A meghatalmazott


Katalin Szabados
Szabados Katalin ügyvédi irodája
1051 Budapest, Andrássy út 133
Telefon: 461-1010 Fax: 461-1039
Email: szabadosk@freemove.hu