



(11) **EP 1 575 726 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.07.2010 Bulletin 2010/27

(51) Int Cl.:
B22F 1/02 (2006.01) H01F 1/14 (2006.01)
H01F 1/24 (2006.01)

(21) Application number: **03781264.1**

(86) International application number:
PCT/SE2003/002067

(22) Date of filing: **22.12.2003**

(87) International publication number:
WO 2004/056508 (08.07.2004 Gazette 2004/28)

(54) **SOFT MAGNETIC POWDER COMPOSITION COMPRISING INSULATED PARTICLES AND A LUBRICANT SELECTED FROM ORGANO-SILANES, -TITANATES, -ALUMINATES AND ZIRCONATES AND A PROCESS FOR THEIR PREPARATION**

WEICHMAGNETISCHE PULVERZUSAMMENSETZUNG MIT ISOLIERTEN TEILCHEN UND SCHMIERMITTEL, AUSGEWÄHLT AUS ORGANOSILANEN, -TITANATEN, -ALUMINATEN UND ZIRKONATEN UND VERFAHREN FÜR IHRE HERSTELLUNG

COMPOSITION PULVERULENTE FAIBLEMENT FERROMAGNETIQUE COMPRENANT DES PARTICULES ISOLEES ET UN LUBRIFIANT SELECTIONNE DANS UN GROUPE COMPRENANT DES ORGANO-SILANES, -TITANATES, -ALUMINATES ET ZIRCONATES ET SON PROCEDE DE PRODUCTION

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **23.12.2002 SE 0203851**

(43) Date of publication of application:
21.09.2005 Bulletin 2005/38

(73) Proprietor: **HÖGANÄS AB**
263 83 Höganäs (SE)

(72) Inventors:
• **KEJZELMAN, Mikhail**
S-212 29 Malmö (SE)
• **SKARMAN, Björn**
SE-263 91 Höganäs (SE)
• **SKOGLUND, Paul**
S-263 52 Höganäs (SE)

- **ANDERSSON, Ola**
S-260 41 Nyhamnsläge (SE)
- **KNUTSSON, Per**
S-262 43 Ängelholm (SE)
- **VIDARSSON, Hilmar**
S-266 32 Munka Ljungby (SE)

(74) Representative: **Andersson, Mikael Per Robert et al**
Awapatent AB
Box 1066
251 10 Helsingborg (SE)

(56) References cited:
EP-A1- 0 205 786 WO-A1-01/24205
US-A- 4 475 946 US-A- 4 820 338
US-A- 5 277 980

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 575 726 B1

DescriptionFIELD OF THE INVENTION

[0001] The present invention relates to new metal powder compositions. More specifically, the invention concerns a new iron-based powder which is useful for the preparation of soft magnetic materials having improved properties when used both at high and low frequencies. The invention also concerns a method for the manufacturing of soft magnetic composite materials prepared therefrom.

BACKGROUND OF THE INVENTION

[0002] Soft magnetic materials are used for applications, such as core materials in inductors, stators and rotors for electrical machines, actuators, sensors and transformer cores. Traditionally, soft magnetic cores, such as rotors and stators in electric machines, are made of stacked steel laminates. Soft Magnetic Composite, SMC, materials are based on soft magnetic particles, usually iron-based, with an electrically insulating coating on each particle. By compacting the insulated particles optionally together with lubricants and/or binders using the traditionally powder metallurgy process, the SMC parts are obtained. By using this powder metallurgical technique it is possible to produce materials having a higher degree of freedom in the design of the SMC component than by using the steel laminates as the SMC material can carry a three dimensional magnetic flux and as three dimensional shapes can be obtained by the compaction process.

[0003] Two key characteristics of an iron core component are its magnetic permeability and core loss characteristics. The magnetic permeability of a material is an indication of its ability to become magnetised or its ability to carry a magnetic flux. Permeability is defined as the ratio of the induced magnetic flux to the magnetising force or field intensity. When a magnetic material is exposed to a varying field, energy losses occur due to both hysteresis losses and eddy current losses. The hysteresis loss is brought about by the necessary expenditure of energy to overcome the retained magnetic forces within the iron core component. The eddy current loss is brought about by the production of electric currents in the iron core component due to the changing flux caused by alternating current (AC) conditions. A high electrical resistivity of the component is desirable in order to minimise the eddy currents.

[0004] Research in the powder-metallurgical manufacture of magnetic core components using coated iron-based powders has been directed to the development of iron powder compositions that enhance certain physical and magnetic properties without detrimentally affecting other properties of the final component. Desired component properties include e.g. a high permeability through an extended frequency range, low core losses, high saturation induction, and high strength. Normally an increased density of the component enhances all of these properties provided that a sufficient electrical resistivity can be maintained. The desired powder properties include suitability for compression moulding techniques, which i.e. means that the powder can be easily moulded to a high density component, which can be easily ejected from the moulding equipment without damages on the component surface.

SUMMARY OF INVENTION

[0005] The present invention concerns a new ferromagnetic powder composition, which is suitable of compaction to high density composite components. More specifically the present invention concerns a powder composition comprising soft magnetic iron or iron-based core particles, the surface of which are surrounded by an electrically insulating inorganic coating and which composition also includes a lubricating amount of silanes, titanates, aluminates, or zirconates as defined in claim 1.

[0006] The present invention also includes a method of preparing high-density green, and optionally heat-treated, compacts from these compositions. This method comprises the steps of providing the composition, optionally mixing said composition with additives, such as conventional lubricants (i.e. particular lubricants) and binders as well as flow-enhancing agents; uniaxially compacting in a die at high pressure and ejecting the green body, which may subsequently be heat-treated.


Detailed description of the invention

[0007] The ferromagnetic powders used herein are made up of iron or an alloy containing iron optionally in combination with up to 20 % by weight of one or more of element selected from the group consisting of aluminium, silicon, chromium, niobium, molybdenum, nickel and cobalt. Preferably the new powder is based on a base powder that consists of essentially pure iron. This powder could be e.g. commercially available water-atomised or gas-atomised iron powders or reduced iron powders, such as sponge iron powders. The powder particle shape could be round, irregular or flat.

[0008] Preferred electrically insulating coatings, which may be used according to the invention, are thin phosphorous containing coatings of the type described in the US patent 6348265. Also other, preferably inorganic coatings may be

used, for example coatings based on Cr, Mg, Mo, Zn, Ni, or Co.

[0009] The lubricating agent used according to the invention is a type of organo-silanes, organo-titanates, organo-aluminates or organo-zirconates. This class of substances is often referred to as surface modifying agents, coupling agents, or cross-linking agents depending on the chemical functionality of their linked groups. The specific type of organo-silanes, organo-titanates, organo-aluminates or organo-zirconates which are used according to the present invention and which may be referred to as organo-metallic compounds are distinguished by the presence of at least one hydrolysable group and at least one lubricating organic moiety. This type of compounds can be defined by the following general formula:



,wherein M is a central atom selected from Si, Ti, Al, and Zr; R_1 is a hydrolysable group; R_2 is a group consisting of a lubricating organic moiety; wherein the sum of $m+n$ must equal the coordination number of the central atom and where n is an integer ≥ 1 and m is an integer ≥ 1 .

[0010] Particularly R_1 is an alkoxy group having less than 12 C atoms. Preferred are those alkoxy groups, which have less than 6, and most preferred are alkoxy groups having 1-3 C atoms. R_1 may also be a chelate group, such as a residue of hydroxyacetic acid ($-\text{OC}(\text{O})-\text{CH}_2\text{O}-$) or a residue of ethylene glycol ($-\text{OCH}_2\text{CH}_2\text{O}-$).

[0011] R_2 is an organic group including between 6-30, preferably 10-24 carbon atoms optionally including one or more hetero atoms selected from the group consisting of N, O, S and P. R_2 is a group consisting of an organic moiety, which is not easily hydrolysed and often lipophilic and can be a chain of an alkyl, ether, ester, phospho-alkyl, phospho-alkyl, phospho-lipid, or phospho-amine. The phosphorous may be present as phosphato, pyrophosphato, or phosphito groups. Furthermore, R_2 may be linear, branched, cyclic, or aromatic.

[0012] A preferred group of lubricating silanes according to the present invention are alkyl-alkoxy silanes and polyether-alkoxy silanes. Furthermore, promising results have been obtained with hexadecyl-trimethoxy silane, isopropyl-triisostearyl titanate, isopropyl-tri(dioctyl)phosphato titanate, neopentyl(diallyl)oxy-tri(dioctyl)phosphato zirconate, neopentyl(diallyl)oxy-trineodecanoyl zirconate, and diisobutyl-acetoacetyl aluminate.

[0013] The amount of the compound is present in amounts of 0.05-0.5%, preferably 0.07-0.45%, and most preferably 0.08-0.4% by weight of the composition. A too low amount of lubricating agent gives high density but results in poor ejection behaviour and may thus result in poor surface condition of the tool and/or SMC parts. A too high amount, however, may give excellent ejection behaviour but could render in low component densities. Furthermore it is preferred that the compound is present as a lubricating layer on the insulated particles. It should, however, be noted that the geometry of the component as well as the material and quality of the tool, have great impact on the surface condition of the SMC parts after ejection.

[0014] The use of compounds organo-silanes, organo-titanates, or organo-aluminates is known from US patents 4820338 and 6537389. According to the US patent 4820338 silanes, titanates or aluminates are used in order to accelerate a coupling between the magnetic powder particles and an electrically insulating organic binder polymer. The powder particles do not have an inorganic coating.

[0015] The US patent 6537389 discloses a wide range of silicon-, aluminium-, or boron-containing compounds as molecular precursors for producing electrically insulating ceramics on soft magnetic powders. The precursor compounds are converted by thermal treatments into ceramic, metallic or intermetallic end products to enhance temperature and solvent resistance. The US patent 6537389 distinguishes from the present invention i.a. in that the organo-metallic compounds are used as precursors for producing chemically and thermally resistant coatings, and not as the key component that facilitates production of high density parts. Furthermore, the precursor compounds described in the examples of US patent 6537389 do not include a lubricating moiety.

[0016] The lubricating compound(s) used according to the present invention can be used in such a way that it is dissolved or dispersed in a suitable solvent, e.g. an organic solvent, such as acetone or ethanol. The obtained solution or dispersion is subsequently added to the iron based powder during mixing and optionally heating. The solvent is finally evaporated optionally in vacuum.

[0017] According to one embodiment of the invention the powder used has coarse particles i.e. the powder is essentially without fine particles. The term "essentially without fine particles" is intended to mean that less than about 5 % of the iron or iron-based powder particles have size below 45 μm as measured by the method described in SS-EN 24 497. So far the most interesting results have been achieved with powders essentially consisting of particles above about 106 μm and particularly above about 212 μm . The term "essentially consisting" is intended to mean that at least 40 %, preferably at least 60 % of the particles have a particle size above 106 and 212 μm , respectively. So far the best results have been obtained with powders having an average particle size about 250 μm and only less than 3 % below 106 μm . The maximum particle size may be about 5 mm. The particle size distribution for iron-based powders used at PM manufacturing is normally distributed with a Gaussian distribution with an average particle diameter in the region of 30

to 100 μm and about 10-30% less than 45 μm . Iron based powders essentially free from fine particles may be obtained by removing the finer fractions of the powder or by manufacturing a powder having the desired particle size distribution.

[0018] According to a preferred embodiment of the invention and contrary to common practise in-powder metallurgy, where conventional PM lubricants are used in the iron powder mix, or where a lubricant is used in combination with binder and/or surface treatments the iron or iron-based powder must not be mixed with a separate (particular) lubricant before it is transferred to the die. Nor is it necessary to use external lubrication (die wall lubrication) where the walls of the die are provided with a lubricant before the compaction is performed. The invention, however, does not exclude the possibility of, when it is of interest, to utilise conventional internal lubrication (in an amount up to 0.5% by weight), external lubrication or a combination of both. The powder to be compacted may also include additives selected from the group consisting of binders, lubricants, and flow-enhancing agents. Examples of inorganic lubricants, which may be used in addition to organic PM lubricants, are hexagonal boron nitride, and MoS_2 .

[0019] According to the present invention soft magnetic composite materials having a density of at least 7.45 g/cm^3 can be prepared by uniaxially compacting the new powder compositions in a die at high compaction pressures and without die wall lubrication. When the green body has been ejected from the compaction tool it can be heat treated up to temperatures of about 700°C .

[0020] The term "at high compaction pressure" is intended to mean at pressures of about at least 800 MPa. More interesting results are obtained with higher pressures such as pressures above 900, more preferably above 1000, and most preferably above 1100 MPa. Conventional compaction at high pressures, i.e. pressures above about 800 MPa, with conventionally used powders including finer particles are generally considered unsuitable due to the high forces required in order to eject the compacts from the die, the accompanying high wear of the die, and the fact that the surfaces of the components tend to be less shiny or deteriorated. High electrical resistance can be obtained even though high compaction pressures are used to achieve the high density. By using the powders according to the present invention it has unexpectedly been found that the ejection force is reduced at high pressures of about 1000 MPa, and that components having acceptable or even perfect surfaces may be obtained.

[0021] The compaction may be performed with standard equipment, which means that the new method may be performed without expensive investments. The compaction is performed uniaxially and preferably in a single step at ambient or elevated temperature. Alternatively, the compaction may be performed with the aid of a percussion machine (Model HYP 35-4 from Hydropulsor) as described in patent publication WO 02/38315.

[0022] The heat treatment may be performed at the temperatures normally used, e.g. up to temperatures of about 700°C in different types of atmospheres or at reduced pressure and optionally in the presence of steam. Prior to the heat treatment the pressed components may optionally be green machined and/or cleaned.

[0023] A main object of the present invention is to achieve high density products and to this end it is preferred to use coarse powders as described above. It has, however, also been found that these lubricating effects can also be obtained in combination with powders including higher amounts of fine particles i.e. the type of powders which are conventionally used in the PM industry today. Example 3 and 5 below illustrates the lubricating effect of the organo-metallic compounds according to the present invention on both conventional powders and coarse powders. As can be observed high densities are obtained also with a conventional powder including higher amounts of fine particles. Compositions including iron or iron-based powders with the particle size distributions which are normally used today and the lubricating agents according to the present invention may be of special interest for certain applications and are therefore also within the scope of the invention.

[0024] The term "high density" is intended to mean compacts having a density of about at least 7.45 g/cm^3 . "High density" is not an absolute value. A typical achievable density according to the state of the art for single heat-treated, single pressed components is about 7.2 g/cm^3 . By using warm compaction an increase of about 0.2 g/cm^3 may be reached. In this context the term "high density" is intended to mean compacts having a density of about $7.45\text{-}7.65 \text{ g/cm}^3$ and above, depending on type and amount of additives used, and type of iron-based powder used. Components having lower densities can of course also be produced but are believed to be of less interest.

[0025] In brief the advantage obtained by using the powder and method according to the present invention is that high-density SMC parts can be cost-efficiently produced. SMC parts with remarkably high magnetic induction levels together with low core losses can be obtained. Other advantages are that the mechanical strength after heat treatment is increased and that, in spite of very high densities, compacted parts with high electrical resistance can be successfully ejected from the dies without negatively influence the finish of the die walls and/or on the surfaces of the compacted SMC parts. It is thus possible to obtain parts having excellent surface finish. These results can be obtained with a single compaction step. Examples of products of special interest for the new powder compacts are inductors, stators and rotors for electrical machines, actuators, sensors and transformer cores.

[0026] The invention is further illustrated by the following examples. It is understood that the present invention is not limited thereto.

EXAMPLE 1

[0027] An iron-based water atomised powder (Somaloy 550™, available from Höganäs AB, Sweden) was used as starting material. This powder has an average particle size between 212 and 425 μm and less than 5% of the particles have a particle size below 45 μm . This powder, which is a pure iron powder, the particles of which are electrically insulated by a thin phosphorus containing barrier, was treated with 0.2% by weight of a hexadecyl-trimethoxy silane as a lubricating agent. The addition of the lubricating agent was performed as follows: hexadecyl-trimethoxy silane was diluted in ethanol to a 20% solution by weight and the solution was stirred during 60 minutes. An amount of this solution corresponding to 0.2% by weight was added during mixing to the iron powder, which had previously been heated to 75°C in the mixer. An intensive mixing was carried out in the same mixer during 3 minutes followed by mixing at a lower speed during 30 minutes and during vacuum in order to evaporate the solvent. A corresponding powder mixed with a conventional lubricant was used as comparison. This powder was mixed with Kenuolube™ before the compaction. The amount of the lubricant used was 0.5% of the composition, which is generally considered as a low amount of lubricant for components compacted at high pressures.

[0028] Rings with an inner diameter of 47 mm and an outer diameter of 55 mm and a height of 4 mm were uniaxially compacted in a single step at different compaction pressures 800, 1000 and 1200 MPa, respectively. Despite the low amount of the organo-metallic lubricating agent and high compaction pressures the surfaces of the components showed no sign of deterioration.

[0029] After compaction the parts were heat treated at 500 °C for 30 minutes in air. The obtained heat-treated rings were wound with 25 sense and 112 drive turns. The magnetic properties were measured in an LDJ 3500 Hysteresigraph. Table 1 summarizes the maximum relative permeability and the magnetic induction at 1500 and 6900 A/m respectively, measured under DC conditions. The core loss/cycle has also been measured at 1 T and at 50 Hz and at 400 Hz, respectively.

[0030] The following table 1 demonstrates the obtained results:

Table 1

Sample	Compaction Pressure MPa	Density g/cm ³	μ_{max}	B ₁₅₀₀ (T)	B ₆₉₀₀ (T)	Core loss/cycle at 1T and 50 Hz (J/kg)	Core loss/cycle at 1T and 400 Hz (J/kg)
According to the invention	800	7.45	720	1.08	1.53	0.134	0.178
	1000	7.59	790	1.15	1.59	0.126	0.163
	1200	7.64	820	1.18	1.62	0.124	0.165
Comparative example	800	7.39	620	0.95	1.46	0.142	0.200
	1000	7.47	590	0.95	1.49	0.140	0.198
	1200	7.49	550	0.92	1.48	0.140	0.193

[0031] As can be seen from table 1 the green density is significantly higher for the powder according to the invention and magnetic properties are, hence, improved compared with the materials used in the comparative examples. The comparative example also demonstrates that no or only minor improvements of the magnetic properties can be obtained by increasing the compaction pressure to 1000 MPa and 1200 MPa.

[0032] Despite the obtained high density of the samples the core losses are maintained at a low level even at 400 Hz, which shows that the electrical insulating layers are maintained.

[0033] Samples produced according to Example 1 were tested with regard to transverse rupture strength (TRS) after heat treatment at 500°C for 30 minutes in air. The transverse rupture strength was tested according to ISO 3995. Figure 1 demonstrates the transverse rupture strength at different density levels. It should be noted that, even at the same pressed density, the strength is unexpectedly higher for the material according to the invention.

EXAMPLE 2

[0034] A very high purity water atomised iron-based powder, the particles of which were provided with a thin insulating coating and which had a mean particle size above 212 μm was treated with 0.1% and 0.2% of hexadecyltrimethoxysilane,

respectively, according to the procedure in Example 1. The same iron-based powder without any lubricating agent was used as a reference.

[0035] Cylindrical samples with a diameter of 25 mm and a height of 4 mm were compacted in an uniaxially press movement at a compaction pressure of 1000 MPa.

[0036] Table 2 shows the ejection energy needed for ejecting the components and the green density obtained. The ejection energy is expressed as percentage of the ejection energy for the sample without lubricating agent.

TABLE 2

Amount of silane	Green density (g/cm ³)	Relative Ejection Energy %	Surface finish
0%	7.66	100	Seizure
0.1%	7.67	58	Good
0.2%	7.66	48	Good

[0037] From table 2 it can be seen that the energy needed for ejection is considerably reduced and the surface finish is improved by minor additions of an organo-metallic lubricating agent according to the present invention. It can also be observed that an increase from 0.1% to 0.2% by weight of a lubricating agent has a positive impact on the ejection energy.

EXAMPLE 3

[0038] This example demonstrates the effect of the chain length of the unhydrolysed group or groups (R₂) of the organo-metallic compound on the lubricating properties at ejection after compaction with high pressures. In this example various types and amounts of alkyl-alkoxy silanes (central atom Si) are used as lubricating agent. Two kinds of high purity water atomised iron-based powder provided with a thin insulating coating with two different particle size distributions were used to show the influence of the particle size. The S-powder has about 14 % of the particles less than 45 µm and a weight average particle size of about 100 µm. The C-powder has a significantly coarser particle size distribution with a weight average size of about 250 µm and less than 3% below 106 µm.

[0039] Five different kinds of organo-silanes were used (A-E):

A Methyl-trimethoxy silane

B Propyl-trimethoxy silane

C Octyl-trimethoxy silane

D Hexadecyl-trimethoxy silane

E Polyethyleneether-trimethoxy silane with 10 ethylene ether groups

[0040] Five different alkyl-alkoxy silanes in the range 0.05 to 3.0% by weight were added to the insulated iron-based powder and the obtained mixtures were compacted at 1100 MPa in a uniaxial press movement into slugs with a diameter of 25 mm and a height of 12 mm. During ejection the dynamic ejection force per unit sliding area was measured and after ejection green surface finish was evaluated and density was measured as is shown below in table 3.

TABLE 3

	Powder C	Powder C	Powder C	Powder S	Powder C	Powder S	Powder C	Powder C
Silane	0.05%	0.1%	0.2%	0.2%	0.4%	0.4%	1.0%	3.0%
A								Seizure
B							Seizure	
C			Seizure		58 N/mm ² Poor 7.60 g/cm ³			

(continued)

	Powder C	Powder C	Powder C	Powder S	Powder C	Powder S	Powder C	Powder C
5	D	89 N/mm ² Poor 7.70 g/cm ³	69 N/mm ² OK 7.70 g/cm ³	38 N/mm ² OK 7.68 g/cm ³	63 N/mm ² Poor 7.65 g/cm ³	47 N/mm ² OK 7.57 g/cm ³	54 N/mm ² OK 7.54 g/cm ³	
10	E		80 N/mm ² Poor 7.70 g/cm ³	35 N/mm ² OK 7.69 g/cm ³	75 N/mm ² Poor 7.64 g/cm ³	32 N/mm ² OK 7.59 g/cm ³	49 N/mm ² OK 7.60 g/cm ³	

[0041] As can be seen from table 3 a chain length below 8 carbon atoms in the alkyl chain does not give satisfactory results, even though the added amount is high. Hence, at least 8 atoms in the lubricating (alkyl, or polyethyleneether,) chain group or groups are needed in order to successfully eject the component. An added amount above 0.5% is believed to be of less interest, as the density of the green component will be negatively influenced. The table also shows, that when the organosilane content is less than 0.05%, ejection without damaging the component and the surface of the die is not possible for the silane "D" that contains 16 atoms in the lubricating alkyl group. However, the geometry of the component as well as the quality of the tool have a great impact on the surface condition of the component after ejection. Therefore, lower amounts than 0.05% lubricant agent, optionally mixed with conventionally used i.e. particular lubricants, can be of interest for some applications.

[0042] From table 3 it can also be concluded that extremely high densities can be obtained. The coarse powder shows superior ejection behaviour compared to the standard powder. Even powder with a standard particle size distribution can be compacted to high density (about at least 7.60 g/cm³). As is noted above, the ejection behaviour is also here greatly dependent on component geometry and tool material and quality. Thus, powders with a standard size distribution can be of interest in some applications.

EXAMPLE 4

[0043] This example demonstrates the lubrication effect of organo-metallic compounds with different central atoms. In this example the lubrication effect of four different agents have been examined i.e. silane, titanate, zirconate and aluminate, having Si, Ti, Zr and Al as the central atom, respectively. The various central atoms have different coordination numbers and chemical properties. However, the chemical structure of the organo-metallic compound was selected so that the chain length of the lubricating group or groups (R₂) would show comparable properties which can be compared with those obtained with hexadecyl-trimethoxy silane (D).

[0044] A high purity water atomised iron-based powder with a thin insulating coating were treated with 0.2% by weight of each organo-metallic compound as lubricating agent. The obtained mixtures were compacted at 1100 MPa in a uniaxial press movement into slugs with a diameter of 25 mm and a height of 12 mm. During ejection the dynamic ejection force per unit sliding area was measured and after ejection green surface finish was evaluated and density was measured as is shown below in table 4.

[0045] Four different types of organo-metallic agents were examined (A-D):

- A Isopropyl-triisostearoyl titanate
- B Neopentyl(diallyl)oxy-trineodecanonyl zirconate
- C Diisobutyl(oleyl)aceto-acetyl aluminate
- D Hexadecyl-trimethoxy silane

TABLE 4.

Organo-metallic compound	A	B	C	D
Ejection force [N/mm ²]	35	44	50	39
Density [g/cm ³]	7.68	7.68	7.68	7.68
Ejection and part quality	OK	OK	OK	OK

[0046] As can be seen from table 4 the lubricating properties of all compounds are satisfactory. Hence, the type of central atom shows only minor influence on the lubricating properties. The chain length, and to some extent the chemical structure, of the unhydrolysed group or groups are shown to provide the lubricating properties according to the present invention.

EXAMPLE 5

[0047] The influence of average particle size and particle size distribution was further investigated. Three different high purity iron-based powders with different particle size distributions, according to table 5, all of them insulated with a thin phosphate-based electrical insulation were prepared. All samples were treated according to the present invention with 0.2 wt% of hexadecyl-trimethoxy silane according to the procedure described in Example 1.

[0048] Cylindrical samples with a diameter of 25 mm and a weight of 50 grams were compacted in an uniaxially press movement at a compaction pressure of 1000 MPa and green densities above 7.6 g/cm³ for all the samples were obtained.

-TABLE 5

Particle size distribution	Sample A (%)	Sample B (%)	Sample C (%)
-45 μm	8.4	0.0	0.1
45-106 μm	52.7	15.5	1.0
106-212 μm	30.0	84.3	37.4
212-315 μm	0.1	0.2	51.0
+315 μm	0.1	0.0	10.5
Density [g/cm ³]	7.61	7.63	7.62
Surface finish	Poor*	OK	Good
* Higher amount of lubricant agent improves surface finish.			

[0049] It could be observed that the surface finish of the sample C was superior to those of the samples A and B, respectively.

EXAMPLE 6

[0050] This example illustrates the importance of the inorganic insulation.

[0051] A high purity iron powder, the particles of which are electrically insulated by a thin phosphorus-containing barrier was compared with an identical powder without the phosphorous-based inorganic insulation. Both types of powders were subsequently treated with 0.2% by weight of hexadecyl-trimethoxy silane as a lubricating agent according to the invention.

[0052] Rings with an inner diameter of 45 mm and an outer diameter of 55 mm and a height of 5 mm were uniaxially compacted in a single step at compaction pressure 1100 MPa. After compaction the parts were heat treated at 500°C for 30 minutes in air. The electrical resistivity was measured by the four-point method.

[0053] The following table 6 shows electrical resistivity and density of composite components prepared of powders with and without insulated particles.


TABLE 6

	Electrical Resistivity [$\mu\text{Ohm}\cdot\text{m}$]	Density [g/cm ³]
According to the invention	150	7.68
Comparative example	0.5	7.68

Claims

1. A ferromagnetic powder composition for die compaction to produce high density soft magnetic composite parts

comprising soft magnetic iron-based core particles wherein at least 40% of said iron-based core particles consist of particles having a particle size above 106 μm and less than 5% of said iron-based core particles having a particle size below 45 μm and wherein the surface of the core particles are surrounded by an insulating inorganic coating, and a lubricating amount of 0.05-0.5 % of a compound selected from the group consisting of silanes, titanates, aluminates, zirconates, or mixtures thereof, having the following general formula:



wherein M is a central atom selected from Si, Ti, Al, or Zr,
 R_1 is a hydrolysable group,
 R_2 is a group consisting of a lubricating organic moiety,
 wherein the sum of $m+n$ is the coordination number of the central atom;
 n is an integer ≥ 1 and
 m is an integer ≥ 1 .

2. A composition according to claim 1 wherein the compound is present as a lubricating layer on the insulated particles.
3. A composition according to claim 1 or 2, wherein R_1 is an alkoxy group having less than 12, preferably less than 6 and most preferably less than 3 carbon atoms.
4. A composition according to any one of claims 1-3, wherein R_1 is a chelate group.
5. A composition according to any one of claims 1-4, wherein the chelate group is a residue of hydroxyacetic acid ($-\text{O}(\text{O}=\text{C})-\text{CH}_2\text{O}-$) or a residue of ethylene glycol ($-\text{OCH}_2\text{CH}_2\text{O}-$).
6. A composition according to any of claims 1-5, wherein R_2 is an organic group including between 6-30, preferably 10-24 carbon atoms, and optionally including one or more hetero atoms selected from the group consisting of N, O, S and P.
7. A composition according to claim 6, wherein the R_2 group is linear, branched, cyclic, or aromatic.
8. A composition according to any of claims 6-7, wherein the R_2 group is a chain selected from the group consisting of alkyl, ether, ester, phospho-alkyl, phospho-lipid, or phospho-amine.
9. A composition according to claim 8, wherein the R_2 is selected from the group consisting of phosphato, pyrophosphato or phosphito.
10. A composition according to any one of the claims 1-8, wherein the compound is selected from the group consisting of alkyl-alkoxy silanes and polyether-alkoxy silanes.
11. A composition according to any one of the preceding claims, wherein the compound is selected from the group consisting of octyl-trimethoxy silane, hexadecyl-trimethoxy silane, polyethyleneether-trimethoxy silane, isopropyl-triisostearyl titanate, isopropyl-tri(dioctyl)phosphato titanate, neopentyl(diallyl)oxy-trineodecanoyl zirconate, neopentyl(diallyl)oxytri(dioctyl)phosphato zirconate, and diisobutyl-acetoacetyl aluminate.
12. A composition according to any one of claims 1-11, wherein the insulating inorganic coating of the iron-based particles is phosphorous based.
13. A composition according to any of claims 1-12, wherein the iron-based core particles consist of essentially pure iron.
14. A composition according to any one of the claims 1-13, wherein at least 60% of the iron-based core particles consist of particles having a particle size above 106 μm .
15. A powder composition according to any one of the claims 1-14 wherein at least 20%, preferably at least 40%, and most preferably at least 60% of the iron-based core particles consist of particles having a particle size above 212 μm .
16. A composition comprising a compound according to any one of the claims 1-15, wherein the amount of the compound is present in an amount of 0.07-0.45%, and preferably 0.08-0.4% by weight.

17. A composition according to any of claims 1-16, which is optionally mixed with additives, such as particular lubricants, binders or flow-enhancing agents.


18. Process for the preparation of soft magnetic composite materials having a density of at least 7.45 g/cm³ comprising the steps of

- providing an iron or iron-based powder composition according to any one of the claims 1-17;
- uniaxially compacting the obtained soft magnetic powder composition in a die at a compaction pressure of at least 800 MPa; and
- ejecting the green body from the compaction tool; and, optionally,
- heat-treating the compacted body.

19. Process according to claim 18, wherein the compaction is performed at a pressure of at least 900 MPa, more preferably at least 1000 MPa, and most preferably above 1100 MPa.

Patentansprüche

1. Ferromagnetische Pulverzusammensetzung zur Matrizenverdichtung für die Herstellung von hochdichten, weichmagnetischen Verbundstoffteilen, umfassend weichmagnetische Kernteilchen auf Eisenbasis, wobei mindestens 40% der Kernteilchen auf Eisenbasis aus Teilchen bestehen, die eine Teilchengröße von mehr als 106 µm aufweisen, und weniger als 5 % der Kernteilchen auf Eisenbasis eine Teilchengröße von weniger als 45 µm aufweisen und wobei die Oberfläche der Kernteilchen von einer isolierenden anorganischen Beschichtung umgeben ist, und eine gleitfähig machende Menge von 0,05-0,5 % einer Verbindung ausgewählt aus der Gruppe bestehend aus Silanen, Titanaten, Aluminaten, Zirkonaten oder Mischungen davon, die die folgende allgemeine Formel aufweist/aufweisen:



wobei M ein zentrales Atom ausgewählt unter Si, Ti, Al oder Zr ist,
 R_1 eine hydrolysierbare Gruppe ist,
 R_2 eine Gruppe ist bestehend aus einem gleitfähig machenden organischen Anteil,
wobei die Summe von $m + n$ die Koordinationszahl des zentralen Atoms ist;
 n eine ganze Zahl von ≥ 1 ist und
 m eine ganze Zahl von ≥ 1 ist.

2. Zusammensetzung nach Anspruch 1, wobei die Verbindung als gleitfähig machende Schicht auf den isolierten Teilchen vorlegt.

3. Zusammensetzung nach Anspruch 1 oder 2, wobei R_1 eine Alkoxygruppe ist, die weniger als 12, bevorzugt weniger als 6 und am bevorzugtesten weniger als 3 Kohlenstoffatome aufweist.

4. Zusammensetzung nach einem der Ansprüche 1-3, wobei R_1 eine Chelatgruppe ist.

5. Zusammensetzung nach einem der Ansprüche 1-4, wobei die Chelatgruppe ein Rest von Hydroxyessigsäure ($-O(C=O)CH$) oder ein Rest von Ethylenglykol ($-OCH_2CH_2O-$) ist.

6. Zusammensetzung nach einem der Ansprüche 1-5, wobei R_2 eine organische Gruppe ist, die zwischen 6-30, bevorzugt 10-24 Kohlenstoffatome und wahlweise ein oder mehrere Heteroatome ausgewählt aus der Gruppe bestehend aus N, O, S und P umfasst.

7. Zusammensetzung nach Anspruch 6, wobei die R_2 -Gruppe linear, verzweigt, zyklisch oder aromatisch ist.

8. Zusammensetzung nach einem der Ansprüche 6-7, wobei die R_2 -Gruppe eine Kette ist, ausgewählt aus der Gruppe bestehend aus Alkyl, Ether, Ester, Phosphoalkyl, Phospholipid oder Phosphoamin.

9. Zusammensetzung nach Anspruch 8, wobei das R_2 aus der Gruppe ausgewählt ist bestehend aus Phosphato, Pyrophosphato oder Phosphito.

EP 1 575 726 B1

10. Zusammensetzung nach einem der Ansprüche 1-8, wobei die Verbindung aus der Gruppe ausgewählt ist bestehend aus Alkylalkoxysilanen und Polyetheralkoxysilanen.

11. Zusammensetzung nach einem der vorhergehenden Ansprüche, wobei die Verbindung aus der Gruppe ausgewählt ist bestehend aus Octyltrimethoxysilan, Hexadecyltrimethoxysilan, Polyethylenethertrimethoxysilan, Isopropyltriisostearyl titanat, Isopropyltri(dioctyl)phosphatotitanat, Neopentyl(diallyl)oxytrineodecanoylzirconat, Neopentyl(diallyl)oxytri(dioctyl)phosphatozirconat und Diisobutylacetoacetylaluminat.

12. Zusammensetzung nach einem der Ansprüche 1-11, wobei die isolierende anorganische Beschichtung der Teilchen auf Eisenbasis auf Phosphor basiert.

13. Zusammensetzung nach einem der Ansprüche 1-12, wobei die Kernteilchen auf Eisenbasis im Wesentlichen aus reinem Eisen bestehen.

14. Zusammensetzung nach einem der Ansprüche 1-13, wobei mindestens 60 % der Kernteilchen auf Eisenbasis aus Teilchen bestehen, die eine Teilchengröße von mehr als 106 µm aufweisen

15. Pulverzusammensetzung nach einem der Ansprüche 1-14, wobei mindestens 20 %, bevorzugt mindestens 40 % und am bevorzugtesten mindestens 60 % der Kernteilchen auf Eisenbasis aus Teilchen bestehen, die eine Teilchengröße von mehr als 212 µm aufweisen.

16. Zusammensetzung umfassend eine Verbindung nach einem der Ansprüche 1-15, wobei die Menge der Verbindung in einer Menge von 0,07-0,45 % und bevorzugt 0,08-0,4 Gew.-% vorliegt.

17. Zusammensetzung nach einem der Ansprüche 1-16, die wahlweise mit Zusatzmitteln, insbesondere Gleitmitteln, Bindemitteln oder fließverbessernden Mitteln gemischt ist.


18. Verfahren für die Herstellung von weichmagnetischen Verbundstoffmaterialien, die eine Dichte von mindestens 7,45g/cm³ aufweisen, umfassend die Schritte des

- Bereitstellens einer Eisenpulverzusammensetzung oder Pulverzusammensetzung auf Eisenbasis nach einem der Ansprüche 1-17;
- uniaxialen Verdichtens der erhaltenen weichmagnetischen Pulverzusammensetzung in einer Matrize bei einem Verdichtungsdruck von mindestens 800 MPa; und
- Ausstoßens des grünen Körpers aus dem Verdichtungswerkzeug; und wahlweise
- Hitzebehandeln des verdichteten Körpers.

19. Verfahren nach Anspruch 18, wobei die Verdichtung bei einem Druck von mindestens 900 MPa, noch bevorzugter mindestens 1000 MPa und am bevorzugtesten mehr als 1100 MPa durchgeführt wird.

Revendications

1. Composition de poudre ferromagnétique pour compactage en filière pour produire des pièces composites faiblement magnétiques à haute densité comprenant des particules coeurs à base de fer faiblement magnétique, dans laquelle au moins 40 % desdites particules coeurs à base de fer sont constituées de particules ayant une dimension des particules supérieure à 106 µm et moins de 5 % desdites particules coeurs à base de fer ayant une dimension des particules inférieure à 45 µm et dans laquelle la surface des particules coeurs est entourée d'un revêtement inorganique isolant, et une quantité lubrifiante de 0,05 à 0,5 % d'un composé choisi dans le groupe constitué par les silanes, les titanates, les aluminates, les zirconates ou leurs mélanges, ayant la formule générale suivante :



où M est un atome central choisi parmi Si, Ti, Al ou Zr,

R₁ est un groupe hydrolysable,

R₂ est un groupe constitué d'un fragment organique lubrifiant,

où la somme de m+n est le nombre de coordination de l'atome central ;

n est un nombre entier ≥ 1 et

m est un nombre entier ≥ 1 .

2. Composition selon la revendication 1, dans laquelle le composé est présent sous forme de couche lubrifiante sur les particules isolées.
3. Composition selon la revendication 1 ou 2, dans laquelle R_1 est un groupe alcoxy ayant moins de 12, de préférence moins de 6, et le plus préférablement moins de 3 atomes de carbone.
4. Composition selon l'une quelconque des revendications 1 à 3, dans laquelle R_1 est un groupe chélate,
5. Composition selon l'une quelconque des revendications 1 à 4, dans laquelle le groupe chélate est un résidu d'acide hydroxyacétique ($-O(O=C)-CH_2O-$) ou un résidu d'éthylène glycol ($-OCH_2CH_2O-$).
6. Composition selon l'une quelconque des revendications 1 à 5, dans laquelle R_2 est un groupe organique comprenant 6 à 30, de préférence 10 à 24 atomes de carbone, et comprend facultativement un ou plusieurs hétéroatomes choisis dans le groupe constitué par N, O, S et P.
7. Composition selon la revendication 6, dans laquelle le groupe R_2 est linéaire, ramifié, cyclique ou aromatique.
8. Composition selon l'une quelconque des revendications 6 à 7, dans laquelle le groupe R_2 est une chaîne choisie dans le groupe constitué par l'alkyle, l'éther, l'ester, le phosphoalkyle, le phospholipide ou le phosphoamine.
9. Composition selon la revendication 8, dans laquelle R_2 est choisi dans le groupe constitué par le phosphato, le pyrophosphato ou le phosphito.
10. Composition selon l'une quelconque des revendications 1 à 8, dans laquelle le composé est choisi dans le groupe constitué par les alkylalcoxysilanes et les polyéthéralcoxysilanes.
11. Composition selon l'une quelconque des revendications précédentes, dans laquelle le composé est choisi dans le groupe constitué par l'octyltriméthoxysilane, l'hexadécyltriméthoxysilane, le polyéthylèneéthertriméthoxysilane, l'isopropyltriisostéarylitanate, l'isopropyltri(dioctyl)phosphatotitanate, le néopentyl(diallyl)oxytrinéodécanylzirconate, le néopentyl(diallyl)oxytri(dioctyl)phosphatozirconate et le diisobutylacétoacétalaluminate.
12. Composition selon l'une quelconque des revendications 1 à 11, dans laquelle le revêtement inorganique isolant des particules à base de fer est à base de phosphore.
13. Composition selon l'une quelconque des revendications 1 à 12, dans laquelle les particules coeurs à base de fer sont constituées essentiellement de fer pur.
14. Composition selon l'une quelconque des revendications 1 à 13, dans laquelle au moins 60 % des particules coeurs à base de fer sont constituées de particules ayant une dimension des particules supérieure à 106 μm .
15. Composition de poudre selon l'une quelconque des revendications 1 à 14, dans laquelle au moins 20 %, de préférence au moins 40 %, et le plus préférablement au moins 60 % des particules coeurs à base de fer sont constituées de particules ayant une dimension des particules supérieure à 212 μm .
16. Composition comprenant un composé selon l'une quelconque des revendications 1 à 15, dans laquelle le composé est présent dans une quantité de 0,07 à 0,45 %, de préférence de 0,08 à 0,4 % en poids.
17. Composition selon l'une quelconque des revendications 1 à 16, qui est facultativement mélangée avec des additifs, notamment des lubrifiants particuliers, des liants ou des fluidifiants.
18. Procédé de préparation de matériaux composites faiblement magnétiques ayant une densité d'au moins 7,45 g/cm³, comprenant les étapes consistant à
 - fournir une composition de poudre de fer ou à base de fer selon l'une quelconque des revendications 1 à 17 ;
 - compacter uniaxialement la composition de poudre faiblement magnétique obtenue dans une filière à une pression de compactage d'au moins 800 MPa;

EP 1 575 726 B1

- éjecter le corps vert de l'outil de compactage ; et facultativement
- traiter thermiquement le corps compacté.

5 **19.** Procédé selon la revendication 18, dans lequel le compactage est effectué à une pression d'au moins 900 MPa, plus préféablement d'au moins 1 000 MPa, et le plus préféablement de plus de 1 100 MPa.

10

15

20

25

30

35

40

45

50

55

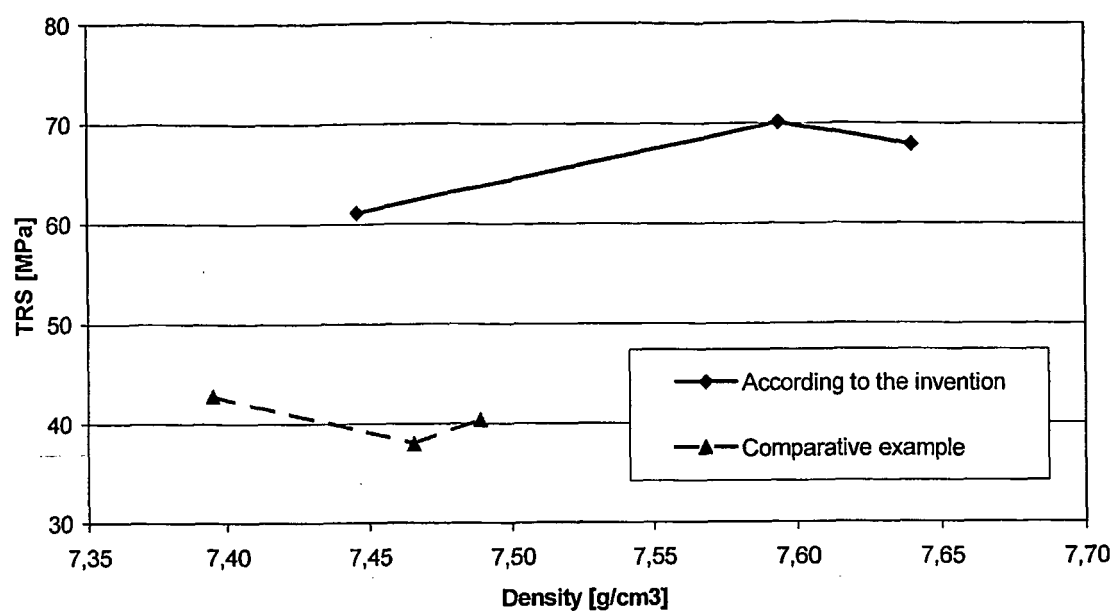


Figure 1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6348265 B [0008]
- US 4820338 A [0014]
- US 6537389 A [0014]
- US 6537389 B [0015]
- WO 0238315 A [0021]