



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01J 13/00	A1	(11) International Publication Number: WO 98/13135 (43) International Publication Date: 2 April 1998 (02.04.98)
(21) International Application Number: PCT/US97/16520 (22) International Filing Date: 18 September 1997 (18.09.97) (30) Priority Data: 08/721,797 27 September 1996 (27.09.96) US (71) Applicant: CABOT CORPORATION [US/US]; 75 State Street, Boston, MA 02109-1806 (US). (72) Inventors: ACKERMAN, William, C.; 1075 Baytowne Drive No. 16, Champaign, IL 61821 (US). SMITH, Douglas, M.; 1412 Marquette Place, N.E., Albuquerque, NM 87106 (US). MASKARA, Alok; 1800 Silver Avenue, S.E., Albuquerque, NM 87106 (US). (74) Agent: LANDO, Michelle, B.; Cabot Corporation, 157 Concord Road, P.O. Box 7001, Billerica, MA 01821-7001 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	
(54) Title: COMPOSITIONS AND INSULATION BODIES HAVING LOW THERMAL CONDUCTIVITY		
(57) Abstract <p>The present invention relates to particulate compositions having improved thermal conductivity values. An embodiment of the present invention is a particulate composition which under a 103421 Pa load, at 20 °C, and at a pressure (P) within the range of 133.322 – 13332.2 Pa, in Nitrogen, has: a packing density of less than or equal to 160 kg/m³, and a Thermal Conductivity (TC) at 133.322 – 1333 – 322 Pa of less than or equal to (0.260lnP + 4.53) milliWatt/meterK (mW/m.K) and a TC at 1333.322 – 13332.2 Pa of less than or equal to (0.824lnP + 0.47) mW/m.K. A preferred particulate composition is a gel composition. Also disclosed are insulation bodies comprising the particulate compositions.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Compositions and Insulation Bodies Having Low Thermal
Conductivity

Field of the Invention:

5 The present invention relates to compositions with improved thermal conductivity properties. The present invention also relates to insulation bodies comprising the compositions.

Background:

10 Insulation materials are currently utilized in applications which include windows, buildings, appliances, as well as other industrial and home equipment. One type of insulation is "powder-in-vacuum" insulation, wherein a vacuum space is filled with a particulate insulating
15 composition, such as a powder. Powder-in-vacuum insulation may be utilized in insulation panels, in applications including home and industrial appliances, including refrigerators, water heaters, and equipment for the storage and transport of high and low temperature liquids.

20 The terminology "vacuum panel" or "vacuum insulation panel" may be utilized to describe powder-in-vacuum insulation, e.g. an insulation structure having reduced internal pressure. Vacuum insulation panels generally comprise an insulating composition and a vessel formed of a
25 substantially impermeable film surrounding the filler material. The vessel is generally evacuated to an internal pressure below atmospheric pressure and hermetically sealed. In addition to providing insulating value, the functions of the insulating composition include supporting
30 the skin of the vessel so that the vessel does not collapse during evacuation.

Vacuum insulation panels may be advantageously utilized in insulation applications including the walls of the refrigeration appliances. It is advantageous for such
35 panels to remain effective for the life of the appliance, which may exceed 20 years.

The insulating characteristics of a vacuum panel are a function of the thermal conductivity of the particulate composition utilized and the degree of vacuum established and maintained.

5 There are at least several difficulties which may be encountered in the use of an insulating system in which a vacuum space is filled with an insulation material. In general, greater insulating values are achieved at vacuum levels farther beneath ambient, or put another way, thermal
10 conductivity increases with increasing absolute pressure. As a result, manufacturing costs are increased by the need to establish vacuum levels farther beneath ambient (low absolute pressures), to provide a greater initial insulating value (lower thermal conductivity) and to
15 minimize the reduction of the insulating value as a result of the loss of vacuum level through leakage, temperature increase and/or insulation material off-gassing. In addition, manufacturing and production costs are increased by the need for substantially gas impermeable barrier
20 materials (e.g. vacuum bags) which will hold the insulation material, and maintain low vacuum levels.

It would be advantageous to have compositions which achieve improved thermal conductivities. Such compositions would be advantageous for use in insulation structures
25 including, but not limited to, insulation panels having reduced internal pressures or other forms of powder-in-vacuum insulation.

It would also be advantageous to have a composition which achieves a thermal conductivity value satisfactory
30 for use in general insulation applications, at a vacuum level closer to ambient pressure than heretofore known insulating materials to thereby lower the production and manufacturing costs associated with establishing vacuum levels farther from ambient conditions, and the need for
35 highly impermeable barrier materials, to maintain the vacuum levels. Such an insulating composition may

advantageously increase the useful lifetime of the insulation structure.

Summary of the Invention:

5 The present invention provides a particulate composition which under 103421 Pa (15 psi) load, at 20° C (Celsius), and at a pressure (P) within the range of 133.322 - 13332.2 Pa (1-100 Torr), in Nitrogen has:
a packing density of less than or equal to 160
10 kilograms per cubic meter (kg/m^3) and
a Thermal Conductivity (TC) at 133.322-1333.322 Pa of less than or equal to $0.260\ln P + 4.53$ milliWatt/meterK ($\text{mW/m}\cdot\text{K}$) ($\text{TC} \leq (0.260\ln P + 4.53) \text{ mW/m}\cdot\text{K}$) and a TC at 1333.322-13332.2 Pa of less than or equal to $(0.824\ln P +$
15 $0.47) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.824\ln P + 0.47) \text{ mW/m}\cdot\text{K}$).

In accordance with one aspect of the present invention there is provided a particulate composition which under a 103421 Pa load, at 20° C, and at a pressure of 133.322 Pa (1 Torr), in Nitrogen, has:
20 a packing density of less than or equal to 160 kg/m^3 ,
and
a TC of less than or equal to $5.8 \text{ mW/m}\cdot\text{K}$.

In accordance with another aspect of the present invention there is provided a particulate composition which
25 under a 103421 Pa load, at 20° C, and at a pressure of 1333.22 Pa (10 Torr), in Nitrogen, has :

a packing density of less than or equal to 160 kg/m^3 ,
and

a TC of less than or equal to $6.4 \text{ mW/m}\cdot\text{K}$.

30 In accordance with a further aspect of the present invention there is provided a particulate composition which under a 103421 Pa load, at 20° C, and at a pressure of 13332.2 Pa (100 Torr), in Nitrogen, has :

a packing density of less than or equal to 160 kg/m^3 ,
35 and

a TC of less than or equal to $9 \text{ mW/m}\cdot\text{K}$.

In accordance with a further aspect of the present invention there is provided a particulate composition which under 103421 Pa (15 psi) load, at 20° C, and at any pressure (P) range of 133.322 - 13332.2 Pa (1-100 Torr), in
5 Nitrogen, has :

a packing density of less than or equal to 160 kg/m^3 ,
and

a Thermal Conductivity (TC) at 133.322-1333.322 Pa of less than or equal to $0.260 \ln P + 4.53$ milliWatt/meterK
10 (mW/m•K) ($TC \leq (0.260 \ln P + 4.53) \text{ mW/m}\cdot\text{K}$) and a TC at 1333.322-13332.2 Pa of less than or equal to $(0.824 \ln P + 0.47)$ mW/m•K ($TC \leq (0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$).

As used herein with reference to the compositions of the present invention "particulate" refers to a non-
15 monolithic structure comprising discrete particles, granules, fibers and/or mixtures thereof. A preferred composition of the present invention is a gel composition.

In accordance with a further aspect of the present invention there is provided a gel composition produced
20 without supercritical drying having a porosity of greater than or equal to 0.95 and a rod density of less than or equal to 100 kg/m^3 .

The present invention also provides an insulation body comprising a composition of the present invention.

25 The features and advantages of the compositions and insulation of the present invention will become apparent from the following more detailed description.

Brief Description of the Drawings:

30 Figure 1 provides a graphical depiction of the formulas utilized in the description of the present invention.

Figure 2 depicts a vacuum insulation panel embodiment of an insulation body of the present invention.

35 Figure 3 depicts an embodiment of an apparatus utilized in analyzing Thermal Conductivity.

Figure 4 depicts an embodiment of an apparatus for placing a composition under a 103421 Pascals (Pa) load for determining packing density and TC under load.

5 Figure 5 is a schematic illustration of the example of a process for producing gel compositions described in the Examples herein.

Figure 6 is a graphical representation of a particle size distribution produced utilizing the laboratory equipment described in the Examples herein.

10 Figure 7 is a graphical representation of the thermal conductivity (TC) of different materials and is discussed in Example 1 below.

Figure 8 is another graphical representation of the thermal conductivity (TC) of different materials discussed in Example 1 below.

15 Figure 9 is a graphical representation of the thermal conductivity (TC) of materials which differ in packing density, and is discussed in Example 2 below.

Figure 10 is a graphical representation of the thermal conductivity (TC) of materials which differ in particle size and is discussed in Example 3 below.

20 Figure 11 is a graphical representation of the thermal conductivity (TC) of materials which differ in the type and presence of an opacifying agent and is discussed in Example 4 below.

25 Figure 12 is a graphical representation of the thermal conductivity (TC) of materials which differ in the type and presence of a carbon black opacifying agent and is discussed in Example 5 below.

30

Detailed Description of the Invention:

The present invention provides a particulate composition which under 103421 Pa (15 psi) load, at 20° C (Celsius), and at a pressure (P) within the range of
35 133.322 - 13332.2 Pa (1-100 Torr), in Nitrogen, has:

a packing density of less than or equal to 160 kg/m^3 , preferably less than or equal to 140 kg/m^3 , more preferably $10\text{-}120 \text{ kg/m}^3$ and

a Thermal Conductivity (TC) at $133.322\text{-}1333.322 \text{ Pa}$ of less than or equal to $0.260 \ln P + 4.53 \text{ milliWatt/meterK}$ ($\text{mW/m}\cdot\text{K}$) ($\text{TC} \leq (0.260 \ln P + 4.53) \text{ mW/m}\cdot\text{K}$), preferably less than or equal to $(0.304 \ln P + 3.91) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.304 \ln P + 3.91) \text{ mW/m}\cdot\text{K}$) and a TC at $1333.322\text{-}13332.2 \text{ Pa}$ of less than or equal to $(0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$), preferably less than or equal to $(0.825 \ln P + 0.16) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.825 \ln P + 0.16) \text{ mW/m}\cdot\text{K}$).

In formulas utilized herein "ln" refers to the natural log ($\log_e 1 = \ln 1 = 0$).

Figure 1 provides a graphical depiction of the formulas utilized herein in describing compositions of the present invention. The upper curves in Figure 1 represent $\text{TC} = (0.260 \ln P + 4.53) \text{ mW/m}\cdot\text{K}$ at $133.322\text{-}1333.322 \text{ Pa}$ and $\text{TC} = (0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$ at $1333.322\text{-}13332.2 \text{ Pa}$. The lower curves in Figure 1 represent $\text{TC} = (0.304 \ln P + 3.91) \text{ mW/m}\cdot\text{K}$ at $133.322\text{-}1333.322 \text{ Pa}$ and $\text{TC} = (0.825 \ln P + 0.16) \text{ mW/m}\cdot\text{K}$ at $1333.322\text{-}13332.2 \text{ Pa}$.

In accordance with one aspect of the present invention there is provided a particulate composition which under a 103421 Pa load, at 20° C , and at a pressure of 133.322 Pa (1 Torr), in Nitrogen, has:

a packing density of less than or equal to 160 kg/m^3 , preferably less than or equal to 140 kg/m^3 , more preferably $10\text{-}120 \text{ kg/m}^3$ and

a TC of less than or equal to $5.8 \text{ mW/m}\cdot\text{K}$, preferably less than or equal to $5.4 \text{ mW/m}\cdot\text{K}$.

In accordance with another aspect of the present invention there is provided a particulate composition which under a 103421 Pa load, at 20° C , and at a pressure of 1333.22 Pa (10 Torr), in Nitrogen, has:

a packing density of less than or equal to 160 kg/m^3 , preferably less than or equal to 140 kg/m^3 , more preferably $10\text{-}120 \text{ kg/m}^3$ and

a TC of less than or equal to $6.4 \text{ mW/m}\cdot\text{K}$, preferably
5 less than or equal to $6.1 \text{ mW/m}\cdot\text{K}$.

In accordance with a further aspect of the present invention there is provided a particulate composition which under a 103421 Pa load, at 20° C , and at a pressure of 13332.2 Pa (100 Torr), in Nitrogen, has:

10 a packing density of less than or equal to 160 kg/m^3 , preferably less than or equal to 140 kg/m^3 , more preferably $10\text{-}120 \text{ kg/m}^3$ and

a TC of less than or equal to $9 \text{ mW/m}\cdot\text{K}$, preferably less than or equal to $8 \text{ mW/m}\cdot\text{K}$.

15 In accordance with a further aspect of the present invention there is provided a particulate composition which under 103421 Pa (15 psi) load, at 20° C , and at any pressure (P) range of $133.322 - 13332.2 \text{ Pa}$ ($1\text{-}100 \text{ Torr}$), in Nitrogen, has :

20 a packing density of less than or equal to 160 kg/m^3 , preferably less than or equal to 140 kg/m^3 , more preferably $10\text{-}120 \text{ kg/m}^3$ and

a Thermal Conductivity (TC) at $133.322\text{-}1333.322 \text{ Pa}$ of less than or equal to $0.260 \ln P + 4.53 \text{ milliWatt/meterK}$
25 ($\text{mW/m}\cdot\text{K}$) ($\text{TC} \leq (0.260 \ln P + 4.53) \text{ mW/m}\cdot\text{K}$), preferably less than or equal to $(0.304 \ln P + 3.91) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.304 \ln P + 3.91) \text{ mW/m}\cdot\text{K}$) and a TC at $1333.322\text{-}13332.2 \text{ Pa}$ of less than or equal to $(0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.824 \ln P + 0.47) \text{ mW/m}\cdot\text{K}$), preferably less than or equal to $(0.825 \ln P + 0.16) \text{ mW/m}\cdot\text{K}$ ($\text{TC} \leq (0.825 \ln P + 0.16) \text{ mW/m}\cdot\text{K}$).
30

The foregoing description of the compositions of the present invention is provided with reference to selected pressures, including pressures within the range of $133.322 - 13332.2 \text{ Pa}$ ($1\text{-}100 \text{ Torr}$). The selected pressure refers to
35 the pressure within the vacuum chamber utilized in determining the TC of the composition.

The compositions of the present invention may be advantageously utilized as an insulation material to reduce heat transmission in insulation applications which include, but are not limited to panels (e.g. powder in vacuum panels), blankets, walls, housings and the like.

The compositions of the present invention are particularly advantageous for use as an insulating material in a structure under vacuum, for example in a vacuum bag, such as those utilized in vacuum panels.

Thermal conductivity ("TC") is a measure of the thermal insulating capabilities of a material. TC may be expressed as milliWatt per meter K (mW/m•K) in SI units and as (BTU)(inch) per (hour)(square feet)(°F) in English units. Greater numerical values of TC correspond to greater thermal conductivity and lower insulating ability. Lower numerical values of thermal conductivity correspond to greater insulating ability.

TC is the inverse of thermal resistivity. Thermal resistivity may be reported as (meter)(K)/milliWatt in SI units and as (hour)(square feet)(°F) per (BTU)(inch) in English units, often commonly referred to R-Value/inch. Greater numerical values of thermal resistivity correspond to greater insulating ability, and thus lower TC.

The TC values described and reported herein may be easily converted to thermal resistivity values utilizing the following formula:

$$\text{thermal resistivity} = 1/\text{TC.} \quad \blacktriangledown$$

For a porous particulate composition TC may vary as a function of the environmental conditions, such as the atmosphere, temperature and pressure which surround and/or fills the pores. For example, in insulation wherein an insulating composition is under vacuum, TC will be affected by the degree of vacuum established and maintained.

More details relating to TC are set forth in ASTM Terminology Standard C-168. The Thermal Conductivity (TC) values reported herein were determined in the manner known in the art utilizing ASTM Test Procedure C1114-92. More

details relating to the procedure for determining TC are set forth below.

Packing density refers to the mass or weight of the composition divided by its volume. The mass or weight of the composition, and its volume may be determined utilizing conventional techniques.

The utility of an insulating composition will depend in part on its density at a desired TC. Denser compositions would require that more material be used to achieve a desired degree of insulation. Generally, the use of more material will result in higher cost.

The insulation properties of the composition of the present invention are described with reference to the composition being under an external load of 103421 Pa (15 psi). The 103421 Pa (15 psi) load may be obtained by compressing the composition utilizing known techniques. These techniques include the following: transferring the composition into a pouch, sealing the pouch, and placing the pouch between two metal plates and compressing uniaxially without edge constraint to an external load of 103421 Pa (15 psi). Compression is maintained for the TC measurement.

The temperature of 20° C, as used in the descriptions of the compositions of the present invention, refers to the temperature at which the TC measurement is conducted.

As used in the description of the present invention "Nitrogen" refers to a gaseous atmosphere comprising nitrogen as a major ingredient. The properties of the composition of the present invention are described with reference to nitrogen as the gas in the pores and surrounding the composition of the present invention. The reference to nitrogen in the description of the present invention provides a means for comparing the TC of the composition of the present invention to the TC of other compositions. However, in embodiments of the composition of the present invention the surrounding atmosphere may comprise air, nitrogen, or a gas with a different thermal

conductivity, for example, Argon, Krypton or Xenon which have lower thermal conductivities.

Preferred embodiments of compositions of the present invention have a BET surface area of greater than or equal to 200 m²/g, preferably greater than or equal to 400 m²/g, more preferably greater than or equal to 500 m²/g. BET surface area may be determined utilizing ASTM test procedure D1993.

In preferred embodiments of compositions of the present invention the size, and size distribution, of the intergranular spaces between the particles, are minimized by utilizing a composition comprising particles having an average particle size of between 50-500 microns, preferably between 50-250 microns. These particle sizes may be achieved by conventional techniques, for example milling and/or physical separation techniques.

Preferred embodiments of compositions of the present invention are compositions with a porosity of greater than or equal to 0.90, more preferably greater than or equal to 0.93. Porosity is defined as the fraction of the sample volume that is pores, both in and around the particulate material and may be determined by the following formula:

$$\text{Porosity} = 1 - \frac{\text{(measured rod density in porous form)}}{\text{(density of the material in solid form)}}$$

More details relating to the measurement of porosity are provided below.

A preferred composition of the present invention is a gel composition comprising a gel component.

As used herein gel compositions include, but are not limited to aerogels, xerogels and the like produced with or without supercritical drying.

Among the gel components suitable for use in the composition of the present invention are included: oxide gels, including metal oxide gels such as silica gels, titania gels, alumina gels and the like; polymeric gels,

such as resorcinol-formaldehyde (R-F) gels, melamine formaldehyde (M-F) gels, phenol-furfural (P-F) gels and the like. The preferred gel component is a metal oxide gel. A detailed description of "gels" and "gel components" is set forth in published PCT application 96/18456 the disclosure of which is hereby incorporated herein by reference. Preferably the gel component is a silica aerogel, more preferably a silica aerogel produced from a sodium silicate precursor.

Also preferred is a gel composition which includes an opacifying agent.

Suitable opacifying agents include those which will minimize the travel of IR radiation through the composition and include, but are not limited to carbonaceous materials, iron oxides, Al_2O_3 , $FeTiO_3$, TiO_2 , ZrO_2 and other opacifying agents known in the art. A preferred opacifying agent comprises a carbonaceous material. Carbonaceous materials include: carbon black; activated carbon; graphite; composites comprising carbon black and metal oxide (e.g. silica); and blends including such carbonaceous filler materials. More preferably the opacifying agent is a carbon black. A preferred carbon black has a nitrogen surface area (N_2SA) of at least $10\text{ m}^2/\text{g}$, preferably 15 to $500\text{ m}^2/\text{g}$.

In a preferred embodiment of a composition of the present invention, the composition comprises greater than or equal to 3%, preferably greater than or equal to 5%, more preferably 5 to 30%, by weight, opacifying agent.

The opacifying agent may be combined with the gel component in a variety of manners. The opacifying agent may be physically mixed in dry form with the gel component after drying. Preferably the opacifying agent is encapsulated within the matrix of the gel component, for example by combining the opacifying agent with the gel component prior to gelation of the gel component.

To improve handling of the gel composition, the opacifying agent is preferably attached to the gel

component. Details relating to the meaning of the term "attached" as used herein, are set forth in published PCT application WO96/18456 referenced above. As set forth in published PCT application WO96/18456, a Scanning Electron
5 Microscope (SEM) image of a gel composition comprising an attached opacifying agent, in particular an attached carbonaceous component, differs from the SEM image of a composition wherein the gel component and the opacifying agent are physically mixed, or a composition wherein the
10 opacifying agent is encapsulated within, but not attached to, the gel matrix of the gel component. In addition, the Rub-Off value of a gel composition comprising an attached opacifying agent, in particular an attached carbonaceous component, will generally be less than the Rub-Off value of
15 a composition wherein the gel component and the opacifying agent are physically mixed, or a composition wherein the opacifying agent is encapsulated within, but not attached to, the gel matrix of the gel component.

If desired, the opacifying agent may be treated, for
20 example with chemical treating agents, to render the opacifying agent attachable to the gel component. As explained in PCT published application WO96/18456 carbonaceous materials, in particular carbon blacks, may be treated in the following manner to render the carbonaceous
25 material attachable to the gel component.

An attachable carbonaceous component may be prepared by reacting a carbonaceous component with a diazonium salt in a liquid reaction medium to attach at least one organic group to the surface of the carbonaceous component.
30 Preferred reaction media include water, any medium containing water, and any medium containing alcohol. Water is the most preferred medium.

Modified carbonaceous components and various methods for their preparation are described in: published PCT
35 application WO96/18688 entitled "Reaction of Carbon Black with Diazonium Salts, Resultant Carbon Black Products and Their Uses"; published PCT application WO96/18690 entitled

"Reaction of Carbon Materials with Diazonium Salts and Resultant Carbon Products"; published PCT application WO96/18695 entitled "Ink Jet Ink Formulations Containing Modified Carbon Products"; published PCT application
5 WO96/18694 entitled "Non-Aqueous Inks and Coatings Containing Carbon Products"; published PCT application WO96/18696 entitled "Aqueous Inks and Coatings Containing Modified Carbon Products"; published PCT application
10 WO96/18689 entitled "Carbon Black Products for Coloring Mineral Binders" and published PCT application WO96/18456 referenced above. The disclosure of each of these published PCT applications is hereby incorporated herein by reference.

15 A method of preparing attachable carbonaceous components, for use in the gel compositions of the present invention, is described in the following paragraph with reference to carbon black as the carbonaceous component. Similar methods could be performed to prepare attachable carbonaceous components other than carbon black.

20 To prepare attachable carbon black, the diazonium salt need only be sufficiently stable to allow reaction with the carbon black. Thus, that reaction can be carried out with some diazonium salts otherwise considered to be unstable and subject to decomposition. Some decomposition processes
25 may compete with the reaction between the carbon black and the diazonium salt and may reduce the total number of organic groups attached to the carbon black. Further, the reaction may be carried out at elevated temperatures where many diazonium salts may be susceptible to decomposition.
30 Elevated temperatures may also advantageously increase the solubility of the diazonium salt in the reaction medium and improve its handling during the process. However, elevated temperatures may result in some loss of the diazonium salt due to other decomposition processes.

35 The carbon black can be reacted with a diazonium salt when present as a dilute, easily stirred, aqueous slurry, or in the presence of the proper amount of water for carbon

black pellet formation. If desired, carbon black pellets may be formed utilizing a conventional pelletizing technology.

5 A set of organic groups which may be attached to the carbon black are organic groups substituted with an ionic or an ionizable group as a functional group. An ionizable group is one which is capable of forming an ionic group in the medium of use. The ionic group may be an anionic group or a cationic group and the ionizable group may form an
10 anion or a cation.

Ionizable functional groups forming anions include, for example, acidic groups or salts of acidic groups. The organic groups, therefore, include groups derived from organic acids. Preferably, when it contains an ionizable
15 group forming an anion, such an organic group has a) an aromatic group or a C₁-C₁₂ alkyl group and b) at least one acidic group having a pK_a of less than 11, or at least one salt of an acidic group having a pK_a of less than 11, or a mixture of at least one acidic group having a pK_a of less
20 than 11 and at least one salt of an acidic group having a pK_a of less than 11. The pK_a of the acidic group refers to the pK_a of the organic group as a whole, not just the acidic substituent. More preferably, the pK_a is less than 10 and most preferably less than 9. Preferably, the
25 aromatic group or the C₁-C₁₂ alkyl group of the organic group is directly attached to the carbon black. The aromatic group may be further substituted or unsubstituted, for example, with alkyl groups. The C₁-C₁₂ alkyl group may be branched or unbranched and is preferably ethyl. More
30 preferably, the organic group is a phenyl or a naphthyl group and the acidic group is a sulfonic acid group, a sulfinic acid group, a phosphonic acid group, or a carboxylic acid group. Examples include -COOH, -SO₃H and -PO₃H₂, and their salts, for example -COONa, -COOK, -COO-
35 NR₄⁺, -SO₃Na, -HPO₃Na, -SO₃⁻ NR₄⁺, and PO₃Na₂, where R is an alkyl or phenyl group. Particularly preferred ionizable

substituents are -COOH and -SO₃H and their sodium and potassium salts.

Most preferably, the organic group is a substituted or unsubstituted sulfophenyl group or a salt thereof; a substituted or unsubstituted (polysulfo) phenyl group or a salt thereof; a substituted or unsubstituted sulfonaphthyl group or a salt thereof; or a substituted or unsubstituted (polysulfo) naphthyl group or a salt thereof. A preferred substituted sulfophenyl group is hydroxysulfophenyl group or a salt thereof.

Specific organic groups having an ionizable functional group forming an anion are p-sulfophenyl, 4-hydroxy-3-sulfophenyl, and 2-sulfoethyl.

Amines represent examples of ionizable functional groups that form cationic groups and can be attached to the same organic groups as discussed above for the ionizable groups which form anions. For example, amines may be protonated to form ammonium groups in acidic media. Preferably, an organic group having an amine substituent has a pK_b of less than 5. Quaternary ammonium groups (-NR₃⁺) and quaternary phosphonium groups (-PR₃⁺) also represent examples of cationic groups and can be attached to the same organic groups as discussed above for the ionizable groups which form anions. Preferably, the organic group contains an aromatic group such as a phenyl or a naphthyl group and a quaternary ammonium or a quaternary phosphonium group. The aromatic group is preferably directly attached to the carbon black. Quaternized cyclic amines, and quaternized aromatic amines, can also be used as the organic group. Thus, N-substituted pyridinium compounds, such as N-methyl-pyridyl, can be used in this regard.

It is also possible to create an opacified gel by utilizing a gel precursor with inherent opacity, or by chemically modifying the surface of a gel or gel precursor. The chemical modification may be accomplished, for example, by attaching an organic composition to the surface of the

gel and pyrolyzing the non-carbon constituents of the organic composition to opacify the gel.

A preferred composition of the present invention may be produced by conventional processes for producing gel compositions, for example conventional sol-gel processing. In particular the gel compositions may be produced by the processes disclosed in the Examples herein and the Examples in the referenced applications and their microstructure may be tailored to optimize properties desired for specific applications. Various precursors, including metal alkoxides, colloidal suspensions, and combinations thereof may be utilized with a variety of mechanisms of gelation to synthesize compositions of the present invention. By varying processing conditions, such as time, temperature, pH, and pore fluid, the microstructure of the composition may be altered.

As explained in detail in the Examples set forth below, gel compositions of the present invention may be produced from a solution comprising gel precursor solids. A gel composition of the present invention with a TC and packing density under load falling within the present claims may be produced from a solution with a solids percentage by weight sufficiently low to achieve the desired packing density and by processing the solution, utilizing sol-gel processing techniques, in a manner wherein a low solids concentration is maintained in the final gel composition.

In particular, a gel composition of the present invention may be produced by the following method:

- 1) initiating gelation, for example through the use of a catalyst, in a solution comprising the gel precursor solids, or the gel precursor and opacifying agent, at an initial solids concentration to achieve the desired solids concentration in the final gel composition;
- 2) allowing gelation to proceed to a predetermined degree of completion;

3) if desired, aging the gel at a temperature, and for a period of time sufficient to achieve the mechanical characteristics desired in the final gel composition;

4) if desired, washing the gel;

5) if desired, exchanging the pore fluid

6) if desired, chemically treating the gel; and

7) removing liquid from the resulting gel composition, for example by drying.

Individual process steps 3, 4, 5 and/or 6, if utilized, may be performed in any order, and may be repeated to achieve gel compositions with desirable characteristics.

In a preferred method a composition of the present invention may be produced from a gel precursor by a process comprising:

15 initiating gelation in a solution comprising gel precursor solids and allowing gelation to proceed to a predetermined degree of completion;

contacting the initial gel with a surface modification agent and

20 removing liquid from the resulting gel to form the gel composition.

The process for producing a surface modified gel composition from a gel precursor may further include one or more of the following steps:

25 aging the initial gel at a temperature, and for a period of time sufficient to achieve the mechanical characteristics desired in the final gel composition prior to contact with the surface modification agent;

30 washing the initial gel prior to contact with the surface modification agent;

aging the resulting gel at a temperature, and for a period of time sufficient to achieve the mechanical characteristics desired in the final gel composition after contact with the surface modification agent;

35 exchanging pore fluid in the resulting gel prior to contact with the surface modification agent;

exchanging pore fluid in the resulting gel after contact with the surface modification agent; and/or washing the gel after contact with the surface modification agent.

5 In addition, if other ingredients, such as opacifying agents and the like are desired in the final gel composition, these ingredients may be added to the solution prior to the initiation of gelation.

As understood by those of ordinary skill in the art, 10 the solids concentration of the solution, which may comprise for example gel component solids and opacifying agent solids, is sufficient to achieve the densities desired in the final composition. In a preferred method of producing compositions of the present invention the solids 15 concentration of the solution is less than or equal to 8%, preferably less than or equal to 7%, to achieve the packing densities desired for the compositions of the present invention.

One example of a preferred method of producing gel 20 compositions, which may be utilized to produce compositions of the present invention, is described in published PCT application WO94/25149, assigned to the University of New Mexico, the disclosure of which is hereby incorporated herein by reference. In the method described in WO94/25149 25 the internal pore surface of a wet gel, for example an alkoxide-derived silica gel, is reacted before drying with an organic surface modification agent comprising the formula R_xMxY where R is an organic group, M is Si or Al and X is a halogen, e.g. trimethylchlorosilane 30 $((CH_3)_3SiCl)$, so that significant changes in the subsequent drying of the gels at non-supercritical pressures are obtained which leads to greatly reduced shrinkage during drying.

Gel precursors include but are not limited to oxide, 35 polymeric and particulate gel precursors known in the art, such as:

Metal Oxide Gel	Form(s) as Gel Precursor
SiO ₂	Alkoxide, Silicate Compositions, Colloidal, Pyrogenic
TiO ₂	Alkoxide, Colloidal, Pyrogenic, Titanate Compositions, Titanium Halides
Al ₂ O ₃	Alkoxides, Colloidal, Aluminate Compositions, Salts, Pyrogenic, Aluminum Halides
ZrO ₂	Alkoxides, Colloidal, Zirconate Compositions, Salts, Pyrogenic, Zirconium Halides

Polymeric Gel	Form(s) as Gel Precursor
resorcinol-formaldehyde (R-F)	polyhydroxy benzenes (e.g. resorcinol) and formaldehyde
melamine-formaldehyde (M-F)	melamine and formaldehyde, functionalized melamine-formaldehyde resins
phenol-furfural (P-F)	phenol and furfural

5 The choice of a particular precursor is made based on the type of composition desired. Preferably the gel component of the composition of the present invention is produced from a sodium silicate precursor.

10 The opacifying agent utilized in the composition of the present invention is preferably added during preparation of the gel. More particularly, the opacifying agent may be predispersed in the sol precursor to the gel at a stable pH and then the pH adjusted to promote gelation. The preferred result is a composition wherein

the opacifying agent is attached to the gel component, or encapsulated within the gel matrix. As discussed above, use of an attachable opacifying agent is preferred to achieve a gel composition wherein an opacifying agent is attached to a gel component.

Further details relating to the production of compositions of the present invention are provided in the Examples described herein.

In accordance with an additional aspect of the present invention there is provided an insulation body comprising a particulate composition of the present invention. The insulation body may further comprise a barrier, film, structure, membrane or other means for restraining and/or enclosing the particulate composition of the present invention. In addition, a particulate composition of the present invention may be added as a component of a composition which is foamed, extruded, molded or otherwise formed into a definable volume.

Potential embodiments of an insulation body of the present invention include but are not limited to insulating structures. The term structure is utilized to refer to any enclosed space, which may or may not be evacuated (under vacuum), which may be filled, or partially filled, with an a particulate composition of the present invention. Such structures include, but are not limited to panels, blankets, walls, housings and the like. An insulation body of the present invention may be utilized in any structural shape designed to insulate a system.

A preferred embodiment of an insulation body of the present invention is a vacuum insulation panel. The vacuum insulation panel comprises a particulate composition of the present invention under vacuum and a substantially gas impermeable barrier surrounding the composition. The insulating structure embodiments of the present invention may further include additional structural elements and/or surfaces treated to achieve very low emissivity; radiation shields and/or the like.

An embodiment of an insulation body of the present invention is depicted in Figure 2 which illustrates, a particulate composition of the present invention 2, enclosed within vacuum bag, 4 which is substantially gas impermeable. Substantially gas impermeable barriers suitable for use in the present invention include: enclosures, such as envelopes or pouches, including metal barriers, barrier films comprising one or more layers of polymeric, metallized polymeric, or metal foil laminates which are substantially impermeable to gas.

In non-vacuum applications, wherein a particulate composition of the present invention is not contained within an evacuated enclosure, other means for creating a definable volume of said particulate composition of the present invention may be employed. In general terms, in non-vacuum applications, a particulate composition of the present invention may be enclosed within, or surrounded by a barrier, sufficient to contain substantially all of a particulate composition of the present invention within a desired space. Suitable barrier materials for non-vacuum applications include, but are not limited, plastics, cellulose materials, wood, cement, asphalt and/or metal.

Alternatively, a particulate composition of the present invention may be added as a component to a composition which is foamed, extruded, molded or otherwise formed into a definable volume. For example a particulate composition of the present invention may be added as a component to a styrofoam composition which is then formed into bricks. The composition including a particulate composition of the present invention may also be further enclosed if desired.

An insulation body of the present invention may be produced by conventional techniques known in the art, such as those described below with reference to a vacuum insulation panel embodiment of the present invention. Other embodiments of the present invention may likewise be

produced utilizing conventional techniques well known in the art.

5 A vacuum insulation panel embodiment of the present invention may be produced by placing a particulate composition of the present invention within a substantially gas impermeable barrier enclosure then evacuating and sealing the enclosure. Optionally, the particulate composition of the present invention may be dried prior to placement in the barrier enclosure.

10 If desired, a particulate composition of the present invention may be placed in a porous pouch and pressed to a desired shape prior to placement in the substantially gas impermeable and substantially water impermeable membrane enclosure. A particulate composition of the present
15 invention may also be placed in the porous pouch prior to drying, if a drying step is utilized, to aid in holding the particulate composition of the present invention during the drying and/or pressing operations. Suitable porous pouches include those formed from any material which allows the
20 passage of air and moisture but holds the particulate composition of the present invention, which may be a finely divided particulate mixture. Examples of suitable porous pouches include porous pouches comprising and formed from polypropylene, for example, TYVEK® polypropylene produced
25 and sold by of E.I. DuPont de Nemours Company, Wilmington, Delaware and CELGARD polypropylene produced and sold by Celanese Corporation, and porous pouches formed from paper of the type utilized as filter paper.

In the optional drying operation, whether or not the
30 porous pouch is employed, the drying temperature should be sufficient to drive off any surface water from the a particulate composition of the present invention. Generally, the drying temperature will be at least 100° C, the upper limit being a temperature at which neither the
35 particulate composition of the present invention or the porous pouch, if utilized, will degrade.

The dried, pressed particulate composition of the present invention may then be placed into a substantially gas impermeable barrier enclosure, formed in such a way as to prevent gas leakage. If the particulate composition of the present invention has been dried in a porous pouch, the porous pouch is merely placed into the membrane enclosure. Generally the barrier enclosure is filled with an amount of a particulate composition of the present invention sufficient to result in a substantially completely filled enclosure after evacuation. As will be understood by those of ordinary skill in the art, the evacuation process will generally cause the barrier enclosure to shrink to fit around the a particulate composition of the present invention.

It should be noted that the TC of a vacuum panel structure comprising a composition of the present invention may be different than the TC of the composition of the present invention alone measured by the techniques described herein, for example due to the conductivity of the plastic film utilized in the vacuum panel.

A vacuum insulation structure of the present invention may have any dimensions depending on the desired end use. Generally however, the vacuum insulation panel structure of the present invention will have a length, width and thickness sufficient to substantially fill the space where it is to be utilized. For appliance applications, e.g. refrigerators or freezers, the length, width and thickness will vary depending on the size of the appliance, however the thickness of the vacuum insulation panel structure will generally be 3 to 50 millimeters.

Preferably the overall properties of the gas impermeable barrier enclosure shall permit it to survive handling without puncture or other damage. In general, the overall thickness of enclosures suitable for creating a definable volume of a particulate composition of the present invention will range from approximately 50 to 1000 microns. While the thinner materials provide sufficient

strength to hold the a particulate composition of the present invention and allow the further processing necessary, the life expectancy of the apparatus into which they are placed may be reduced.

5 Generally, the substantially gas impermeable barrier enclosure which is employed in the vacuum insulation structure embodiment of the present invention has one or more opening(s) permitting the evacuation of the enclosure and, if desired, the refilling of the enclosure with
10 insulating gases. The bag is first evacuated to as a low a pressure as desired, for example, 133.322 - 1333.22 Pa (1-10 Torr.) The evacuation cycle can be repeated so as to assure a low air partial pressure remaining in the panel. The manufacturing process is then terminated by heat
15 sealing the enclosure to close the evacuation path.

 An insulation body of the present invention may be advantageously utilized as a thermal insulation medium in a refrigeration appliance such as a refrigerator, freezer, cooler or the like.

20 The effectiveness and advantages of various aspects and embodiments of the present invention will be further illustrated by the following examples. The experimental results set forth below illustrate that TC provides a means to distinguish the physical characteristics of different
25 compositions. The physical characteristics, such as pore size, pore size distribution, surface area and structure of compositions such as gels are difficult to measure due to the fragility of the composition. Traditional tests for physical characteristics such as pore size may yield
30 inaccurate results, if any, due to deformation and/or breakage of the gel. In contrast, TC may be accurately determined with less risk of deformation or breakage of a gel. As illustrated in the Examples below a composition's TC will depend on the physical characteristics of the
35 composition, including, for example particle size, density, opacity, the type and presence of opacifying agent(s) and porosity.

As illustrated in the Examples, attributes of compositions of the present invention may be modified to produce advantageous TC and packing density under load. For example, the packing density under load may be modified
5 by modifying the particle size for a given particle density, for example through grinding, to reduce and preferably minimize the gas phase contribution to heat transfer due to gas movement around the particles.

The porosity and strength of a composition, as reflected by the composition's TC and packing density under load may be modified, for example, through choice of an appropriate gel component, e.g. silica, and/or by modifying the solids concentration of the solution utilized to prepare the gel. These modifications may be utilized to
10 reduce, and preferably minimize, the contribution of solid phase thermal conduction to heat transfer.
15

The radiation component may be reduced and preferably minimized by utilizing an opacifying agent.

The following testing procedures were utilized in the
20 Examples.

Thermal Conductivity (TC) and Packing Density

The Thermal Conductivity (TC) under load of the compositions is measured according to ASTM Test Procedure
25 C1114-92 utilizing the procedures and equipment described below and illustrated in Figures 3 and 4. The packing density of the compositions is measured by the technique set forth below.

1. Approximately 200-300 cubic centimeters (tap
30 volume) of a sample of the composition is dried in an oven at 120° C for a minimum of 2 hours until substantially completely dry. The amount of composition utilized is sufficient to completely fill two 4 inch (102 mm) by 6 inch (152 mm) by 0.25 inch (6 mm) TYVEK® pouches as described in
35 the following steps. TYVEK® is a registered trademark for fibers of E.I. DuPont de Nemours Company, Wilmington,

Delaware The actual volume of powder may vary but will be accounted for in measurement of TC under load.

2. The composition sample is divided into 2 equal portions by weight and the weight of each portion is
5 recorded.

3. Each portion of the composition sample is placed into a 4 inch (102 mm) by 6 inch (152 mm) by 0.25 inch (6 mm) TYVEK® pouch.

4. Each pouch is sealed with adhesive to produce 2
10 substantially similar pouches. The pouches are stored in a desiccator while the adhesive dries.

5. After the adhesive dries the pouches are placed among the plates of a thin foil heater apparatus 12
illustrated in Figure 3. As shown in Figure 3, thin foil
15 heater apparatus 12 comprises heater and thermocouple plate 14, and thermocouple plates 16 and 18. The plates are joined by flexible couplings 15 and 17 which comprise tape. Electrical wires 24, 26 and 28 extend from plates 14, 16 and 18 respectively and include connector means on their
20 ends for connecting the thin foil heater apparatus to a heating and measuring device.

6. The thin foil heater apparatus with pouches is then assembled in the load device depicted in Figure 4. Thin foil heater apparatus 12, with pouches 32 and 34 is
25 placed between aluminum blocks 42 and 44 which are greater in surface area than the pouches and sufficient thickness to resist deformation under load. Additional aluminum pieces 52 and 54 which substantially planar surfaces 53 and 55 respectively sufficient spaced from aluminum blocks 42 and 44 to allow room for clamping means such as C-Clamps to
30 be placed around the aluminum blocks 42 and 44.

7. The assembled load device from step 6 (Figure 4) is placed in a Carver, Model C press comprising stationary platen 62 and moving platen 64 depicted in Figure 4.

35 8. Moving platen 64 is moved towards the stationary platen 62 with the assembled load device in between until 1601.28 Newtons (360 pounds) of force is acting on the

pouches which is 103421 Pa (15 pounds per square inch for the 4 inch by 6 inch pouch).

9. C-clamps are placed around the aluminum plates 42 and 44 are tightened sufficiently to maintain the pressure applied by the press. The press is then released.

10. The distance between thermocouple sheets 14 and 16, and the distance between thermocouple sheets 16 and 18 is measured at all four corners to determine the thickness of each pouch under the 103421 Pa (15 psi) load. The packing density of the composition sample is calculated from the thickness of the sample determined in step 10, the weight (mass) of the sample determined in step 2 and the area of the sample which is taken to be 15504 square mm (102 mm x 152 mm) (24 square inches (4 inches x 6 inches)) according to the formula: Packing Density = Mass / (Thickness x Area).

11. The load device, with the composition samples under load are then placed in a pressure vessel which was evacuated, and then backfilled with nitrogen to obtain the TC measurements at the selected pressures of 133.322-13332.2 Pa (1-100 Torr).

12. TC measurements are obtained by connecting the electrical leads from the thin foil heater apparatus to a power source and a nanovoltmeter which is utilized to calculate the temperature difference. TC is calculated from the temperature difference and the power utilized.

In the above procedure, the TC of the compositions is determined in a Nitrogen atmosphere at a temperature of 20° C. The TC of the compositions of the present invention will be substantially equivalent if measured in atmospheric air or other mixtures (or solutions) of gases having thermal conductivities similar to the thermal conductivity of Nitrogen. The TC of the composition of the present invention may be determined with reference to atmospheric air, or a gas with a similar conductivity, as the gas which surrounds and fills the pores of the compositions and spaces within the volume of the composition being analyzed.

The TC of the composition of the present invention will generally decrease in an atmosphere of a gas which has lower conductivity than Nitrogen.

While the measurements were obtained at a temperature of 20° C, no substantial variation of TC would be expected over the range of 17°-25° C.

The measurement of TC under load provides information on a composition's performance in insulation applications where the composition will be under an external load, for example in insulation panels having reduced internal pressures.

Particle Size

Particle size of the compositions is determined by physical separation techniques utilizing 1 mm (18 mesh), 500 μ m (35 mesh), 250 μ m (60 mesh) and 90 μ m (170 mesh) screens. A CSC Scientific Sieve Shaker, model 18480 is utilized in the separation.

20

Porosity

The porosity of the gel compositions may be determined by determining the rod density of the composition and calculating the porosity by the following method.

To determine rod density, the gels were cast and formed in cylindrical molds. The total gel volume was determined by physically measuring the dimensions of a dry gel. The bulk density was determined by weighing the dry gel and dividing by the geometric volume. In instances where a rod like geometry was not maintained or, as a verification of the above method, mercury displacement was employed.

The rod density of gel compositions measured by mercury displacement was carried out as follows. A clean empty glass cell is filled with mercury to a specific height and the cell is weighed. The mercury is then

removed and the cell is cleaned again. Next, a dry gel sample of known weight is placed in the glass cell and mercury is added to the cell to the same specific height as before. The weight of the cell containing mercury and the sample is measured. The weight of mercury in both cases is then converted to a volume based on the density of mercury. The difference between the volume of mercury which fills an empty cell and the volume of mercury which fills the cell containing a sample is known as the displaced volume. Since mercury does not wet the sample this volume is equal to the total volume of the sample. The density is then determined by dividing the weight of the sample by the displaced volume.

Porosity is defined as the fraction of the sample volume that is pores, both in and around the particulate material and may be determined by the following formula:

$$\text{Porosity} = 1 - \frac{\text{(measured rod density in porous form)}}{\text{(density of the material in solid form)}}$$

The density of a solid mass of the material is determined with reference to the composition of the material. In the case of a silica gel composition, without opacifying agents, the density of the solid mass of material is assumed to be the density of a solid mass of silica which is 2.2 g/cc (220 kg/m³). In the case of a gel composition which includes opacifying agents, the density of the solid mass of material is assumed to be a weighted average of the densities of each component. For example, in the case of a gel composition comprising a silica gel precursor and a carbon black opacifying agent, the density of the solid mass of material is assumed to be a weighted average of the density of a solid mass of silica (2.2 g/cc) and the density of a solid mass of carbon black (1.8 g/cc).

Carbon Black Analyticals

The nitrogen surface area (N_2SA) of the carbon blacks utilized in the examples, expressed as square meters per gram (m^2/g) was determined according to ASTM test procedure D3037 Method A.

5 The dibutyl phthalate adsorption value (DBP) of the carbon blacks utilized in the examples, expressed as milliliters per 100 grams of carbon black (ml/100g), was determined according to the procedure set forth in ASTM D2414.

10

Solution Preparation

The gel compositions set forth in the examples are prepared in accordance with the basic sol-gel techniques described herein utilizing the steps illustrated
15 schematically in Figure 5 and described in more detail in the examples.

Three solutions of different sodium silicate concentrations are required for the preparation of the following example aerogels. The sodium silicate comes from
20 a commercially available solution, N[®] silicate, made by PQ corp., Valley Forge, PA. The N[®] silicate has a composition of 8.9% (w/w) Na₂O, 28.7% (w/w) SiO₂, and 62.4% (w/w) water. The density at 20°C of N[®] silicate is 1.38 g/ml.

1) The 5% solution is prepared by adding 72.5 ml of N[®]
25 silicate to 410 ml of deionized water. This solution is utilized with 2M H₂SO₄ in the examples to produce gel compositions having a solids concentration of approximately 5%, by weight.

2) The 8% solution is prepared by adding 72.5 ml of N[®]
30 silicate to 197 ml of deionized water. This solution is utilized with 2M H₂SO₄ in an example to produce a gel composition having a solids concentration of approximately 8%, by weight.

3) The 5%-alternate solution is prepared by adding
35 72.5 ml of N[®] silicate to 330 ml of deionized water. This solution is utilized in the preparation of composition P. This solution is utilized with 98% H₂SO₄ in an example to

produce a gel composition having a solids concentration of approximately 5%, by weight.

Carbon Black Properties

5 Carbon black CB-A utilized in the following examples is a carbon black produced by Cabot Corporation, Boston, Massachusetts which has a N₂SA of 24 m²/g and a DBP of 132 ml/100g.

10 A Modified CB-A carbon black is produced to render the carbon black attachable to a gel component utilizing the following procedure.

Two hundred grams of CB-A was added to a solution of 10.1 g sulfanilic acid and 6.23 g of concentrated nitric acid in 21 g of water. A solution of 4.87 g of NaNO₂ in 10
15 g of water was added to the rapidly stirring mixture. 4-Sulfobenzenediazonium hydroxide inner salt is formed in situ, which reacts with the carbon black. After 15 minutes, the dispersion was dried in an oven at 125 C.

The resulting carbon black product was designated
20 "Modified CB-A" and is a carbon black having attached 4-C₆H₄SO₃- groups.

Carbon black CB-B is MONARCH[®] 120 carbon black, a trademarked product of Cabot Corporation, Boston, Massachusetts that has a N₂SA of 25 m²/g and a DBP of 64
25 ml/100g.

Example 1

This example illustrates a process for producing a composition of the present invention. In addition this
30 example compares the Thermal Conductivity (TC) of a composition of the present invention to other compositions.

A gel composition "D" of the present invention is produced utilizing the process steps depicted in Figure 5.

Further details are as follows.

35 For the gelation step, the 5% solution described above is utilized.

For approximately 300 ml gel, 42 ml 2M H₂SO₄ is dispensed into a jacketed beaker maintained at 20°C. The solution is titrated into the stirred and jacketed vessel at 20°C. The solution addition rate is 1 ml/min. Once a pH of 3 is reached, a Modified CB-A carbon black/water slurry is added and the solution is stirred for several seconds.

The Modified CB-A carbon black /water slurry is prepared by combining 2.79 g of Modified CB-A modified carbon and 53 g of water and sonicating for 2 minutes. The amounts of added carbon black and water are calculated such that the total solids content of the gel remains the same. In this example 15% of the gel composition, by mass, comprises Modified CB-A carbon black.

After addition of the Modified CB-A carbon black/water slurry, the titration is then continued until the pH equals 5. A Corning pH meter, model 320, and a Corning "3 in 1" pH Combination Electrode with automatic temperature compensation (Corning, Inc., Corning, NY) are used to measure the pH.

The sol is then poured into casting containers, approximately 90 ml Teflon® containers. Once the sol gels, the containers are placed into an oven at 50°C for 15 minutes. After the 50°C oven treatment, the gel is extruded through a die into 3000μ x 3000μ cross-section, square granules.

For the salt washing step, the granules are exchanged with room temperature deionized water 6 times over 5 hours at a volume ratio 6:1 (water:gel).

For the aging step, the excess water is removed and only the pore fluid is retained. The granules are then aged 45 minutes at 80°C.

For the solvent exchange step, the granules are exchanged 5 times with acetone to remove the water. The exchanges are performed with a volume ratio of 6:1 (acetone:gel) for a minimum of 90 minutes for each exchange at room temperature.

A second solvent exchange step is used. The granules are exchanged 5 times with heptane to remove the acetone. The exchanges are performed at a volume ratio of 6:1 (heptane:gel) for a minimum of 90 minutes for each exchange
5 at room temperature.

For the TMCS treatment step, trimethylchlorosilane (TMCS) is added to the gel/heptane mixture at a level of 0.1 g TMCS/g wet gel for overnight. After the treatment, gels are washed twice in heptane to remove any unreacted
10 TMCS.

For the solvent removal step, the granules are placed in a 50°C oven for 4 hours. Next, the granules are placed in a 80°C oven overnight, and the final solvent removal step for the granules is 2 hours in a 120°C oven.

15 After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution after grinding.

The resulting powder is sieved to separate the 90-250
20 μm size range of particles (CSC Scientific Sieve Shaker, model 18480, setting 2.5 for 15 minutes)

The 90-250 μ gel sample is then prepared for TC measurements according to the procedures set forth above.

The Thermal Conductivity (TC) and packing density under
25 103421 Pa (15 psi) load of the composition of the present invention, D, and the TC and packing density under 103421 Pa (15 psi) load of four control compositions A, B, C and E are determined utilizing the procedures set forth above. Control composition A is a BASF Basogel® silica aerogel
30 sample, manufactured and sold by BASF, Ludwigshafen, Germany which has a particle size range with all particles being less than 500 μm , and a median size between 50 μm and 150 μm . Control composition B is a Degussa FK500LS® silica aerogel, manufactured and sold by Degussa Akgt., Frankfort,
35 Germany, which has an average particle size of 3 μm . Control composition C is Cabot Cab-O-Sil® EH5, manufactured and sold by Cabot Corporation, Tuscola, Illinois, which has

an average particle size of 0.2-0.3 μm . Control Composition E was an aerogel granule sample. Control Composition E is prepared in the same manner as composition D of the present invention from gelation through solvent
 5 removal. However, Control Composition E remains in the extruded form, approximately $3000\mu \times 3000\mu$ cross-section, granules.

The density under a 103421 Pa (15 psi) and Thermal Conductivity (TC) of each composition A, B, C, D and E,
 10 measured in the manner described above, are as follows and are also reported graphically in Figures 7 and 8.

Composition	Packing Density 103421 Pa Load (kg/m^3)	TC at 133.322 Pa ($\text{mW}/\text{m}\cdot\text{K}$)	TC at 1333.22 Pa ($\text{mW}/\text{m}\cdot\text{K}$)	TC at 13332.2 Pa ($\text{mW}/\text{m}\cdot\text{K}$)
A	123	6.89	8.24	12.02
B	180	8.29	11.01	18.03
C	130	6.14	6.77	9.81
D	97	4.61	5.13	7.21
E	111	6.65	7.28	8.58

These results illustrate the advantageous TC achieved
 15 by a composition of the present invention D at vacuum levels of 133.322 Pa, 1333.22 Pa and 13332.2 Pa. Gel composition E also falls within the scope of certain aspects of the present invention at 13332.2 Pa.

As illustrated by gel composition D, an embodiment of
 20 a composition of the present invention achieves advantageous TC under load, indicating reduced heat transfer through the composition. In the absence of convection, heat transfer occurs through gas phase conduction, solid phase conduction and radiation. The
 25 porosity and particle size of a particulate composition will affect the contribution of gas phase conduction to heat transfer. The low packing density of gel composition

D, in comparison to the other compositions, reflects the higher porosity of composition D. The higher porosity, in conjunction with the particle size of composition D minimizes gas phase heat transfer. The low packing density also illustrates that composition D has sufficient strength to resist deformation under load to an undesirable extent.

The choice of silica as a gel component in composition D, and composition D's low packing density serve to minimize the solid phase conduction of heat transfer.

The use of an opacifying agent in composition D serves to minimize the radiation component of heat transfer.

Example 2

This example illustrates the effect of packing density under a 103421 Pa load on TC. Compositions F and G were prepared utilizing the gel process steps depicted in Figure 5. Further details are as follows.

Composition F

The carbon black utilized in composition F is carbon black CB-A described above. In composition F carbon black CB-A is not modified.

For the gelation step, the 5% solution is utilized.

For approximately 300 ml gel, 42 ml 2M H₂SO₄ is dispensed into a jacketed beaker maintained at 20°C. The solution is titrated into the stirred and jacketed vessel at 20°C. The solution addition rate is 1 ml/min. Once a pH of 3 is reached, the carbon black/water slurry is added and the solution is stirred for several seconds.

A carbon black CB-A/water slurry is prepared by combining 2.79 g of unmodified carbon and 53 g of water and sonicating for 10 minutes. The amounts of added carbon black and water are calculated such that the total solids content of the gel remains the same. In this example 15% of the gel composition, by mass, comprises carbon black CB-A.

After addition of the carbon black CB-A /water slurry, the titration is then continued until the pH reaches 5. A Corning pH meter, model 320, and a Corning "3 in 1" pH Combination Electrode with automatic temperature
5 compensation (Corning, Inc., Corning, NY) is used to measure the pH.

The sol is then poured into casting containers, approximately 90 ml Teflon® containers. Once the sol gels, the containers are placed into an oven at 50°C for 15
10 minutes. After the 50°C oven treatment, the gel is extruded into 3000 μ x 3000 μ cross-section, square granules.

For the salt washing step, the granules are exchanged with room temperature deionized water 4 times for 90 minutes each at a volume ratio 6:1 (water:gel).

15 For the aging step, the excess water is removed and only the pore fluid is retained. The granules are then aged 90 minutes at 80°C.

For the solvent exchange step, the granules are exchanged 4 times with acetone to remove the water. The
20 exchanges are performed with a volume ratio of 6:1 (acetone:gel) for a minimum of 90 minutes for each exchange at room temperature.

A second solvent exchange step is used. The granules are exchanged 4 times with heptane to remove the acetone.
25 The exchanges are performed at a volume ratio of 6:1 (heptane:gel) for a minimum of 90 minutes for each exchange at room temperature.

For the TMCS treatment step, trimethylchlorosilane (TMCS) is added to the gel/heptane mixture at a level of
30 0.15 g TMCS/g wet gel for 3 1/2 hours.

For the solvent removal step, the granules are placed in a 80°C oven for overnight. Next, the granules are placed in a 120°C oven for 2 hours for final solvent removal.

35 After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1).

Figure 6 demonstrates a typical particle size distribution after grinding.

Composition G

5 The carbon black utilized in composition G is carbon black CB-B. In composition G carbon black CB-B is not modified.

For the gelation step, the 8% solution is utilized.

For approximately 680 ml gel, 145 ml 2M H₂SO₄ is
10 dispensed into a jacketed beaker maintained at 20°C. The solution is titrated into the stirred and jacketed vessel at 20°C. The solution addition rate is 1 ml/min. Once a pH of 3 is reached, the carbon black/water slurry is added and the solution is stirred for several seconds.

15 An carbon black CB-A/water slurry is prepared by combining 10.06 g of carbon black CB-A and 118 g of water and sonicating for 10 minutes. The amounts of added carbon black and water are calculated such that the total solids content of the gel remains the same. In this example 15% of
20 the gel composition, by mass, comprises carbon black CB-B.

After addition of the carbon black/water slurry, the titration is then continued until pH=5. A Corning pH meter, model 320, and a Corning "3 in 1" pH Combination Electrode with automatic temperature compensation (Corning,
25 Inc., Corning, NY) was used to measure the pH.

The sol is then poured into casting containers, approximately 90 ml Teflon® containers. Once the sol gels, the containers are placed into an oven at 50°C for 15 minutes. After the 50°C oven treatment, the gel is
30 extruded into 3000μ x 3000μ cross-section, square granules.

For the remaining steps, 5 gel batches (approx. 680 ml size) were combined for processing.

For the salt washing step, the granules are exchanged with room temperature deionized water 6 times for
35 minutes each at a volume ratio 1:1 (water:gel).

For the aging step, the excess water is removed and only the pore fluid is retained. The granules are then aged 12-14 hr @ at 50°C.

For the solvent exchange step, the granules are
5 exchanged 8 times in counter-current mode with acetone to remove the water. The exchanges are performed with a volume ratio of 1:1 (acetone:gel) for a minimum of 90 minutes for each exchange at room temperature.

A second solvent exchange step is used. The granules
10 are exchanged 2 times in counter-current mode with heptane to remove the acetone. The exchanges are performed at a volume ratio of 1:1 (heptane:gel) for a minimum of 90 minutes for each exchange at room temperature.

For the TMCS treatment step, trimethylchlorosilane
15 (TMCS) is added to the gel/heptane mixture at a level of 0.1 g TMCS/g wet gel for 3 hours.

For the solvent removal step, the granules are placed in a 160°C oven for overnight.

After the chemical processing is completed, the
20 granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution after grinding.

The Thermal Conductivities (TC) and packing density under a 103421 Pa load of compositions F and G are
25 determined utilizing the procedures set forth above. The results are reported below and also reported graphically in Figure 8.

Compositi on	Packing Density 103421 Pa (kg/m ³)	TC at 133.322 Pa (mW/m•K)	TC at 1333.22 Pa (mW/m•K)	TC at 13332.2 Pa (mW/m•K)
F	116	5.77	6.44	7.59
G	151	8.48	11.18	13.73

30 These results illustrate the effects of packing density under load on TC.

Packing density under load provides an indication of the strength and porosity of a particulate composition. The packing density of composition F of the present invention provides an indication that the composition has sufficient
5 strength to maintain its porosity and to minimize its deformation under load so as to minimize the contribution of solid phase conduction to heat transfer which would undesirably increase its TC.

10

Example 3

This example illustrates the effect of particle size on TC and packing density under 103421 Pa (15 psi) load.

15 Compositions H, I and J are prepared utilizing the gel process steps depicted in Figure 5. Further details are as follows.

Composition H

20 Composition H is prepared in the same manner as composition D above from gelation through solvent removal.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution after grinding.

25 The resulting powder is sieved to separate the less than 90 μm size range of particles using a CSC Scientific Sieve Shaker, model 18480 at setting 2.5 for 15 minutes.

Composition I

30 Composition I is prepared in the same manner as composition D above from gelation through solvent removal.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution
35 after grinding.

The resulting powder is sieved to separate the 90-250 μm size range of particles using a CSC Scientific Sieve Shaker, model 18480, at setting 2.5 for 15 minutes.

5 Composition J

Composition J is prepared in the same manner as composition D from gelation through solvent removal.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1).

10 Figure 6 demonstrates a typical particle size distribution after grinding.

The resulting powder is sieved to separate the 250-500 μm size range of particles using a CSC Scientific Sieve Shaker, model 18480, at setting 2.5 for 15 minutes.

15 The density under 103421 Pa load and Thermal Conductivities of each composition H, I and J, measured in the manner described above, are as follows and are also reported graphically in Figure 9.

Composition	Particle Size (μm)	Packing Density 103421 Pa (kg/m^3)	TC at 133.322 Pa ($\text{mW}/\text{m}\cdot\text{K}$)	TC at 1333.22 Pa ($\text{mW}/\text{m}\cdot\text{K}$)	TC at 13332.2 Pa ($\text{mW}/\text{m}\cdot\text{K}$)
H	less than 90	113	4.49	5.01	7.75
I	90-250	103	4.71	5.24	6.87
J	250-500	105	5.34	6.08	7.75

20

These results illustrate the effect of particle size on TC and packing density under a 103421 Pa load. Compositions H, I and J are all compositions of the present invention but have different packing densities and TC's.

25 As illustrated by a comparison of compositions H and I, a decrease in particle size leads to an increase in packing density, however the decrease in particle size also leads to decreased TC's at pressures of 133.322 Pa and 1333.22 Pa. At the larger particle size range represented

by Examples I and J, an increase in particle size at constant packing density leads to an increase in TC.

Example 4

5 This example illustrates the effect of the type and presence of an opacifying agent on TC and packing density under a 103421 Pa load.

Composition K, a control composition, is prepared with no opacifying agent. Composition L is prepared utilizing a
10 physical mixture of an unmodified carbon black CB-A. Composition N is also prepared utilizing unmodified carbon black CB-A. Composition M is prepared utilizing a modified carbon black CB-A. Carbon black CB-A and Modified Carbon Black CB-A are described above.

15 Compositions K, L, M and N are prepared utilizing the gel process steps depicted in Figure 5. Further details are as follows.

Composition K

20 For the gelation step, the 5% solution is utilized. For approximately 800 ml gel, 110 ml 2M H₂SO₄ is dispensed into a jacketed beaker maintained at 20°C. The solution is titrated into the stirred and jacketed vessel at 20°C. The solution addition rate is 5 ml/min. The
25 titration is continued until the pH is 5. A Corning pH meter, model 320, and a Corning "3 in 1" pH Combination Electrode with automatic temperature compensation (Corning, Inc., Corning, NY) was used to measure the pH.

The sol is then poured into casting containers,
30 approximately 90 ml Teflon® containers. Once the sol gels, the containers are placed into an oven at 50°C for 15 minutes. After the 50°C oven treatment, the gel is extruded into 3000μ x 3000μ cross-section, square granules.

After the first salt wash, 4 batches (approx. 800 ml)
35 are combined for the remainder of the processing.

For the salt washing step, the granules are exchanged with room temperature deionized water 5 times, 1st water

wash is overnight, 2nd through 5th wash is 45 minutes. All wash volume ratios are 1.5:1 (water:gel).

For the aging step, the excess water is removed and only the pore fluid is retained. The granules are then aged 15 hours at 50°C.

For the solvent exchange step, the granules are exchanged 11 times with acetone in a counter-current mode to remove the water. The exchanges are performed with a volume ratio of 1:1 (acetone:gel) for a minimum of 45 minutes for each exchange at room temperature.

A second solvent exchange step is used. The granules are exchanged 2 times with heptane in a counter-current mode to remove the acetone. The exchanges are performed at a volume ratio of 1:1 (heptane:gel) for a minimum of 45 minutes for each exchange at room temperature. The granules are then placed in 2000 ml of fresh heptane before proceeding to trimethylchlorosilane addition.

For the TMCS treatment step, trimethylchlorosilane (TMCS) is added to the gel/heptane mixture at a level of 0.1 g TMCS/g wet gel for 3 1/2 hours.

For the solvent removal step, the granules are placed in a 160°C oven for overnight.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution after grinding.

Composition L

Composition L is prepared in the same manner as Composition K from gelation through solvent removal.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution after grinding.

The ground aerogel sample is combined with unmodified Carbon Black CB-A to give a 15% by weight mixture of carbon

black in an aerogel and carbon mixture. This mixture is mixed until a uniform appearance is achieved.

Composition M

5 For the gelation step, the 5% solution is utilized.

For approximately 300 ml gel, 42 ml 2M H₂SO₄ is dispensed into a jacketed beaker maintained at 20°C. The solution is titrated into the stirred and jacketed vessel at 20°C. The solution addition rate is 1 ml/min. Once a
10 pH of 3 is reached, the carbon black/water slurry is added and the solution is stirred for several seconds.

A modified carbon black CB-A/water slurry is prepared by combining 2.79 g of modified carbon black CB-A and 53 g of water and sonicating for 2 minutes. The amounts of
15 added carbon black and water are calculated such that the total solids content of the gel remains the same. In this example 15% of the gel composition, by mass, comprises modified carbon black CB-A.

After addition of the modified carbon black CB-A/water
20 slurry, the titration is then continued until a pH of 5. A Corning pH meter, model 320, and a Corning "3 in 1" pH Combination Electrode with automatic temperature compensation (Corning, Inc., Corning, NY) was used to measure the pH.

25 The sol is then poured into casting containers, approximately 90 ml Teflon® containers. Once the sol gels, the containers are placed into an oven at 50°C for 15 minutes. After the 50°C oven treatment, the gel is extruded into 3000μ x 3000μ cross-section, square granules.

30 For the salt washing step, the granules are exchanged with room temperature deionized water 6 times over 5 hours at a volume ratio 6:1 (water:gel).

For the aging step, the excess water is removed and only the pore fluid is retained. The granules are then
35 aged 60 minutes at 80°C.

For the solvent exchange step, the granules are exchanged 5 times with acetone to remove the water. The

exchanges are performed with a volume ratio of 6:1 (acetone:gel) for a minimum of 90 minutes for each exchange at room temperature.

5 A second solvent exchange step is used. The granules are exchanged 5 times with heptane to remove the acetone. The exchanges are performed at a volume ratio of 6:1 (heptane:gel) for a minimum of 90 minutes for each exchange at room temperature.

10 For the TMCS treatment step, trimethylchlorosilane (TMCS) is added to the gel/heptane mixture at a level of 0.1 g TMCS/g wet gel for overnight. After the TMCS treatment, gels are washed twice in heptane to remove any unreacted TMCS.

15 For the solvent removal step, the granules are placed in a 50°C oven for 4 hours. Next, the granules are placed in a 80°C oven overnight, and the final solvent removal step for the granules is 2 hours in a 120°C oven.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1).
20 Figure 6 demonstrates a typical particle size distribution after grinding.

Composition N

25 Composition N is prepared in the same manner as Composition F above.

The density under a 103421 Pa load and Thermal Conductivities of each composition K, L, M and N, measured in the manner described above, are as follows and are also
30 reported graphically in Figure 11.

Composition	Opacifying Agent	Packing Density 103421 Pa (kg/m ³)	TC at 133.322 Pa (mW/m•K)	TC at 1333.22 Pa (mW/m•K)	TC at 13332.2 Pa (mW/m•K)
K	None	116	7.59	8.43	9.61
L	CB-A	134	5.91	6.80	8.10
M	Modified CB-A	116	5.01	5.59	6.61
N	CB-A	116	5.77	6.44	7.59

These results illustrate the effect of the type and presence of an opacifying agent on TC and packing density under a 103421 Pa load.

5 For a given amount of opacifier, in particular carbon black, the nature of the relationship between the opacifier and the remaining components of the composition will affect the solid phase component of heat transfer.

10 A comparison of the TC's of Compositions L, M and N, to the TC of composition K, illustrates that the presence of an opacifying agent reduces TC. The lowest TC's in this Example are achieved by composition M utilizing an opacifying agent which is "attached" to the gel precursor.

15

Example 5

This example illustrates the effect of the amount of a carbon black opacifying agent on TC.

20 Composition O is prepared without an opacifying agent. Composition P is prepared utilizing a modified carbon black CB-A. Composition Q is also prepared utilizing a modified carbon black CB-A. Modified carbon black CB-A is described in Example 1 above.

25 Compositions O, P and Q are prepared utilizing the gel process steps depicted in Figure 5. Further details are as follows.

Composition O

Composition N is prepared in the same manner and is the same composition as Composition K above.

5 Composition P

For the gelation step, the 5%-alternate solution is utilized.

For approximately 5000 ml gel, combine 1235 ml of deionized water and 65 ml of concentrated sulfuric acid
10 (98%, JT Baker) in a jacketed reaction flask at 23°C. The solution is titrated into the stirred and jacketed vessel at 23°C. The solution addition rate is 40 ml/min. until the pH is 3. Once a pH of 3 is reached, the carbon black/water slurry is added and the solution is stirred for
15 several seconds.

A modified carbon black CB-A/water slurry is prepared by combining 25.43 g of modified carbon and 492 ml of water and sonicating for 2 minutes. The amounts of added carbon black and water are calculated such that the total solids
20 content of the gel remains the same. In this Example, 10% of the gel composition, by mass, comprises modified carbon black CB-A.

After addition of the modified carbon black CB-A/water slurry, the titration is then continued until pH of 5 at an
25 addition rate of 12 ml/min. A Hanna pH meter, model HI8510E, and a Cole-Parmer pH Electrode, model 5662-31, was used to measure the pH.

The sol is mixed in the reaction flask for 25 min. after a pH of 5 is reached. The sol is then poured into
30 two 29.21 cm x 17.78 cm x 7.62 polypropylene casting containers (11.5 inch x 7 inch x 3 inch polypropylene containers). The containers are placed in a 65°C oven for 25 minutes. After the 65°C oven treatment, the gel is extruded into 3000 μ x 3000 μ cross-section, square granules.
35 The gel is extruded into 4 liters of water for overnight.

For the aging step, the excess water is removed and replaced with 1.6 L of 65°C water. The granules are then placed in a 79°C oven for 5 1/2 hours.

For the salt washing step, the granules are exchanged
5 with room temperature deionized water 2 times for 60 minutes at a volume ratio of 3:1 (water:gel).

For the solvent exchange step, the granules are exchanged 5 times with acetone in a counter-current mode to remove the water. The exchanges are performed with a
10 volume ratio of 3:1 (acetone:gel) for a minimum of 60 minutes for each exchange at room temperature.

A second solvent exchange step is used. The granules are exchanged 2 times with heptane in a counter-current mode to remove the acetone. The exchanges are performed at
15 a volume ratio of 3:1 (heptane:gel) for a minimum of 60 minutes for each exchange at room temperature.

For the TMCS treatment step, trimethylchlorosilane (TMCS) is added to the gel/heptane mixture at a level of 0.1 g TMCS/g wet gel for a minimum of 3 hours.

20 For the solvent removal step, the granules are placed in a 150°C oven for overnight.

After the chemical processing is completed, the granules are ground in a coffee grinder (Bunn, GL1). Figure 6 demonstrates a typical particle size distribution
25 after grinding.

Composition Q

Composition Q is prepared in the same manner as Composition M above.

30

The density under a 103421 Pa load and Thermal Conductivities of each composition O, P and Q, measured in the manner described above, are as follows and are also reported graphically in Figure 12.

Composition	Modified CB-A %, by weight	Packing Density 103421 Pa (kg/m ³)	TC at 133.322 Pa	TC at 1333.22 Pa	TC at 13332.2 Pa
O	0	116	7.59	8.43	9.61
P	10	128	5.42	6.06	7.14
Q	15	111	4.89	5.50	6.61

These results illustrate the effect of the amount of a carbon black opacifying agent on TC. Compositions P and Q which include opacifying agents, have lower TC values than composition O, which does not include an opacifying agent. Composition Q, with a higher amount of opacifying agent, has lower TC's than composition P.

It should be clearly understood that the forms of the present invention herein described are illustrative only and are not intended to limit the scope of the invention.

Claims:

1. A particulate composition which under a 103421 Pa load, at 20° C, and at a pressure (P) within the range of 133.322 - 13332.2 Pa, in Nitrogen, has:
 - 5 a packing density of less than or equal to 160 kg/m³, and
 - a Thermal Conductivity (TC) at 133.322-1333.322 Pa of less than or equal to $0.260\ln P + 4.53$ milliWatt/meterK (mW/m•K) and a TC at 1333.322-13332.2 Pa of less than or
10 equal to $(0.824\ln P + 0.47)$ mW/m•K.
2. The particulate composition of claim 1 wherein the composition is a gel composition.
- 15 3. The composition of claim 2 wherein the gel composition comprises a gel component and an opacifying agent.
- 20 4. The composition of claim 3 wherein the opacifying agent comprises carbon black; activated carbon; graphite; composites comprising carbon black and metal oxide or mixtures thereof.
- 25 5. The composition of claim 4 wherein the gel composition comprises greater than or equal to 3%, by weight, opacifying agent.
- 30 6. The composition of claim 4 wherein the opacifying agent is carbon black.
7. The composition of claim 2 wherein the packing density is less than or equal to 140 kg/m³.
- 35 8. The composition of claim 2 wherein the TC at 133.322-1333.322 Pa is less than or equal to $(0.304\ln P + 3.91)$ mW/m•K and the TC at 1333.322-13332.2 Pa is less than or equal to $(0.825\ln P + 0.16)$ mW/m•K.

9. The composition of claim 2 wherein the composition has a an average particle size of between 50-500 microns.

5 10. The composition of claim 2 wherein the composition has a porosity of greater than or equal to 0.90.

10 11. A particulate gel composition comprising a gel component and an opacifying agent, the gel composition having under a 103421 load, at 20° C, and at a pressure (P) within the range of 133.322 - 13332.2 Pa, in Nitrogen:

a packing density of less than or equal to 160 kg/m³;
15 a TC at 133.322-1333.322 Pa of less than or equal to 0.260lnP + 4.53 milliWatt/meterK (mW/m•K) and a TC at 1333.322-13332.2 Pa of less than or equal to (0.824lnP + 0.47) mW/m•K;

an average particle size of between 50-500 microns;
and

20 a porosity of greater than or equal to 0.90.

12. The particulate gel composition of claim 11 wherein the opacifying agent comprises carbon black.

25 13. A particulate composition which under a 103421 Pa load, at 20° C, and at a pressure of 1333.22 Pa, in Nitrogen, has:

a packing density of less than or equal to 160 kg/m³
and
30 a TC of less than or equal to 6.4 mW/m•K.

14. The particulate composition of claim 13 wherein the composition is a gel composition.

35

15. The composition of claim 14 wherein the gel composition comprises a gel component and an opacifying agent.

5 16. The composition of claim 15 wherein the opacifying agent comprises carbon black; activated carbon; graphite; composites comprising carbon black and metal oxide or mixtures thereof.

10 17. The composition of claim 16 wherein the gel composition comprises greater than or equal to 3%, by weight, opacifying agent.

15 18. The composition of claim 16 wherein the opacifying agent is carbon black.

19. The composition of claim 14 wherein the packing density is less than or equal to 140 kg/m^3 .

20 20. The composition of claim 14 wherein the TC is less than or equal to $6.1 \text{ mW/m}\cdot\text{K}$.

25 21. The composition of claim 14 wherein the composition has an average particle size of between 50-500 microns.

30 22. The composition of claim 14 wherein the composition has a porosity of greater than or equal to 0.90.

35 23. A particulate gel composition comprising a gel component and an opacifying agent, the gel composition having under a 103421 Pa load, at 20° C, and at a pressure of 1333.22 Pa, in Nitrogen:

a packing density of less than or equal to 160 kg/m^3 ;
a TC of less than or equal to $6.4 \text{ mW/m}\cdot\text{K}$;

an average particle size of between 50-500 microns;
and
a porosity of greater than or equal to 0.90.

5 24. The particulate gel composition of claim 23
wherein the opacifying agent comprises carbon black.

 25. A particulate composition which under a 103421 Pa
load, at 20° C, and at a pressure of 133.322 Pa, in
10 Nitrogen, has:

 a packing density of less than or equal to 160 kg/m³
and
 a TC of less than or equal to 5.8 mW/m•K.

15 26. The particulate composition of claim 25 wherein
the composition is a gel composition.

 27. The composition of claim 26 wherein the gel
composition comprises a gel component and an opacifying
20 agent.

 28. The composition of claim 27 wherein the
opacifying agent comprises carbon black; activated carbon;
graphite; composites comprising carbon black and metal
25 oxide or mixtures thereof.

 29. The composition of claim 28 wherein the gel
composition comprises greater than or equal to 3%, by
weight, opacifying agent.

30 30. The composition of claim 28 wherein the
opacifying agent is carbon black.

 31. The composition of claim 26 wherein the packing
35 density is less than or equal to 140 kg/m³.

32. The composition of claim 26 wherein the TC is less than or equal to 5.4 mW/m•K.

33. The composition of claim 26 wherein the
5 composition has a an average particle size of between 50-500 microns.

34. The composition of claim 26 wherein the
composition has a porosity of greater than or equal to
10 0.90.

35. A particulate gel composition comprising a gel
component and an opacifying agent, the gel composition
having under a 103421 Pa, at ambient temperature, and at a
15 pressure of 133.322 Pa, in Nitrogen:

a packing density of less than or equal to 160 kg/m³;
a TC of less than or equal to 5.8 mW/m•K;
an average particle size of between 50-500 microns;
and
20 a porosity of greater than or equal to 0.90.

36. The particulate gel composition of claim 35
wherein the opacifying agent comprises carbon black.

25 37. A particulate composition which under a 103421 Pa
load, at ambient temperature, and at a pressure of 13332.2
Pa, in Nitrogen, has:

a packing density of less than or equal to 160 kg/m³,
and
30 a TC of less than or equal to 9 mW/m•K.

38. The particulate composition of claim 37 wherein
the composition is a gel composition.

35 39. The composition of claim 38 wherein the gel
composition comprises a gel component and an opacifying
agent.

40. The composition of claim 39 wherein the opacifying agent comprises carbon black; activated carbon; graphite; composites comprising carbon black and metal
5 oxide or mixtures thereof.

41. The composition of claim 40 wherein the gel composition comprises greater than or equal to 3%, by weight, opacifying agent.
10

42. The composition of claim 40 wherein the opacifying agent is carbon black.

43. The composition of claim 38 wherein the packing density is less than or equal to 140 kg/m³.
15

44. The composition of claim 38 wherein the TC is less than or equal to 8 mW/m•K.

45. The composition of claim 38 wherein the composition has an average particle size of between 50-500 microns.
20

46. The composition of claim 38 wherein the composition has a porosity of greater than or equal to 0.90.
25

47. A particulate gel composition comprising a gel component and an opacifying agent, the gel composition
30 having under a 103421 Pa load, at ambient temperature, and at a pressure of 13332.2 Pa, in Nitrogen:
a packing density of less than or equal to 160 kg/m³;
a TC of less than or equal to 9 mW/m•K;
an average particle size of between 50-500 microns;
35 and
a porosity of greater than or equal to 0.90.

48. The particulate gel composition of claim 47 wherein the opacifying agent comprises carbon black.

49. A gel composition produced without supercritical drying having a porosity of greater than or equal to 0.95 and a rod density of less than or equal to 100 kg/m³.

50. The gel composition of claim 49 wherein the composition comprises: a gel component and an opacifying agent.

51. The gel composition of claim 50 wherein the opacifying agent is carbon black.

52. An insulation body comprising the particulate composition of claim 1.

53. The insulation body of claim 52 wherein the particulate composition is a gel composition.

54. An insulation body comprising the particulate composition of claim 13.

55. The insulation body of claim 54 wherein the particulate composition is a gel composition.

56. An insulation body comprising the particulate composition of claim 25.

57. The insulation body of claim 56 wherein the particulate composition is a gel composition.

58. An insulation body comprising the particulate composition of claim 37.

59. The insulation body of claim 58 wherein the particulate composition is a gel composition.

60. The use of the insulation body of claim 52 as a thermal insulation medium in a refrigeration appliance.

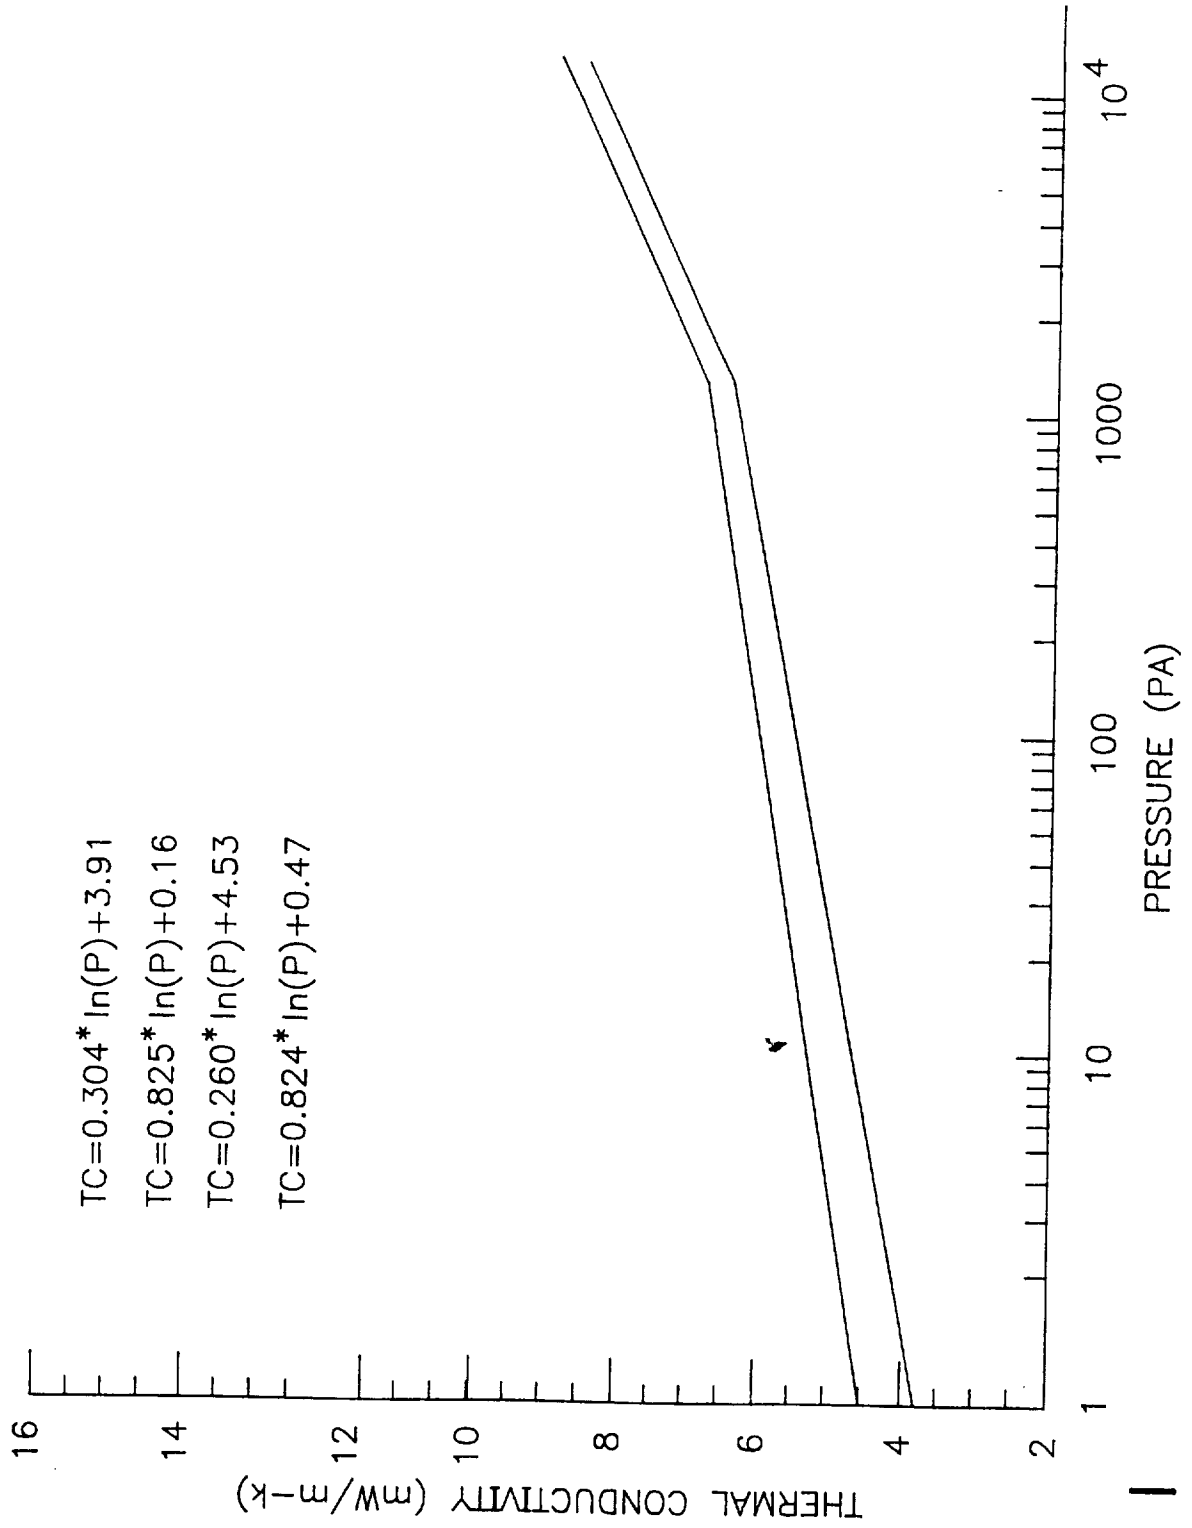


FIG. 1

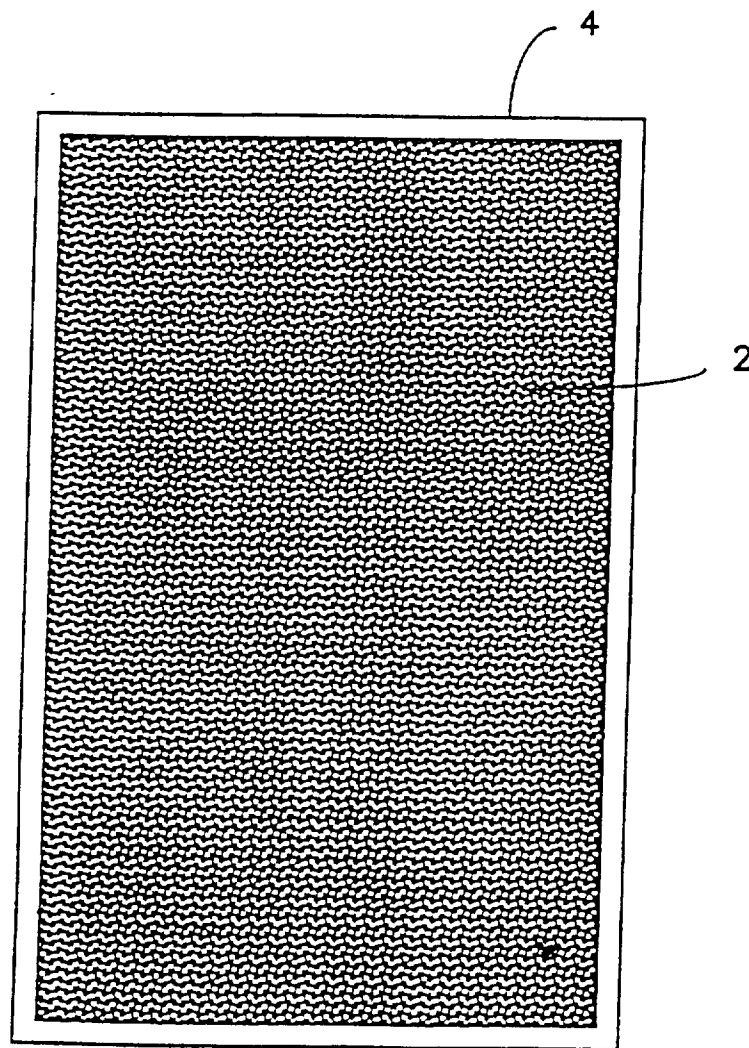


FIG. 2

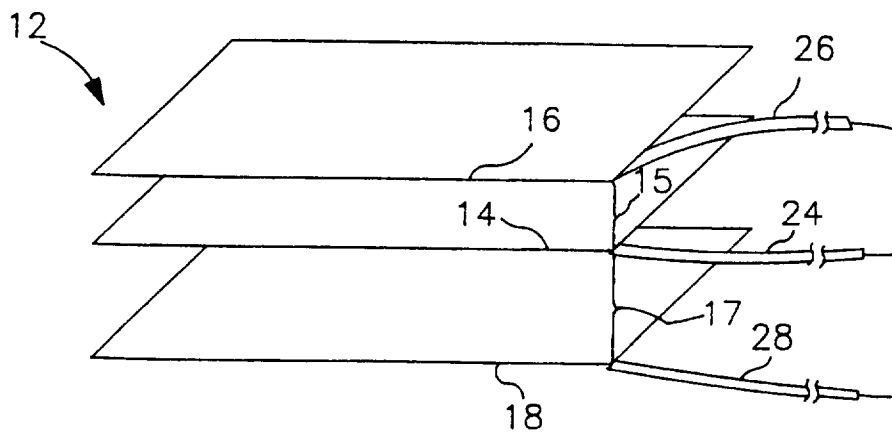


FIG. 3

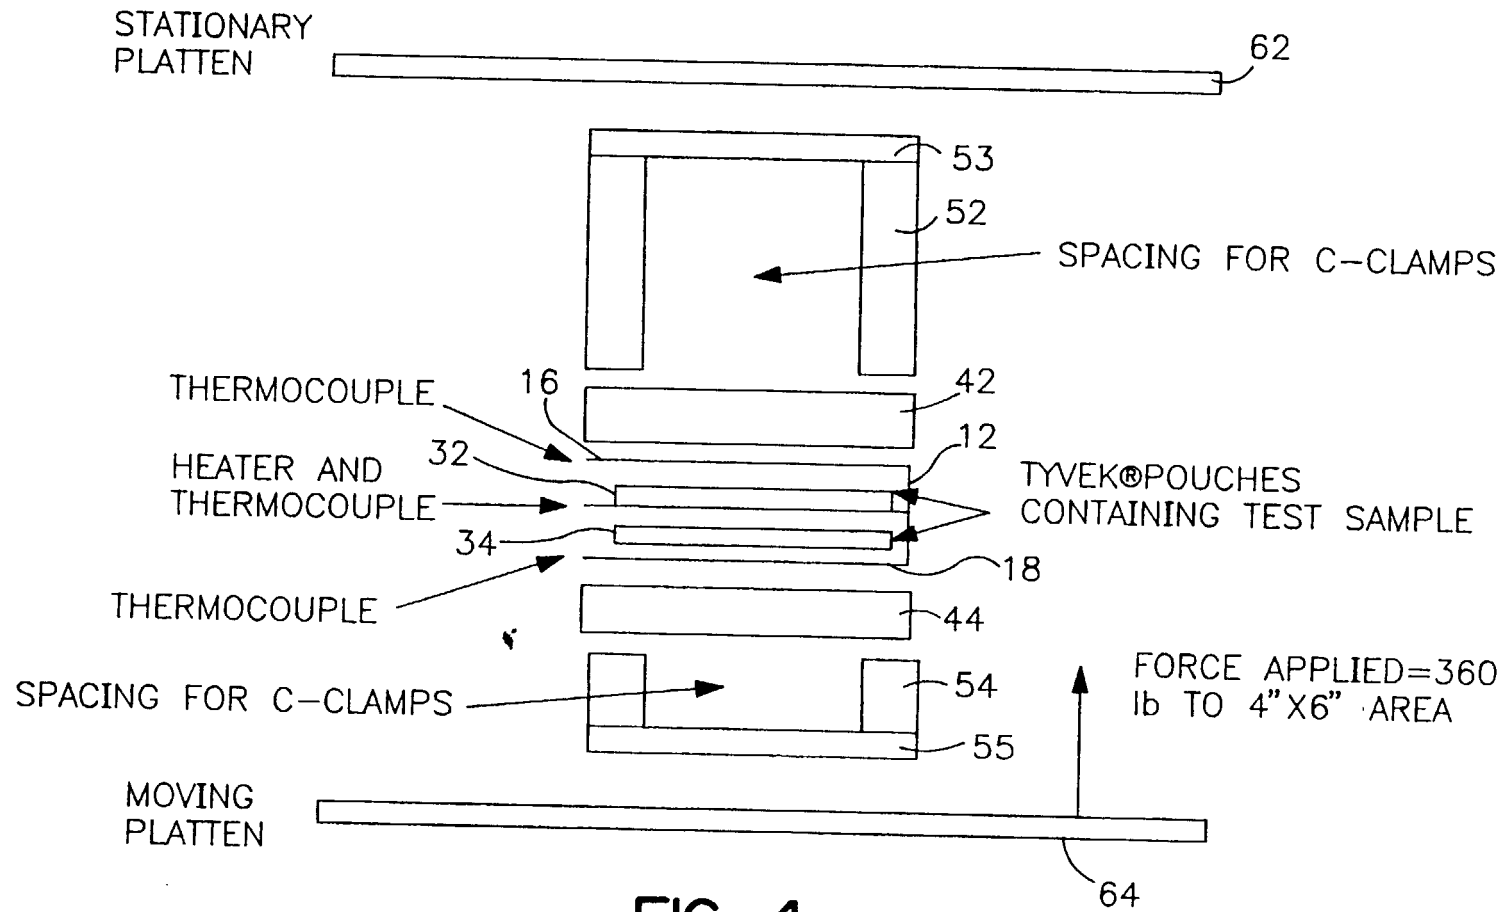


FIG. 4

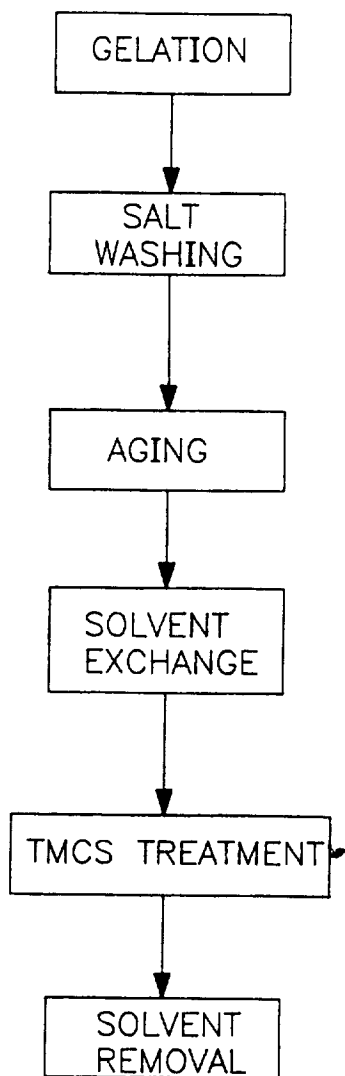


FIG. 5

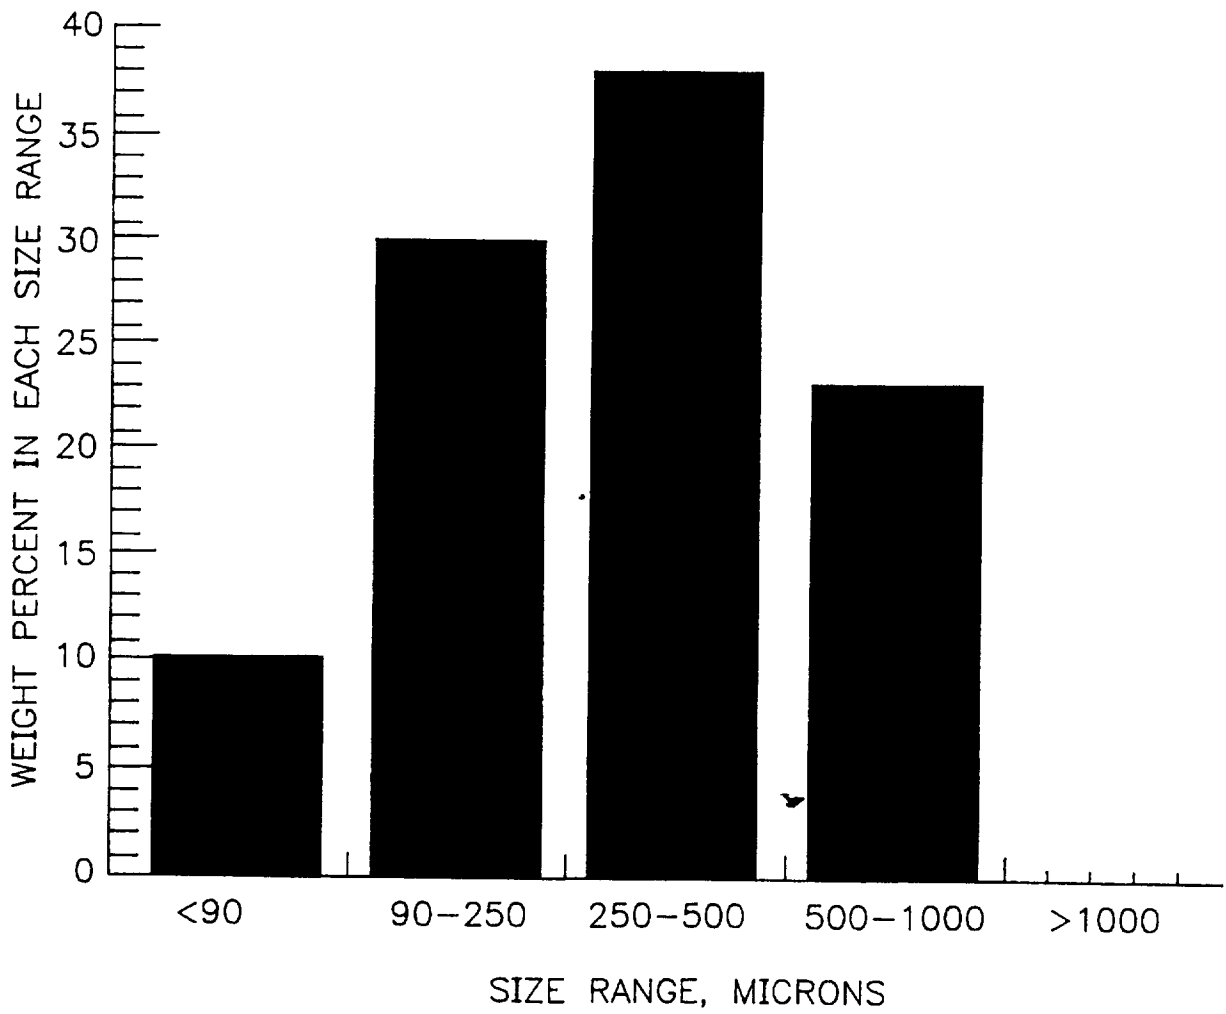


FIG. 6

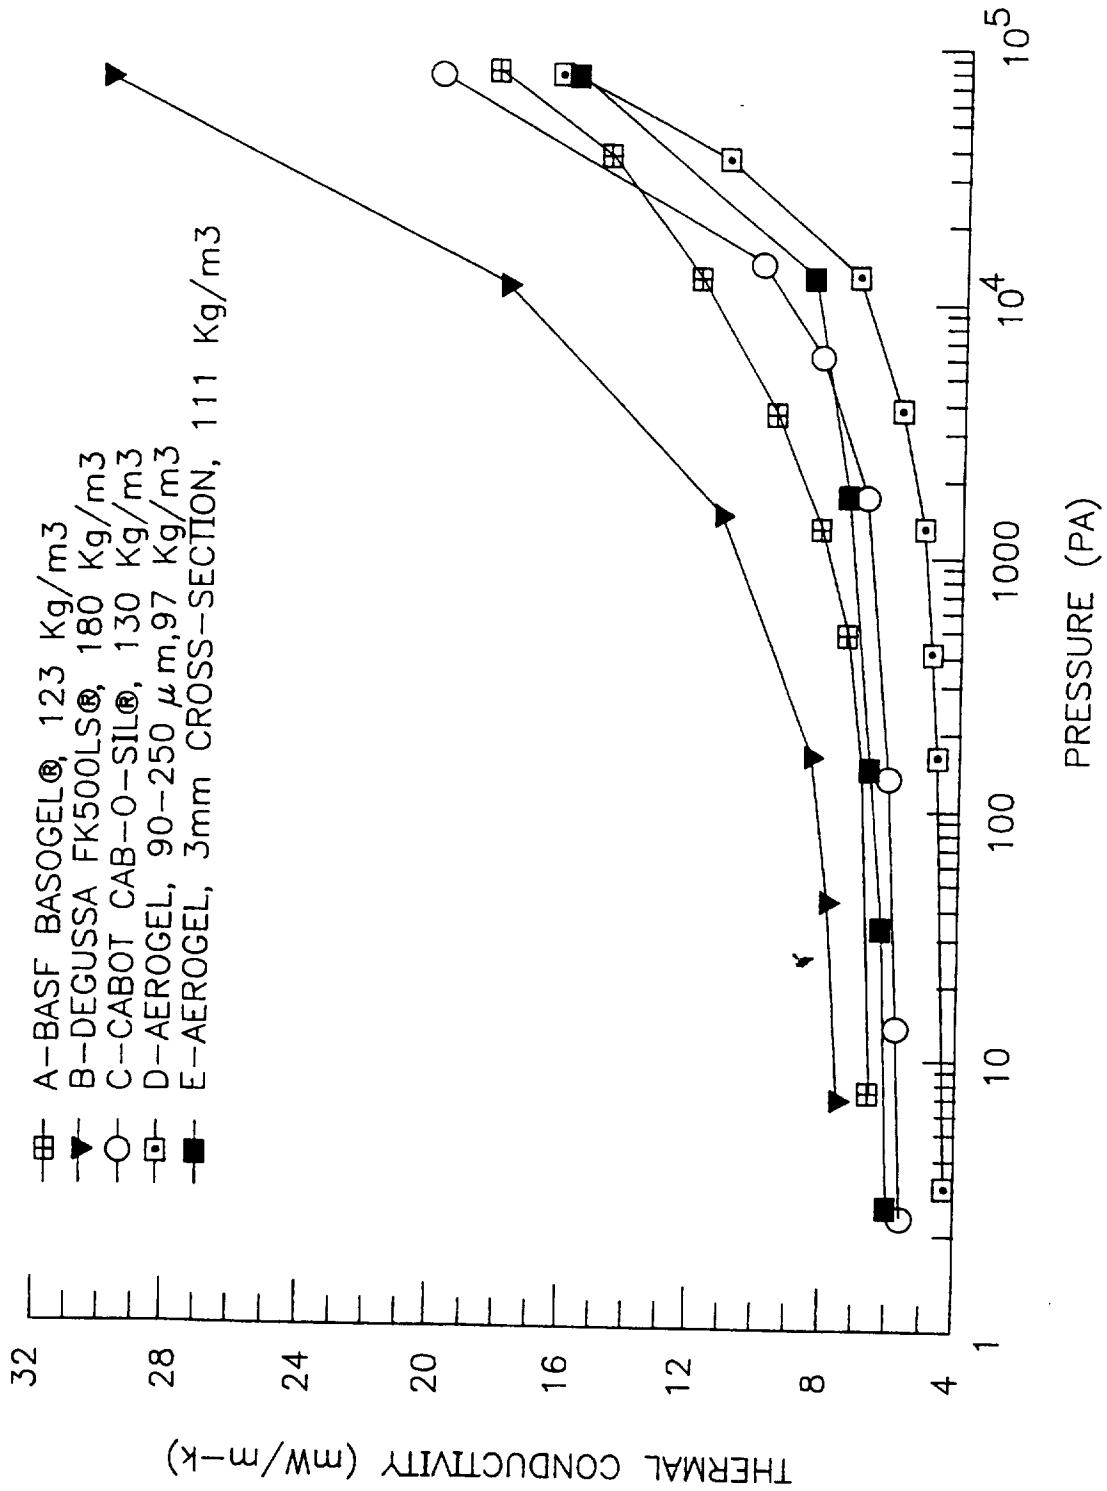


FIG. 7

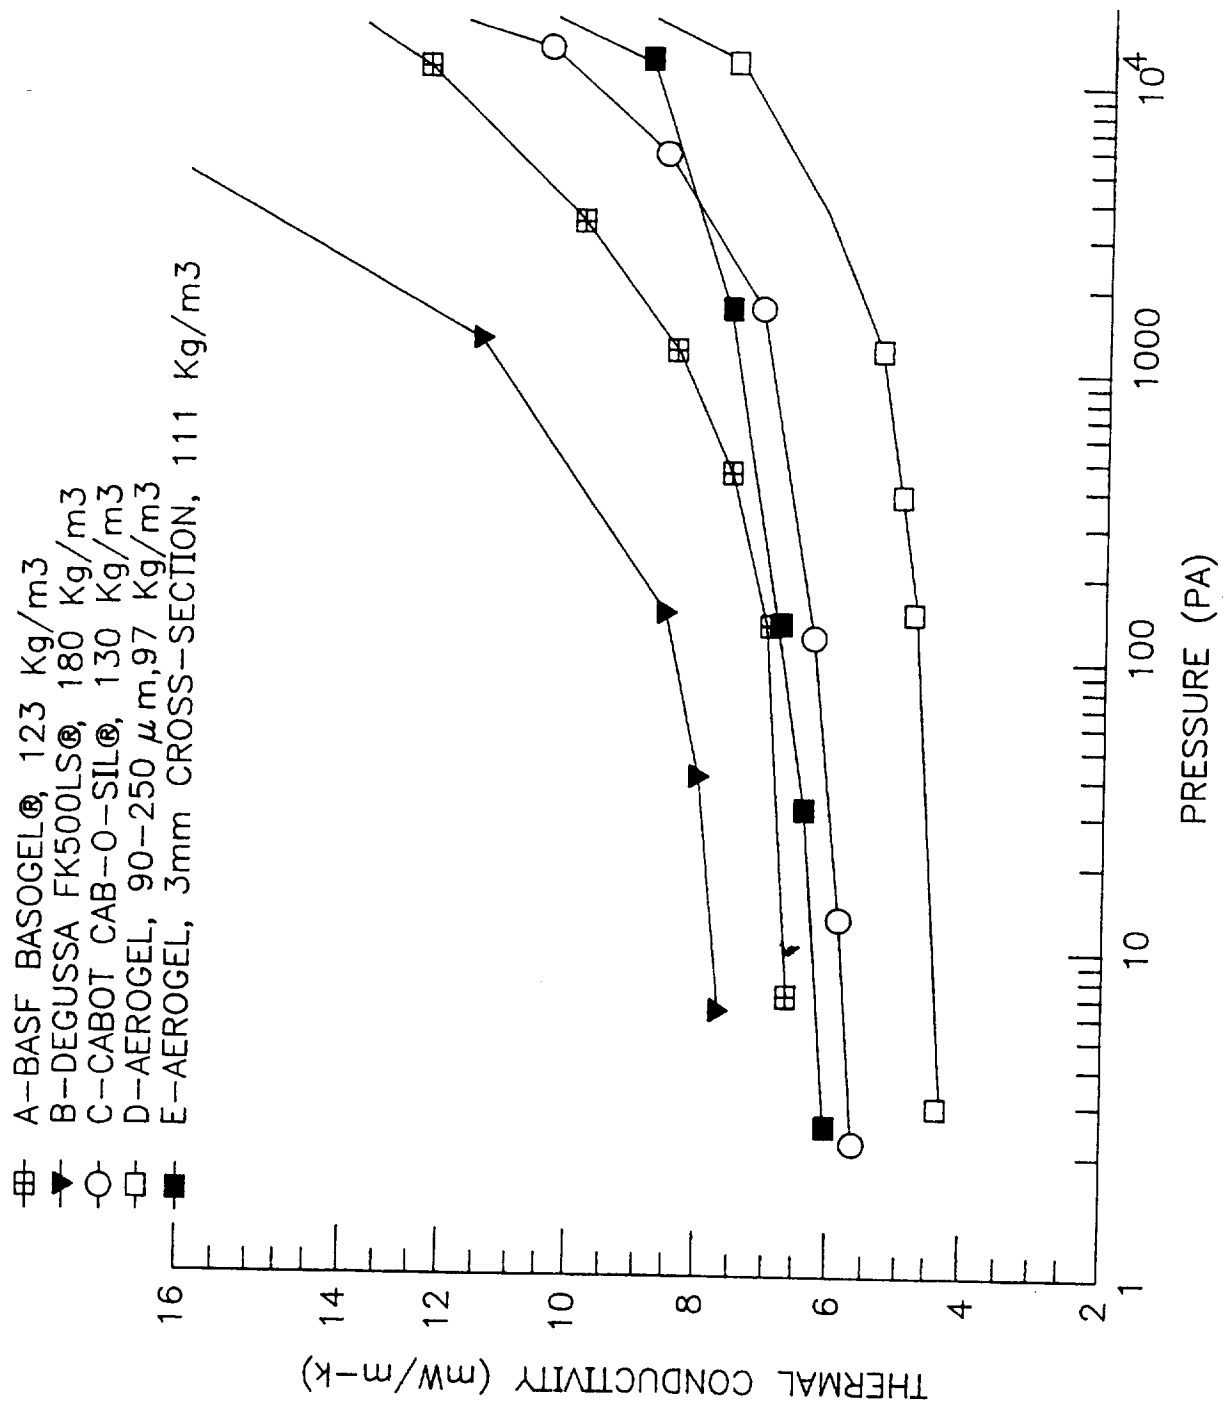


FIG. 8

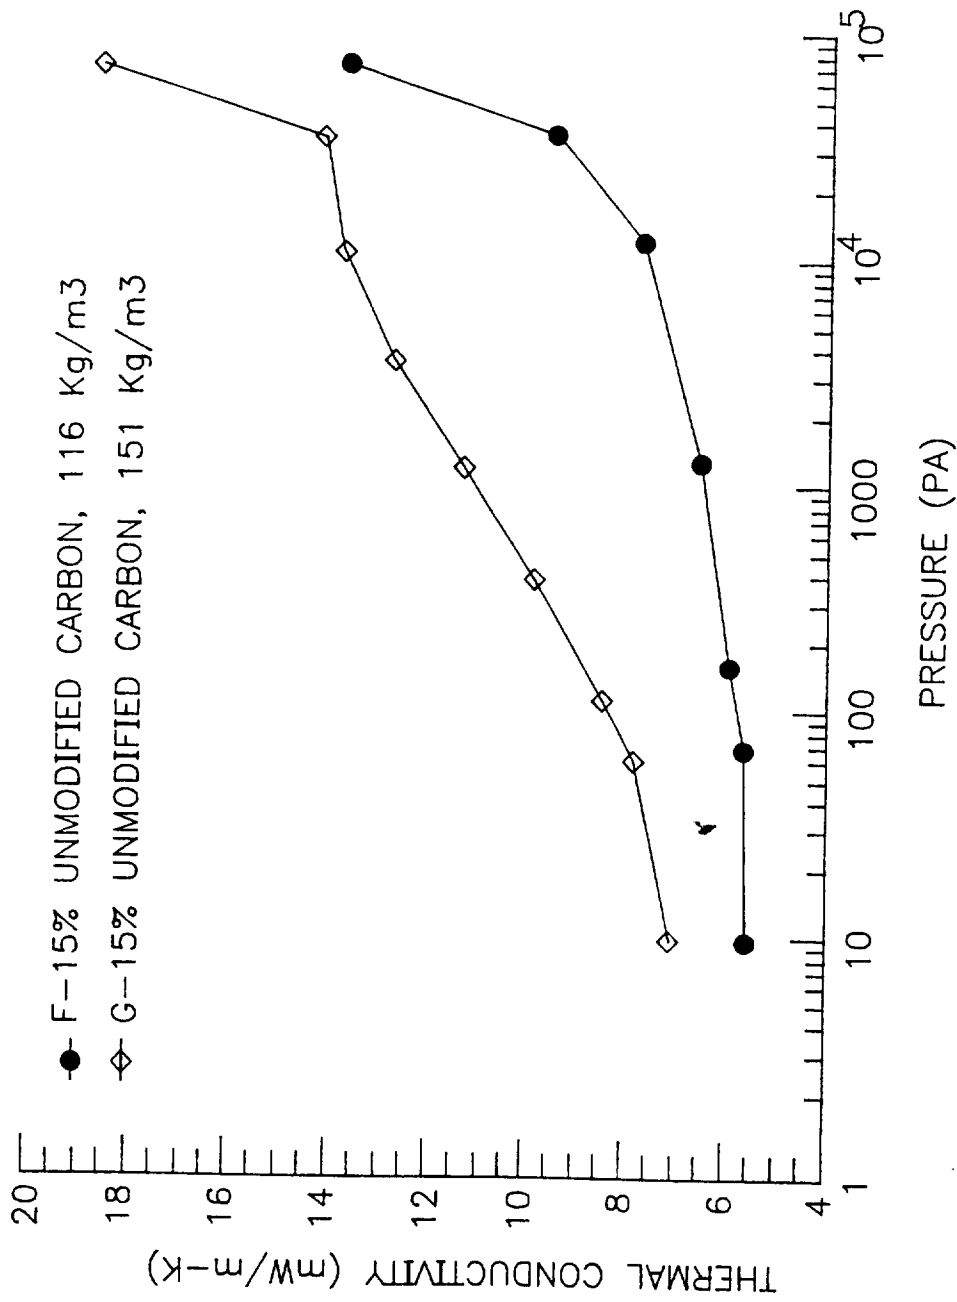


FIG. 9

10/12

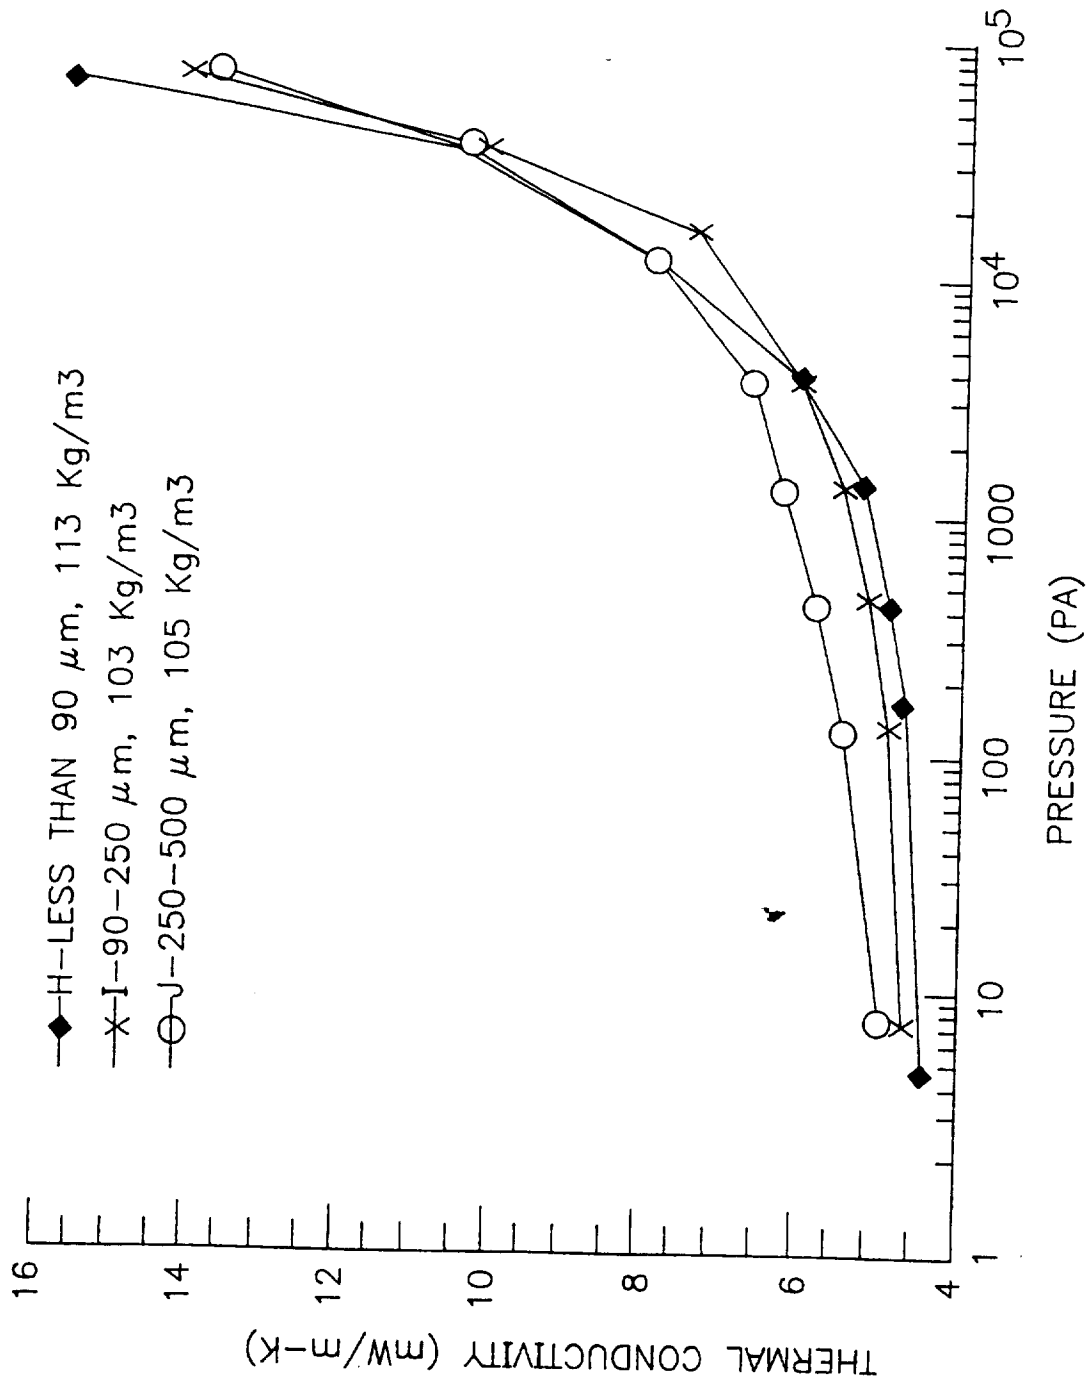


FIG. 10

11/12

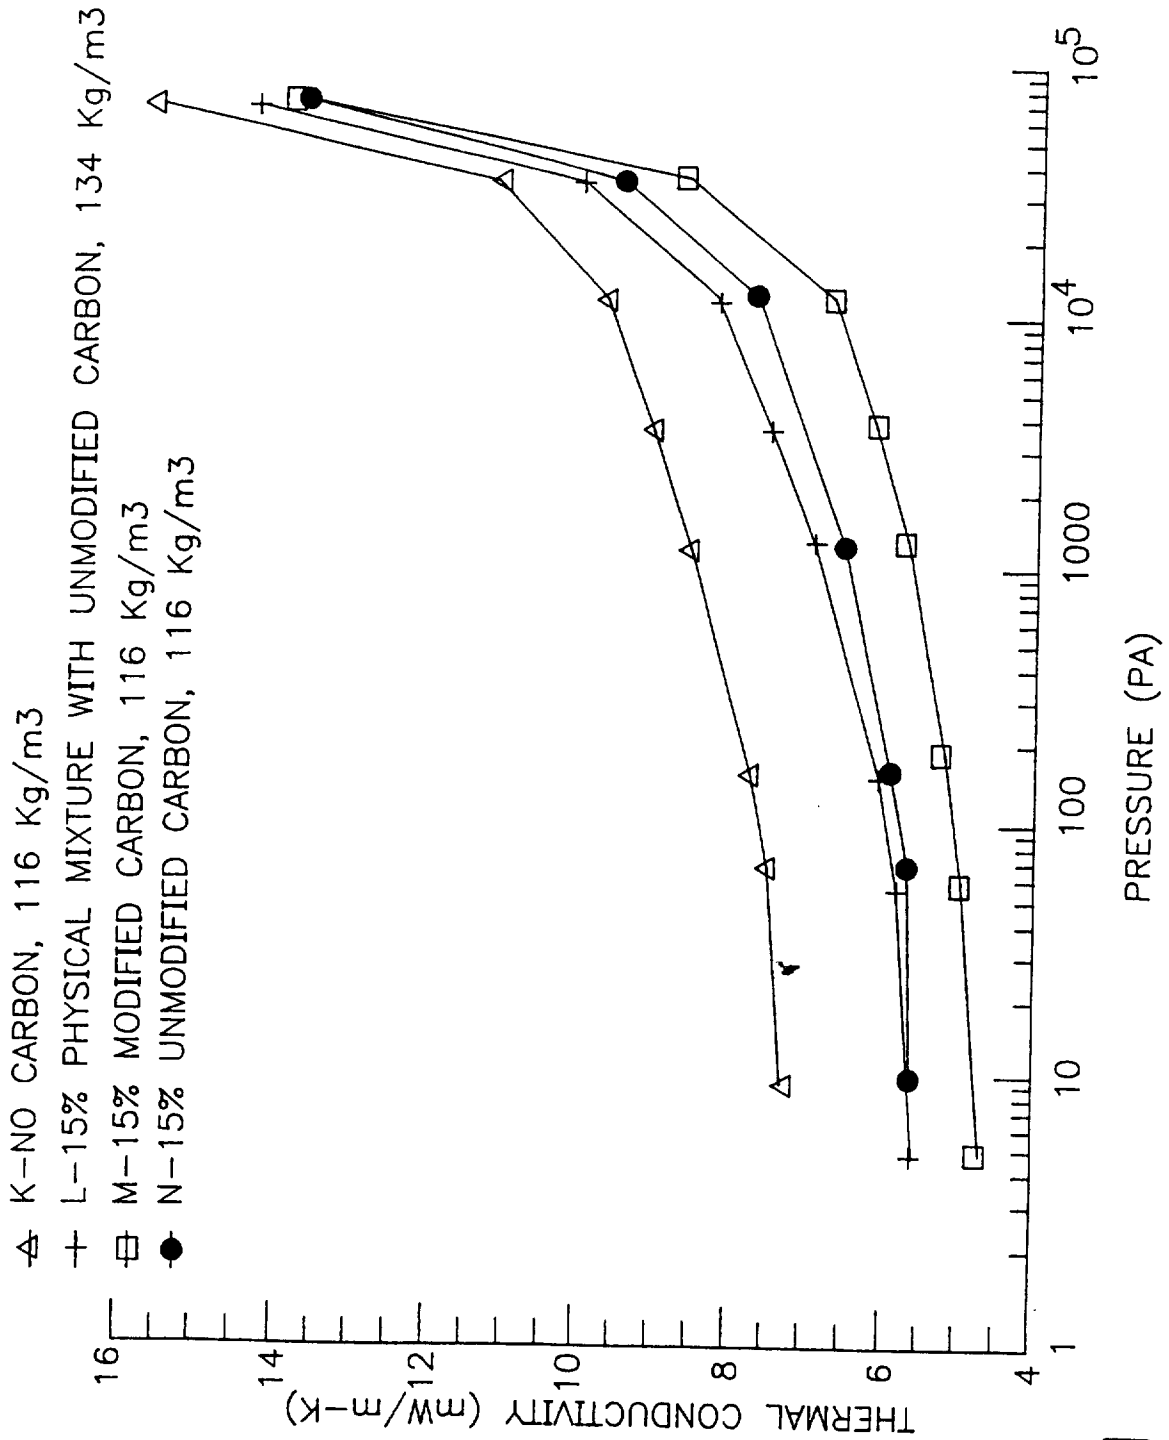


FIG. 11

12/12

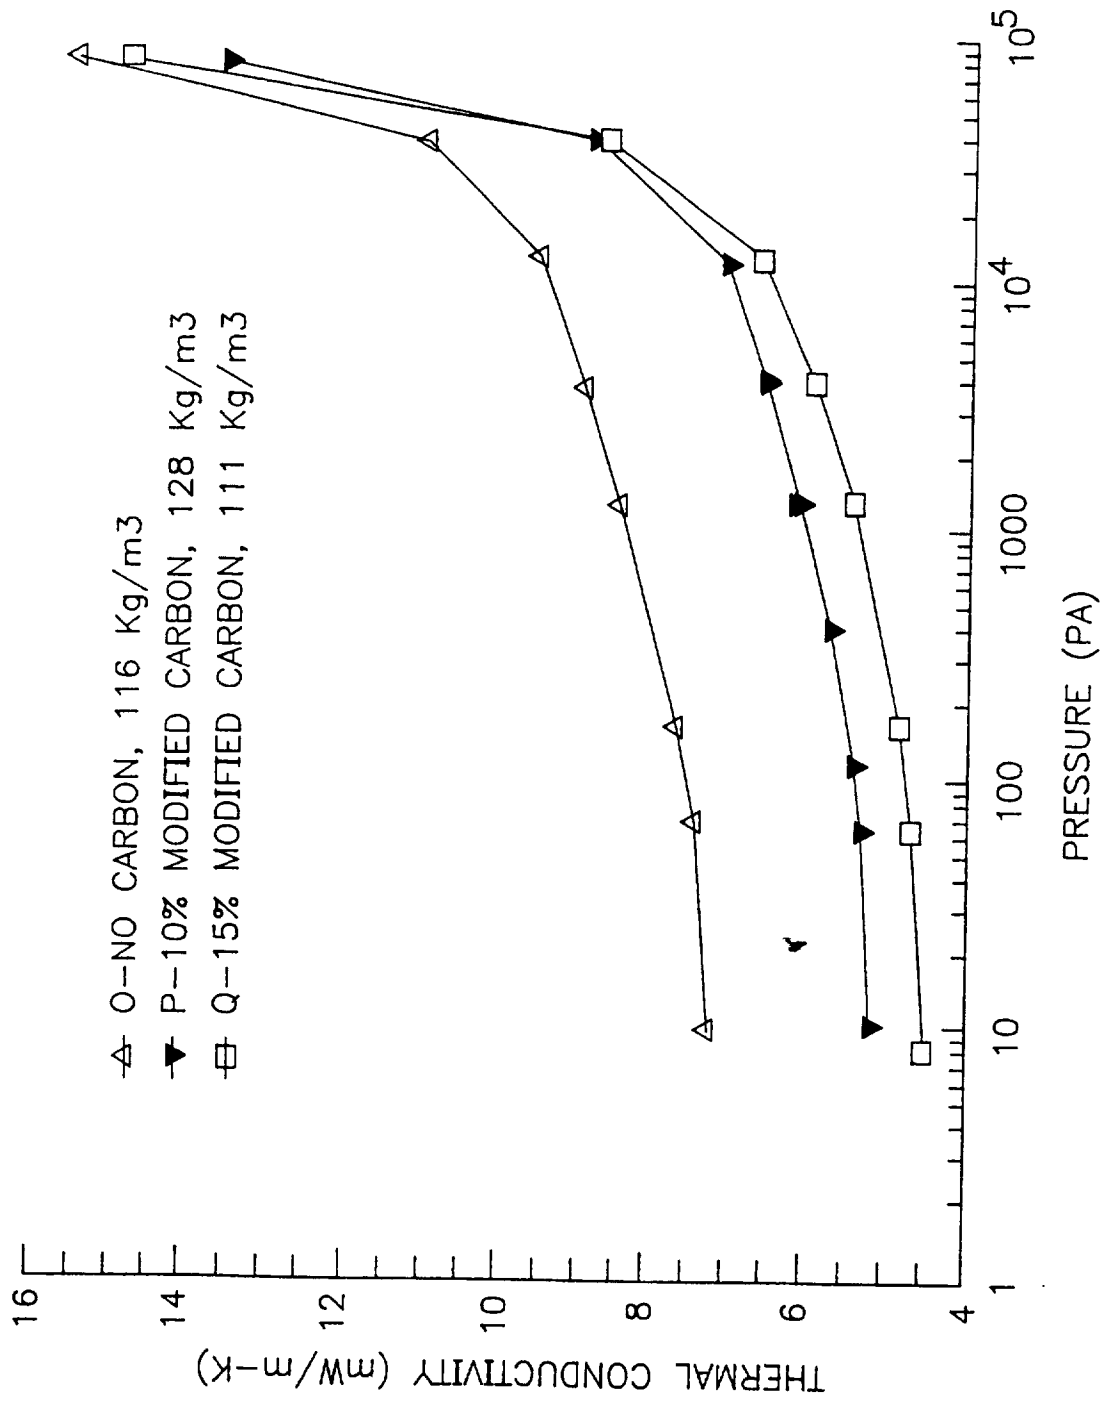


FIG. 12

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/16520

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01J13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01J B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 18456 A (CABOT CORPORATION) 20 June 1996 cited in the application see claims 1-20 ---	
A	US 5 397 807 A (MARTIN K. HITCHCOCK ET AL) 14 March 1995 see claims 1-13 ---	
A	EP 0 068 684 A (NATIONAL RESEARCH) 5 January 1983 see claims 1-13 -----	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 December 1997

Date of mailing of the international search report

15/12/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
 Fax: (+31-70) 340-3016

Authorized officer

Fouquier, J-P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/16520

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9618456 A	20-06-96	AU 4684996 A	03-07-96
		NO 972733 A	13-06-97
US 5397807 A	14-03-95	EP 0723563 A	31-07-96
		FI 961635 A	12-04-96
		HU 74850 A	28-02-97
		JP 9503810 T	15-04-97
		NO 961476 A	12-04-96
		WO 9510558 A	20-04-95
		US 5461098 A	24-10-95
		US 5571847 A	05-11-96
EP 68684 A	05-01-83	DK 260682 A	13-12-82
		GB 2100269 A,B	22-12-82
		JP 1840054 C	25-04-94
		JP 3034491 B	22-05-91
		JP 58005331 A	12-01-83
		US 4542176 A	17-09-85