



(86) **Date de dépôt PCT/PCT Filing Date:** 2013/01/21
(87) **Date publication PCT/PCT Publication Date:** 2013/08/08
(45) **Date de délivrance/Issue Date:** 2020/07/14
(85) **Entrée phase nationale/National Entry:** 2014/04/28
(86) **N° demande PCT/PCT Application No.:** US 2013/022371
(87) **N° publication PCT/PCT Publication No.:** 2013/116023
(30) **Priorités/Priorities:** 2012/01/31 (US13/363,154);
2012/04/02 (US61/619,116); 2012/04/13 (US13/446,194)


(51) **Cl.Int./Int.Cl. F02C 3/113** (2006.01),
F02C 3/06 (2006.01), **F02C 7/06** (2006.01),
F02C 7/36 (2006.01), **F02K 3/06** (2006.01),
F02K 3/072 (2006.01)

(72) **Inventeurs/Inventors:**
SCHWARZ, FREDERICK M., US;
SUCIU, GABRIEL L., US;
KUPRATIS, DANIEL BERNARD, US;
ACKERMANN, WILLIAM K., US

(73) **Propriétaire/Owner:**
UNITED TECHNOLOGIES CORPORATION, US

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : MOTEUR A TURBINE A GAZ DOTE D'UNE SECTION TURBINE A BASSE PRESSION A VITESSE ELEVEE ET
D'ELEMENTS DE SUPPORT DE PALIER**
(54) **Title: GAS TURBINE ENGINE WITH HIGH SPEED LOW PRESSURE TURBINE SECTION AND BEARING SUPPORT FEATURES**

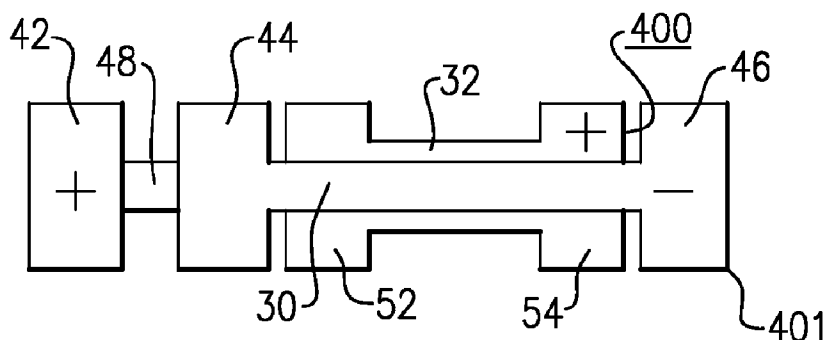

(57) **Abrégé/Abstract:**

A gas turbine engine includes a very high speed low pressure turbine such that a quantity defined by the exit area of the low pressure turbine multiplied by the square of the low pressure turbine rotational speed compared to the same parameters for the high pressure turbine is at a ratio between about 0.5 and about 1.5. The high pressure turbine is mounted on the low pressure turbine with an intermediate bearing.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2013/116023 A1

(43) International Publication Date
8 August 2013 (08.08.2013)

- (51) **International Patent Classification:**
F02C 3/113 (2006.01) *F02C 3/06* (2006.01)
- (21) **International Application Number:**
PCT/US2013/022371
- (22) **International Filing Date:**
21 January 2013 (21.01.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/363,154 31 January 2012 (31.01.2012) US
61/619,116 2 April 2012 (02.04.2012) US
13/446,194 13 April 2012 (13.04.2012) US
- (71) **Applicant:** UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) **Inventors:** SCHWARZ, Frederick, M.; 121 Steep Hollow Drive, Glastonbury, Connecticut 06033 (US). SUCIU, Gabriel, L.; 27 Tanglewood Dr., Glastonbury, Connecticut 06033 (US). KUPRATIS, Daniel Bernard; 12 Sunset Drive, Wallingford, Connecticut 06492 (US). ACKERMANN, William, K.; 15 Butternut Drive, East Hartford, Connecticut 06118-1905 (US).
- (74) **Agent:** OLDS, Theodore W.; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, MT 55402 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** GAS TURBINE ENGINE WITH HIGH SPEED LOW PRESSURE TURBINE SECTION AND BEARING SUPPORT FEATURES

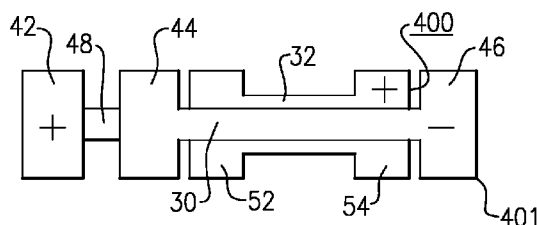


FIG. 2

(57) **Abstract:** A gas turbine engine includes a very high speed low pressure turbine such that a quantity defined by the exit area of the low pressure turbine multiplied by the square of the low pressure turbine rotational speed compared to the same parameters for the high pressure turbine is at a ratio between about 0.5 and about 1.5. The high pressure turbine is mounted on the low pressure turbine with an intermediate bearing.

**GAS TURBINE ENGINE WITH HIGH SPEED
LOW PRESSURE TURBINE SECTION
AND BEARING SUPPORT FEATURES**

BACKGROUND OF THE INVENTION

[0002] This application relates to a gas turbine engine wherein the low pressure turbine section is rotating at a higher speed and centrifugal pull stress relative to the high pressure turbine section speed and centrifugal pull stress than prior art engines.

[0003] Gas turbine engines are known, and typically include a fan delivering air into a low pressure compressor section. The air is compressed in the low pressure compressor section, and passed into a high pressure compressor section. From the high pressure compressor section the air is introduced into a combustion section where it is mixed with fuel and ignited. Products of this combustion pass downstream over a high pressure turbine section, and then a low pressure turbine section.

[0004] Traditionally, on many prior art engines the low pressure turbine section has driven both the low pressure compressor section and a fan directly. As fuel consumption improves with larger fan diameters relative to core diameters it has been the trend in the industry to increase fan diameters. However, as the fan diameter is increased, high fan blade tip speeds may result in a decrease in efficiency due to compressibility effects. Accordingly, the fan speed, and thus the speed of the low pressure compressor section and low pressure turbine section (both of which historically have been coupled to the fan via the low pressure spool), have been a design constraint. More recently, gear reductions have been proposed between the low pressure spool (low pressure compressor section and low pressure turbine section) and the fan.

SUMMARY

[0005] In a featured embodiment, a turbine section of a gas turbine engine has a fan drive turbine section and a second turbine section. The fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed. The second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is faster than the first speed. A first performance quantity is defined as the product of the fan drive turbine's speed squared and the fan drive turbine's exit area. A second performance quantity is defined as the product of the second speed squared and the second area. A ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5. The second turbine section drives a shaft which is mounted on a bearing. This same bearing is mounted on an outer periphery of a second shaft driven by the fan drive turbine section.

[0006] In another embodiment according to the previous embodiment, the ratio is above or equal to about 0.8.

[0007] In another embodiment according to any of the previous embodiments, the first fan drive turbine section has at least 3 stages.

[0008] In another embodiment according to any of the previous embodiments, the first fan drive turbine section has up to 6 stages.

[0009] In another embodiment according to any of the previous embodiments, the second turbine section has 2 or fewer stages.

[0010] In another embodiment according to any of the previous embodiments, a pressure ratio across the first fan drive turbine section is greater than about 5:1.

[0011] In another embodiment according to any of the previous embodiments, the second turbine's shaft is supported by a bearing at the outer periphery of a fan drive turbine shaft which in turn is supported by a bearing which is mounted to static structure.

[0012] In another embodiment according to any of the previous embodiments, the fan drive turbine and second turbine sections rotate in opposed directions.

[0013] In another embodiment according to any of the previous embodiments, there is no mid-turbine frame positioned intermediate the fan drive turbine and second turbine sections.

[0014] In another featured embodiment, a gas turbine engine has a fan, a compressor section in fluid communication with the fan, a combustion section in fluid communication with the compressor section, and a turbine section in fluid communication with the combustion section. The turbine section includes a fan drive turbine section and a second turbine section. The fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed. The second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is higher than the first speed. A first performance quantity is defined as the product of the fan drive turbine's speed squared and the fan drive turbine's area. A second performance quantity is defined as the product of the second turbine's speed squared and the second turbine's area. A ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5. The second turbine section drives a shaft which is mounted on a bearing. This same bearing is mounted on an outer periphery of a second shaft driven by said fan drive turbine section.

[0015] In another embodiment according to the previous embodiment, the ratio is above or equal to about 0.8.

[0016] In another embodiment according to any of the previous embodiments, the compressor section includes a first and second compressor sections. The fan drive turbine section and the first compressor section are configured to rotate in a first direction. The second turbine section and the second compressor section are configured to rotate in a second opposed direction.

[0017] In another embodiment according to any of the previous embodiments, a gear reduction is included between the fan and a low spool driven by the fan drive turbine section such that the fan is configured to rotate at a lower speed than the fan drive turbine section.

[0018] In another embodiment according to any of the previous embodiments, the fan rotates in the second opposed direction.

[0019] In another embodiment according to any of the previous embodiments, the second turbine's shaft is supported on a bearing on the outer periphery of the first turbine's shaft which aforementioned shaft is in turn supported at or near its rear end by another bearing mounted to static structure.

[0020] In another embodiment according to any of the previous embodiments, a third bearing supports the second compressor section on an outer periphery of the shaft driven by the second turbine section.

[0021] In another embodiment according to any of the previous embodiments, a fourth bearing is positioned adjacent the first compressor section, and supports an outer periphery of the spool which is configured to rotate with the fan drive turbine section.

[0022] In another embodiment according to any of the previous embodiments, there is no mid-turbine frame positioned intermediate the first and second turbine sections.

[0023] In another featured embodiment, a gas turbine engine has a fan, a compressor section in fluid communication with the fan, a combustion section in fluid communication with the compressor section, and a turbine section in fluid communication with the combustion section. The turbine section includes a fan drive turbine section and a second turbine section. The fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed. A second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is higher than the first speed. A first performance quantity is defined as the product of the first speed squared and the first area. A second performance quantity is defined as the product of the second speed squared and the second area. A ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5. The compressor section includes first and second compressor sections. The fan drive turbine section and the first compressor section will rotate in a first direction and the second turbine section and the second compressor section will rotate in a second opposed direction. A gear reduction is included between the fan and first compressor section, such that the fan will rotate at a lower speed than the fan drive turbine section, and rotate in the second opposed direction.

[0024] In another embodiment according to the previous embodiment, a gear ratio of the gear reduction is greater than about 2.3.

[0025] These and other features of this disclosure will be better understood upon reading the following specification and drawings, the following of which is a brief description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] Figure 1 shows a gas turbine engine.

[0027] Figure 2 schematically shows the arrangement of the low and high spool, along with the fan drive.

[0028] Figure 3 shows a schematic view of a mount arrangement for an engine such as shown in Figures 1 and 2.

DETAILED DESCRIPTION

[0029] Figure 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-turbine turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with turbofans as the teachings may be applied to other types of turbine engines including three-turbine architectures.

[0030] The engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that various bearing systems 38 at various locations may alternatively or additionally be provided.

[0031] The low speed spool 30 generally includes an innermost shaft 40 that interconnects a fan 42, a low pressure (or first) compressor section 44 and a low pressure (or first) turbine section 46. Note turbine section 46 will also be known as a fan drive turbine section. The inner shaft 40 is connected to the fan 42 through a geared architecture 48 to drive the fan 42 at a lower speed than the low speed fan drive turbine 46. The high speed spool 32 includes a more outer shaft 50 that interconnects a high pressure (or second) compressor section 52 and high pressure (or second) turbine section 54. A combustor 56 is arranged between the

high pressure compressor section 52 and the high pressure turbine section 54. As used herein, the high pressure turbine section experiences higher pressures than the low pressure turbine section. A low pressure turbine section is a section that powers a fan 42. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axis. The high and low spools can be either co-rotating or counter-rotating.

[0032] The core airflow C is compressed by the low pressure compressor section 44 then the high pressure compressor section 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine section 54 and low pressure turbine section 46.

[0033] The engine 20 in one example is a high-bypass geared aircraft engine. The bypass ratio is the amount of air delivered into bypass path B divided by the amount of air into core path C. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than ten (10), the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine section 46 has a pressure ratio that is greater than about 5. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor section 44, and the low pressure turbine section 46 has a pressure ratio that is greater than about 5:1. In some embodiments, the high pressure turbine section may have two or fewer stages. In contrast, the low pressure turbine section 46, in some embodiments, has between 3 and 6 stages. Further the low pressure turbine section 46 pressure ratio is total pressure measured prior to inlet of low pressure turbine section 46 as related to the total pressure at the outlet of the low pressure turbine section 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicycle gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.5:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine

[0034] A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition -- typically cruise at about 0.8 Mach and about 35,000 feet. The flight condition of 0.8

Mach and 35,000 ft, with the engine at its best fuel consumption - also known as “bucket cruise Thrust Specific Fuel Consumption (“TSFC”). TSFC is the industry standard parameter of the rate of lbm of fuel being burned per hour divided by lbf of thrust the engine produces at that flight condition. “Low fan pressure ratio” is the ratio of total pressure across the fan blade alone, before the fan exit guide vanes. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. “Low corrected fan tip speed” is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of $[(\text{Ram Air Temperature deg R}) / 518.7]^{0.5}$. The “Low corrected fan tip speed” as disclosed herein according to one non-limiting embodiment is less than about 1150 ft / second. Further, the fan 42 may have 26 or fewer blades.

[0035] An exit area 400 is shown, in Figure 1 and Figure 2, at the exit location for the high pressure turbine section 54 is the annular area of the last blade of turbine section 54. An exit area for the low pressure turbine section is defined at exit 401 for the low pressure turbine section is the annular area defined by the last blade of that turbine section 46. As shown in Figure 2, the turbine engine 20 may be counter-rotating. This means that the low pressure turbine section 46 and low pressure compressor section 44 rotate in one direction (“-”), while the high pressure spool 32, including high pressure turbine section 54 and high pressure compressor section 52 rotate in an opposed direction (“+”). The gear reduction 48, which may be, for example, an epicyclic transmission (e.g., with a sun, ring, and star gears), is selected such that the fan 42 rotates in the same direction (“+”) as the high spool 32. With this arrangement, and with the other structure as set forth above, including the various quantities and operational ranges, a very high speed can be provided to the low pressure spool. Low pressure turbine section and high pressure turbine section operation are often evaluated looking at a performance quantity which is the exit area for the turbine section multiplied by its respective speed squared. This performance quantity (“PQ”) is defined as:

$$\text{Equation 1: } PQ_{lpt} = (A_{lpt} \times V_{lpt}^2)$$

$$\text{Equation 2: } PQ_{hpt} = (A_{hpt} \times V_{hpt}^2)$$

where A_{lpt} is the area of the low pressure turbine section at the exit thereof (e.g., at 401), where V_{lpt} is the speed of the low pressure turbine section, where A_{hpt} is the area of the high pressure

turbine section at the exit thereof (e.g., at 400), and where V_{hpt} is the speed of the low pressure turbine section.

[0036] Thus, a ratio of the performance quantity for the low pressure turbine section compared to the performance quantify for the high pressure turbine section is:

$$\text{Equation 3: } (A_{lpt} \times V_{lpt}^2)/(A_{hpt} \times V_{hpt}^2) = PQ_{ltp}/PQ_{hpt}$$

In one turbine embodiment made according to the above design, the areas of the low and high pressure turbine sections are 557.9 in^2 and 90.67 in^2 , respectively. Further, the speeds of the low and high pressure turbine sections are 10179 rpm and 24346 rpm, respectively. Thus, using Equations 1 and 2 above, the performance quantities for the low and high pressure turbine sections are:

$$\text{Equation 1: } PQ_{ltp} = (A_{lpt} \times V_{lpt}^2) = (557.9 \text{ in}^2)(10179 \text{ rpm})^2 = 57805157673.9 \text{ in}^2 \text{ rpm}^2$$

$$\text{Equation 2: } PQ_{hpt} = (A_{hpt} \times V_{hpt}^2) = (90.67 \text{ in}^2)(24346 \text{ rpm})^2 = 53742622009.72 \text{ in}^2 \text{ rpm}^2$$

and using Equation 3 above, the ratio for the low pressure turbine section to the high pressure turbine section is:

$$\text{Ratio} = PQ_{ltp}/PQ_{hpt} = 57805157673.9 \text{ in}^2 \text{ rpm}^2 / 53742622009.72 \text{ in}^2 \text{ rpm}^2 = 1.075$$

[0037] In another embodiment, the ratio was about 0.5 and in another embodiment the ratio was about 1.5. With PQ_{ltp}/PQ_{hpt} ratios in the 0.5 to 1.5 range, a very efficient overall gas turbine engine is achieved. More narrowly, PQ_{ltp}/PQ_{hpt} ratios of above or equal to about 0.8 are more efficient. Even more narrowly, PQ_{ltp}/PQ_{hpt} ratios above or equal to 1.0 are even more efficient. As a result of these PQ_{ltp}/PQ_{hpt} ratios, in particular, the turbine section can be made much smaller than in the prior art, both in diameter and axial length. In addition, the efficiency of the overall engine is greatly increased.

[0038] The low pressure compressor section is also improved with this arrangement, and behaves more like a high pressure compressor section than a traditional low pressure compressor section. It is more efficient than the prior art, and can provide more compression in fewer stages. The low pressure compressor section may be made smaller in radius and shorter in length while contributing more toward achieving the overall pressure ratio design target of the engine.

[0039] As shown in Figure 3, the engine as shown in Figure 2 may be mounted such that the high pressure turbine 54 is “piggy-back” bearing mounted. As shown, the high spool and shaft 32 includes a bearing 112 which supports the high pressure turbine 54 and the high spool 32 on an outer periphery of the low spool shaft 30. The forward end of the high spool 32 is supported by a bearing 110 at an outer periphery of the shaft 32. The bearing 110 is supported on static structure 108 associated with the overall engine casings arranged to form the core of the engine as is shown in figure 1. In addition, the shaft 30 is supported on a bearing 100 at a forward end. The bearing 100 is supported on static structure 102. A rear end of the shaft 30 is supported on a bearing 106 which is attached to static structure 104.

[0040] With this arrangement, there is no bearing support struts or other structure in the path of hot products of combustion passing downstream of the combustion section, and into the high pressure turbine 54, and no bearing compartment support struts in the path of the products of combustion as they flow across to the low pressure turbine 46. Stated otherwise, the bearing 112, and its associated mount, are positioned radially inwardly of the hubs 106 and 108 associated with the turbine sections 54 and 46.

[0041] As shown, there is no mid-turbine frame mounted in the area 402 between the turbine sections 54 and 46.

[0042] While this invention has been disclosed with reference to one embodiment, it should be understood that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

CLAIMS:

1. A turbine section of a turbofan engine comprising:
 - a fan drive turbine section for driving a fan configured to deliver air into a bypass duct and into a main compressor;
 - a second turbine section,
 - wherein said fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed,
 - wherein said second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is faster than the first speed,
 - wherein a first performance quantity is defined as the product of the first speed squared and the first area,
 - wherein a second performance quantity is defined as the product of the second speed squared and the second area;
 - wherein a ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5;
 - said second turbine section driving a first shaft, and said first shaft being supported on a bearing, with said bearing being mounted on an outer periphery of a second shaft driven by said fan drive turbine section; and
 - a gear reduction between the fan and the fan drive turbine section such that the fan will rotate at a lower speed than the fan drive turbine section.
2. The turbine section as set forth in claim 1, wherein said ratio is above or equal to about 0.8.
3. The turbine section as set forth in claim 1, wherein said fan drive turbine section has at least three stages.
4. The turbine section as set forth in claim 1, wherein said fan drive turbine section has up to six stages.

5. The turbine section as set forth in claim 1, wherein said second turbine section has two or fewer stages.
6. The turbine section as set forth in claim 1, wherein a pressure ratio across the fan drive turbine section is greater than about 5:1.
7. The turbine section as set forth in claim 1, wherein said first shaft is supported on a second bearing on its outer periphery, with said second bearing being mounted to static structure.
8. The turbine section as set forth in claim 1, wherein said fan drive and second turbine sections rotating in opposed directions.
9. The turbine section as set forth in claim 7, wherein there is no bearing support structure positioned intermediate said fan drive and second turbine sections.
10. A gas turbine engine comprising:
 - a fan;
 - a bypass duct in fluid communication with the fan;
 - a compressor section in fluid communication with the fan, a bypass ratio of the air delivered into the bypass duct compared to the air delivered into the compressor section being greater than or equal to 6;
 - a combustion section in fluid communication with the compressor section;
 - a turbine section in fluid communication with the combustion section,
 - wherein the turbine section includes a fan drive turbine section and a second turbine section,
 - wherein said fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed,
 - wherein said second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is higher than the first speed,
 - wherein a first performance quantity is defined as the product of the first speed squared and the first area,

wherein a second performance quantity is defined as the product of the second speed squared and the second area;

wherein a ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5;

said second turbine section driving a first shaft, and said first shaft being mounted on a bearing, with said bearing being mounted on an outer periphery of a second shaft which is driven by said fan drive turbine section; and

a gear reduction included between the fan and the fan drive turbine section such that the fan will rotate at a lower speed than the fan drive turbine section.

11. The engine as set forth in claim 10, wherein said ratio is above or equal to about 0.8.

12. The engine as set forth in claim 10, wherein the compressor section includes a first compressor section and a second compressor section, wherein the fan drive turbine section and the first compressor section are configured to rotate in a first direction, and wherein the second turbine section and the second compressor section are configured to rotate in a second opposed direction.

13. The engine as set forth in claim 12, wherein said fan rotates in the second opposed direction.

14. The engine as set forth in claim 12, wherein said second shaft is supported on a second bearing on its outer periphery, with said second bearing being mounted to static structure.

15. The engine as set forth in claim 14, wherein a third bearing supports said second compressor section on an outer periphery of said first shaft driven by said second turbine section.

16. The engine as set forth in claim 15, wherein a fourth bearing is positioned adjacent said first compressor section, and supports an outer periphery of said second shaft which is configured to rotate with said fan drive turbine section.

17. The engine as set forth in claim 14, wherein there is no bearing support structure positioned intermediate said fan drive turbine section and the second turbine section.

18. A turbofan engine comprising:
a fan;
a bypass duct in fluid communication with the fan
a compressor section in fluid communication with the fan, a bypass ratio of the air delivered into the bypass duct compared to the air delivered into the compressor section is greater than or equal to 6;
a combustion section in fluid communication with the compressor section;
a turbine section in fluid communication with the combustion section,
wherein the turbine section includes a fan drive turbine section and a second turbine section,
wherein said fan drive turbine section has a first exit area at a first exit point and is configured to rotate at a first speed,
wherein said second turbine section has a second exit area at a second exit point and is configured to rotate at a second speed, which is higher than the first speed,
a first performance quantity is defined as the product of the first speed squared and the first area,
wherein a second performance quantity is defined as the product of the second speed squared and the second area;
wherein a ratio of the first performance quantity to the second performance quantity is between about 0.5 and about 1.5; and
the compressor section including a first compressor section and a second compressor section, wherein the fan drive turbine section and the first compressor section will rotate in a first direction and the second turbine section and the second compressor section will rotate in a second opposed direction, a gear reduction included between said fan and first compressor section, such that the fan will rotate at a lower speed than the fan drive turbine section, and said fan will rotate in the second opposed direction.

19. The turbofan engine as set forth in claim 18, wherein a gear ratio of said gear reduction is greater than about 2.3.

1/2

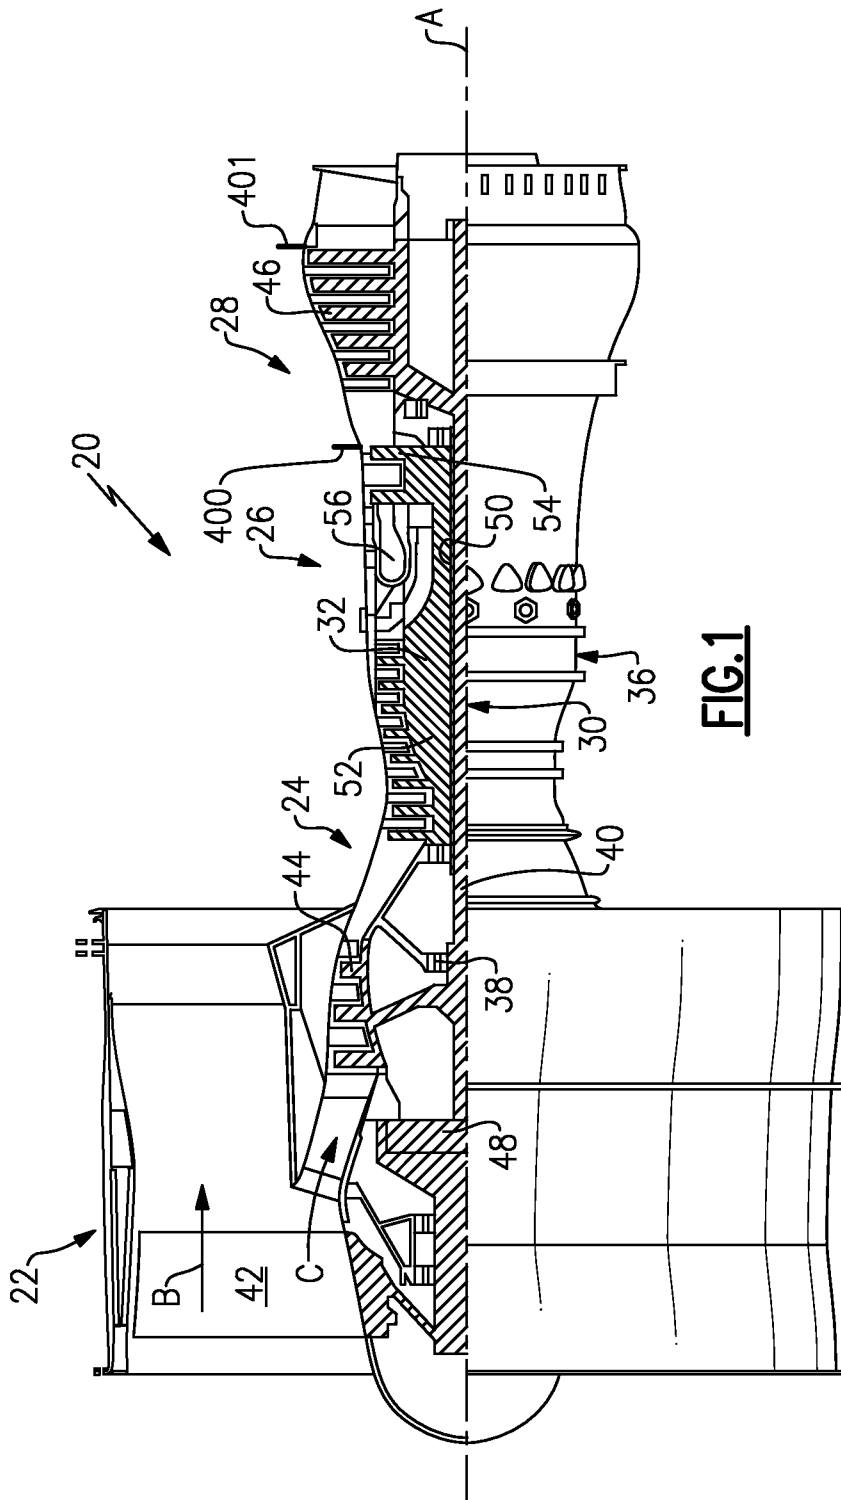


FIG. 1

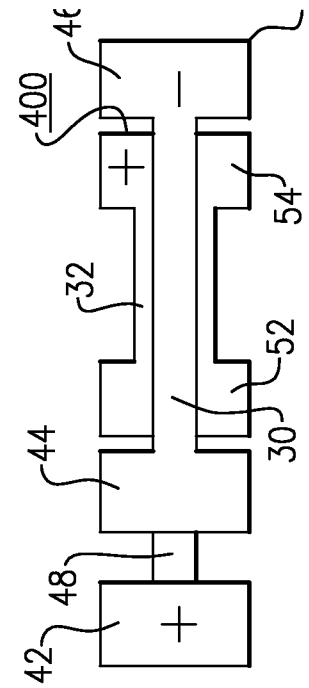


FIG. 2

2/2

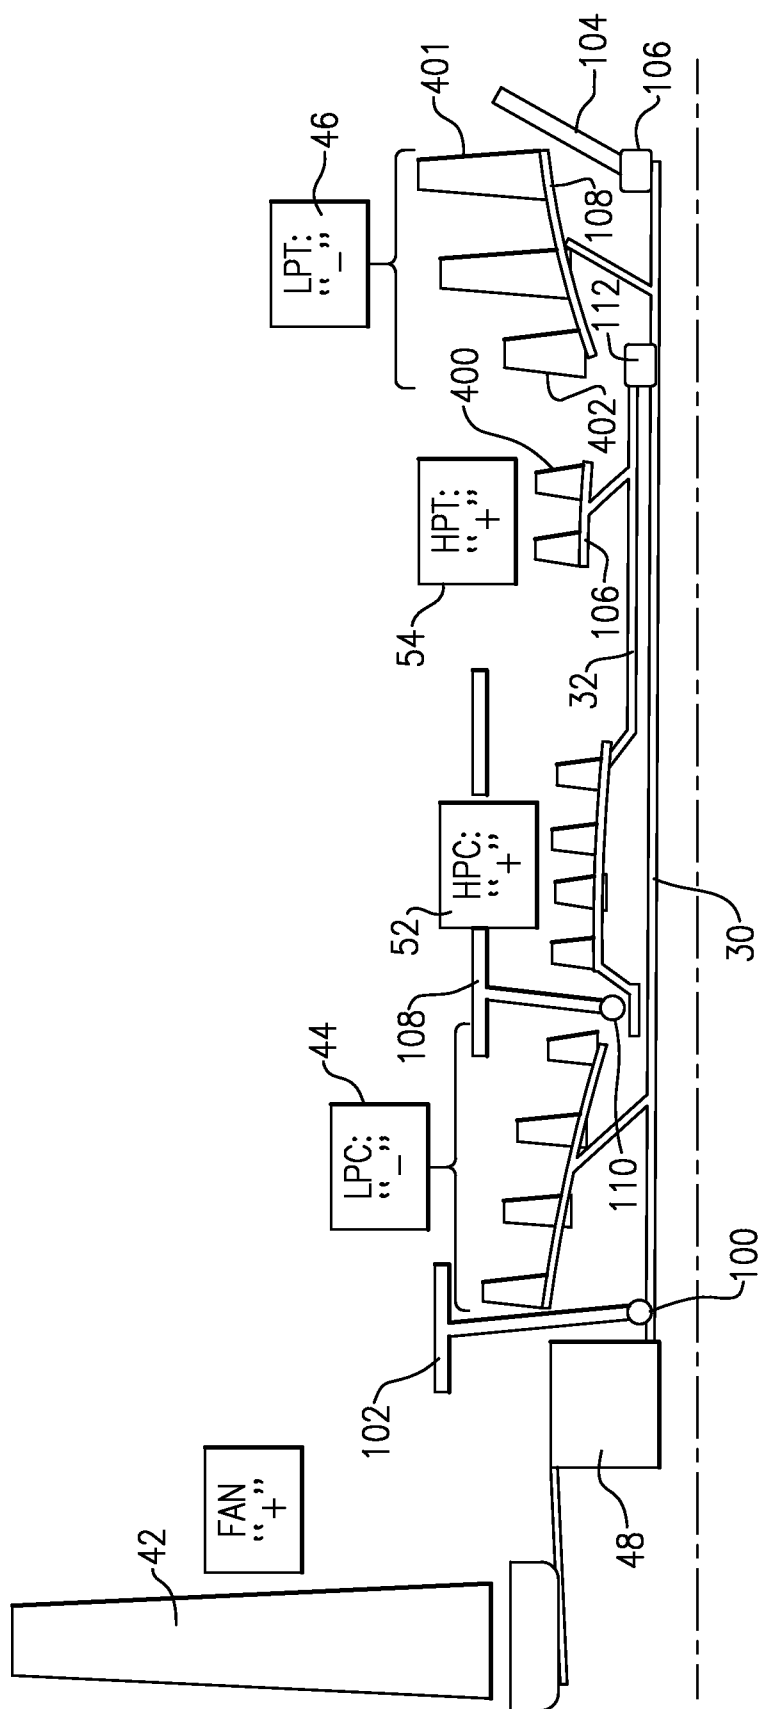


FIG. 3

