

593102

FORM 1
REGULATION 9

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952-1973

APPLICATION FOR A PATENT

I/We FOSECO INTERNATIONAL LIMITED

of 285 Long Acre, Nechells, BIRMINGHAM B7 5JR, ENGLAND

hereby apply for the grant of a Patent for an invention
entitled:

CASTING OF METALS

which is described in the accompanying complete specification.
This Application is a Convention Application and is based on
the Application(s) numbered: 8612474 and 8704015 for a Patent
or similar protection made in United Kingdom (both)
on 22 May 1986 and 20 February 1987 respectively.

My/Our address for service is:

GRIFFITH HASSEL & FRAZER
71 YORK STREET
SYDNEY N.S.W. 2000
AUSTRALIA

DATED this 7th day of May, 1987.

FOSECO INTERNATIONAL LIMITED

By his/their Patent Attorneys


APPLICATION ACCEPTED AND AMENDMENTS

ALLOWED 22.11.89

GRIFFITH HASSEL & FRAZER

TO: THE COMMISSIONER OF PATENTS
COMMONWEALTH OF AUSTRALIA

6764A:rk

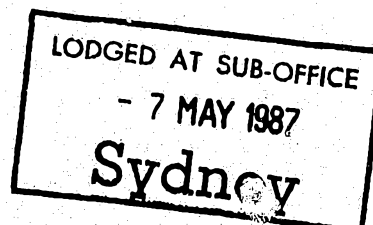

PATENTS ACT 1952 (AS AMENDED)

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT(Name of
applicant)

In support of an Application made by:

FOSECO INTERNATIONAL LIMITED

(Title)

for a patent for an invention entitled:

CASTING OF METALS

(Full name of
signatory)

I, WARWICK REGINALD ROBERTS

(Address of
signatory)

of 285 Long Acre, Nechells, Birmingham, B7 5JR

do solemnly and sincerely declare as follows:

1. I am authorised by the above mentioned applicant for the patent to make this Declaration on its behalf.

2. The name and address of each actual inventor of the invention is as follows:

(Insert
details of
inventor/s)

ANDREW MARTIN PLOWMAN of 20 Carron Way, Withymoor Village,
Brierley Hill, West Midlands, DY5 2SN,
DAVID LLEWELLYN JONES of 17 Wellman Croft, Selly Oak,
Birmingham, B29 6NP

(Insert
details of
assignment,
etc.)

and the fact(s) upon which the applicant is entitled to make this application are as follows: Foseco International Limited acquired their rights to the invention from the inventors by virtue of the inventors' conditions of employment with Foseco International Limited, by virtue of S34(1) (fa).

(Delete
paragraphs
3 and 4,
for Paris
Convention
application)

3. The basic application(s) as defined by Section 141 of the Act was(were) made as follows:

Country ..United Kingdom No.8612474.... on ..22 May 1986.....

in the name(s) ..Foseco International Limited.....

and in ..United Kingdom No. 8704015.... on ..20 February 1987.....

in the name(s) ...Foseco International Limited.....

and in on

in the name(s)

and in on

in the name(s)

4. The basic application(s) referred to in the preceding paragraph of this Declaration was(were) the first application(s) made in a Convention country in respect of the invention the subject of this application.

(Place and
date of
signing)

Declared at Birmingham this 24th day of April 1987

Signed: *Warwick R. Roberts*

Position: DIRECTOR

(12) PATENT ABRIDGMENT (11) Document No. AU-B-72612/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 593102

(54) Title
INCLUSION REMOVAL FROM METALS

International Patent Classification(s)
(51)⁴ B22D 043/00 B22D 007/00 B22D 035/04

(21) Application No. : 72612/87 (22) Application Date : 07.05.87

(30) Priority Data

(31) Number	(32) Date	(33) Country
8612474	22.05.86	GB UNITED KINGDOM
8704015	20.02.87	GB UNITED KINGDOM

(43) Publication Date : 26.11.87

(44) Publication Date of Accepted Application : 01.02.90

(71) Applicant(s)
FOSECO INTERNATIONAL LIMITED

(72) Inventor(s)
ANDREW MARTIN PLOWMAN; DAVID LLEWELLYN JONES

(74) Attorney or Agent
GRIFFITH HACK & CO. SYDNEY

(56) Prior Art Documents
US 3672432
US 2788554
GB 1029543

(57) Claim

1. An article of refractory holloware for use in a runner assembly for casting molten metals wherein the article is elongated, has an internal passageway having an inlet and an outlet and a plurality of inner surfaces in the passageway between the inlet and outlet adapted to increase the internal surface contact area of the article and so arranged as to effect at least two abrupt changes of direction of flow of molten metal flowing through the article.

13. A method of casting molten metal in a mould having a runner system connected thereto in which the method comprises providing a runner system comprising at least one article according to any one of claims 1 to 12 and pouring molten metal through the runner system into the mould in order to remove non-metallic inclusions from the molten metal.

18. A method of making an article according to any one of claims 1 to 12 in which the method comprises locating an accurately dimensioned core of sacrificial material in a mould, forming the article in the mould around the core, removing the article and the core from the mould, and firing the article and the core to remove the core.

593102

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

Form 10

COMPLETE SPECIFICATION

FOR OFFICE USE

Short Title:

Int. Cl:

Application Number: 7 2 612/87
Lodged:

Complete Specification-Lodged:


Accepted:

Lapsed:

Published:

Priority:

Related Art:

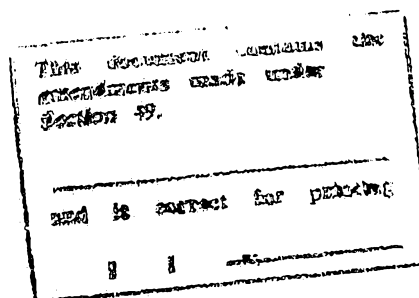

TO BE COMPLETED BY APPLICANT

Name of Applicant: FOSECO INTERNATIONAL LIMITED

Address of Applicant: 285 Long Acre, Nechells,
BIRMINGHAM B7 5JR, ENGLAND

Actual Inventor: Andrew Martin Plowman and
David Llewellyn Jones

Address for Service: GRIFFITH HASSEL & FRAZER
71 YORK STREET
SYDNEY NSW 2000
AUSTRALIA

Complete Specification for the invention entitled:

CASTING OF METALS

The following statement is a full description of this
invention, including the best method of performing it known to
me/us:-

6764A:rk

CASTING OF METALS

This invention relates to the casting of metals more especially molten ferrous metals. The invention includes articles for use in runner systems and to methods of casting using such articles.

5

When casting molten ferrous metals such as iron or steel into ingot moulds or casting moulds e.g. sand moulds, it is known that the molten metal may contain undersirable non-metallic particles usually referred to as inclusions. The inclusions generally emanate from the refractories and/or metallurgical slags by which the molten metal has been contacted during its manufacture, its subsequent treatment and/or containment on route to the casting site. Although the inclusions are lower density than the metal and should therefore float to the surface of the solidifying ingot or casting

10

15

20

25

the inclusions are often entrapped within the body of the ingot or casting with the result that the metallurgical properties of the metal are adversely affected by the non-metallic contamination. This problem is becoming less tolerable as higher demands are placed on iron and steel producers for higher quality products for use in the e.g. aerospace, automotive, and construction industries.

The production of ingots of ferrous metals by bottom casting or uphill teeming generally involves producing a plurality of ingots from one source of molten metal i.e. one ladleful of molten metal is distributed to several ingot moulds simultaneously. Generally, the metal is poured down a hollow refractory cylinder having a flared end uppermost, a so-called refractory trumpet, into and through a hollow refractory distributor located at the foot of the trumpet. The metal continues to flow from the distributor into a plurality of generally horizontal radially disposed hollow refractory runners having a straight through bore into the bottom of a corresponding plurality of ingot moulds and thus form ingots. For the sake of clarity the following description refers chiefly to the casting of ingots but it is to be appreciated that the invention is also applicable to the casting of intricate castings e.g. of steel, produced in sand moulds using a runner system located between the cope and drag portions of the mould assembly.

The refractory items mentioned above are usually referred to collectively as runner assembly refractory holloware. For convenience of use the holloware is usually in the form of a plurality of interfitting sections having relatively simply socket and spigot joints.

Unfortunately, the refractories used to form the holloware may also contribute to the problem of inclusions which is particularly unfortunate as the molten metal may have undergone treatment to reduce the incidence of extraneous non-metallic matter prior to pouring into the holloware. As these inclusions detract from the quality of the finally cast ingot their presence is clearly undesirable.

10 We have now found that the level of inclusions in ferrous metal ingots and other castings maybe minimised by using a casting assembly in which at least one runner section comprises means to trap inclusions whilst permitting a suitable flow rate of metal through the runner.

15 According to the present invention there is provided an article of refractory holloware for use in a runner assembly for casting molten metals having at least one inner surface adapted to increase the internal surface contact area of the article and so arranged as to effect at least two abrupt changes of direction of flow of molten metal
20 flowing through the article.
25

The increase in the internal surface contact area of the article of the invention compared with a similar article having only a single linear bore

is generally at least twice but may be as high as 100 times. Preferably, the increase in surface area will be from about twice to twenty times.

5 The article of the invention is particularly suitable for enhancing the removal of non-metallic inclusions such as aluminous inclusions e.g. alumina or alumino-silicates but other inclusions such as zirconia, silica, 10 calcium aluminates, calcium silicates or calcium alumino-silicates may also be minimised.

 The increased internal surface of contact of the article may be provided by means of a tortuous path e.g. by means of a labyrinthine or zig-zag path. The latter may comprise 15 one or more series of regular inclining and declining paths extending from an inlet port to an outlet port.

 The use of such an article of hollow- 20 are has been found to be very efficacious in the removal of alumina inclusions. The inclusions were found to be adsorbed onto the internal surfaces of the holloware and also deposited at the juncture where the flow of 25 metal is interrupted abruptly between adjacent inclining and declining surfaces. The tortuous path may be orientated horizontally or in any other plane.

5 The increased internal surface contact area of the holloware of the present invention may arise from a combination of a labyrinthine path, zig-zag path or other tortuous path and at least one throughgoing linear bore. In this way the internal surface area will be increased further thus enhancing the removal of inclusions from molten ferrous metal passing therethrough.

10 Furthermore, the article of the invention may also serve as a means for reducing the initial velocity of the molten stream thus reducing the "fountain effect" without adversely affecting the pouring rate of the molten metal stream.

15 The holloware of the present invention may simply replace a conventional refractory holloware article which otherwise may have been used in any particular casting runner assembly. This feature is particularly advantageous as
20 it does not necessitate a foundry or steelworks to change its current workshop practice or apparatus to accommodate an article of the invention.

25 An article of refractory holloware according to the present invention may be used in the production of steel castings by incorporating the article as part of the runner assembly during mould preparation. The

holloware may be used for steel castings having a mass of about 200 kg or more. For convenience the holloware may be situated anywhere along the runner assembly but it has been found
5 preferable to site the holloware approximately adjacent to the inlet of the mould cavity.

Known methods of forming refractory holloware may be employed to form the articles of the present invention such as refractory
10 casting techniques e.g. particulate refractory material bonded with refractory cement. One method of forming an article of the invention having an internal zig-zag path is to prepare an accurately dimensioned polystyrene core (or
15 other sacrificial material such as paper or wax) to define the internal zig-zag passageway.

The refractory for the holloware is cast around the core which may include suitable inlet and outlet ports in a suitable mould so
20 spaced away from the core that the desired outer wall thickness of the holloware is obtained. Once cast the holloware is dried, demoulded and fired to remove the sacrificial core material and harden the refractory to produce an article
25 of refractory holloware having an integral internal surface defining the exact zig-zag configuration provided by the core material.

Preferably the internal surfaces of

the holloware are formed as smooth as possible. Internal surfaces which are not generally smooth lend themselves as a potential source of inclusions since they are more easily
5 eroded than smooth surfaces.

The refractory material may be selected from any of the known high quality refractories compatible with molten ferrous metals such as steel. Particularly preferred
10 materials are alumina, magnesite, mullite, silica, zirconia or mixtures of any of these. The materials may be fused, sintered or bonded by means of e.g. a refractory cement such as high alumina or calcium aluminate cement.

The use of high quality refractory material renders it possible to provide the articles of the invention with an outer shell having a significantly thinner wall thickness than conventional runner sections formed of
15 fireclay or other similar low quality refractory material. The thinner wall thickness does not however adversely affect the integrity or strength of the articles of the invention which exhibit satisfactory resistance to both mechanical
20 and thermal shock. Furthermore, by virtue of effectively minimising the wall thickness of the article of the invention it may be readily appreciated that this also contributes to an
25 increase in the internal surface area of the

article compared with a conventional article having the same external dimensions and cross-section but having thick walls.

5 The invention is further described with reference to the accompanying schematic drawings in which:-

Fig. 1. is a longitudinal section of part of a conventional runner assembly showing its internal passageway,

10 Fig. 2. is a longitudinal section of a part of a runner assembly according to a specific embodiment of the present invention showing a zig-zag passageway and a plurality of throughgoing linear bores,

15 Fig. 3. is a longitudinal section of a part of a runner assembly according to a specific embodiment of the invention showing a plurality of interconnected zig-zag passageways,

20 Fig. 4. is a longitudinal section showing the use of an article as illustrated in figure 3 in use in a steel casting runner assembly.

25 Referring to Fig. 1 there is shown a

part of a conventional runner assembly holloware
1 having a square external cross-section and
thick side walls 2. The cylindrical bore 3 tra-
verses between socket 4 and spigot 5 for engagement
5 with other parts of a bottom runner assembly (not
shown). In Fig. 2, the holloware 6 has relatively
thin side walls 7 also of square external cross-
section. The internal passageway 8 is defined by
a tortuous zig-zag path 9 and a plurality of
10 linear bores 9a traversing between socket 10 and
spigot 11. Socket 10 and spigot 11 are suitably
dimensioned to co-operate with matching sockets
and spigots of conventional runner holloware.

15 In Figs. 3 and 4, the holloware 12 has
relatively thin side walls 13 of square cross-
section. The internal passageway is defined by
a plurality of tortuous zig-zag pathways 14 which
are inter-connected by means of a plurality of
pathways 15. The internal passageway traverses
20 between sockets 16 and 17 also having a square
cross-section and dimensioned to co-operate sub-
stantially with the conventional runner channel
18 formed between the sand mould halves 19 and
20. The holloware 12 is shown adjacent the ingate
25 21 which communicates with the mould cavity (not
shown).

The invention is further illustrated
below with reference to the following comparative
examples:-

EXAMPLE I

A small scale experimental test was conducted using a conventional six-piece refractory bottom casting assembly comprising a two-part trumpet, a distributor brick, two horizontal bottom runner sections and an inlet leading to a 500 kg cast iron ingot mould. The test was repeated several times in order to evaluate several different holloware sections according to the invention where each section tested had a different internal surface contact area. On each occasion the bottom runner section immediately prior to the inlet was replaced with a section of holloware according to the invention except for the test (Test 1) conducted on a wholly conventional bottom casting assembly comprising runner sections having a straight through bore. The holloware sections according to the invention were of designs generally similar to that of Figure 2.

The results of the comparative trial in which aluminium-killed molten steel was poured at a temperature of 1600°C in each case are shown in Table 1:

TABLE 1

TEST NO.	POURING TIME	POURING RATE	INTERNAL SURFACE CONTACT AREA	INCLUSIONS REMOVED
1	30 secs	16.66 kg/sec	1	-
2	45 secs	11.11 kg/sec	2	30-50%
3	39 secs	12.82 kg/sec	4	40-60%
4	33 secs	15.15 kg/sec	6	60-80%

The internal surface contact areas given above for Tests 2, 3 and 4 are relative to that for Test 1 which is assigned a value of 1. After the steel had been cast, in each case the last runner section (containing solidified steel) was longitudinally sectioned and the cut surface polished. Photomicrographs of the polished surface were taken and the 'inclusions removed' figures given above obtained by inspection of the photomicrographs. In the case of Test 1 the inspection revealed no removal of inclusions.

EXAMPLE II

An experimental foundry test was conducted using conventional sand moulding practice for producing intricate shaped steel

castings. The test was performed in two parts in one case using a wholly conventional runner assembly and in the other case part of the runner assembly was adapted to accommodate an
5 an article of refractory holloware substantially as shown in Figure 3 above. In the case where the holloware was used it was positioned approximately 30 mm away from the ingate to the mould cavity. In both cases approximately
10 500 kg of low carbon steel having a nominal carbon content of 0.2% and aluminium killed in a ladle was used to cast an intricate casting of steel. The thus killed steel was poured into each runner assembly whilst at a temperature
15 of 1590°C. It was observed that when the test using the holloware was performed approximately 7 seconds elapsed as the holloware was filled and a further 20 seconds taken to obtain an optimum flow rate.

20 The pouring rate during the period of steady flow was 7.5 kg/sec. The internal surface contact area of that length of the runner used in the first part of the test and having the same length as the holloware used
25 in the second part of the test was assigned a value of 1. In comparison the internal surface contact area of the holloware had a value of 3.

30 The proportion of inclusions removed by the holloware was 40-60%.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

5

1. An article of refractory holloware for use in a runner assembly for casting molten metals wherein the article is elongated, has an internal passageway having an inlet and an outlet and a plurality of inner surfaces in
10 the passageway between the inlet and outlet adapted to increase the internal surface contact area of the article and so arranged as to effect at least two abrupt changes of direction of flow of molten metal flowing through the article.

15

2. An article according to claim 1 wherein the increased internal surface contact area of the article is provided by a tortuous path.

20

3. An article according to claim 2 wherein the tortuous path is labyrinthine.

25

4. An article according to claim 2 wherein the tortuous path is a zig-zag path.

30

5. An article according to any one of claims 2 to 4 wherein the article has at least one linear bore connecting one part of the tortuous path with another part.

35

6. An article according to any one of the preceding claims wherein the increase in the internal surface area of the article compared with a similar article having only a single linear bore is from 2 to 100 times.

7. An article according to claim 6 wherein the



increase in the internal surface contact area of the article compared with a similar article having only a single linear bore is from 2 to 20 times.

8. An article according to any one of the preceding claims wherein the article is formed from a fused, sintered or bonded refractory material.

9. An article according to claim 8 wherein the article is formed from a composition comprising a particulate refractory material and a refractory cement binder.

10. An article according to claim 9 wherein the particulate refractory material is selected from one or more of alumina, magnesite, mullite, silica and zirconia.

11. An article according to claim 9 wherein the binder is selected from one or more of high alumina or calcium aluminate cement.

12. An article according to any one of the preceding claims wherein the internal surface contact area of the article is smooth.

13. A method of casting molten metal in a mould having a runner system connected thereto in which the method comprises providing a runner system comprising at least one article according to any one of claims 1 to 12 and pouring molten metal through the runner system into the mould in order to remove non-metallic inclusions from the molten metal.

14. A method according to claim 13 in which the runner system is connected to an ingot mould.

15. A method according to claim 13 in which the runner system is connected to a casting mould.

16. A method according to claim 15 in which the casting mould is a sand mould.

17. A method according to any one of claims 13 to 16 in which the molten metal is a ferrous metal.

18. A method of making an article according to any one of claims 1 to 12 in which the method comprises locating an accurately dimensioned core of sacrificial material in a mould, forming the article in the mould around the core, removing the article and the core from the mould, and firing the article and the core to remove the core.

19. A method according to claim 18 in which the sacrificial material is selected from one or more of paper, polystyrene and wax.

20. An article according to any one of claims 1 to 12 substantially as herein described with reference to any one of the Examples 1 and 2.

21. An article according to any one of claims 1 to 12 substantially as herein described with reference to any one of Figures 2 to 4.

22. A method according to any one of the claims 13 to 17 substantially as herein described with reference to any one of the Examples 1 and 2.



23. A method according to any one of the claims 18
5 to 19 substantially as herein described with reference to
any one of the Examples 1 and 2.

10

DATED this 7th day of November 1989

FOSECO INTERNATIONAL LIMITED

By their Patent Attorney

GRIFFITH HACK & CO.

15

20

25

30

35



FIG. 1.

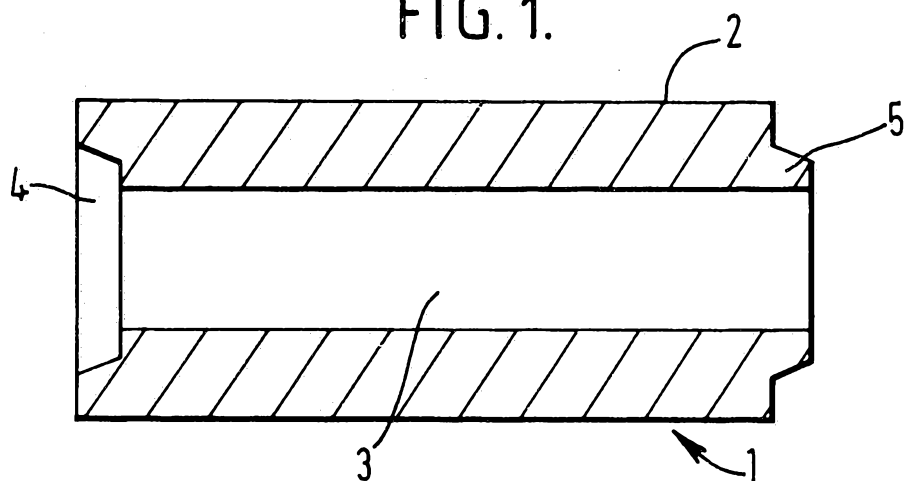


FIG. 2.

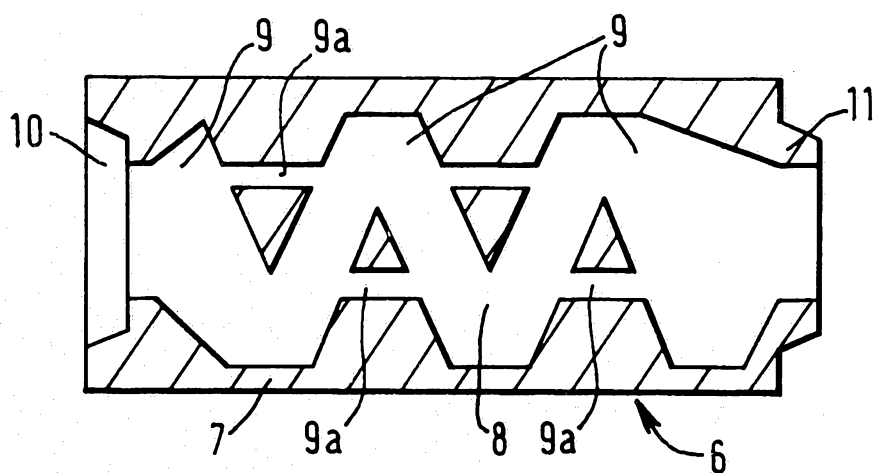


FIG. 3.

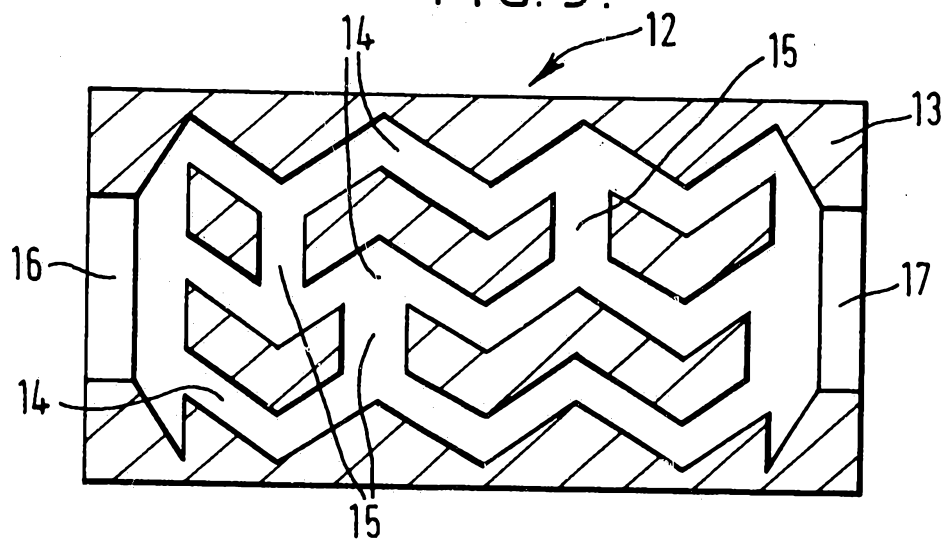


FIG. 4.

