



(51) International Patent Classification:

B65B 35/24 (2006.01) *B65B 61/24* (2006.01)
B65G 17/46 (2006.01) *B65B 61/28* (2006.01)
B65G 47/252 (2006.01)

(21) International Application Number:

PCT/EP2013/075139

(22) International Filing Date:

29 November 2013 (29.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12198834.9 21 December 2012 (21.12.2012) EP

(71) Applicant: **TETRA LAVAL HOLDINGS & FINANCE S.A.** [CH/CH]; 70, Avenue Général-Guisan, CH-1009 Pully (CH).(72) Inventor: **SANTI, Franco**; Via Bazzini, 16, I-41122 Modena (IT).(74) Agent: **LEONELLI, Pietro**; Tetra Pak Packaging Solutions SpA, Legal Affairs Dept., Via Antonio Delfini, 1, I-41123 Modena (IT).(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: FOLDING UNIT FOR POURABLE FOOD PRODUCT PACKAGING MACHINES

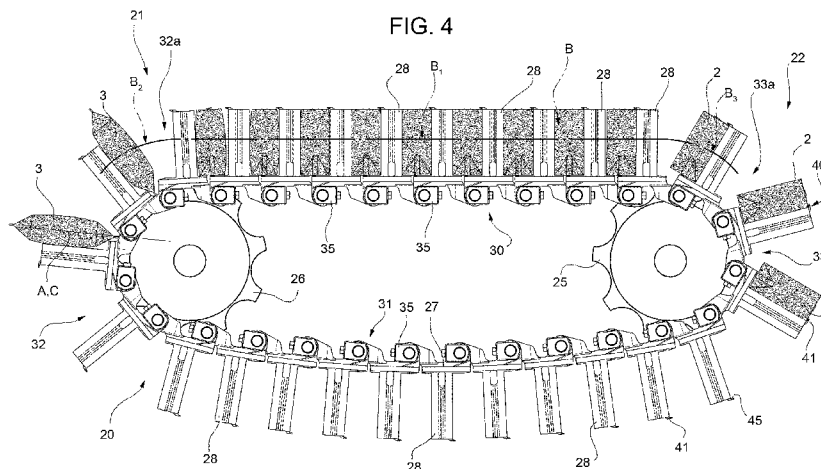

(57) Abstract: A folding unit for producing packages (2) of pourable food products from sealed packs (3) comprises a movable conveying member (20) and folding means arranged for folding at least one end portion of said packs (3), whilst said packs (2) are conveyed by said conveying member (20), to obtain said packages (2), said conveying member (20) carrying a plurality of plates (28), each plate (28) being configured to receive a pack (3) and to deliver a package (2) to a transferring and up-ending unit (100) arranged downstream of the folding unit (1), said folding unit (1) further comprising retention means (40) arranged for keeping said packages (2) on said plates (28).

FOLDING UNIT FOR POURABLE FOOD PRODUCT PACKAGING MACHINES

Technical field

5 The present invention relates to a folding unit for packaging machines for continuously producing sealed packages of pourable food products from a tube of packaging material.

Background of Invention

10 As is known, many food products, such as fruit juice, pasteurized or UHT (ultra-high-temperature treated) milk, wine, tomato sauce, etc., are sold in packages made of sterilized packaging material.

15 A typical example of this type of package is the parallelepiped-shaped package for liquid or pourable food products known as Tetra Brik Aseptic (registered trademark), which is made by folding and sealing laminated strip packaging material.

20 The packaging material has a multilayer structure substantially comprising a base layer for stiffness and strength, which may comprise a layer of fibrous material, e.g. paper, or of mineral-filled polypropylene material; and a number of layers of heat-seal plastic material, e.g. polyethylene film,
25 covering both sides of the base layer.

30 In the case of aseptic packages for long-storage products, such as UHT milk, the packaging material also comprises a layer of gas- and light-barrier material, e.g. aluminium foil or ethyl vinyl alcohol (EVOH), which is superimposed on a layer of heat-seal plastic material, and is in turn covered with another layer of heat-seal plastic material forming the inner face of the package eventually contacting the food

product.

As is known, packages of this sort are produced on fully automatic packaging machines, on which a continuous tube is formed from the web-fed packaging material; the web of packaging material is sterilized on the packaging machine, e.g. by applying a chemical sterilizing agent, such as a hydrogen peroxide solution, which, once sterilization is completed, is removed from the surfaces of the packaging material, e.g. evaporated by heating; and the web of packaging material so sterilized is maintained in a closed, sterile environment, and is folded and sealed longitudinally to form a vertical tube.

The tube is filled continuously downwards with the sterilized or sterile-processed food product, and is sealed and then cut along equally spaced cross sections to form pillow packs, which are then fed to a folding unit to form the finished packages, e.g. substantially parallelepiped-shaped packages.

More specifically, the pillow packs substantially comprise a parallelepiped-shaped main portion; and opposite top and bottom end portions projecting laterally on opposite sides of the main portion and defining respective triangular end flaps to be folded onto the main portion.

A longitudinal sealing strip, formed when sealing the packaging material to form the vertical tube, extends along the pillow packs; and the end portions of each pillow pack have respective transverse sealing seams perpendicular to the relative longitudinal sealing strip and defining respective end tabs projecting from the top and bottom of the pack.

The end portions of each pillow pack taper towards the main portion from the respective end tabs, and are pressed towards each other by the folding unit to form flat opposite end walls of the
5 pack, while at the same time folding the end flaps onto respective walls of the main portion.

Packaging machines of the above type are known which comprises;

- a folding unit where pillow packs are turned
10 into folded packages by folding means; and

- a transferring and up-ending unit for tipping the folded packages.

The folding unit substantially comprises:

- a chain conveyor feeding the pillow packs
15 along a forming path from a supply station to an output station;

- a fixed elongated guide member, which is positioned facing and at a distance from the chain conveyor and cooperates cyclically with each pillow
20 pack to flatten a first end portion of the pillow pack and so fold respective tab onto such first end portion; and

- folding elements cooperating cyclically with each pillow pack to flatten a second end portion of
25 the pillow pack and so fold respective tab onto such second end portion.

The transferring and up-ending unit is arranged downstream from the folding unit.

The transferring and up-ending unit transfers
30 the packages successively along a conveying path from an in-feed station to an out-feed station, and simultaneously up-ends the packages from an in-feed position, in which the packages are positioned with

their axis tilted to the horizontal, into an out-feed position, in which the packages are positioned with their axis substantially vertical.

The transferring and up-ending unit receives the
5 packages at the in-feed station from the chain conveyor of the folding unit, and feeds them to a further conveyor at the out-feed station.

More specifically, the chain conveyor supplies the unit with packages in the in-feed position, and
10 the further conveyor withdraws the packages from the unit in the out-feed position.

The transferring and up-ending unit substantially comprises a rotary member having a number of push arms which cooperate with respective
15 packages to remove the packages from the folding unit and push the packages along the conveying path. The transferring and up-ending unit further comprises a fixed guide extending substantially along the conveying path and cooperating with the packages to
20 ease them from the tilted in-feed position to the out-feed position.

More specifically, the conveying path along which the packages are fed is substantially in the form of an arc of circumference, at the end of which,
25 the packages are fed to the further conveyor.

A drawback of the known packaging machines is that it may be difficult to control the transfer of the packages from the folding unit to the transferring and up-ending unit, especially at high
30 output rates of the packaging machines, i.e. when the packages are advanced at high speed.

If the packages carried by the chain conveyor of the folding unit are not in the right position when

the push arms of the transferring and up-ending unit interact with them, the push arms are not able to remove the packages from the folding unit in the proper way. In this case, package jams may occur that
5 lead to packaging machine stops, and so to a reduction of the packaging machine efficiency.

Disclosure of Invention

An object of the invention is to improve the known packaging machines.

10 Another object of the invention is to improve the way in which packages are transferred from the folding unit to the transferring and up-ending unit in a packaging machine.

A further object of the invention is to provide
15 a folding unit for a packaging machine which allows the position of the packages to be properly controlled, before and during transferring of the packages to the transferring and up-ending unit.

According to the invention, there is provided a
20 folding unit for producing packages of pourable food products from sealed packs, comprising a movable conveying member and folding means arranged for folding at least one end portion of said packs, whilst said packs are advanced by said conveying
25 member, to obtain said packages, said conveying member carrying a plurality of plates, each plate being configured to receive a pack and to deliver a package to a transferring and up-ending unit arranged downstream of the folding unit, characterized in that
30 the folding unit further comprises retention means arranged for keeping said packages on said plates.

Owing to the inventions, the packages are prevented from falling down from the plates before,

and during, transferring from the folding unit to the transferring and up-ending unit. The packages, even in case the folding unit is driven at a very high production speed, i.e. at high output rate of the packaging machine, are prevented from sliding downwards along the plates and causing jams in the region interposed between the folding unit and the transferring and up-ending unit.

In addition, since the packages are kept on the plates and therefore do not fall down from the plates by gravity, the transferring and up-ending unit may be arranged in a lower position with respect to the folding unit, when compared with the known packaging machines. In this case, the packages are removed from the folding unit by the push arms of the transferring and up-ending unit when such packages have their axes in a position closer to the vertical direction if compared to the known filling machines. This allows having a better control during the transferring and up-ending phase. The packages, in fact, have to undergo a limited tilting, in order to be tipped from the withdrawal position, in which they are released from the folding unit, to the final position, in which their axes are arranged along a vertical direction.

Brief description of the drawings

A preferred, non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a partial perspective view, with parts removed for clarity, of a folding unit in accordance with the present invention for producing

packages of pourable food products from sealed pillow packs and of a transferring and up-ending unit;

Figure 2 shows a partial side view of the folding unit and of the transferring and up-ending unit of Figure 1, with parts removed for clarity;

Figures 3 shows a larger-scale detail of a plate of the folding unit provided with a retention element; and

Figure 4 shows side view of the folding unit and of the transferring and up-ending unit of Figure 1, with parts removed for clarity.

Detailed description of preferred embodiments

Number 1 in Figure 1 indicates as a whole a folding unit of a packaging machine (not shown) for continuously producing parallelepiped-shaped sealed packages 2 of a pourable food product, such as pasteurized or UHT milk, fruit juice, wine, etc., from a known tube of packaging material (not shown).

The tube is formed in known manner upstream from unit 1 by longitudinally folding and sealing a known web (not shown) of heat-seal sheet material, which comprises a layer of paper material covered on both sides with layers of heat-seal plastic material, e.g. polyethylene. In the case of an aseptic package 2 for long-storage products, such as UHT milk, the packaging material comprises a layer of oxygen-barrier material, e.g. aluminium foil, which is superimposed on one or more layers of heat-seal plastic material eventually forming the inner face of the package contacting the food product.

The tube of packaging material is then filled with the food product for packaging, and is sealed and cut along equally spaced cross sections to form a

number of pillow packs 3 (Figure 4), which are then transferred to unit 1 where they are folded mechanically to form respective packages 2.

With reference to Figures 1, 2 and 4, unit 1
5 substantially comprises a conveyor 20 for feeding packs 3 continuously along a predominantly straight horizontal forming path B from a supply station 21 to an output station 22 (both shown only schematically) and folding means for folding packs 3, in particular
10 at least one end portion of packs 3, whilst packs 3 are carried by the conveyor 20, to obtain packages 2. The folding means are known from prior art and, therefore, they are not shown and disclosed in detail. For example, the folding means may comprise a
15 fixed elongated guide member and folding elements as explained above.

Conveyor 20 comprises at least one gear and, in the example shown, a drive gear 25 and a driven gear 26; and an articulated chain 27 looped about and
20 meshing with gears 25, 26, and supporting a number of plates 28, for example flat rectangular plates, each of which projects from chain 27 and cooperates with and pushes a pack 3 to feed it along path B.

Chain 27 comprises a straight horizontal top
25 branch 30; a bottom branch 31 substantially parallel to branch 30; and two curved C-shaped portions 32, 33, which are positioned with their concavities facing, connect branches 30 and 31, and the middle portions of which define supply station 21 and output
30 station 22 respectively.

Path B comprises a straight main portion B₁ defined by branch 30 of chain 27; and two, respectively supply and output, curved end portions

B_2 , B_3 defined by respective top portions 32a, 33a of portions 32, 33 of chain 27 extending between corresponding stations 21, 22 and branch 30. Branch 30 and portions 32a, 33a of portions 32, 33 therefore
5 define a conveying portion of chain 27 to convey packs 3 from station 21 to station 22, while branch 31 and the remaining portions of portions 32, 33 define a return portion of chain 27 to feed plates 28 from station 22 to station 21.

10 Chain 27 comprises a number of articulated links 35 defined by substantially flat rectangular bodies, from which respective plates 28 project perpendicularly.

Given the structure of conveyor 20, plates 28
15 are positioned vertically along portion B_1 of path B.

At supply station 21, each pack 3 is fed onto conveyor 20 in a feed direction C, coaxial with an axis A of pack 3.

Number 100 in Figures 1 and 2 indicates as a
20 whole a transferring and up-ending unit for tipping the packages 2.

Transferring and up-ending unit 100 is known and, therefore, it will be described only to the extent that is necessary for the understanding of the
25 invention.

Transferring and up-ending unit 100 feeds a succession of packages 2 continuously along a path P extending from an in-feed station 104 to an out-feed station 105, and simultaneously up-ends packages 2
30 continuously from an in-feed position, in which they are positioned with axes A oriented in a direction K, into an out-feed position, in which they are positioned with respective axes A oriented in a

direction L crosswise to direction K. With reference to the embodiment shown, direction K is sloped relative to a horizontal plane and direction L is vertical.

5 Transferring and up-ending unit 100 receives packages 2 continuously and successively at in-feed station 104 from conveyor 20, and feeds them, in the out-feed position, to an output conveyor 108 at out-feed station 105. Output conveyor 108 moves the
10 packages 2 along a substantially straight path R tangent to an end portion of path P.

Transferring and up-ending unit 1 comprises a number of push arms 115 for removing respective packages 2 from conveyor 20 at in-feed station 104
15 and feeding them along path P to out-feed station 105; and a guide 117 which cooperates with packages 2 along path P to up-end them from the in-feed position to the out-feed position.

Path P is arc-shaped about an axis E and extends
20 along an angle of about 90° from in-feed station 104 to out-feed station 105.

Transferring and up-ending unit 100 also comprises:

- a drive shaft 111 rotating continuously about
25 axis E and powered by an electric motor of the packaging machine in known manner not shown; and

- a wheel 114 of axis E, fitted to shaft 111 rotatably about axis E, and supporting the push members 115, which are hinged to wheel 114.

30 Push arms 115 rotates together with wheel 114 around axis E and oscillate with respect to wheel 114 between a first operating position, in which they remove the packages 2 from folding unit 1, to a

second operating position, in which - after delivering the packages 2 to the conveyor 108 - are received into slots 116, obtained in the wheel 114.

5 Push arms 115 are provided at their ends opposite to the ends which interact with packages 2 with cam followers (not shown) that interact with a fixed cam (not shown), so that the fixed cam drives the push arms 115.

10 Guide 117 is curved, extends substantially along path P, on the outside of wheel 114, and cooperates with packages 2 to ease them from the in-feed to the out-feed position.

15 Furthermore, guide 117 defines a supporting and slide surface T for packages 2, which extends substantially along path P and slopes gradually from a portion T1, parallel to direction B and adjacent to in-feed station 104, to a substantially flat, vertical out-feed portion T2 parallel to direction L and adjacent to out-feed station 105.

20 The folding unit 1 further comprises holding means, or retention means 40 arranged for keeping the packages 2 on the plates 28 before and during transferring of the packages 2 from the folding unit 1 to the transferring and up-ending unit 100.

25 Retention means 40 comprises a plurality of holding elements, or retention elements 41, each associated with a corresponding plate 28. Each retention element 41 is arranged at an end portion 52 of the corresponding plate 28 opposite to a further end portion 53 at which the plate 28 is connected to the conveyor 20. Each retention element 41 comprises
30 a body 42 arranged to be received into a seat 43 obtained in an end surface 44 of the plate 28. The

retention element 41 also comprises an appendix 45 arranged for cooperating with a package 2 carried by the plate 28. The body 42 is provided with a recess 46 adapted for receiving a screw 47 that connects the retention element 41 to the plate 28. The screw 47 is provided with an elongated threaded portion 48 that passes through an opening 49 obtained in the bottom portion of the recess 46 and mates with a corresponding threaded hole 50 obtained in the bottom portion of the seat 43.

When the retention element 41 is fixed to the corresponding plate 28 the body 42 is received into the seat 43 and the appendix 45 is substantially flush with the end surface 44 and projects from the plate 28 in a direction arranged transversally, in particular perpendicularly, with respect to a side surface 51 of the plate 28. The side surface 51 is arranged to interact with a side wall 11 of package 2. The appendix 45 is arranged to interact with an end wall 12 of the package 2. In particular, in the embodiment show, since the packages carried by the conveyor 20 are arranged in an upside down configuration, the appendix 45 interacts with a bottom wall of the packages 2.

During operation, packs 3 are fed to conveyor 20 and - as conveyor 20 carries them along path P - the folding means fold packs 3, in particular end portions thereof, so as to form packages 2.

When a package 2 reaches output station 22, i.e. the region where the folding unit 1 cooperates with the transferring and up-ending unit 100, a push arm 115 interacts with the package 2 in order to remove the package 2 from the corresponding plate 28.

Before and during the removal step, the retention element 41 prevents the package 2 from falling from plate 28 or sliding down along plate 28, so that the position of the package 2 - at the point
5 in time the push arm 115 contacts it - is uniquely set and constant for each plate 28, and at every working cycle. At the same time, since the appendix 45 is arranged transversally, in particular substantially perpendicularly, with respect to the
10 side surface 51, the retention element 41 does not obstruct the removal of the package 2 from the plate 28 by means of the push arm 115.

Subsequently, the push arm 115 delivers the package 2 to the output conveyor 108.

15 Since the retention means 40 prevent the packages 2 from sliding downwards along the plates 28, the transferring and up-ending unit 100 may be arranged in a lower position with respect to the folding unit 1 if compared with the known packaging
20 machines.

In this case, the angle formed by the direction K with a horizontal plane, i.e. the angle formed by the axes A of the packages 2 with a horizontal plane when the packages 2 are removed from the folding unit
25 1, is greater than in the case of the known packaging machines. This allows a better handling of the packages 2 by the push arms 115. The packages 2, in fact, in order to reach the final position in which their axes A are arranged vertically must be turned,
30 or tipped, to a lesser extent than in the known packaging machines. In other words, the packages 2 are removed from the folding unit 1 when they are in a withdrawal configuration closer to the final

configuration, in which they are delivered to output conveyor 108.

CLAIMS

1) Folding unit for producing packages (2) of pourable food products from sealed packs (3), comprising a movable conveying member (20) and
5 folding means arranged for folding at least one end portion of said packs (3), whilst said packs (2) are conveyed by said conveying member (20), to obtain said packages (2), said conveying member (20) carrying a plurality of plates (28), each plate (28)
10 being configured to receive a pack (3) and to deliver a package (2) to a transferring and up-ending unit (100) arranged downstream of the folding unit (1), characterized in that said folding unit (1) further comprises retention means (40) arranged for keeping
15 said packages (2) on said plates (28).

2) Folding unit according to claim 1, wherein said retention means (40) are so configured as to keep said packages on said plates (28) before, and during, transferring of said packages (2) from said
20 folding unit to said transferring and up-ending unit (100).

3) Folding unit according to claim 1, or 2, and further comprising an output station (22) in which said packages are removed from said folding
25 unit, said retention means (40) being so configured as to prevent said packages from sliding downwards on said plates (28) at said output station (22).

4) Folding unit according any one of the preceding claims, wherein said retention means (40) comprises a plurality of retention elements (41),
30 each retention element (41) being associated with a corresponding plate (28).

5) Folding unit according to claim 4, wherein

said retention element (41) is arranged at an end portion (52) of said plate (28) opposite to a further end portion (53) at which said plate (28) is connected to said conveying member (20).

5 6) Folding unit according to claim 4, or 5, wherein said retention element (41) comprises an appendix (45) projecting transversally with respect to a side surface (51) of said plate (28).


7) Folding means according to claim 6, wherein
10 said appendix (45) is so configured as to interact with an end wall (12) of said package (2).

8) Folding means according to claim 6, or 7, wherein said side surface (51) is so configured as to interact with a side wall (11) of said packages (2).

15 9) Folding unit according to any one of claims 6 to 8, and further comprising a body (42) provided with said appendix (45) and received into a seat (43) obtained in an end surface (44) of said plate (28).

10) Folding element according to claim 9,
20 wherein said appendix (45) is substantially flush with said end surface (44).

11) Folding unit according to claim 9, or 10, and further comprising a screw (47) for connecting said body (42) to said plate (28).

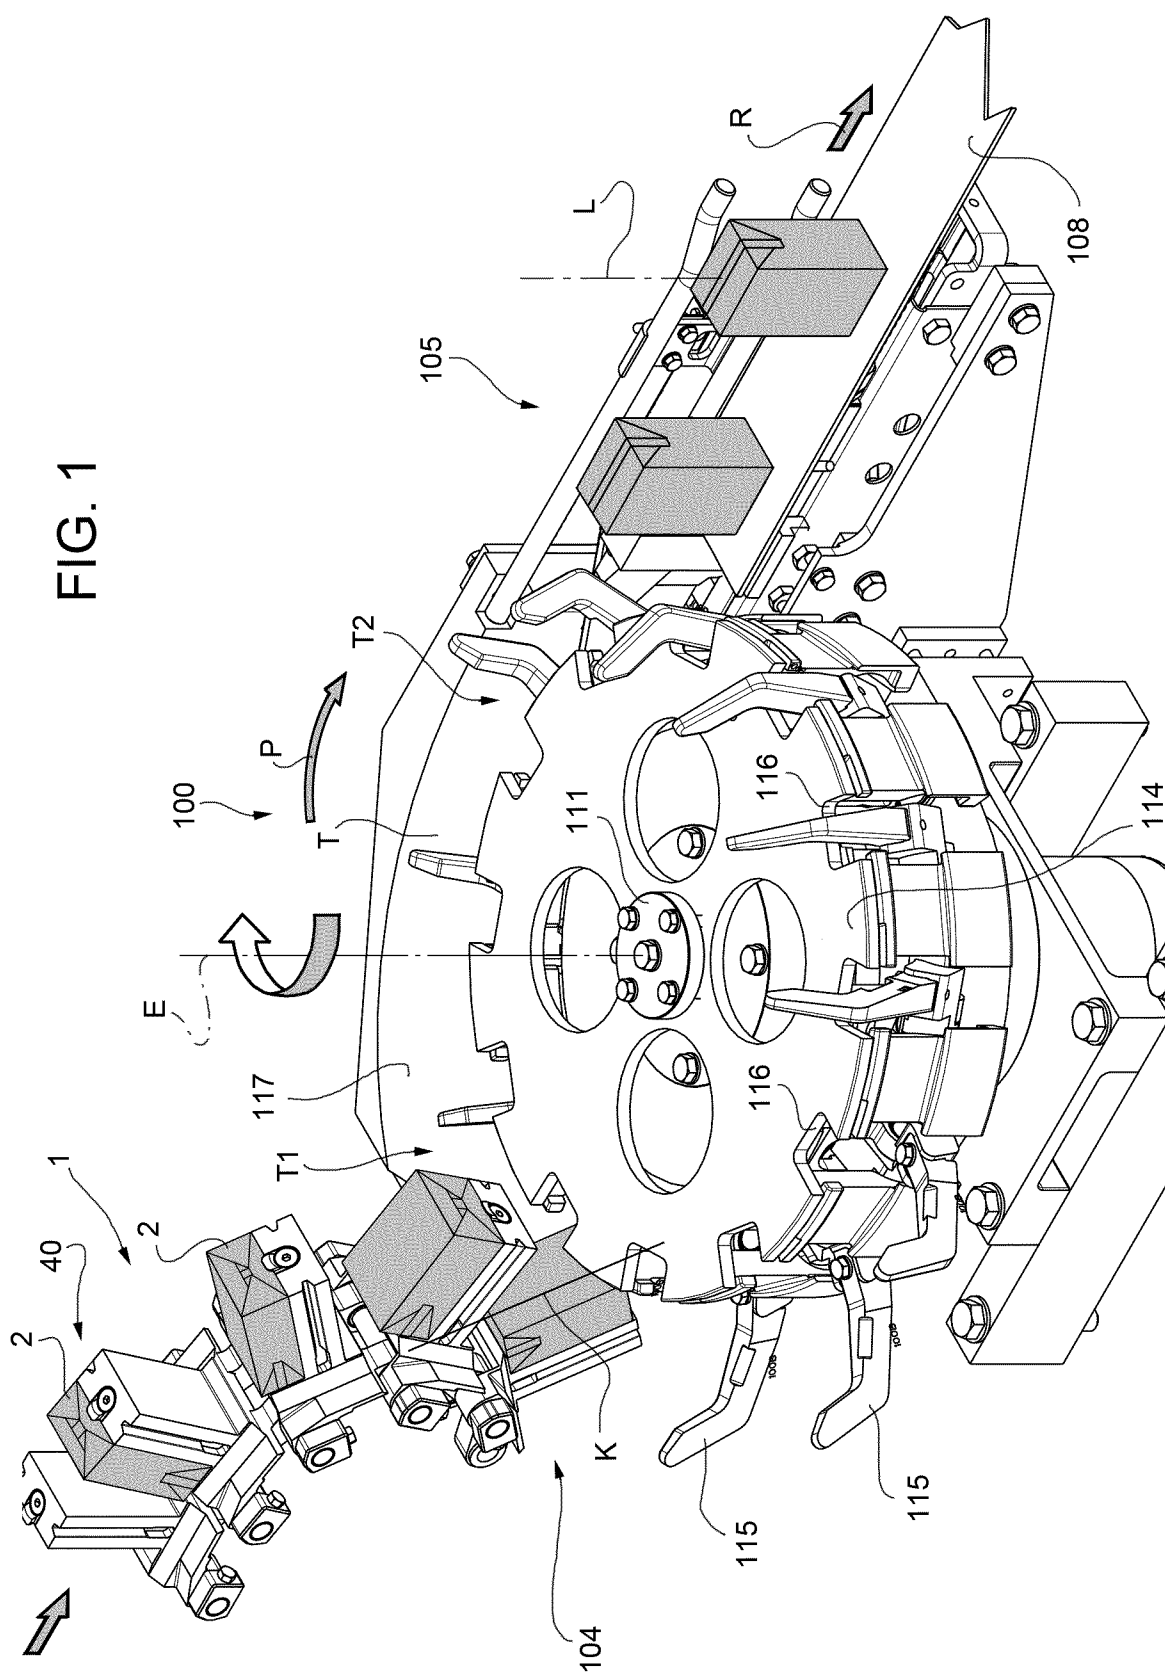



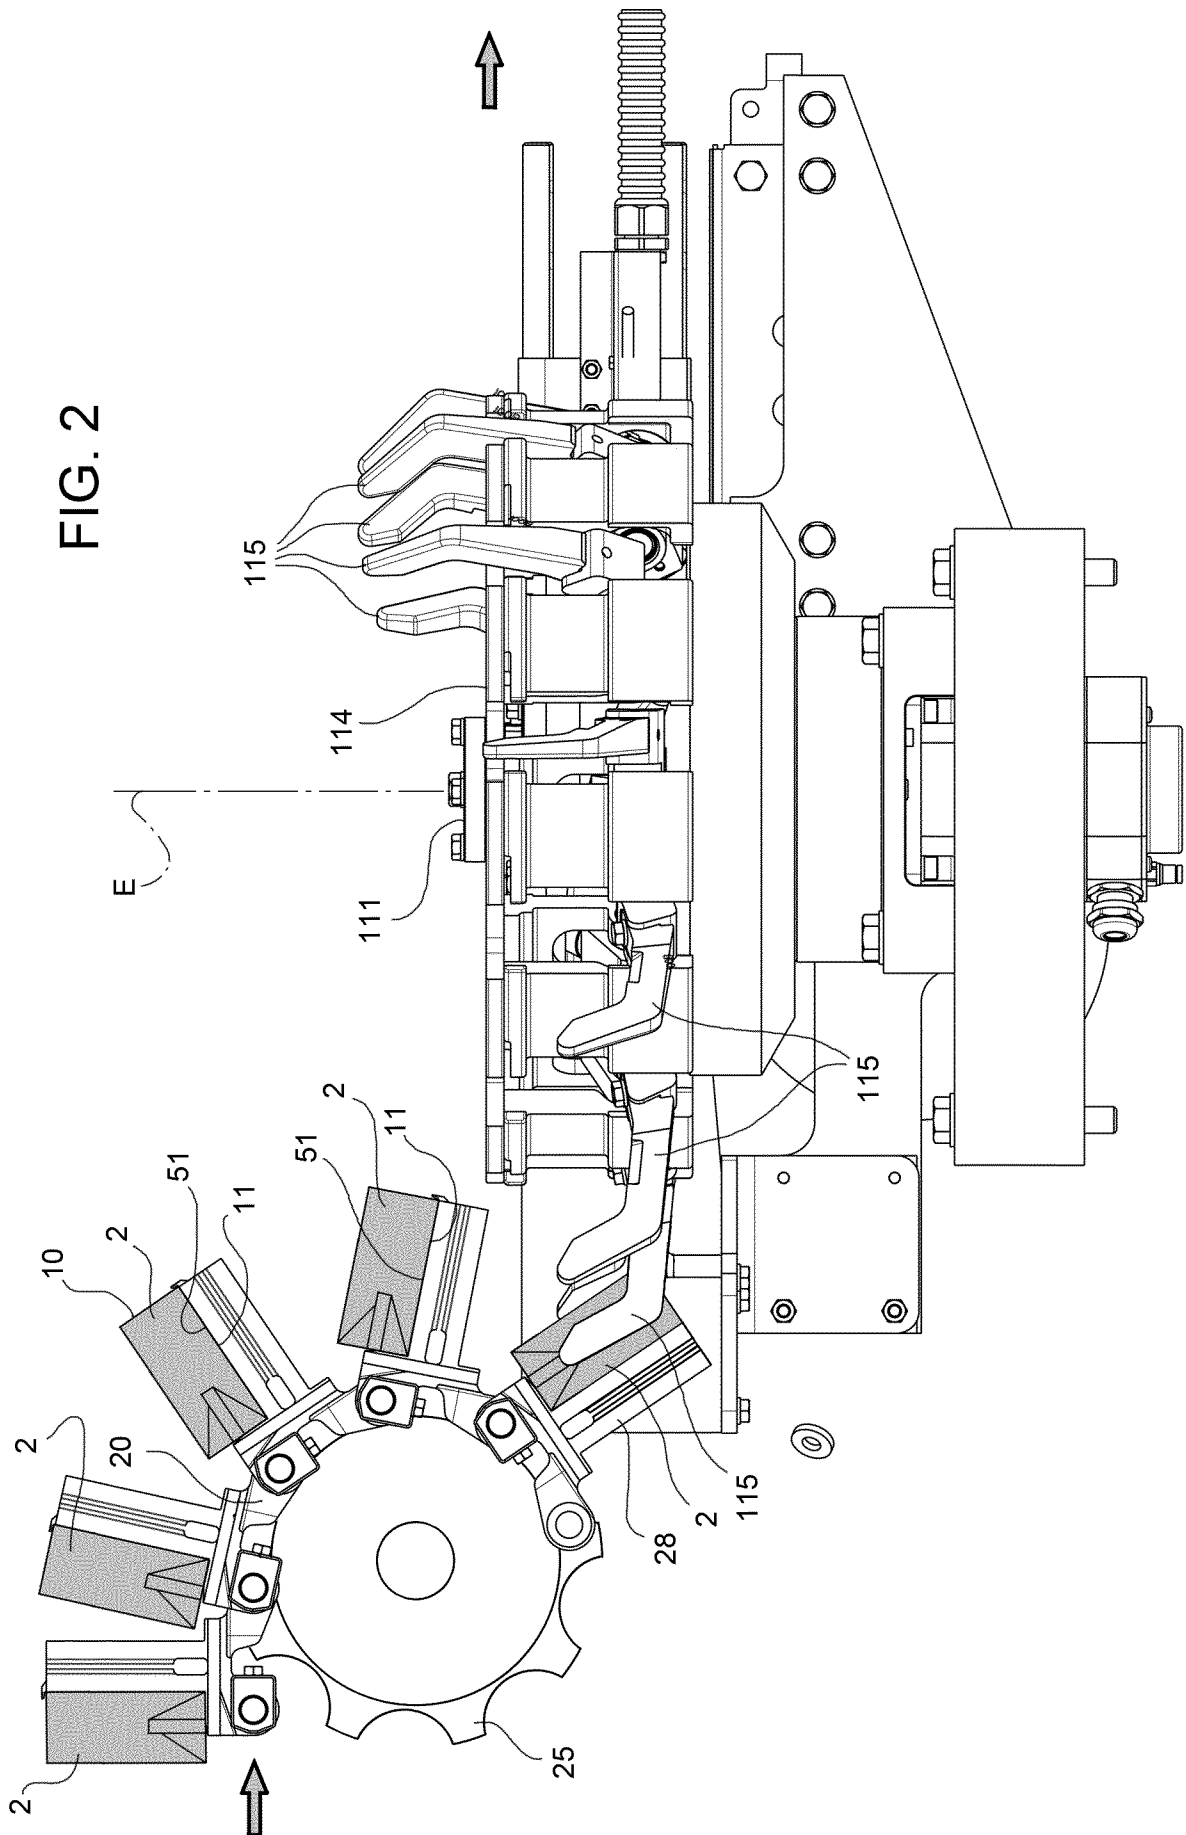


FIG. 3

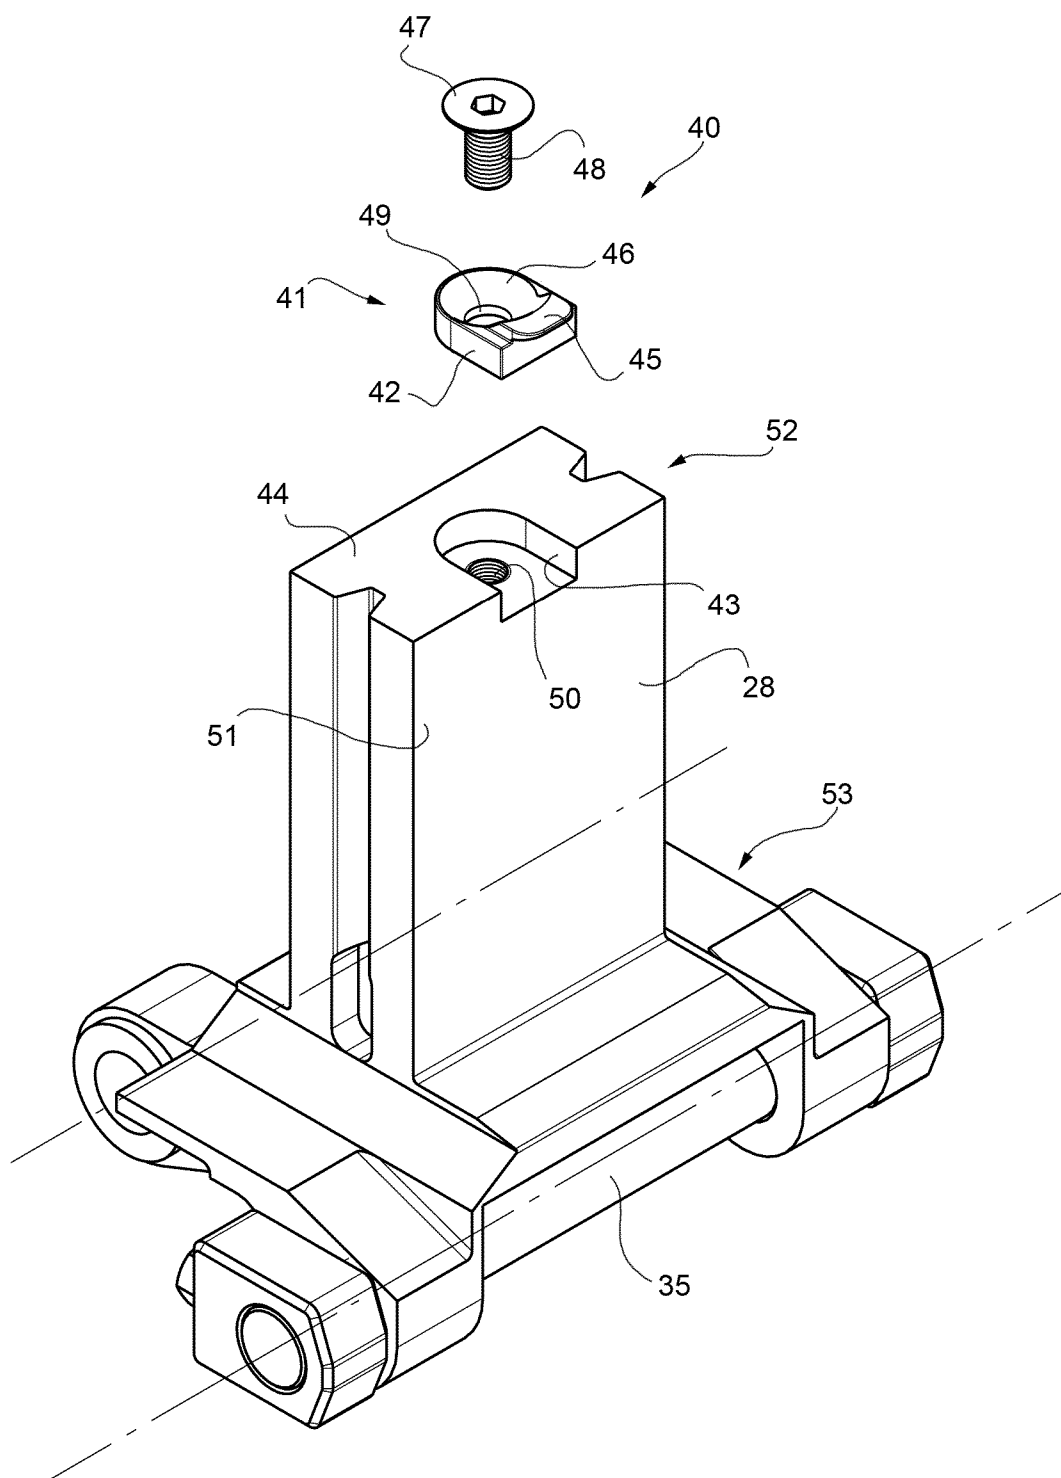

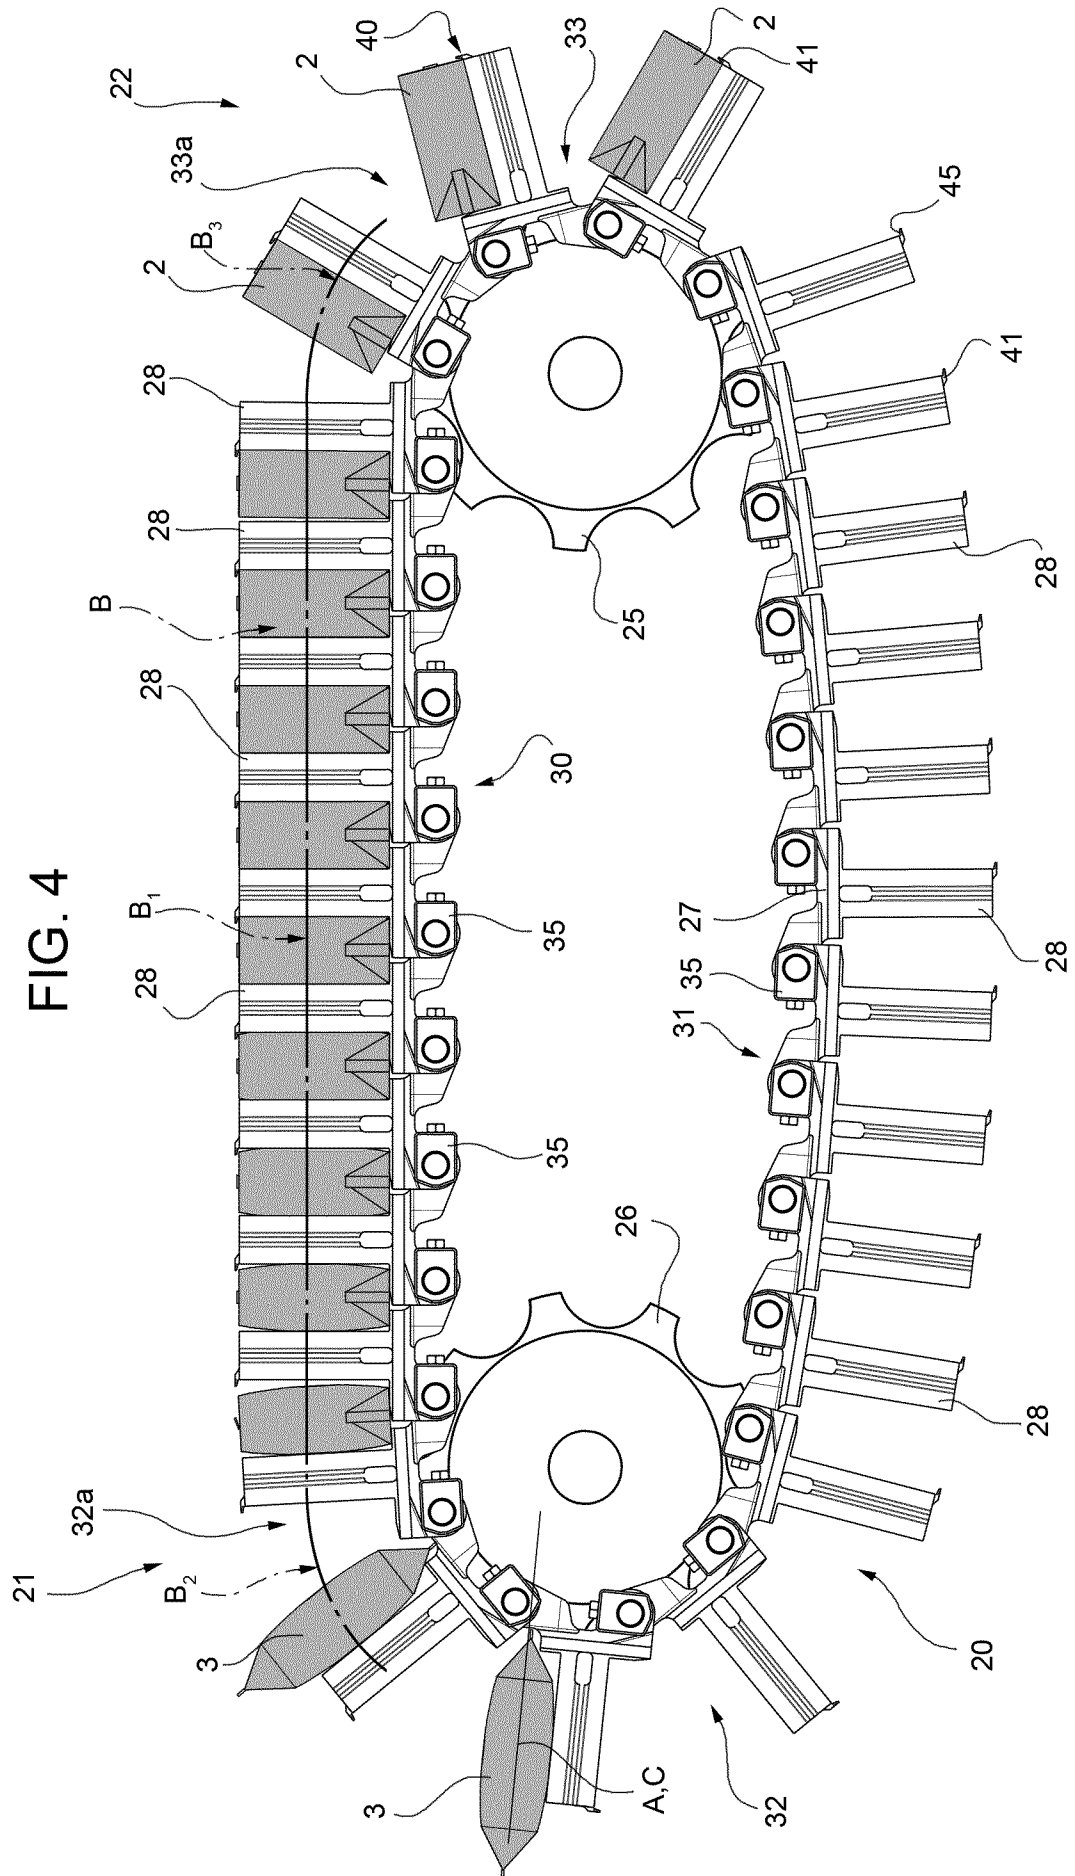

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/075139

A. CLASSIFICATION OF SUBJECT MATTER INV. B65B35/24 B65G17/46 B65G47/252 B65B61/24 B65B61/28 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) B65B B65G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/221549 A1 (GUTTINGER PETER [CA] ET AL) 11 November 2004 (2004-11-11)	1,2,4-11
Y	paragraph [0042] - paragraph [0045]; figures 4C, 4D	3
Y	----- DE 10 2008 004437 A1 (TETRA LAVAL HOLDINGS & FINANCE [CH]) 2 April 2009 (2009-04-02) paragraph [0036] - paragraph [0046]; figure 2	1-11
Y	----- DE 100 54 629 A1 (GOLDING ANDREAS [DE]) 8 May 2002 (2002-05-08) figure 2	3
Y	----- US 6 286 657 B1 (SCHNABEL WOLFGANG [DE]) 11 September 2001 (2001-09-11) the whole document	1-11
	----- -/-	
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 14 April 2014		Date of mailing of the international search report 25/04/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Yazici, Baris

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/075139

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 819 605 A2 (SHIKOKU KAKOKI CO LTD [JP]) 21 January 1998 (1998-01-21) the whole document	1-11
A	----- WO 2007/135079 A1 (EMMETI SPA [IT]; SIROCCHI FILIPPO [IT]) 29 November 2007 (2007-11-29) the whole document	1-11
A	----- DE 203 20 380 U1 (SIG COMBIBLOC SYS GMBH [DE]) 3 June 2004 (2004-06-03) the whole document	1-11
A	----- EP 0 444 229 A1 (BFB SPA [IT]) 4 September 1991 (1991-09-04) the whole document	1-11
A	----- US 3 809 210 A (ANDERSON A) 7 May 1974 (1974-05-07) the whole document -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/075139

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004221549	A1	11-11-2004	NONE
DE 102008004437	A1	02-04-2009	CN 101397060 A 01-04-2009 DE 102008004437 A1 02-04-2009 HK 1130458 A1 26-04-2013
DE 10054629	A1	08-05-2002	NONE
US 6286657	B1	11-09-2001	CN 1264670 A 30-08-2000 DE 19907579 A1 14-09-2000 EP 1031513 A2 30-08-2000 JP 2000245429 A 12-09-2000 PL 338486 A1 28-08-2000 US 6286657 B1 11-09-2001
EP 0819605	A2	21-01-1998	CN 1174801 A 04-03-1998 DE 69709497 D1 14-02-2002 DE 69709497 T2 26-09-2002 DK 0819605 T3 11-02-2002 EP 0819605 A2 21-01-1998 JP H1029608 A 03-02-1998 US 5852919 A 29-12-1998
WO 2007135079	A1	29-11-2007	US 2009116950 A1 07-05-2009 WO 2007135079 A1 29-11-2007
DE 20320380	U1	03-06-2004	NONE
EP 0444229	A1	04-09-1991	AU 7067191 A 18-09-1991 CA 2053886 A1 29-08-1991 DE 69003526 D1 28-10-1993 EP 0444229 A1 04-09-1991 WO 9112993 A1 05-09-1991
US 3809210	A	07-05-1974	NONE