



(11)

EP 1 772 849 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
15.08.2012 Bulletin 2012/33

(51) Int Cl.:
G09G 5/00 ^(2006.01)

(21) Application number: **05256255.0**

(22) Date of filing: **06.10.2005**

(54) **Method and apparatus for preventing pixel burn-in**

Verfahren und Vorrichtung zur Verhinderung von Einbrennschaden für eine Anzeigetafel

Procédé et dispositif pour prévenir l'endommagement des pixel d'un dispositif de visualisation

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(43) Date of publication of application:
11.04.2007 Bulletin 2007/15

(73) Proprietor: **Vestel Elektronik Sanayi ve Ticaret A.S.
45030 Manisa (TR)**

(72) Inventors:
• **Salt, Metin**
Vestek Elektronik Ar-Ge Anonim, Sti
34469 Maslak - Istanbul (TR)

• **Ozdemir, Huseyin**
Vestek Elektronik Ar-Ge Anonim St
34469 Maslak - Istanbul (TR)

(74) Representative: **Freeman, Avi et al**
Beck Greener
Fulwood House
12 Fulwood Place
London WC1V 6HR (GB)

(56) References cited:
EP-A- 1 489 589 EP-A2- 1 056 261
WO-A1-99/53472 JP-A- 10 161 629
US-A1- 2003 090 488

EP 1 772 849 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method of and apparatus for preventing pixel burn-in.

[0002] Display devices are used in many applications, including for example television receivers, computer monitors, public display panels (at airports, railway stations, conference centres and the like), etc. Display devices can be classified broadly into two types. The first is a passive type, a typical example of which is a liquid crystal display (LCD). A passive display device does not emit the light that forms the image as such. On the contrary, a passive display device selectively filters a back-light in order to produce the required image. Active display devices on the other hand emit the light that forms the image. Examples of active display devices include cathode ray tube (CRT) displays, light emitting diode (LED) displays, vacuum fluorescent displays (VFD) and plasma display panels (PDP). Active display devices use phosphors to generate the visible light. The phosphors are excited by electrons (in for example a CRT), by ultraviolet light (for example in a plasma display panel), or another fast charged carrier (in for example an electroluminescent display). When excited, the phosphors emit light. Typically a pixel of such a display device has three sub-pixels which respectively emit red, green and blue light so that any pixel can emit any colour by appropriate driving of the three sub-pixels.

[0003] A particular problem with active displays that use phosphors to generate the visible light is the problem of pixel burn-in. More specifically, when a static image is displayed on (a part of) a display device, a ghost image of the static image can remain such that when the image is changed, there is nevertheless a remnant of the previously displayed static image. In for example a CRT display or a PDP, the display of a static image on the screen prematurely ages the phosphors such that those phosphors do not shine as brightly as the others on the screen. This therefore manifests itself as a dimmed ghost image on the screen. Where for example the static image was of a certain colour only, such as blue for example, this means that the sub-pixels of that colour will age more prematurely, such that the ghost image will have the complementary colour (in this example yellow, being a mixture of the red and green phosphors which shine more brightly relative to the aged blue phosphors). This is a particular problem in PDPs, though it also affects CRTs and other active displays. (For completeness, it is mentioned that PDPs also suffer from a short term burn-in problem in which the ghost image is a brighter image because the "burned" pixels shine more brightly. This short term burn-in tends to disappear a short time after the static image is removed.)

[0004] Users of active displays are warned to avoid pixel burn-in, typically by taking steps to ensure that a static image is not displayed on the display device for any extended period. However, it is often the case that users forget this and in any event it is often not a practical

solution. For example, active displays are often used in public venues to display a static image for a long period (for example for promotional or advertising material). As another example, many television channels are transmitted with the channel logo at a fixed position on the screen, the logo being present at all times. It is in such cases simply not possible to avoid having the static image on the screen.

[0005] There are a number of technical proposals for avoiding pixel burn-in. For example, if a static image is detected, it is known to shift the whole image around the screen by a few pixels so as to try to prevent any particular pixel being on for any length of time. However, the number of pixels by which the image can be moved is limited by the size of the screen, given that ideally an image will fill the screen, and by the fact that too large a movement will disturb the viewer. Moreover, if the static image is larger than the number of pixels over which the whole image is moved, there will be pixels (towards the centre of the static image) that are always on and which will therefore suffer from burn-in. As an alternative, parts of the static image may be distorted in shape so as to mix up the pixels that are on, see for example EP-A-1503360. As another example, the colours and/or the contrast level of the static image can be inverted, which can be carried out periodically, but this can also be disturbing to the viewer. In WO-A-2003/034718, all of the pixels in a vertical line are switched off for a short period, and then all of the pixels in another vertical line are switched off for a short period, etc., across the whole screen. Thus, all pixels across the whole vertical extent of the screen are switched off sequentially. However, it is possible for this to be perceptible to the viewer and in any event switches off pixels unnecessarily. Another example of avoiding burn-in is to use a screen saver, but these are not generally acceptable on television receivers or display devices used in public venues and the like.

[0006] A number of techniques for so-called "healing" of the burn-in problem are also known, including for example increasing the brightness level of damaged pixels to compensate for the loss of brightness. However, plainly, these do not prevent the burn-in in the first place and simply operate to hide the worst effects.

[0007] EP-A-1489589 discloses a display device in which pixels that are in a region on a screen that is outside an image displayed on the screen are given a luminance level that is the average of the luminance level in the image region. In this way, any degradation of the pixels across the screen can be made more uniform.

[0008] Document JP10-161629 discloses a method of preventing burn-in of the pixels of a display device.

[0009] A first aspect of the present invention is defined in claim 1; an alternative solution is defined in claim 5.

[0010] Thus, it can be quickly detected whether a static image is being displayed. In the preferred embodiments, the smallest (reasonable) region in which the static image fits is identified. Then it is determined whether the static image has been on for a period of time that might lead

to pixel burn-in. Such period may be set depending on a number of factors, including for example the known burn-in period of the screen (which depends in part on the type and quality of the screen), the brightness level of the pixels concerned, etc. If that period of time has elapsed, then a burn-in protection method can be carried out to protect the pixels in that region. In this way, there is for example no shifting around of the entire image. The smallest possible part of the screen is treated to avoid burn-in, which therefore minimises the possibility that the viewer might detect the operation of any burn-in protection.

[0011] In an embodiment, the finding step comprises: (a) notionally dividing the screen into a plurality of regions; (b) determining whether said static image fits within one of the regions; and, (c) if said static image does not fit within one of said regions, notionally dividing the screen into a plurality of regions larger than the previous regions and returning to step (b) using the larger regions, else proceeding to step (d); and, (d) when said static image does fit within one of the regions, reducing the brightness level of pixels within the region within which the static image fits.

[0012] In an embodiment, the brightness level of said pixels is temporarily reduced. The brightness level of said pixels may for example be reduced for a random period of time, which may be randomly set at different periods, or the brightness level of said pixels may be reduced for a fixed period of time.

[0013] The brightness level of said pixels may be reduced to zero.

[0014] Said pixels for which their brightness level is reduced may be selected randomly by:

- (a) randomly selecting a block of one or more pixels within said region and reducing the brightness level of said one or more pixels for a period of time; and,
- (b) repeating step (a) for other randomly selected blocks of one or more pixels for subsequent periods of time.

[0015] In a first arrangement, said pixels form a line, said line being swept across said region by temporarily reducing the brightness levels of pixels in a line in sequence across said region.

[0016] Said line of pixels extends fully across said region in a direction transverse to the direction of sweeping of the line.

[0017] Alternatively, said line of pixels may extend partly across said region in a direction transverse to the direction of sweeping of the line, the method comprising sweeping said line in a first direction across said region by temporarily reducing the brightness levels of pixels in a line in sequence across said region, displacing the line in a direction transverse to the direction of sweeping of the line, and sweeping the displaced line back in a second direction across said region by temporarily reducing the brightness levels of pixels in a line in sequence across

said region. This helps to reduce the possibility of the viewer noticing that the brightness of pixels is being reduced.

[0018] According to a second aspect of the present invention, there is provided apparatus according to the wording of claim 6 and 10.

[0019] Embodiments of the present invention will now be described by way of example with reference to the accompanying drawings, in which:

Fig. 1 shows schematically the division of a display screen into a plurality of regions of different size;

Fig. 2 shows schematically the selection of pixels within one of the regions;

Fig. 3 shows schematically an example of line sweeping;

Figs. 4 and 5 show schematically another example of line sweeping; and,

Fig. 6 shows in summary the steps of an example of a method according to the present invention.

[0020] Referring first to Figure 1, there is shown a screen 1 of a display device of the type that suffers from pixel burn-in. For example, the screen 1 may be the screen of a plasma display panel or a cathode ray tube display. For present purposes, the screen 1 is notionally divided into a plurality of regions 2. As will be understood from the following, the screen 1 may be notionally divided into regions 2 of different sizes during different points in the method. Thus, the division of the screen 1 can be by virtue of a first grid, grid-I, having 16 regions 2; a second grid, grid-II, having 32 regions 2 all smaller than the regions 2 of grid-I; a third grid, grid-III, having 64 regions 2 all smaller than the regions 2 of grid-II; and a fourth grid, grid-IV, having 128 regions 2 all smaller than the regions 2 of grid-III.

[0021] As will be understood, more or less grids may be provided. The grids may have more or less regions 2 than in the examples shown. Also, in each of the grids shown in Figure 1, all regions 2 are of the same size and shape and are rectangular. In general, however, the regions 2 within a grid may be of different shapes and need not be the same size. For example, it may be desirable to have regions 2 of a different size at the top right hand or top left hand corner of the screen 1 as that is the area where a channel logo is often displayed, or the regions 2 may be of a different size and shape at the lower part of the screen 1 where often a scrolling text (for example displaying latest news, share prices and the like) is displayed within a static border.

[0022] It should be understood that the division of the screen 1 into regions 2 is notional. The size, shape and number of regions 2 within each grid can be predefined by the manufacturer of the display device or can be de-

terminated by a software-implemented algorithm according to the size and position of any static image.

[0023] The screen 1 is monitored so that it can be detected when a static image has been displayed on a part of the screen for a predetermined period of time. The particular period of time that should be set depends on a number of factors, including for example the quality of the screen 1 and the brightness and contrast levels of the pixels in the screen 1. A number of methods already exist for monitoring for display of a static image on a screen 1. For example, the drive signals to the individual pixels can be appropriately monitored by a controller or processor.

[0024] When it is detected that a static image has been displayed on the screen 1 for the certain period of time, it is determined whether the static image fits entirely within the smallest regions 2 of the grids, i.e. the regions 2 of grid-IV in this particular example. Again, a number of techniques exist for determining whether an image fits entirely within a particular region on a screen 1, including for example monitoring the drive signals to the pixels that make up the static image.

[0025] If it is determined that the static image does not fit entirely within the smallest regions 2 formed by grid-IV, then grid-III having its larger regions 2 is used instead. Similarly, if the static image does not fit entirely within the larger regions 2 of grid-III, then grid-II with its even larger regions 2 is used. Then, grid-I can be used if the static image does not fit within the regions 2 of grid-II.

[0026] At some point then, a grid is found in which the static image fits entirely within one of the regions 2, and this is the grid having the smallest possible regions 2 that can accommodate the whole of the static image.

[0027] It will be understood that other methods may be available for determining the smallest region in which the static image fits.

[0028] A counter is provided for at least the region 2 in which the static image entirely fits. In some embodiments, counters may be provided for all regions 2 in the grids. Moreover, the method may operate to detect plural static images at different positions on the screen 1, possibly with regions 2 of different sizes being selected according to the size of the respective static images, and separate counters may be allocated to those regions.

[0029] If the counter for the region 2 in which the static image is located reaches a predetermined value (indicating that the static image has been on for a particular period of time), then a burn-in protection method is carried out on the pixels in the region 2 in which the static image is located.

[0030] Thus, it is quickly detected whether a static image is being displayed. Then the smallest region 2 in which the static image fits is identified. Then it is determined whether the static image has been on for a predetermined period of time that might lead to pixel burn-in. If that predetermined period of time has elapsed, then a burn-in protection method can be carried out to protect the pixels in that region 2. In this way, there is no shifting

around of the entire image. The smallest possible part of the screen 1 is treated to avoid burn-in, which therefore minimises the possibility that the viewer might detect the operation of any burn-in protection.

[0031] Referring now to Figure 2, there is shown one example of a burn-in protection method. The region 2 in which the static image fits is shown schematically in the figure. This region 2 is divided into blocks 10. As shown each block 10 may consist of a single pixel or plural pixels, which may be arranged in square arrays of 2x2, 3x3, 4x4 pixels, etc., or which may in general be of any size and shape. However, it is preferred to keep the size of the blocks 10 small so as to minimise the possibility of the viewer noticing operation of the burn-in method.

[0032] The brightness level of the pixel or pixels in the block 10 is then reduced, preferably to zero, by appropriate control of the drive signals sent to the pixels in the block 10. The position of the block 10 for which the brightness level is reduced may be selected randomly. The duration of the reduced brightness level may be set randomly (up to a predetermined maximum period of time for example) or may be a predetermined fixed time period. In general, the period for which the brightness level is reduced may be set depending on the type and quality of the screen, the brightness level being applied to the pixel during display of the static image, etc. After that period of time has expired, the brightness level of the pixel or pixels in the block 10 is returned to its level required to display the static image. Another block 10 is then randomly selected for the brightness level of its pixel or pixels to be reduced. Several blocks 10 in the region 2 can be selected to have the brightness levels of their pixels reduced simultaneously. In general, therefore, over a period of time, the brightness levels of all pixels in the region 2 are reduced, which avoids burn-in of the static image in the region 2.

[0033] In an embodiment, the pixels for which the brightness levels are reduced are selected methodically. For example, referring to Figure 3, there is again shown the region 2 in which the static image fits. In this example, a series of pixels in a line 20, which in this example is vertically orientated with respect to the region 2, are selected to have their brightness level reduced. The brightness level of the pixels in that line 20 is reduced (preferably to zero) for a short period of time and their brightness level then returned to the level necessary to display the static image. Then, pixels in an adjacent line are selected to have their brightness levels reduced temporarily, etc. In this way, the line effectively sweeps across the region 2 so that in turn, all pixels have their brightness level reduced over time.

[0034] In the example shown in Figure 3, the line 20 fits entirely across the region 2. The line 20 in this example sweeps from left to right and then from right to left, etc. In this way, over a short period of time, the brightness levels of all pixels in the region 2 is methodically and temporarily reduced.

[0035] In another example shown schematically in Fig-

ures 4 and 5, a short line 30 of pixels is selected that extends only part way across the region 2. As shown in Figure 5, this short line 30 can be swept in one direction across a first row 31 in the region 2. The row 31 contains several rows of pixels. Having reached one edge of the region 2, the line 30 then returns to sweep across a second row 32 of pixels, etc., so that ultimately in a sufficient period of time the line 30 sweeps across the whole of the region 2 such that all pixels in the region 2 have their brightness levels temporarily reduced. Using the short line 30, which is swept back and forth over relatively smaller areas than the long line 20 of the example described above helps to reduce the possibility of the viewer noticing that pixels are being switched off or are having their brightness reduced.

[0036] The line 20 of the example shown in Figure 3, and the line 30 of the example shown in Figures 4 and 5, may have a width of only one pixel or plural pixels. In general, it is preferred that the line 20, 30 be as thin as possible, i.e. only one pixel thick, so as to minimise the possibility of the viewer noticing the operation of a burn-in protection method.

[0037] Figure 6 shows schematically the steps of the preferred embodiment of the present invention. As shown at step 1, the screen of the display device is scanned continually to look for display of a static image of any part of the screen. At step 2, if a static image is detected, the result true leads to step 3 in which the screen is divided into the small regions 2, which is done successively until the smallest region 2 in which the static image fits is identified. In step 4, one or more counters for the region(s) 2 are started. At step 5, if motion in the region 2 or pixels within the region 2 is detected before the counter reaches a predetermined value, the burn-in protection method is not required. Otherwise, a burn-in protection method is activated in step 6. As shown at step 7, it is preferred that monitoring is still carried out to determine whether motion in the region 2 or in particular pixels within the region 2 is detected. If motion is detected, then the burn-in protection method can be switched off, and the process returned to step 1.

[0038] The preferred method can be implemented in one or more processors associated with the display screen. The method may be implemented in software or hardware or a combination of software and hardware. For example, the method may be implemented in software running on a general purpose computer that is used to drive the display screen. By way of another example, where the display screen is part of a television receiver apparatus, the method can be embodied in one or more processors associated with the television receiver apparatus.

[0039] Embodiments of the present invention have been described with particular reference to the examples illustrated. However, it will be appreciated that variations and modifications may be made to the examples described within the scope of the present invention, as defined by the appended claims.

Claims

1. A method of preventing pixel burn-in on a display screen (1), the method comprising:

determining whether a static image has been displayed on the screen (1) for longer than a certain period;

characterised by:

finding the smallest region (2) on the screen (1) within which said static image fits; and, reducing the brightness level of pixels within said region (2) within which the static image fits, **characterised in that** said pixels form a line (20,30) that fits entirely across said region, said line (20,30) being swept across said region (2) by temporarily reducing the brightness levels of all pixels in said line (20,30) in a sequence of adjacent lines across said region (2) wherein said line (20) of pixels extends fully across said region (2) in a direction transverse to the direction of sweeping of the line (20).

2. A method according to claim 1, wherein the finding step comprises:

(a) using a grid, dividing the screen (1) into a plurality of regions (2);
(b) determining whether said static image fits within one of the regions (2); and,
(c) if said static image does not fit within one of said regions (2), using a grid dividing the screen (1) into a plurality of regions (2) larger than the previous regions (2) and returning to step (b) using the larger regions (2), else proceeding to step (d); and,
(d) when said static image does fit within one of the regions (2), reducing the brightness level of pixels within the region (2) within which the static image fits.

3. A method according to claim 1, wherein the brightness level of said pixels is temporarily reduced.

4. A method according to any of claims 1 to 3, wherein the brightness level of said pixels is reduced to zero.

5. A method of preventing pixel burn-in on a display screen (1), the method comprising:

determining whether a static image has been displayed on the screen (1) for longer than a certain period;

characterised by:

finding the smallest region (2) on the screen (1) within which said static image fits; and, reducing the brightness level of pixels within said region (2) within which the static image fits, **characterised in that** said pixels form a line (20,30)

wherein said line (30) of pixels extends partly across said region (2) in a direction transverse to the direction of sweeping of the line (30), the method comprising sweeping said line (30) in a first direction across said region (2) by temporarily reducing the brightness levels of pixels in a line (30) in a sequence of adjacent lines across said region (2), displacing the line (30) in a direction transverse to the direction of sweeping of the line (30), and sweeping the displaced line (30) back in a second direction across said region (2) by temporarily reducing the brightness levels of pixels in a line (30) in a sequence of adjacent lines across said region (2).

6. Apparatus for preventing pixel burn-in on a display screen (1), the apparatus comprising:

one or more processors arranged to determine whether a static image has been displayed on the screen (1) for longer than a certain period; **characterised in that:**

said one or more processors are arranged to find the smallest region (2) on the screen (1) within which said static image fits; and, to reduce the brightness level of pixels within said region (2) within which the static image fits, **characterised in that** the one or more processors are arranged such that said pixels form a line (20,30) that fits entirely across said region, and such that said line (20,30) is swept across said region (2) by temporarily reducing the brightness levels of all pixels in said line (20,30) in a sequence of adjacent lines across said region (2) wherein said line (20) of pixels extends fully across said region (2) in a direction transverse to the direction of sweeping of the line (20).

7. Apparatus according to claim 6, wherein the one or more processors are arranged to find said smallest region (2) by: (a) using a grid, dividing the screen (1) into a plurality of regions (2); (b) determining whether said static image fits within one of the regions (2); and, (c) if said static image does not fit within one of said regions (2), using a grid dividing the screen (1) into a plurality of regions (2) larger than the previous regions (2) and returning to (b) using the larger regions (2), else proceeding to (d); and (d) when said static image does fit within one of the regions (2),

reducing the brightness level of pixels within the region (2) within which the static image fits.

8. Apparatus according to claim 6 or 7, wherein the one or more processors are arranged such that the brightness level of said pixels is temporarily reduced.

9. Apparatus according to any of claims 6 to 8, wherein the one or more processors are arranged such that the brightness level of said pixels is reduced to zero.

10. Apparatus for preventing pixel burn-in on a display screen (1), the apparatus comprising:

one or more processors arranged to determine whether a static image has been displayed on the screen (1) for longer than a certain period; **characterised in that:**

said one or more processors are arranged to find the smallest region (2) on the screen (1) within which said static image fits; and, to reduce the brightness level of pixels within said region (2) within which the static image fits, **characterised in that** the one or more processors are arranged such that said pixels form a line (20,30)

wherein the one or more processors are arranged such that said line (30) of pixels extends partly across said region (2) in a direction transverse to the direction of sweeping of the line (30), and such that said line (30) is swept in a first direction across said region (2) by temporarily reducing the brightness levels of pixels in a line (30) in a sequence of adjacent lines across said region (2), the line (30) is displaced in a direction transverse to the direction of sweeping of the line (30), and the displaced line (30) is swept back in a second direction across said region (2) by temporarily reducing the brightness levels of pixels in a line (30) in a sequence of adjacent lines across said region (2).

Patentansprüche

1. Verfahren zum Verhindern des Einbrennens von Bildpunkten eines Bildschirms (1), wobei das Verfahren umfasst:

Bestimmen, ob ein statisches Bild auf dem Bildschirm (1) für länger als eine bestimmte Zeitdauer angezeigt wurde;

gekennzeichnet durch:

Auffinden des kleinsten Bereichs (2) auf dem Bildschirm (1) in welchen das statische Bild hin-

ein passt; und,
Reduzieren des Helligkeitswertes von Bildpunkten, die innerhalb des Bereichs (2) liegen, in welchen das statische Bild hinein passt,

dadurch gekennzeichnet, dass die Bildpunkte eine Linie (20, 30) bilden, die vollständig über den Bereich passt, wobei die Linie (20, 30) über den Bereich (2) bewegt wird **durch** vorübergehendes Reduzieren der Helligkeitswerte aller Bildpunkte der Linie (20, 30) in einer Abfolge von benachbarten Linien über den Bereich (2), wobei die Linie (20) aus Bildpunkten sich vollständig über den Bereich (2) in einer Richtung quer zur Bewegungsrichtung der Linie (20) erstreckt.

2. Verfahren nach Anspruch 1, wobei der Schritt des Auffindens umfasst:

(a) Verwenden eines Gitters zum Unterteilen des Bildschirms (1) in eine Vielzahl von Bereichen (2);
(b) Bestimmen, ob das statische Bild in einen der Bereiche (2) hinein passt; und,
(c) falls das statische Bild nicht in einen der Bereiche (2) hinein passt, Verwenden eines Gitters zum Unterteilen des Bildschirms (1) in eine Vielzahl von Bereichen (2), welche größer als die vorherigen Bereiche (2) sind, und Rückkehr zu (b) unter Verwendung der größeren Bereiche (2), andernfalls Ausführen von (d); und,
(d) falls das statische Bild in einen der Bereiche (2) hinein passt, Reduzieren des Helligkeitswertes von Bildpunkten innerhalb des Bereichs (2), in welchen das statische Bild hinein passt.

3. Verfahren nach Anspruch 1, wobei der Helligkeitswert der Bildpunkte vorübergehend reduziert ist.

4. Verfahren nach einem der Ansprüche 1 bis 3, wobei der Helligkeitswert der Bildpunkte auf Null reduziert ist.

5. Verfahren zum Verhindern des Einbrennens von Bildpunkten eines Bildschirms (1), wobei das Verfahren umfasst:

Bestimmen, ob ein statisches Bild auf dem Bildschirm (1) für länger als eine bestimmte Zeitdauer angezeigt wurde;

gekennzeichnet durch:

Auffinden des kleinsten Bereichs (2) auf dem Bildschirm (1) in welchen das statische Bild hinein passt; und,
Reduzieren des Helligkeitswertes von Bildpunkten, die innerhalb des Bereichs (2) liegen, in wel-

chen das statische Bild hinein passt,

dadurch gekennzeichnet, dass die Bildpunkte eine Linie (20, 30) bilden, wobei die Linie (30) aus Bildpunkten sich teilweise über den Bereich (2) in einer Richtung quer zur Bewegungsrichtung der Linie (30) erstreckt, wobei das Verfahren das Bewegen der Linie (30) in einer ersten Richtung über den Bereich (2) **durch** vorübergehendes Reduzieren der Helligkeitswerte der Bildpunkte einer Linie (30) in einer Abfolge von benachbarten Linien über den Bereich (2), das Versetzen der Linie (30) in einer Richtung quer zur Bewegungsrichtung der Linie (30) und das Zurückbewegen der versetzten Linie (30) in eine zweite Richtung über den Bereich (2) **durch** vorübergehendes Reduzieren der Helligkeitswerte der Bildpunkte einer Linie (30) in einer Abfolge von benachbarten Linien über den Bereich (2) umfasst.

6. Vorrichtung zum Verhindern des Einbrennens von Bildpunkten eines Bildschirms (1), wobei die Vorrichtung umfasst:

ein oder mehrere Prozessoren, die zur Bestimmung, ob ein statisches Bild auf dem Bildschirm (1) für länger als eine bestimmte Zeitdauer angezeigt wurde, eingerichtet sind; **dadurch gekennzeichnet, dass:**

der eine oder die mehreren Prozessoren zum Auffinden des kleinsten Bereichs (2) auf dem Bildschirm (1), in welchen das statische Bild hinein passt, und zum Reduzieren des Helligkeitswertes von Bildpunkten, die innerhalb des Bereichs (2) liegen, in welchen das statische Bild hinein passt, eingerichtet sind, **dadurch gekennzeichnet, dass**

der eine oder die mehreren Prozessoren so eingerichtet sind, dass die Bildpunkte eine Linie (20, 30) bilden, die vollständig über den Bereich passt und dass die Linie (20, 30) über den Bereich (2) bewegt wird durch vorübergehendes Reduzieren der Helligkeitswerte aller Bildpunkte der Linie (20, 30) in einer Abfolge von benachbarten Linien über den Bereich (2), wobei die Linie (20) aus Bildpunkten sich vollständig über den Bereich (2) in einer Richtung quer zur Bewegungsrichtung der Linie (20) erstreckt.

7. Vorrichtung nach Anspruch 6, wobei der eine oder die mehreren Prozessoren zum Auffinden des kleinsten Bereichs (2) eingerichtet sind, durch: (a) Verwenden eines Gitters zum Unterteilen des Bildschirms (1) in eine Vielzahl von Bereichen (2); (b) Bestimmen, ob das statische Bild in einen der Bereiche (2) hinein passt; und, (c) falls das statische

Bild nicht in einen der Bereiche (2) hinein passt, Verwenden eines Gitters zum Unterteilen des Bildschirms (1) in eine Vielzahl von Bereichen (2), welche größer als die vorherigen Bereiche (2) sind, und Rückkehr zu (b) unter Verwendung der größeren Bereiche (2), andernfalls Ausführen von (d); und (d) falls das statische Bild in einen der Bereiche (2) hinein passt, Reduzieren des Helligkeitswertes von Bildpunkten innerhalb des Bereichs (2), in welchen das statische Bild hinein passt.

8. Vorrichtung nach Anspruch 6 oder 7, wobei der eine oder die mehreren Prozessoren so eingerichtet sind, dass der Helligkeitswert der Bildpunkte vorübergehend reduziert ist.

9. Vorrichtung nach einem der Ansprüche 6 bis 8, wobei der eine oder die mehreren Prozessoren so eingerichtet sind, dass der Helligkeitswert der Bildpunkte auf Null reduziert ist.

10. Vorrichtung zum Verhindern des Einbrennens von Bildpunkten eines Bildschirms (1), wobei die Vorrichtung umfasst:

ein oder mehrere Prozessoren, die zur Bestimmung, ob ein statisches Bild auf dem Bildschirm (1) für länger als eine bestimmte Zeitdauer angezeigt wurde, eingerichtet sind; **dadurch gekennzeichnet, dass:**

der eine oder die mehreren Prozessoren zum Auffinden des kleinsten Bereichs (2) auf dem Bildschirm (1), in welchen das statische Bild hinein passt, und zum Reduzieren des Helligkeitswertes von Bildpunkten, die innerhalb des Bereichs (2) liegen, in welchen das statische Bild hinein passt, eingerichtet sind, **dadurch gekennzeichnet, dass**

der eine oder die mehreren Prozessoren so eingerichtet sind, dass die Bildpunkte eine Linie (20, 30) bilden, wobei der eine oder die mehreren Prozessoren so eingerichtet sind, dass die Linie (30) aus Bildpunkten sich teilweise über den Bereich (2) in einer Richtung quer zur Bewegungsrichtung der Linie (30) erstreckt und dass die Linie (30) in einer ersten Richtung über den Bereich (2) durch vorübergehendes Reduzieren der Helligkeitswerte von Bildpunkten einer Linie (30) in einer Abfolge von benachbarten Linien über den Bereich (2) bewegt wird, die Linie (30) versetzt wird in einer Richtung quer zur Bewegungsrichtung der Linie (30) und die versetzte Linie (30) in einer zweiten Richtung über den Bereich (2) durch vorübergehendes Reduzieren der Helligkeits-

werte der Bildpunkte einer Linie (30) in einer Abfolge von benachbarten Linien über den Bereich (2) bewegt wird.

Revendications

1. Procédé pour prévenir l'endommagement de pixels sur un écran d'affichage (1), le procédé comprenant l'étape pour :

déterminer si une image statique a été affichée sur l'écran (1) plus longtemps qu'une certaine période ; **caractérisé par** les étapes pour rechercher la plus petite région (2) sur l'écran (1) où rentre ladite image statique ; et, réduire le niveau de luminosité de pixels à l'intérieur de ladite région (2) où rentre l'image statique, **caractérisé en ce que** lesdits pixels forment une ligne (20, 30) qui rentre entièrement à travers ladite région, ladite ligne (20, 30) étant balayée à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de tous les pixels dans ladite ligne (20, 30) dans une séquence de lignes adjacentes à travers ladite région (2) dans lequel ladite ligne (20) de pixels s'étend complètement à travers ladite région (2) dans une direction transversale à la direction de balayage de la ligne (20).

2. Procédé selon la revendication 1, dans lequel l'étape de recherche comprend les étapes pour :

(a) utiliser une grille divisant l'écran (1) en une pluralité de régions (2) ;
(b) déterminer si ladite image statique rentre dans une des régions (2) ; et,
(c) si ladite image statique ne rentre pas dans une desdites régions (2), utiliser une grille divisant l'écran (1) en une pluralité de régions (2) plus grandes que les régions précédentes (2) et retourner à l'étape (b) en utilisant les régions plus grandes (2), sinon passer à l'étape (d) ; et,
(d) quand ladite image statique rentre dans une des régions (2), réduire le niveau de luminosité de pixels à l'intérieur de la région (2) où rentre ladite image statique.

3. Procédé selon la revendication 1, dans lequel le niveau de luminosité desdits pixels est temporairement réduit.

4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel le niveau de luminosité desdits pixels est réduit à zéro.

5. Procédé pour prévenir l'endommagement de pixels sur un écran d'affichage (1), le procédé comprenant

une étape pour :

déterminer si une image statique a été affichée sur l'écran (1) plus longtemps qu'une certaine période ; **caractérisé par** les étapes pour rechercher la plus petite région (2) sur l'écran (1) où rentre ladite image statique ; et, réduire le niveau de luminosité de pixels à l'intérieur de ladite région (2) où rentre l'image statique, **caractérisé en ce que** lesdits pixels forment une ligne (20, 30), dans lequel ladite ligne (30) de pixels s'étend partiellement à travers ladite région (2) dans une direction transversale à la direction de balayage de la ligne (30), le procédé comprenant le balayage de ladite ligne (30) dans une première direction à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de pixels dans une ligne (30) dans une séquence de lignes adjacentes à travers ladite région (2), en déplaçant la ligne (30) dans une direction transversale à la direction de balayage de la ligne (30), et en balayant la ligne déplacée (30) en retour dans une deuxième direction à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de pixels dans une ligne (30) dans une séquence de lignes adjacentes à travers ladite région (2).

6. Dispositif pour prévenir l'endommagement de pixels sur un écran d'affichage (1), le dispositif comprenant :

un ou plusieurs processeurs agencés pour déterminer si une image statique a été affichée sur l'écran (1) plus longtemps qu'une certaine période ; **caractérisé en ce que** lesdits un ou plusieurs processeurs sont agencés pour rechercher la plus petite région (2) sur l'écran (1) où rentre ladite image statique ; et, pour réduire le niveau de luminosité de pixels à l'intérieur de ladite région (2) où rentre ladite image statique, **caractérisé en ce que** les un ou plusieurs processeurs sont agencés de sorte que lesdits pixels forment une ligne (20, 30) qui rentre entièrement à travers ladite région, et de sorte que ladite ligne (20, 30) est balayée à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de tous les pixels dans ladite ligne (20, 30) dans une séquence de lignes adjacentes à travers ladite région (2), dans lequel ladite ligne (20) de pixels s'étend complètement à travers ladite région (2) dans une direction transversale à la direction de balayage de la ligne (20).

7. Dispositif selon la revendication 6, dans lequel les un ou plusieurs processeurs sont agencés pour re-

chercher ladite plus petite région (2) : (a) en utilisant une grille divisant l'écran (1) en une pluralité de régions (2) ; (b) en déterminant si ladite image statique rentre dans une des régions (2) ; et, (c) si ladite image statique ne rentre pas dans une desdites régions (2), en utilisant une grille divisant l'écran (1) en une pluralité de régions (2) plus grandes que les régions précédentes (2) et en retournant à (b) en utilisant les régions plus grandes (2), sinon en passant à (d) ; et, (d) quand ladite image statique rentre dans une des régions (2), en réduisant le niveau de luminosité de pixels à l'intérieur de la région (2) où rentre l'image statique.

8. Dispositif selon la revendication 6 ou 7, dans lequel les un ou plusieurs processeurs sont agencés de sorte que le niveau de luminosité desdits pixels est temporairement réduit.
9. Dispositif selon l'une quelconque des revendications 6 à 8, dans lequel les un ou plusieurs processeurs sont agencés de sorte que le niveau de luminosité desdits pixels est réduit à zéro.
10. Dispositif pour prévenir l'endommagement de pixels sur un écran d'affichage (1), le dispositif comprenant :

un ou plusieurs processeurs agencés pour déterminer si une image statique a été affichée sur l'écran (1) plus longtemps qu'une certaine période ; **caractérisé en ce que** lesdits un ou plusieurs processeurs sont agencés pour rechercher la plus petite région (2) sur l'écran (1) où rentre ladite image statique ; et, pour réduire le niveau de luminosité de pixels à l'intérieur de ladite région (2) où rentre ladite image statique, **caractérisé en ce que** les un ou plusieurs processeurs sont agencés de sorte que lesdits pixels forment une ligne (20, 30), dans lequel les un ou plusieurs processeurs sont agencés de sorte que ladite ligne (30) de pixels s'étend partiellement à travers ladite région (2) dans une direction transversale à la direction de balayage de la ligne (30), et de sorte que ladite ligne (30) est balayée dans une première direction à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de pixels dans une ligne (30) dans une séquence de lignes adjacentes à travers ladite région (2), la ligne (30) est déplacée dans une direction transversale à la direction de balayage de la ligne (30), et la ligne déplacée (30) est balayée en retour dans une deuxième direction à travers ladite région (2) en réduisant temporairement les niveaux de luminosité de pixels dans une ligne (30) dans une séquence de lignes adjacentes à travers ladite région (2).

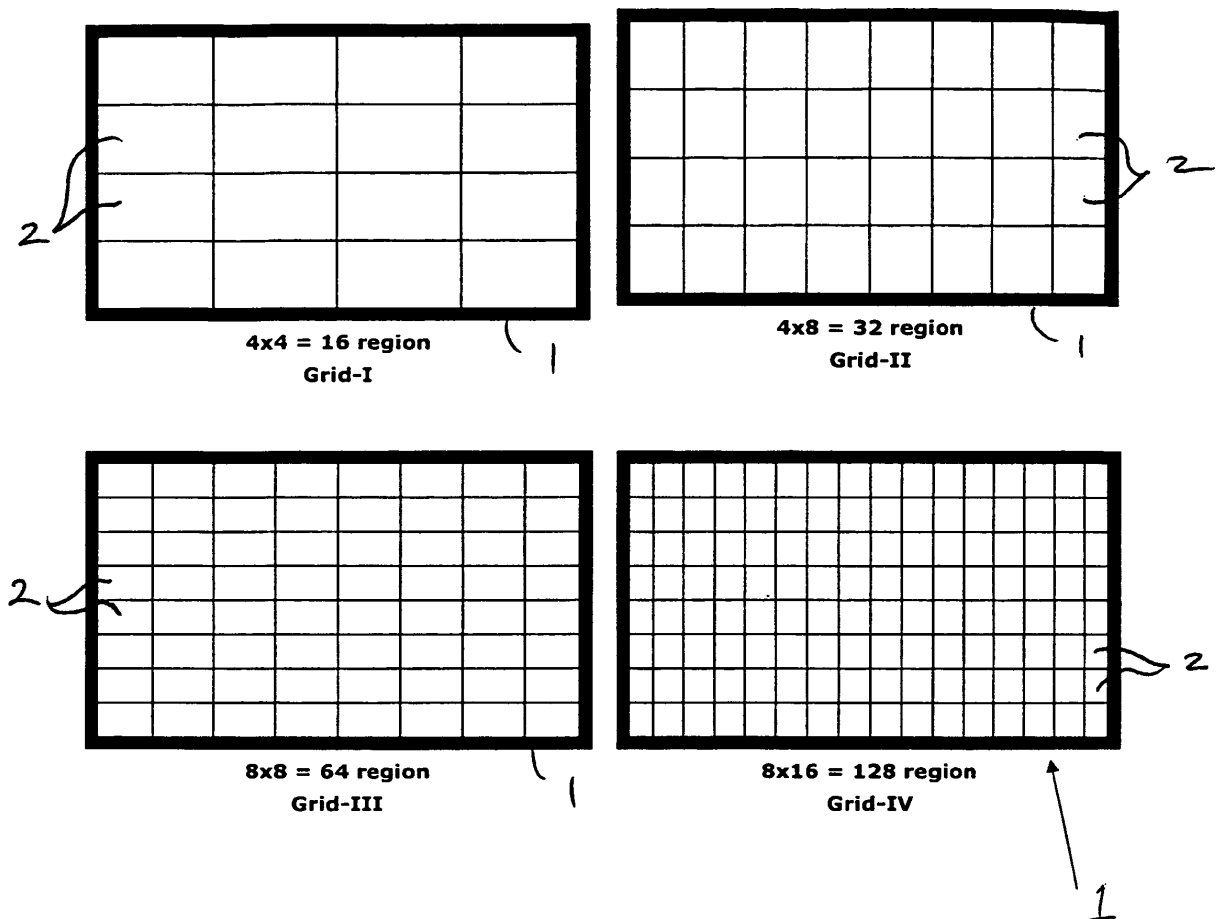


Figure 1


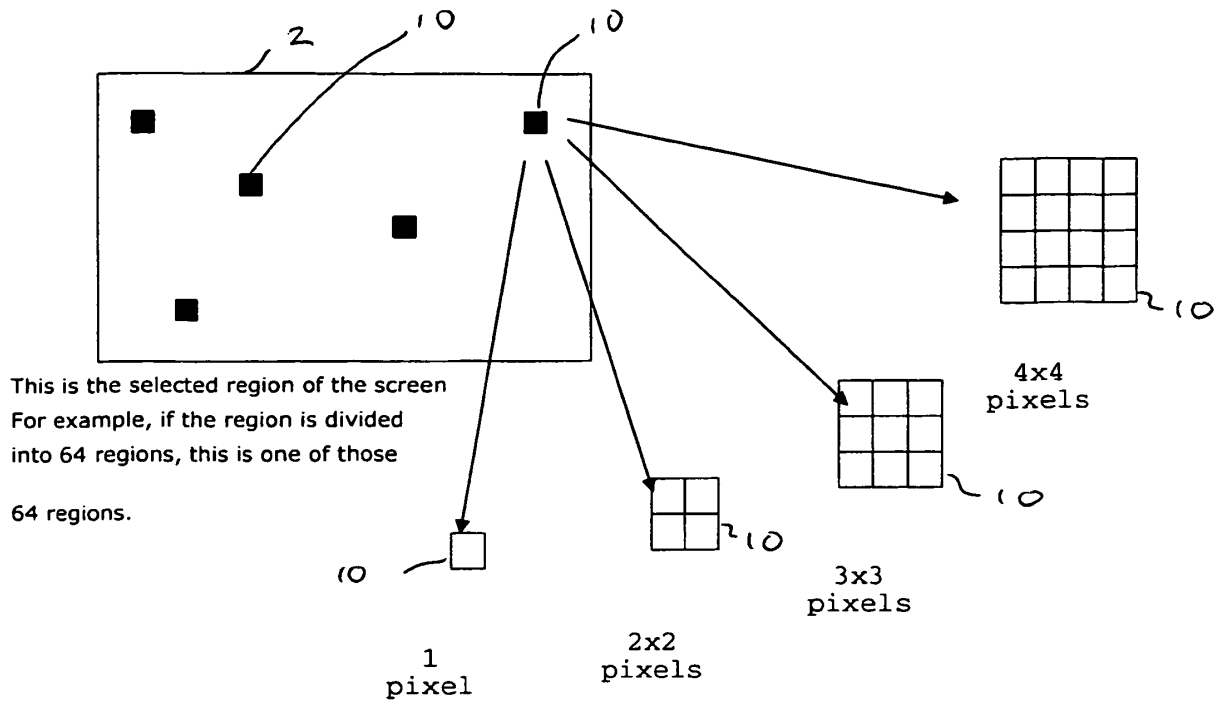


Figure 2

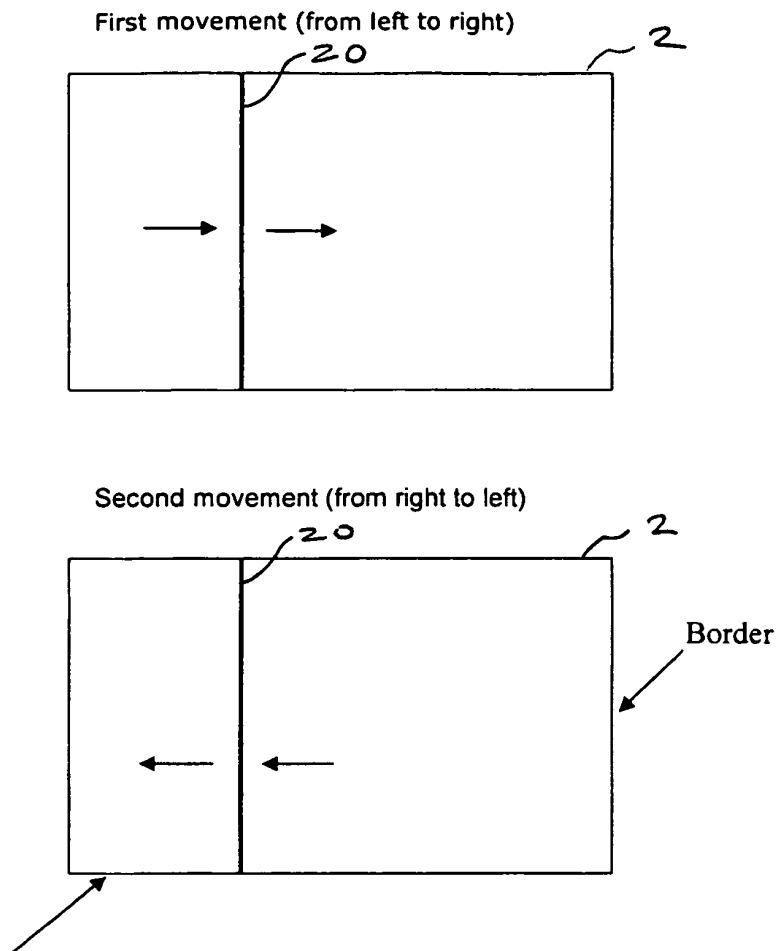

This is the selected region of the screen. For example if the screen is divided into 64 regions, this is one of the 64 regions on the screen.

Figure 3

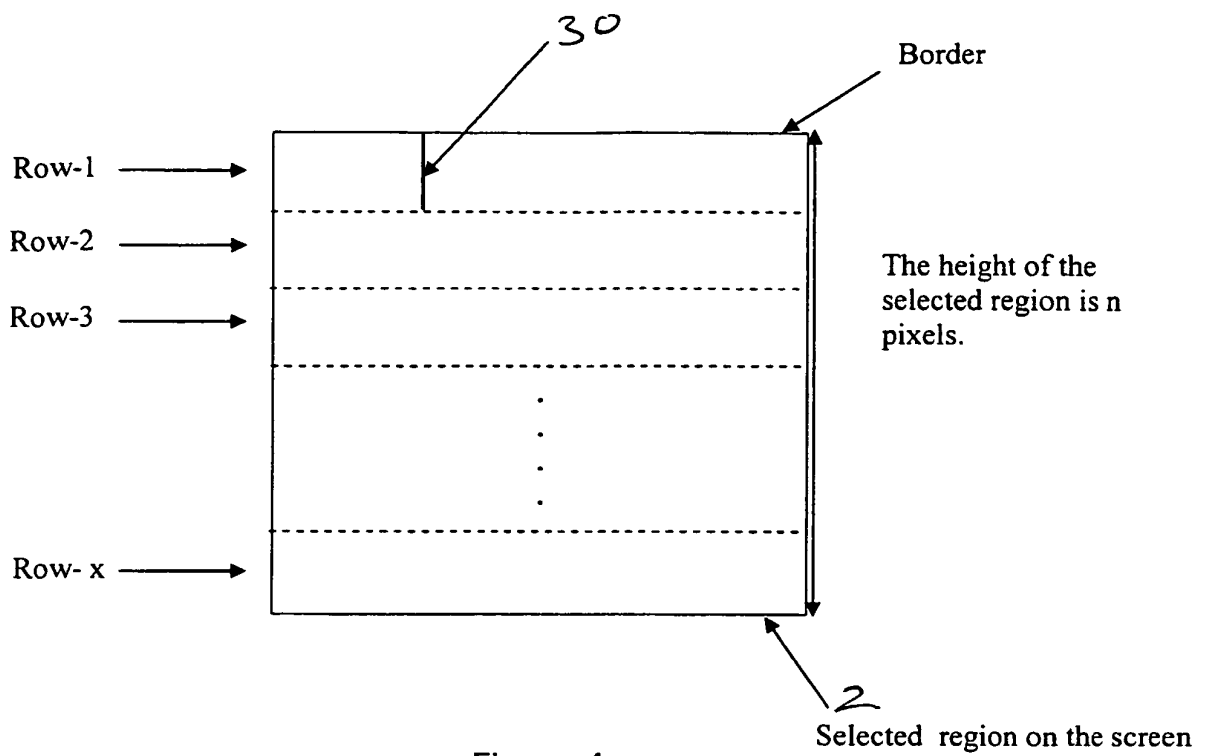


Figure 4

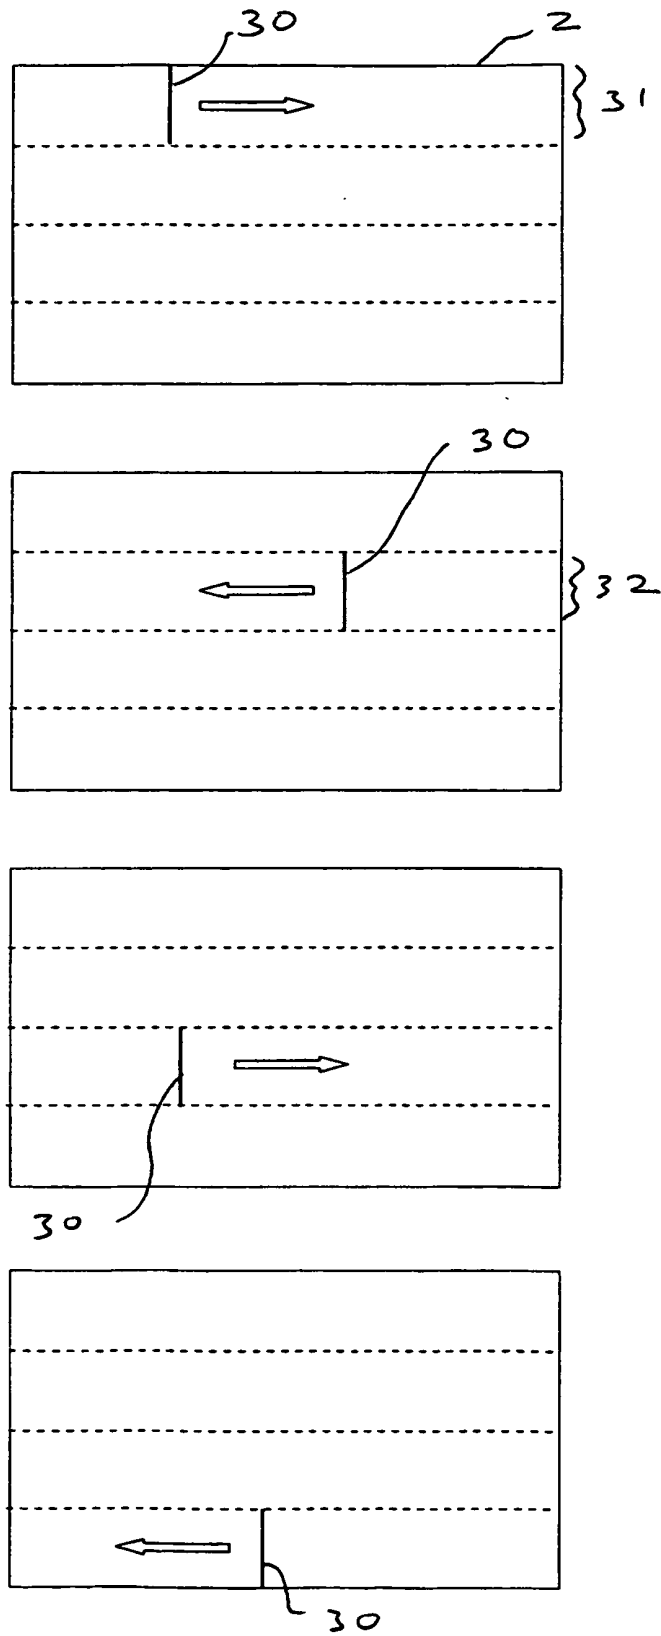


Figure 5

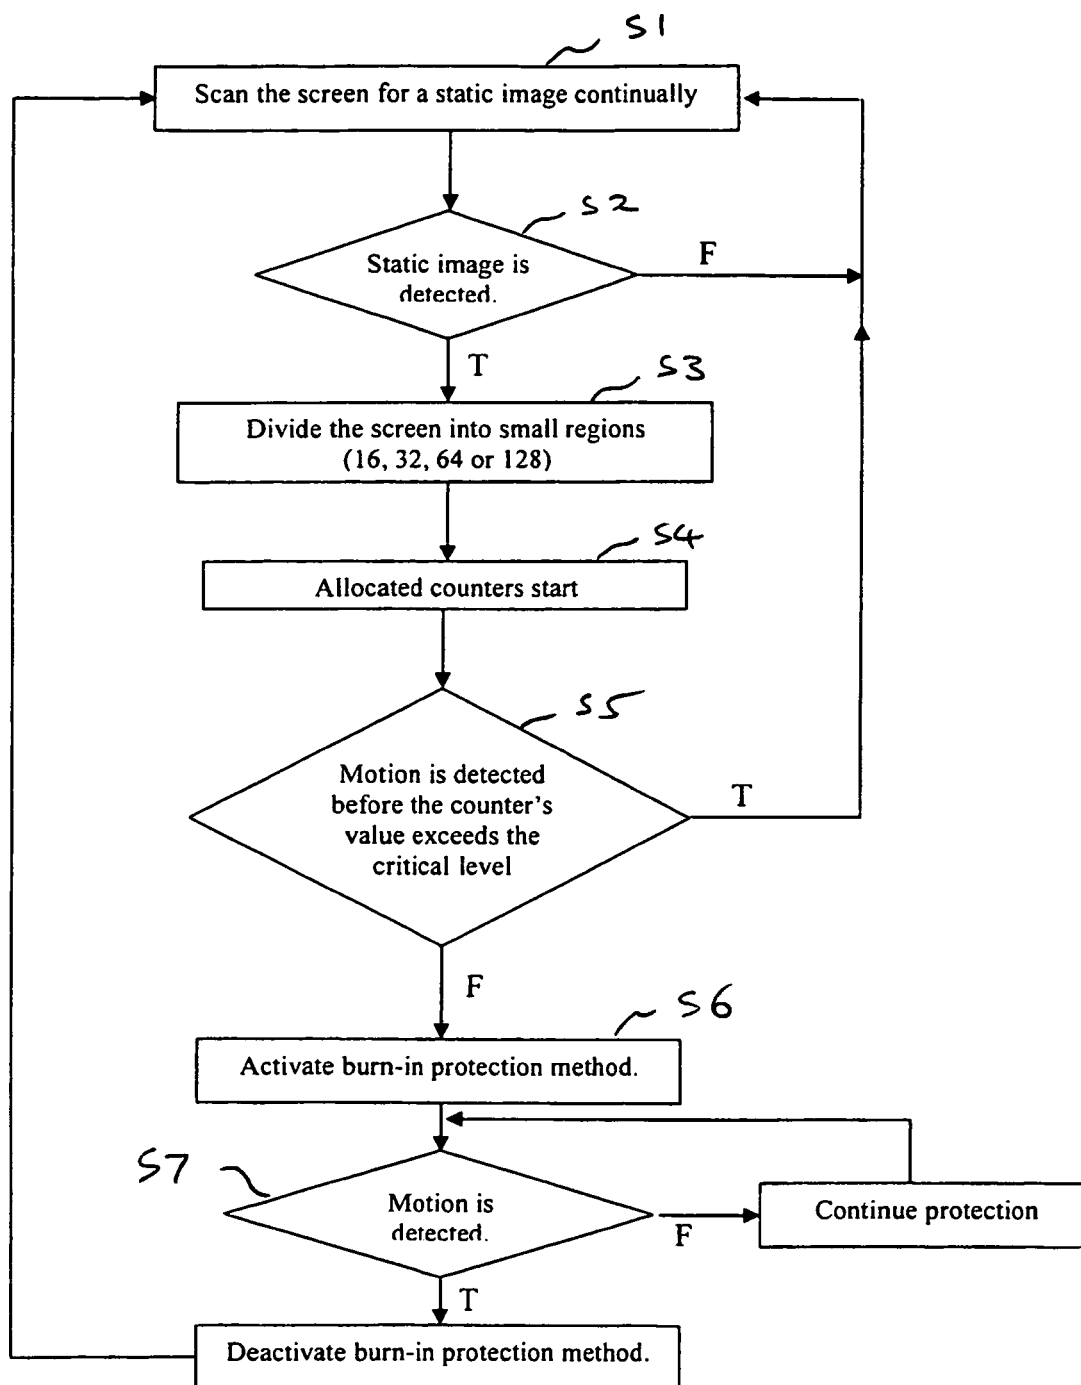


Figure 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1503360 A [0005]
- WO 2003034718 A [0005]
- EP 1489589 A [0007]
- JP 10161629 A [0008]